

# FCC Part 15C

## Measurement and Test Report

For

FUZHOU ESUN ELECTRONIC CO.,LTD

**FCC ID: 2APN2-EN2050**

<b>FCC Rule(s):</b>	<u>FCC Part 15.231(e)</u>
<b>Product Description:</b>	<u>WIRELESS MEAT THERMOMETER WITH DUAL PROBES</u>
<b>Tested Model:</b>	<u>EN2050</u>
<b>Report No.:</b>	<u>BSL180484998A0001Y-ER-1</u>
<b>Tested Date:</b>	<u>Apr 15~25, 2018</u>
<b>Issued Date:</b>	<u>Apr 26, 2018</u>
<b>Tested By:</b>	<u>Lisa. Li / Engineer</u> <i>Lisa. Li</i>
<b>Reviewed By:</b>	<u>arno. Liu / EMC Manager</u> <i>arno. Liu</i>
<b>Approved &amp; Authorized By:</b>	<u>Mike mo / PSQ Manager</u> <i>Mike mo</i>
<b>Prepared By:</b>	

**BSL Testing Co.,LTD.**

NO. 24, ZH Park, Nantou, Shenzhen, 518000 China

Tel: 86- 755-26508703

Fax: 86- 755-26508703

---

**TABLE OF CONTENTS**

---

<b>1. GENERAL INFORMATION.....</b>	<b>3</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	4
1.3 TEST METHODOLOGY.....	4
1.4 TEST FACILITY.....	4
1.5 EUT SETUP AND TEST MODE.....	4
1.5 EUT SETUP AND TEST MODE.....	5
1.6 MEASUREMENT UNCERTAINTY.....	5
1.7 TEST EQUIPMENT LIST AND DETAILS.....	6
<b>2. SUMMARY OF TEST RESULTS.....</b>	<b>7</b>
<b>3. ANTENNA REQUIREMENT.....</b>	<b>8</b>
3.1 STANDARD APPLICABLE.....	8
3.2 TEST RESULT.....	8
<b>4. CONDUCTED EMISSIONS.....</b>	<b>9</b>
4.1 TEST PROCEDURE.....	9
4.2 BASIC TEST SETUP BLOCK DIAGRAM.....	9
4.3 ENVIRONMENTAL CONDITIONS.....	9
4.4 TEST RECEIVER SETUP.....	9
4.5 SUMMARY OF TEST RESULTS/PLOTS.....	10
4.6 CONDUCTED EMISSIONS TEST DATA.....	10
<b>5. RADIATED EMISSIONS.....</b>	<b>11</b>
5.1 STANDARD APPLICABLE.....	11
5.2 TEST PROCEDURE.....	12
5.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	13
5.4 ENVIRONMENTAL CONDITIONS.....	13
5.5 SUMMARY OF TEST RESULTS/PLOTS.....	13
<b>6. 20DB BANDWIDTH.....</b>	<b>15</b>
6.1 STANDARD APPLICABLE.....	15
6.1 TEST PROCEDURE.....	15
6.2 ENVIRONMENTAL CONDITIONS.....	15
6.3 SUMMARY OF TEST RESULTS/PLOTS.....	15
<b>7. TRANSMISSION TIME.....</b>	<b>17</b>
7.1 STANDARD APPLICABLE.....	17
7.2 TEST PROCEDURE.....	17
7.3 ENVIRONMENTAL CONDITIONS.....	17
7.4 SUMMARY OF TEST RESULTS/PLOTS.....	17
<b>8. DUTY CYCLE.....</b>	<b>19</b>
8.1 STANDARD APPLICABLE.....	19
8.2 TEST PROCEDURE.....	19
8.3 ENVIRONMENTAL CONDITIONS.....	19
8.4 SUMMARY OF TEST RESULTS.....	19

---

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

**Applicant:** FUZHOU ESUN ELECTRONIC CO.,LTD  
**Address of applicant:** D Third Floor Industrial Factory Juyuan Zhou Park 32 Jinshan Industrial Zone Jinshan Avenue 618 Jianxin Town Cangshan District Fuzhou Fujian China  
**Manufacturer:** FUZHOU ESUN ELECTRONIC CO.,LTD  
**Address of manufacturer:** D Third Floor Industrial Factory Juyuan Zhou Park 32 Jinshan Industrial Zone Jinshan Avenue 618 Jianxin Town Cangshan District Fuzhou Fujian China

General Description of EUT	
Product Name:	WIRELESS MEAT THERMOMETER WITH DUAL PROBES
Trade Name:	N/A
Model No.:	EN2050
Adding Model(s):	N/A
Rated Voltage:	DC 3.0V Form 2*AAA Battery
Power Adapter Model:	N/A

Technical Characteristics of EUT	
Frequency Range:	433.92 MHz
Max. Field Strength:	86.2dBuV/m(@1m,peak,Horizontal)
Data Rate:	N/A
Modulation:	ASK
Antenna Type:	Spring antenna
Antenna Gain:	0dBi

## 1.2 Test Standards

The following report is prepared on behalf of the Shenzhen Petwant Pet Products Co.,Ltd.  
in accordance with FCC Part 15, Subpart C, and section 15.231, 15.203, 15.205 and 15.209 of the Federal Communication Commission's rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.231, 15.203, 15.205 and 15.209 of the Federal Communication Commission's rules.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission/immunity, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard for Testing Unlicensed Wireless Devices, and ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

## 1.4 Test Facility

BSL Testing Co.,LTD.

NO. 24, ZH Park, Nantou, Shenzhen, 518000 China

Designation Number : CN1217

Test Firm Registration Number: 866035


Tel: 86- 755-26508703

Fax: 86- 755-26508703

## 1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

### TX Mode

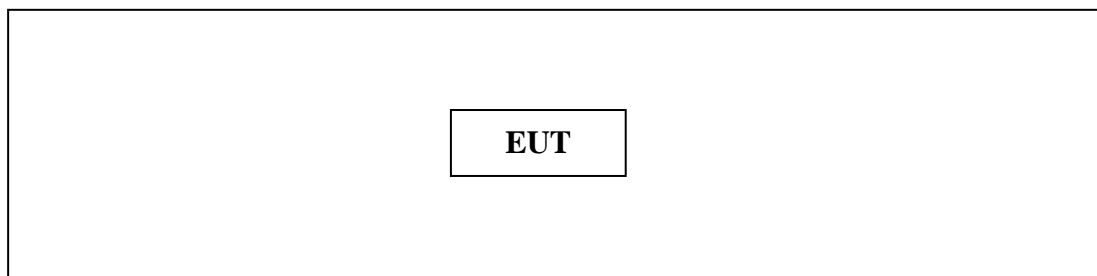

## 1.5 EUT Setup and Test Mode

The EUT was operated at continuous transmitting mode that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	Transmitting	Modulation
TM2		
TM3		

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

## 1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Transmission Time	Conducted	$\pm 5\%$
Conducted Emissions	Conducted	$\pm 2.88\text{dB}$
Transmitter Spurious Emissions	Radiated	$\pm 5.1\text{dB}$

**1.7 Test Equipment List and Details**

Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
Communication Tester	Rohde & Schwarz	CMW500	100358	2017-10-21	2018-10-20
Spectrum Analyzer	R&S	FSP40	100550	2017-10-21	2018-10-20
Test Receiver	R&S	ESCI7	US47140102	2017-10-21	2018-10-20
Signal Generator	HP	83630B	3844A01028	2017-10-22	2018-10-21
Test Receiver	R&S	ESPI-3	100180	2017-10-21	2018-10-20
Amplifier	Agilent	8449B	4035A00116	2017-10-22	2018-10-21
Amplifier	HP	8447E	2945A02770	2017-10-22	2018-10-21
Signal Generator	IFR	2023A	202307/242	2017-10-22	2018-10-21
Broadband Antenna	SCHAFFNER	2774	2774	2017-10-17	2018-10-16
Biconical and log periodic antennas	ELECTRO-METRIC	EM-6917B-1	171	2017-10-17	2018-10-16
Horn Antenna	R&S	HF906	100253	2017-10-17	2018-10-16
Horn Antenna	EM	EM-6961	6462	2017-10-17	2018-10-16
LISN	R&S	ESH3-Z5	100196	2017-10-17	2018-10-16
LISN	COM-POWER	LI-115	02027	2017-10-17	2018-10-16
3m Semi-Anechoic Chamber	Chengyu Electron	9 (L)*6 (W)* 6 (H)	BSL086	2017-10-21	2018-10-20
Horn Antenna	A-INFOMW	LB-180400KF	BSL088	2017-10-21	2018-10-20

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 15.203	Antenna Requirement	Compliant
§ 15.207(e)	Conducted Emission	N/A
§15.231(e)	Release Time	Compliant
	Radiation Emission	Compliant
	20 dB Bandwidth	Compliant
	Duty Cycle	Compliant

Note: PASS: applicable, N/A: not applicable.

### **3. Antenna Requirement**

---

#### **3.1 Standard Applicable**

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### **3.2 Test Result**

This product has a permanent antenna, fulfill the requirement of this section.

---



4. Conducted Emissions


4.1 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

4.2 Basic Test Setup Block Diagram

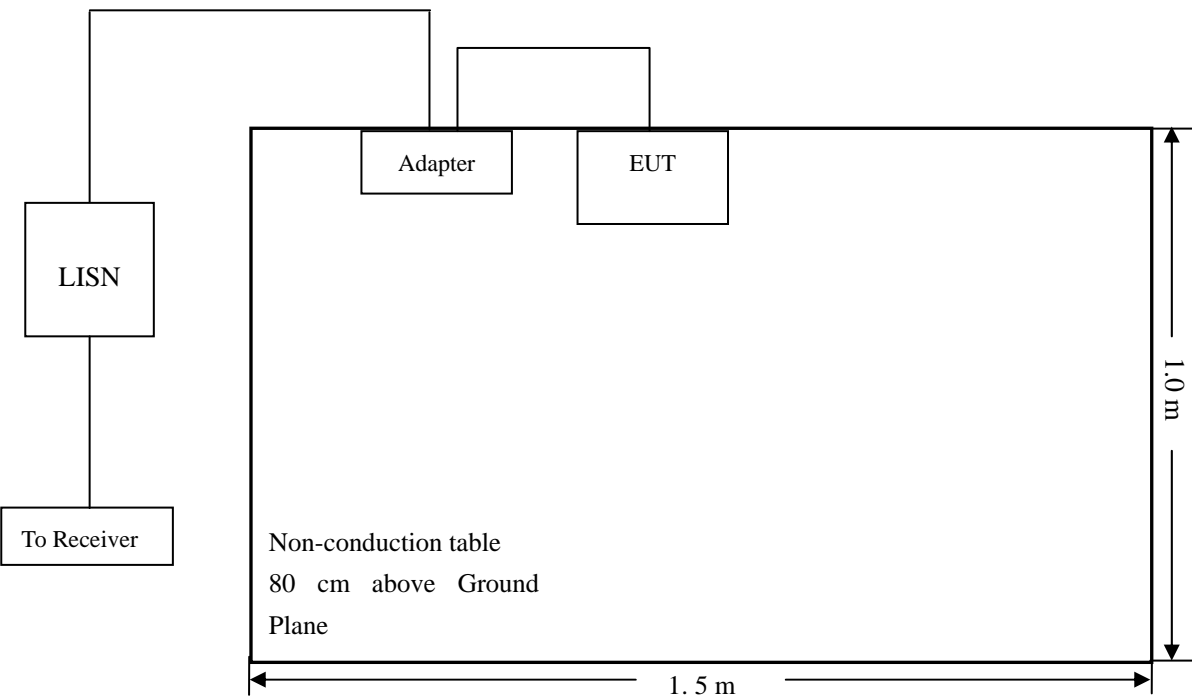

4.3 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

4.4 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

- Start Frequency ..... 150 kHz
- Stop Frequency..... 30 MHz
- Sweep Speed ..... Auto
- IF Bandwidth..... 10 kHz
- Quasi-Peak Adapter Bandwidth ..... 9 kHz

Quasi-Peak Adapter Mode ..... Normal

#### 4.5 Summary of Test Results/Plots

According to the data in section 4.7, the EUT complied with the FCC Part 15.207 Conducted margin for a Class B device, with the *worst* margin reading of:

**-12.74 dB at 1.462 MHz** in the **Neutral** mode, **Average** detector, 0.15-30MHz

#### 4.6 Conducted Emissions Test Data

The test not applicable.

---

## 5. Radiated Emissions

---

### 5.1 Standard Applicable

According to §15.231(b), the field strength of emissions from intentional radiators operated under this section shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (microvolts/meter)	Field Strength of Spurious Emissions (microvolts/meter)
40.66 - 40.70	2,250	225
70 - 130	1,250	125
130 - 174	1,250 to 3,750 **	125 to 375 **
174 - 260	3,750	375
260 - 470	3,750 to 12,500 **	375 to 1,250 **
Above 470	12,500	1,250

---

\*\* linear interpolations

The limits on the field strength of the spurious emissions in the above table are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in §15.209, whichever limit permits a higher field strength.



The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

Compliance with the provisions of §15.205 shall be demonstrated using the measurement instrumentation specified in that section.

---

## 5.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.231(b) and FCC Part 15.209 Limit.

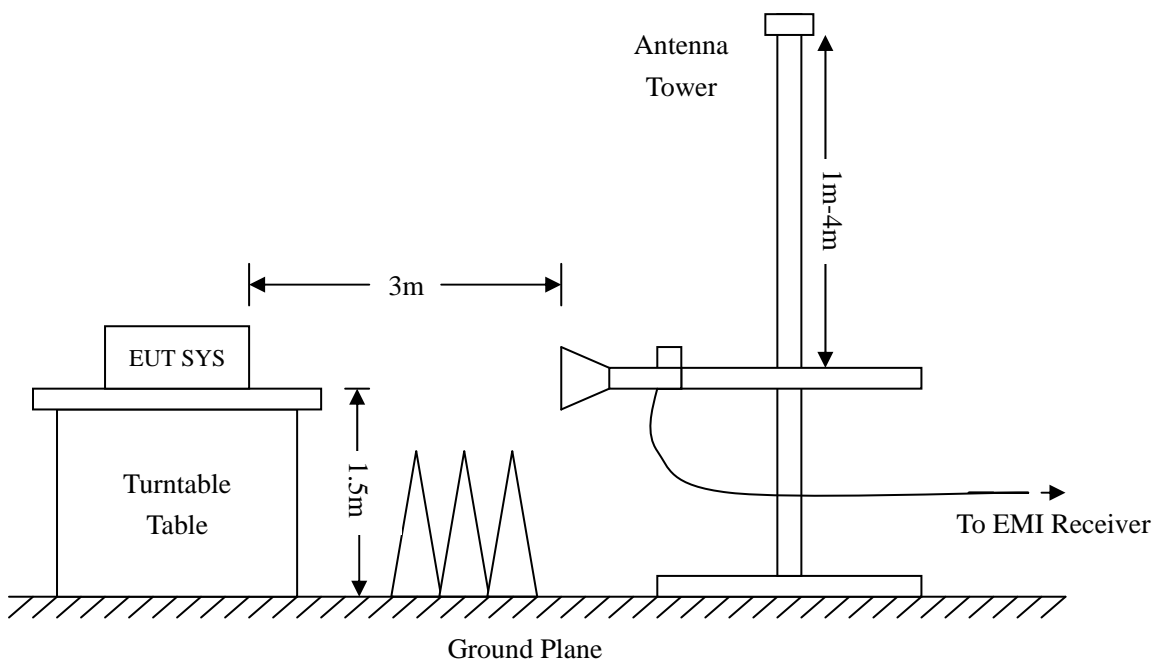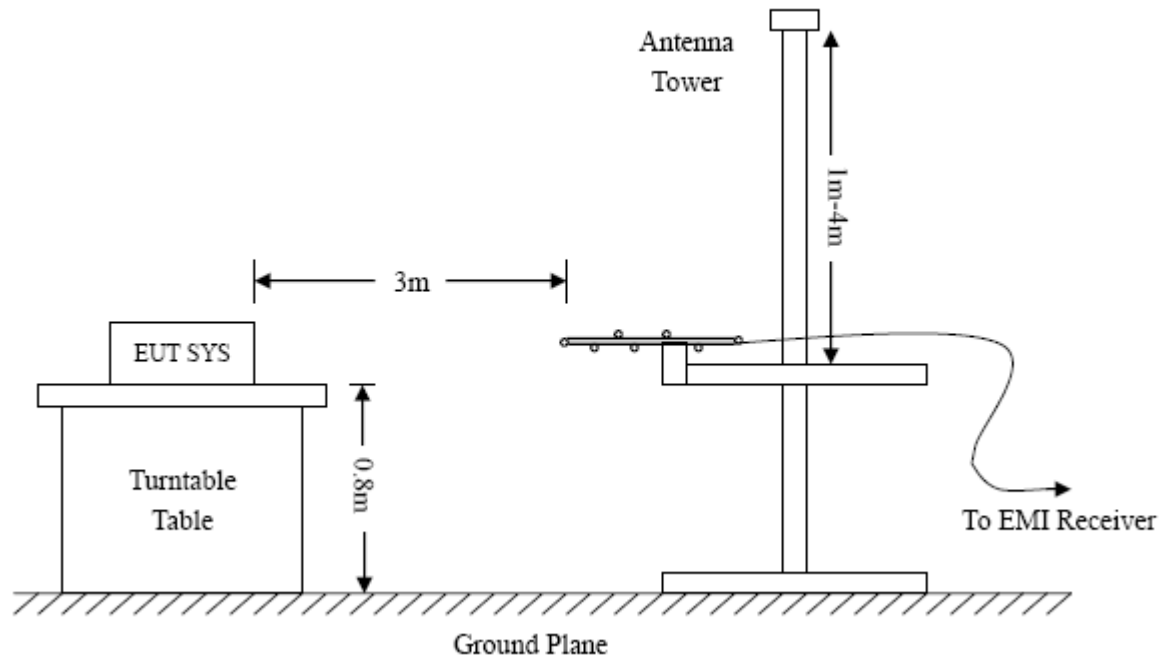

### 5.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Loss} + \text{Cab. Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB $\mu$ V means the emission is 6dB $\mu$ V below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15C Limit}$$

### 5.4 Environmental Conditions

Temperature:	21° C
Relative Humidity:	50%
ATM Pressure:	1011 mbar

### 5.5 Summary of Test Results/Plots

According to the data below, the FCC Part 15.205, 15.209 and 15.231 standards, and had the worst margin of:

**-4.63 dB at 433.92 MHz in the Horizontal polarization, Peak Detector, 9 kHz to 5 GHz, 1 Meters**

*Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.*

---

*Horizontal*

Below 1GHz									
Frequency	Reading	Corr.	Duty cycle	Result	Limit	Margin	Deg.	Height	Remark
MHz	dBuV/m	Factor(dB)	Factor(dB)	dBuV/m	dBuV/m	(dB)	( ° )	(cm)	
433.9200	84.01	-2.19	N/A	86.20	100.83	-14.63	112	100	peak
433.9200	/	/	-6.02	73.20	80.83	-7.63	152	100	Ave
867.8400	45.01	4.63	N/A	49.64	80.83	-31.19	63	100	peak
867.8400	/	/	-6.02	29.64	60.83	-31.19	156	100	Ave
Above 1GHz									
1301.760	64.82	-12.91	N/A	51.91	74.00	-22.09	152	100	Peak
1735.680	51.99	-9.20	N/A	42.79	74.00	-31.21	41	100	Peak
1301.760	/	/	-6.02	31.91	54.00	-22.09	265	100	Ave
1735.680	/	/	-6.02	22.79	54.00	-31.21	251	100	Ave

*Vertical*

Below 1GHz									
Frequency	Reading	Corr.	Duty cycle	Result	Limit	Margin	Deg.	Height	Remark
MHz	dBuV/m	Factor(dB)	Factor(dB)	dBuV/m	dBuV/m	(dB)	( ° )	(cm)	
433.9200	81.85	-2.19	N/A	79.66	100.83	-21.17	232	100	peak
433.9200		/	-6.02	70.1	80.83	-10.73	120	100	Ave
867.8400	42.85	4.63	N/A	47.48	80.83	-33.35	62	100	peak
867.8400		/	-6.02	31.74	60.83	-29.09	132	100	Ave
Above 1GHz									
1301.760	62.66	-12.91	N/A	49.75	74.00	-24.25	115	100	Peak
1735.680	49.83	-9.20	N/A	40.63	74.00	-33.37	41	100	Peak
1301.760	/	/	-6.02	34.27	54.00	-19.73	23	100	Ave
1735.680	/	/	-6.02	23.99	54.00	-30.01	256	100	Ave

*Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, which above 5<sup>th</sup> Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*

*The measurements greater than 20dB below the limit from 9kHz to 30MHz..*

*The fundamental frequency is 433.92MHz, so the fundamental and spurious emissions radiated limit base on the the operating frequency 433.92MHz.*

## 6. 20dB Bandwidth

---

### 6.1 Standard Applicable

According to FCC Part 15.231(c), The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

### 6.1 Test Procedure

With the EUT's antenna attached, the EUT's 20dBc Bandwidth power was received by the test antenna, which was connected to the spectrum analyzer with the START, and STOP frequencies set to the EUT's operation band.

### 6.2 Environmental Conditions

Temperature:	21° C
Relative Humidity:	52%
ATM Pressure:	1011 mbar

### 6.3 Summary of Test Results/Plots


Test Frequency MHz	20dBc Bandwidth kHz	Limit kHz	Result
433.92	60.4	1084	Pass

Limit = Fundamental Frequency X 0.25% = 433.92 MHz X 0.25% = 1084 kHz

*Please refer to the attached plots.*

---

20dBc Bandwidth Test Plot

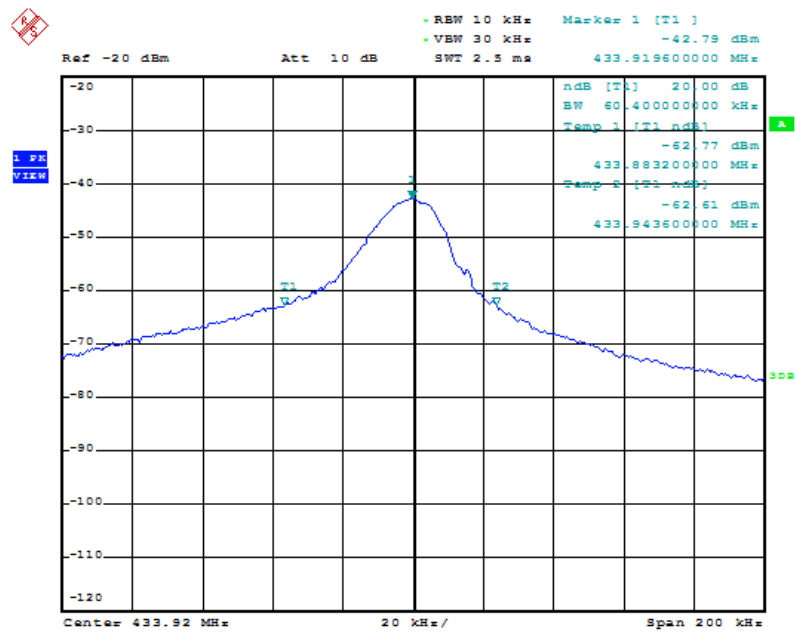



---

## 7. Transmission Time

---

### 7.1 Standard Applicable

According to FCC Part 15.231 (e), the transmitter shall be complied the following requirements:

- 1) According to FCC Part 15.231 (e), the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.

### 7.2 Test Procedure

With the EUT's antenna attached, the EUT's output signal was received by the test antenna, which was connected to the spectrum analyzer. Set the center frequency to 433.92MHz, than set the spectrum analyzer to Zero Span for the release time reading. During the testing, the switch was released then the EUT automatically deactivated.

### 7.3 Environmental Conditions

Temperature:	20° C
Relative Humidity:	52%
ATM Pressure:	1011 mbar


### 7.4 Summary of Test Results/Plots

Release Time(s)	Limit(s)	Result
0.57	1	PASS
Silent period(s)	Limit(s)	Result
21.35	>10s >30* Release Time	PASS
<b>Note: 30* Release Time=17.1s</b>		


*Please refer to the attached plots.*

---

Transmission Time:

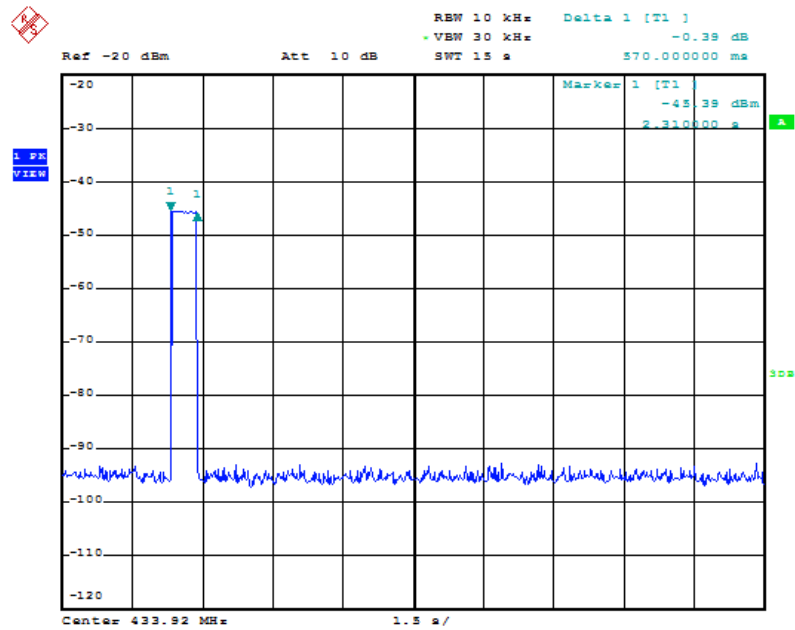

Silent period:

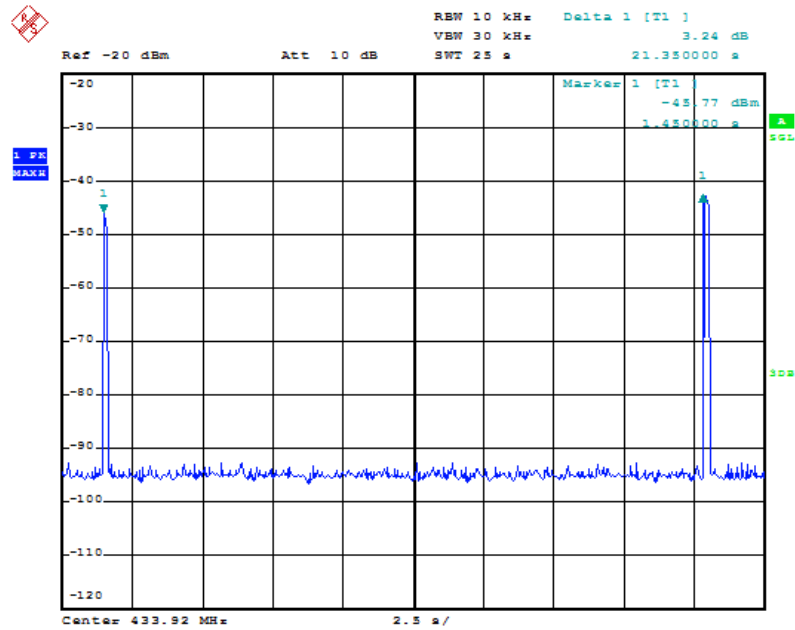

---

## 8. Duty Cycle

---

### 8.1 Standard Applicable

According to FCC Part 15.231 (b)(2) and 15.35 (c), For pulse operation transmitter, the averaging pulsed emissions are calculated by peak value of measured emission plus duty cycle factor.

### 8.2 Test Procedure

With the EUT's antenna attached, the EUT's output signal was received by the test antenna, which was connected to the spectrum analyzer. Set the center frequency to 433.92MHz, than set the spectrum analyzer to Zero Span for the release time reading. During the testing, the switch was released then the EUT automatically deactivated.

### 8.3 Environmental Conditions

Temperature:	20° C
Relative Humidity:	52%
ATM Pressure:	1011 mbar

### 8.4 Summary of Test Results


Type of Pulse	Width of Pulse	Quantity of Pulse	Transmission Time	Total Time (T <sub>on</sub> )
	ms		ms	ms
Pulse 1 (Wide)	1.5	12	18	26.58
Pulse 2 (Narrow)	0.66	13	8.58	

Test Period (T <sub>p</sub> )	Total Time (T <sub>on</sub> )	Duty Cycle	Duty Cycle Factor
ms	ms	%	dB
53.44	26.58	50	-6.02


*Please refer to the attached test plots*

---


Pulse 1 (Wide):

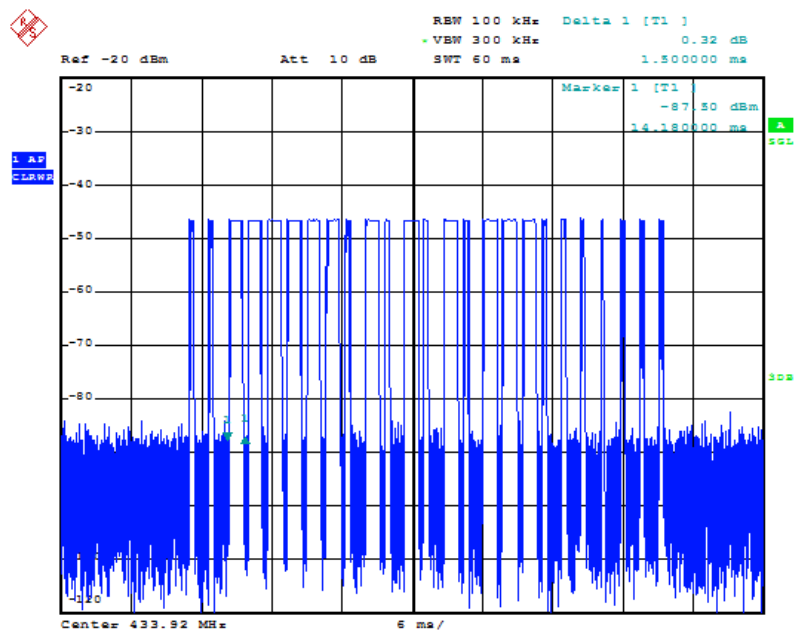

Pulse 2 (Narrow):

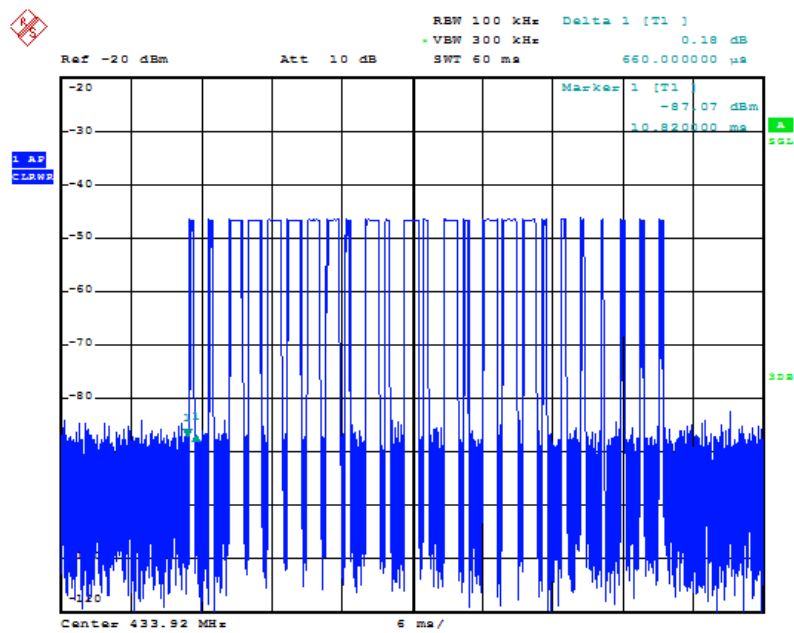

Test Period:

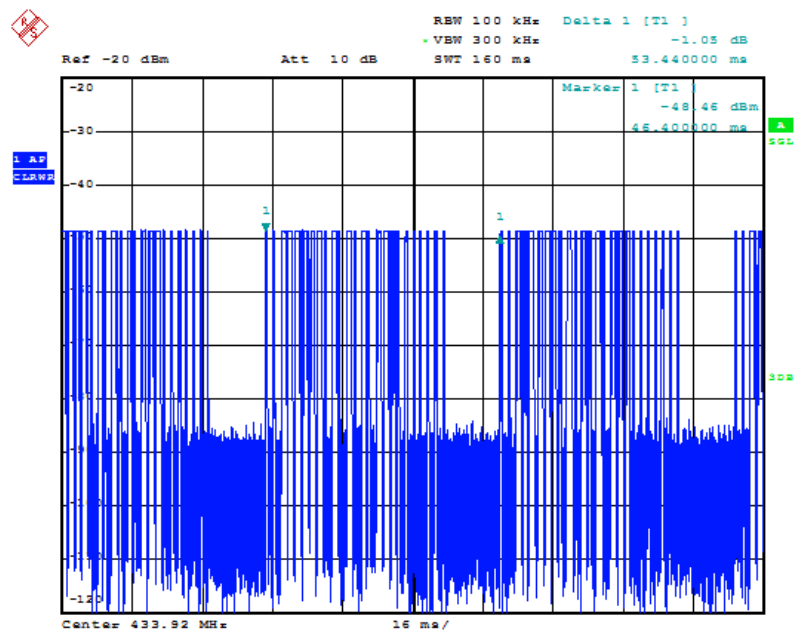

\*\*\*\*\* END OF REPORT \*\*\*\*\*