



# CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China

Tel: +86-755-27521059 Fax: +86-755-27521011 <http://www.sz-ctc.org.cn>

## TEST REPORT

**Report No.** ..... : **CTC20240000E02**

**FCC ID**..... : **2APN5PANELPRO120**

**IC** ..... : **29127-PANELPRO120**


**Applicant** ..... : **Shenzhen Sonoff Technologies Co.,Ltd.**

Address..... : 3F & 6F, Bldg A, No. 663, Bulong Rd, Shenzhen, Guangdong, China

Manufacturer..... : Shenzhen Sonoff Technologies Co.,Ltd.

Address..... : 3F & 6F, Bldg A, No. 663, Bulong Rd, Shenzhen, Guangdong, China

**Product Name** ..... : **Smart Home Control Panel**

Trade Mark ..... :  **SONOFF**, Sonoff

Model/Type reference..... : NSPanel120PW

Listed Model(s) ..... : NSPanel120PB

**Standard** ..... : **FCC CFR Title 47 Part 15 Subpart C Section 15.247  
RSS-247 Issue 3**

Date of receipt of test sample..... : Jan. 2, 2024

Date of testing..... : Jan. 2, 2024 to Mar. 8, 2024

Date of issue..... : May 6, 2024

**Result**..... : **PASS**

Compiled by:		
(Printed name+signature)	Jim Jiang	
Supervised by:		
(Printed name+signature)	Eric Zhang	
Approved by:		
(Printed name+signature)	Totti Zhao	

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CTC. The Test Result in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CTC within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit. The test report merely corresponds to the test sample.



Table of Contents

Page

- 1. TEST SUMMARY ..... 3
  - 1.1. TEST STANDARDS..... 3
  - 1.2. REPORT VERSION ..... 3
  - 1.3. TEST DESCRIPTION..... 3
  - 1.4. TEST FACILITY ..... 4
  - 1.5. MEASUREMENT UNCERTAINTY ..... 5
  - 1.6. ENVIRONMENTAL CONDITIONS..... 5
- 2. GENERAL INFORMATION ..... 6
  - 2.1. CLIENT INFORMATION ..... 6
  - 2.2. GENERAL DESCRIPTION OF EUT ..... 6
  - 2.3. ACCESSORY EQUIPMENT INFORMATION ..... 7
  - 2.4. OPERATION STATE ..... 8
  - 2.5. MEASUREMENT INSTRUMENTS LIST ..... 9
- 3. TEST ITEM AND RESULTS ..... 11
  - 3.1. CONDUCTED EMISSION..... 11
  - 3.2. RADIATED EMISSION ..... 14
  - 3.3. BAND EDGE EMISSIONS (RADIATED) ..... 28
  - 3.4. BAND EDGE AND SPURIOUS EMISSIONS (CONDUCTED) ..... 41
  - 3.5. 20dB BANDWIDTH..... 51
  - 3.6. CHANNEL SEPARATION..... 56
  - 3.7. NUMBER OF HOPPING CHANNEL ..... 58
  - 3.8. DWELL TIME ..... 60
  - 3.9. PEAK OUTPUT POWER ..... 64
  - 3.10. DUTY CYCLE ..... 66
  - 3.11. ANTENNA REQUIREMENT ..... 70



# 1. TEST SUMMARY

## 1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Operation within the bands 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz.

[RSS-247 Issue 3](#): Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices.

[RSS-Gen Issue 5](#): General Requirements for Compliance of Radio Apparatus.

[ANSI C63.10-2013](#): American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

## 1.2. Report Version

Revised No.	Report No.	Date of issue	Description
01	CTC20240000E02	May 6, 2024	Original

## 1.3. Test Description

FCC Part 15 Subpart C (15.247) / RSS-247 Issue 3				
Test Item	Standard Section		Result	Test Engineer
	FCC	IC		
Antenna Requirement	15.203	RSS-Gen 6.8	Pass	Jim Jiang
Conducted Emission	15.207	RSS-Gen 8.8	Pass	Jim Jiang
Restricted Bands	15.205	RSS-Gen 8.10	Pass	Jim Jiang
Hopping Channel Separation	15.247(a)(1)	RSS-247 5.1 (b)	Pass	Jim Jiang
Dwell Time	15.247(a)(iii)	RSS-247 5.1 (d)	Pass	Jim Jiang
Peak Output Power	15.247(b)(1)	RSS-247 5.4 (b)	Pass	Jim Jiang
Number of Hopping Frequency	15.247(a)(iii)	RSS-247 5.1 (d)	Pass	Jim Jiang
Conducted Band Edge and Spurious Emissions	15.247(d)	RSS-247 5.5	Pass	Jim Jiang
Radiated Band Edge and Spurious Emissions	15.205&15.209&15.247(d)	RSS-247 5.5	Pass	Jim Jiang
Radiated Spurious Emission	15.247(d) &15.209	RSS-247 5.5&RSS-Gen 8.9	Pass	Jim Jiang
20dB Bandwidth	15.247(a)	RSS-247 5.1 (b)	Pass	Jim Jiang

Note:

- The measurement uncertainty is not included in the test result.
- N/A: means this test item is not applicable for this device according to the technology characteristic of device.

CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : <http://yz.cnca.cn>



## 1.4. Test Facility

### Address of the report laboratory

#### CTC Laboratories, Inc.

Add: 2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China

### Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

#### A2LA-Lab Cert. No.: 4340.01

CTC Laboratories, Inc. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

#### Industry Canada (Registration No.: 9783A, CAB Identifier: CN0029)

CTC Laboratories, Inc. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 9783A on Jan, 2016.

#### FCC (Registration No.: 951311, Designation Number CN1208)

CTC Laboratories, Inc. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 951311, Aug 26, 2017.



## 1.5. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 “Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 1” and TR-100028-02 “Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2” and is documented in the CTC Laboratories, Inc. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Below is the best measurement capability for CTC Laboratories, Inc.

Test Items	Measurement Uncertainty	Notes
20dB Emission Bandwidth	±0.0196%	(1)
Carrier Frequency Separation	±1.9%	(1)
Number of Hopping Channel	±1.9%	(1)
Time of Occupancy	±0.028%	(1)
Max Peak Conducted Output Power	±0.743 dB	(1)
Band-edge Spurious Emission	±1.328 dB	(1)
Conducted RF Spurious Emission	9kHz-1GHz: ±0.746dB 1GHz-26GHz: ±1.328dB	(1)
Conducted Emissions 9kHz~30MHz	±3.08 dB	(1)
Radiated Emissions 30~1000MHz	±4.51 dB	(1)
Radiated Emissions 1~18GHz	±5.84 dB	(1)
Radiated Emissions 18~40GHz	±6.12 dB	(1)

Note (1): This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 1.6. Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15 °C to 35 °C
Relative Humidity:	20 % to 75 %
Air Pressure:	101 kPa




## 2. GENERAL INFORMATION

### 2.1. Client Information

Applicant:	Shenzhen Sonoff Technologies Co.,Ltd.
Address:	3F & 6F, Bldg A, No. 663, Bulong Rd, Shenzhen, Guangdong, China
Manufacturer:	Shenzhen Sonoff Technologies Co.,Ltd.
Address:	3F & 6F, Bldg A, No. 663, Bulong Rd, Shenzhen, Guangdong, China

### 2.2. General Description of EUT

Product Name:	Smart Home Control Panel
Trade Mark:	 SONOFF, Sonoff
Model/Type reference:	NSPanel120PW
Listed Model(s):	NSPanel120PB
Model Difference:	All these models are identical in the same PCB, layout, electrical circuit and enclosure. The difference is the model name and appearance color.
Power Supply:	Input: 100-240V~ 50/60Hz 0.15A Max
Hardware Version:	V1.1
Software Version:	V0.1.0
<b>Bluetooth 4.2 / BR+EDR</b>	
Modulation:	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Operation Frequency:	2402MHz~2480MHz
Channel Number:	79
Channel Separation:	1MHz
Antenna Type:	FPC Antenna
Antenna Gain:	2dBi



## 2.3. Accessory Equipment Information

Equipment Information			
Name	Model	S/N	Manufacturer
Notebook	ThinkPad T460s	/	Lenovo
Cable Information			
Name	Shielded Type	Ferrite Core	Length
USB Cable	Unshielded	NO	150cm
Test Software Information			
Name	Version	/	/
RTLBTAPP	5.2.2.50	/	/



## 2.4. Operation State

Operation Frequency List: The EUT has been tested under typical operating condition. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing. BT EDR, 79 channels are provided to the EUT. Channels 00/39/78 were selected for testing.

Operation Frequency List:

Channel	Frequency (MHz)
<b>00</b>	<b>2402</b>
01	2403
:	:
38	2440
<b>39</b>	<b>2441</b>
40	2442
:	:
77	2479
<b>78</b>	<b>2480</b>

Note: The display in grey were the channel selected for testing.

Test Mode:

For RF test items:
The engineering test program was provided and enabled to make EUT continuous transmit.
For AC power line conducted emissions:
The EUT was set to connect with the Bluetooth instrument under large package sizes transmission.
For Radiated spurious emissions test item:
The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

The worse case configurations:

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band		
Test Software	RTLBTAPP	
Modulation Mode	Test Channel	Power Level
GFSK, $\pi/4$ -DQPSK, 8-DPSK	00	Default
	39	Default
	78	Default





## 2.5. Measurement Instruments List

Tonscend RF Test System					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	Spectrum Analyzer	R&S	FSV40-N	101331	Mar. 14, 2024
2	Spectrum Analyzer	R&S	FSV40-N	101654	Aug. 07, 2024
3	Spectrum Analyzer	R&S	FSU26	100105	Dec. 12, 2024
4	MXA Signal Analyzer	Keysight	N9020A	MY46471737	Dec. 12, 2024
5	MXA Signal Analyzer	Keysight	N9020A	MY52091402	Aug. 22, 2024
6	MXG Vector Signal Generator	Agilent	N5182A	MY47420864	Dec. 12, 2024
7	PSG Analog Signal Generator	Agilent	E8257D	MY46521908	Dec. 12, 2024
8	EXG Analog Signal Generator	Keysight	N5173B	MY59100842	Dec. 12, 2024
9	MXG Vector Signal Generator	Keysight	N5182B	MY59100212	Dec. 12, 2024
10	USB Wideband Power Sensor	Keysight	U2021XA	MY55130004	Mar. 14, 2024
11	USB Wideband Power Sensor	Keysight	U2021XA	MY55130006	Mar. 14, 2024
12	Wideband Radio Communication Tester	R&S	CMW500	102257	May 25, 2024
13	Wideband Radio Communication Tester	R&S	CMW500	102414	Dec. 12, 2024
14	RF Control Unit	Tonscend	JS0806-2	/	Aug. 22, 2024
15	High and low temperature test chamber	ESPEC	MT3035	/	Mar. 24, 2024

Radiated Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9163	01026	Dec. 18, 2024
2	Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-647	Sep. 25, 2025
3	Test Receiver	Keysight	N9038A	MY56400071	Dec. 12, 2024
4	Broadband Amplifier	SCHWARZBECK	BBV9743B	259	Dec. 12, 2024
5	Mirowave Broadband Amplifier	SCHWARZBECK	BBV9718C	111	Dec. 12, 2024
6	3m chamber 3	YIHENG	EE106	/	Aug. 28, 2026
7	Test Software	FARA	EZ-EMC	FA-03A2	/

CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : <http://yz.cnca.cn>



Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	LISN	R&S	ENV216	101112	Dec. 12, 2024
2	LISN	R&S	ENV216	101113	Dec. 12, 2024
3	EMI Test Receiver	R&S	ESCS30	100353	Dec. 12, 2024
4	ISN CAT6	Schwarzbeck	NTFM 8158	CAT6-8158-0046	Dec. 12, 2024
5	ISN CAT5	Schwarzbeck	NTFM 8158	CAT5-8158-0046	Dec. 12, 2024
6	Test Software	R&S	EMC32	6.10.10	/

Note: 1. The Cal. Interval was one year.

2. The Cal. Interval was three years of the antenna.

3. The cable loss has been calculated in test result which connection between each test instruments.

### 3. TEST ITEM AND RESULTS

#### 3.1. Conducted Emission


**Limit**

FCC CFR Title 47 Part 15 Subpart C Section 15.207 / RSS-Gen 8.8

Frequency (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46 *
0.5 - 5	56	46
5 - 30	60	50

\* Decreases with the logarithm of the frequency.

**Test Configuration**

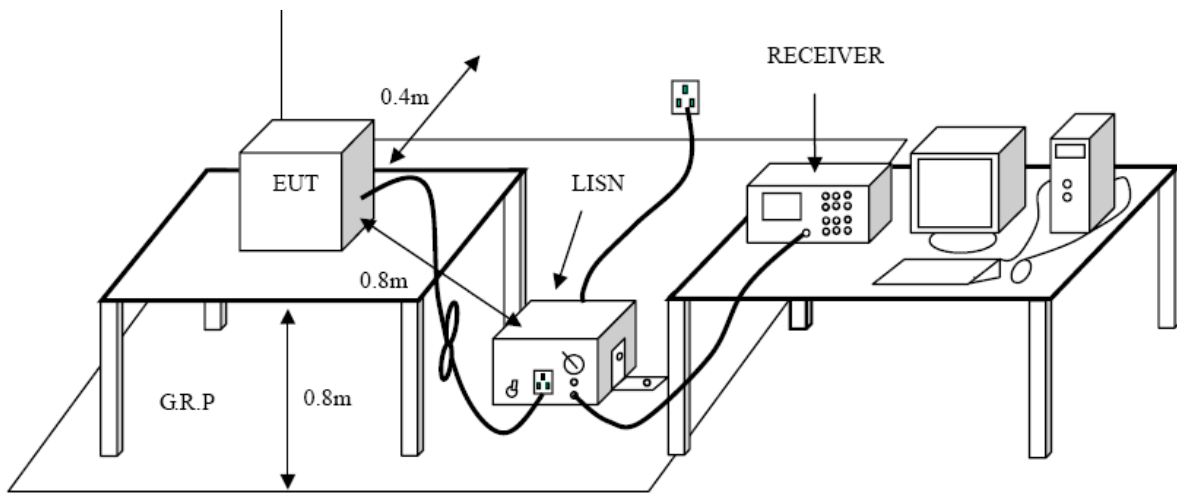

**Test Procedure**

1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm / 50 μH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.


**Test Mode**

Please refer to the clause 2.4.



Test Result

Test Voltage:	AC 120V/60Hz
Terminal:	Line
Remark:	Only worse case is reported

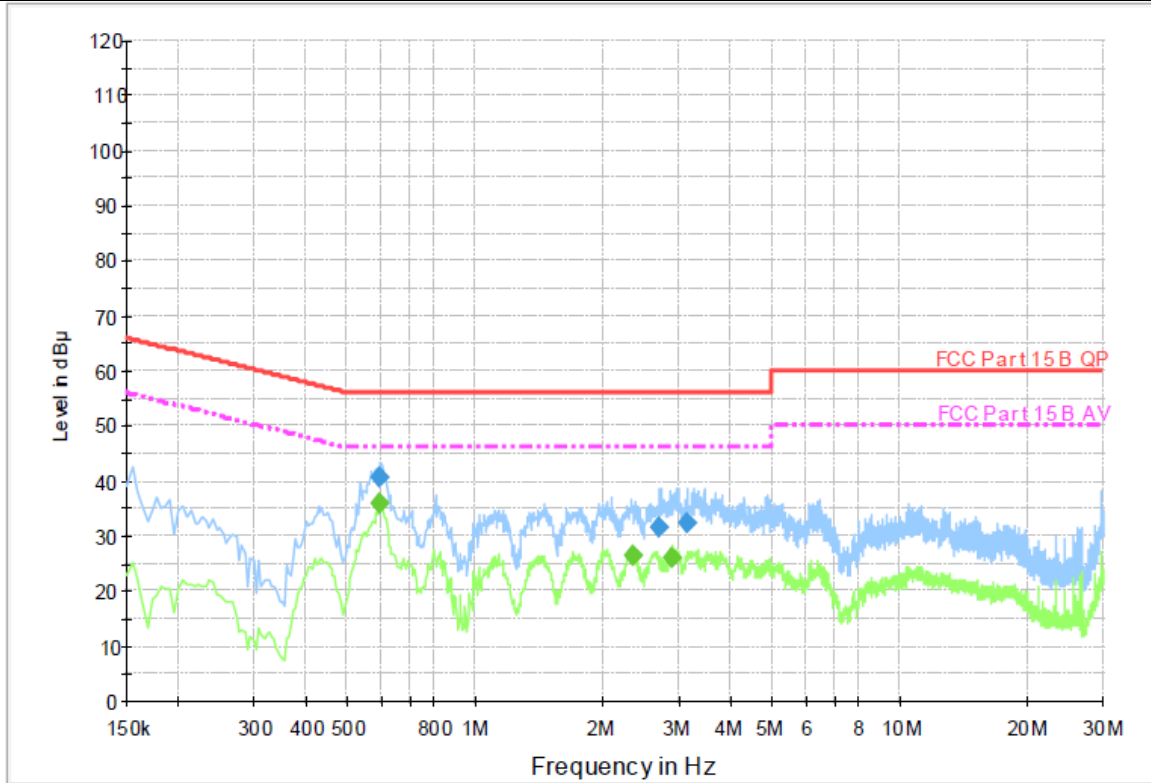

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBµ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµ V)	Comment
0.595500	40.7	1000.00	9.000	On	L1	9.5	15.3	56.0	
2.701500	31.5	1000.00	9.000	On	L1	9.5	24.5	56.0	
3.151500	32.3	1000.00	9.000	On	L1	9.5	23.7	56.0	


Final Measurement Detector 2

Frequency (MHz)	Average (dBµ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµ V)	Comment
0.595500	35.7	1000.00	9.000	On	L1	9.5	10.3	46.0	
2.355000	26.5	1000.00	9.000	On	L1	9.5	19.5	46.0	
2.904000	26.2	1000.00	9.000	On	L1	9.5	19.8	46.0	

Emission Level = Read Level + Correct Factor



<b>Test Voltage:</b>	AC 120V/60Hz
<b>Terminal:</b>	Neutral
<b>Remark:</b>	Only worse case is reported

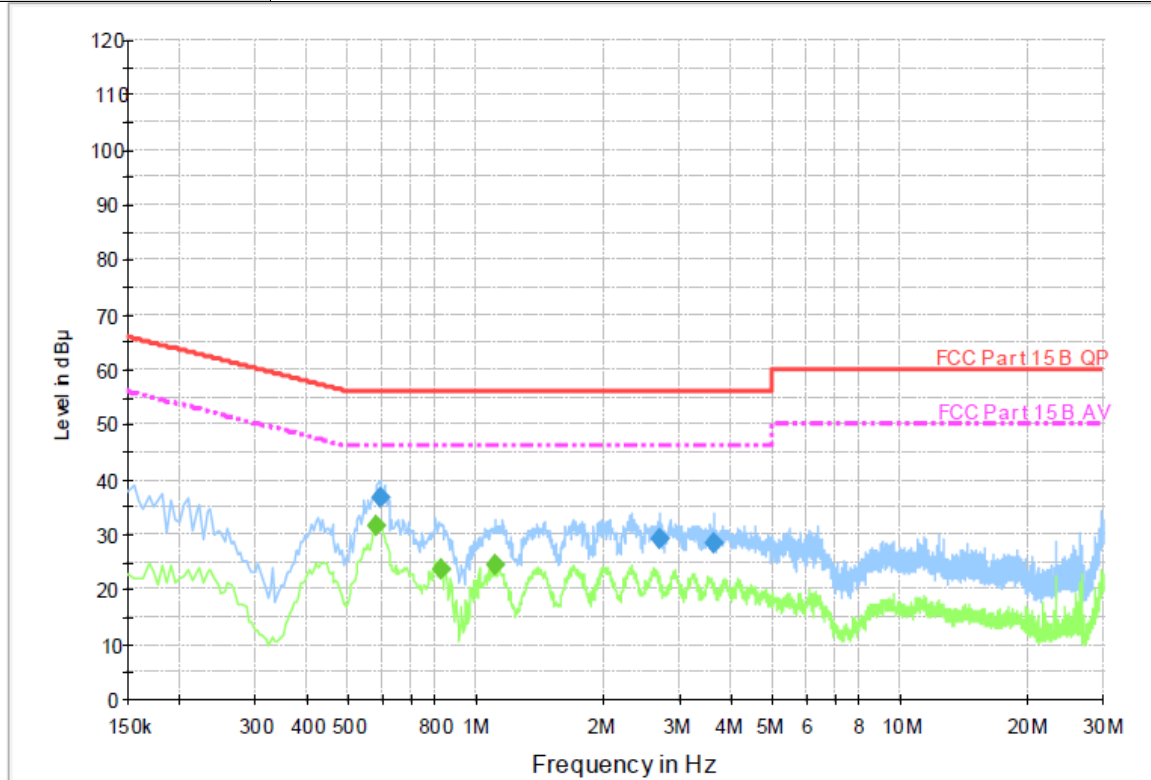

### Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμ V)	Comment
0.591000	36.7	1000.00	9.000	On	N	9.5	19.3	56.0	
2.701500	29.2	1000.00	9.000	On	N	9.5	26.8	56.0	
3.610500	28.6	1000.00	9.000	On	N	9.5	27.4	56.0	

### Final Measurement Detector 2

Frequency (MHz)	Average (dBμ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμ V)	Comment
0.582000	31.5	1000.00	9.000	On	N	9.5	14.5	46.0	
0.820500	23.5	1000.00	9.000	On	N	9.5	22.5	46.0	
1.104000	24.6	1000.00	9.000	On	N	9.5	21.4	46.0	

Emission Level = Read Level + Correct Factor



### 3.2. Radiated Emission

#### Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.209 / RSS-Gen 8.9


Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F (kHz)	300
0.490~1.705	24000/F (kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Frequency Range (MHz)	dBµV/m (at 3 meters)	
	Peak	Average
Above 1000	74	54


Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission Level (dBµV/m)=20log Emission Level (µV/m).


#### Test Configuration

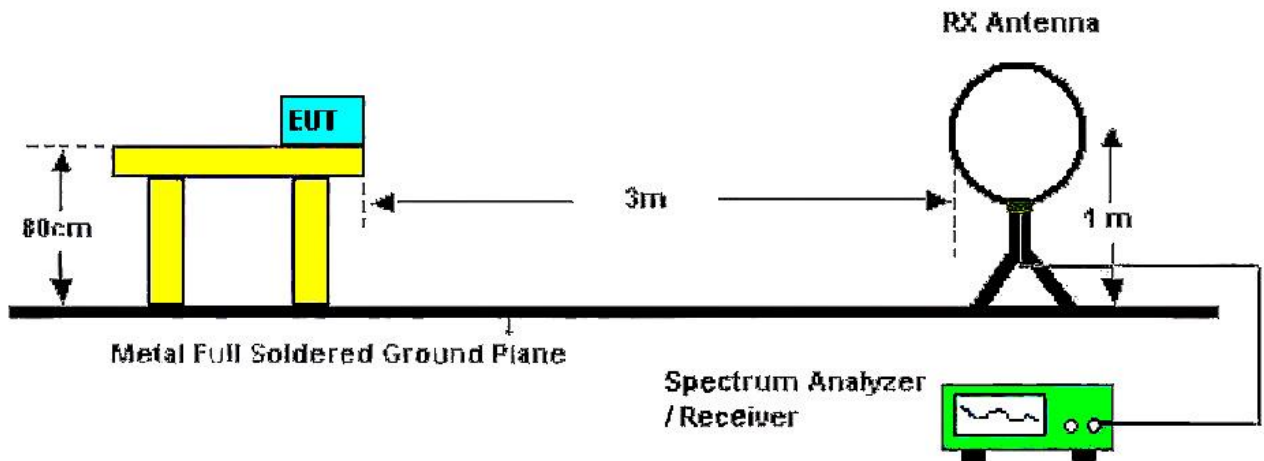

Below 30MHz Test Setup

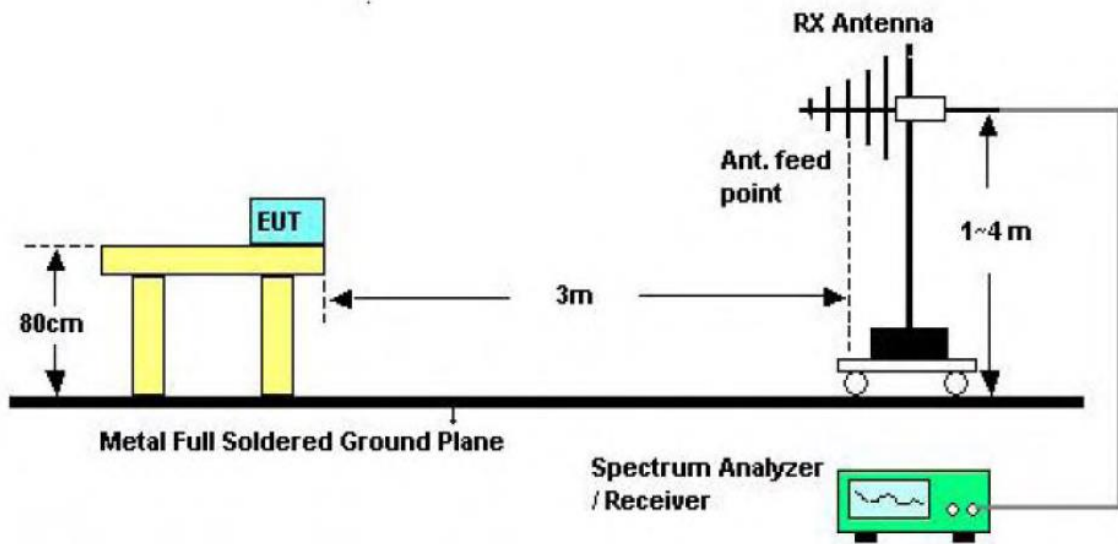

30-1000MHz Test Setup

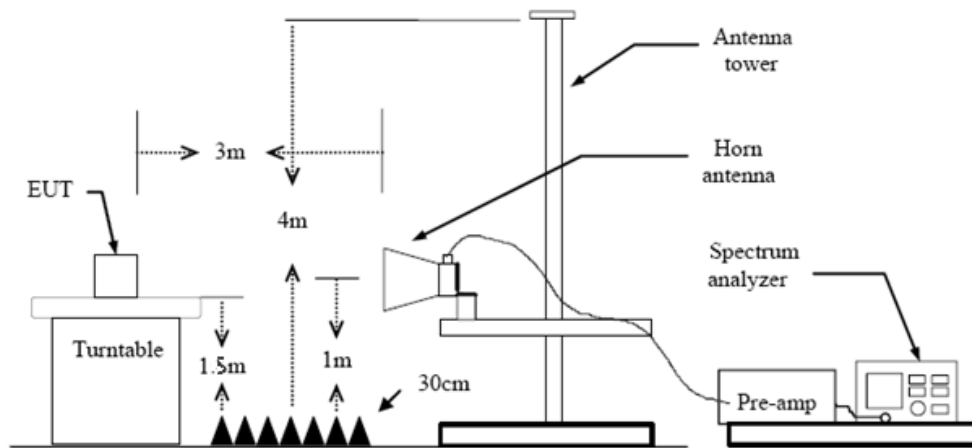

Above 1GHz Test Setup

**Test Procedure**

1. The EUT was setup and tested according to ANSI C63.10:2013.
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
  - (1) Span shall wide enough to fully capture the emission being measured;





(2) 9k – 150kHz:

RBW=300 Hz, VBW=1 kHz, Sweep=auto, Detector function=peak, Trace=max hold

(3) 0.15M – 30MHz:

RBW=10 kHz, VBW=30 kHz, Sweep=auto, Detector function=peak, Trace=max hold

(4) 30M - 1 GHz:

RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold

If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

(5) From 1 GHz to 10<sup>th</sup> harmonic:

RBW=1MHz, VBW=3MHz Peak detector for Peak value.

RBW=1MHz, VBW see note 1 with Peak Detector for Average Value.

Note 1: For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 3.10 Duty Cycle.

### **Test Mode**

Please refer to the clause 2.4.

### **Test Result**

#### **9 kHz~30 MHz**

From 9 kHz to 30 MHz: The conclusion is PASS.


Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.





30MHz-1GHz

Ant. Pol.	Horizontal
Test Mode:	TX GFSK Mode 2402MHz
Remark:	Only worse case is reported.

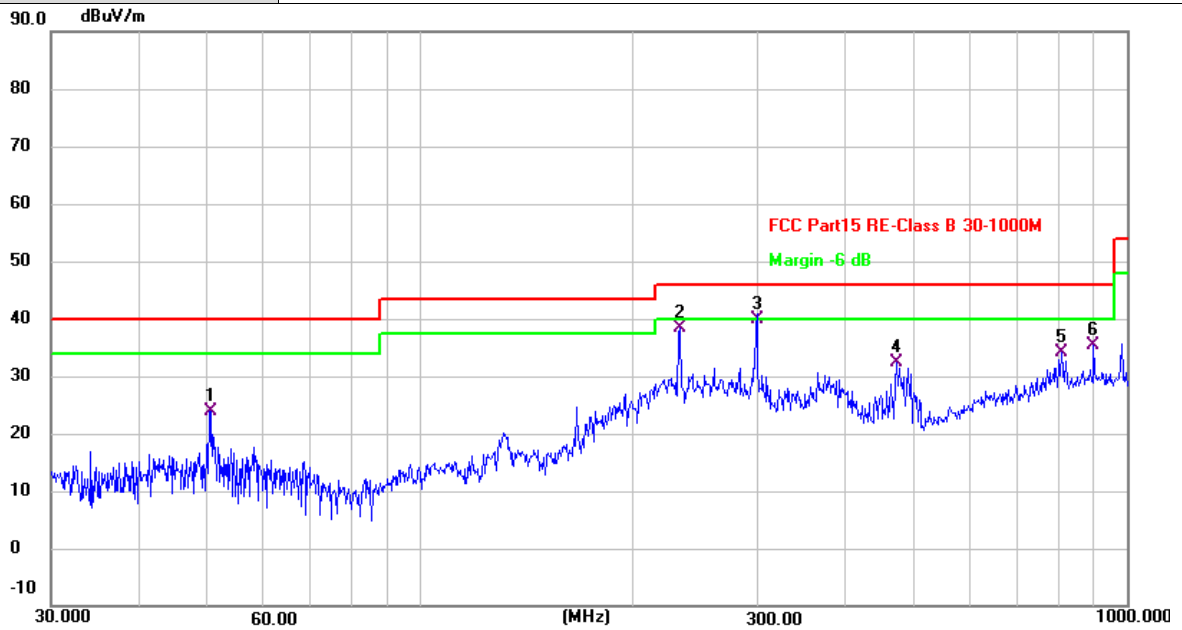


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	50.5859	37.79	-13.96	23.83	40.00	-16.17	QP
2	232.5318	53.30	-15.01	38.29	46.00	-7.71	QP
3 *	299.3158	53.40	-13.48	39.92	46.00	-6.08	QP
4	472.1759	42.18	-9.85	32.33	46.00	-13.67	QP
5	807.4289	38.34	-4.21	34.13	46.00	-11.87	QP
6	896.9964	38.48	-3.01	35.47	46.00	-10.53	QP

Remarks:  
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor  
 2. Margin value = Level -Limit value



Ant. Pol.	Vertical
Test Mode:	TX GFSK Mode 2402MHz
Remark:	Only worse case is reported.

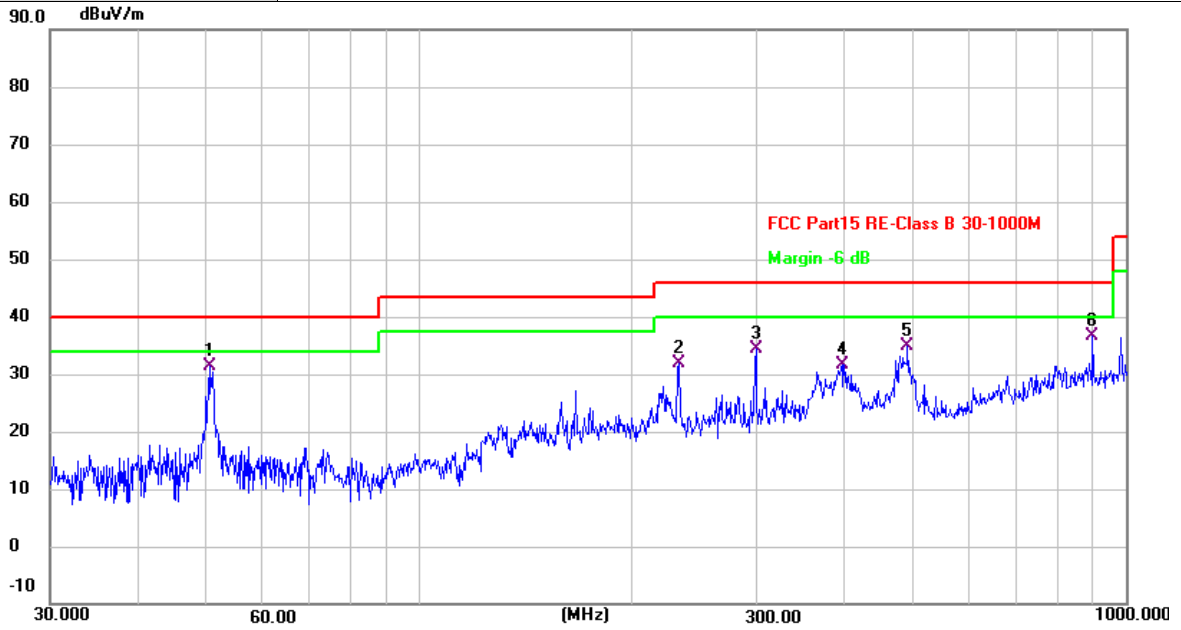

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	50.5859	45.25	-13.96	31.29	40.00	-8.71	QP
2	232.5318	46.89	-15.01	31.88	46.00	-14.12	QP
3	299.3158	47.77	-13.48	34.29	46.00	-11.71	QP
4	399.0300	42.87	-11.14	31.73	46.00	-14.27	QP
5	490.7445	44.32	-9.48	34.84	46.00	-11.16	QP
6	896.9964	39.55	-3.01	36.54	46.00	-9.46	QP

Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value



## Above 1GHz

<b>Ant. Pol.</b>	Horizontal						
<b>Test Mode:</b>	TX GFSK Mode 2402MHz						
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2296.417	42.74	-3.48	39.26	74.00	-34.74	peak
2	3984.500	42.57	0.47	43.04	74.00	-30.96	peak
3	7184.417	37.61	10.10	47.71	74.00	-26.29	peak
4	8006.917	38.40	10.85	49.25	74.00	-24.75	peak
5	9624.500	38.97	12.66	51.63	74.00	-22.37	peak
6 *	11199.000	38.42	14.88	53.30	74.00	-20.70	peak
Remarks:							
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor							
2.Margin value = Level -Limit value							

<b>Ant. Pol.</b>	Vertical						
<b>Test Mode:</b>	TX GFSK Mode 2402MHz						
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1195.833	46.86	-7.61	39.25	74.00	-34.75	peak
2	4807.000	41.40	2.08	43.48	74.00	-30.52	peak
3	7411.583	37.67	10.22	47.89	74.00	-26.11	peak
4	9181.917	38.16	12.24	50.40	74.00	-23.60	peak
5	10204.167	38.33	13.69	52.02	74.00	-21.98	peak
6 *	12123.333	37.06	15.80	52.86	74.00	-21.14	peak
Remarks:							
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor							
2.Margin value = Level -Limit value							



<b>Ant. Pol.</b>	Horizontal
<b>Test Mode:</b>	TX GFSK Mode 2441MHz
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1438.667	45.59	-6.85	38.74	74.00	-35.26	peak
2	7219.667	37.76	10.18	47.94	74.00	-26.06	peak
3	8003.000	38.85	10.86	49.71	74.00	-24.29	peak
4	9738.083	37.50	12.89	50.39	74.00	-23.61	peak
5	11128.500	38.02	14.85	52.87	74.00	-21.13	peak
6 *	12436.667	37.28	15.71	52.99	74.00	-21.01	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

<b>Ant. Pol.</b>	Vertical
<b>Test Mode:</b>	TX GFSK Mode 2441MHz
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1199.750	50.44	-7.59	42.85	74.00	-31.15	peak
2	5692.167	39.21	4.38	43.59	74.00	-30.41	peak
3	7983.417	37.62	10.84	48.46	74.00	-25.54	peak
4	10129.750	37.43	13.55	50.98	74.00	-23.02	peak
5 *	11140.250	38.57	14.84	53.41	74.00	-20.59	peak
6	12460.167	36.99	15.77	52.76	74.00	-21.24	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



<b>Ant. Pol.</b>	Horizontal
<b>Test Mode:</b>	TX GFSK Mode 2480MHz
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4391.833	40.13	1.14	41.27	74.00	-32.73	peak
2	6432.417	39.42	7.11	46.53	74.00	-27.47	peak
3	9142.750	37.97	12.11	50.08	74.00	-23.92	peak
4	10071.000	38.15	13.42	51.57	74.00	-22.43	peak
5	10787.750	37.76	14.53	52.29	74.00	-21.71	peak
6 *	12338.750	37.05	15.70	52.75	74.00	-21.25	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

<b>Ant. Pol.</b>	Vertical
<b>Test Mode:</b>	TX GFSK Mode 2480MHz
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1195.833	48.70	-7.61	41.09	74.00	-32.91	peak
2	4807.000	40.15	2.08	42.23	74.00	-31.77	peak
3	6444.167	38.72	7.16	45.88	74.00	-28.12	peak
4	8014.750	38.31	10.83	49.14	74.00	-24.86	peak
5	10873.917	37.61	14.63	52.24	74.00	-21.76	peak
6 *	12722.583	36.10	16.43	52.53	74.00	-21.47	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



<b>Ant. Pol.</b>	Horizontal						
<b>Test Mode:</b>	TX $\pi/4$ -DQPSK Mode 2402MHz						
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	3945.333	41.34	0.32	41.66	74.00	-32.34	peak
2	6397.167	39.07	7.01	46.08	74.00	-27.92	peak
3	8077.417	38.22	10.67	48.89	74.00	-25.11	peak
4	9209.333	38.60	12.31	50.91	74.00	-23.09	peak
5	9984.833	38.14	13.26	51.40	74.00	-22.60	peak
6 *	11614.167	37.69	15.29	52.98	74.00	-21.02	peak
Remarks:							
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor							
2.Margin value = Level -Limit value							

<b>Ant. Pol.</b>	Vertical						
<b>Test Mode:</b>	TX $\pi/4$ -DQPSK Mode 2402MHz						
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1199.750	48.49	-7.59	40.90	74.00	-33.10	peak
2	4807.000	39.99	2.08	42.07	74.00	-31.93	peak
3	7341.083	40.00	10.20	50.20	74.00	-23.80	peak
4	9671.500	37.91	12.75	50.66	74.00	-23.34	peak
5 *	10772.083	38.48	14.50	52.98	74.00	-21.02	peak
6	12197.750	37.02	15.88	52.90	74.00	-21.10	peak
Remarks:							
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor							
2.Margin value = Level -Limit value							





<b>Ant. Pol.</b>	Horizontal
<b>Test Mode:</b>	TX $\pi/4$ -DQPSK Mode 2441MHz
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1199.750	48.48	-7.59	40.89	74.00	-33.11	peak
2	4807.000	40.00	2.08	42.08	74.00	-31.92	peak
3	6514.667	38.09	7.37	45.46	74.00	-28.54	peak
4	8030.417	39.63	10.78	50.41	74.00	-23.59	peak
5	10826.917	37.53	14.59	52.12	74.00	-21.88	peak
6 *	11704.250	37.50	15.28	52.78	74.00	-21.22	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

<b>Ant. Pol.</b>	Vertical
<b>Test Mode:</b>	TX $\pi/4$ -DQPSK Mode 2441MHz
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	3937.500	40.09	0.29	40.38	74.00	-33.62	peak
2	5762.667	39.19	4.65	43.84	74.00	-30.16	peak
3	6600.833	38.03	7.62	45.65	74.00	-28.35	peak
4	8809.833	38.25	11.33	49.58	74.00	-24.42	peak
5	10509.667	38.44	14.04	52.48	74.00	-21.52	peak
6 *	12045.000	37.08	15.70	52.78	74.00	-21.22	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



<b>Ant. Pol.</b>	Horizontal
<b>Test Mode:</b>	TX $\pi/4$ -DQPSK Mode 2480MHz
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4752.167	40.15	1.97	42.12	74.00	-31.88	peak
2	6455.917	37.67	7.19	44.86	74.00	-29.14	peak
3	7889.417	37.98	10.64	48.62	74.00	-25.38	peak
4	10024.000	37.13	13.33	50.46	74.00	-23.54	peak
5 *	11159.833	38.05	14.86	52.91	74.00	-21.09	peak
6	12710.833	36.20	16.40	52.60	74.00	-21.40	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

<b>Ant. Pol.</b>	Vertical
<b>Test Mode:</b>	TX $\pi/4$ -DQPSK Mode 2480MHz
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1195.833	47.44	-7.61	39.83	74.00	-34.17	peak
2	4807.000	41.71	2.08	43.79	74.00	-30.21	peak
3	7012.083	37.70	9.21	46.91	74.00	-27.09	peak
4	9189.750	38.95	12.27	51.22	74.00	-22.78	peak
5	10548.833	38.42	14.09	52.51	74.00	-21.49	peak
6 *	11191.167	38.05	14.87	52.92	74.00	-21.08	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value





<b>Ant. Pol.</b>	Horizontal						
<b>Test Mode:</b>	TX 8-DPSK Mode 2402MHz						
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1148.833	51.57	-7.74	43.83	74.00	-30.17	peak
2	5237.833	38.81	3.00	41.81	74.00	-32.19	peak
3	7262.750	37.46	10.19	47.65	74.00	-26.35	peak
4	8731.500	38.64	11.20	49.84	74.00	-24.16	peak
5 *	10881.750	38.45	14.65	53.10	74.00	-20.90	peak
6	12468.000	36.87	15.80	52.67	74.00	-21.33	peak
Remarks:							
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor							
2.Margin value = Level -Limit value							

<b>Ant. Pol.</b>	Vertical						
<b>Test Mode:</b>	TX 8-DPSK Mode 2402MHz						
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1638.417	47.84	-6.91	40.93	74.00	-33.07	peak
2	3608.500	41.20	-0.84	40.36	74.00	-33.64	peak
3	7160.917	37.99	9.98	47.97	74.00	-26.03	peak
4	9150.583	39.11	12.13	51.24	74.00	-22.76	peak
5	10795.583	37.35	14.55	51.90	74.00	-22.10	peak
6 *	12518.917	36.97	15.93	52.90	74.00	-21.10	peak
Remarks:							
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor							
2.Margin value = Level -Limit value							



<b>Ant. Pol.</b>	Horizontal
<b>Test Mode:</b>	TX 8-DPSK Mode 2441MHz
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1438.667	45.95	-6.85	39.10	74.00	-34.90	peak
2	5124.250	39.90	2.70	42.60	74.00	-31.40	peak
3	7149.167	38.58	9.92	48.50	74.00	-25.50	peak
4	9201.500	38.05	12.31	50.36	74.00	-23.64	peak
5	11246.000	38.44	14.91	53.35	74.00	-20.65	peak
6 *	12021.500	37.69	15.68	53.37	74.00	-20.63	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

<b>Ant. Pol.</b>	Vertical
<b>Test Mode:</b>	TX 8-DPSK Mode 2441MHz
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1039.167	48.12	-8.06	40.06	74.00	-33.94	peak
2	4807.000	40.32	2.08	42.40	74.00	-31.60	peak
3	6361.917	38.63	6.86	45.49	74.00	-28.51	peak
4	8151.833	38.30	10.47	48.77	74.00	-25.23	peak
5	10619.333	38.47	14.18	52.65	74.00	-21.35	peak
6 *	11747.333	37.79	15.28	53.07	74.00	-20.93	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



<b>Ant. Pol.</b>	Horizontal
<b>Test Mode:</b>	TX 8-DPSK Mode 2480MHz
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2292.500	44.14	-3.49	40.65	74.00	-33.35	peak
2	5750.917	38.91	4.61	43.52	74.00	-30.48	peak
3	7732.750	38.83	10.36	49.19	74.00	-24.81	peak
4	9930.000	38.50	13.18	51.68	74.00	-22.32	peak
5 *	11199.000	38.04	14.88	52.92	74.00	-21.08	peak
6	12667.750	36.14	16.31	52.45	74.00	-21.55	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

<b>Ant. Pol.</b>	Vertical
<b>Test Mode:</b>	TX 8-DPSK Mode 2480MHz
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1497.417	50.87	-6.88	43.99	74.00	-30.01	peak
2	4787.417	40.35	2.04	42.39	74.00	-31.61	peak
3	5739.167	39.73	4.56	44.29	74.00	-29.71	peak
4	7290.167	38.31	10.19	48.50	74.00	-25.50	peak
5	9933.917	38.99	13.19	52.18	74.00	-21.82	peak
6 *	12585.500	36.80	16.12	52.92	74.00	-21.08	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value


### 3.3. Band Edge Emissions (Radiated)

**Limit**

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d) / RSS-247 5.5

Restricted Frequency Band (MHz)	(dB $\mu$ V/m) (at 3m)	
	Peak	Average
2310 ~ 2390	74	54
2483.5 ~ 2500	74	54

**Test Configuration**

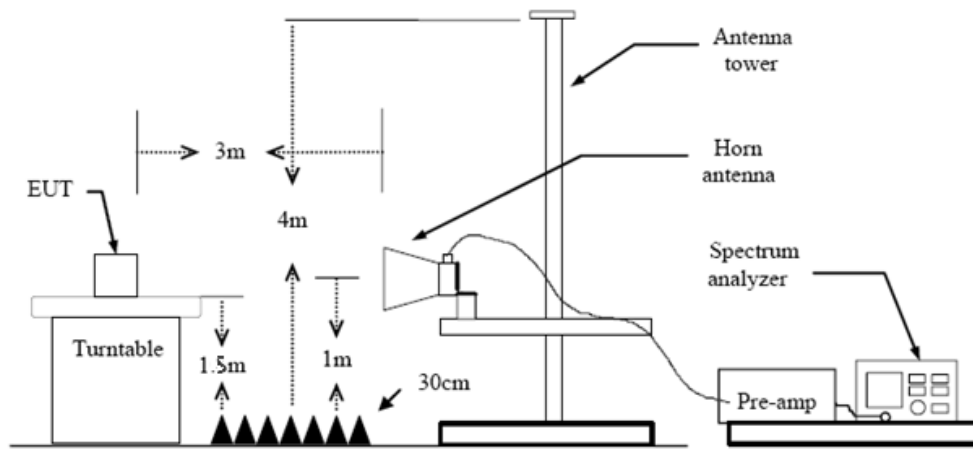

**Test Procedure**

1. The EUT was setup and tested according to ANSI C63.10:2013 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow:  
 RBW=1MHz, VBW=3MHz Peak detector for Peak value.  
 RBW=1MHz, VBW see note 1 with Peak Detector for Average Value.


Note 1: For measurements, above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 3.10 Duty Cycle.

**Test Mode**

Please refer to the clause 2.4.




**Test Result**

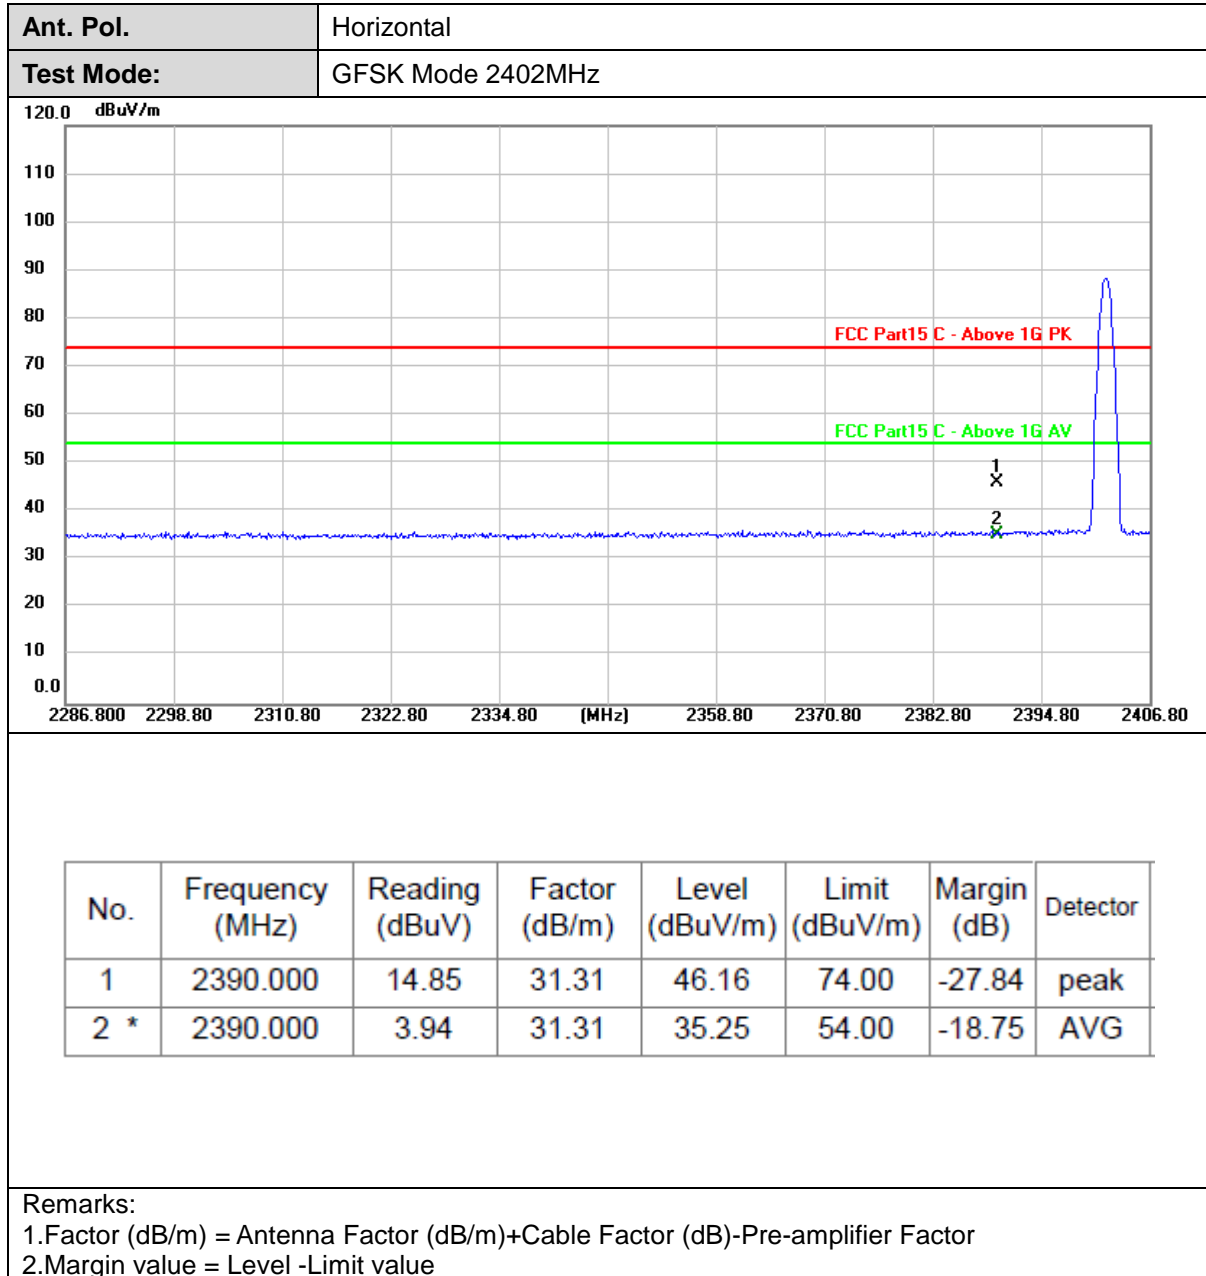



Ant. Pol.	Vertical
Test Mode:	GFSK Mode 2402MHz

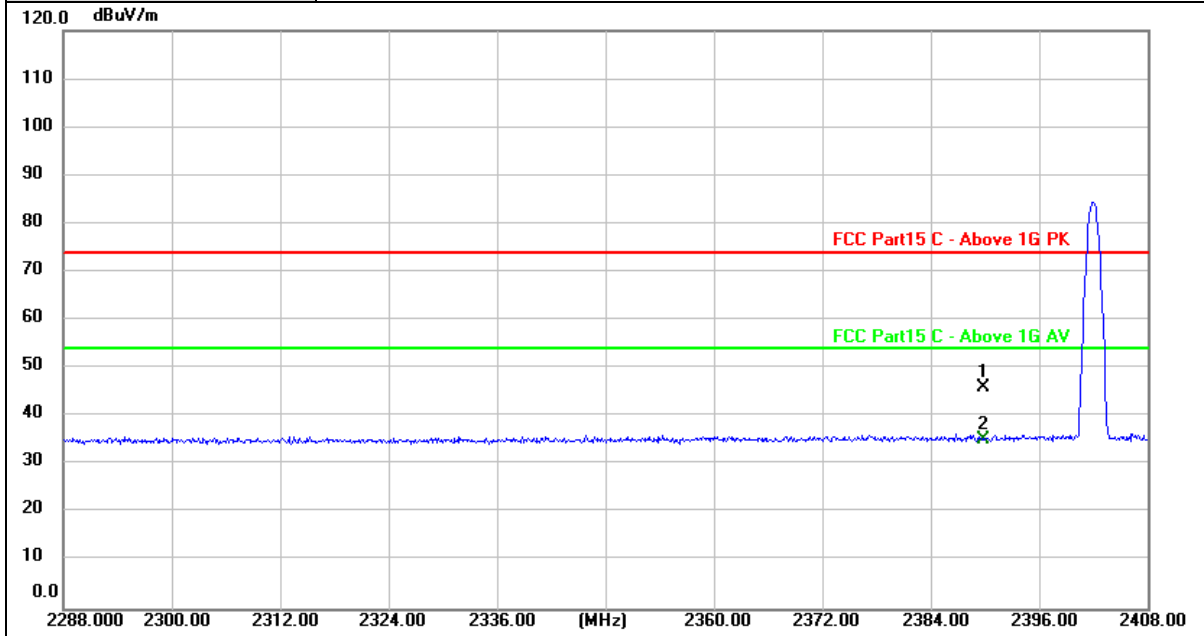


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	14.70	31.31	46.01	74.00	-27.99	peak
2 *	2390.000	3.85	31.31	35.16	54.00	-18.84	AVG

Remarks:  
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor  
 2. Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	GFSK Mode 2480MHz

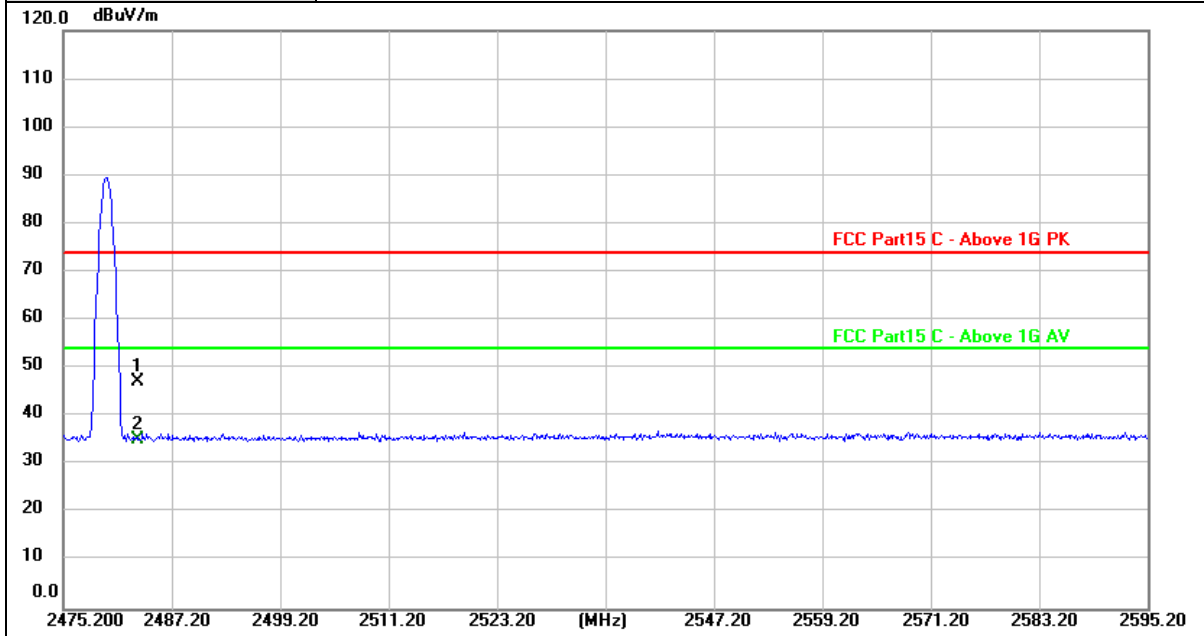


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	15.83	31.48	47.31	74.00	-26.69	peak
2 *	2483.500	3.75	31.48	35.23	54.00	-18.77	AVG

Remarks:  
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor  
 2. Margin value = Level -Limit value





Ant. Pol.	Vertical
Test Mode:	GFSK Mode 2480MHz

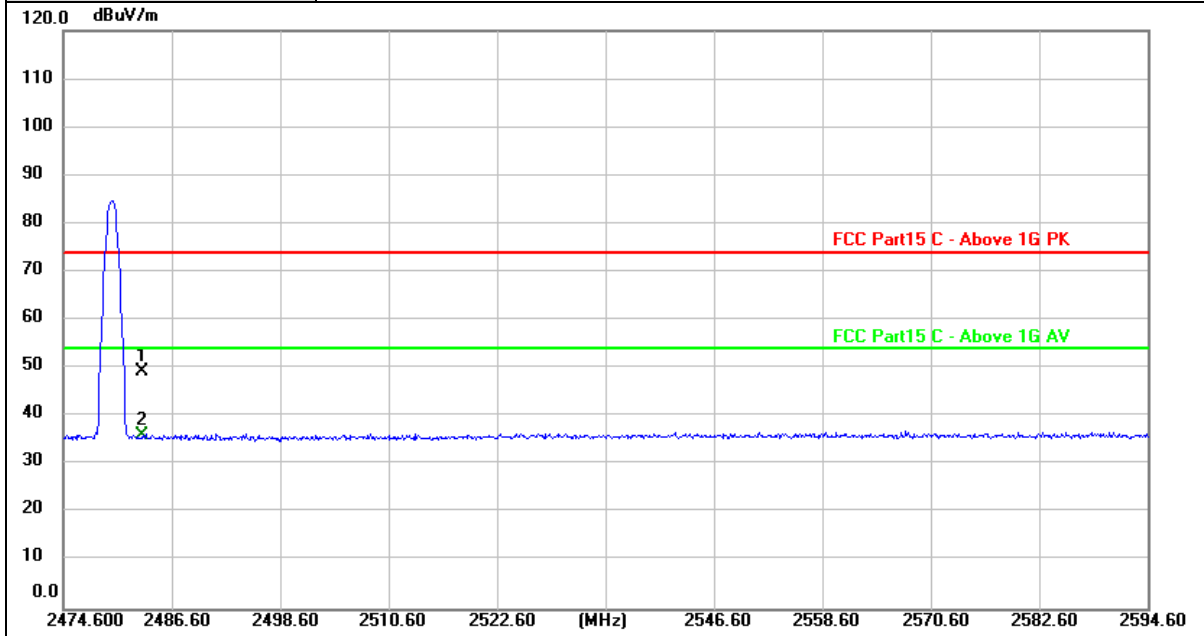

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	17.96	31.48	49.44	74.00	-24.56	peak
2 *	2483.500	4.63	31.48	36.11	54.00	-17.89	AVG

Remarks:


1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2. Margin value = Level -Limit value







Ant. Pol.	Horizontal
Test Mode:	$\pi/4$ -DQPSK Mode 2402MHz

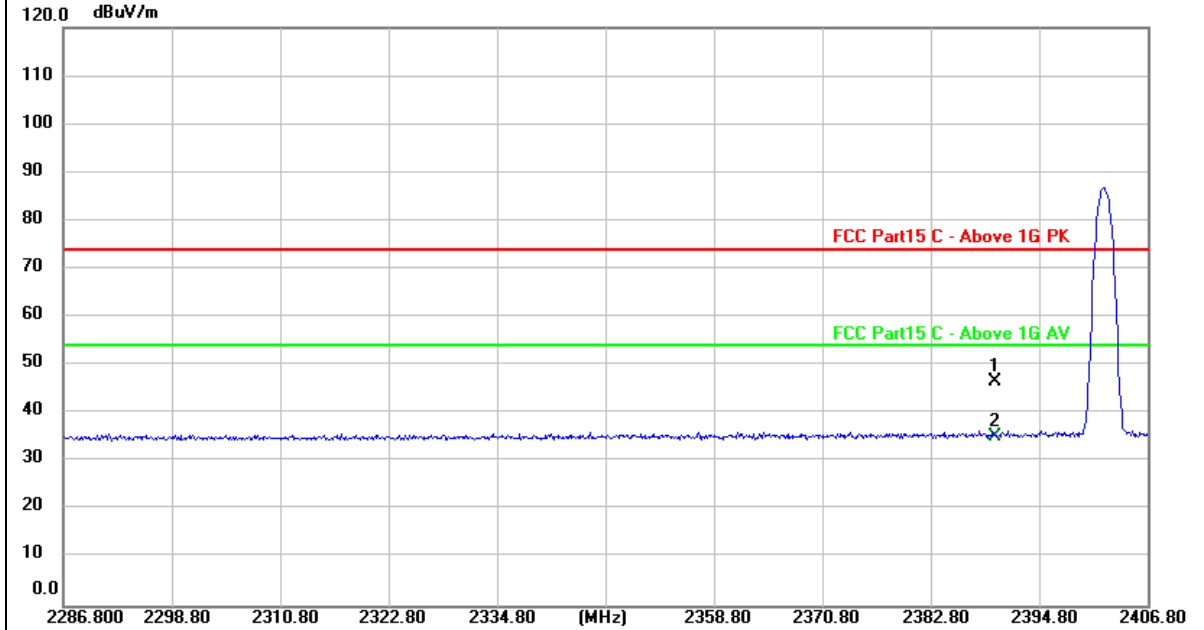


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	15.34	31.31	46.65	74.00	-27.35	peak
2 *	2390.000	3.98	31.31	35.29	54.00	-18.71	AVG

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value




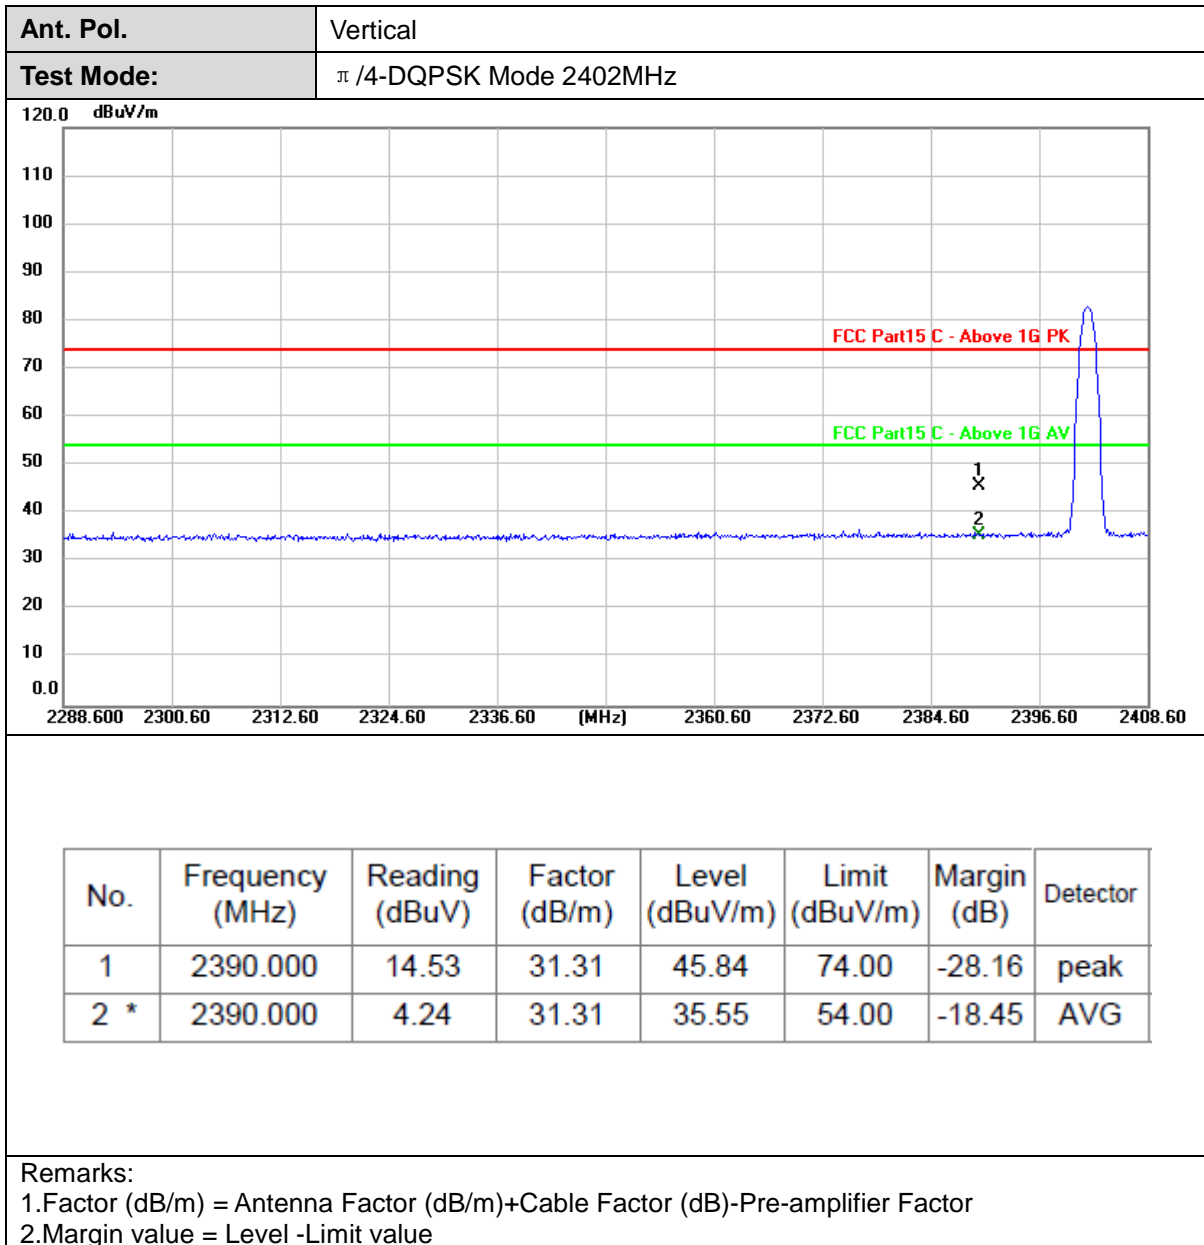



Ant. Pol. Horizontal

Test Mode:  $\pi$  /4-DQPSK Mode 2480MHz

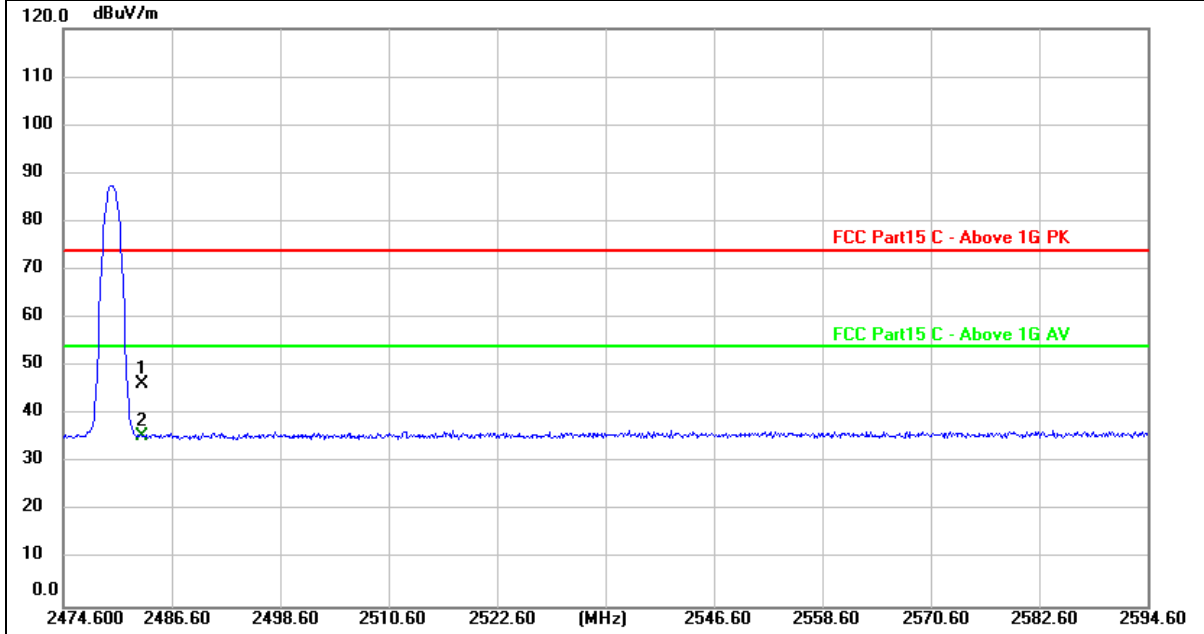


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	14.94	31.48	46.42	74.00	-27.58	peak
2 *	2483.500	4.11	31.48	35.59	54.00	-18.41	AVG

Remarks:  
 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor  
 2.Margin value = Level -Limit value



Ant. Pol.	Vertical
Test Mode:	$\pi/4$ -DQPSK Mode 2480MHz

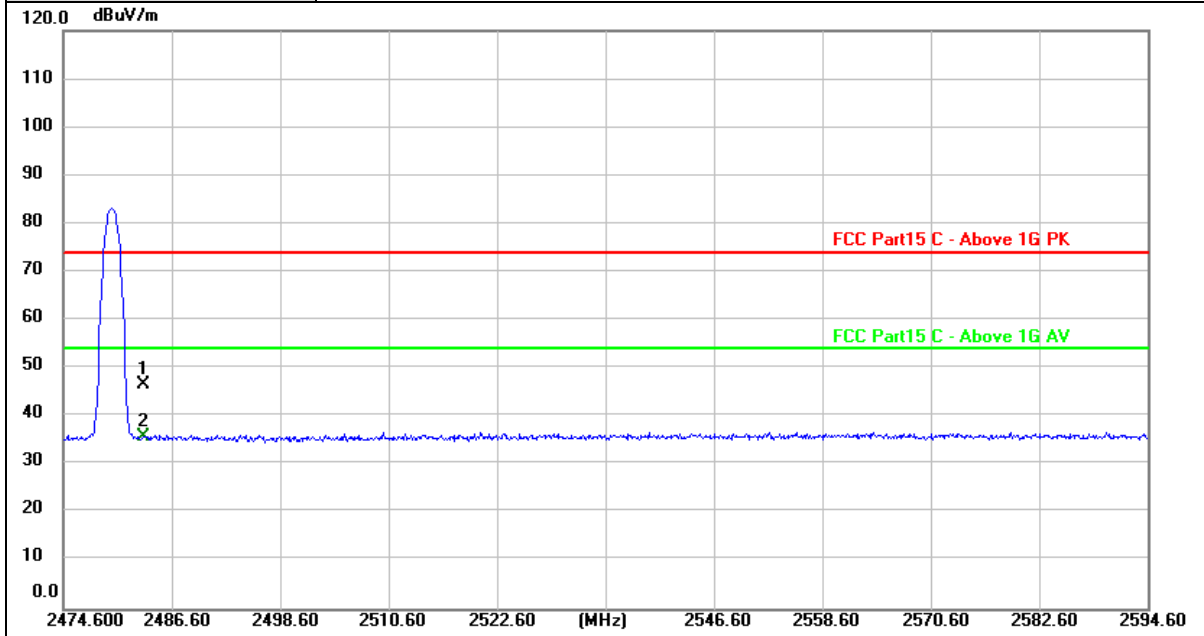

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	15.25	31.48	46.73	74.00	-27.27	peak
2 *	2483.500	4.25	31.48	35.73	54.00	-18.27	AVG


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2. Margin value = Level -Limit value






Ant. Pol.	Horizontal
Test Mode:	8-DPSK Mode 2402MHz

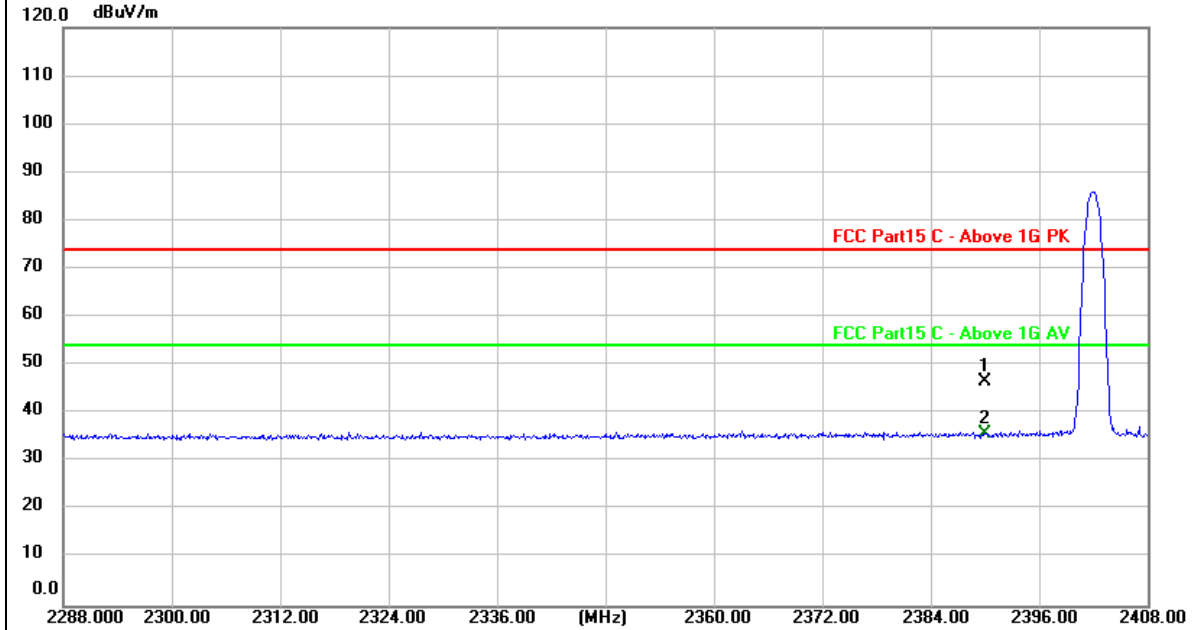


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	15.23	31.31	46.54	74.00	-27.46	peak
2 *	2390.000	4.49	31.31	35.80	54.00	-18.20	AVG

Remarks:  
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor  
 2. Margin value = Level -Limit value

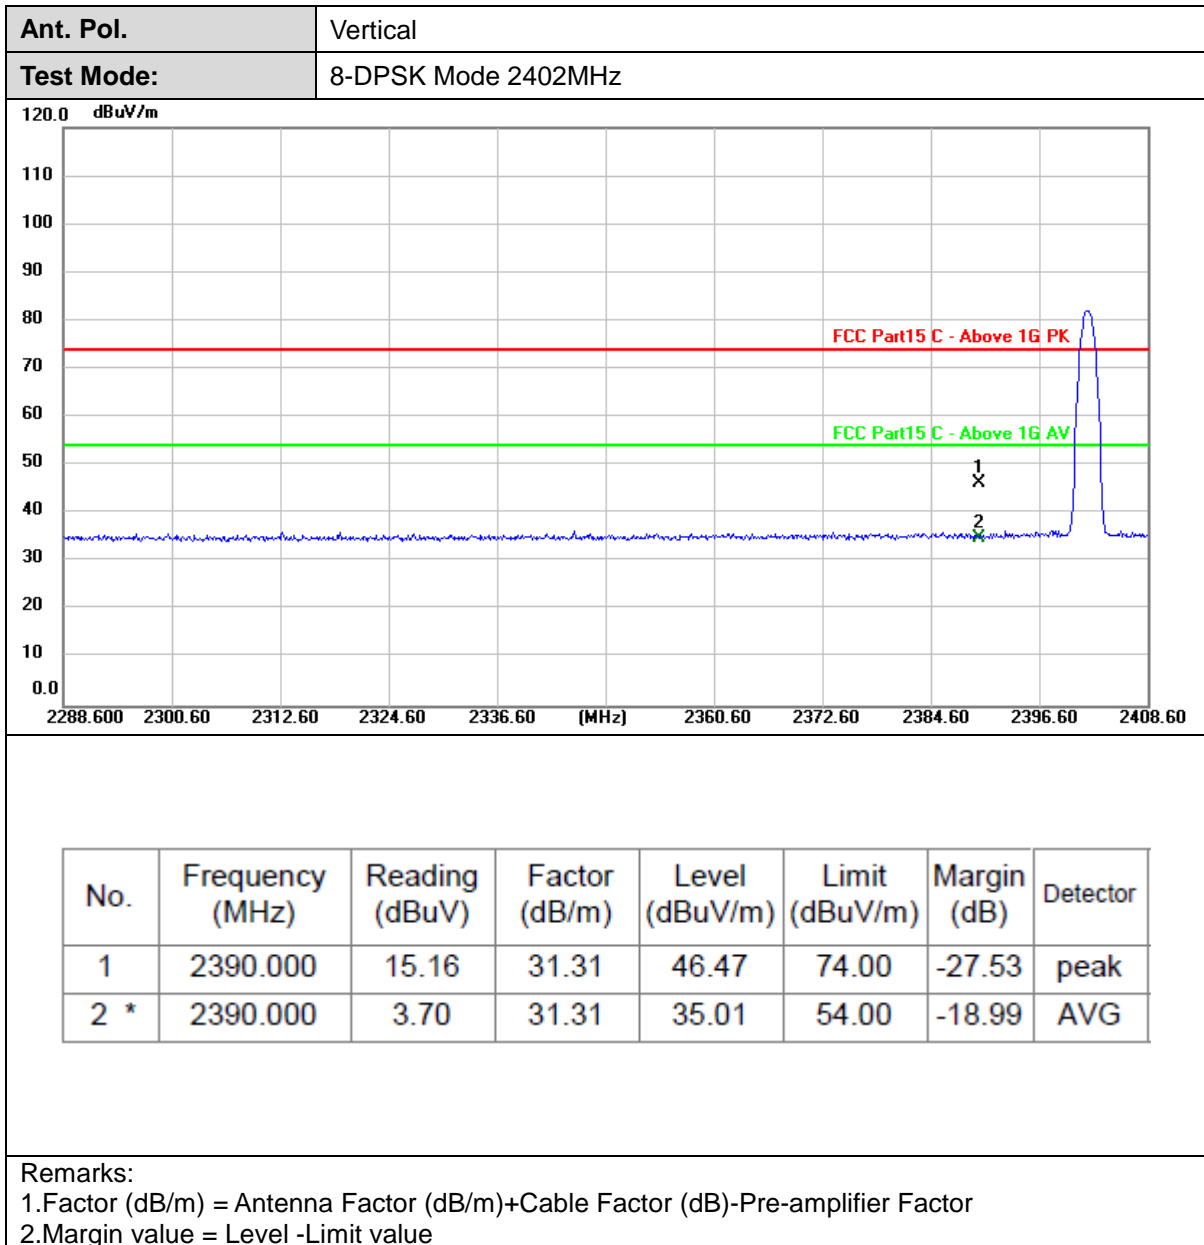




Ant. Pol.	Horizontal
Test Mode:	8-DPSK Mode 2480MHz

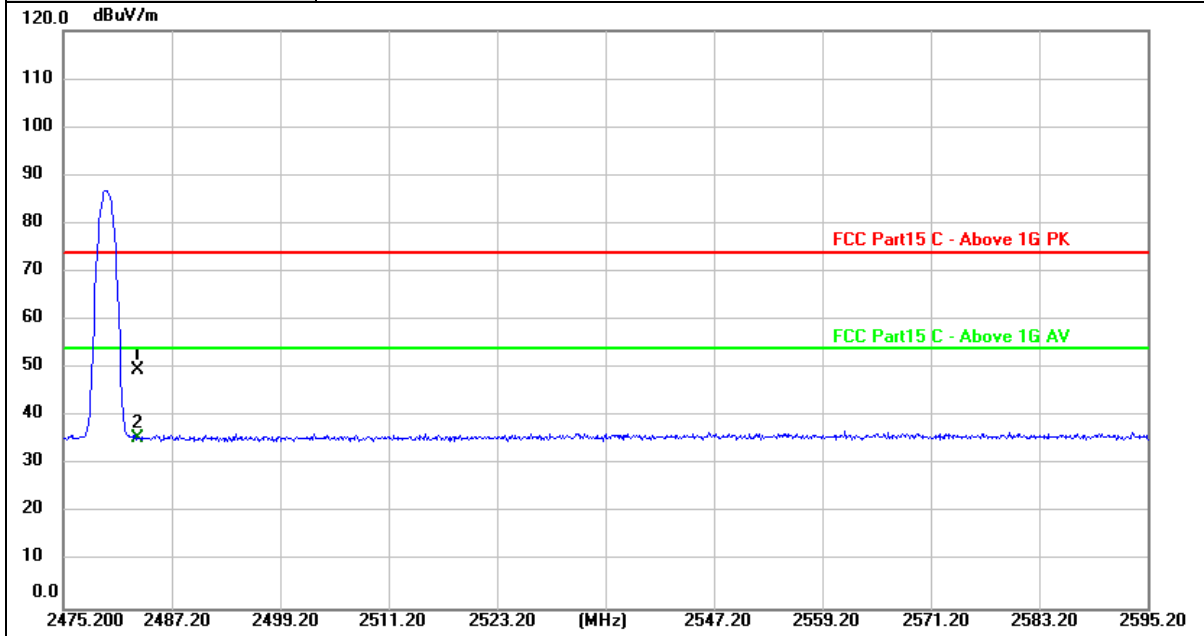

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	18.29	31.48	49.77	74.00	-24.23	peak
2 *	2483.500	4.15	31.48	35.63	54.00	-18.37	AVG

Remarks:  
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor  
 2. Margin value = Level -Limit value

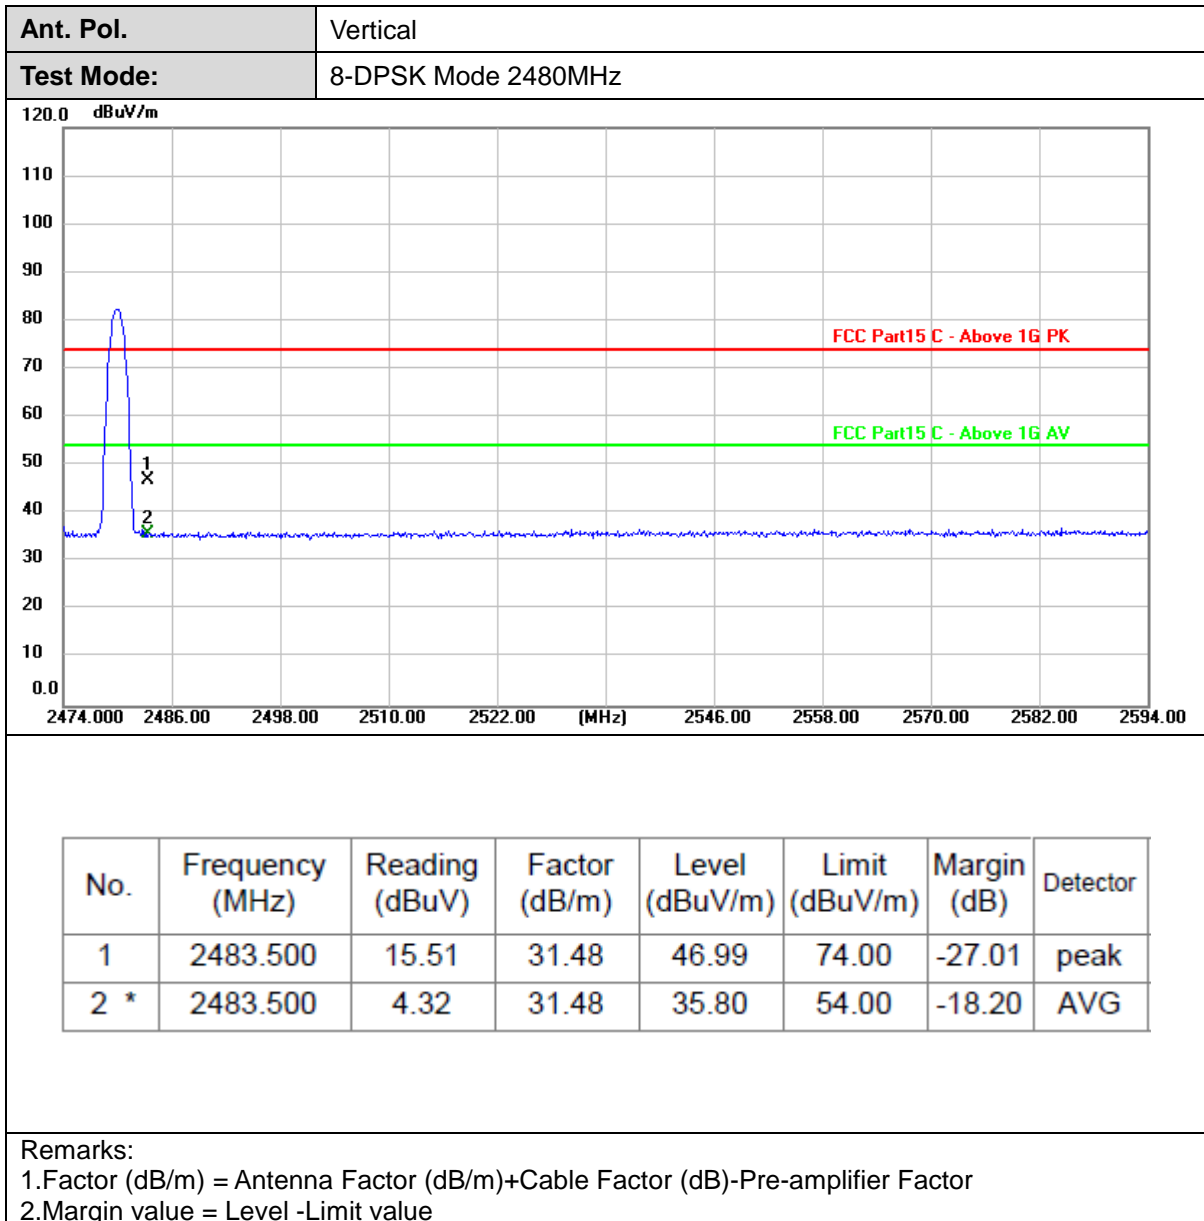






### 3.4. Band Edge and Spurious Emissions (Conducted)

#### Limit

##### **FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d) / RSS-247 5.5**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

#### Test Configuration



#### Test Procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:  
RBW = 100 kHz, VBW  $\geq$  RBW, scan up through 10<sup>th</sup> harmonic.  
Sweep = auto, Detector function = peak, Trace = max hold.
4. Measure and record the results in the test report.

#### Test Mode

Please refer to the clause 2.4.

**Test Result**

## Non-Hopping


Modulation	Packet	Channel	OOB Emission Frequency (MHz)	OOB Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result
GFSK	DH5	0	2400.00	-54.263	-14.65	-39.613	PASS
			24962.50	-52.294	-14.65	-37.644	PASS
		78	23644.10	-53.597	-15.01	-38.587	PASS
			2483.50	-57.881	-15.18	-42.701	PASS
$\pi/4$ DQPSK	2-DH5	0	24966.30	-53.730	-15.18	-38.550	PASS
			2400.00	-48.967	-13.76	-35.207	PASS
		39	21859.90	-53.133	-13.76	-39.373	PASS
			24117.90	-53.529	-14.13	-39.399	PASS
8DPSK	3-DH5	78	2483.50	-56.977	-14.37	-42.607	PASS
			23679.00	-53.685	-14.37	-39.316	PASS
		0	2400.00	-50.517	-14.65	-35.867	PASS
			23993.70	-53.646	-14.65	-38.996	PASS
39	23633.50	-52.725	-15.00	-37.725	PASS		
	2483.50	-57.750	-15.25	-42.500	PASS		
		78	21765.70	-53.393	-15.25	-38.143	PASS

## Hopping

Modulation	Packet	Channel	OOB Emission Frequency (MHz)	OOB Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result
GFSK	DH5	Hopping	2382.01	-56.626	-14.64	-41.986	PASS
			2400.00	-56.935	-14.64	-42.295	PASS
			2483.50	-57.942	-15.36	-42.582	PASS
			2394.08	-55.538	-14.66	-40.877	PASS
			2400.00	-58.088	-14.66	-43.428	PASS
			2483.50	-58.338	-15.25	-43.088	PASS
			2400.00	-56.366	-14.65	-41.716	PASS
$\pi/4$ DQPSK	2-DH5		2483.50	-58.894	-15.36	-43.534	PASS
			2400.00	-50.226	-13.72	-36.506	PASS
			2483.50	-59.747	-14.54	-45.207	PASS
			2400.00	-52.155	-14.27	-37.885	PASS
			2483.50	-58.480	-14.43	-44.050	PASS
			2400.00	-51.106	-14.36	-36.746	PASS
			2483.50	-59.145	-14.57	-44.575	PASS
8DPSK	3-DH5	2400.00	-52.221	-14.80	-37.421	PASS	
		2483.50	-57.923	-15.36	-42.563	PASS	
		2400.00	-51.143	-14.84	-36.303	PASS	
		2483.50	-61.044	-15.45	-45.594	PASS	
		2400.00	-51.435	-14.73	-36.705	PASS	
		2483.50	-60.199	-15.47	-44.729	PASS	




Test Graphs:

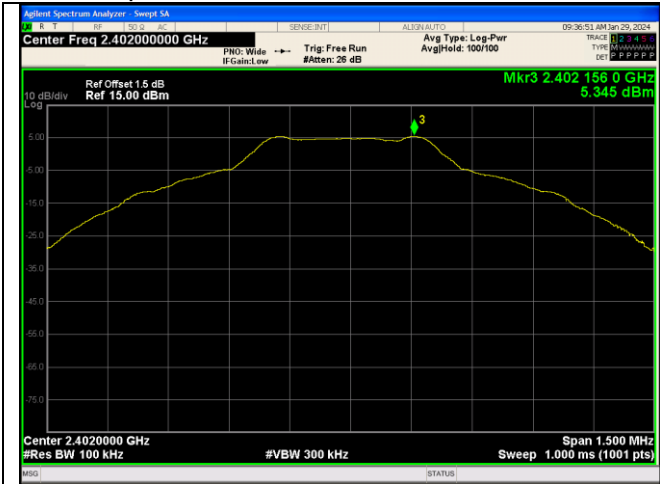


In-Band Reference Level  
GFSK\_DH5\_Channel 0




In-Band Reference Level  
 $\pi/4$ DQPSK\_2-DH5\_Channel 0

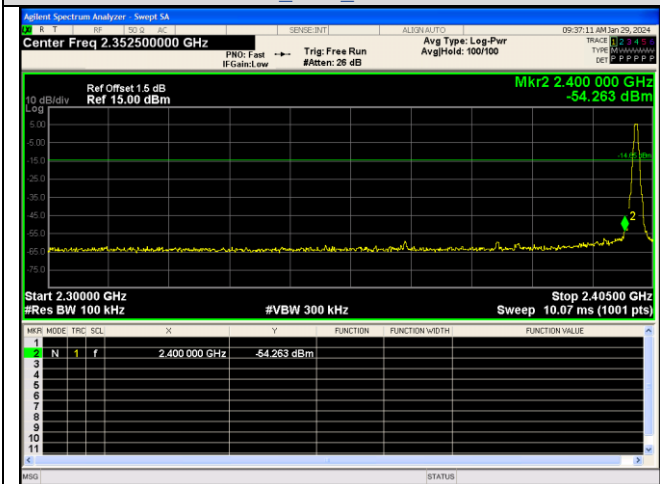


Out Of Band Emission  
GFSK\_DH5\_Channel 0

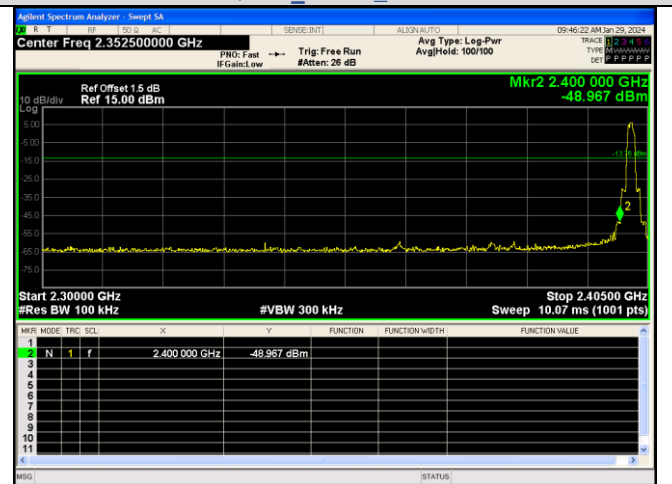


Out Of Band Emission  
 $\pi/4$ DQPSK\_2-DH5\_Channel 0

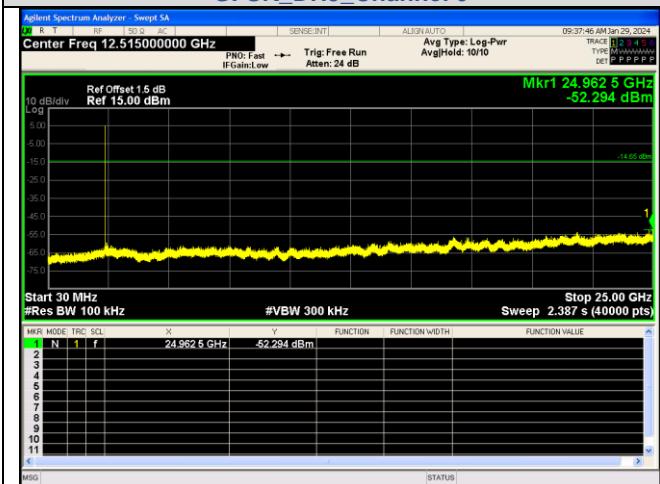

Spurious Emission  
GFSK\_DH5\_Channel 0

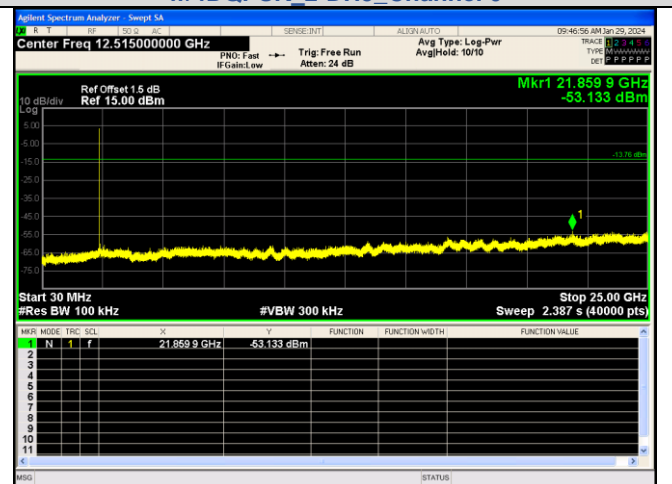


Spurious Emission  
 $\pi/4$ DQPSK\_2-DH5\_Channel 0

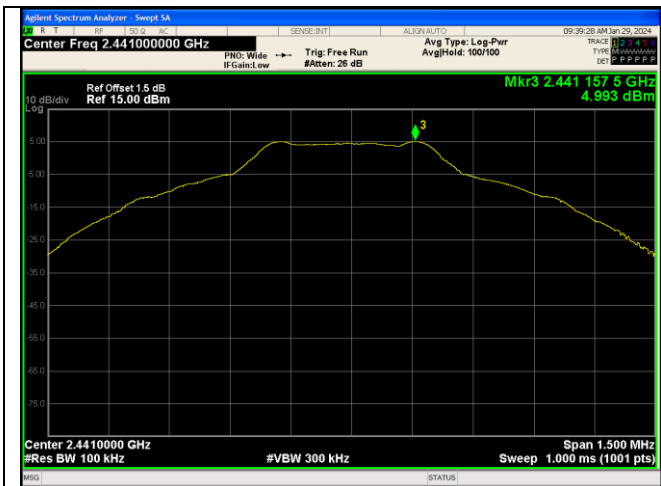


In-Band Reference Level  
GFSK\_DH5\_Channel 39




In-Band Reference Level  
 $\pi/4$ DQPSK\_2-DH5\_Channel 39

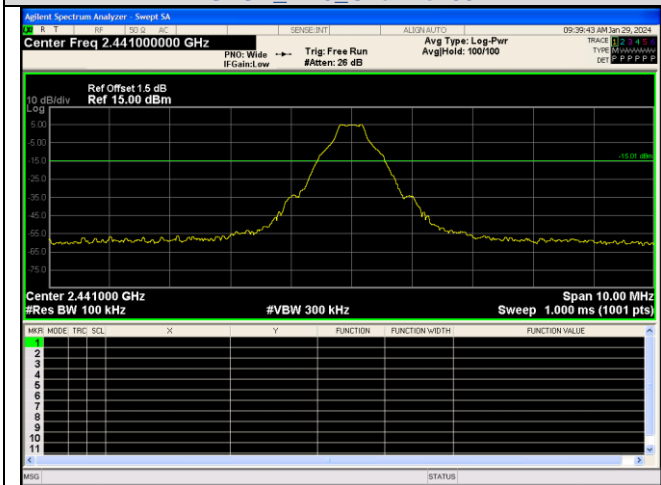


Out Of Band Emission  
GFSK\_DH5\_Channel 39

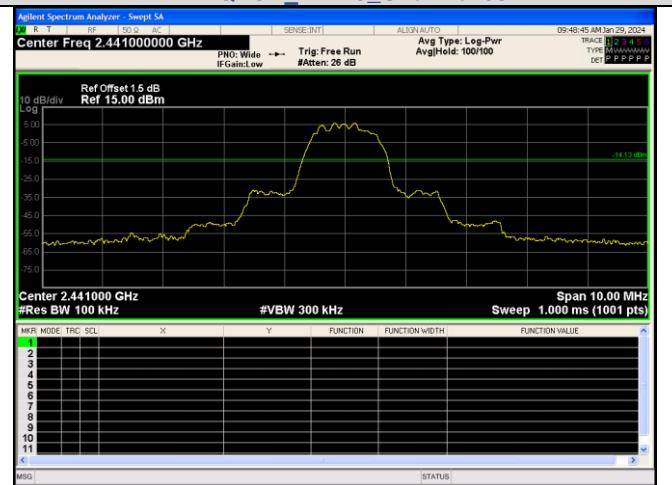

Out Of Band Emission  
 $\pi/4$ DQPSK\_2-DH5\_Channel 39

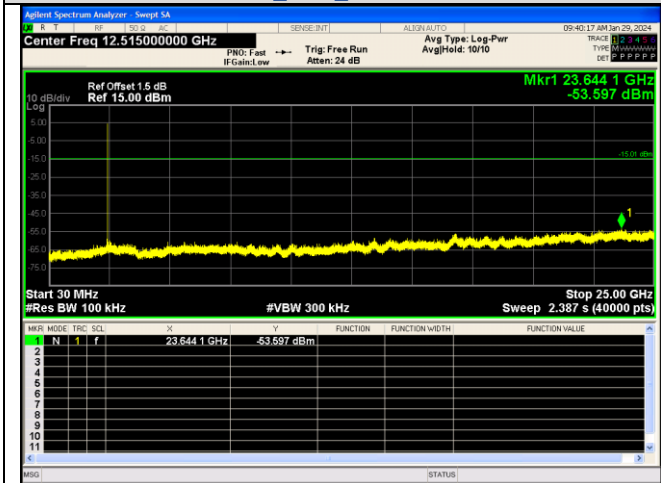


Spurious Emissions  
GFSK\_DH5\_Channel 39

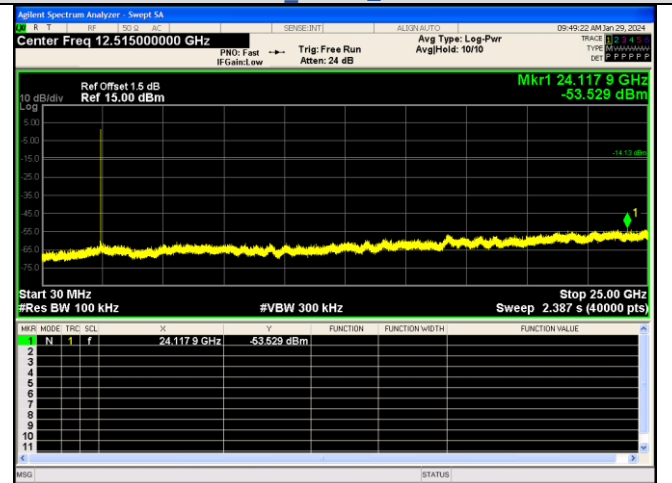

Spurious Emissions  
 $\pi/4$ DQPSK\_2-DH5\_Channel 39




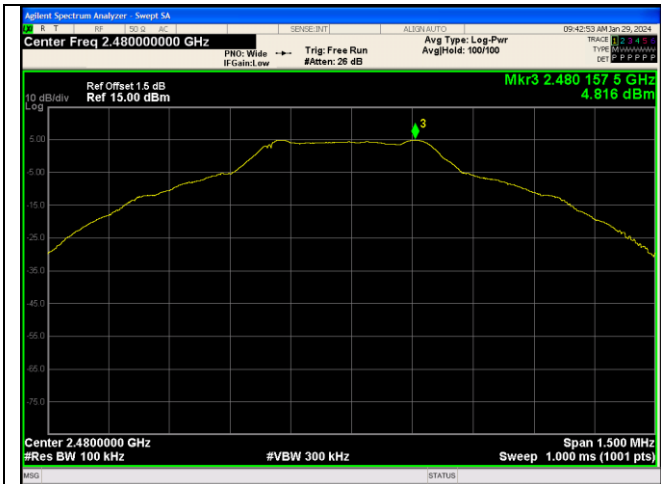


In-Band Reference Level  
GFSK\_DH5\_Channel 78




In-Band Reference Level  
 $\pi/4$ DQPSK\_2-DH5\_Channel 78

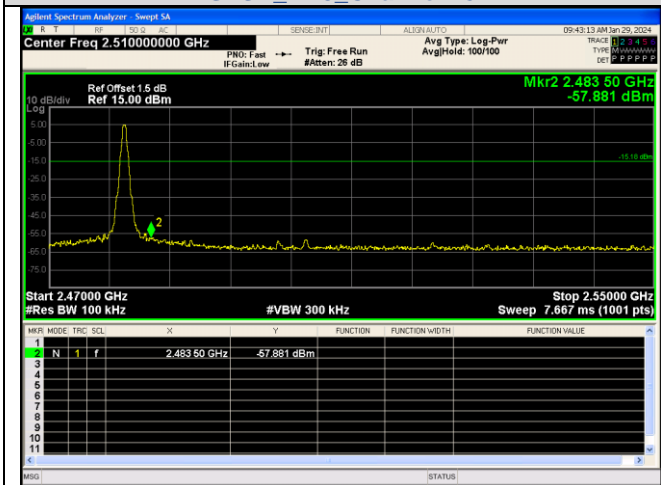


Out Of Band Emission  
GFSK\_DH5\_Channel 78

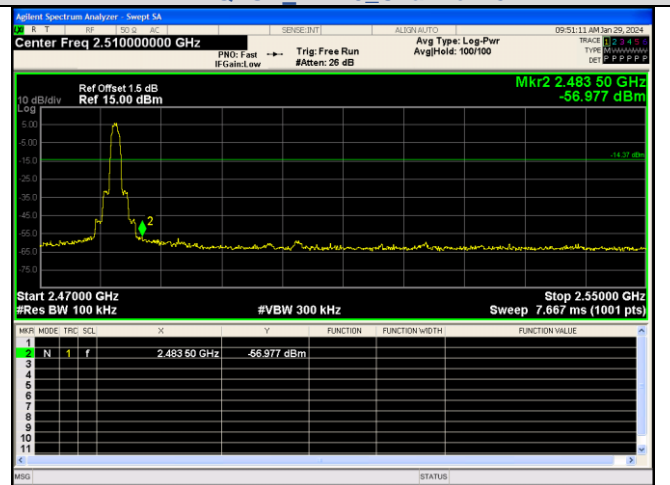

Out Of Band Emission  
 $\pi/4$ DQPSK\_2-DH5\_Channel 78

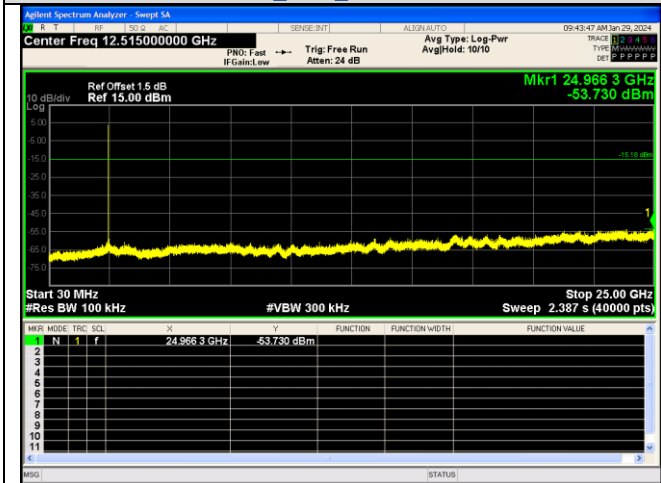


Spurious Emission  
GFSK\_DH5\_Channel 78

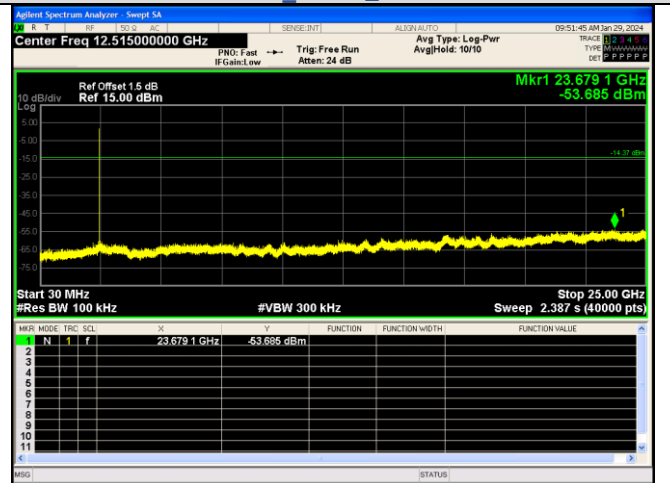


Spurious Emission  
 $\pi/4$ DQPSK\_2-DH5\_Channel 78




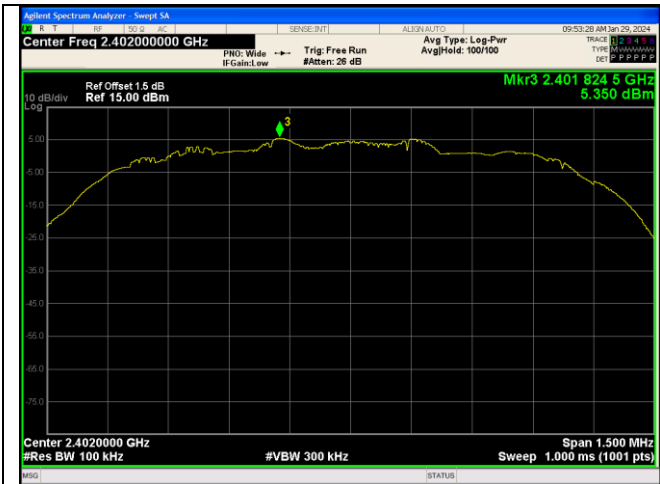

In-Band Reference Level 8DPSK\_3-DH5\_Channel 0

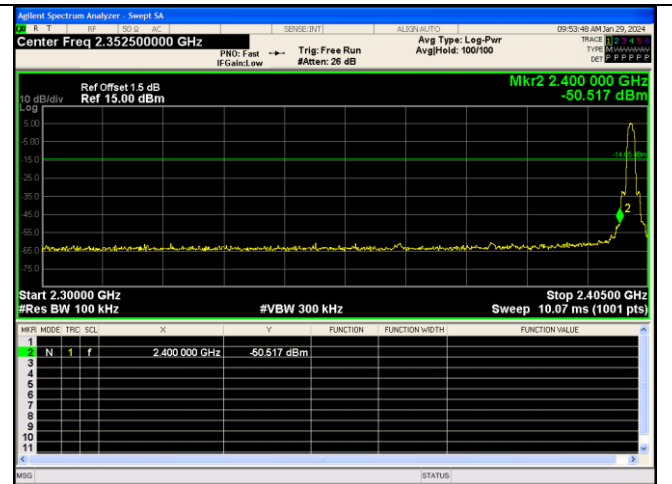


Out Of Band Emission 8DPSK\_3-DH5\_Channel 0

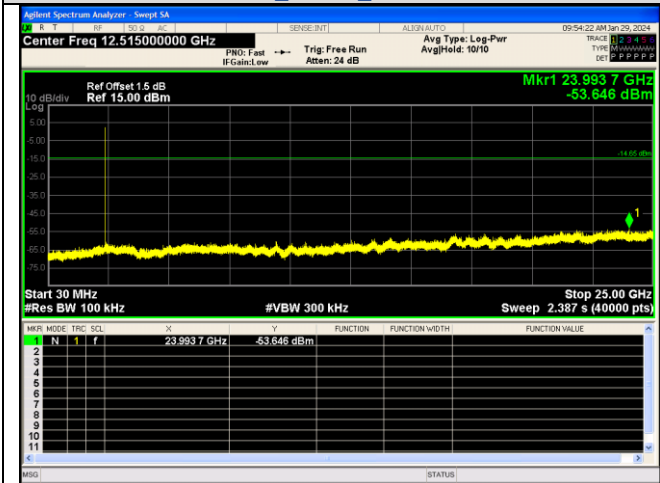


Spurious Emission 8DPSK\_3-DH5\_Channel 0



In-Band Reference Level 8DPSK\_3-DH5\_Channel 39

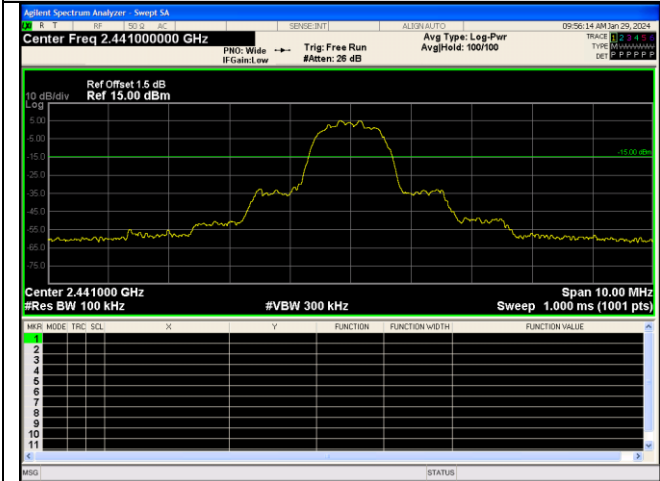


Out Of Band Emission 8DPSK\_3-DH5\_Channel 39

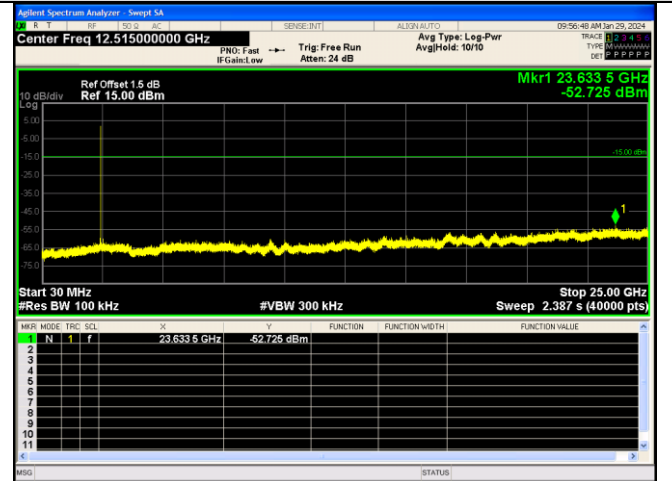


Spurious Emissions 8DPSK\_3-DH5\_Channel 39




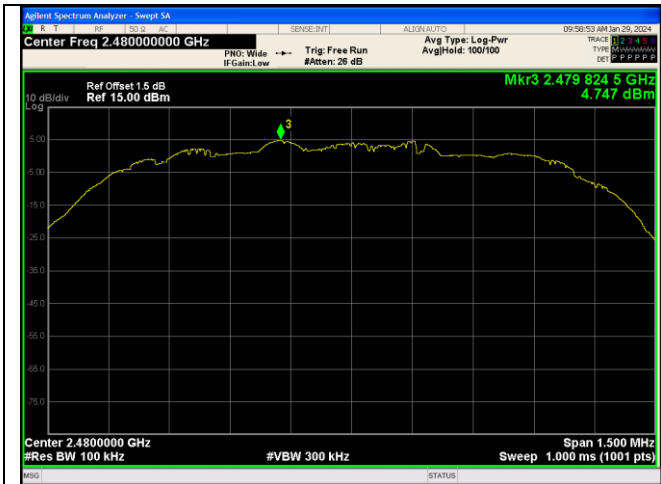

In-Band Reference Level  
8DPSK\_3-DH5\_Channel 78

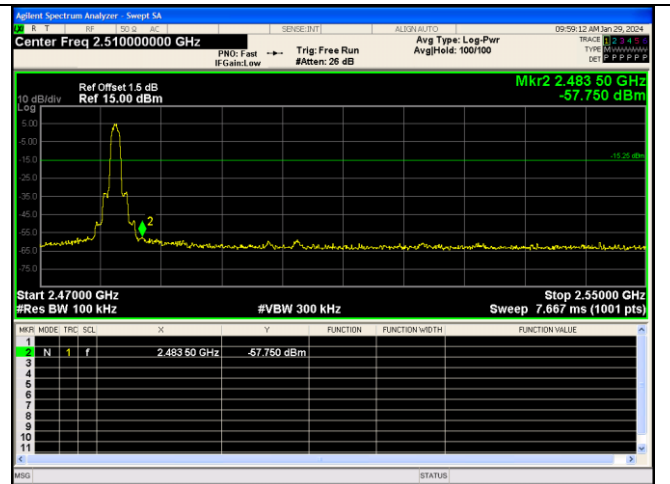


Out Of Band Emission  
8DPSK\_3-DH5\_Channel 78

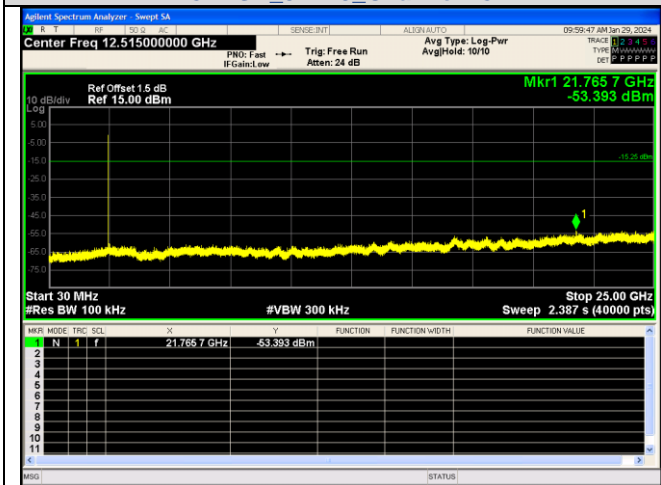


Spurious Emission  
8DPSK\_3-DH5\_Channel 78




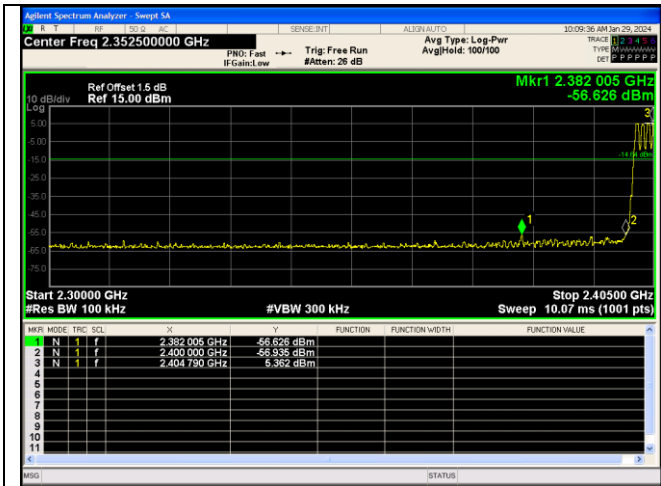


Out Of Band Emission(Left)  
GFSK DH5 Channel Hopping

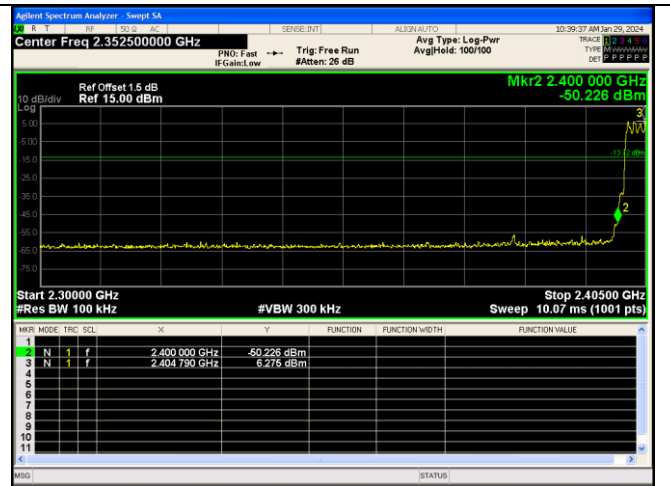


Out Of Band Emission(Left)  
 $\pi/4$ DQPSK 2-DH5 Channel Hopping

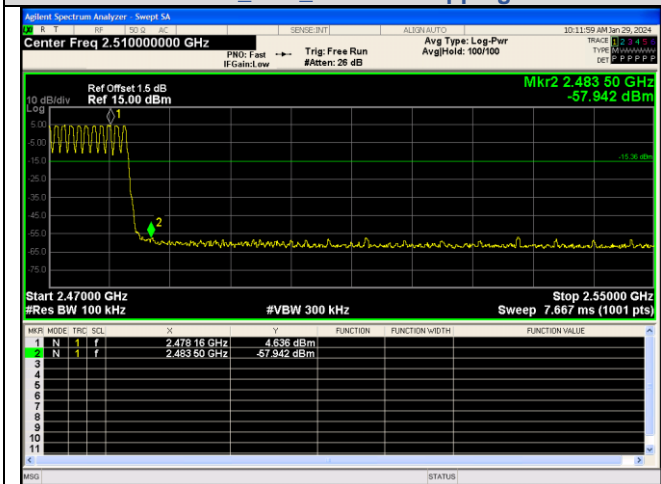


Out Of Band Emission(Right)  
GFSK DH5 Channel Hopping

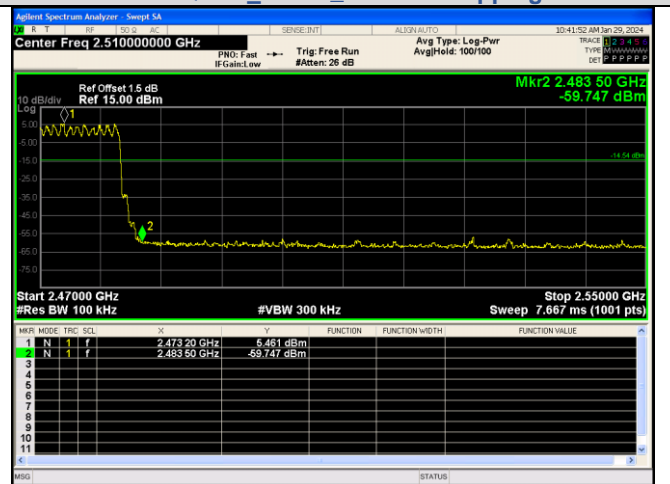

Out Of Band Emission(Right)  
 $\pi/4$ DQPSK 2-DH5 Channel Hopping

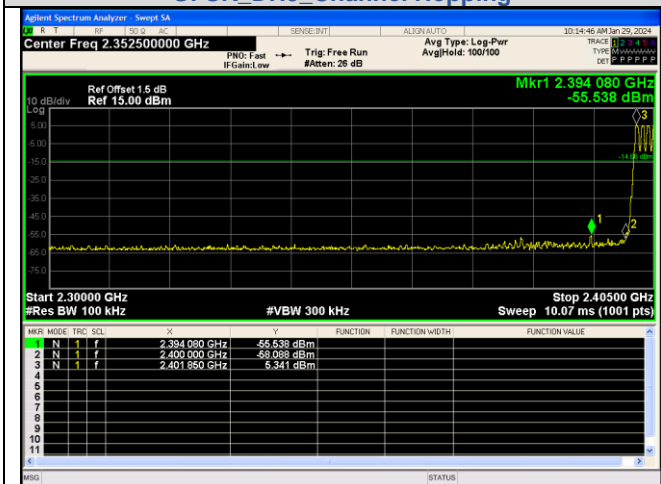


Out Of Band Emission(Left)  
GFSK DH5 Channel Hopping

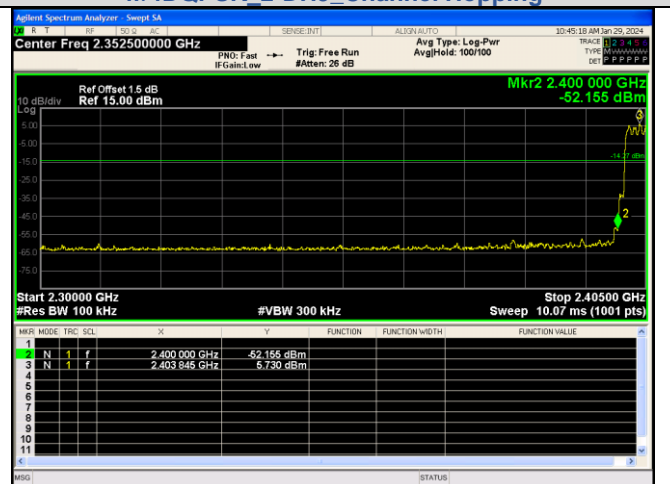


Out Of Band Emission(Left)  
 $\pi/4$ DQPSK 2-DH5 Channel Hopping




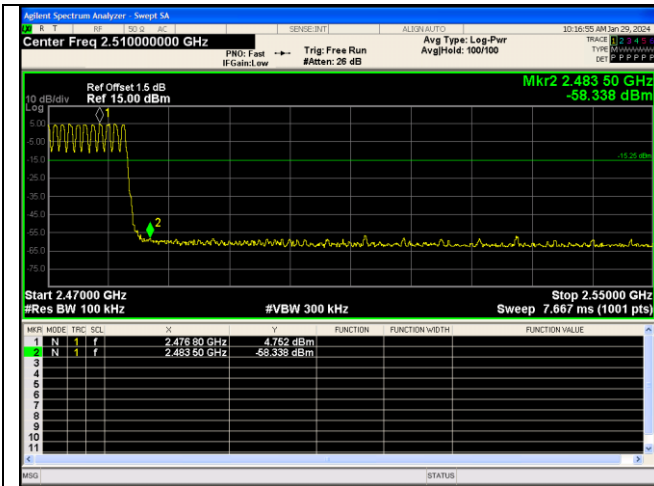


Out Of Band Emission(Right) GFSK\_DH5\_Channel Hopping

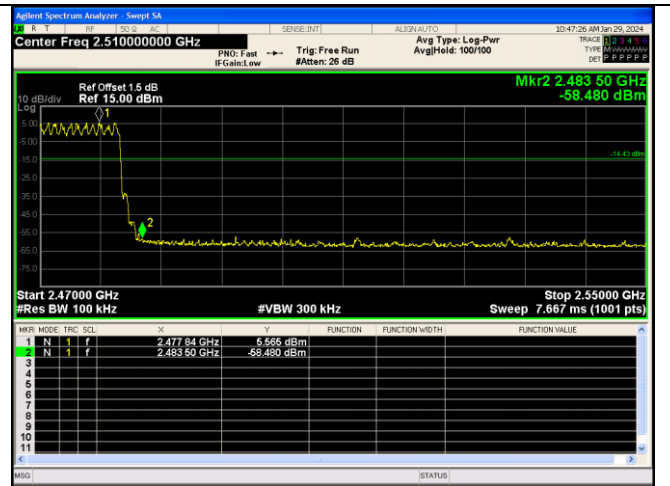


Out Of Band Emission(Right) pi/4DQPSK\_2-DH5\_Channel Hopping

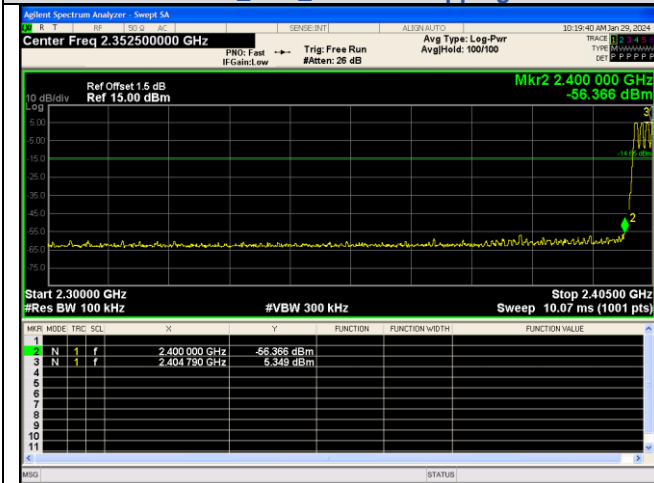


Out Of Band Emission(Left) GFSK\_DH5\_Channel Hopping

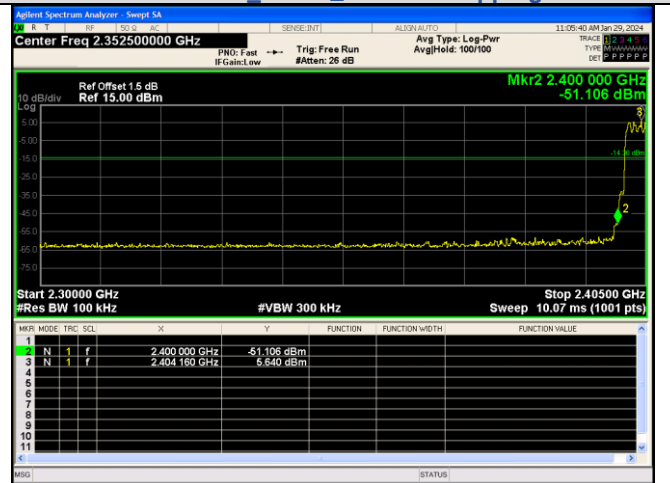


Out Of Band Emission(Left) pi/4DQPSK\_2-DH5\_Channel Hopping

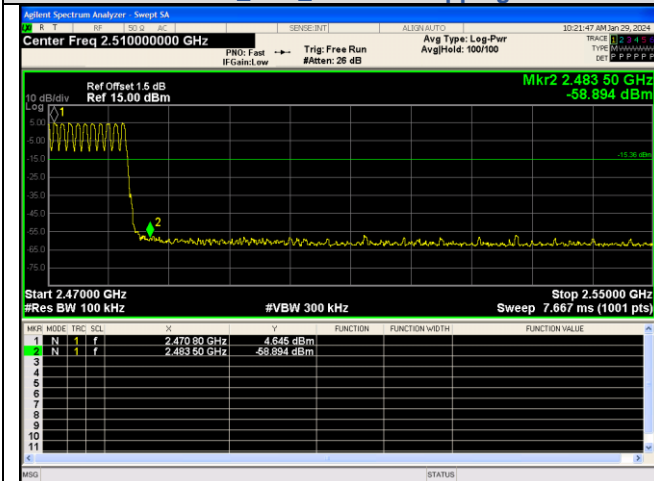


Out Of Band Emission(Right) GFSK\_DH5\_Channel Hopping

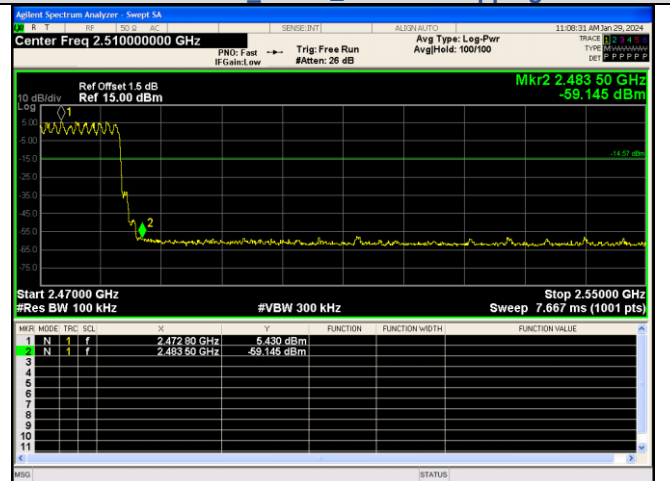


Out Of Band Emission(Right) pi/4DQPSK\_2-DH5\_Channel Hopping

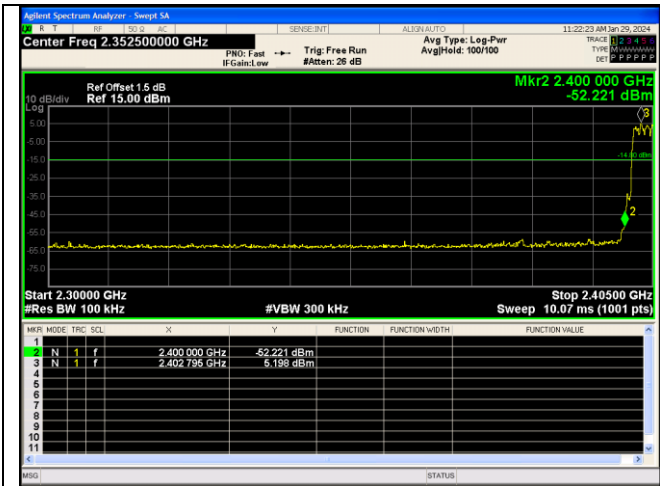


Out of Band Emission(Left)  
8DPSK\_3-DH5 Channel Hopping

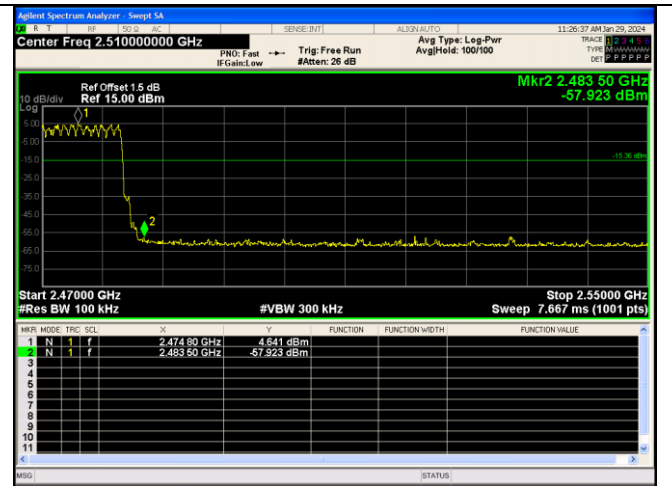


Out of Band Emission(Right)  
8DPSK\_3-DH5 Channel Hopping

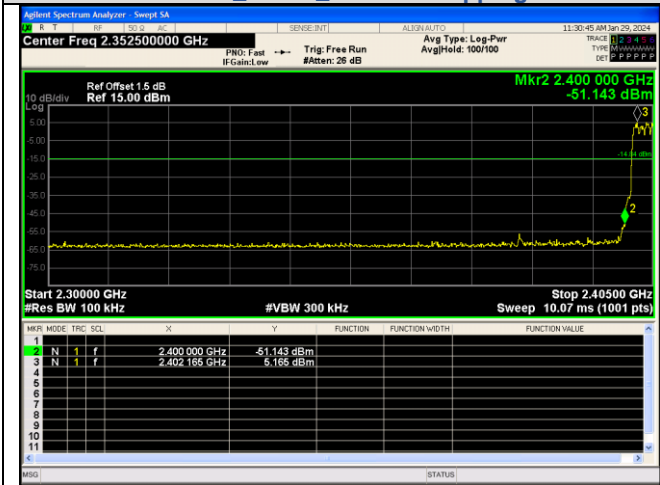


Out of Band Emission(Left)  
8DPSK\_3-DH5 Channel Hopping

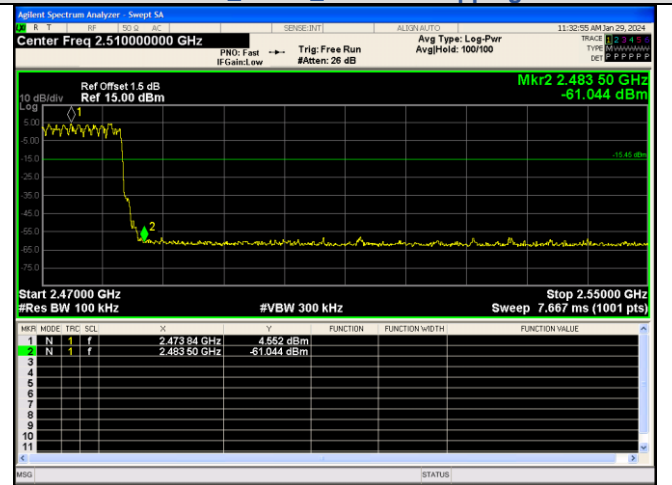

Out of Band Emission(Right)  
8DPSK\_3-DH5 Channel Hopping

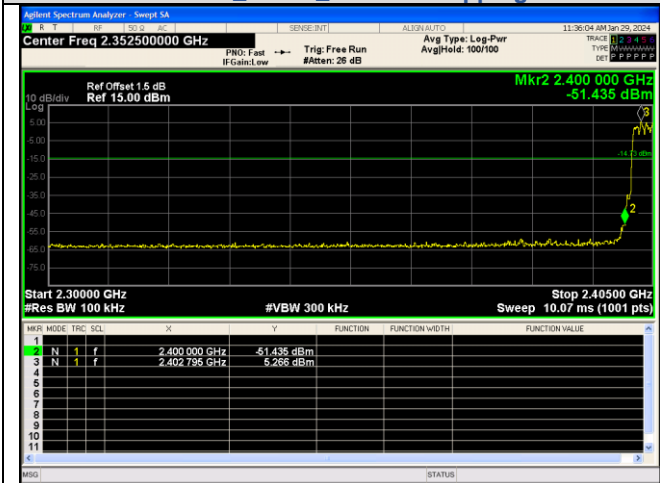

Out of Band Emission(Left)  
8DPSK\_3-DH5 Channel Hopping

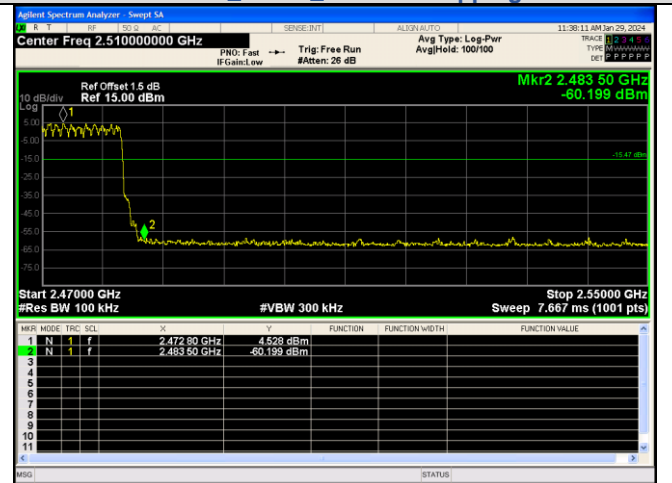

Out of Band Emission(Right)  
8DPSK\_3-DH5 Channel Hopping