



TESTING LABORATORY  
CERTIFICATE #4820.01



## FCC PART 15.247

## TEST REPORT

For

### Shenzhen Sonoff Technologies Co.,Ltd.

Building 8, Room 1001, Lianhua industrial park, Longyuan Road, Hualian community, Longhua St, Longhua dist, Shenzhen, Guangdong, China.

**FCC ID: 2APN5S31**

<b>Report Type:</b> Original Report	<b>Product Name:</b> Wi-Fi Smart Plug
<b>Report Number:</b>	RDG190709009-00
<b>Report Date:</b>	2019-08-01
<b>Reviewed By:</b>	Jerry Zhang EMC Manager <i>Jerry Zhang</i>
<b>Test Laboratory:</b>	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA\* or any agency of the Federal Government. \* This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “\*”.

## TABLE OF CONTENTS

<b>GENERAL INFORMATION.....</b>	<b>4</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE .....	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY .....	4
MEASUREMENT UNCERTAINTY .....	5
TEST FACILITY .....	5
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>6</b>
DESCRIPTION OF TEST CONFIGURATION .....	6
EUT EXERCISE SOFTWARE .....	6
EQUIPMENT MODIFICATIONS .....	8
SUPPORT EQUIPMENT LIST AND DETAILS .....	8
SUPPORT CABLE LIST AND DETAILS .....	8
BLOCK DIAGRAM OF TEST SETUP .....	9
<b>SUMMARY OF TEST RESULTS .....</b>	<b>10</b>
<b>FCC §15.247 (i) &amp; §1.1310 &amp; §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....</b>	<b>11</b>
APPLICABLE STANDARD .....	11
<b>FCC §15.203 - ANTENNA REQUIREMENT.....</b>	<b>12</b>
APPLICABLE STANDARD .....	12
ANTENNA CONNECTOR CONSTRUCTION .....	12
<b>FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS .....</b>	<b>13</b>
APPLICABLE STANDARD .....	13
EUT SETUP .....	13
EMI TEST RECEIVER SETUP.....	13
TEST PROCEDURE .....	14
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	14
TEST EQUIPMENT LIST AND DETAILS.....	14
TEST DATA .....	15
<b>FCC §15.209, §15.205 &amp; §15.247(d) - SPURIOUS EMISSIONS.....</b>	<b>19</b>
APPLICABLE STANDARD .....	19
EUT SETUP .....	19
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....	20
TEST PROCEDURE .....	20
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	20
TEST EQUIPMENT LIST AND DETAILS.....	21
TEST DATA .....	21
<b>FCC §15.247(a) (2)–6 dB EMISSION BANDWIDTH.....</b>	<b>28</b>
APPLICABLE STANDARD .....	28
TEST PROCEDURE .....	28
TEST EQUIPMENT LIST AND DETAILS.....	28
TEST DATA .....	28
<b>FCC §15.247(b) (3) - MAXIMUM PEAK CONDUCTED OUTPUT POWER.....</b>	<b>34</b>
APPLICABLE STANDARD .....	34
TEST PROCEDURE .....	34
TEST EQUIPMENT LIST AND DETAILS.....	34

---

TEST DATA .....	34
<b>FCC §15.247(d)- 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....</b>	<b>36</b>
APPLICABLE STANDARD .....	36
TEST PROCEDURE .....	36
TEST EQUIPMENT LIST AND DETAILS.....	36
TEST DATA .....	37
<b>FCC §15.247(e) - POWER SPECTRAL DENSITY .....</b>	<b>41</b>
APPLICABLE STANDARD .....	41
TEST PROCEDURE .....	41
TEST EQUIPMENT LIST AND DETAILS.....	41
TEST DATA .....	41

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

<b>EUT Name:</b>	Wi-Fi Smart Plug
<b>EUT Model:</b>	S31
<b>Multiple Models:</b>	S31 Lite
<b>Operation Frequency:</b>	2412-2462 MHz
<b>Maximum Peak Output Power (Conducted):</b>	22.97 dBm
<b>Modulation Type:</b>	DSSS, OFDM
<b>Rated Input Voltage:</b>	AC 120V/60Hz
<b>External Dimension:</b>	116mm(L)*70.4mm(W)*29.1mm(H)
<b>Serial Number:</b>	190716002-1(Model: S31) 190716002-2(Model: S31 Lite)
<b>EUT Received Date:</b>	2019-07-17

*Note: Model S31 was selected for fully testing and S31 Lite was test AC line conducted and Radiation emission test, the detailed information about the difference among S31 Lite and model S31 can be referred to the declaration letter which was stated and guaranteed by the manufacturer.*

### Objective

This report is prepared on behalf of **Shenzhen Sonoff Technologies Co.,Ltd.** in accordance with Part 2, Subpart J, Part 15, Subparts A and C of the Federal Communications Commission's rules.

The tests were performed in order to determine the compliance of the EUT with FCC Rules section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

### Related Submittal(s)/Grant(s)

No related submittal.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices. And 558074 D01 15.247 Meas Guidance v05r02

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

### Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.55 dB,200M~1GHz: 5.92 dB,1G~6GHz: 4.98 dB, 6G~18GHz: 5.89 dB,18G~26.5G:5.47 dB,26.5G~40G:5.63 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

### Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in Engineering Mode, which was provided by the manufacturer.

For 2.4GHz band, total 11 channels are provided:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

For 802.11b, 802.11g, and 802.11n ht20 modes were test with channel 1,6,11.

The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates, bandwidths, and modulations.

### EUT Exercise Software


The software "SecureCRT.exe" was used for testing, which was provided by manufacturer. The maximum power was configured as below table, that provided by the manufacturer:

Mode	Channel	Frequency (MHz)	Data rate	Power level Setting
802.11b	Low	2412	1Mbps	Default
	Middle	2437	1Mbps	Default
	High	2462	1Mbps	Default
802.11g	Low	2412	6Mbps	Default
	Middle	2437	6Mbps	Default
	High	2462	6Mbps	Default
802.11n ht20	Low	2412	MCS0	Default
	Middle	2437	MCS0	Default
	High	2462	MCS0	Default

The maximum duty cycle as following table:


Test mode	T <sub>on</sub> (ms)	T <sub>on+off</sub> (ms)	Duty Cycle (%)
802.11b	4.2391	4.7174	89.86
802.11g	0.7000	0.7957	87.97
802.11n ht20	0.6696	0.7565	88.51

802.11b

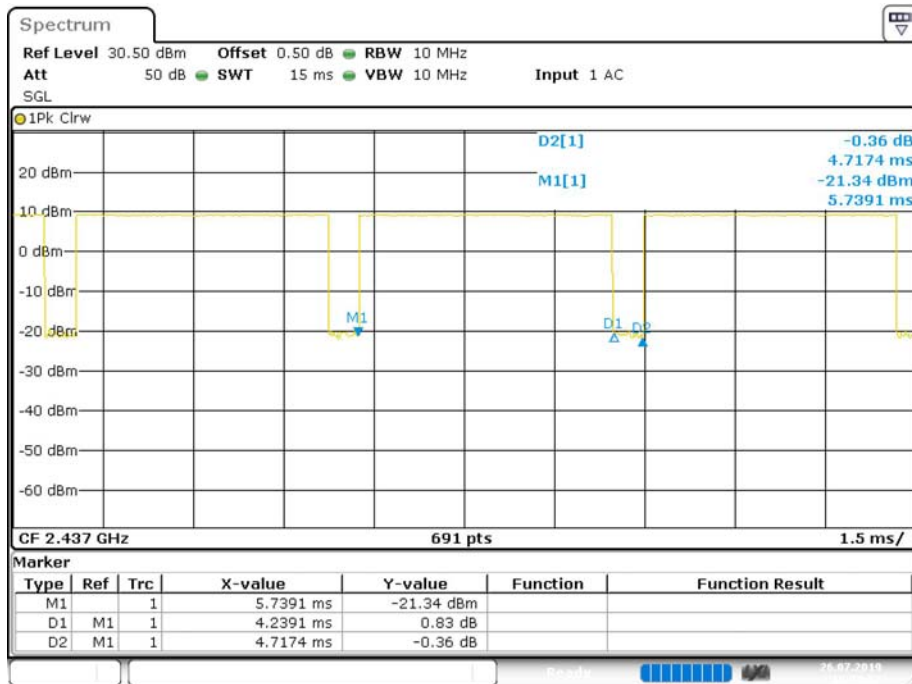


Date: 26.JUL.2019 18:19:51

802.11g

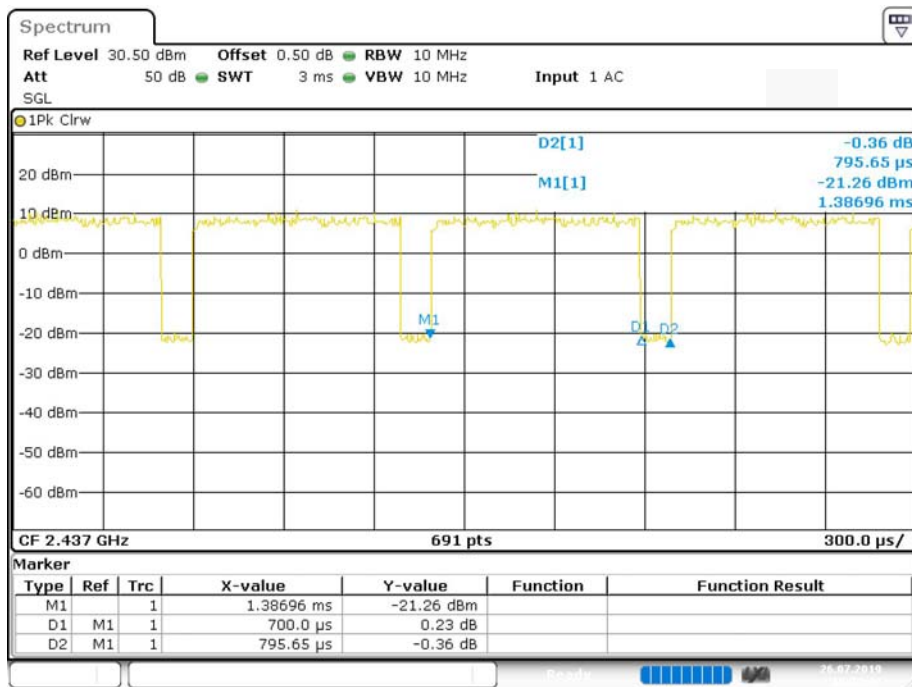

Date: 26.JUL.2019 18:22:42

802.11n ht20

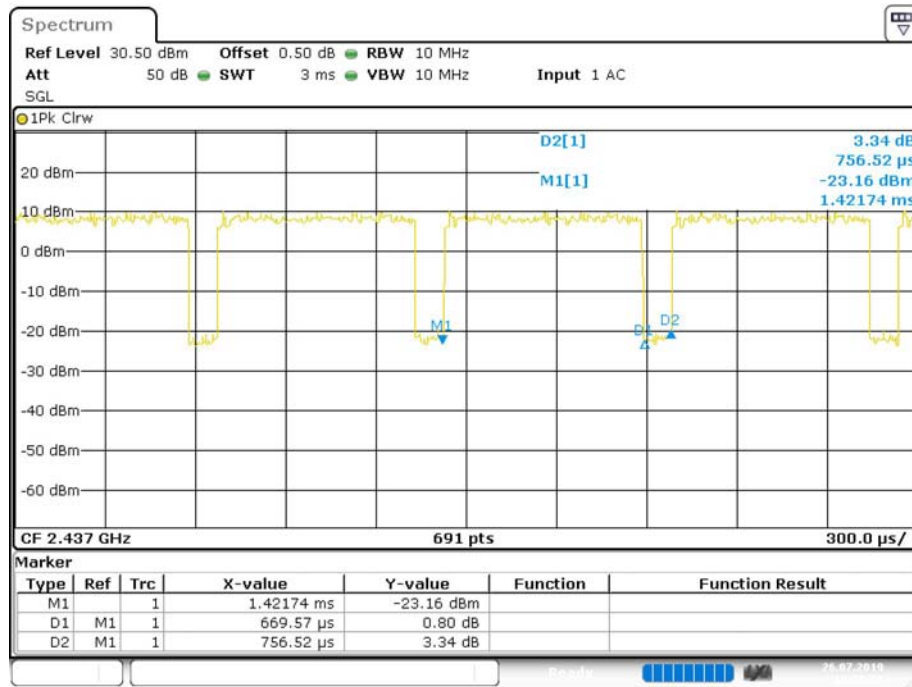

Date: 26.JUL.2019 18:25:05

**Equipment Modifications**

No modification was made to the EUT.

**Support Equipment List and Details**


Manufacturer	Description	Model	Serial Number
Unknown	Load	/	/

**Support Cable List and Details**

Cable Description	Shielding Type	Ferrite Core	Length (m)	From	To
Power Cable	Yes	No	1.0	EUT	Load



**Block Diagram of Test Setup**

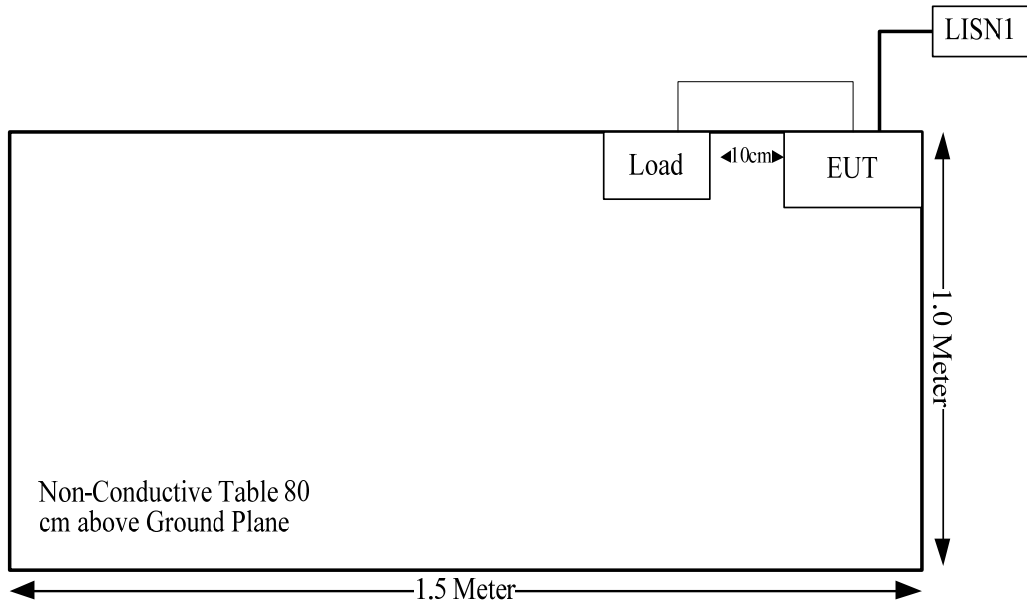

**SUMMARY OF TEST RESULTS**

FCC Rules	Description of Test	Result
FCC§15.247 (i) & §1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Bandwidth	Compliance
§15.247(b)(3)	Maximum Conducted Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

**FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)**

**Applicable Standard**

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission’s guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

<b>(B) Limits for General Population/Uncontrolled Exposure</b>				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; \* = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

**Calculated Formulary:**

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$  = power density (in appropriate units, e.g. mW/cm<sup>2</sup>);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

**Calculated Data:**

Frequency Range (MHz)	Antenna Gain		Max. Target Power including Tolerance		Evaluation Distance (cm)	Power Density (mW/cm <sup>2</sup> )	MPE Limit (mW/cm <sup>2</sup> )
	(dBi)	(numeric)	(dBm)	(mW)			
2412-2462	1	1.26	23	200	20.00	0.05	1.0

Note: the Max. Target Power including Tolerance was declared by manufacturer.

**Result: Compliance,** The device meets MPE requirement for Devices Used by the General Public (Uncontrolled Environment) at distance ≥20 cm.

## FCC §15.203 - ANTENNA REQUIREMENT

### Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

### Antenna Connector Construction

The EUT has one internal PCB antenna arrangement, fulfill the requirement of this section. Please refer to the EUT photos.

Antenna Type	input impedance (Ohm)	Antenna Gain /Frequency Range
PCB	50	1.0 dBi/2.4~2.5GHz


**Result:** Compliance.

**FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS**

**Applicable Standard**

FCC§15.207(a).

**EUT Setup**

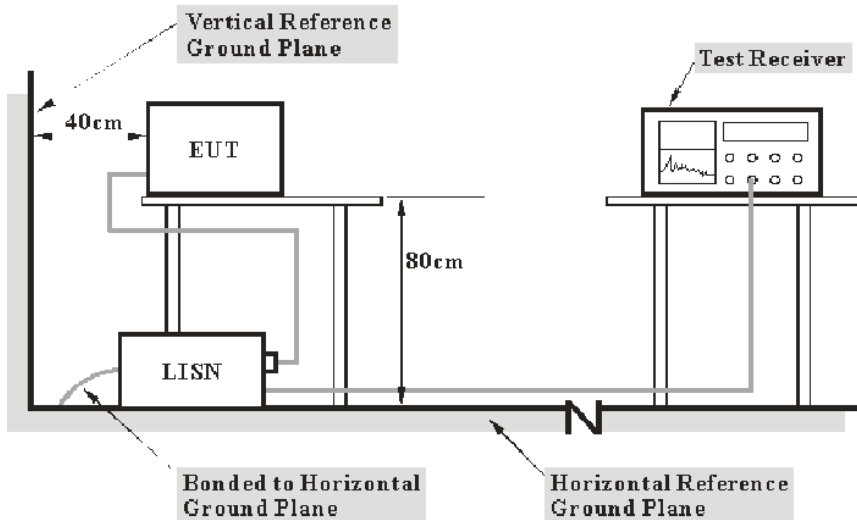

- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The EUT was connected to the main lisen with a 120 V/60 Hz AC power source.

**EMI Test Receiver Setup**

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

## Test Procedure

During the conducted emission test, the EUT was connected to the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

## Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

$V_C$  (cord. Reading): corrected voltage amplitude

$V_R$ : reading voltage amplitude

$A_C$ : attenuation caused by cable loss

VDF: voltage division factor of AMN

$C_f$ : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-01	2018-09-05	2019-09-05
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A
R&S	Two-line V-network	ENV 216	101614	2018-12-10	2019-12-10
R&S	EMI Test Receiver	ESPI	100120	2019-05-09	2020-05-09

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


**Test Data**

**Environmental Conditions**

<b>Temperature:</b>	30.4 °C
<b>Relative Humidity:</b>	40%
<b>ATM Pressure:</b>	99.2kPa
<b>Test by:</b>	Ade xiao
<b>Test Date:</b>	2019-07-19

**Test Mode: Transmitting**


**Model: S31**  
**AC120 V, 60 Hz, Line:**

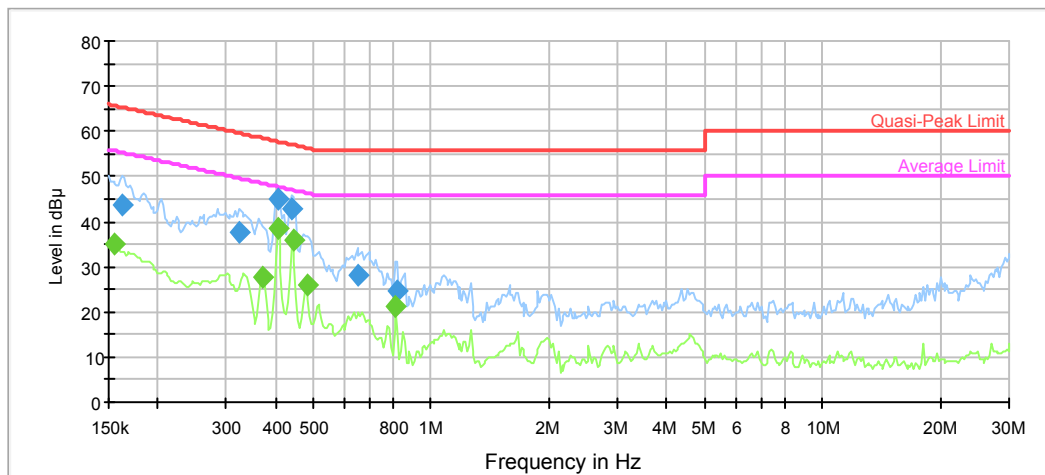

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.162429	43.5	9.000	L1	11.0	21.8	65.3
0.322729	37.7	9.000	L1	10.1	21.9	59.6
0.405722	45.0	9.000	L1	10.0	12.7	57.7
0.439339	42.9	9.000	L1	9.9	14.2	57.1
0.647640	28.3	9.000	L1	9.8	27.7	56.0
0.822331	24.5	9.000	L1	9.8	31.5	56.0

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.154545	35.3	9.000	L1	11.1	20.5	55.8
0.370968	27.9	9.000	L1	10.0	20.6	48.5
0.405722	38.3	9.000	L1	10.0	9.4	47.7
0.443733	36.0	9.000	L1	9.9	11.0	47.0
0.480499	25.9	9.000	L1	9.9	20.4	46.3
0.814189	21.4	9.000	L1	9.8	24.6	46.0

**AC120 V, 60 Hz, Neutral:**

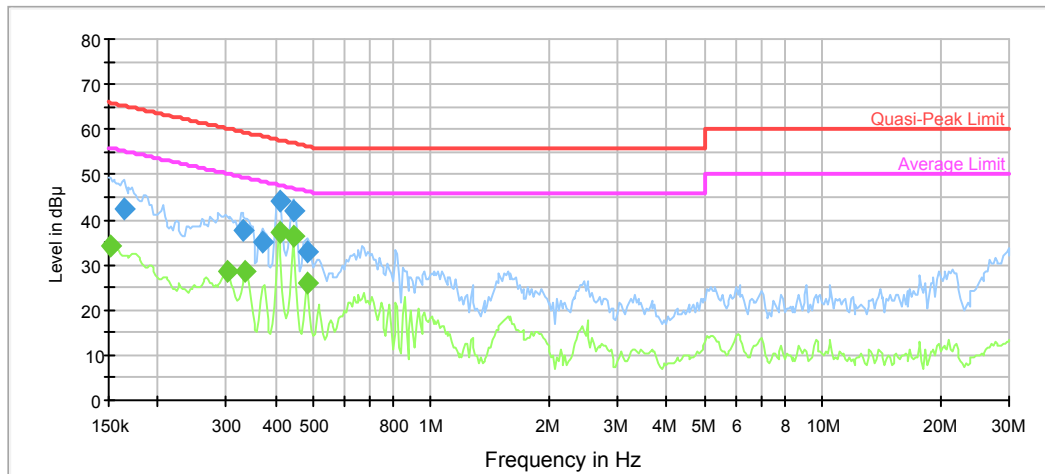


Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.164053	42.3	9.000	N	11.0	23.0	65.3
0.329215	37.8	9.000	N	10.1	21.7	59.5
0.370968	34.9	9.000	N	10.0	23.6	58.5
0.409780	43.9	9.000	N	10.0	13.7	57.7
0.443733	42.1	9.000	N	9.9	14.9	57.0
0.480499	33.1	9.000	N	9.9	23.2	56.3

Frequency (MHz)	Average (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.151500	34.4	9.000	N	11.1	21.5	55.9
0.301015	28.4	9.000	N	10.1	21.8	50.2
0.335833	28.5	9.000	N	10.1	20.8	49.3
0.409780	37.1	9.000	N	10.0	10.6	47.7
0.443733	36.3	9.000	N	9.9	10.7	47.0
0.480499	26.1	9.000	N	9.9	20.2	46.3



**Model: S31 Lite**


**AC120 V, 60 Hz, Line:**

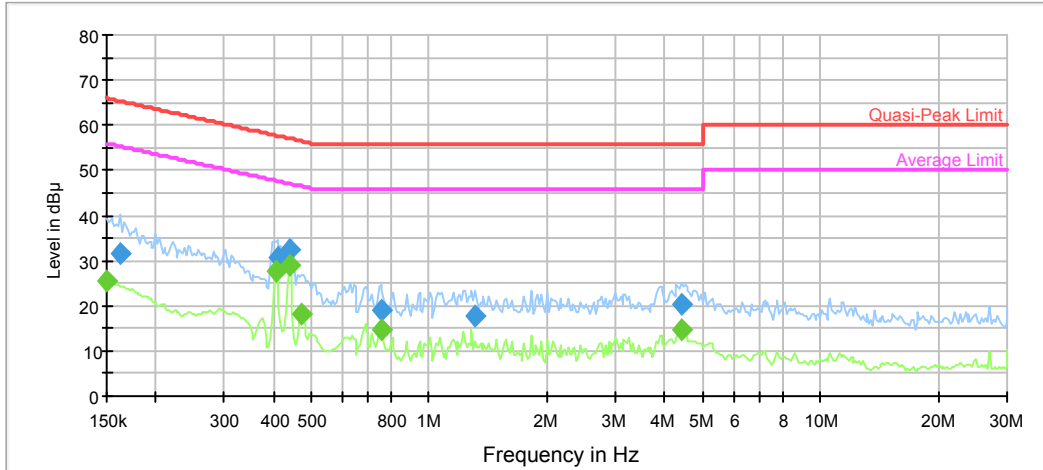

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.162429	31.6	9.000	L1	11.0	33.7	65.3
0.409780	30.7	9.000	L1	10.0	27.0	57.7
0.439339	32.3	9.000	L1	9.9	24.8	57.1
0.751890	18.9	9.000	L1	9.8	37.1	56.0
1.312656	17.6	9.000	L1	9.8	38.4	56.0
4.419352	20.2	9.000	L1	9.8	35.8	56.0

Frequency (MHz)	Average (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.150000	25.5	9.000	L1	11.2	30.5	56.0
0.405722	27.8	9.000	L1	10.0	19.9	47.7
0.439339	29.0	9.000	L1	9.9	18.1	47.1
0.471031	18.4	9.000	L1	9.9	28.1	46.5
0.751890	14.7	9.000	L1	9.8	31.3	46.0
4.419352	14.8	9.000	L1	9.8	31.2	46.0

**AC120 V, 60 Hz, Neutral:**

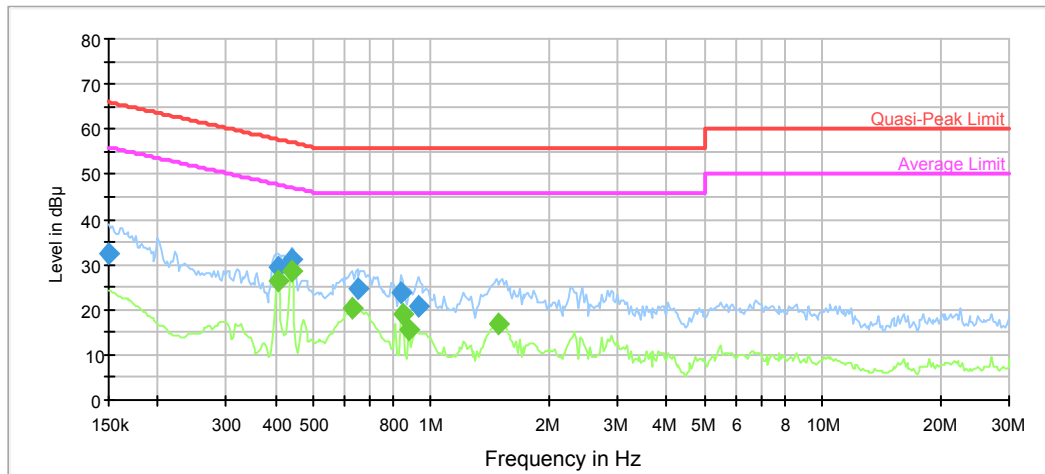

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	32.2	9.000	N	11.2	33.8	66.0
0.405722	29.6	9.000	N	10.0	28.1	57.7
0.439339	31.2	9.000	N	9.9	25.9	57.1
0.647640	24.5	9.000	N	9.8	31.5	56.0
0.838859	24.0	9.000	N	9.8	32.0	56.0
0.926623	20.6	9.000	N	9.8	35.4	56.0

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.405722	26.4	9.000	N	10.0	21.3	47.7
0.439339	28.6	9.000	N	9.9	18.5	47.1
0.628593	20.4	9.000	N	9.8	25.6	46.0
0.847248	19.0	9.000	N	9.8	27.0	46.0
0.872921	15.8	9.000	N	9.8	30.2	46.0
1.493925	16.9	9.000	N	9.8	29.1	46.0


## FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

### Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

### EUT Setup

#### Below 1GHz:

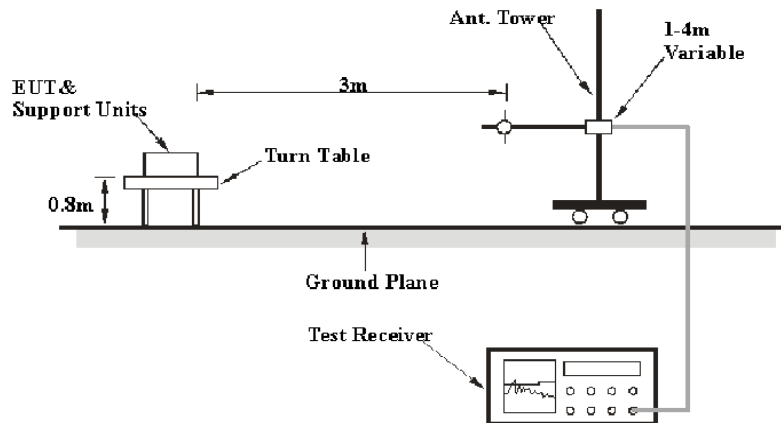

#### Above 1GHz:

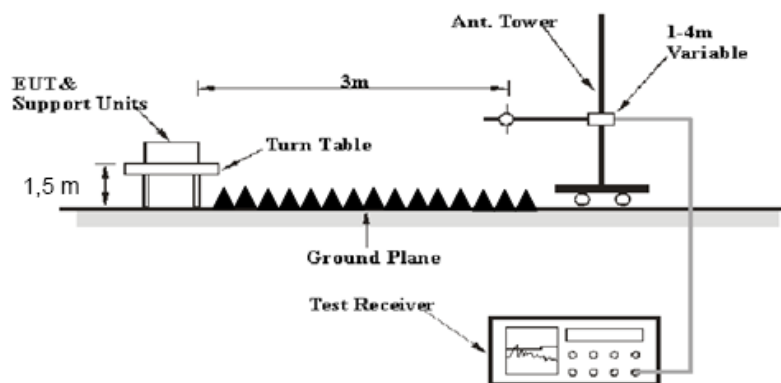

The radiated emission Below 1GHz tests were performed in the 3 meters chamber A, above 1GHz tests were performed in the 3 meters chamber A, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The spacing between the peripherals was 10 cm.

## EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30MHz-1000MHz:

Measurement	RBW	Video B/W	IF B/W
QP	120 kHz	300 kHz	120kHz

1GHz- 25GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
AV	>98%	1MHz	10 Hz
	<98%	1MHz	1/T

Note: T is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESR3	102453	2019-06-26	2020-06-26
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1400-01	2019-05-06	2020-05-06
HP	Amplifier	8447D	2727A05902	2018-09-05	2019-09-05
R&S	Spectrum Analyzer	FSP 38	100478	2019-05-09	2020-05-09
TDK RF	Horn Antenna	HRN-0118	130 084	2018-10-12	2021-10-12
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2016-11-18	2019-11-18
MICRO-COAX	Coaxial Cable	UFA147-1-2362- 100100	64639 231029- 001	2019-02-24	2020-02-24
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2018-09-05	2019-09-05
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2019-06-27	2020-06-27
E-Microwave	Band-stop Filters	OBSF-2400-2483.5- S	OE01601525	2019-06-16	2020-06-16
Micro-tronics	High Pass Filter	HPM50111	S/N-G217	2019-06-16	2020-06-16

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data****Environmental Conditions**


Test items:	Radiation Below 1GHz	Radiation Above 1GHz
<b>Temperature:</b>	28.7°C	29.1°C
<b>Relative Humidity:</b>	55%	52%
<b>ATM Pressure:</b>	99.9kPa	100.3kPa
<b>Test by:</b>	<i>Tyler Pan</i>	<i>Tyler Pan</i>
<b>Test Date:</b>	<i>2019-07-13</i>	<i>2019-07-17</i>

*Test Result: Compliance, please Refer to the following data*

*Test Mode: Transmitting(Model: S31 was the worst)*


1) 30MHz-1GHz(802.11b,low channel was the worst)

Horizontal:

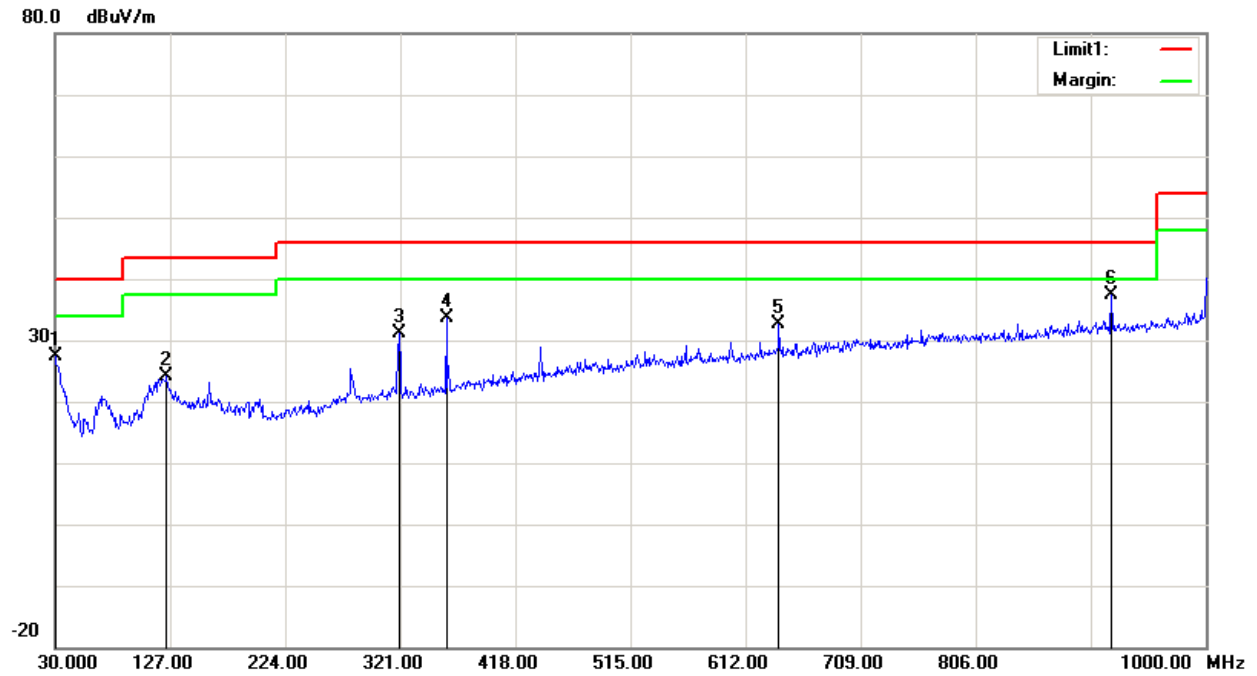

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
30.0000	25.65	peak	1.72	27.37	40.00	12.63
124.0900	28.75	peak	-4.56	24.19	43.50	19.31
320.0300	34.65	peak	-3.45	31.20	46.00	14.80
359.8000	36.45	peak	-2.80	33.65	46.00	12.35
640.1300	30.47	peak	2.27	32.74	46.00	13.26
920.4600	36.96	peak	0.37	37.33	46.00	8.67

**Vertical:**

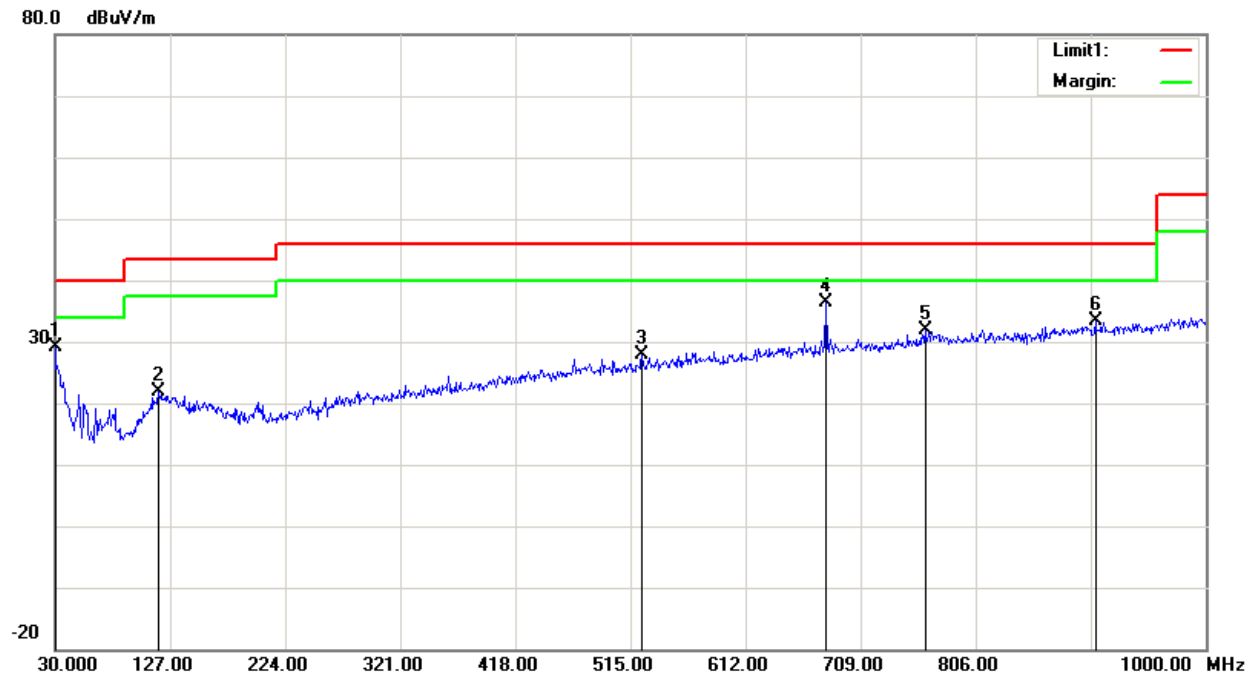

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
30.0000	27.37	peak	1.72	29.09	40.00	10.91
117.3000	26.86	peak	-4.95	21.91	43.50	21.59
524.7000	27.65	peak	0.15	27.80	46.00	18.20
679.9000	33.83	peak	2.66	36.49	46.00	9.51
763.3200	27.65	peak	4.11	31.76	46.00	14.24
906.8800	33.17	peak	0.21	33.38	46.00	12.62

**2) 1-25GHz:  
802.11b Mode:**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2390.00	24.25	PK	V	24.80	3.33	0.00	52.38	74.00	21.62
2390.00	12.51	AV	V	24.80	3.33	0.00	40.64	54.00	13.36
4824.00	50.40	PK	V	29.75	4.58	27.41	57.32	74.00	16.68
4824.00	46.87	AV	V	29.75	4.58	27.41	53.79	54.00	0.21
7236.00	41.20	PK	V	33.98	5.62	27.22	53.58	74.00	20.42
7236.00	27.49	AV	V	33.98	5.62	27.22	39.87	54.00	14.13
Middle Channel: 2437 MHz									
4874.00	49.54	PK	V	29.85	4.57	27.54	56.42	74.00	17.58
4874.00	45.37	AV	V	29.85	4.57	27.54	52.25	54.00	1.75
7311.00	36.70	PK	V	34.10	5.68	27.28	49.20	74.00	24.80
7311.00	23.40	AV	V	34.10	5.68	27.28	35.90	54.00	18.10
High Channel: 2462 MHz									
2483.50	23.90	PK	V	24.97	3.38	0.00	52.25	74.00	21.75
2483.50	12.54	AV	V	24.97	3.38	0.00	40.89	54.00	13.11
4924.00	49.81	PK	V	29.95	4.57	27.51	56.82	74.00	17.18
4924.00	45.29	AV	V	29.95	4.57	27.51	52.30	54.00	1.70
7386.00	36.74	PK	V	34.22	5.74	27.18	49.52	74.00	24.48
7386.00	23.54	AV	V	34.22	5.74	27.18	36.32	54.00	17.68

**802.11g Mode:**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2390.00	28.02	PK	V	24.80	3.33	0.00	56.15	74.00	17.85
2390.00	13.50	AV	V	24.80	3.33	0.00	41.63	54.00	12.37
4824.00	56.06	PK	V	29.75	4.58	27.41	62.98	74.00	11.02
4824.00	42.65	AV	V	29.75	4.58	27.41	49.57	54.00	4.43
7236.00	41.08	PK	V	33.98	5.62	27.22	53.46	74.00	20.54
7236.00	25.32	AV	V	33.98	5.62	27.22	37.70	54.00	16.30
Middle Channel: 2437 MHz									
4874.00	51.87	PK	V	29.85	4.57	27.54	58.75	74.00	15.25
4874.00	38.13	AV	V	29.85	4.57	27.54	45.01	54.00	8.99
7311.00	37.80	PK	V	34.10	5.68	27.28	50.30	74.00	23.70
7311.00	24.54	AV	V	34.10	5.68	27.28	37.04	54.00	16.96
High Channel: 2462 MHz									
2483.50	26.87	PK	V	24.97	3.38	0.00	55.22	74.00	18.78
2483.50	13.40	AV	V	24.97	3.38	0.00	41.75	54.00	12.25
4924.00	49.08	PK	V	29.95	4.57	27.51	56.09	74.00	17.91
4924.00	35.39	AV	V	29.95	4.57	27.51	42.40	54.00	11.60
7386.00	37.45	PK	V	34.22	5.74	27.18	50.23	74.00	23.77
7386.00	24.44	AV	V	34.22	5.74	27.18	37.22	54.00	16.78






**802.11n ht20 Mode:**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2390.00	25.18	PK	V	24.80	3.33	0.00	53.31	74.00	20.69
2390.00	13.57	AV	V	24.80	3.33	0.00	41.70	54.00	12.30
4824.00	53.64	PK	V	29.75	4.58	27.41	60.56	74.00	13.44
4824.00	41.95	AV	V	29.75	4.58	27.41	48.87	54.00	5.13
7236.00	41.17	PK	V	33.98	5.62	27.22	53.55	74.00	20.45
7236.00	28.54	AV	V	33.98	5.62	27.22	40.92	54.00	13.08
Middle Channel: 2437 MHz									
4874.00	50.21	PK	V	29.85	4.57	27.54	57.09	74.00	16.91
4874.00	40.17	AV	V	29.85	4.57	27.54	47.05	54.00	6.95
7311.00	38.40	PK	V	34.10	5.68	27.28	50.90	74.00	23.10
7311.00	26.70	AV	V	34.10	5.68	27.28	39.20	54.00	14.80
High Channel: 2462 MHz									
2483.50	24.26	PK	V	24.97	3.38	0.00	52.61	74.00	21.39
2483.50	13.25	AV	V	24.97	3.38	0.00	41.60	54.00	12.40
4924.00	46.98	PK	V	29.95	4.57	27.51	53.99	74.00	20.01
4924.00	34.80	AV	V	29.95	4.57	27.51	41.81	54.00	12.19
7386.00	34.50	PK	V	34.22	5.74	27.18	47.28	74.00	26.72
7386.00	21.87	AV	V	34.22	5.74	27.18	34.65	54.00	19.35




**Test plots(802.11b low channel was the worst)  
Horizontal:**

Fundamental  
Test with Band  
Rejection Filter

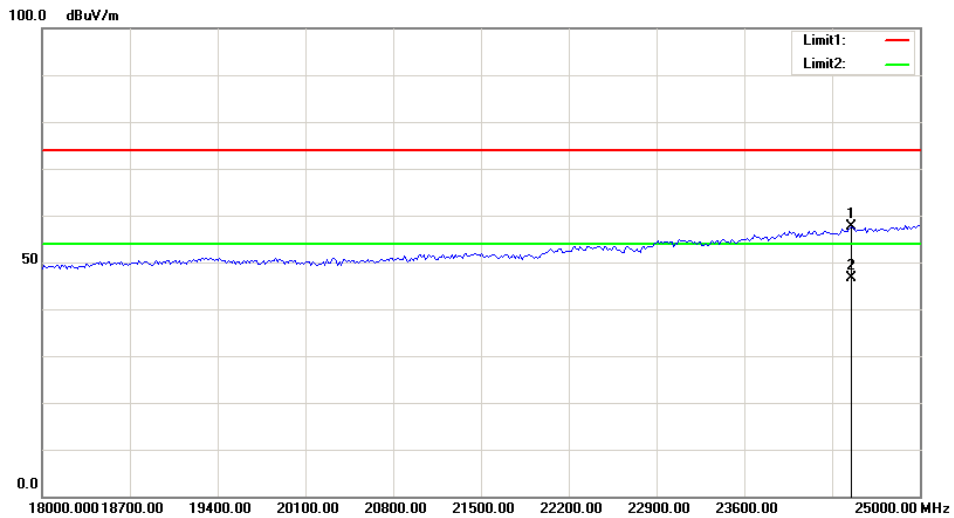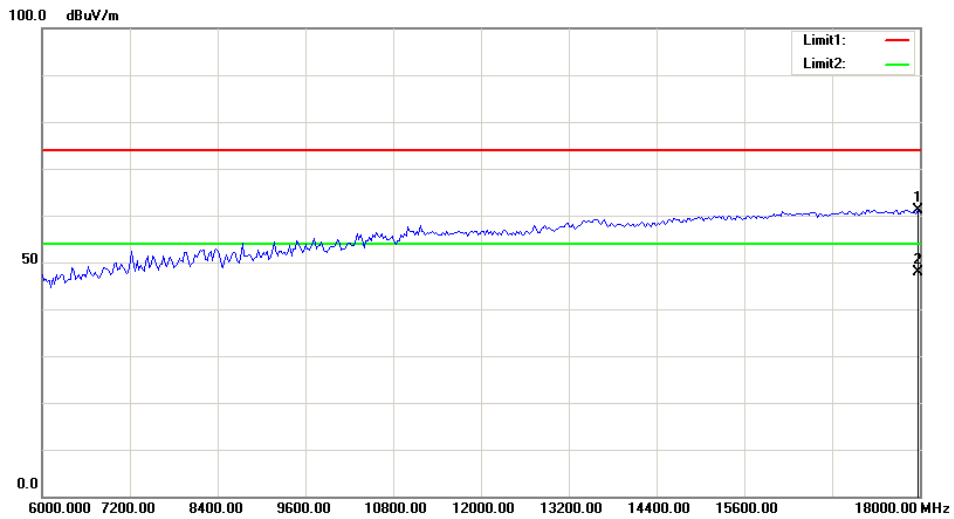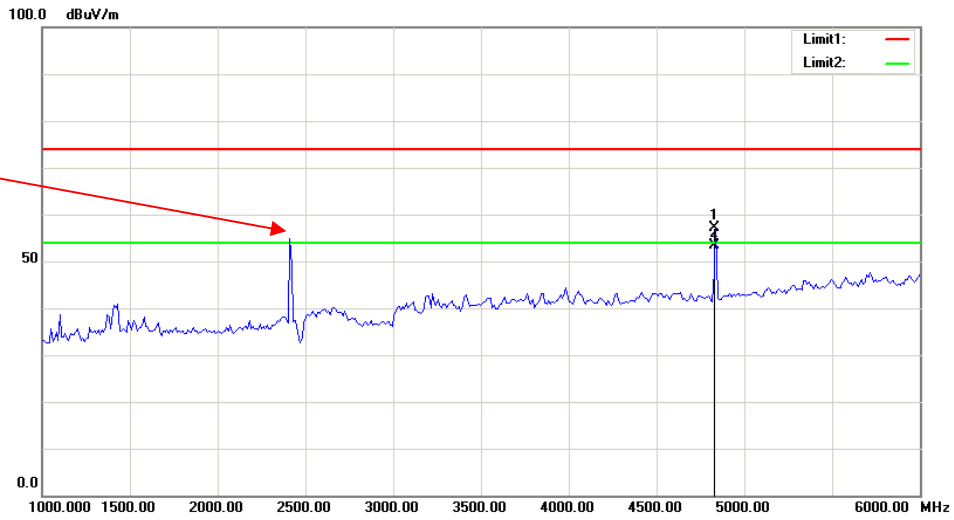

**Vertical:**

Fundamental  
Test with Band  
Rejection Filter

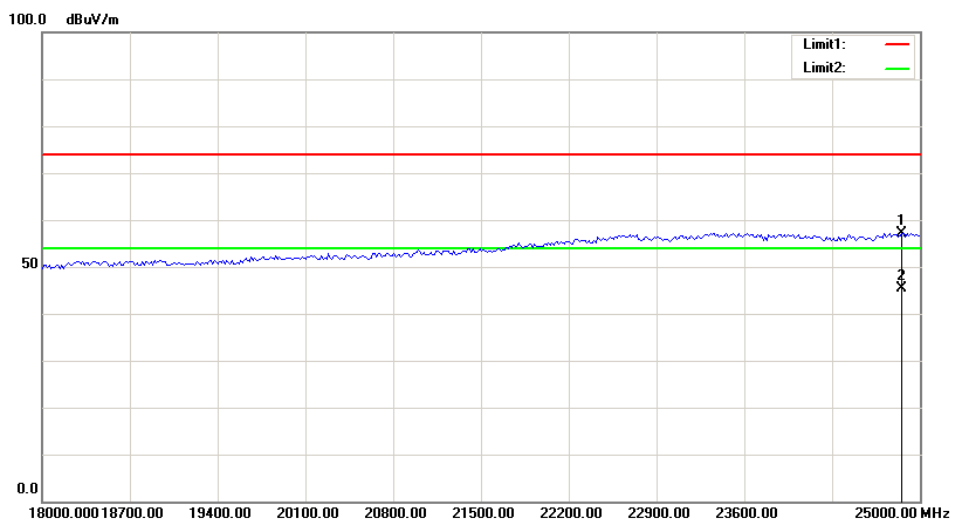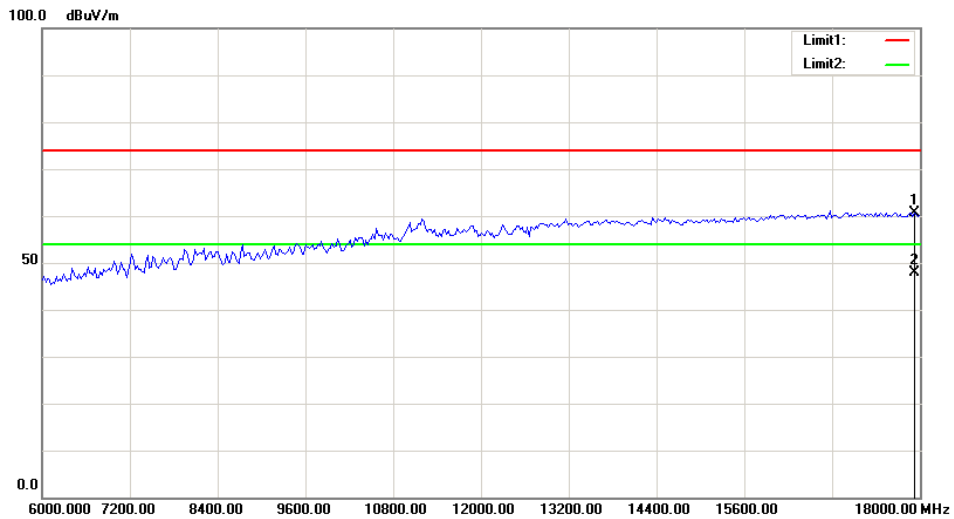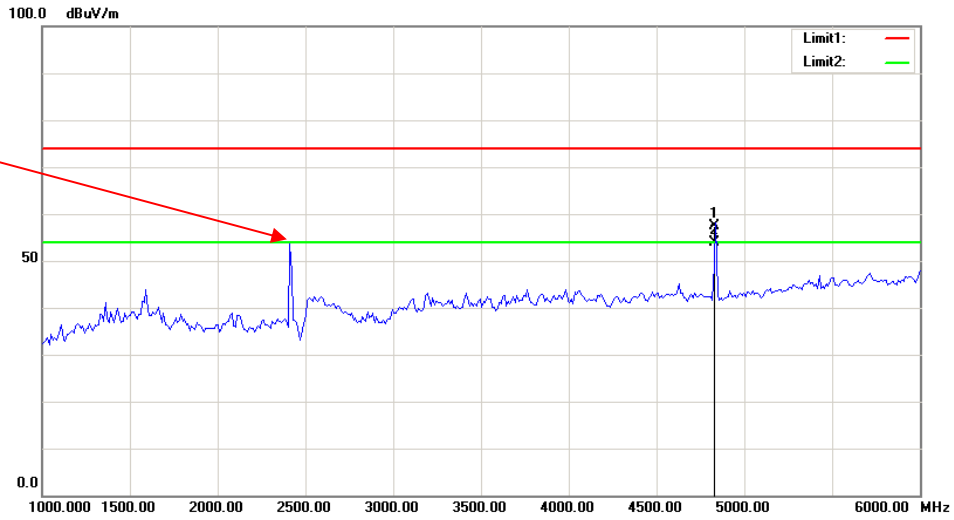


**FCC §15.247(a) (2)–6 dB EMISSION BANDWIDTH****Applicable Standard**

According to FCC §15.247(a) (2)

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

**Test Procedure**

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2019-05-09	2020-05-09
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data****Environmental Conditions**


<b>Temperature:</b>	28.8°C
<b>Relative Humidity:</b>	57%
<b>ATM Pressure:</b>	100.1kPa
<b>Test by:</b>	Lily Xie
<b>Test Date:</b>	2019-07-25

Test Mode: Transmitting

Test Result: Compliance. Please refer to the following table and plots.


Test mode	Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)
802.11b	Low	2412	9.12	≥0.5
	Middle	2437	8.56	≥0.5
	High	2462	9.12	≥0.5
802.11g	Low	2412	15.92	≥0.5
	Middle	2437	15.92	≥0.5
	High	2462	16.16	≥0.5
802.11n ht20	Low	2412	16.32	≥0.5
	Middle	2437	16.16	≥0.5
	High	2462	16.24	≥0.5

802.11b Low Channel

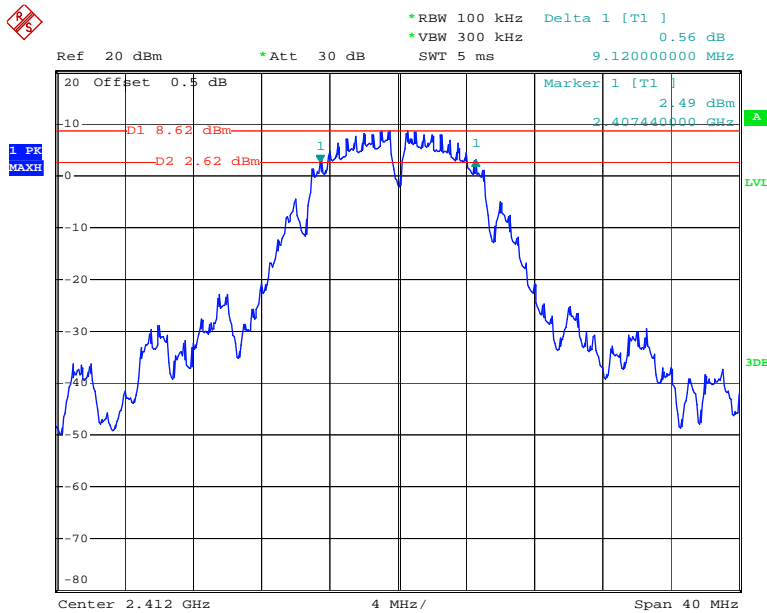


Date: 25.JUL.2019 23:17:24

### 802.11b Middle Channel

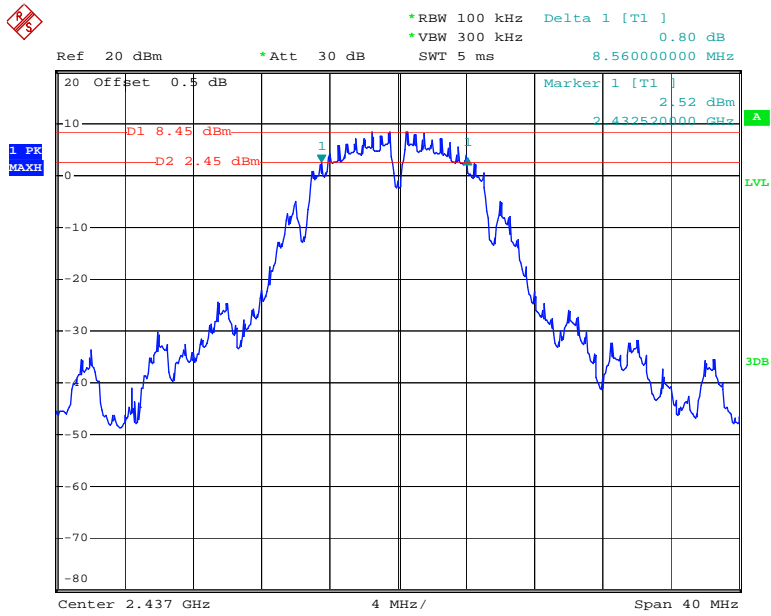


Date: 25.JUL.2019 23:19:46

### 802.11b High Channel

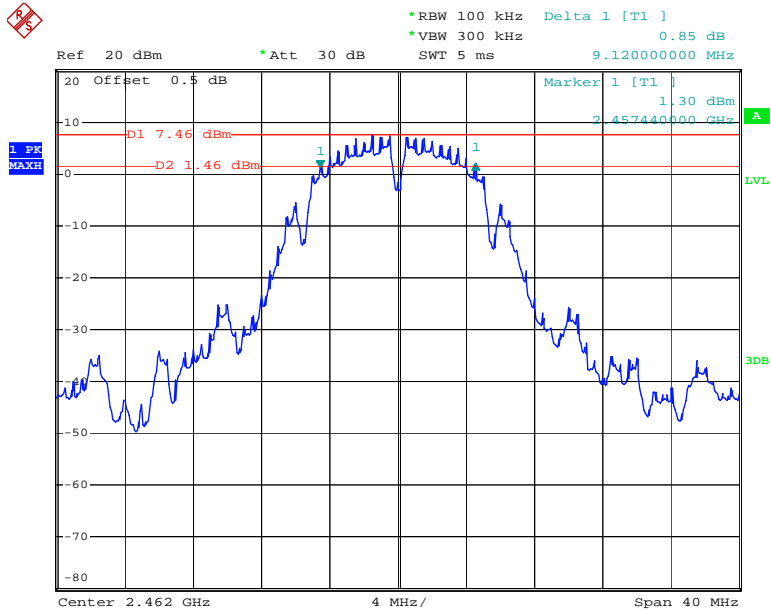


Date: 25.JUL.2019 23:21:58

### 802.11g Low Channel

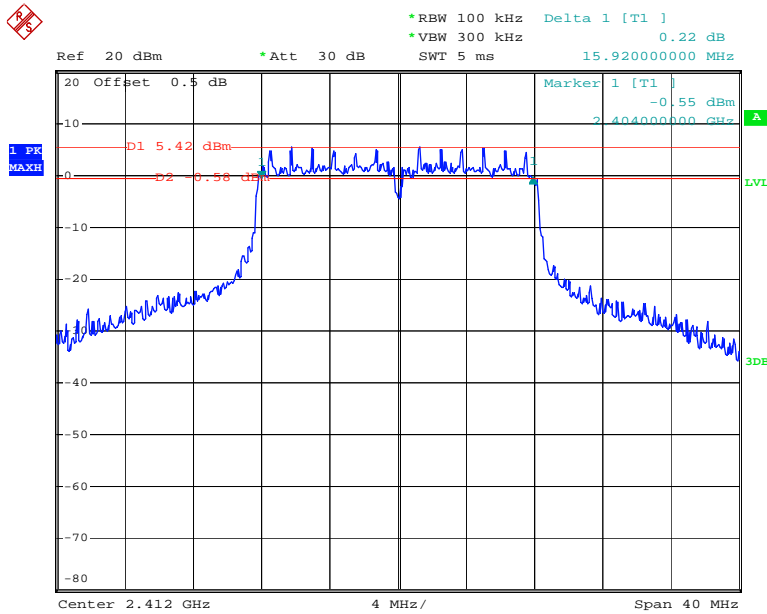


Date: 25.JUL.2019 23:41:22

### 802.11g Middle Channel

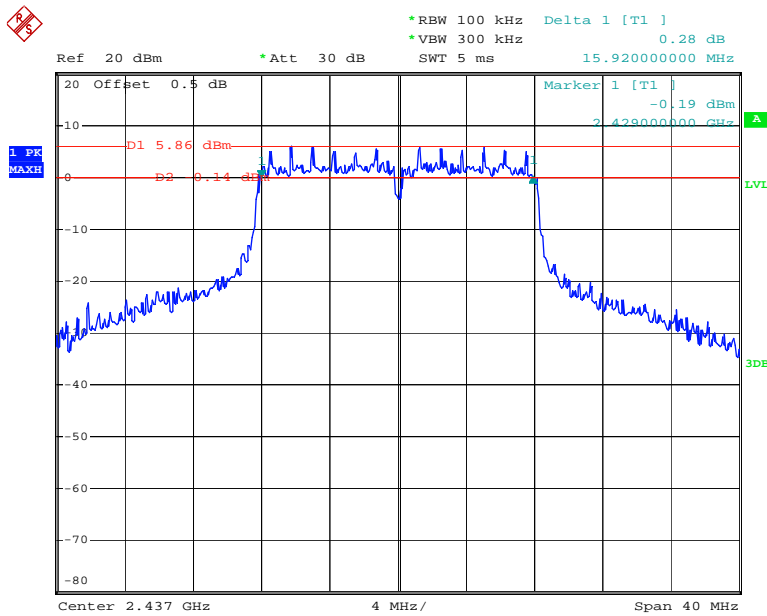


Date: 25.JUL.2019 23:34:35

### 802.11g High Channel

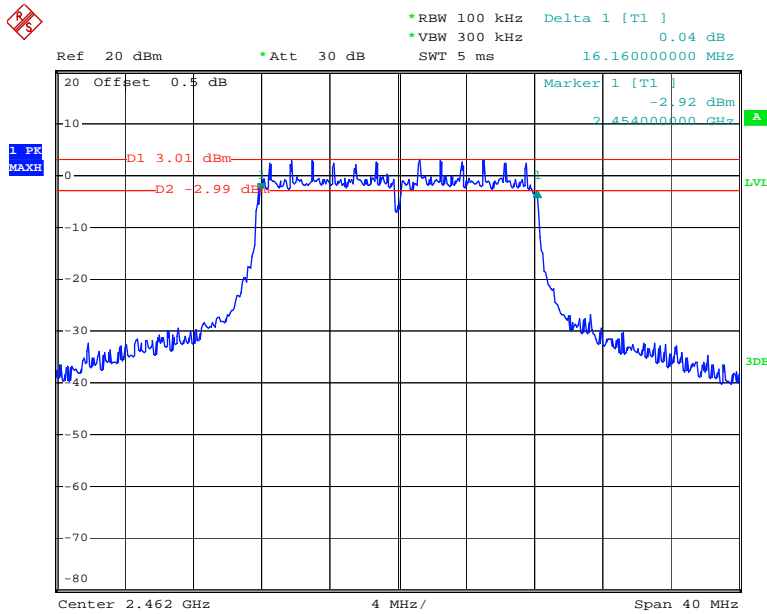

Date: 25.JUL.2019 23:28:35


### 802.11n ht20 Low Channel

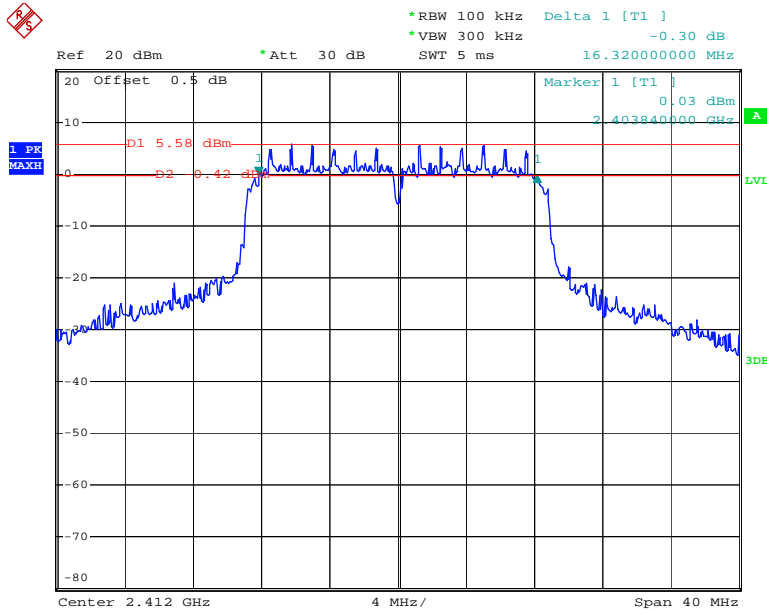

Date: 25.JUL.2019 23:45:07




### 802.11n ht20 Middle Channel

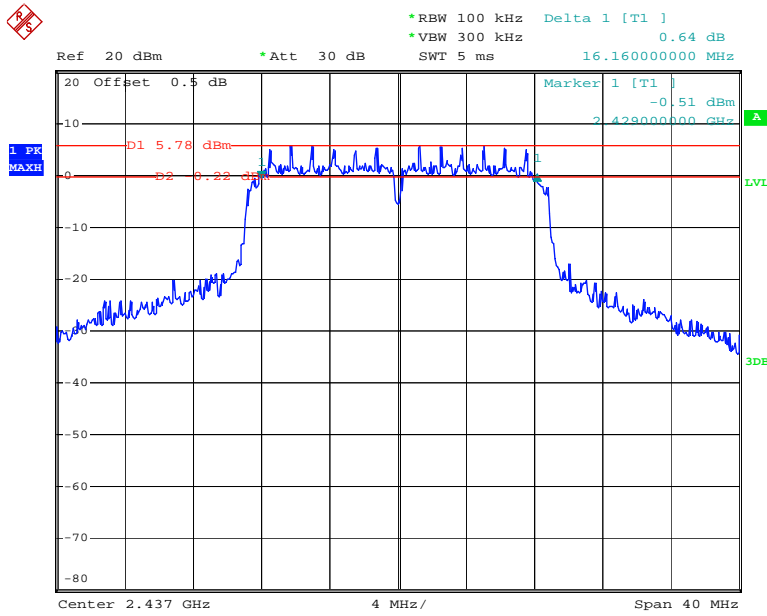

Date: 25.JUL.2019 23:48:05

### 802.11n ht20 High Channel

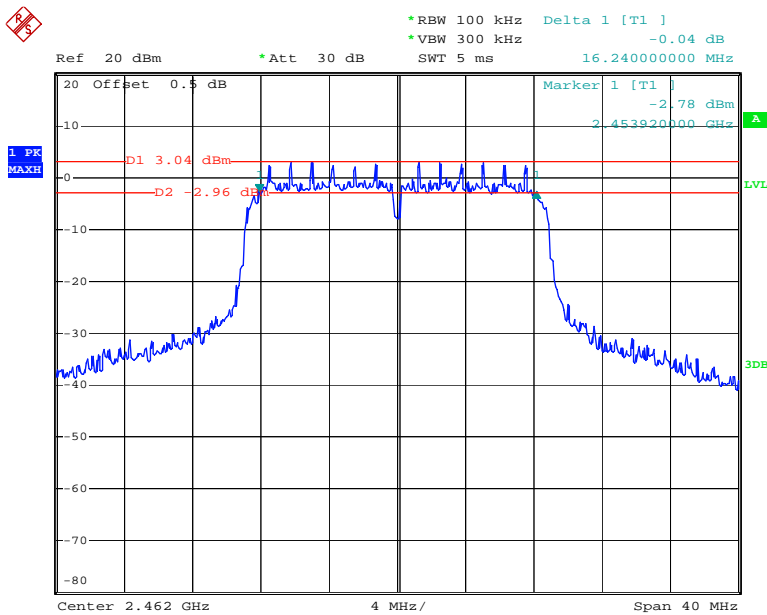

Date: 25.JUL.2019 23:50:05


**FCC §15.247(b) (3) - Maximum PEAK Conducted Output Power**

**Applicable Standard**

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

**Test Procedure**

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to test equipment.
3. Add a correction factor to the display.
4. Set the power meter to test average output power, record the result as average power.



**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A
Agilent	USB Wideband Power Sensor	U2022XA	MY5417006	2018-12-10	2019-12-10

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data**

**Environmental Conditions**

<b>Temperature:</b>	28.8°C
<b>Relative Humidity:</b>	57%
<b>ATM Pressure:</b>	100.1kPa
<b>Test by:</b>	Lily Xie
<b>Test Date:</b>	2019-07-25

*Test Mode: Transmitting*

*Test Result: Compliance. Please refer to the following table.*

<b>Mode</b>	<b>Frequency (MHz)</b>	<b>Maximum conducted Peak Output Power (dBm)</b>	<b>Limit (dBm)</b>
802.11 b	2412	21.22	30
	2437	20.53	30
	2462	19.74	30
802.11 g	2412	22.71	30
	2437	22.81	30
	2462	22.07	30
802.11n20	2412	22.87	30
	2437	22.97	30
	2462	21.76	30

## **FCC §15.247(d)– 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE**

### **Applicable Standard**

According to FCC§15.247(d):In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### **Test Procedure**

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### **Test Equipment List and Details**

<b>Manufacturer</b>	<b>Description</b>	<b>Model</b>	<b>Serial Number</b>	<b>Calibration Date</b>	<b>Calibration Due Date</b>
R&S	Spectrum Analyzer	FSP 38	100478	2019-05-09	2020-05-09
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data**

**Environmental Conditions**


<b>Temperature:</b>	28.8°C
<b>Relative Humidity:</b>	57%
<b>ATM Pressure:</b>	100.1kPa
<b>Test by:</b>	<i>Lily Xie</i>
<b>Test Date:</b>	2019-07-25

*Test mode: Transmitting*

*Test Result: Compliance. Please refer to following plots.*


802.11b:

Band Edge, Left Side

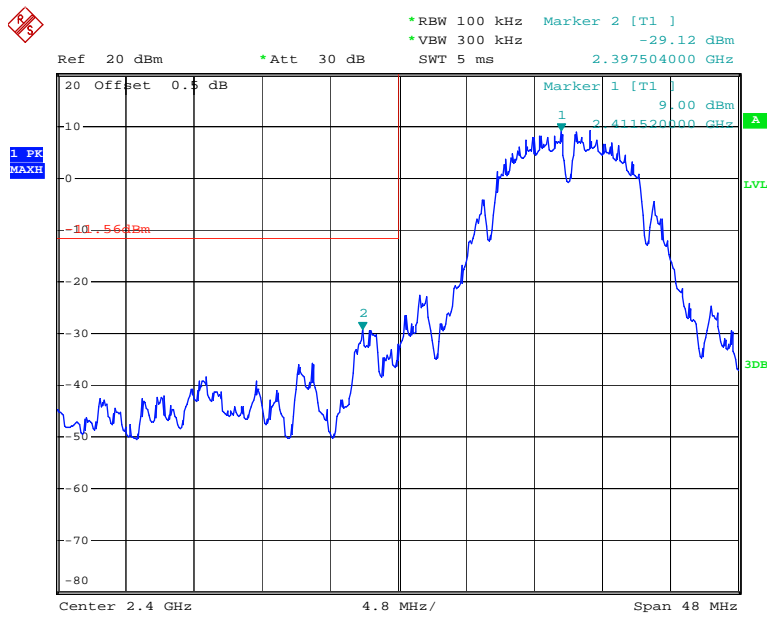

Date: 25.JUL.2019 23:19:12


Band Edge, Right Side

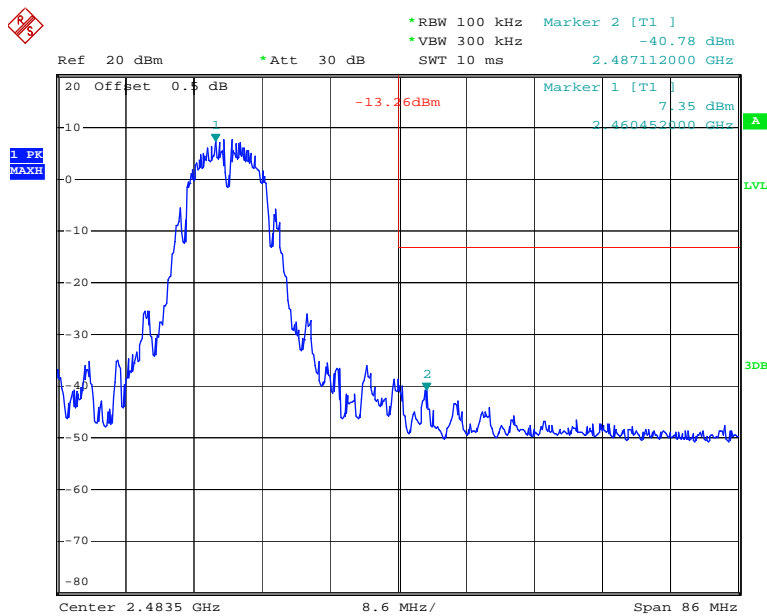

Date: 25.JUL.2019 23:23:55


802.11g:

Band Edge, Left Side

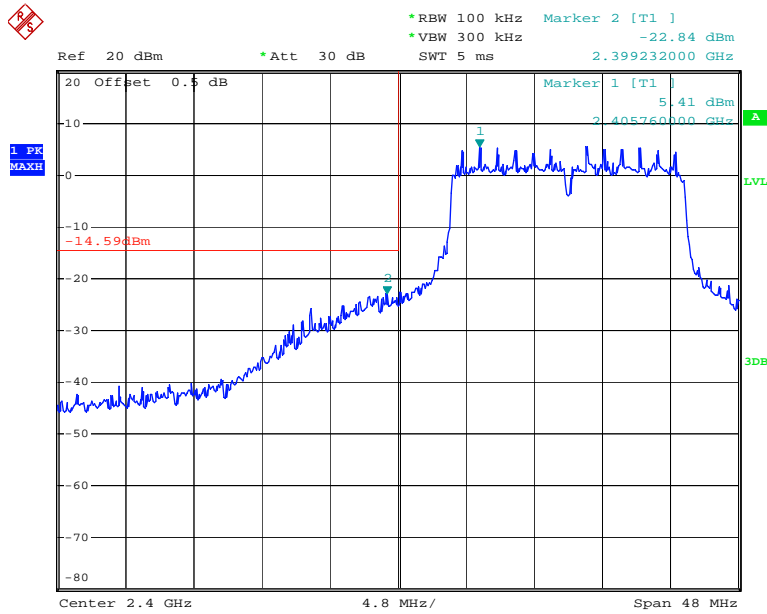

Date: 25.JUL.2019 23:43:59


Band Edge, Right Side

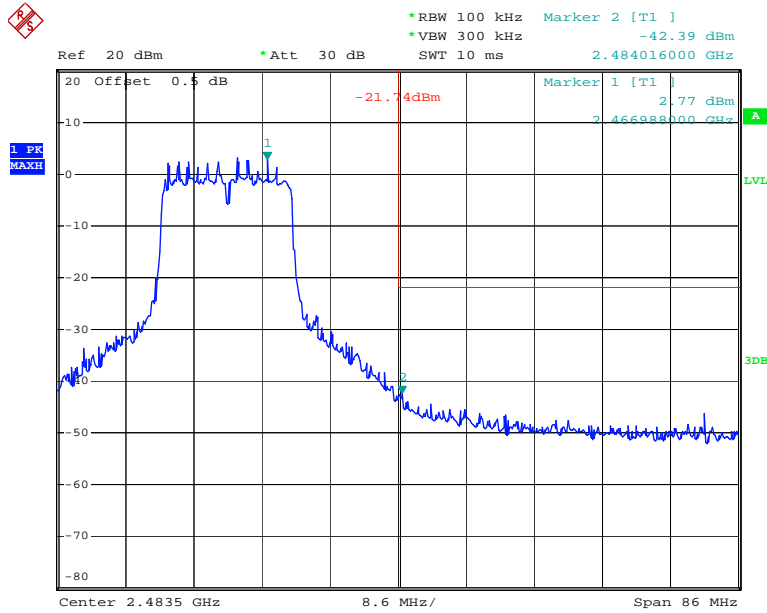

Date: 25.JUL.2019 23:30:31


802.11n ht20:

Band Edge, Left Side

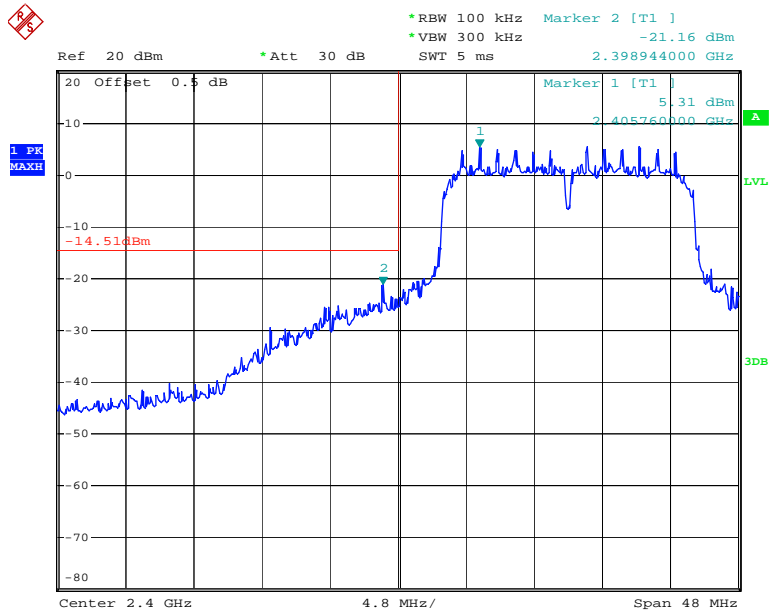

Date: 25.JUL.2019 23:47:04

Band Edge, Right Side

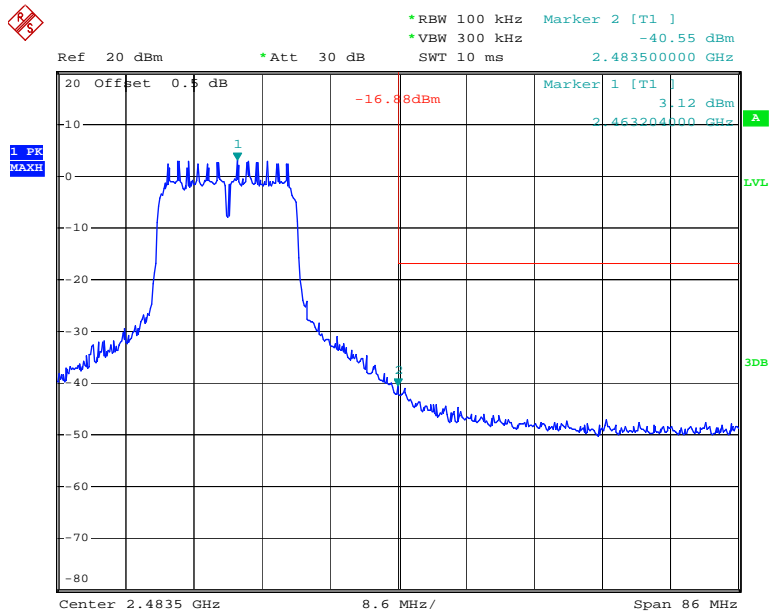

Date: 25.JUL.2019 23:52:12



## FCC §15.247(e) - POWER SPECTRAL DENSITY

### Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set the RBW = 3 kHz, VBW = 10 kHz, Set the span to 1.5 times the DTS bandwidth.
4. Use the peak marker function to determine the maximum amplitude level.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2019-05-09	2020-05-09
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions


<b>Temperature:</b>	28.8°C
<b>Relative Humidity:</b>	57%
<b>ATM Pressure:</b>	100.1kPa
<b>Test by:</b>	Lily Xie
<b>Test Date:</b>	2019-07-25

**Test Result:** Compliance, Please refer to the following table and plots

Test Mode: Transmitting


Test mode	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
802.11b	2412	-6.02	≤8
	2437	-6.48	≤8
	2462	-7.58	≤8
802.11g	2412	-9.10	≤8
	2437	-8.69	≤8
	2462	-11.54	≤8
802.11n ht20	2412	-9.24	≤8
	2437	-9.31	≤8
	2462	-11.89	≤8

**Power Spectral Density, 802.11b Low Channel**

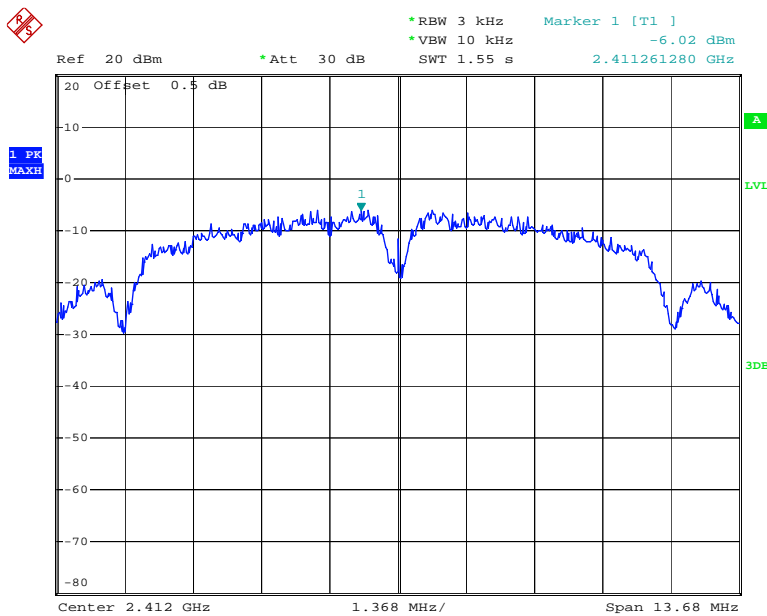


Date: 25.JUL.2019 23:18:48

### Power Spectral Density, 802.11b Middle Channel

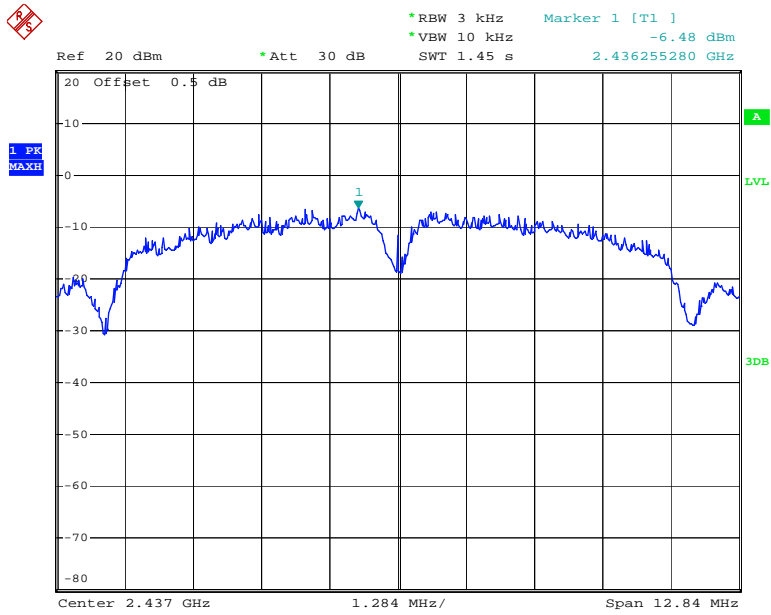


Date: 25.JUL.2019 23:21:12

### Power Spectral Density, 802.11b High Channel

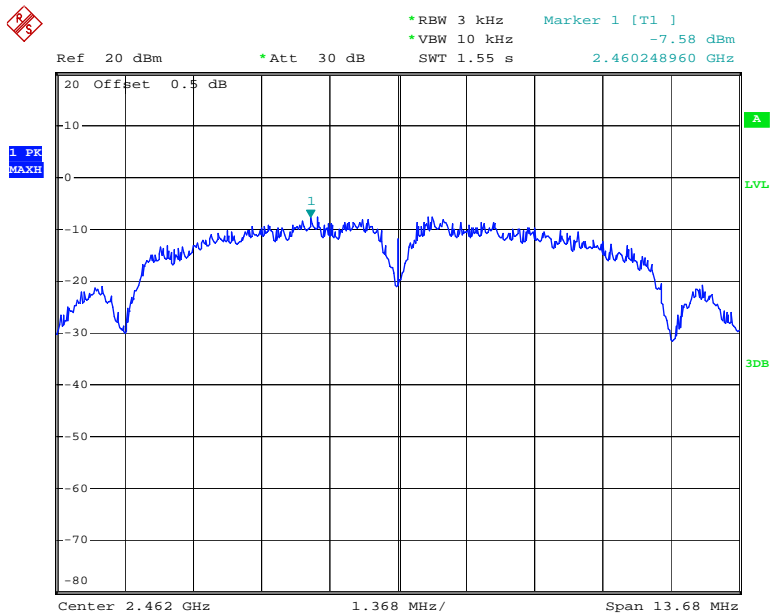


Date: 25.JUL.2019 23:23:25

### Power Spectral Density, 802.11g Low Channel

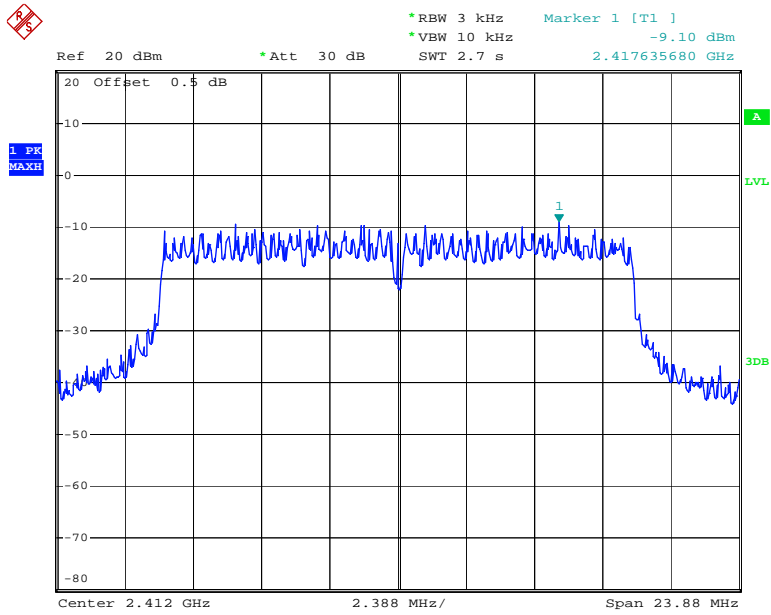


Date: 25.JUL.2019 23:43:17

### Power Spectral Density, 802.11g Middle Channel

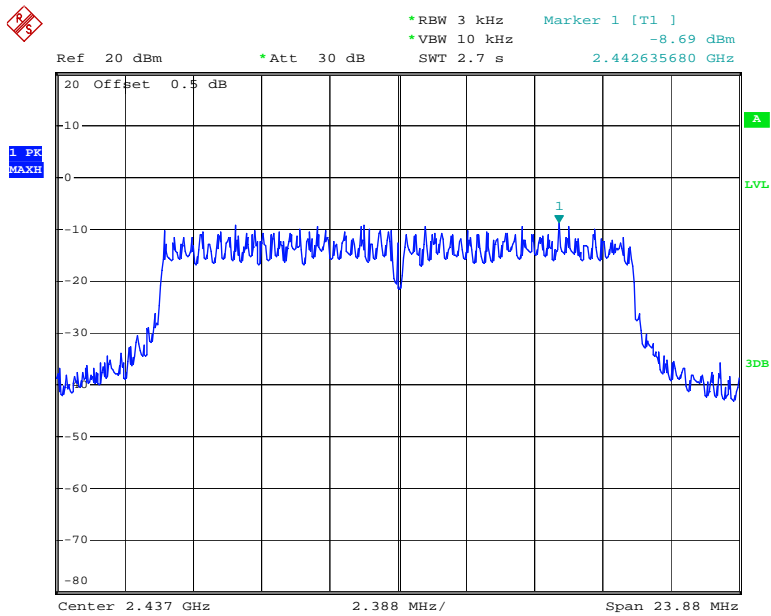


Date: 25.JUL.2019 23:37:02

### Power Spectral Density, 802.11g High Channel

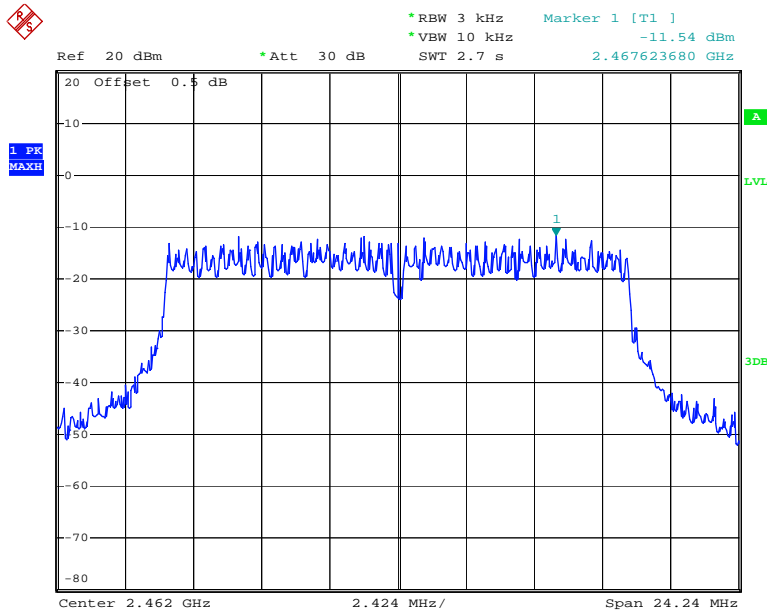


Date: 25.JUL.2019 23:30:12

### Power Spectral Density, 802.11n ht20 Low Channel

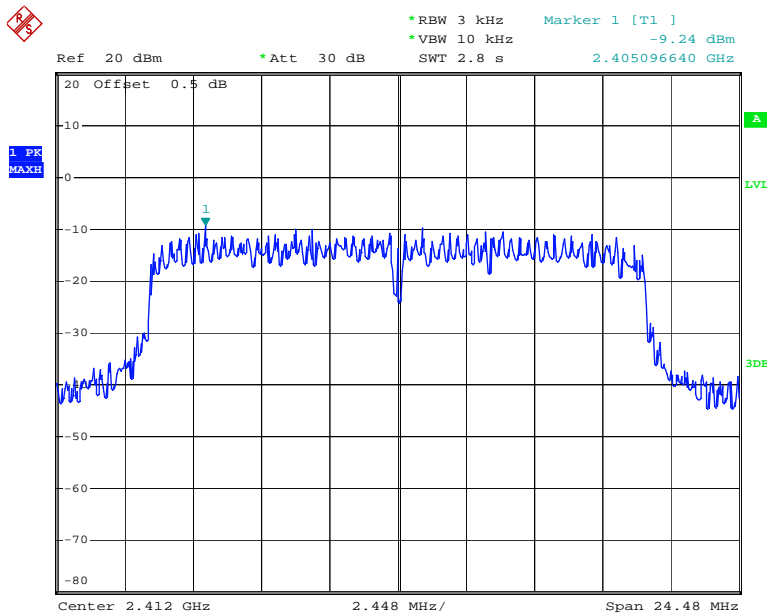


Date: 25.JUL.2019 23:46:37

### Power Spectral Density, 802.11n ht20 Middle Channel

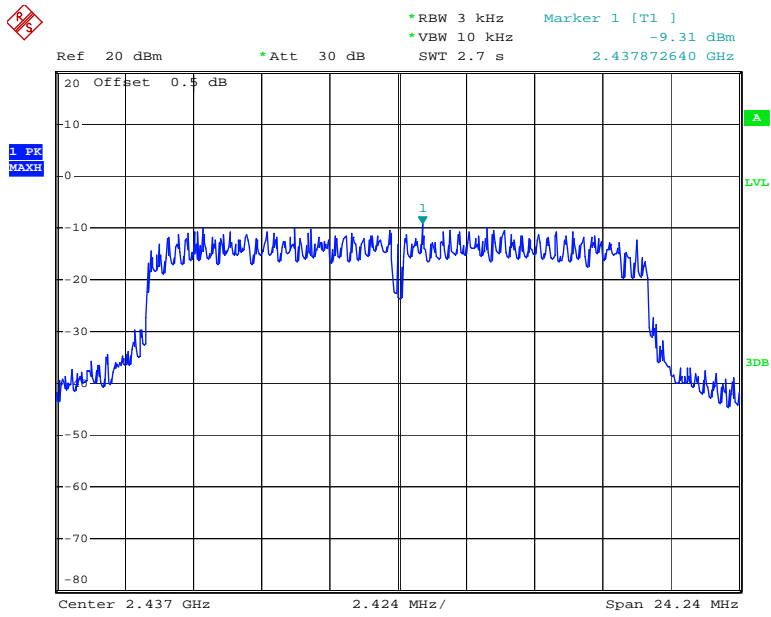

### Power Spectral Density, 802.11n ht20 High Channel

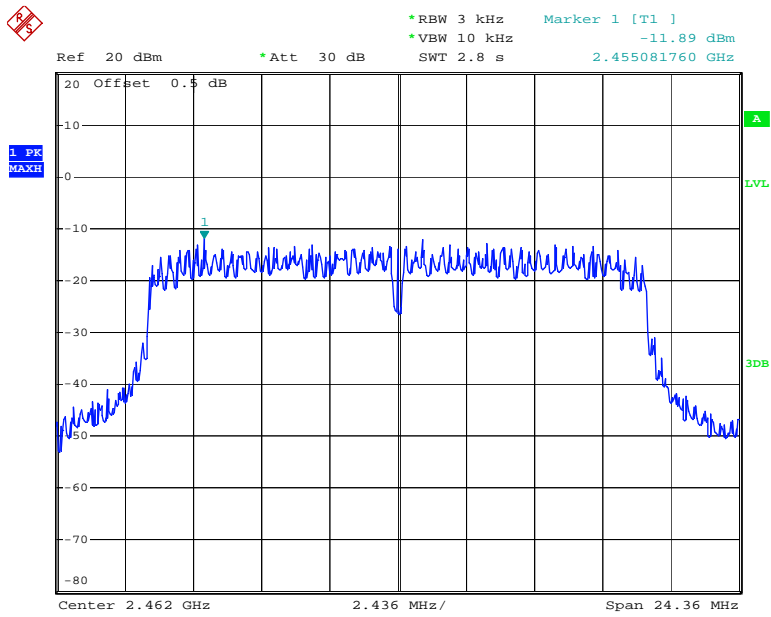

Date: 25.JUL.2019 23:51:35

\*\*\*\*\* END OF REPORT \*\*\*\*\*