

# MEASUREMENT REPORT

## FCC PART 15.247 WLAN 802.11b/g/n

**FCC ID:** 2APIO3AA-B4

**APPLICANT:** TRIANGLE TECHNOLOGY(HK) CO., LIMITED

**Application Type:** Certification

**Product:** Acute Angle PC

**Model No.:** AA-B4

**Brand Name:** Acute Angle

**FCC Classification:** Digital Transmission System (DTS)

**FCC Rule Part(s):** Part 15.247

**Test Procedure(s):** ANSI C63.10-2013, KDB 558074 D01v04,  
KDB 662911 D01v02r01

**Test Date:** March 22 ~ April 20, 2018

Reviewed By : *Paddy Chen*  
( Paddy Chen )

Approved By : *Chenz Ker*  
(Chenz Ker)



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 558074 D01v04. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Taiwan) Co., Ltd.

## Revision History

Report No.	Version	Description	Issue Date	Note
1803TW0106-U1	Rev. 01	Initial report	05-02-2018	Valid

## CONTENTS

Description	Page
<b>§2.1033 General Information.....</b>	<b>5</b>
<b>1. INTRODUCTION.....</b>	<b>6</b>
1.1. Scope.....	6
1.2. MRT Test Location .....	6
<b>2. PRODUCT INFORMATION .....</b>	<b>7</b>
2.1. Equipment Description .....	7
2.2. Product Specification Subjective to this Report .....	7
2.3. Working Frequencies for this report.....	8
2.4. Description of Antennas.....	8
2.5. Test Mode .....	8
2.6. Description of Test Software.....	9
2.7. Device Capabilities .....	10
2.8. Test Configuration .....	11
2.9. EMI Suppression Device(s)/Modifications.....	11
2.10. Labeling Requirements.....	11
<b>3. DESCRIPTION of TEST.....</b>	<b>12</b>
3.1. Evaluation Procedure .....	12
3.2. AC Line Conducted Emissions .....	12
3.3. Radiated Emissions.....	13
<b>4. ANTENNA REQUIREMENTS.....</b>	<b>14</b>
<b>5. TEST EQUIPMENT CALIBRATION DATE.....</b>	<b>15</b>
<b>6. MEASUREMENT UNCERTAINTY .....</b>	<b>16</b>
<b>7. TEST RESULT .....</b>	<b>17</b>
7.1. Summary .....	17
7.2. 6dB Bandwidth Measurement.....	18
7.2.1. Test Limit .....	18
7.2.2. Test Procedure used.....	18
7.2.3. Test Setting.....	18
7.2.4. Test Setup .....	18
7.2.5. Test Result.....	19
7.3. Output Power Measurement.....	28
7.3.1. Test Limit .....	28
7.3.2. Test Procedure Used .....	28

7.3.3.	Test Setting.....	28
7.3.4.	Test Setup .....	28
7.3.5.	Test Result of Output Power .....	29
7.4.	Power Spectral Density Measurement.....	31
7.4.1.	Test Limit .....	31
7.4.2.	Test Procedure Used .....	31
7.4.3.	Test Setting.....	31
7.4.4.	Test Setup .....	31
7.4.5.	Test Result.....	32
7.5.	Conducted Band Edge and Out-of-Band Emissions .....	41
7.5.1.	Test Limit .....	41
7.5.2.	Test Procedure Used .....	41
7.5.3.	Test Settiting.....	41
7.5.4.	Test Setup .....	42
7.5.5.	Test Result.....	43
7.6.	Radiated Spurious Emission Measurement .....	60
7.6.1.	Test Limit .....	60
7.6.2.	Test Procedure Used .....	60
7.6.3.	Test Setting.....	60
7.6.4.	Test Setup .....	62
7.6.5.	Test Result.....	64
7.7.	Radiated Restricted Band Edge Measurement .....	90
7.7.1.	Test Limit .....	90
7.7.2.	Test Procedure Used .....	91
7.7.3.	Test Setting.....	91
7.7.4.	Test Setup .....	92
7.7.5.	Test Result.....	93
7.8.	AC Conducted Emissions Measurement .....	157
7.8.1.	Test Limit .....	157
7.8.2.	Test Setup .....	157
7.8.3.	Test Result.....	158
<b>8.</b>	<b>CONCLUSION .....</b>	<b>160</b>

## §2.1033 General Information

<b>Applicant:</b>	TRIANGLE TECHNOLOGY(HK) CO., LIMITED		
<b>Applicant Address:</b>	FLAT/RM 1105, HUA QIN INTERNATIONAL BUILDING, 340 QUEEN'S ROAD CENTRAL, HK		
<b>Manufacturer:</b>	TRIANGLE TECHNOLOGY(HK) CO., LIMITED		
<b>Manufacturer Address:</b>	FLAT/RM 1105, HUA QIN INTERNATIONAL BUILDING, 340 QUEEN'S ROAD CENTRAL, HK		
<b>Test Site:</b>	MRT Technology (Taiwan) Co., Ltd		
<b>Test Site Address:</b>	No. 38, Fuxing Second Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C)		
<b>MRT Registration No.:</b>	291082		
<b>Test Device Serial No.:</b>	N/A	<input type="checkbox"/> Production	<input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering

### Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Fuxing Rd., Taoyuan, Taiwan ( R.O.C )

- MRT facility is a FCC registered (Reg. No. 291082) test facility with the site description report on file and is designated by the FCC as an Accredited Test Film.
- MRT facility is an IC registered (MRT Reg. No. 21723-1) test laboratory with the site description on file at Industry Canada.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (TAF) under the American Association for Laboratory Accreditation Program (TAF Cert. No. 3261) in EMC, Telecommunications and Radio testing for FCC, Industry Taiwan, EU and TELEC Rules.


## 1. INTRODUCTION

### 1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

### 1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taoyuan City. These measurement tests were conducted at the MRT Technology (Taiwan) Co., Ltd. Facility located at No.38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 33377, Taiwan (R.O.C).

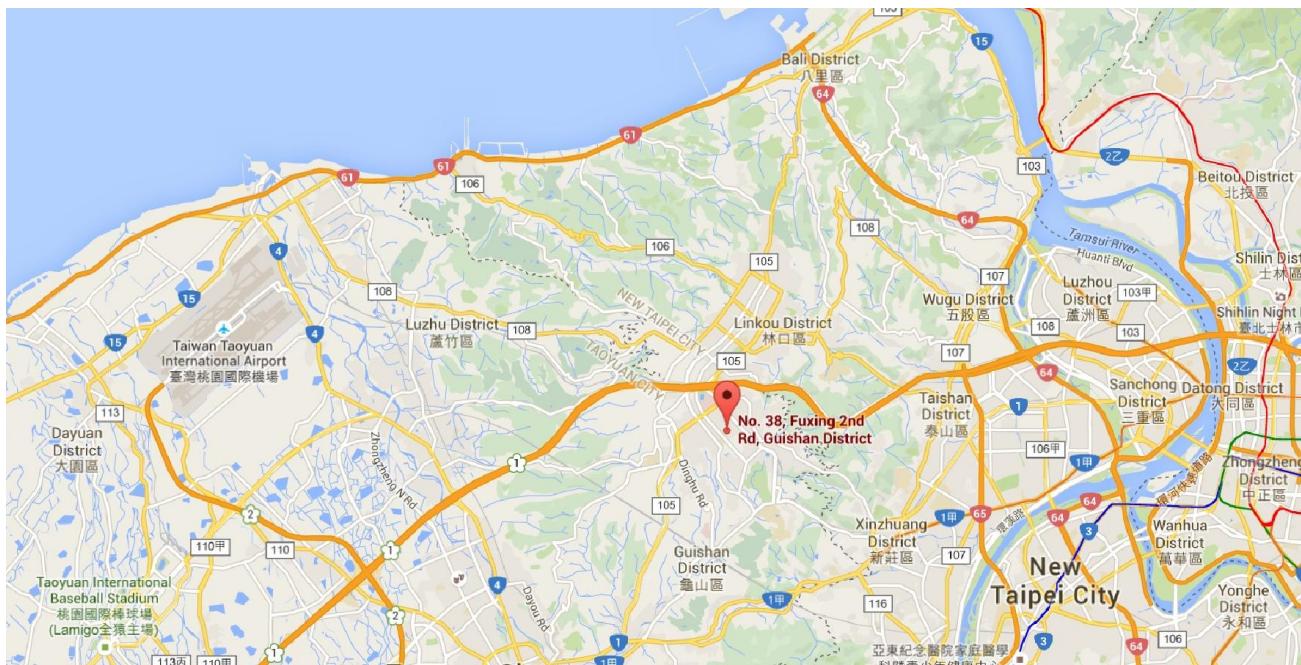

## 2. PRODUCT INFORMATION

### 2.1. Equipment Description

Product Name:	Acute Angle PC
Model No.:	AA-B4
Brand Name:	Acute Angle
Wi-Fi Specification:	802.11a/b/g/n/ac
Bluetooth Version	v4.0 dual mode
<b>Components</b>	
Adapter	Brand Name: XinSPower Model No.: A241-1202000U Input Power: 100 - 240V ~ 50/60Hz, 0.8A Output Power: 12VDC 2000mA

### 2.2. Product Specification Subjective to this Report

Frequency Range:	802.11b/g/n-HT20: 2412 ~ 2462MHz 802.11n-HT40: 2422 ~ 2452MHz
Channel Number:	802.11b/g/n-HT20: 11 802.11b/g/n-HT20: 7
Type of Modulation:	802.11b: DSSS 802.11g/n: OFDM
Data Rate:	802.11b: 1/2/5.5/11Mbps 802.11g: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 150Mbps

Note: For other features of this EUT, test report will be issued separately.

### 2.3. Working Frequencies for this report

802.11b/g/n-HT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
01	2412 MHz	02	2417 MHz	03	2422 MHz
04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz
10	2457 MHz	11	2462 MHz	--	--

802.11n-HT40

Channel	Frequency	Channel	Frequency	Channel	Frequency
03	2422 MHz	04	2427 MHz	05	2432 MHz
06	2437 MHz	07	2442 MHz	08	2447 MHz
09	2452 MHz	--	--	--	--

### 2.4. Description of Antennas

Antenna Type	Frequency Band (MHz)	Antenna Gain (dBi)	
		Main Antenna / Ant A (For Wi-Fi)	Aux Antenna / Ant B (For Wi-Fi & BT)
PIFA Antenna	2400 ~ 2483.5	0.81	0.46
	5150 ~ 5850	-0.09	-0.14

Note: Both Ant A and Ant B can transmit, but only one port is transmitting at the same time. They cannot transmit simultaneously.

### 2.5. Test Mode

Test Mode	Mode 1: Transmit by 802.11b (1Mbps)
	Mode 2: Transmit by 802.11g (6Mbps)
	Mode 3: Transmit by 802.11n-HT20 (MCS 0)
	Mode 4: Transmit by 802.11n-HT40 (MCS 0)

## 2.6. Description of Test Software

The test utility software used during testing was “DRTU”, and the version was 1.7.7-03376.

Power Parameter Value

Test Mode	Test Channel No.	Test Frequency (MHz)	Power Parameter Value	
			Ant A	Ant B
802.11b	01	2412	19.0	19.0
	06	2437	19.0	19.0
	11	2462	17.5	19.0
802.11g	01	2412	18.0	19.0
	06	2437	19.0	19.0
	11	2462	16.0	19.0
802.11n-HT20	01	2412	17.5	18.5
	06	2437	19.0	19.0
	11	2462	15.5	19.0
802.11n-HT40	03	2422	14.0	16.5
	06	2437	18.0	19.0
	09	2452	13.0	19.0


## 2.7. Device Capabilities

This device contains the following capabilities:

2.4GHz WLAN (DTS), 5GHz WLAN (UNII) and Bluetooth (v4.0 dual mode)

**Note:** 2.4GHz WLAN (DTS) operation is possible in 20MHz, and 40MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Test Mode	Duty Cycle
802.11b	98.52%
802.11g	98.55%
802.11n-HT20	98.24%
802.11n-HT40	96.84%

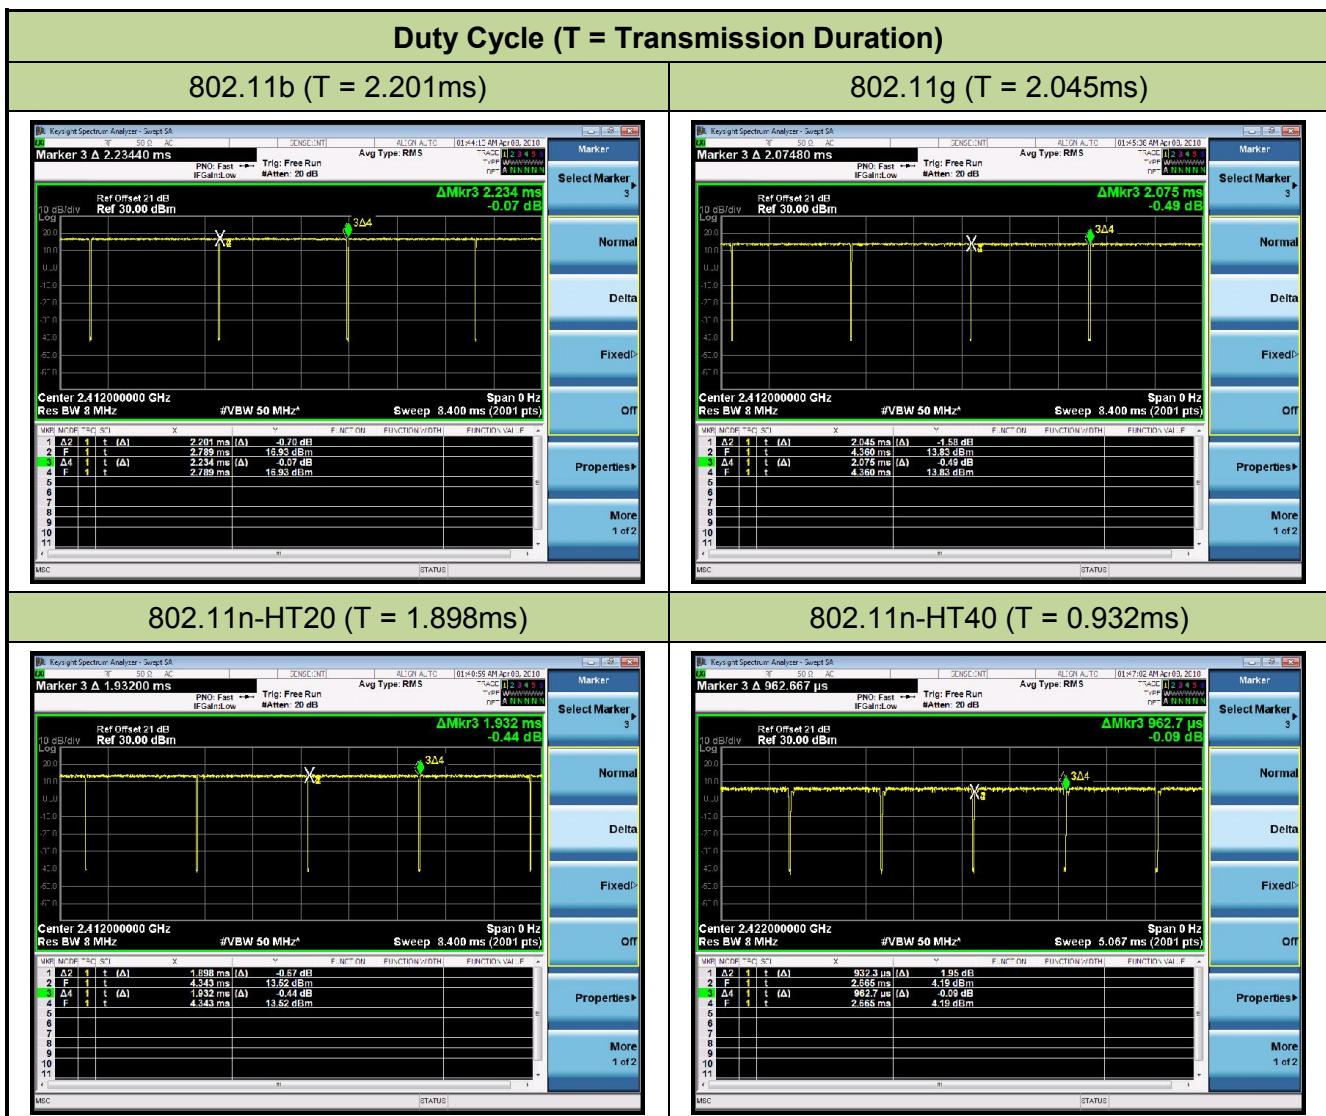

## 2.8. Test Configuration

The **Acute Angle PC** was tested per the guidance of KDB 558074 D01v04. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

## 2.9. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

## 2.10. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

### 3. DESCRIPTION of TEST

#### 3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013), and the guidance provided in KDB 558074 D01v04 were used in the measurement of the **Acute Angle PC**.

**Deviation from measurement procedure.....**None

#### 3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment which determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

### 3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, which produced the worst-case emissions.

According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

## 4. ANTENNA REQUIREMENTS

### **Excerpt from §15.203 of the FCC Rules/Regulations:**

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the **Acute Angle PC** is **permanently attached**.
- There are no provisions for connection to an external antenna.

### **Conclusion:**

The **Acute Angle PC** unit complies with the requirement of §15.203.

## 5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions – SR1

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Two-Line V-Network	R&S	ENV216	MRTTWA00019	1 year	2019/03/20
Two-Line V-Network	R&S	ENV216	MRTTWA00020	1 year	2019/03/20
EMI Test Receiver	R&S	ESR3	MRTTWA00045	1 year	2018/05/09
Temperature/Humidity Meter	TFA	35.1078.10.IT	MRTTWA00033	1 year	2018/06/08

Radiated Emissions - AC1

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Signal Analyzer	R&S	FSV40	MRTTWA00007	1 year	2019/03/20
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2019/03/19
Broadband Preamplifier	SCHWARZBECK	BBV 9718	MRTTWA00005	1 year	2018/04/23
Broadband Amplifier	SCHWARZBECK	BBV 9721	MRTTWA00006	1 year	2018/04/23
Acitve Loop Antenna	SCHWARZBECK	FMZB 1519B	MRTTWA00002	1 year	2018/04/24
Broadband TRILOG Antenna	SCHWARZBECK	VULB 9162	MRTTWA00001	1 year	2018/05/14
Broadband Hornantenna	SCHWARZBECK	BBHA 9120D	MRTTWA00003	1 year	2018/04/24
Breitband Hornantenna	SCHWARZBECK	BBHA 9170	MRTTWA00004	1 year	2018/04/23
Temperature/Humidity Meter	TFA	35.1078.10.IT	MRTTWA00032	1 year	2018/06/08

Conducted Test Equipment - SR1

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
X-Series USB Peak and Average Power Sensor	KEYSIGHT	U2021XA	MRTTWA00014	1 year	2019/04/24
X-Series USB Peak and Average Power Sensor	KEYSIGHT	U2021XA	MRTTWA00015	1 year	2019/03/20
Wideband Radio Communication Taster	R&S	CMW 500	MRTTWA00041	1 year	2018/12/13
EXA Signal Analyzer	KEYSIGHT	N9010A	MRTTWA00012	1 year	2018/07/24
Temperature & Humidity Chamber	TEN BILLION	TTH-B3UP	MRTTWA00036	1 year	2018/05/10
Temperature/Humidity Meter	TFA	35.1078.10.IT	MRTTWA00033	1 year	2018/06/08

Software	Version	Function
e3	9.160520a	EMI Test Software

## 6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .

AC Conducted Emission Measurement - SR2
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2U_{c(y)}$ ): 150kHz~30MHz: 3.46dB
Radiated Emission Measurement - AC1
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2U_{c(y)}$ ): 9kHz ~ 1GHz: 4.18dB 1GHz ~ 25GHz: 4.76dB
Spurious Emissions, Conducted - SR1
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2U_{c(y)}$ ): 0.78dB
Output Power - SR1
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2U_{c(y)}$ ): 1.13dB
Power Spectrum Density - SR1
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2U_{c(y)}$ ): 1.15dB
Occupied Bandwidth - SR1
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2U_{c(y)}$ ): 0.28%

## 7. TEST RESULT

### 7.1. Summary

**Product Name:** Acute Angle PC  
**FCC ID:** 2APIO3AA-B4  
**FCC Classification:** Digital Transmission System (DTS)  
**Data Rate(s) Tested:** 1Mbps (802.11b) & 6Mbps (802.11g)  
MCS0 (802.11n-HT20) & MCS0 (802.11n-HT40)

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a) (2)	6dB Bandwidth	$\geq 500\text{kHz}$	Conducted	Pass	Section 7.2
15.247(b) (3)	Output Power	$\leq 30.00\text{dBm}$		Pass	Section 7.3
15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$		Pass	Section 7.4
15.247(d)	Band Edge / Out-of-Band Emissions	$\geq 20\text{dBc}$ (Peak)		Pass	Section 7.5
15.205, 15.209	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	Radiated	Pass	Section 7.6 & 7.7
15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	Pass	Section 7.8

#### Notes:

- 1) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 2) All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.

## 7.2. 6dB Bandwidth Measurement

### 7.2.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


### 7.2.2. Test Procedure used

KDB 558074 D01v04 - Section 8.2 Option 2

### 7.2.3. Test Setting

1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to  $X = 6$ . The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Set RBW = 100 kHz
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace was allowed to stabilize


### 7.2.4. Test Setup

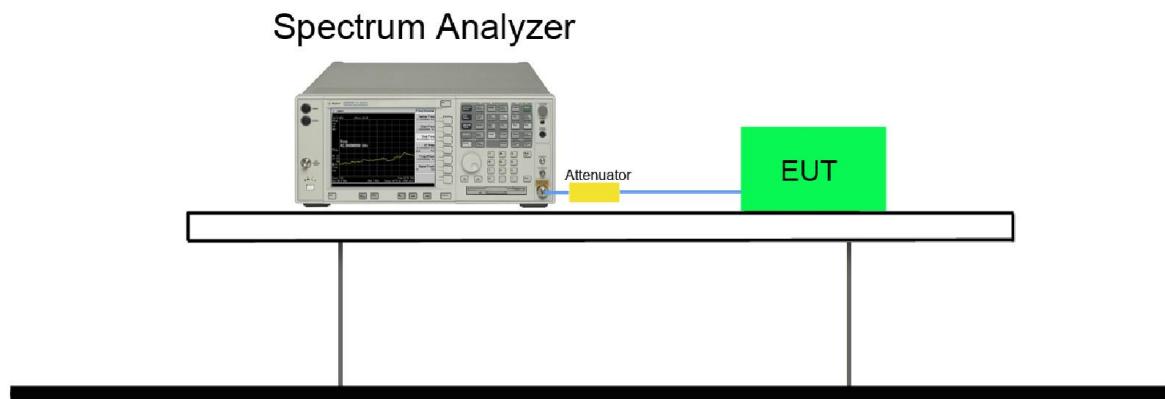



### 7.2.5. Test Result


Product	Acute Angle PC	Temperature	25°C
Test Engineer	Kevin Ker	Relative Humidity	52%
Test Site	SR1	Test Date	2018/04/08


Test Mode	Data Rate / MCS	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
<b>Ant A</b>						
802.11b	1Mbps	01	2412	9.18	≥ 0.5	Pass
802.11b	1Mbps	06	2437	9.18	≥ 0.5	Pass
802.11b	1Mbps	11	2462	9.18	≥ 0.5	Pass
802.11g	6Mbps	01	2412	15.16	≥ 0.5	Pass
802.11g	6Mbps	06	2437	15.40	≥ 0.5	Pass
802.11g	6Mbps	11	2462	15.16	≥ 0.5	Pass
802.11n-HT20	MCS0	01	2412	15.14	≥ 0.5	Pass
802.11n-HT20	MCS0	06	2437	15.16	≥ 0.5	Pass
802.11n-HT20	MCS0	11	2462	15.17	≥ 0.5	Pass
802.11n-HT40	MCS0	03	2422	35.21	≥ 0.5	Pass
802.11n-HT40	MCS0	06	2437	35.17	≥ 0.5	Pass
802.11n-HT40	MCS0	09	2452	35.17	≥ 0.5	Pass
<b>Ant B</b>						
802.11b	1Mbps	01	2412	9.18	≥ 0.5	Pass
802.11b	1Mbps	06	2437	9.16	≥ 0.5	Pass
802.11b	1Mbps	11	2462	9.17	≥ 0.5	Pass
802.11g	6Mbps	01	2412	15.17	≥ 0.5	Pass
802.11g	6Mbps	06	2437	15.17	≥ 0.5	Pass
802.11g	6Mbps	11	2462	15.16	≥ 0.5	Pass
802.11n-HT20	MCS0	01	2412	15.16	≥ 0.5	Pass
802.11n-HT20	MCS0	06	2437	15.16	≥ 0.5	Pass
802.11n-HT20	MCS0	11	2462	15.14	≥ 0.5	Pass
802.11n-HT40	MCS0	03	2422	35.21	≥ 0.5	Pass
802.11n-HT40	MCS0	06	2437	35.18	≥ 0.5	Pass
802.11n-HT40	MCS0	09	2452	35.16	≥ 0.5	Pass

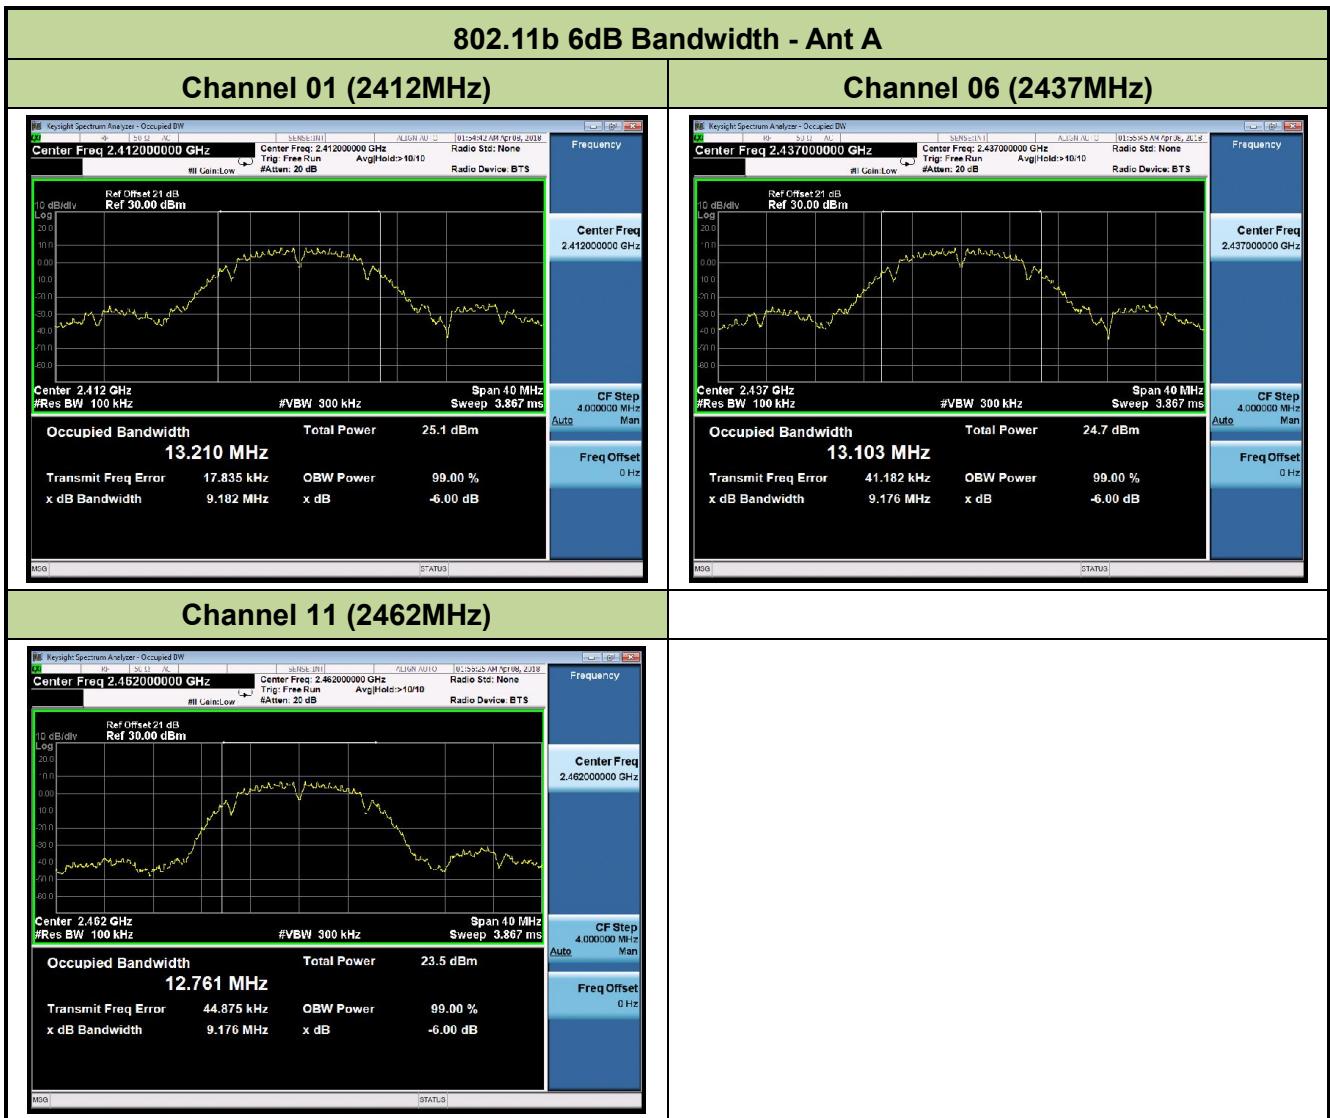


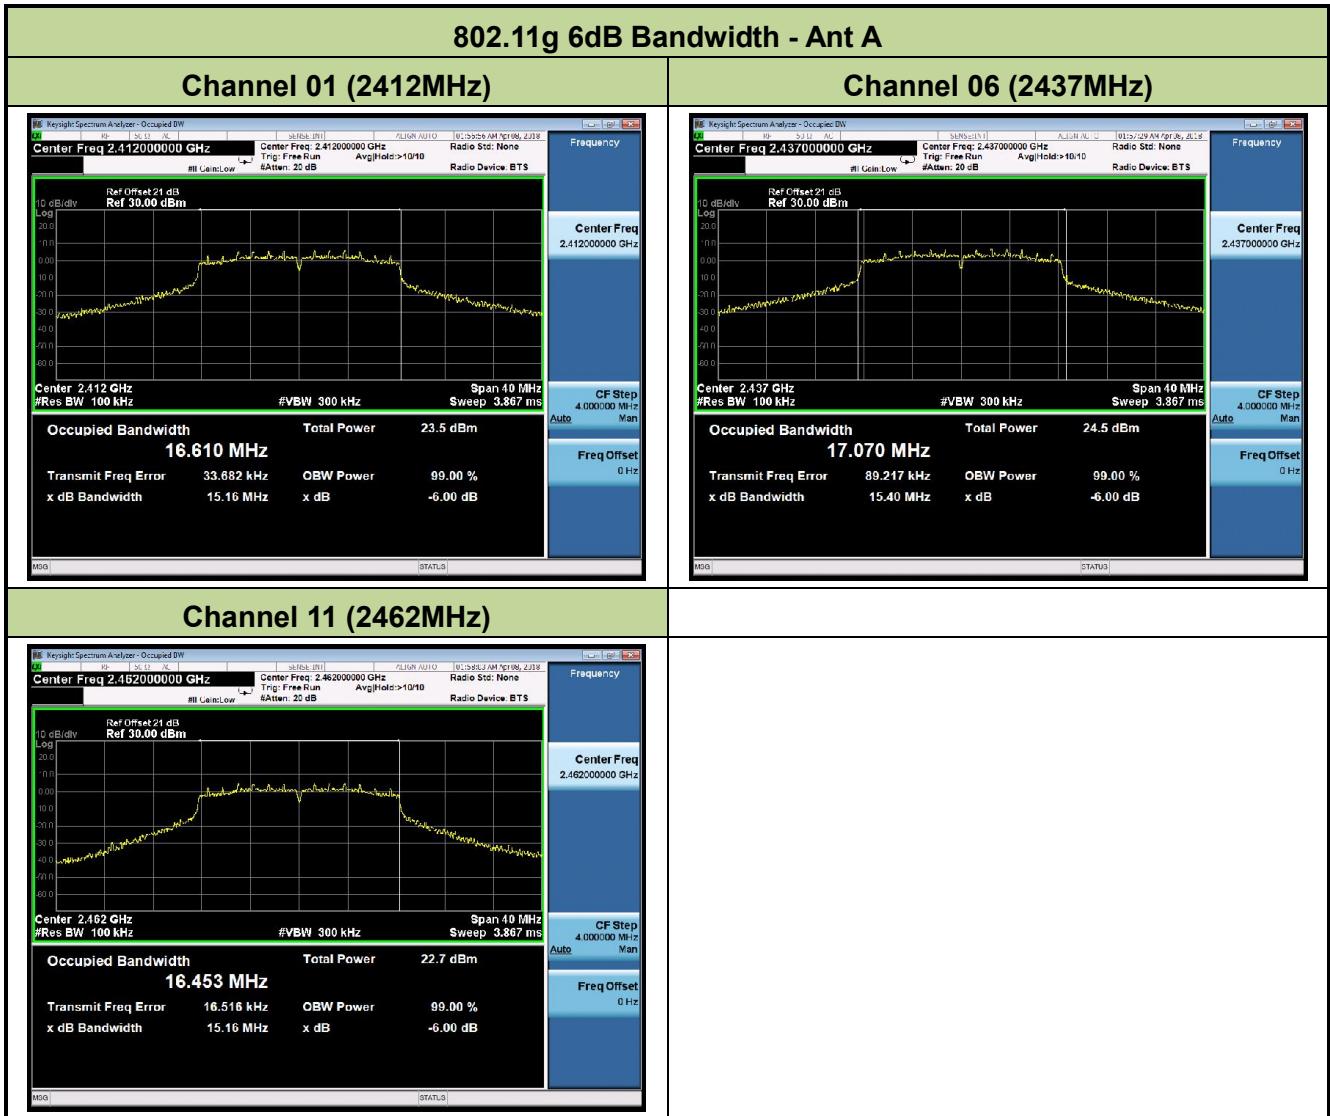


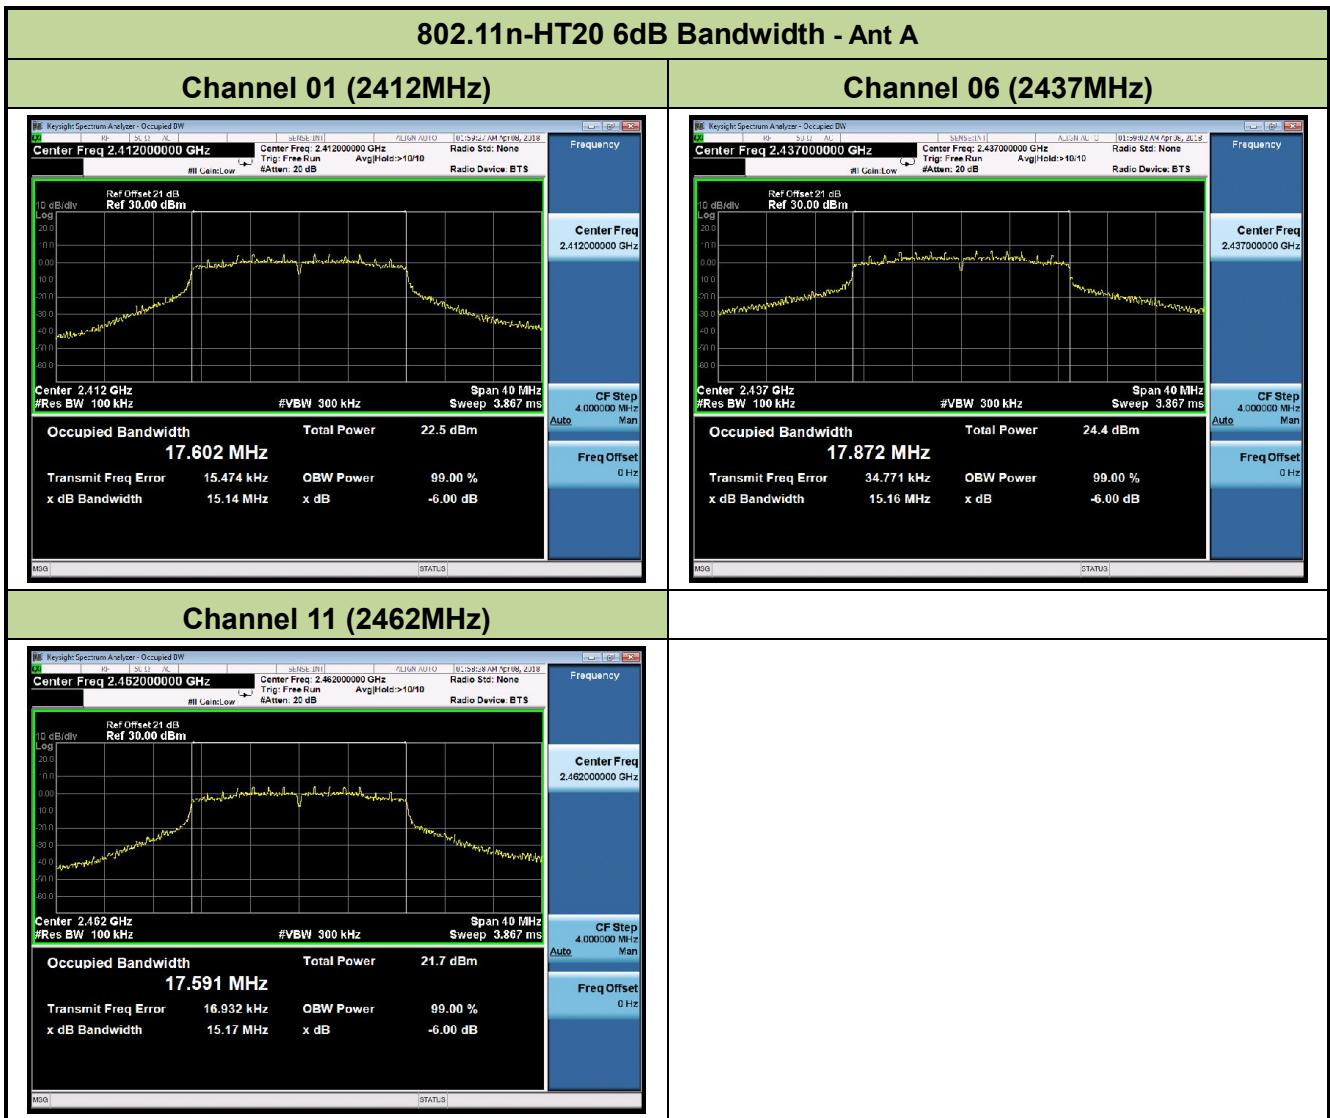


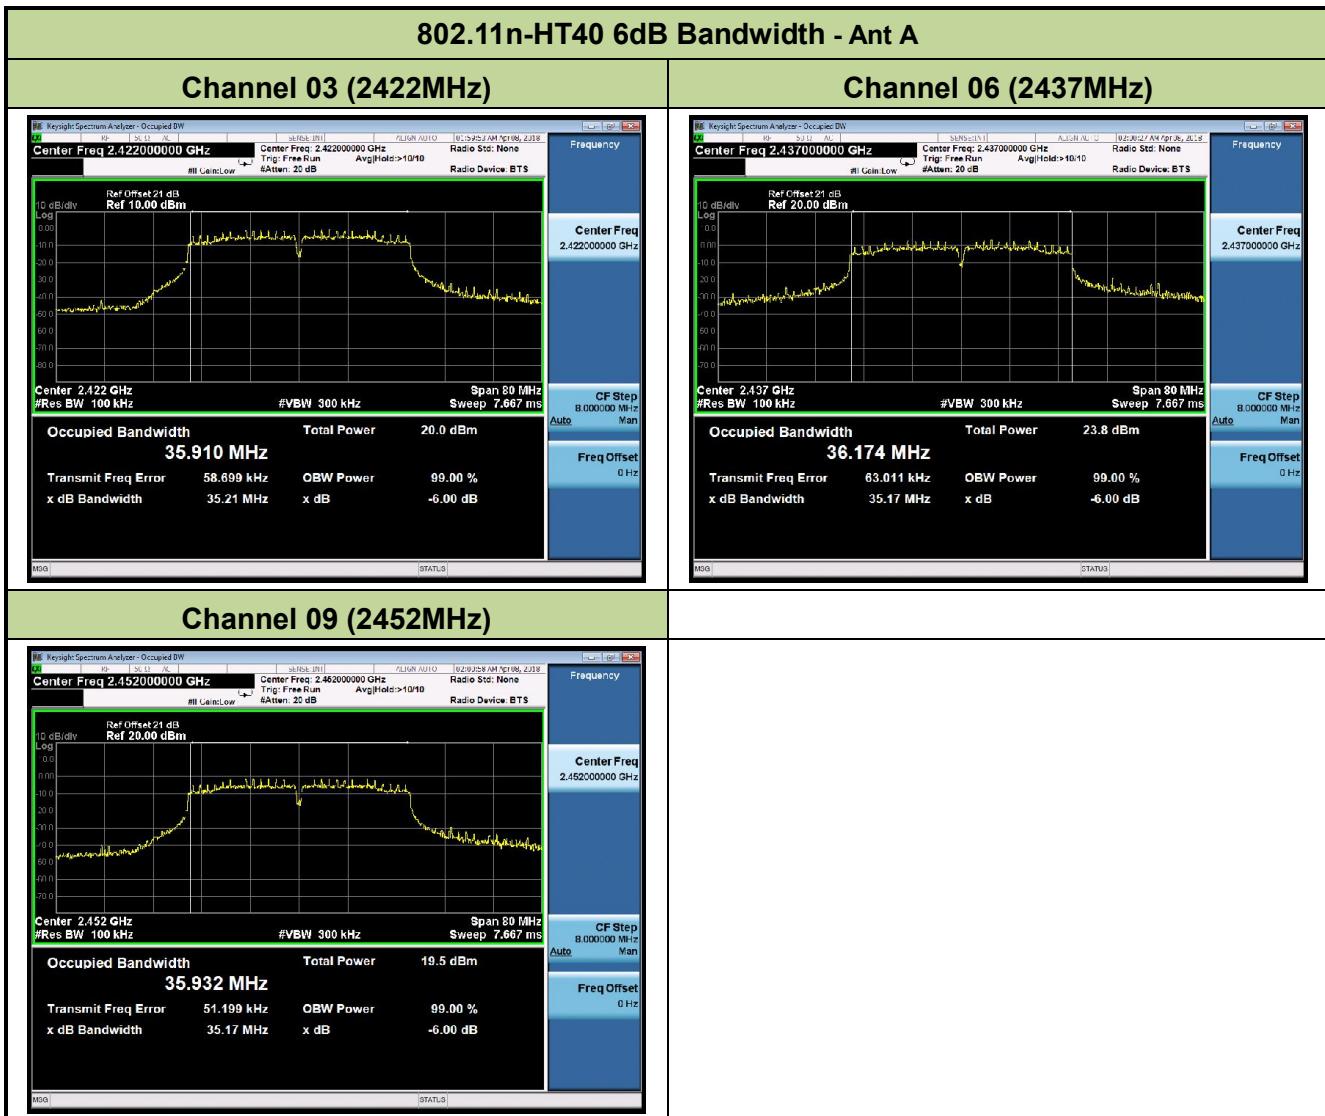

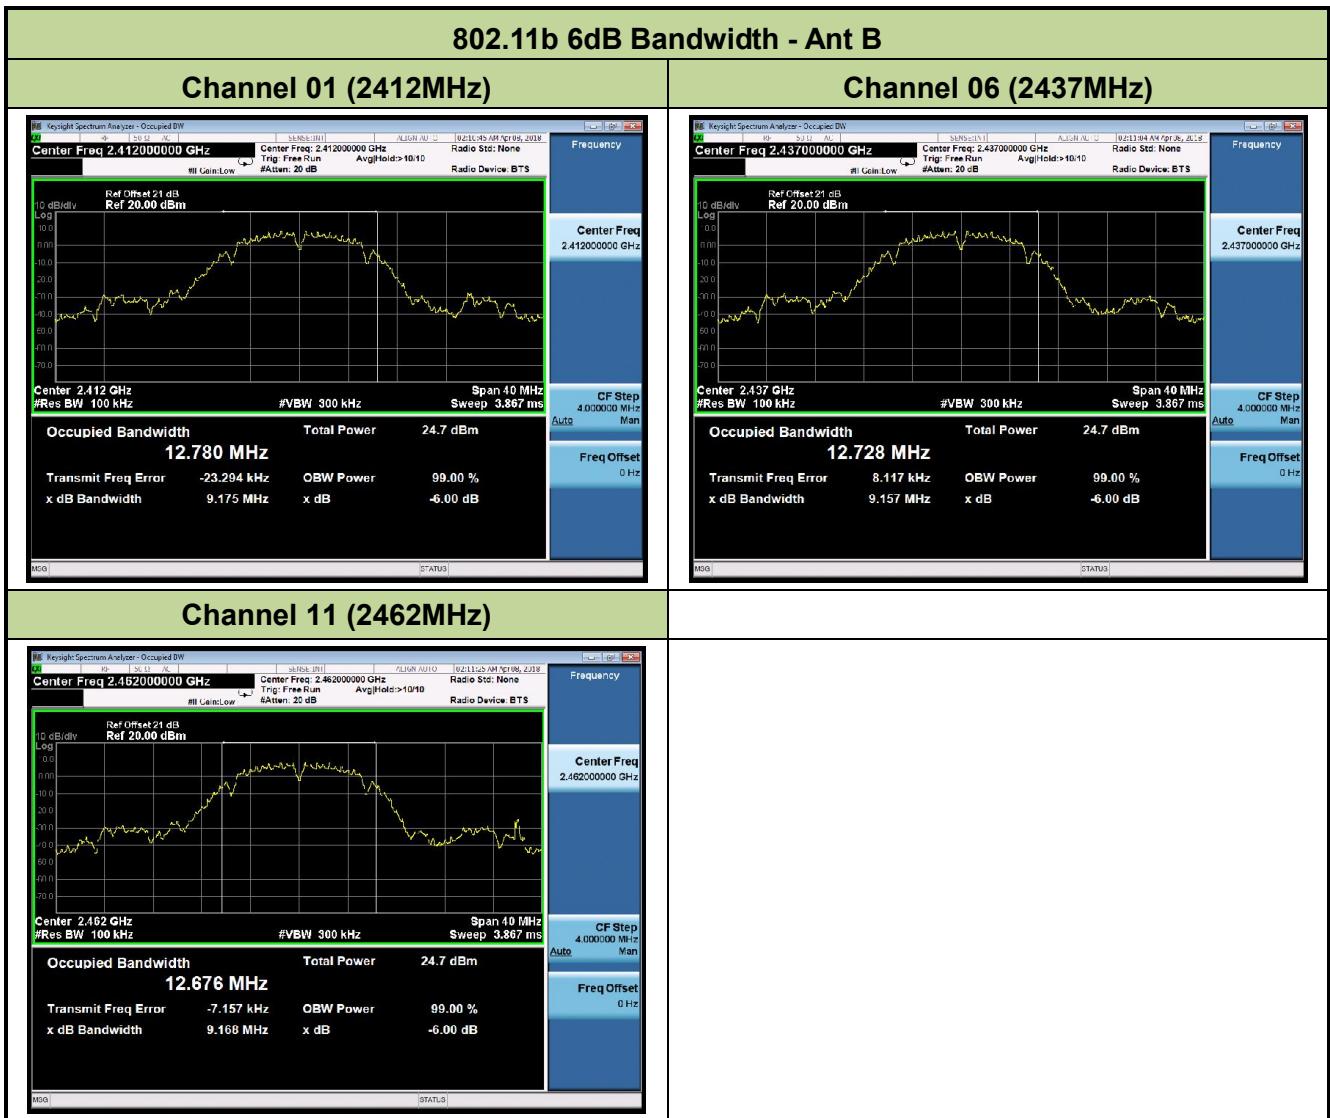

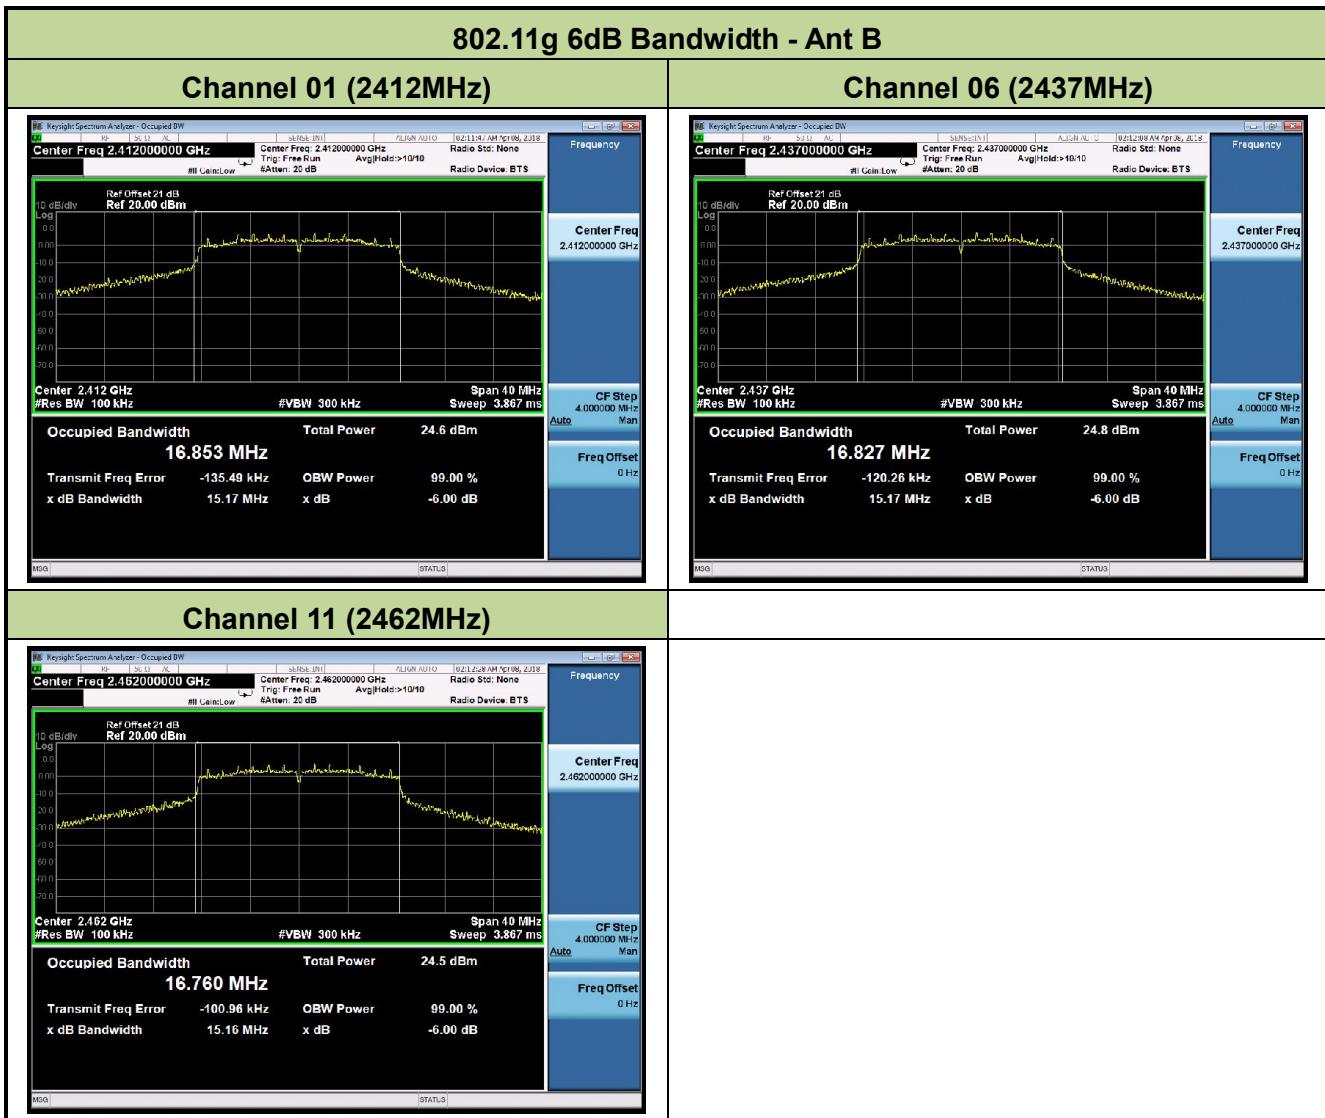

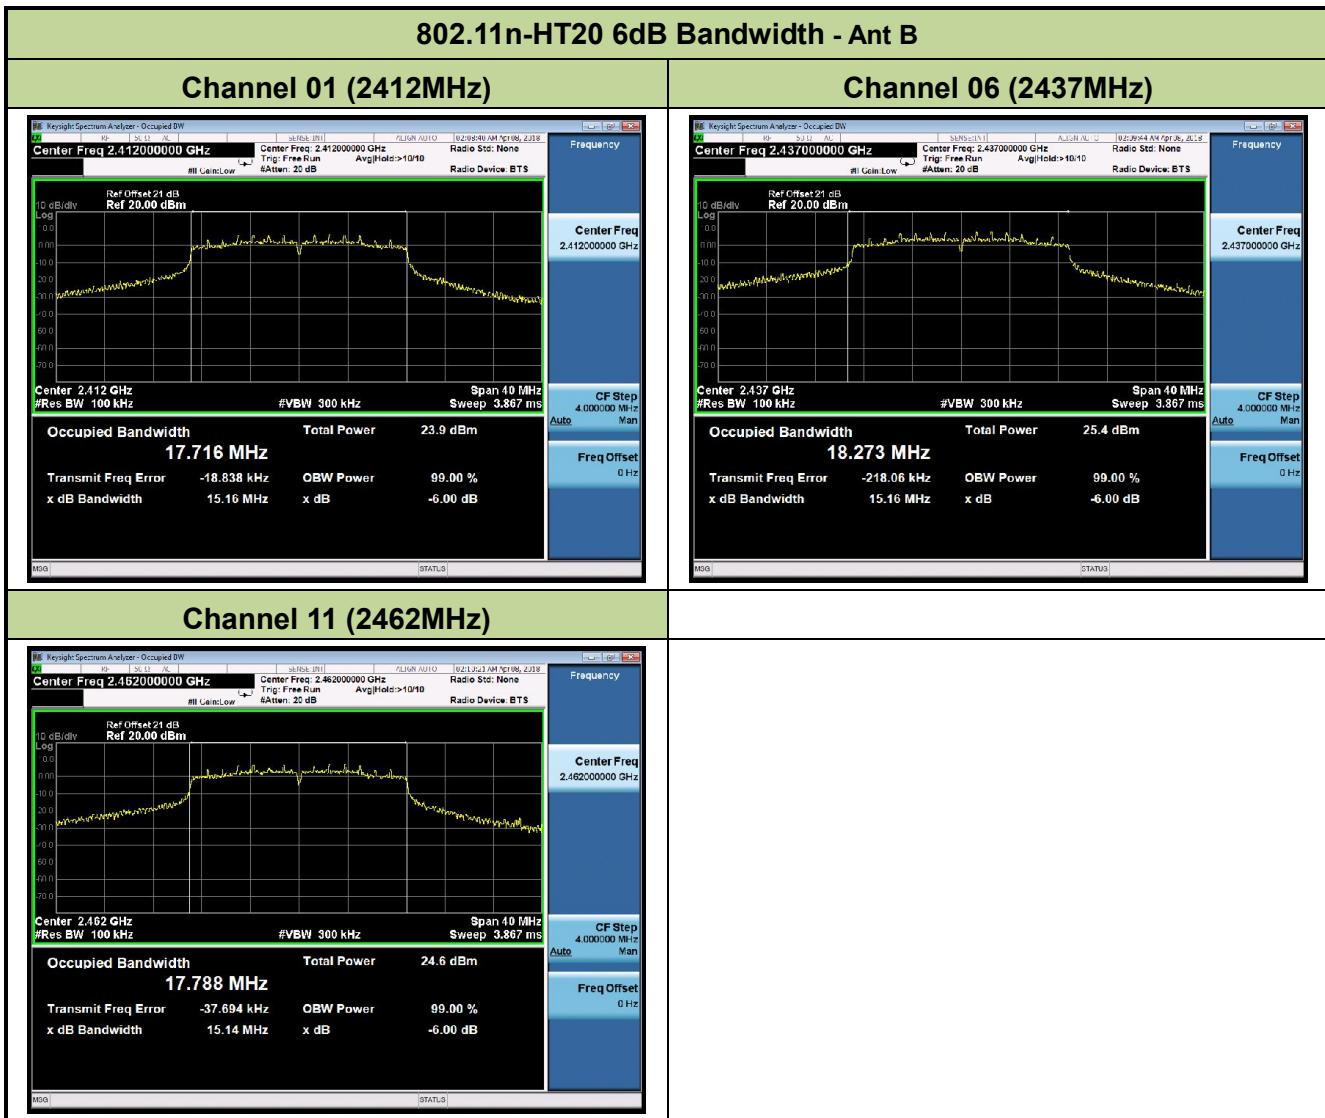

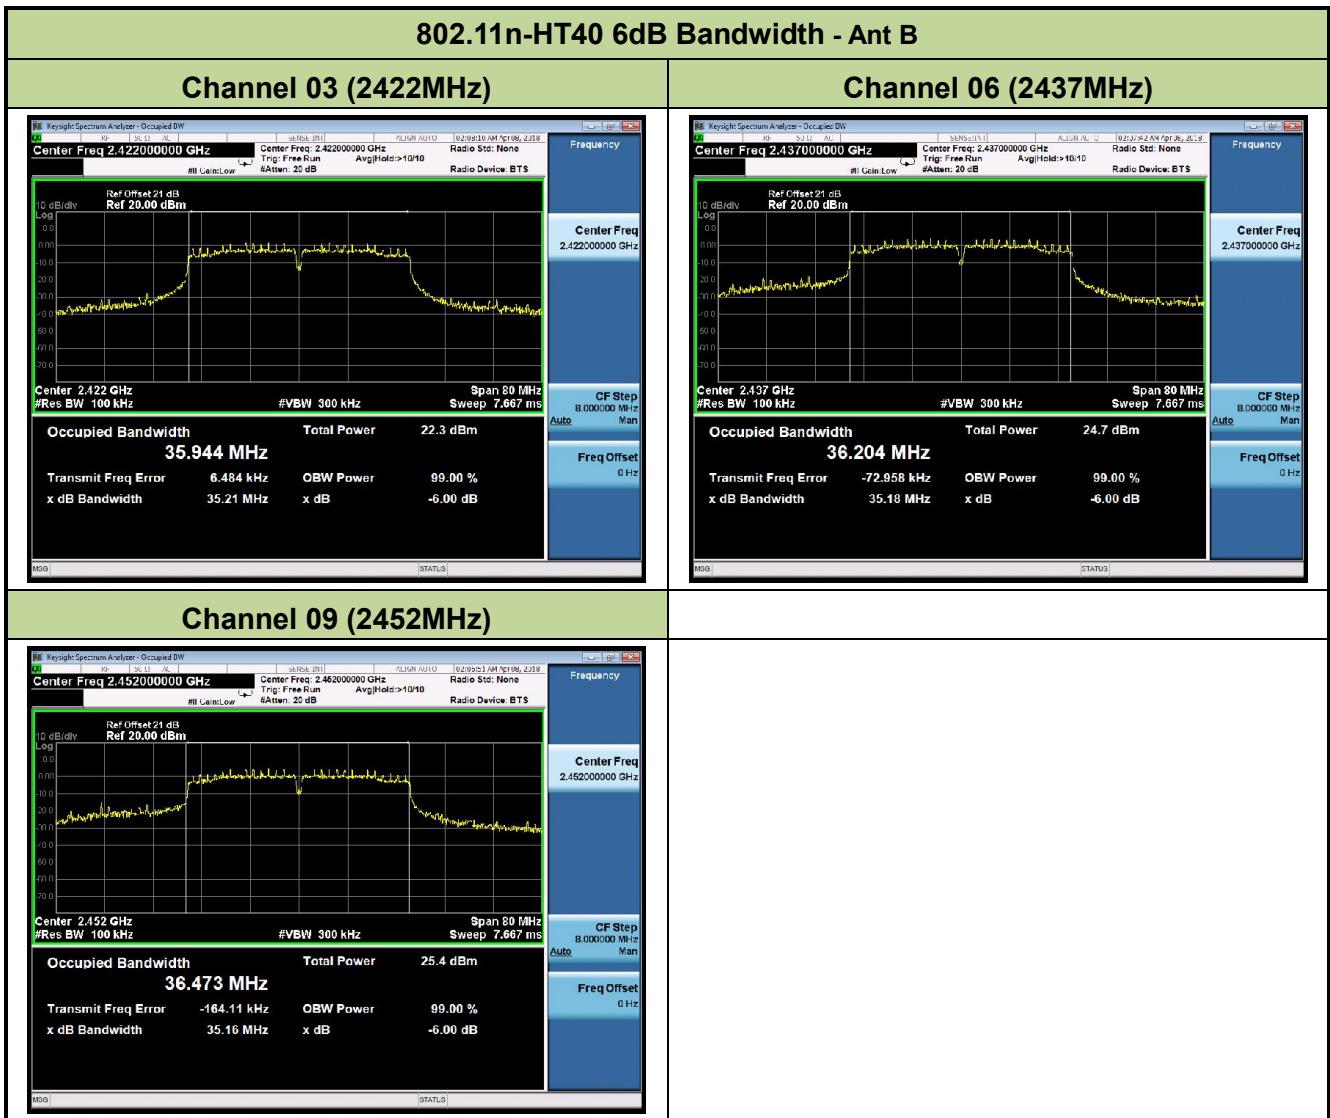

## 7.3. Output Power Measurement

### 7.3.1. Test Limit

The maximum out power shall be less 1 Watt (30dBm).

### 7.3.2. Test Procedure Used

KDB 558074 D01v04 - Section 9.1.3 PKPM1 Peak-reading power meter method

KDB 558074 D01v04 - Section 9.2.3.2 Method AVGPM-G

### 7.3.3. Test Setting


#### Method PKPM1 (Peak Power Measurement)

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a  $VBW = 50\text{MHz}$  so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.

#### Method AVGPM-G (Measurement using a gated RF average-reading power meter)

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since this measurement is made only during the ON time of the transmitter, no duty cycle correction is required.

### 7.3.4. Test Setup

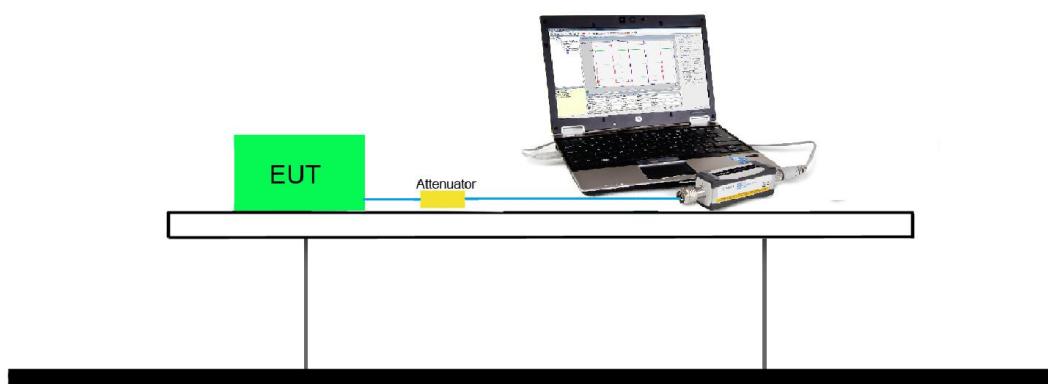

### 7.3.5. Test Result of Output Power

Power output test was verified over all data rates of each mode shown as below, and then choose the maximum power output (gray marker) for final test of each channel.

#### Output power at various data rates for Ant A:

Test Mode	Bandwidth (MHz)	Channel No.	Frequency (MHz)	Data Rate / MCS	Average Power (dBm)
802.11b	20	6	2437	1Mbps	18.58
				5.5Mbps	18.36
				11Mbps	18.11
802.11g	20	6	2437	6Mbps	17.50
				24Mbps	17.25
				54Mbps	17.03
802.11n	20	6	2437	MCS0	17.34
				MCS3	17.17
				MCS7	17.03
802.11n	40	6	2437	MCS0	16.65
				MCS3	16.38
				MCS7	16.09

Product	Acute Angle PC	Temperature	24°C
Test Engineer	Kevin Ker	Relative Humidity	54%
Test Site	SR1	Test Date	2018/03/28

### Test Result of Peak Output Power

Test Mode	Data Rate / MCS	Channel No.	Freq. (MHz)	Ant A Peak Power (dBm)	Ant B Peak Power (dBm)	Limit (dBm)	Result
11b	1Mbps	01	2412	20.69	20.57	≤ 30.00	Pass
11b	1Mbps	06	2437	21.12	20.98	≤ 30.00	Pass
11b	1Mbps	11	2462	19.72	21.00	≤ 30.00	Pass
11g	6Mbps	01	2412	20.75	21.92	≤ 30.00	Pass
11g	6Mbps	06	2437	21.68	22.17	≤ 30.00	Pass
11g	6Mbps	11	2462	20.51	22.20	≤ 30.00	Pass
11n-HT20	MCS0	01	2412	21.28	21.62	≤ 30.00	Pass
11n-HT20	MCS0	06	2437	21.65	22.18	≤ 30.00	Pass
11n-HT20	MCS0	11	2462	20.04	17.44	≤ 30.00	Pass
11n-HT40	MCS0	03	2422	17.89	20.05	≤ 30.00	Pass
11n-HT40	MCS0	06	2437	21.09	22.00	≤ 30.00	Pass
11n-HT40	MCS0	09	2452	17.73	22.13	≤ 30.00	Pass

### Test Result of Average Output Power (Reporting Only)

Test Mode	Data Rate / MCS	Channel No.	Freq. (MHz)	Ant A Average Power (dBm)	Ant B Average Power (dBm)	Limit (dBm)	Result
11b	1Mbps	01	2412	18.00	18.16	≤ 30.00	Pass
11b	1Mbps	06	2437	18.58	18.62	≤ 30.00	Pass
11b	1Mbps	11	2462	16.52	17.90	≤ 30.00	Pass
11g	6Mbps	01	2412	16.16	17.38	≤ 30.00	Pass
11g	6Mbps	06	2437	17.50	17.52	≤ 30.00	Pass
11g	6Mbps	11	2462	15.10	17.54	≤ 30.00	Pass
11n-HT20	MCS0	01	2412	16.03	16.62	≤ 30.00	Pass
11n-HT20	MCS0	06	2437	17.34	17.47	≤ 30.00	Pass
11n-HT20	MCS0	11	2462	14.51	17.40	≤ 30.00	Pass
11n-HT40	MCS0	03	2422	12.49	14.68	≤ 30.00	Pass
11n-HT40	MCS0	06	2437	16.65	17.33	≤ 30.00	Pass
11n-HT40	MCS0	09	2452	12.47	17.38	≤ 30.00	Pass

## 7.4. Power Spectral Density Measurement

### 7.4.1. Test Limit

The maximum permissible power spectral density is 8dBm in any 3 kHz band.

The same method of determining the conducted output power shall be used to determine the power spectral density.


### 7.4.2. Test Procedure Used

KDB 558074 D01v04 - Section 10.2 Method PKPSD

### 7.4.3. Test Setting

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3kHz
4. VBW = 10kHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize


### 7.4.4. Test Setup

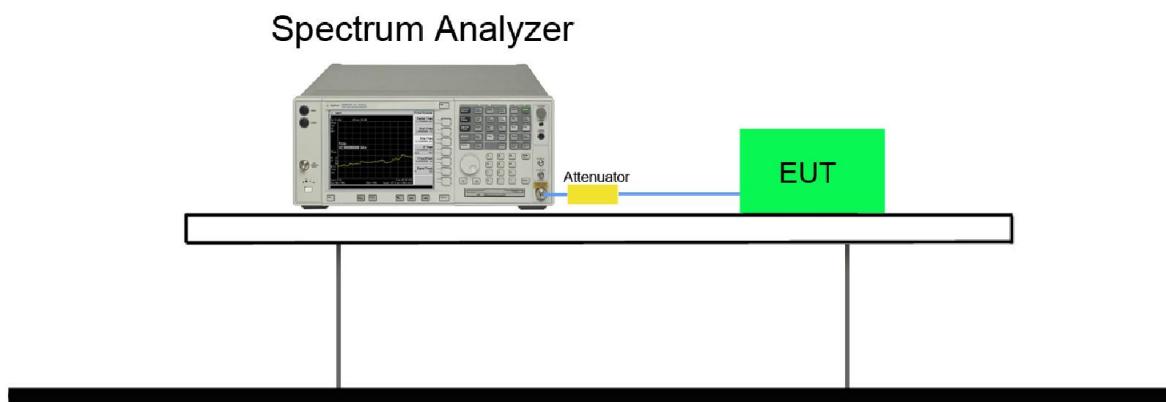



#### 7.4.5. Test Result


Product	Acute Angle PC			Temperature	25°C
Test Engineer	Kevin Ker			Relative Humidity	52%
Test Site	SR1			Test Date	2018/04/08


Test Mode	Data Rate / MCS	Channel No.	Freq. (MHz)	Ant A PK PSD (dBm / 3kHz)	Ant B PK PSD (dBm / 3kHz)	Limit (dBm / 3kHz)	Result
11b	1Mbps	01	2412	-6.63	-6.17	≤ 8.00	Pass
11b	1Mbps	06	2437	-6.14	-6.61	≤ 8.00	Pass
11b	1Mbps	11	2462	-6.94	-6.14	≤ 8.00	Pass
11g	6Mbps	01	2412	-8.57	-7.23	≤ 8.00	Pass
11g	6Mbps	06	2437	-7.18	-6.78	≤ 8.00	Pass
11g	6Mbps	11	2462	-9.11	-7.31	≤ 8.00	Pass
11n-HT20	MCS0	01	2412	-8.35	-8.35	≤ 8.00	Pass
11n-HT20	MCS0	06	2437	-6.95	-6.33	≤ 8.00	Pass
11n-HT20	MCS0	11	2462	-9.62	-6.97	≤ 8.00	Pass
11n-HT40	MCS0	03	2422	-14.98	-12.11	≤ 8.00	Pass
11n-HT40	MCS0	06	2437	-10.12	-9.11	≤ 8.00	Pass
11n-HT40	MCS0	09	2452	-13.90	-10.42	≤ 8.00	Pass

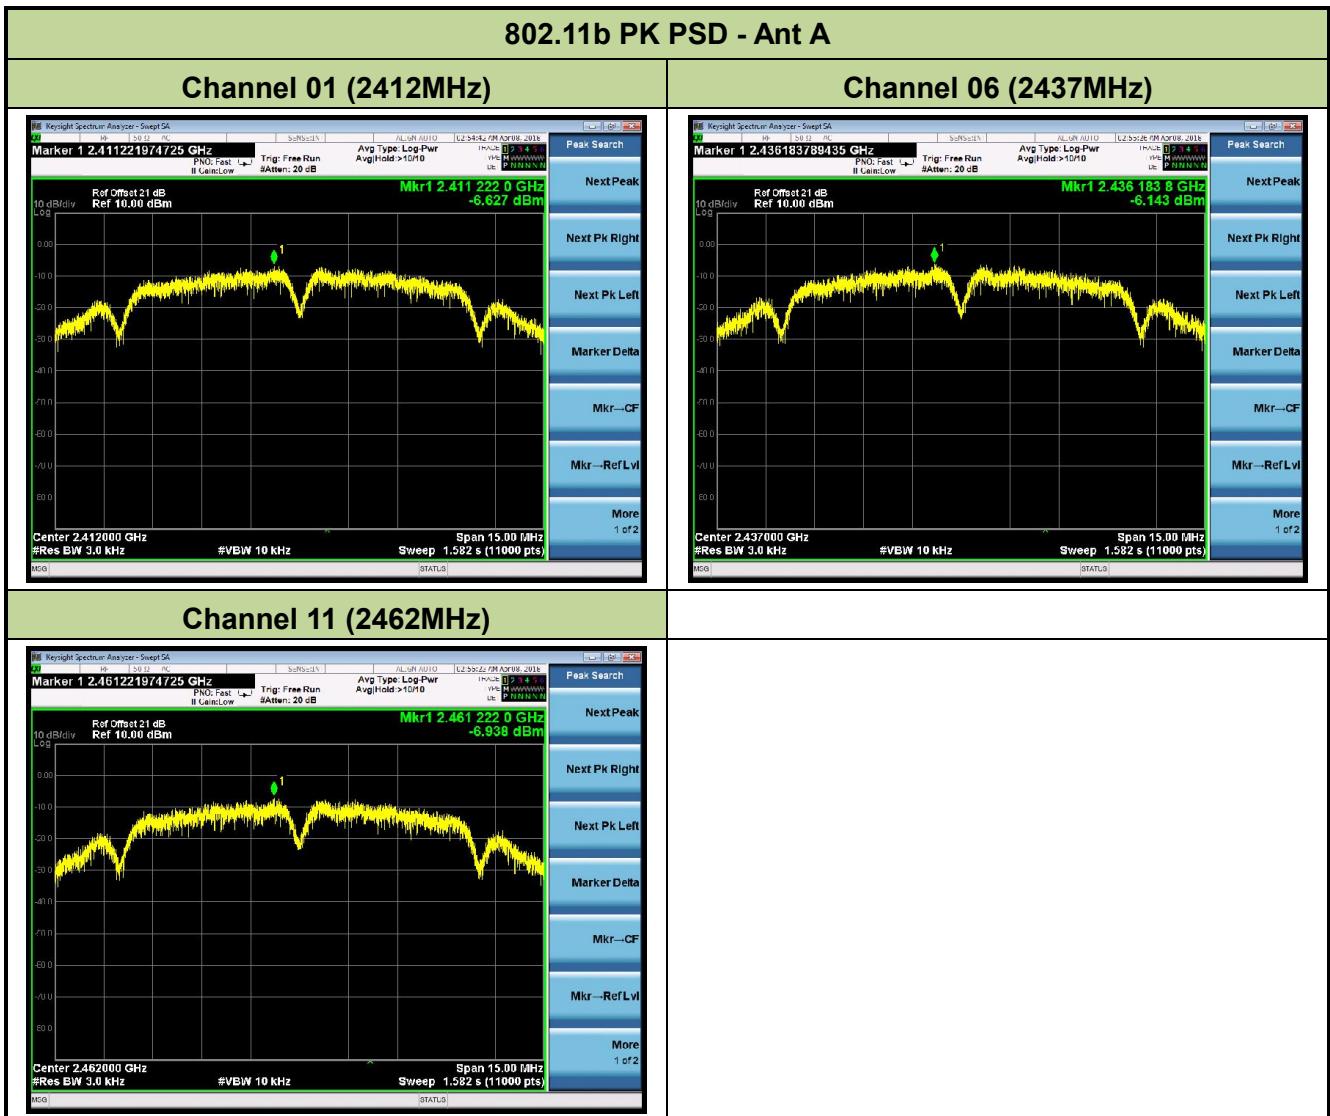


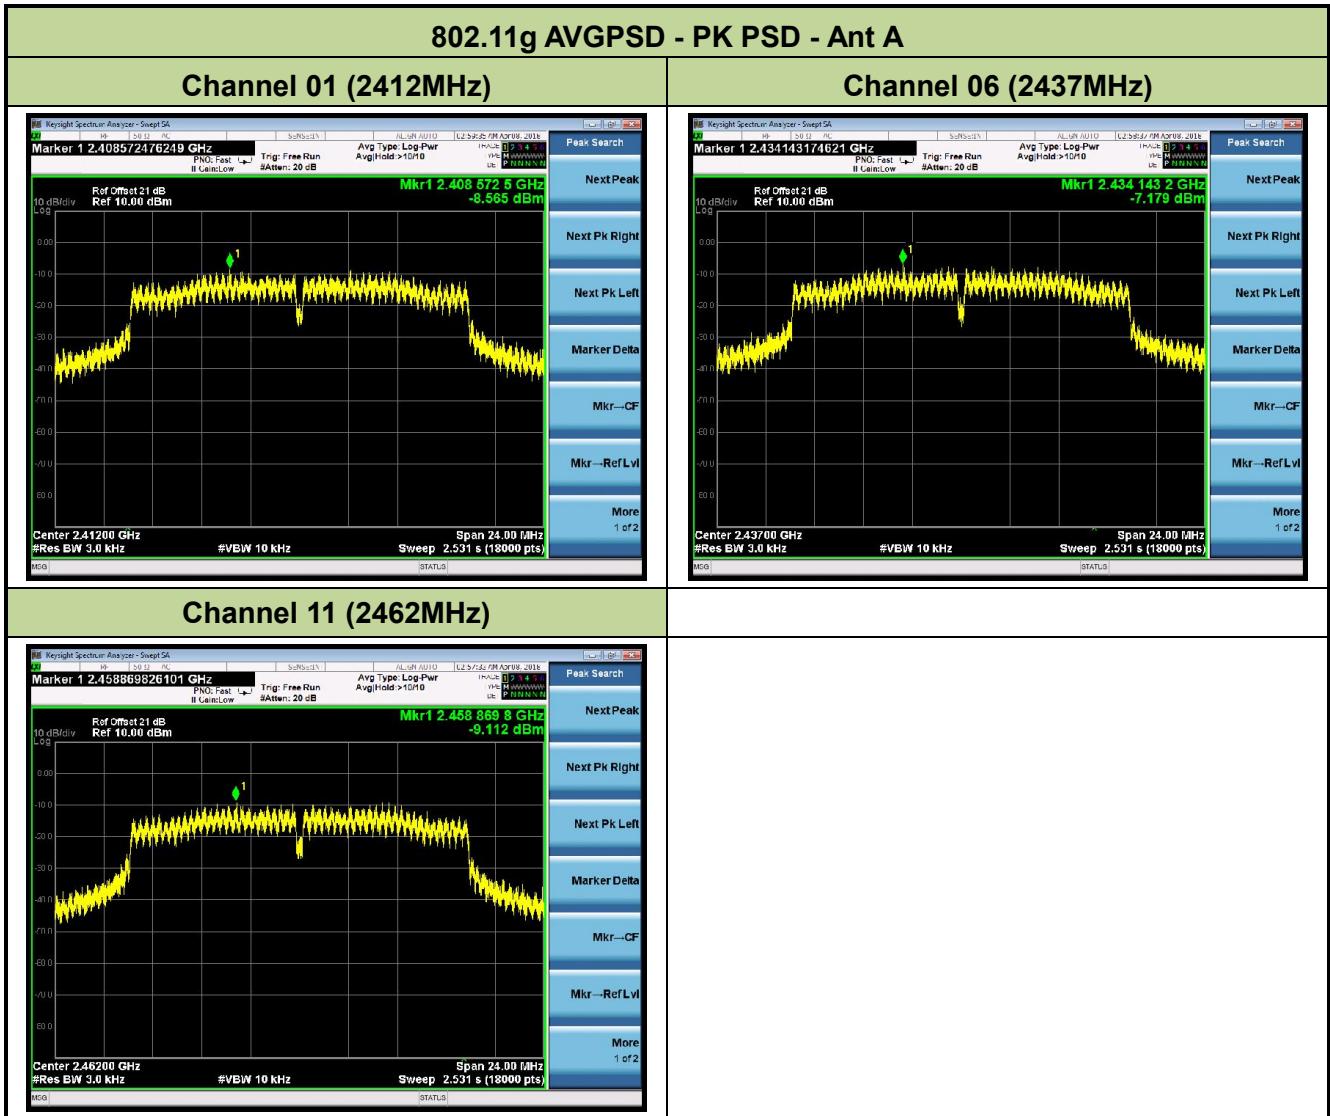


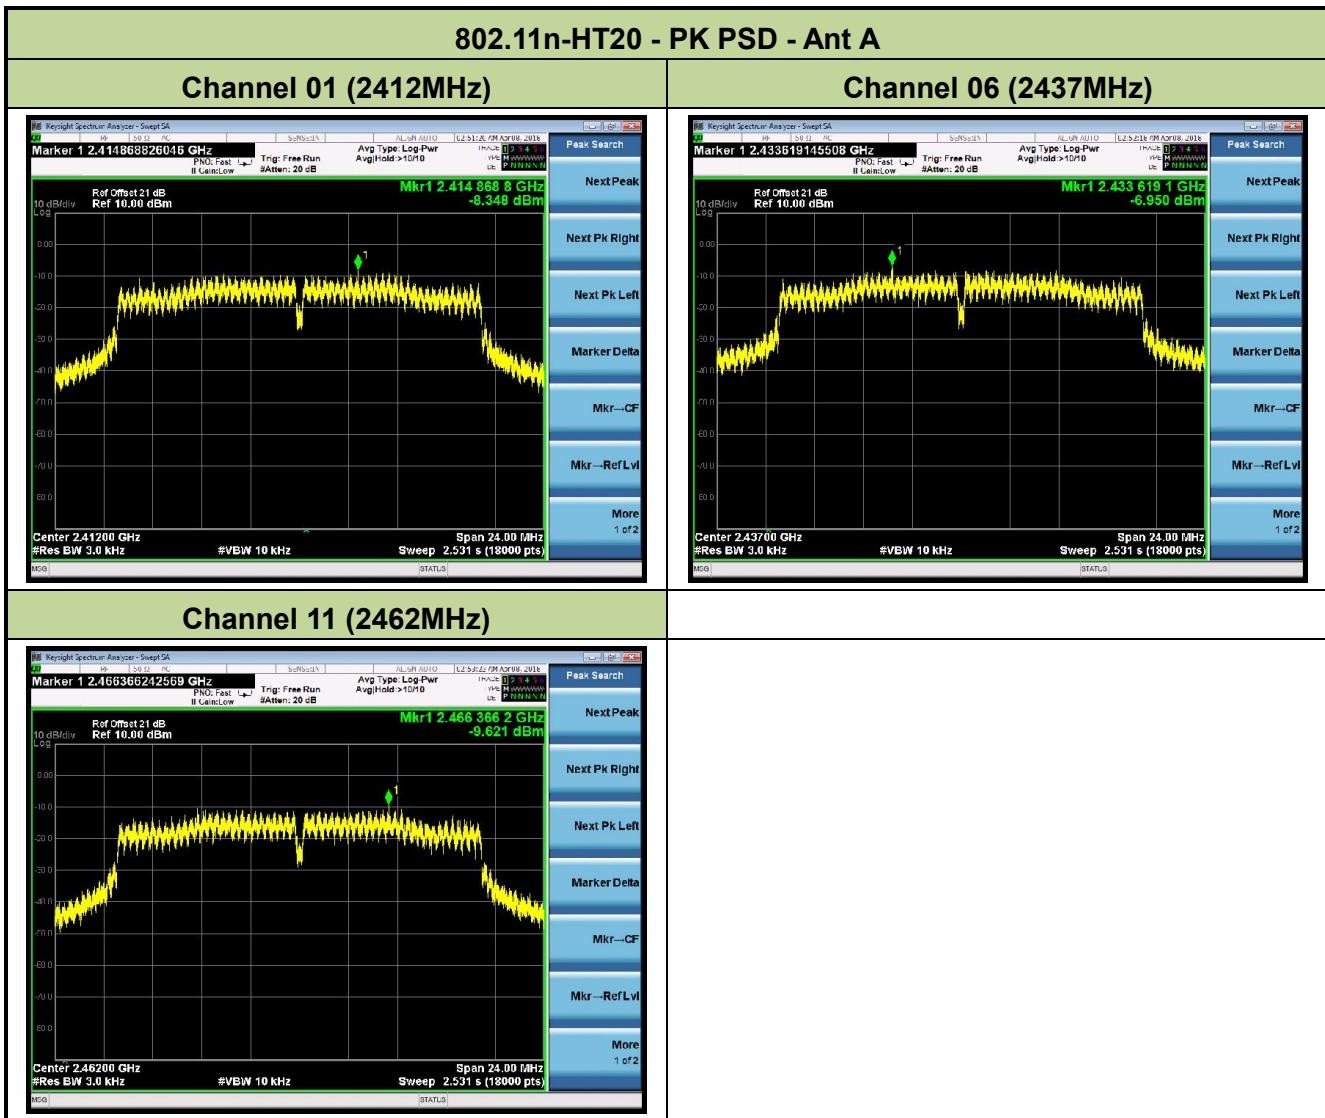


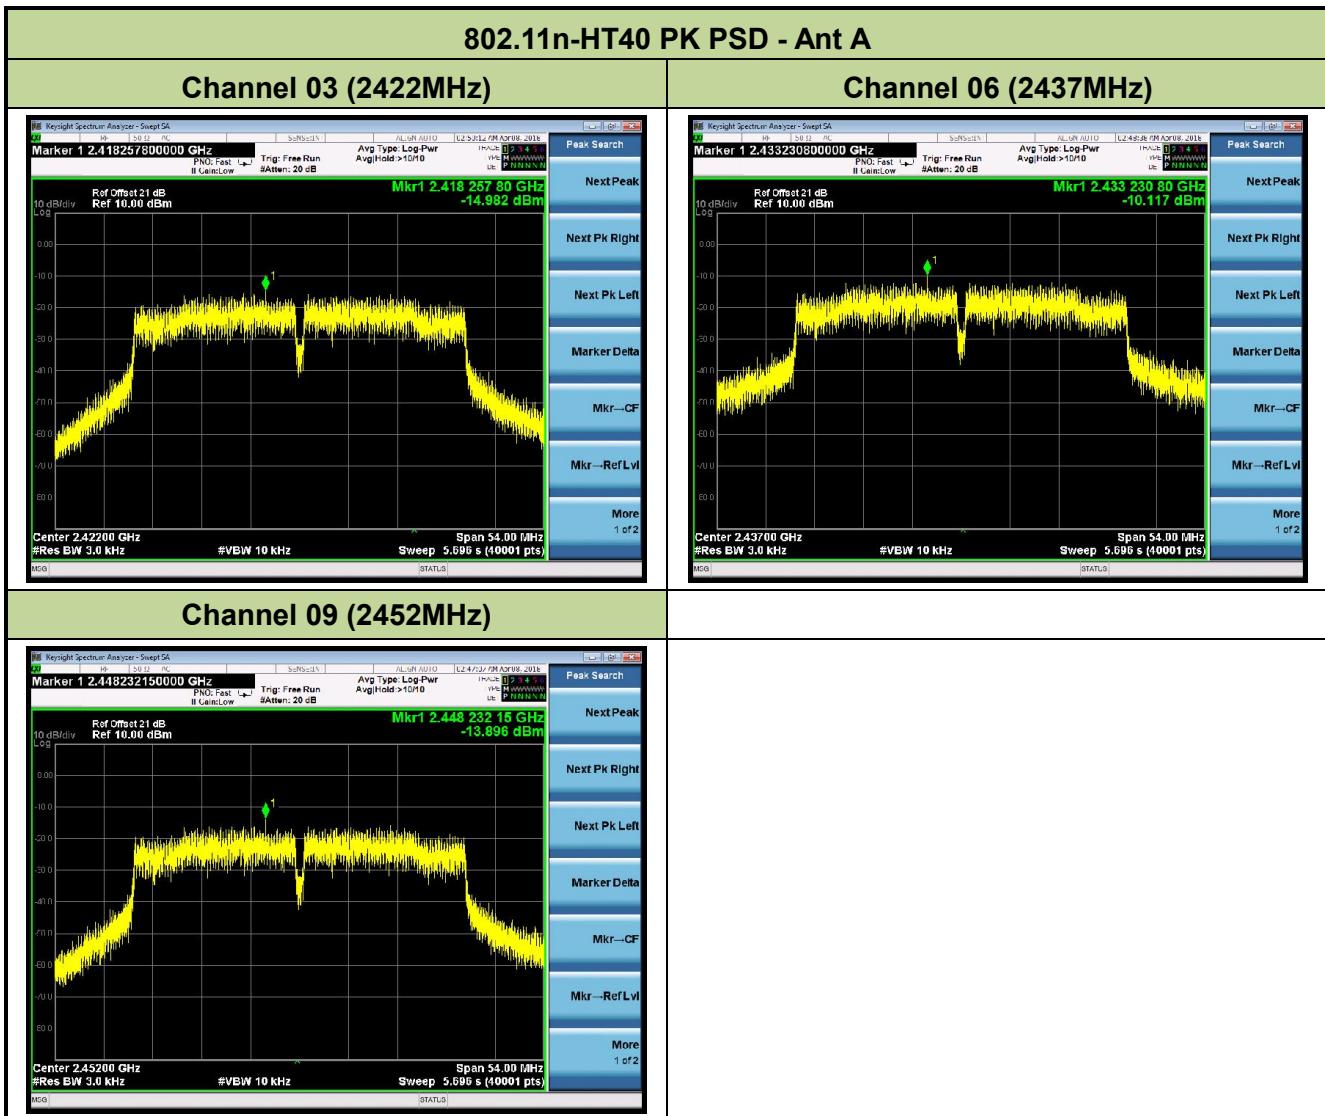

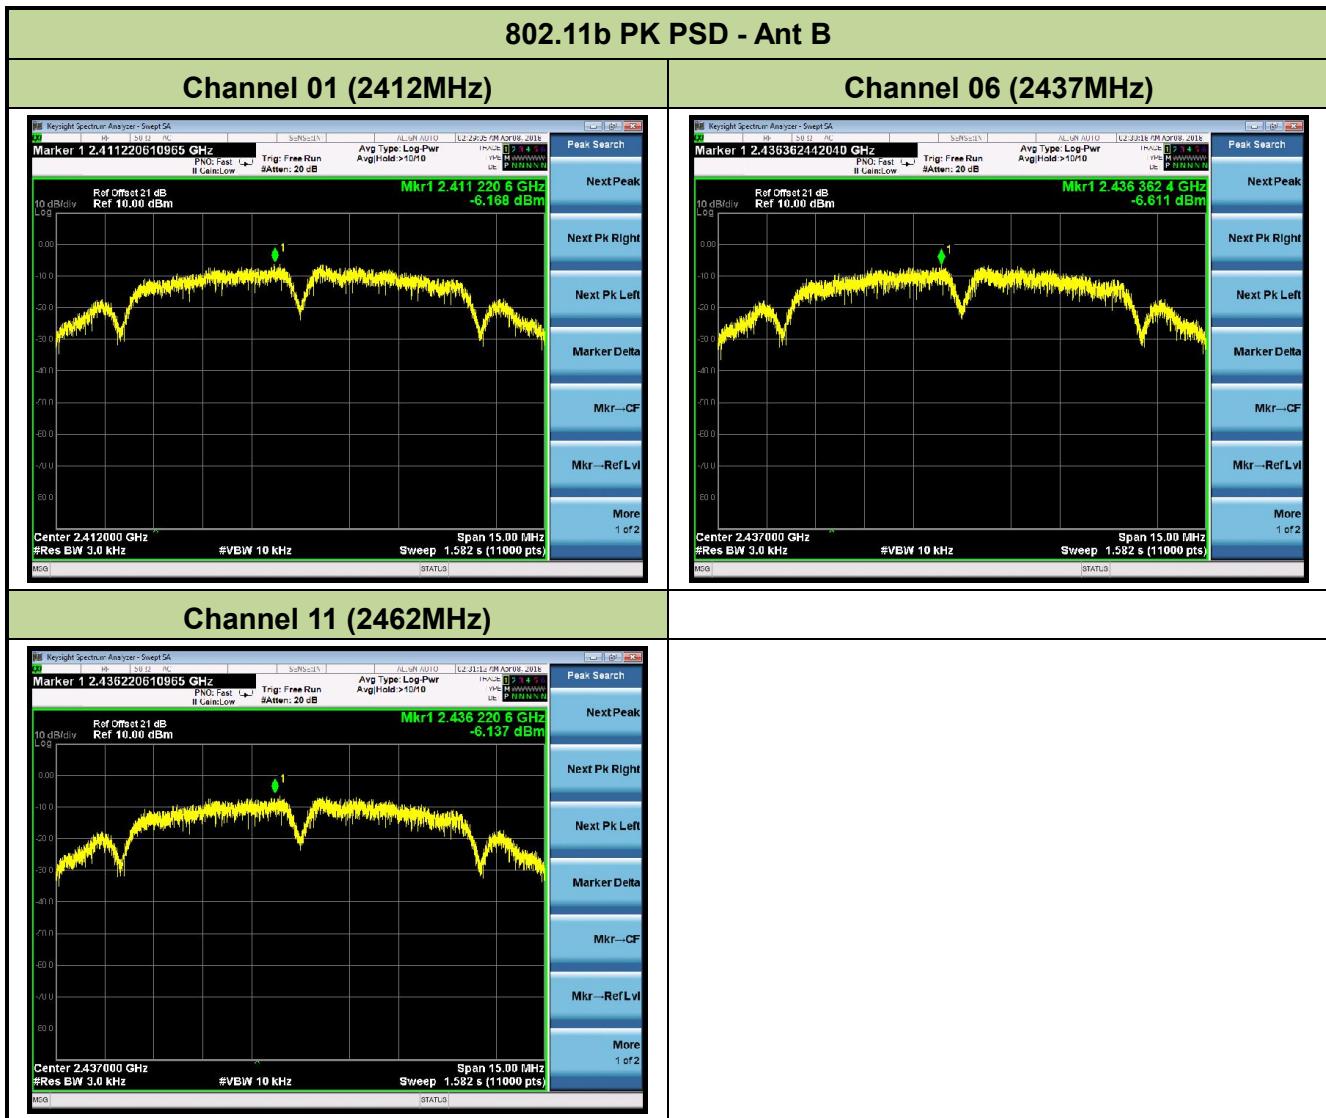

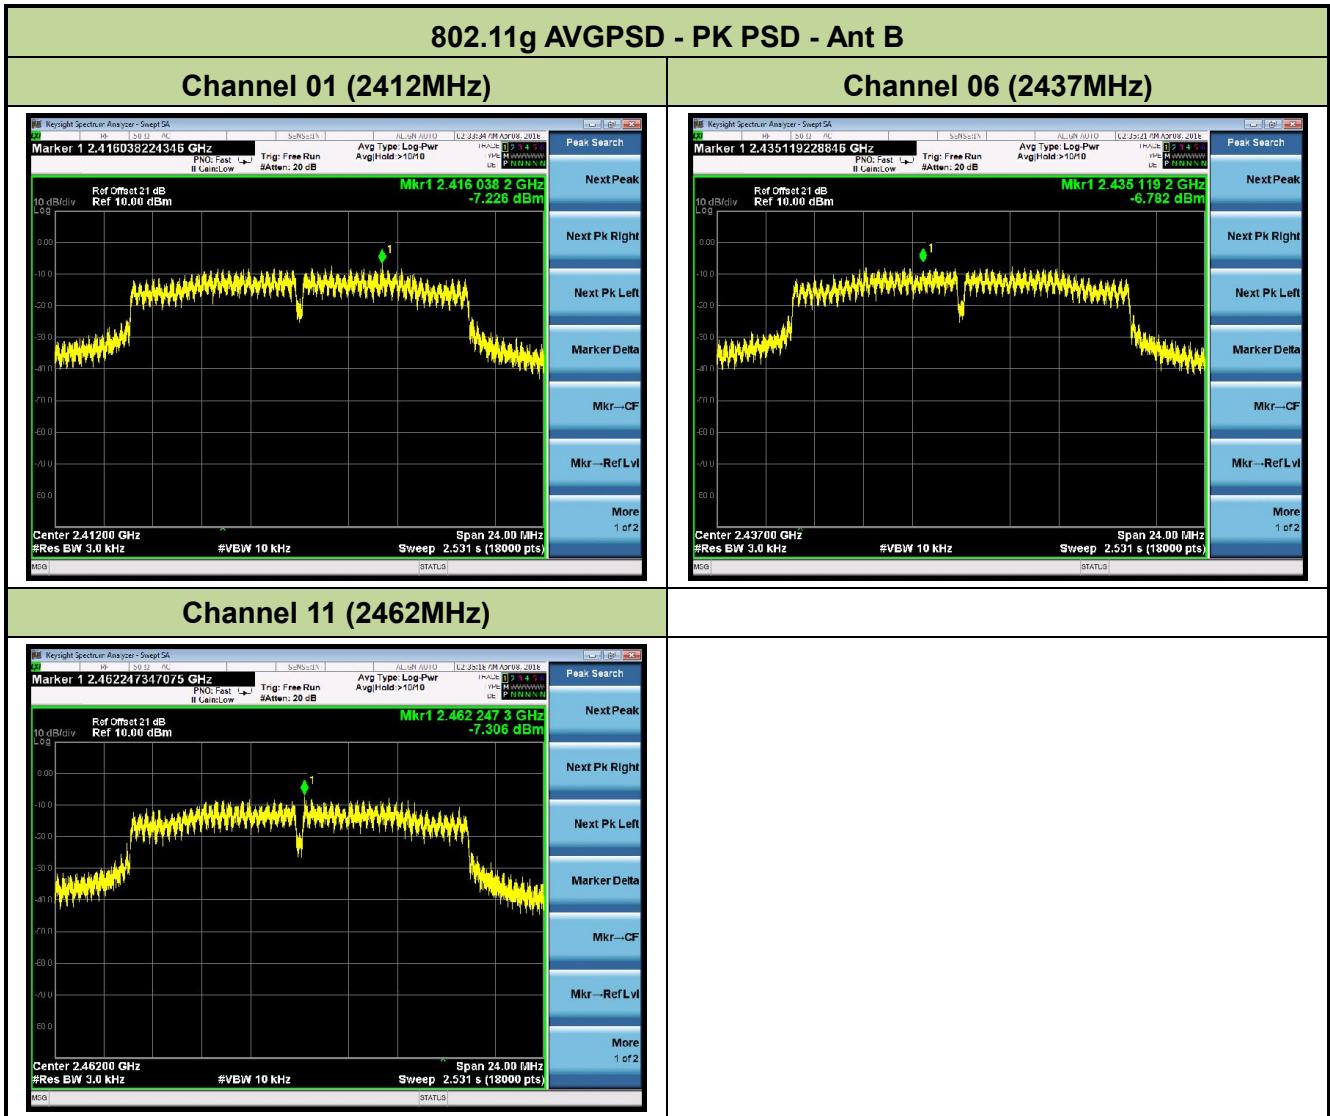

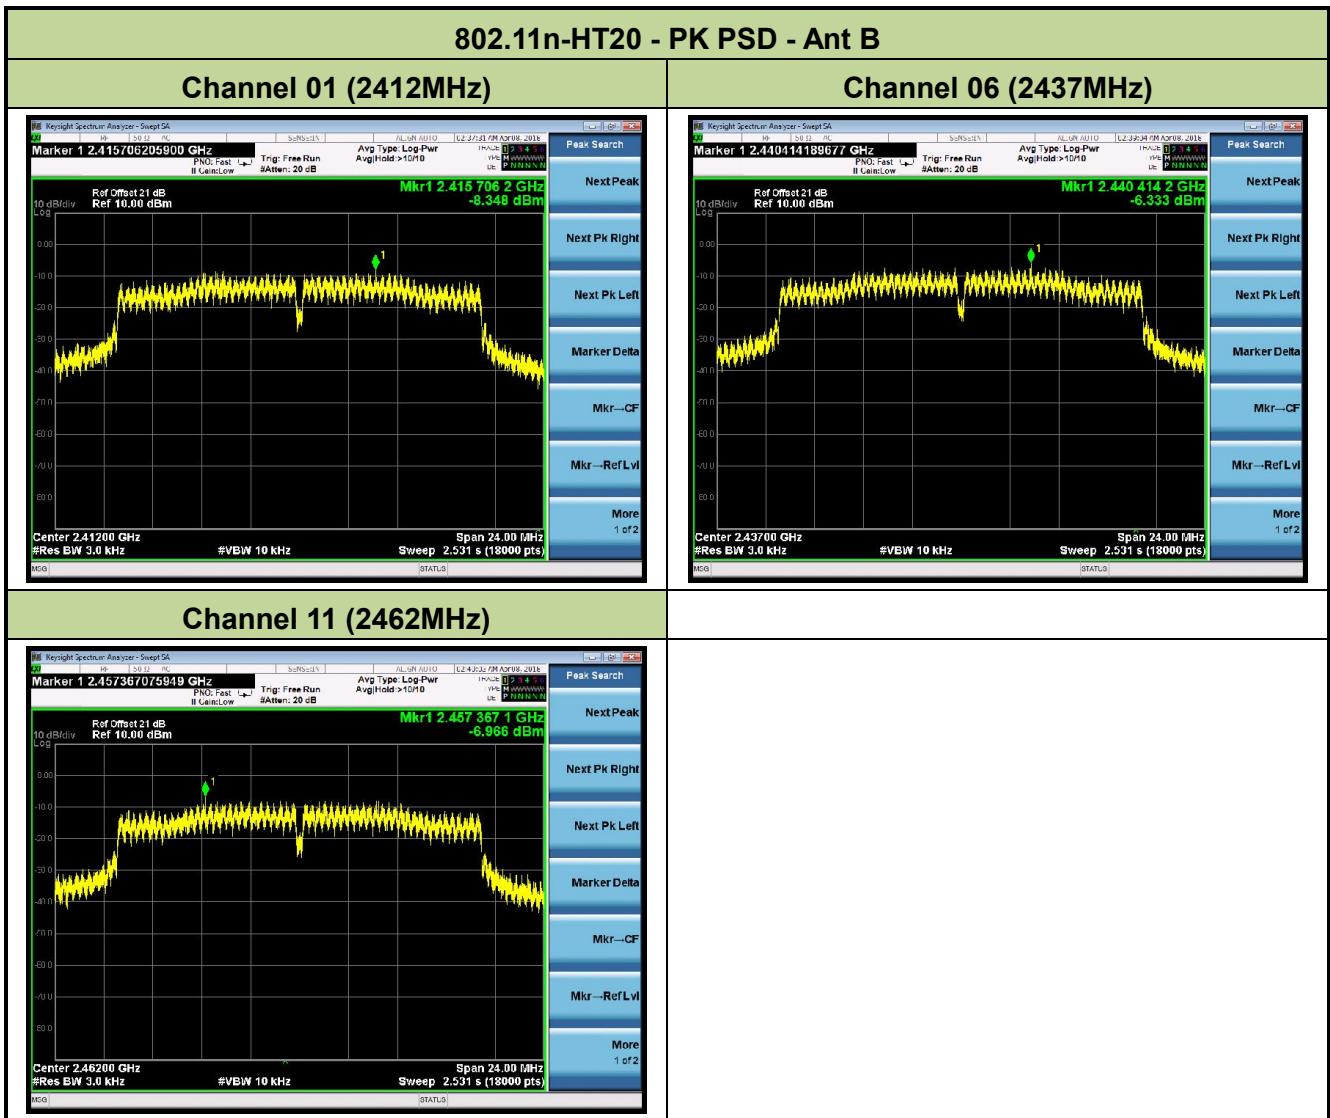

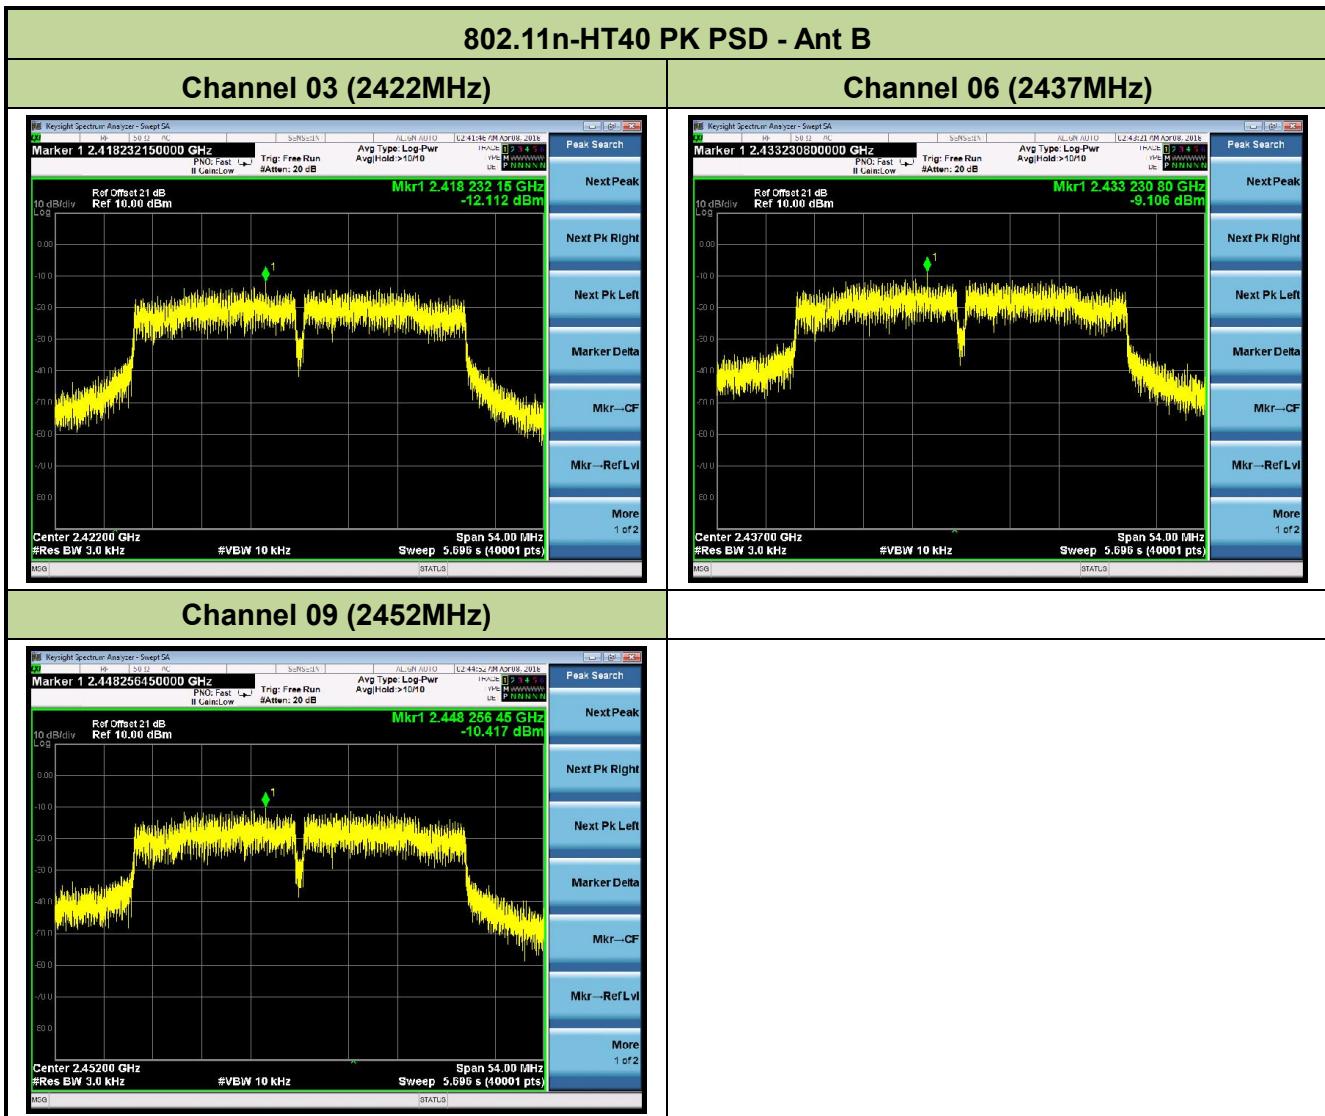

## **7.5. Conducted Band Edge and Out-of-Band Emissions**

### **7.5.1. Test Limit**

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth per the PSD procedure.

### **7.5.2. Test Procedure Used**

KDB 558074 D01v04 - Section 11.2 & Section 11.3

### **7.5.3. Test Setting**


#### **Reference level measurement**

1. Set instrument center frequency to DTS channel center frequency
2. Set the span to  $\geq$  1.5 times the DTS bandwidth
3. Set the RBW = 100 kHz
4. Set the VBW  $\geq$  3 x RBW
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Allow trace to fully stabilize

#### **Emission level measurement**

1. Set the center frequency and span to encompass frequency range to be measured
2. RBW = 100kHz
3. VBW = 300kHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

#### 7.5.4. Test Setup

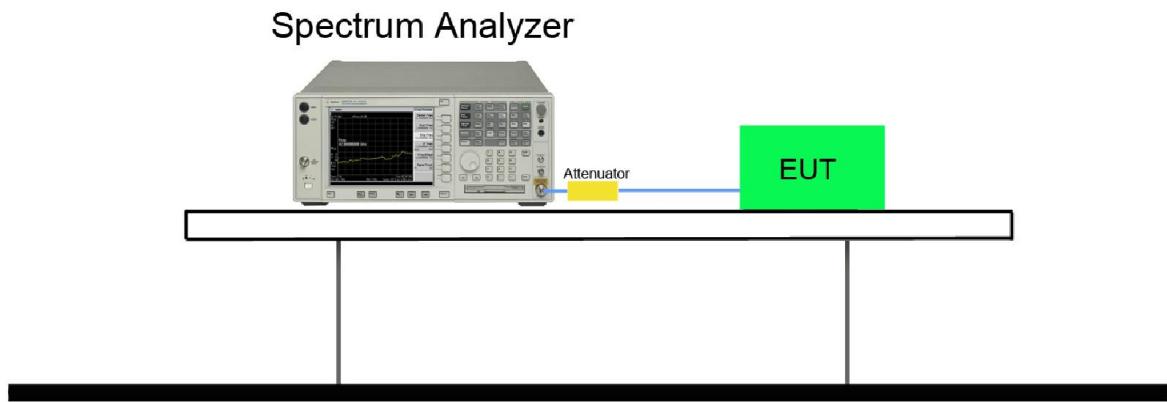

### 7.5.5. Test Result

Product	Acute Angle PC	Temperature	25°C
Test Engineer	Kevin Ker	Relative Humidity	52%
Test Site	SR1	Test Date	2018/04/08

Test Mode	Data Rate / MCS	Channel No.	Frequency (MHz)	Limit	Result
<b>Ant A</b>					
802.11b	1Mbps	01	2412	20dBc	Pass
802.11b	1Mbps	06	2437	20dBc	Pass
802.11b	1Mbps	11	2462	20dBc	Pass
802.11g	6Mbps	01	2412	20dBc	Pass
802.11g	6Mbps	06	2437	20dBc	Pass
802.11g	6Mbps	11	2462	20dBc	Pass
802.11n-HT20	MCS0	01	2412	20dBc	Pass
802.11n-HT20	MCS0	06	2437	20dBc	Pass
802.11n-HT20	MCS0	11	2462	20dBc	Pass
802.11n-HT40	MCS0	03	2422	20dBc	Pass
802.11n-HT40	MCS0	06	2437	20dBc	Pass
802.11n-HT40	MCS0	09	2452	20dBc	Pass
<b>Ant B</b>					
802.11b	1Mbps	01	2412	20dBc	Pass
802.11b	1Mbps	06	2437	20dBc	Pass
802.11b	1Mbps	11	2462	20dBc	Pass
802.11g	6Mbps	01	2412	20dBc	Pass
802.11g	6Mbps	06	2437	20dBc	Pass
802.11g	6Mbps	11	2462	20dBc	Pass
802.11n-HT20	MCS0	01	2412	20dBc	Pass
802.11n-HT20	MCS0	06	2437	20dBc	Pass
802.11n-HT20	MCS0	11	2462	20dBc	Pass
802.11n-HT40	MCS0	03	2422	20dBc	Pass
802.11n-HT40	MCS0	06	2437	20dBc	Pass
802.11n-HT40	MCS0	09	2452	20dBc	Pass

