

FCC REPORT

Applicant: SIGEYI Technology(Shenzhen) Co.,LTD

Address of Applicant: Galaxy Makers' World,No.1,Yanan Road Longgang District, Shenzhen 518000, China

Manufacturer/Factory: SIGEYI Technology(Shenzhen) Co.,LTD

Address of Manufacturer/Factory: Galaxy Makers' World,No.1,Yanan Road Longgang District, Shenzhen 518000, China

Equipment Under Test (EUT)

Product Name: DLS Cycling Power Meter

Model No.: PM063

Trade Mark: SIGEYI

FCC ID: 2APOZ-PM0630

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.249

Date of sample receipt: August 30, 2018

Date of Test: August 31, 2018-October 15, 2018

Date of report issued: October 16, 2018

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

A circular stamp from GTS Technology Services Co., Ltd. is overlaid with a handwritten signature. The stamp contains the text 'GTS TECHNOLOGY SERVICES CO., LTD.', 'GLOBAL TESTING', and '2018.08.01'. The signature is written in blue ink and includes the name 'Robinson Lo'.


Robinson Lo


Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

| Version No. | Date | Description |
|-------------|------------------|-------------|
| 00 | October 16, 2018 | Original |
| | | |
| | | |
| | | |
| | | |

Prepared By:  **Date:** October 16, 2018
Project Engineer

Check By:  **Date:** October 16, 2018
Reviewer

3 Contents

| | Page |
|---|------|
| 1 COVER PAGE..... | 1 |
| 2 VERSION..... | 2 |
| 3 CONTENTS..... | 3 |
| 4 TEST SUMMARY..... | 4 |
| 4.1 MEASUREMENT UNCERTAINTY..... | 4 |
| 5 GENERAL INFORMATION..... | 5 |
| 5.1 GENERAL DESCRIPTION OF EUT..... | 5 |
| 5.2 TEST MODE..... | 6 |
| 5.3 DESCRIPTION OF SUPPORT UNITS..... | 6 |
| 5.4 TEST FACILITY..... | 6 |
| 5.5 TEST LOCATION..... | 6 |
| 6 TEST INSTRUMENTS LIST..... | 7 |
| 7 TEST RESULTS AND MEASUREMENT DATA..... | 9 |
| 7.1 ANTENNA REQUIREMENT..... | 9 |
| 7.2 CONDUCTED EMISSIONS..... | 10 |
| 7.3 RADIATED EMISSION METHOD..... | 13 |
| 7.3.1 <i>Field Strength of The Fundamental Signal</i> | 15 |
| 7.3.2 <i>Spurious emissions</i> | 16 |
| 7.3.3 <i>Bandedge emissions</i> | 19 |
| 7.4 20dB OCCUPY BANDWIDTH..... | 21 |
| 8 TEST SETUP PHOTO..... | 22 |
| 9 EUT CONSTRUCTIONAL DETAILS..... | 23 |

4 Test Summary

| Test Item | Section in CFR 47 | Result |
|--|-----------------------|--------|
| Antenna requirement | 15.203 | Pass |
| AC Power Line Conducted Emission | 15.207 | Pass |
| Field strength of the fundamental signal | 15.249 (a) | Pass |
| Spurious emissions | 15.249 (a) (d)/15.209 | Pass |
| Band edge | 15.249 (d)/15.205 | Pass |
| 20dB Occupied Bandwidth | 15.215 (c) | Pass |

Remark: Test according to ANSI C63.10: 2013.

Pass: The EUT complies with the essential requirements in the standard.

4.1 Measurement Uncertainty

| Test Item | Frequency Range | Measurement Uncertainty | Notes |
|----------------------------------|-----------------|-------------------------|-------|
| Radiated Emission | 9kHz ~ 30MHz | ± 4.34dB | (1) |
| Radiated Emission | 30MHz ~ 1000MHz | ± 4.24dB | (1) |
| Radiated Emission | 1GHz ~ 26.5GHz | ± 4.68dB | (1) |
| AC Power Line Conducted Emission | 0.15MHz ~ 30MHz | ± 3.45dB | (1) |

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

5 General Information

5.1 General Description of EUT

| | |
|----------------------|------------------------------|
| Product Name: | DLS Cycling Power Meter |
| Model No.: | PM063 |
| Serial No.: | 30000 |
| Test sample(s) ID: | GTS201808000195-1 |
| Sample(s) Status | Engineered sample |
| Operation Frequency: | 2457MHz |
| Channel numbers: | 1 |
| Modulation type: | GFSK |
| Antenna Type: | PCB Antenna |
| Antenna gain: | 1.5dBi(declare by applicant) |
| Power supply: | Battery: DC 3.7V, 120mAh |

| Operation Frequency each of channel | |
|-------------------------------------|-----------|
| Channel | Frequency |
| 1 | 2457MHz |

5.2 Test mode

| | |
|--|---|
| Transmitting mode | Keep the EUT in continuously transmitting mode. |
| <i>Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i> | |

Per-test mode.

We have verified the construction and function in typical operation, The EUT was placed on three different polar directions; i.e. X axis, Y axis, Z axis. which worse case was shown in this test report and defined as follows:

| Axis | X | Y | Z |
|------------------------|-------|-------|-------|
| Field Strength(dBuV/m) | 85.26 | 86.22 | 84.14 |

5.3 Description of Support Units

| Manufacturer | Description | Model | Serial Number |
|---------------|-------------|-----------------|---------------|
| AoHai Adapter | USB Charger | A9A-050100U-US1 | N/A |

5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.: 381383**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383, January 08, 2018.

- **Industry Canada (IC) —Registration No.: 9079A-2**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, August 15, 2016

5.5 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102

Tel: 0755-27798480

Fax: 0755-27798960

6 Test Instruments list

| Radiated Emission: | | | | | | |
|--------------------|-------------------------------------|--------------------------------|-----------------------------|---------------|---------------------|-------------------------|
| Item | Test Equipment | Manufacturer | Model No. | Inventory No. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |
| 1 | 3m Semi- Anechoic Chamber | ZhongYu Electron | 9.2(L)*6.2(W)* 6.4(H) | GTS250 | July. 03 2015 | July. 02 2020 |
| 2 | Control Room | ZhongYu Electron | 6.2(L)*2.5(W)* 2.4(H) | GTS251 | N/A | N/A |
| 3 | EMI Test Receiver | Rohde & Schwarz | ESU26 | GTS203 | June. 27 2018 | June. 26 2019 |
| 4 | BiConiLog Antenna | SCHWARZBECK MESS-ELEKTRONIK | VULB9163 | GTS214 | June. 27 2018 | June. 26 2019 |
| 5 | Double -ridged waveguide horn | SCHWARZBECK MESS-ELEKTRONIK | 9120D-829 | GTS208 | June. 27 2018 | June. 26 2019 |
| 6 | Horn Antenna | ETS-LINDGREN | 3160 | GTS217 | June. 27 2018 | June. 26 2019 |
| 7 | EMI Test Software | AUDIX | E3 | N/A | N/A | N/A |
| 8 | Coaxial Cable | GTS | N/A | GTS213 | June. 27 2018 | June. 26 2019 |
| 9 | Coaxial Cable | GTS | N/A | GTS211 | June. 27 2018 | June. 26 2019 |
| 10 | Coaxial cable | GTS | N/A | GTS210 | June. 27 2018 | June. 26 2019 |
| 11 | Coaxial Cable | GTS | N/A | GTS212 | June. 27 2018 | June. 26 2019 |
| 12 | Amplifier(100kHz-3GHz) | HP | 8347A | GTS204 | June. 27 2018 | June. 26 2019 |
| 13 | Amplifier(2GHz-20GHz) | HP | 8349B | GTS206 | June. 27 2018 | June. 26 2019 |
| 14 | Amplifier (18-26GHz) | Rohde & Schwarz | AFS33-18002 650-30-8P-44 | GTS218 | June. 27 2018 | June. 26 2019 |
| 15 | Band filter | Amindeon | 82346 | GTS219 | June. 27 2018 | June. 26 2019 |
| 16 | Power Meter | Anritsu | ML2495A | GTS540 | June. 27 2018 | June. 26 2019 |
| 17 | Power Sensor | Anritsu | MA2411B | GTS541 | June. 27 2018 | June. 26 2019 |
| 18 | Wideband Radio Communication Tester | Rohde & Schwarz | CMW500 | GTS588 | June. 27 2018 | June. 26 2019 |
| 19 | Splitter | Agilent | 11636B | GTS237 | June. 27 2018 | June. 26 2019 |
| 20 | Loop Antenna | ZHINAN | ZN30900A | GTS534 | June. 27 2018 | June. 26 2019 |


| Conducted: | | | | | | |
|-------------------|--|--------------|------------------|------------|---------------------|-------------------------|
| Item | Test Equipment | Manufacturer | Model No. | Serial No. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |
| 1 | MXA Signal Analyzer | Agilent | N9020A | GTS566 | June. 27 2018 | June. 26 2019 |
| 2 | EMI Test Receiver | R&S | ESCI 7 | GTS552 | June. 27 2018 | June. 26 2019 |
| 3 | Spectrum Analyzer | Agilent | E4440A | GTS533 | June. 27 2018 | June. 26 2019 |
| 4 | MXG vector Signal Generator | Agilent | N5182A | GTS567 | June. 27 2018 | June. 26 2019 |
| 5 | ESG Analog Signal Generator | Agilent | E4428C | GTS568 | June. 27 2018 | June. 26 2019 |
| 6 | USB RF Power Sensor | DARE | RPR3006W | GTS569 | June. 27 2018 | June. 26 2019 |
| 7 | RF Switch Box | Shongyi | RFSW3003328 | GTS571 | June. 27 2018 | June. 26 2019 |
| 8 | EMI Test Receiver | R&S | ESCI 7 | GTS552 | June. 27 2018 | June. 26 2019 |
| 9 | Programmable Constant Temp & Humi Test Chamber | WEWON | WHTH-150L-40-880 | GTS572 | June. 27 2018 | June. 26 2019 |

| Conducted Emission | | | | | | |
|---------------------------|--------------------------|-------------------------|----------------------|---------------|---------------------|-------------------------|
| Item | Test Equipment | Manufacturer | Model No. | Inventory No. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |
| 1 | Shielding Room | ZhongYu Electron | 7.3(L)x3.1(W)x2.9(H) | GTS252 | May.16 2014 | May.15 2019 |
| 2 | EMI Test Receiver | R&S | ESCI 7 | GTS552 | June. 27 2018 | June. 26 2019 |
| 3 | Coaxial Switch | ANRITSU CORP | MP59B | GTS225 | June. 27 2018 | June. 26 2019 |
| 4 | Artificial Mains Network | SCHWARZBECK MESS | NSLK8127 | GTS226 | June. 27 2018 | June. 26 2019 |
| 5 | Coaxial Cable | GTS | N/A | GTS227 | June. 27 2018 | June. 26 2019 |
| 6 | EMI Test Software | AUDIX | E3 | N/A | N/A | N/A |
| 7 | Thermo meter | KTJ | TA328 | GTS233 | June. 27 2018 | June. 26 2019 |
| 8 | Absorbing clamp | Elektronik-Feinmechanik | MDS21 | GTS229 | June. 27 2018 | June. 26 2019 |

| General used equipment: | | | | | | |
|--------------------------------|----------------|--------------|-----------|---------------|---------------------|-------------------------|
| Item | Test Equipment | Manufacturer | Model No. | Inventory No. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |
| 1 | Barometer | ChangChun | DYM3 | GTS257 | June 27 2018 | June 26 2019 |

7 Test results and Measurement Data

7.1 Antenna requirement


| | |
|---|-----------------------------|
| Standard requirement: | FCC Part15 C Section 15.203 |
| <p>15.203 requirement:</p> <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> | |
| <p>EUT Antenna:</p> <p><i>The antenna is PCB antenna, the best case gain of the antenna is 1.50dBi</i></p> | |
|  | |

7.2 Conducted Emissions

| Test Requirement: | FCC Part15 C Section 15.207 | | | | | | | | | | | | | | |
|-----------------------|---|-----------------------|--------------|--|------------|---------|----------|-----------|-----------|-------|----|----|------|----|----|
| Test Method: | ANSI C63.10:2013 | | | | | | | | | | | | | | |
| Test Frequency Range: | 150KHz to 30MHz | | | | | | | | | | | | | | |
| Class / Severity: | Class B | | | | | | | | | | | | | | |
| Receiver setup: | RBW=9KHz, VBW=30KHz, Sweep time=auto | | | | | | | | | | | | | | |
| Limit: | <table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> <p>* Decreases with the logarithm of the frequency.</p> | Frequency range (MHz) | Limit (dBuV) | | Quasi-peak | Average | 0.15-0.5 | 66 to 56* | 56 to 46* | 0.5-5 | 56 | 46 | 5-30 | 60 | 50 |
| Frequency range (MHz) | Limit (dBuV) | | | | | | | | | | | | | | |
| | Quasi-peak | Average | | | | | | | | | | | | | |
| 0.15-0.5 | 66 to 56* | 56 to 46* | | | | | | | | | | | | | |
| 0.5-5 | 56 | 46 | | | | | | | | | | | | | |
| 5-30 | 60 | 50 | | | | | | | | | | | | | |
| Test setup: | <p><i>Remark</i> E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p> | | | | | | | | | | | | | | |
| Test procedure: | <ol style="list-style-type: none"> 1. The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement. | | | | | | | | | | | | | | |
| Test Instruments: | Refer to section 6.0 for details | | | | | | | | | | | | | | |
| Test mode: | Refer to section 5.2 for details | | | | | | | | | | | | | | |
| Test results: | Pass | | | | | | | | | | | | | | |


Measurement data

| | | | |
|-------------------------|--------------------------|-----------------|--------------|
| Mode: | Transmitting mode | Test by: | Jason |
| Temp./Hum.(%RH): | 26°C/56%RH | Probe: | Line |

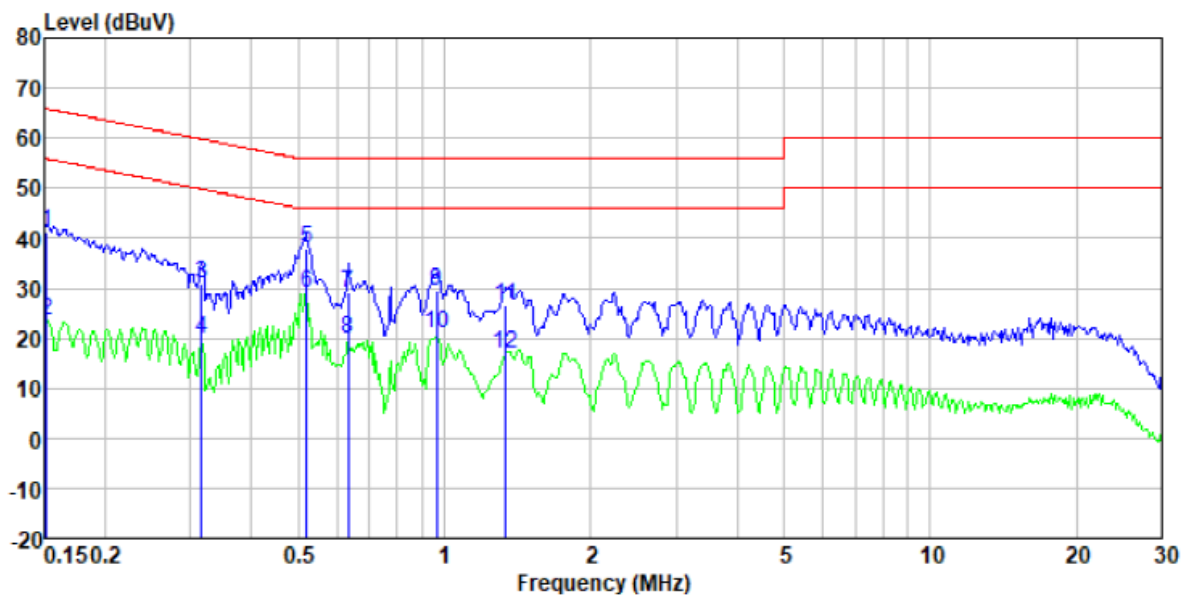

| Freq MHz | Reading level dBuV | LISN/ISN factor dB/m | Cable loss dB | Level dBuV | Limit level dBuV | Over limit dB | Remark |
|-------------|--------------------------|----------------------------|---------------------|---------------|------------------------|---------------------|---------|
| 0.15 | 40.89 | 0.40 | 0.07 | 41.36 | 65.91 | -24.55 | QP |
| 0.15 | 23.17 | 0.40 | 0.07 | 23.64 | 55.91 | -32.27 | Average |
| 0.32 | 30.55 | 0.39 | 0.10 | 31.04 | 59.80 | -28.76 | QP |
| 0.32 | 19.22 | 0.39 | 0.10 | 19.71 | 49.80 | -30.09 | Average |
| 0.52 | 37.65 | 0.31 | 0.11 | 38.07 | 56.00 | -17.93 | QP |
| 0.52 | 28.77 | 0.31 | 0.11 | 29.19 | 46.00 | -16.81 | Average |
| 0.63 | 28.57 | 0.28 | 0.12 | 28.97 | 56.00 | -27.03 | QP |
| 0.63 | 19.52 | 0.28 | 0.12 | 19.92 | 46.00 | -26.08 | Average |
| 0.96 | 29.14 | 0.21 | 0.15 | 29.50 | 56.00 | -26.50 | QP |
| 0.96 | 20.66 | 0.21 | 0.15 | 21.02 | 46.00 | -24.98 | Average |
| 1.34 | 26.14 | 0.20 | 0.16 | 26.50 | 56.00 | -29.50 | QP |
| 1.34 | 16.61 | 0.20 | 0.16 | 16.97 | 46.00 | -29.03 | Average |

| | | | |
|-------------------------|--------------------------|-----------------|----------------|
| Mode: | Transmitting mode | Test by: | Jason |
| Temp./Hum.(%RH): | 26°C/56%RH | Probe: | Neutral |

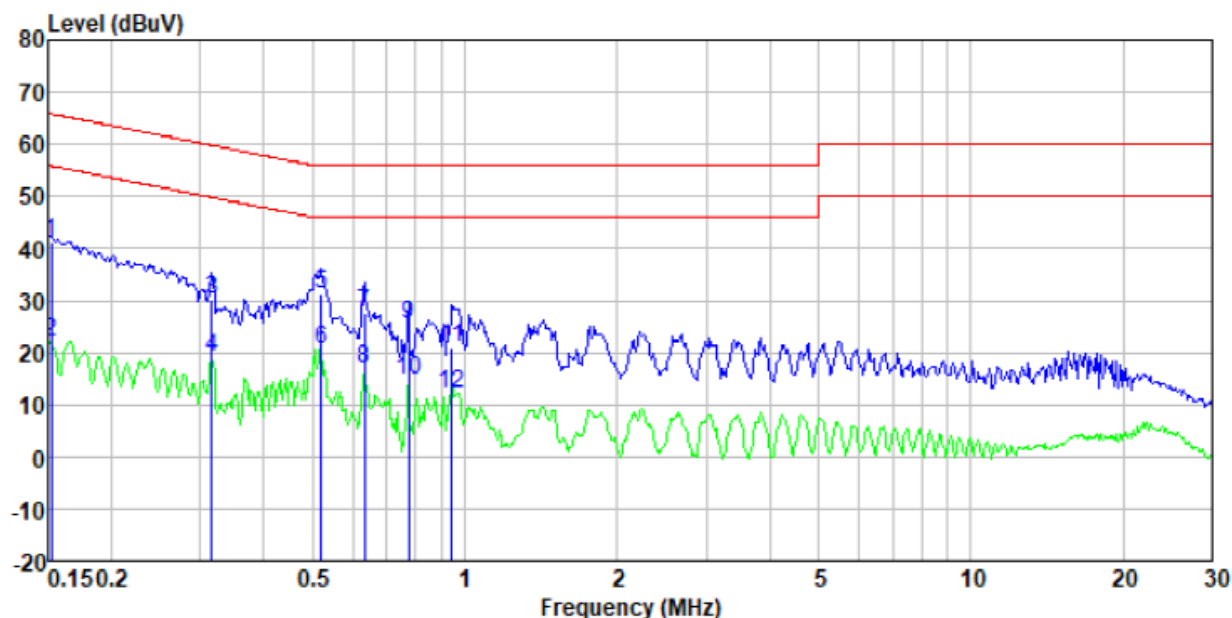



| Freq MHz | Reading level dBuV | LISN/ISN factor dB/m | Cable loss dB | Level dBuV | Limit level dBuV | Over limit dB | Remark |
|-------------|--------------------------|----------------------------|---------------------|---------------|------------------------|---------------------|---------|
| 0.15 | 40.83 | 0.40 | 0.07 | 41.30 | 65.87 | -24.57 | QP |
| 0.15 | 21.44 | 0.40 | 0.07 | 21.91 | 55.87 | -33.96 | Average |
| 0.32 | 29.85 | 0.39 | 0.10 | 30.34 | 59.80 | -29.46 | QP |
| 0.32 | 18.68 | 0.39 | 0.10 | 19.17 | 49.80 | -30.63 | Average |
| 0.52 | 30.93 | 0.31 | 0.11 | 31.35 | 56.00 | -24.65 | QP |
| 0.52 | 20.27 | 0.31 | 0.11 | 20.69 | 46.00 | -25.31 | Average |
| 0.63 | 27.09 | 0.28 | 0.12 | 27.49 | 56.00 | -28.51 | QP |
| 0.63 | 16.59 | 0.28 | 0.12 | 16.99 | 46.00 | -29.01 | Average |
| 0.78 | 24.96 | 0.24 | 0.14 | 25.34 | 56.00 | -30.66 | QP |
| 0.78 | 14.32 | 0.24 | 0.14 | 14.70 | 46.00 | -31.30 | Average |
| 0.94 | 20.61 | 0.21 | 0.15 | 20.97 | 56.00 | -35.03 | QP |
| 0.94 | 11.79 | 0.21 | 0.15 | 12.15 | 46.00 | -33.85 | Average |

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

7.3 Radiated Emission Method
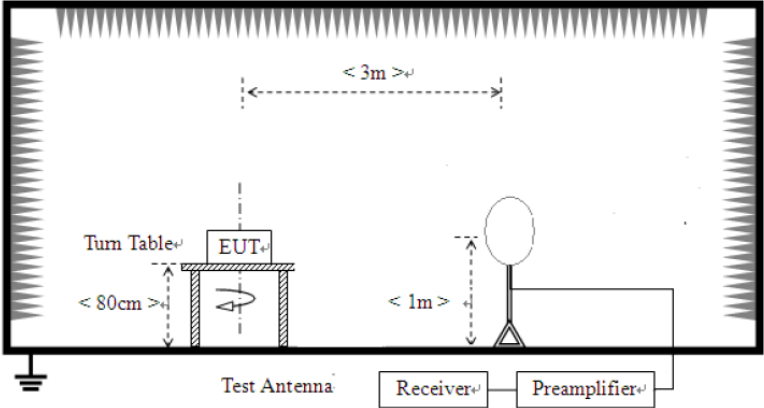
| Test Requirement: | FCC Part15 C Section 15.209 | | | | | | | | | | | | | | | | | | | | |
|--|--|------------------|--------------------|------------------|-------------------|---------|------------------|--------------|------------|------------------|------------------|------------|------------------|-------------|---------|------------------|------------|---------|---------------|---------------|------------|
| Test Method: | ANSI C63.10:2013 | | | | | | | | | | | | | | | | | | | | |
| Test Frequency Range: | 9kHz to 25GHz | | | | | | | | | | | | | | | | | | | | |
| Test site: | Measurement Distance: 3m | | | | | | | | | | | | | | | | | | | | |
| Receiver setup: | <table border="1"> <thead> <tr> <th>Frequency</th> <th>Detector</th> <th>RBW</th> <th>VBW</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>30MHz-1GHz</td> <td>Quasi-peak</td> <td>120KHz</td> <td>300KHz</td> <td>Quasi-peak Value</td> </tr> <tr> <td rowspan="2">Above 1GHz</td> <td>Peak</td> <td>1MHz</td> <td>3MHz</td> <td>Peak Value</td> </tr> <tr> <td>Peak</td> <td>1MHz</td> <td>10Hz</td> <td>Average Value</td> </tr> </tbody> </table> | Frequency | Detector | RBW | VBW | Remark | 30MHz-1GHz | Quasi-peak | 120KHz | 300KHz | Quasi-peak Value | Above 1GHz | Peak | 1MHz | 3MHz | Peak Value | Peak | 1MHz | 10Hz | Average Value | |
| Frequency | Detector | RBW | VBW | Remark | | | | | | | | | | | | | | | | | |
| 30MHz-1GHz | Quasi-peak | 120KHz | 300KHz | Quasi-peak Value | | | | | | | | | | | | | | | | | |
| Above 1GHz | Peak | 1MHz | 3MHz | Peak Value | | | | | | | | | | | | | | | | | |
| | Peak | 1MHz | 10Hz | Average Value | | | | | | | | | | | | | | | | | |
| Limit: (Field strength of the fundamental signal) | <table border="1"> <thead> <tr> <th>Frequency</th> <th>Limit (dBuV/m @3m)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td rowspan="2">2400MHz-2483.5MHz</td> <td>94.00</td> <td>Average Value</td> </tr> <tr> <td>114.00</td> <td>Peak Value</td> </tr> </tbody> </table> | Frequency | Limit (dBuV/m @3m) | Remark | 2400MHz-2483.5MHz | 94.00 | Average Value | 114.00 | Peak Value | | | | | | | | | | | | |
| Frequency | Limit (dBuV/m @3m) | Remark | | | | | | | | | | | | | | | | | | | |
| 2400MHz-2483.5MHz | 94.00 | Average Value | | | | | | | | | | | | | | | | | | | |
| | 114.00 | Peak Value | | | | | | | | | | | | | | | | | | | |
| Limit: (Spurious Emissions) | <table border="1"> <thead> <tr> <th>Frequency</th> <th>Limit (uV/m)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>30MHz-88MHz</td> <td>100 @3m</td> <td>Quasi-peak Value</td> </tr> <tr> <td>88MHz-216MHz</td> <td>150 @3m</td> <td>Quasi-peak Value</td> </tr> <tr> <td>216MHz-960MHz</td> <td>200 @3m</td> <td>Quasi-peak Value</td> </tr> <tr> <td>960MHz-1GHz</td> <td>500 @3m</td> <td>Quasi-peak Value</td> </tr> <tr> <td rowspan="2">Above 1GHz</td> <td>500 @3m</td> <td>Average Value</td> </tr> <tr> <td>5000 @3m</td> <td>Peak Value</td> </tr> </tbody> </table> | Frequency | Limit (uV/m) | Remark | 30MHz-88MHz | 100 @3m | Quasi-peak Value | 88MHz-216MHz | 150 @3m | Quasi-peak Value | 216MHz-960MHz | 200 @3m | Quasi-peak Value | 960MHz-1GHz | 500 @3m | Quasi-peak Value | Above 1GHz | 500 @3m | Average Value | 5000 @3m | Peak Value |
| Frequency | Limit (uV/m) | Remark | | | | | | | | | | | | | | | | | | | |
| 30MHz-88MHz | 100 @3m | Quasi-peak Value | | | | | | | | | | | | | | | | | | | |
| 88MHz-216MHz | 150 @3m | Quasi-peak Value | | | | | | | | | | | | | | | | | | | |
| 216MHz-960MHz | 200 @3m | Quasi-peak Value | | | | | | | | | | | | | | | | | | | |
| 960MHz-1GHz | 500 @3m | Quasi-peak Value | | | | | | | | | | | | | | | | | | | |
| Above 1GHz | 500 @3m | Average Value | | | | | | | | | | | | | | | | | | | |
| | 5000 @3m | Peak Value | | | | | | | | | | | | | | | | | | | |
| Limit: (band edge) | Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation. | | | | | | | | | | | | | | | | | | | | |
| Test setup: | <p>For radiated emissions from 9kHz to 30MHz</p>  <p>For radiated emissions from 30MHz to 1GHz</p> | | | | | | | | | | | | | | | | | | | | |
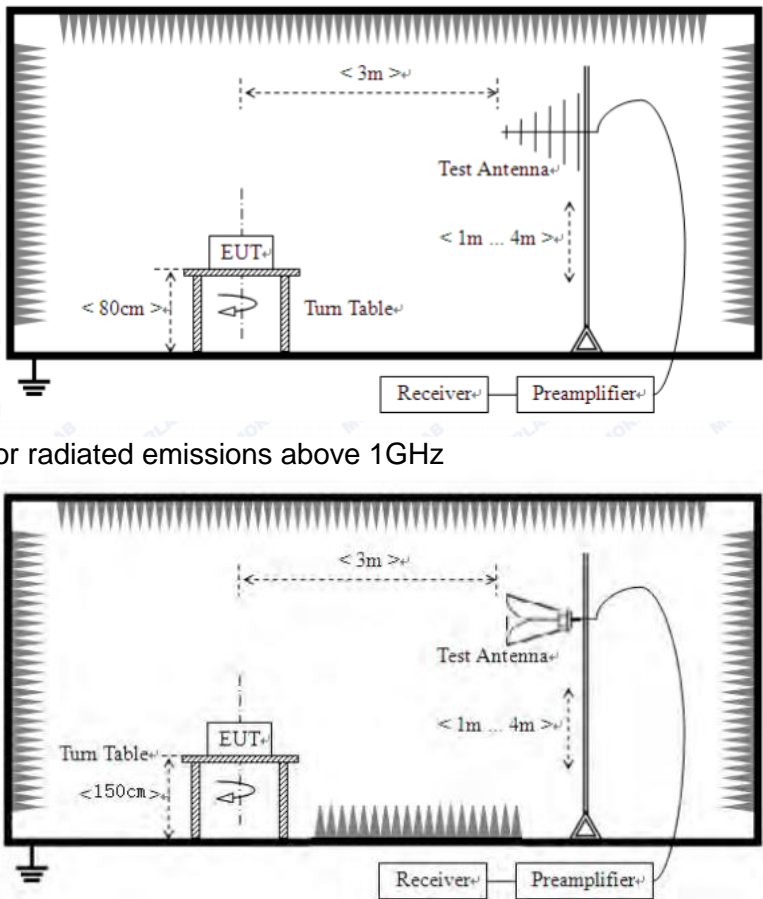
| | |
|--------------------------|--|
| |  <p>For radiated emissions above 1GHz</p> |
| <p>Test Procedure:</p> | <ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. |
| <p>Test Instruments:</p> | <p>Refer to section 6.0 for details</p> |
| <p>Test mode:</p> | <p>Refer to section 5.2 for details</p> |
| <p>Test results:</p> | <p>Pass</p> |

Measurement data:

7.3.1 Field Strength of The Fundamental Signal

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 2457.00 | 90.21 | 27.47 | 5.45 | 36.91 | 86.22 | 114.00 | -27.78 | Vertical |
| 2457.00 | 87.96 | 27.47 | 5.45 | 36.91 | 83.97 | 114.00 | -30.03 | Horizontal |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 2457.00 | 84.33 | 27.47 | 5.45 | 36.91 | 80.34 | 94.00 | -13.66 | Vertical |
| 2457.00 | 82.19 | 27.47 | 5.45 | 36.91 | 78.20 | 94.00 | -15.80 | Horizontal |

Remark: RBW 2MHz VBW 2MHz Peak detector is for PK value , RMS detector is for AV value


7.3.2 Spurious emissions

■ Below 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o), the test result no need to reported.


■ Below 1GHz

| | | | |
|-------------------------|--------------------------|----------------------|-------------------|
| Mode: | Transmitting mode | Test by: | Jason |
| Temp./Hum.(%RH): | 26°C/56%RH | Polarization: | Horizontal |

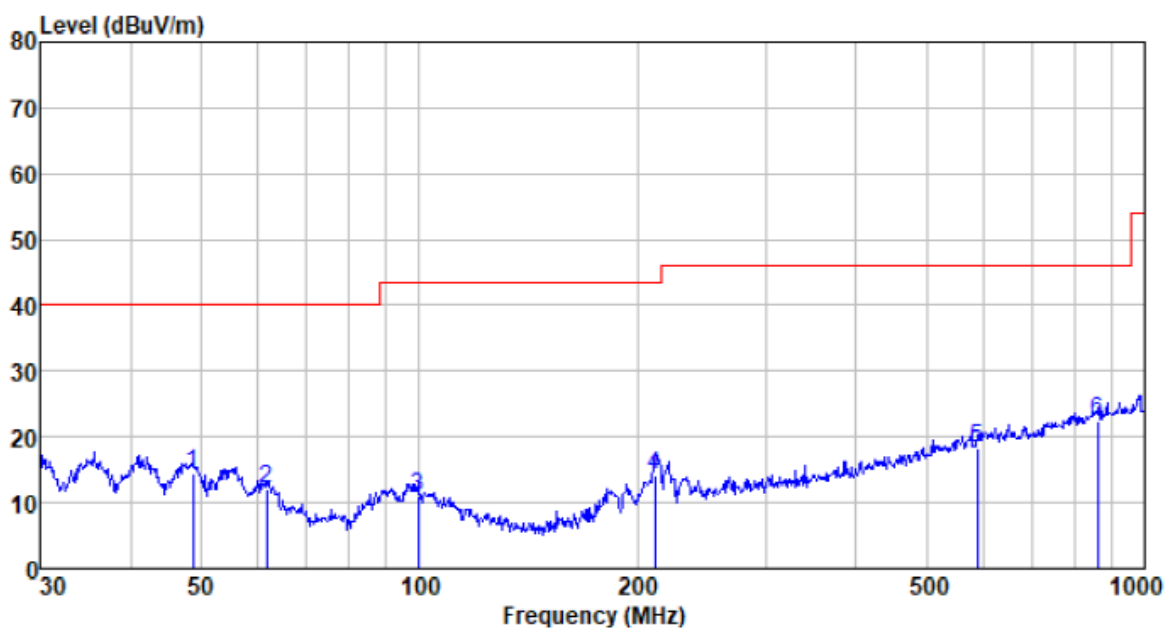

| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|---------------|--------------------------|---------------------|--------|
| 48.672 | 37.50 | 12.29 | 0.76 | 36.12 | 14.43 | 40.00 | -25.57 | QP |
| 61.562 | 36.90 | 10.72 | 0.87 | 36.34 | 12.15 | 40.00 | -27.85 | QP |
| 99.528 | 34.31 | 12.13 | 1.19 | 36.72 | 10.91 | 43.50 | -32.59 | QP |
| 211.527 | 38.88 | 10.84 | 1.91 | 37.34 | 14.29 | 43.50 | -29.21 | QP |
| 586.844 | 33.05 | 19.23 | 3.67 | 37.54 | 18.41 | 46.00 | -27.59 | QP |
| 860.035 | 33.33 | 21.95 | 4.69 | 37.61 | 22.36 | 46.00 | -23.64 | QP |

| | | | |
|-------------------------|--------------------------|----------------------|-----------------|
| Mode: | Transmitting mode | Test by: | Jason |
| Temp./Hum.(%RH): | 26°C/56%RH | Polarization: | Vertical |

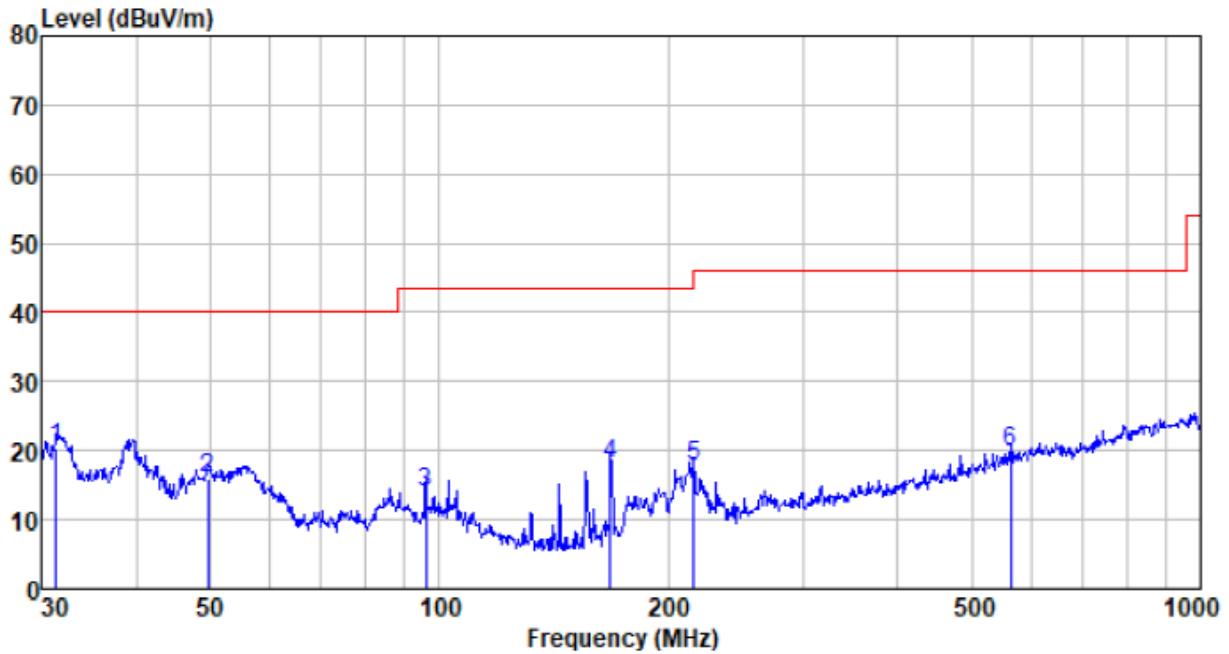

| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|---------------|--------------------------|---------------------|--------|
| 31.399 | 43.79 | 11.23 | 0.57 | 35.11 | 20.48 | 40.00 | -19.52 | QP |
| 49.707 | 39.18 | 12.30 | 0.77 | 36.17 | 16.08 | 40.00 | -23.92 | QP |
| 96.099 | 37.72 | 11.65 | 1.16 | 36.69 | 13.84 | 43.50 | -29.66 | QP |
| 167.824 | 44.97 | 8.46 | 1.67 | 37.18 | 17.92 | 43.50 | -25.58 | QP |
| 216.024 | 42.23 | 11.02 | 1.93 | 37.35 | 17.83 | 46.00 | -28.17 | QP |
| 562.662 | 34.86 | 18.73 | 3.57 | 37.53 | 19.63 | 46.00 | -26.37 | QP |

■ Above 1GHz

| | |
|-----------------|---------|
| Test Frequency: | 2457MHz |
|-----------------|---------|

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4914.00 | 29.36 | 31.37 | 8.69 | 37.77 | 31.65 | 74.00 | -42.35 | Vertical |
| 7371.00 | 27.10 | 36.53 | 11.75 | 35.58 | 39.80 | 74.00 | -34.20 | Vertical |
| 9828.00 | 26.34 | 38.20 | 14.31 | 35.09 | 43.76 | 74.00 | -30.24 | Vertical |
| 12285.00 | * | | | | | 74.00 | | Vertical |
| 14742.00 | * | | | | | 74.00 | | Vertical |
| 4914.00 | 27.88 | 31.37 | 8.69 | 37.77 | 30.17 | 74.00 | -43.83 | Horizontal |
| 7371.00 | 27.06 | 36.53 | 11.75 | 35.58 | 39.76 | 74.00 | -34.24 | Horizontal |
| 9828.00 | 26.11 | 38.20 | 14.31 | 35.09 | 43.53 | 74.00 | -30.47 | Horizontal |
| 12285.00 | * | | | | | 74.00 | | Horizontal |
| 14742.00 | * | | | | | 74.00 | | Horizontal |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4914.00 | 23.79 | 31.37 | 8.69 | 37.77 | 26.08 | 54.00 | -27.92 | Vertical |
| 7371.00 | 22.16 | 36.53 | 11.75 | 35.58 | 34.86 | 54.00 | -19.14 | Vertical |
| 9828.00 | 20.87 | 38.20 | 14.31 | 35.09 | 38.29 | 54.00 | -15.71 | Vertical |
| 12285.00 | * | | | | | 54.00 | | Vertical |
| 14742.00 | * | | | | | 54.00 | | Vertical |
| 4914.00 | 22.58 | 31.37 | 8.69 | 37.77 | 24.87 | 54.00 | -29.13 | Horizontal |
| 7371.00 | 21.46 | 36.53 | 11.75 | 35.58 | 34.16 | 54.00 | -19.84 | Horizontal |
| 9828.00 | 21.09 | 38.20 | 14.31 | 35.09 | 38.51 | 54.00 | -15.49 | Horizontal |
| 12285.00 | * | | | | | 54.00 | | Horizontal |
| 14742.00 | * | | | | | 54.00 | | Horizontal |

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.3.3 Bandedge emissions

| | |
|-----------------|---------|
| Test Frequency: | 2457MHz |
|-----------------|---------|

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 2310.00 | 34.21 | 27.91 | 5.30 | 36.79 | 30.63 | 74.00 | -43.37 | Horizontal |
| 2390.00 | 34.29 | 27.59 | 5.38 | 36.85 | 30.41 | 74.00 | -43.59 | Horizontal |
| 2400.00 | 35.63 | 27.56 | 5.40 | 36.86 | 31.73 | 74.00 | -42.27 | Horizontal |
| 2310.00 | 34.83 | 27.91 | 5.30 | 36.79 | 31.25 | 74.00 | -42.75 | Vertical |
| 2390.00 | 34.31 | 27.59 | 5.38 | 36.85 | 30.43 | 74.00 | -43.57 | Vertical |
| 2400.00 | 35.24 | 27.56 | 5.40 | 36.86 | 31.34 | 74.00 | -42.66 | Vertical |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 2310.00 | 28.81 | 27.91 | 5.30 | 36.79 | 25.23 | 54.00 | -28.77 | Horizontal |
| 2390.00 | 28.92 | 27.59 | 5.38 | 36.85 | 25.04 | 54.00 | -28.96 | Horizontal |
| 2400.00 | 29.67 | 27.56 | 5.40 | 36.86 | 25.77 | 54.00 | -28.23 | Horizontal |
| 2310.00 | 29.08 | 27.91 | 5.30 | 36.79 | 25.50 | 54.00 | -28.50 | Vertical |
| 2390.00 | 28.56 | 27.59 | 5.38 | 36.85 | 24.68 | 54.00 | -29.32 | Vertical |
| 2400.00 | 29.49 | 27.56 | 5.40 | 36.86 | 25.59 | 54.00 | -28.41 | Vertical |

| | |
|-----------------|---------|
| Test Frequency: | 2457MHz |
|-----------------|---------|

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 2483.50 | 33.62 | 27.53 | 5.47 | 36.93 | 29.69 | 74.00 | -44.31 | Horizontal |
| 2500.00 | 33.75 | 27.55 | 5.49 | 36.94 | 29.85 | 74.00 | -44.15 | Horizontal |
| 2483.50 | 33.16 | 27.53 | 5.47 | 36.93 | 29.23 | 74.00 | -44.77 | Vertical |
| 2500.00 | 32.67 | 27.55 | 5.49 | 36.94 | 28.77 | 74.00 | -45.23 | Vertical |


Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 2483.50 | 27.18 | 27.53 | 5.47 | 36.93 | 23.25 | 54.00 | -30.75 | Horizontal |
| 2500.00 | 27.58 | 27.55 | 5.49 | 36.94 | 23.68 | 54.00 | -30.32 | Horizontal |
| 2483.50 | 26.22 | 27.53 | 5.47 | 36.93 | 22.29 | 54.00 | -31.71 | Vertical |
| 2500.00 | 26.06 | 27.55 | 5.49 | 36.94 | 22.16 | 54.00 | -31.84 | Vertical |

Remark:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor*
2. *All of the restriction bands were tested, and only the data of worst case was exhibited.*


7.4 20dB Occupy Bandwidth
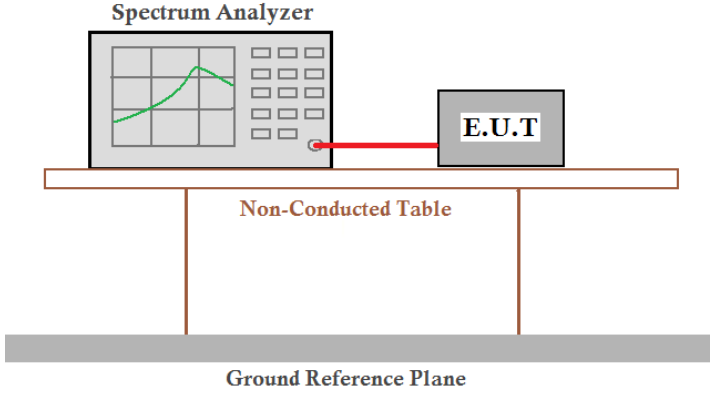
| | |
|-------------------|--|
| Test Requirement: | FCC Part15 C Section 15.249/15.215 |
| Test Method: | ANSI C63.10:2013 |
| Limit: | Operation Frequency range 2400MHz~2483.5MHz |
| Test setup: |  |
| Test Instruments: | Refer to section 6.0 for details |
| Test mode: | Refer to section 5.2 for details |
| Test results: | Pass |

Measurement Data

| Test Frequency: | 20dB bandwidth(MHz) | Result |
|-----------------|---------------------|--------|
| 2457MHz | 1.132 | Pass |



Test plot as follows:

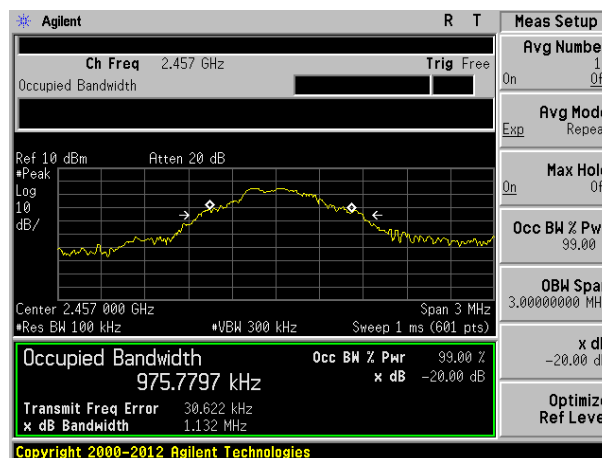

2457MHz

8 Test Setup Photo

Radiated Emission

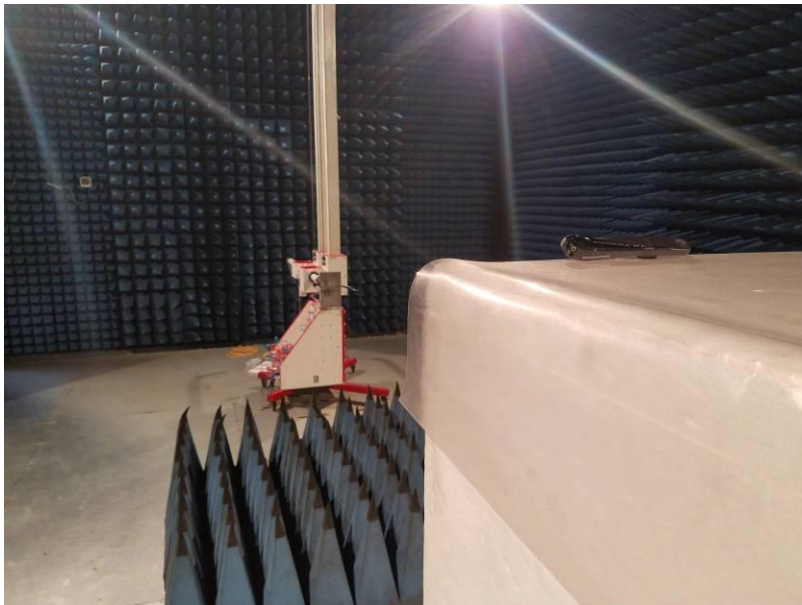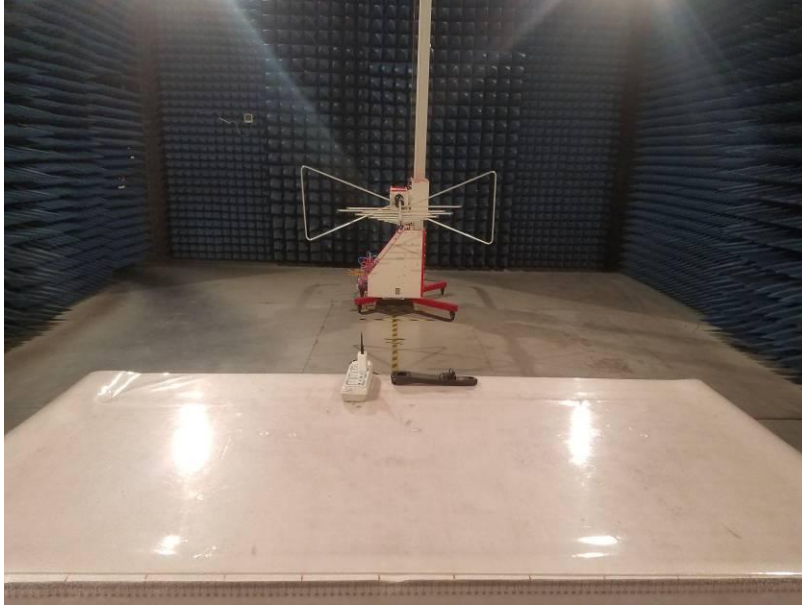

Conducted Emission



9 EUT Constructional Details

Reference to the test report No. : GTS201810000068F01

-----End-----