

# RF MEASUREMENT REPORT

---

**FCC ID:** 2APPT-314  
**Applicant:** Airthings ASA  
**Product:** AT-314  
**Model No.:** 314  
**Brand Name:** Airthings  
**FCC Classification:** FCC Part 15 Spread Spectrum Transmitter (DSS)  
**FCC Rule Part(s):** Part15 Subpart C (Section 15.247)  
**Result:** Complies  
**Received Date:** 2023-07-03  
**Test Date:** 2023-07-04 ~ 2023-07-14

**Reviewed By:**

\_\_\_\_\_  
Sunny Sun

**Approved By:**

\_\_\_\_\_  
Robin Wu



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standards through the calibration of the equipment and evaluated measurement uncertainty herein.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

---

### Revision History

Report No.	Version	Description	Issue Date	Note
2307RSU008-U1	V01	Initial Report	2023-08-09	Valid

## CONTENTS

Description	Page
<b>1. General Information .....</b>	<b>6</b>
1.1. Applicant .....	6
1.2. Manufacturer.....	6
1.3. Testing Facility .....	6
1.4. Product Information.....	7
1.5. Radio Specification under Test .....	7
1.6. Working Frequencies.....	8
<b>2. Test Configuration.....</b>	<b>9</b>
2.1. Test System Connection Diagram .....	9
2.2. Test Software.....	9
2.3. Applied Standards.....	10
2.4. Test Environment Condition.....	10
<b>3. Antenna Requirement .....</b>	<b>11</b>
<b>4. Measuring Instrument .....</b>	<b>12</b>
<b>5. Decision Rules and Measurement Uncertainty .....</b>	<b>13</b>
5.1. Decision Rules .....	13
5.2. Measurement Uncertainty.....	13
<b>6. Test Result.....</b>	<b>14</b>
6.1. Summary.....	14
6.2. 20dB Bandwidth Measurement.....	15
6.2.1. Test Limit.....	15
6.2.2. Test Procedure.....	15
6.2.3. Test Setting .....	15
6.2.4. Test Setup .....	15
6.2.5. Test Result .....	15
6.3. Output Power Measurement.....	16
6.3.1. Test Limit.....	16
6.3.2. Test Procedure.....	16
6.3.3. Test Setting .....	16
6.3.4. Test Setup .....	16
6.3.5. Test Result .....	16
6.4. Carrier Frequency Separation Measurement .....	17
6.4.1. Test Limit.....	17
6.4.2. Test Procedure.....	17
6.4.3. Test Setting .....	17
6.4.4. Test Setup .....	17

---

6.4.5.	Test Result .....	17
6.5.	Number of Hopping Channels Measurement .....	18
6.5.1.	Test Limit .....	18
6.5.2.	Test Procedure .....	18
6.5.3.	Test Settintg .....	18
6.5.4.	Test Setup .....	18
6.5.5.	Test Result .....	18
6.6.	Time of Occupancy Measurement .....	19
6.6.1.	Test Limit .....	19
6.6.2.	Test Procedure .....	19
6.6.3.	Test Settintg .....	19
6.6.4.	Test Setup .....	19
6.6.5.	Test Result .....	19
6.7.	Band-edge Compliance Measurement .....	20
6.7.1.	Test Limit .....	20
6.7.2.	Test Procedure .....	20
6.7.3.	Test Setting .....	20
6.7.4.	Test Setup .....	20
6.7.5.	Test Result .....	20
6.8.	Conducted Spurious Emissions Measurement .....	21
6.8.1.	Test Limit .....	21
6.8.2.	Test Procedure .....	21
6.8.3.	Test Setting .....	21
6.8.4.	Test Setup .....	21
6.8.5.	Test Result .....	22
6.9.	Radiated Spurious Emission Measurement .....	23
6.9.1.	Test Limit .....	23
6.9.2.	Test Procedure .....	23
6.9.3.	Test Setting .....	23
6.9.4.	Test Setup .....	25
6.9.5.	Test Result .....	26
6.10.	Radiated Restricted Band Edge Measurement .....	27
6.10.1.	Test Limit .....	27
6.10.2.	Test Procedure .....	28
6.10.3.	Test Setting .....	28
6.10.4.	Test Setup .....	29
6.10.5.	Test Result .....	29
6.11.	AC Conducted Emissions Measurement .....	30
6.11.1.	Test Limit .....	30

---

---

6.11.2. Test Setup .....	30
6.11.3. Test Result .....	30
<b>Appendix A - Test Result.....</b>	<b>31</b>
A.1 Duty Cycle Test Result.....	31
A.2 20dB Bandwidth Test Result .....	32
A.3 Output Power Test Result .....	33
A.4 Carrier Frequency Separation Test Result.....	34
A.5 Number of Hopping Channels Test Result.....	35
A.6 Time of Occupancy Test Result .....	36
A.7 Band-edge Compliance Test Result.....	37
A.8 Conducted Spurious Emissions Test Result .....	38
A.9 Radiated Spurious Emission Test Result.....	39
A.10 Radiated Restricted Band Edge Test Result.....	42
<b>Appendix B - Test Setup Photograph .....</b>	<b>46</b>
<b>Appendix C - EUT Photograph .....</b>	<b>47</b>



#### 1.4. Product Information

Product	AT-314
Model No.	314
EUT Identification No.	CERT_B9_13 for Conducted measurement CERT_B9_12 for Radiated measurement
Bluetooth Specification	v5.1 Single Mode (BLE)
SmartLink Specification	905.6 ~ 926MHz
Sidewalk Specification	902.2 ~ 915.8MHz
Antenna Information	Refer to 1.5.
Operating Temp.	-30 ~ 60°C
Working Voltage	2x AA batteries giving max 3.6V
Note: The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer.	

#### 1.5. Radio Specification under Test

Frequency Range	902.2 ~ 915.8 MHz
Channel Number	69
Type of modulation	FHSS
Antenna Type	Fixed Internal Antenna
Antenna Gain	-6.1 dBi

### 1.6. Working Frequencies


Channel	Frequency	Channel	Frequency	Channel	Frequency
1	902.2 MHz	2	902.4 MHz	3	902.6 MHz
4	902.8 MHz	5	903.0 MHz	6	903.2 MHz
7	903.4 MHz	8	903.6 MHz	9	903.8 MHz
10	904.0 MHz	11	904.2 MHz	12	904.4 MHz
13	904.6 MHz	14	904.8 MHz	15	905.0 MHz
16	905.2 MHz	17	905.4 MHz	18	905.6 MHz
19	905.8 MHz	20	906.0 MHz	21	906.2 MHz
22	906.4 MHz	23	906.6 MHz	24	906.8 MHz
25	907.0 MHz	26	907.2 MHz	27	907.4 MHz
28	907.6 MHz	29	907.8 MHz	30	908.0 MHz
31	908.2 MHz	32	908.4 MHz	33	908.6 MHz
34	908.8 MHz	35	909.0 MHz	36	909.2 MHz
37	909.4 MHz	38	909.6 MHz	39	909.8 MHz
40	910.0 MHz	41	910.2 MHz	42	910.4 MHz
43	910.6 MHz	44	910.8 MHz	45	911.0 MHz
46	911.2 MHz	47	911.4 MHz	48	911.6 MHz
49	911.8 MHz	50	912.0 MHz	51	912.2 MHz
52	912.4 MHz	53	912.6 MHz	54	912.8 MHz
55	913.0 MHz	56	913.2 MHz	57	913.4 MHz
58	913.6 MHz	59	913.8 MHz	60	914.0 MHz
61	914.2 MHz	62	914.4 MHz	63	914.6 MHz
64	914.8 MHz	65	915.0 MHz	66	915.2 MHz
67	915.4 MHz	68	915.6 MHz	69	915.8 MHz



## 2. Test Configuration

### 2.1. Test System Connection Diagram

The device was tested per the guidance ANSI C63.10: 2013 was used to reference the appropriate EUT setup for radiated emissions testing.

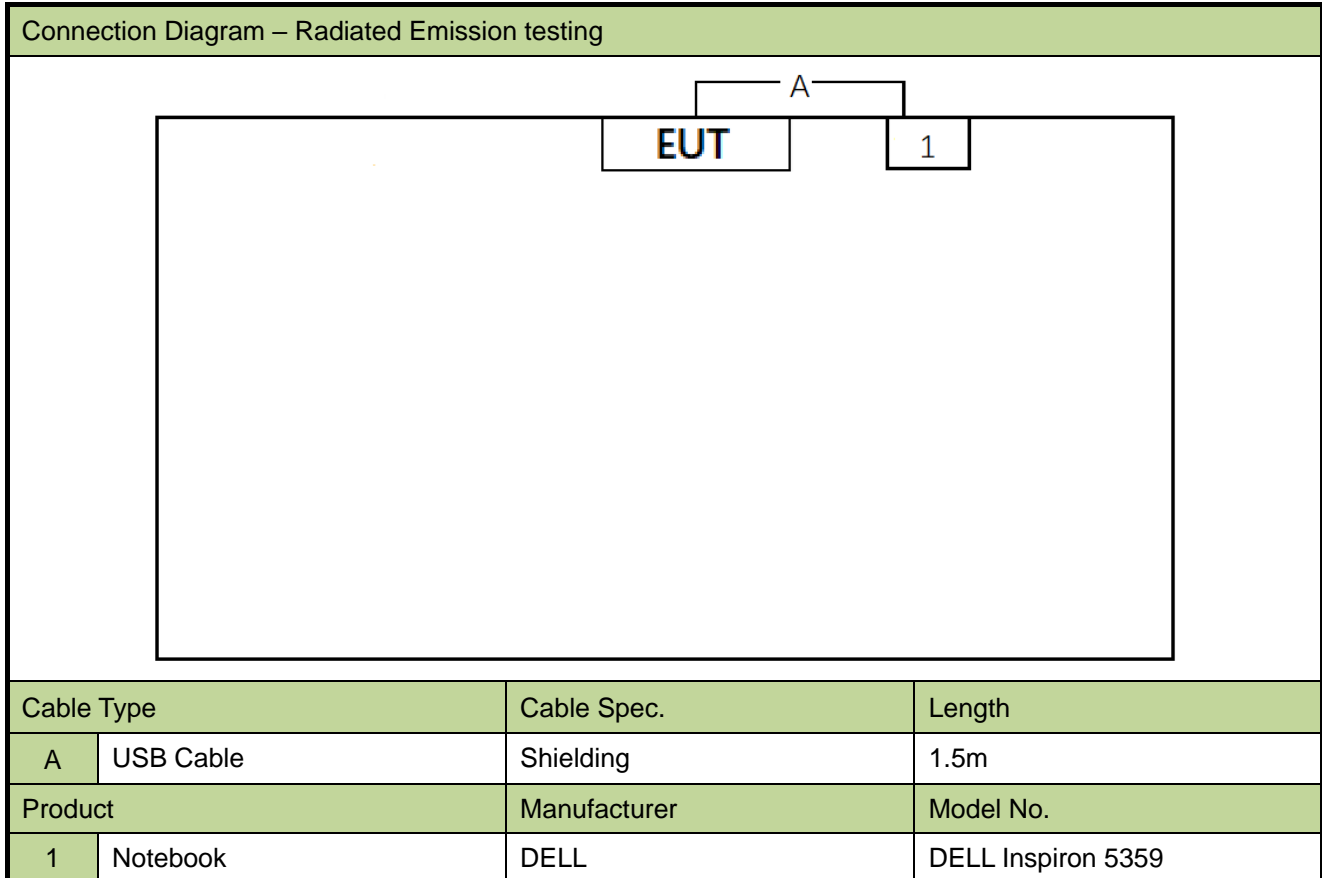

### 2.2. Test Software

The test utility software used during testing was “IPOP”, and the version was 4.1.

### 2.3. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15.247
- KDB 558074 D01v05r02
- ANSI C63.10-2013

### 2.4. Test Environment Condition

Ambient Temperature	15 ~ 35 °C
Relative Humidity	20 ~ 75 %RH

### 3. Antenna Requirement

**Excerpt from §15.203 of the FCC Rules/Regulations:**

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the device is **permanently attached**.

**Conclusion:**

The unit complies with the requirement of §15.203.

#### 4. Measuring Instrument

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2023-12-28	WZ-AC1
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06023	1 year	2023-08-22	WZ-AC1
Preamplifier	Agilent	83017A	MRTSUE06076	1 year	2024-05-07	WZ-AC1
TRILOG Antenna	Schwarzbeck	VULB 9168	MRTSUE06172	1 year	2024-06-09	WZ-AC1
Anechoic Chamber	TDK	WZ-AC1	MRTSUE06212	1 year	2024-04-20	WZ-AC1
Thermohygrometer	testo	608-H1	MRTSUE06403	1 year	2024-05-31	WZ-AC1
Signal Analyzer	Keysight	N9010B	MRTSUE06607	1 year	2023-12-28	WZ-AC1
Thermohygrometer	testo	608-H1	MRTSUE11039	1 year	2023-11-01	WZ-AC1
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2023-09-29	WZ-AC1
Signal Analyzer	Keysight	N9010B	MRTSUE06457	1 year	2024-05-23	WZ-SR5
Thermohygrometer	testo	608-H1	MRTSUE06402	1 year	2024-05-31	WZ-SR5
Shielding Room	HUAMING	WZ-SR5	MRTSUE06442	N/A	N/A	WZ-SR5
Attenuator	MVE	MVE2213	MRTSUE11093	1 year	2024-06-08	WZ-SR5
Signal Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2024-02-29	WZ-SR5

Software	Version	Function
EMI Software	V3.0.0	EMI Test Software
Controller_MF 7802	2.03C	RE Antenna & Turntable

## 5. Decision Rules and Measurement Uncertainty

### 5.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4: 2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

### 5.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .

<b>AC Conducted Emission Measurement</b>
The maximum measurement uncertainty is evaluated as: 9kHz~150kHz: 3.58dB 150kHz~30MHz: 3.20dB
<b>Radiated Disturbance</b>
The maximum measurement uncertainty is evaluated as: Coaxial: 9kHz~30MHz: 2.59dB Coplanar: 9kHz~30MHz: 2.60dB Horizontal: 30MHz~200MHz: 3.85dB 200MHz~1GHz: 4.36dB 1GHz~10GHz: 4.98dB Vertical: 30MHz~200MHz: 4.06dB 200MHz~1GHz: 5.28dB 1GHz~10GHz: 4.91dB
<b>Spurious Emissions, Conducted</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 2.30dB
<b>Output Power</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 2.30dB
<b>Occupied Bandwidth</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 3.20%

## 6. Test Result

### 6.1. Summary

FCC Section(s)	Test Description	Test Condition	Verdict
15.247(a)(1)(i)	20dB Bandwidth	Conducted	Pass
15.247(b)(2)	Peak Transmitter Output Power		Pass
15.247(a)(1)	Channel Separation		Pass
15.247(a)(1)(i)	Number of Channels		Pass
15.247(a)(1)(i)	Time of Occupancy		Pass
15.247(d)	Band Edge / Out- of-Band Emissions		Pass
15.205, 15.209	General Field Strength (Restricted Bands and Radiated Emission)	Radiated	Pass
15.207	AC Conducted Emissions 150kHz - 30MHz	Line Conducted	N/A

#### Notes:

- The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.
- “N/A” means that this item is not applicable, and the detail information refer to relevant section.

## 6.2. 20dB Bandwidth Measurement

### 6.2.1. Test Limit

The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.


### 6.2.2. Test Procedure

ANSI C63.10-2013 - Section 6.9.2 (20dB Bandwidth)

### 6.2.3. Test Setting

1. Set RBW = 1% to 5% of the 20dB bandwidth
2. VBW = approximately three times RBW
3. Span = approximately 2 to 5 times the 20dB bandwidth, centered on a hopping channel
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace to stabilize
8. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

### 6.2.4. Test Setup

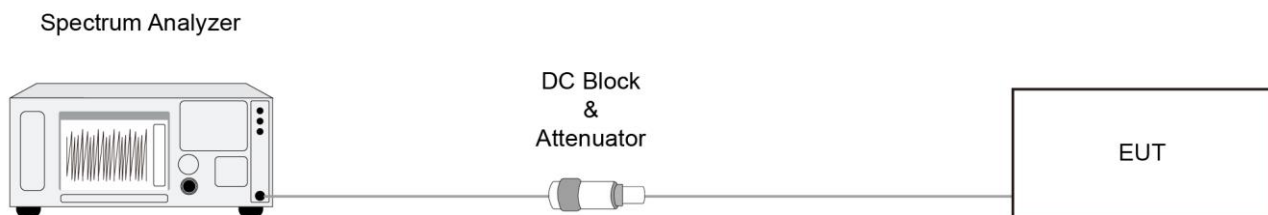

### 6.2.5. Test Result

Refer to Appendix A.2.

### 6.3. Output Power Measurement

#### 6.3.1. Test Limit

For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels


#### 6.3.2. Test Procedure

ANSI C63.10-2013 - Section 7.8.5

#### 6.3.3. Test Setting

1. Set RBW  $\geq$  the 20 dB bandwidth of the emission being measured.
2. VBW  $\geq$  RBW
3. Span = approximately five times the 20dB bandwidth, centered on a hopping channel
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace to stabilize, Use the marker-to-peak function to set the marker to the peak of the emission.  
The indicated level is the peak output power (don't forget added the external attenuation and cable loss)

#### 6.3.4. Test Setup

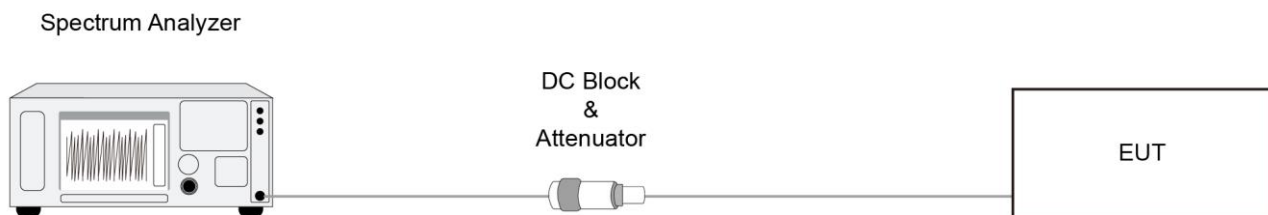

#### 6.3.5. Test Result

Refer to Appendix A.3.



## 6.4. Carrier Frequency Separation Measurement

### 6.4.1. Test Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


### 6.4.2. Test Procedure

ANSI C63.10-2013 - Section 7.8.2.

#### 6.4.3. Test Setting

1. Span = wide enough to capture the peaks of two adjacent channels.
2. Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
3.  $VBW \geq RBW$
4. Sweep time = Auto couple
5. Detector = Peak
6. Trace mode = Max hold
7. Allowed the trace to stabilize
8. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

#### 6.4.4. Test Setup

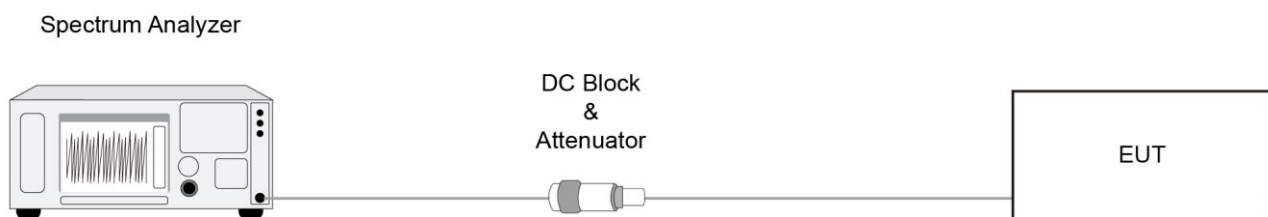

#### 6.4.5. Test Result

Refer to Appendix A.4.

## 6.5. Number of Hopping Channels Measurement

### 6.5.1. Test Limit

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies.


### 6.5.2. Test Procedure

ANSI C63.10-2013 - Section 7.8.3.

### 6.5.3. Test Setting

1. Span = the frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
2. To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
3. VBW  $\geq$  RBW
4. Sweep time = Auto couple
5. Detector = Peak
6. Trace mode = Max hold
7. Allow the trace to stabilize

### 6.5.4. Test Setup

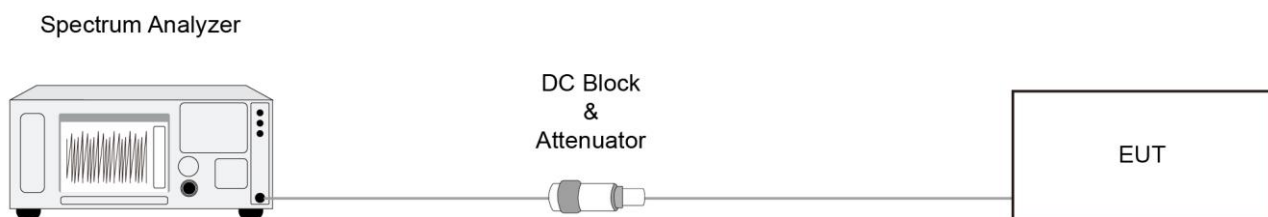

### 6.5.5. Test Result

Refer to Appendix A.5.

## 6.6. Time of Occupancy Measurement

### 6.6.1. Test Limit

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period.


### 6.6.2. Test Procedure

ANSI C63.10-2013 - Section 7.8.4.

### 6.6.3. Test Setting

1. Span = zero span, centered on a hopping channel.
2. RBW shall be  $\leq$  channel spacing and where possible RBW should be set  $\gg 1 / T$ , where T is the expected dwell time per channel.
3. VBW  $\geq$  RBW
4. Sweep time = as necessary to capture the entire dwell time per hopping channel
5. Detector = Peak
6. Trace mode = max hold
7. Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time. An oscilloscope may be used instead of a spectrum analyzer. The EUT shall show compliance with the appropriate regulatory limit for the number of hopping channels. A plot of the data shall be included in the test report.

### 6.6.4. Test Setup

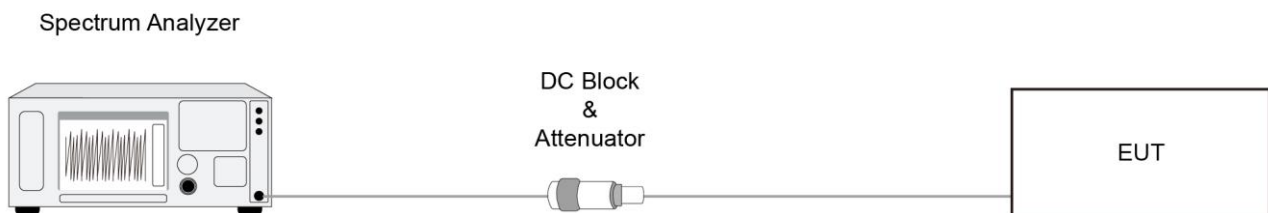

### 6.6.5. Test Result

Refer to Appendix A.6.

## 6.7. Band-edge Compliance Measurement

### 6.7.1. Test Limit

The maximum permissible emission level is 20dBc. Any emissions were lying outside of the emission bandwidth and in authorized band edges to a field strength limit specified in Section 15.209 of the Title 47 CFR.


### 6.7.2. Test Procedure

ANSI C63.10-2013 - Section 6.10.4.

### 6.7.3. Test Setting

1. Span = wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation.
2. RBW = 100kHz
3. VBW = 300kHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize
8. Allow the trace to stabilize. Set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission.

### 6.7.4. Test Setup

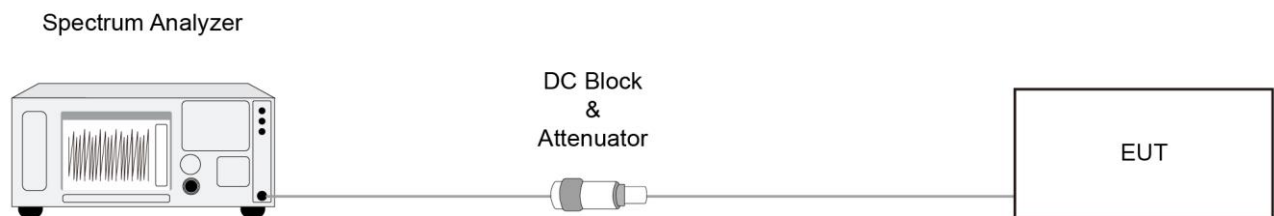

### 6.7.5. Test Result

Refer to Appendix A.7.

## 6.8. Conducted Spurious Emissions Measurement

### 6.8.1. Test Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.


### 6.8.2. Test Procedure

ANSI C63.10-2013 - Section 7.8.8.

### 6.8.3. Test Setting

1. Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
2. RBW = 100kHz
3. VBW = 300kHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize
8. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this section.

### 6.8.4. Test Setup

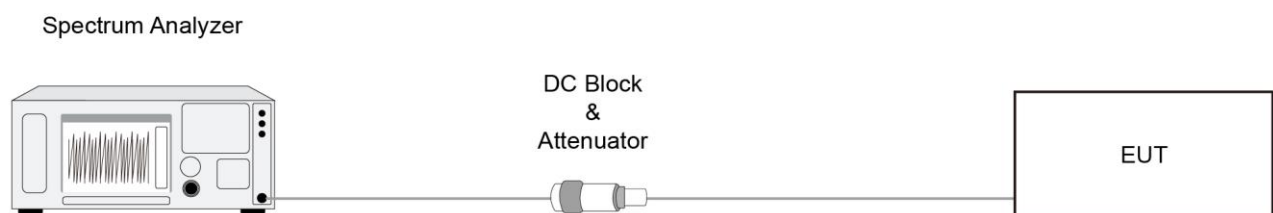

### **6.8.5. Test Result**

Refer to Appendix A.8.

## 6.9. Radiated Spurious Emission Measurement

### 6.9.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

### 6.9.2. Test Procedure

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

### 6.9.3. Test Setting

**Table 1 - RBW as a function of frequency**

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

**Quasi-Peak Measurements below 1GHz**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

**Peak Measurements above 1GHz**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize


**Average Measurements above 1GHz (Method VB)**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle  $\geq 98\%$ , set VBW = 10 Hz.  
If the EUT duty cycle is  $< 98\%$ , set VBW  $\geq 1/T$ . T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize




### 6.9.4. Test Setup


Below 30MHz Test Setup:

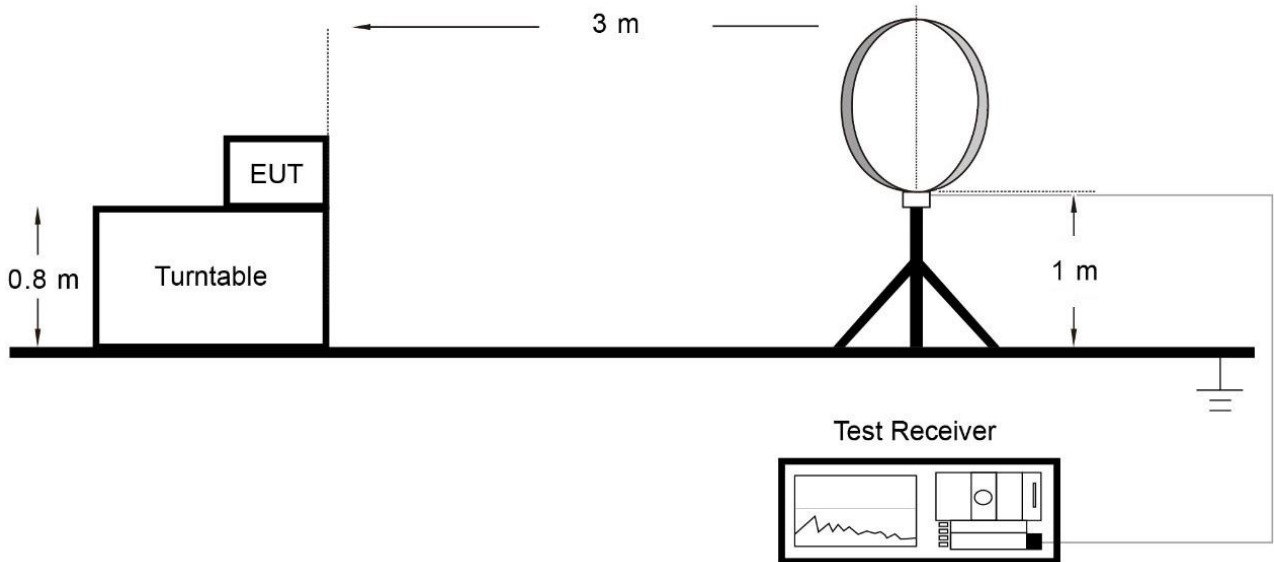

Below 1GHz Test Setup:

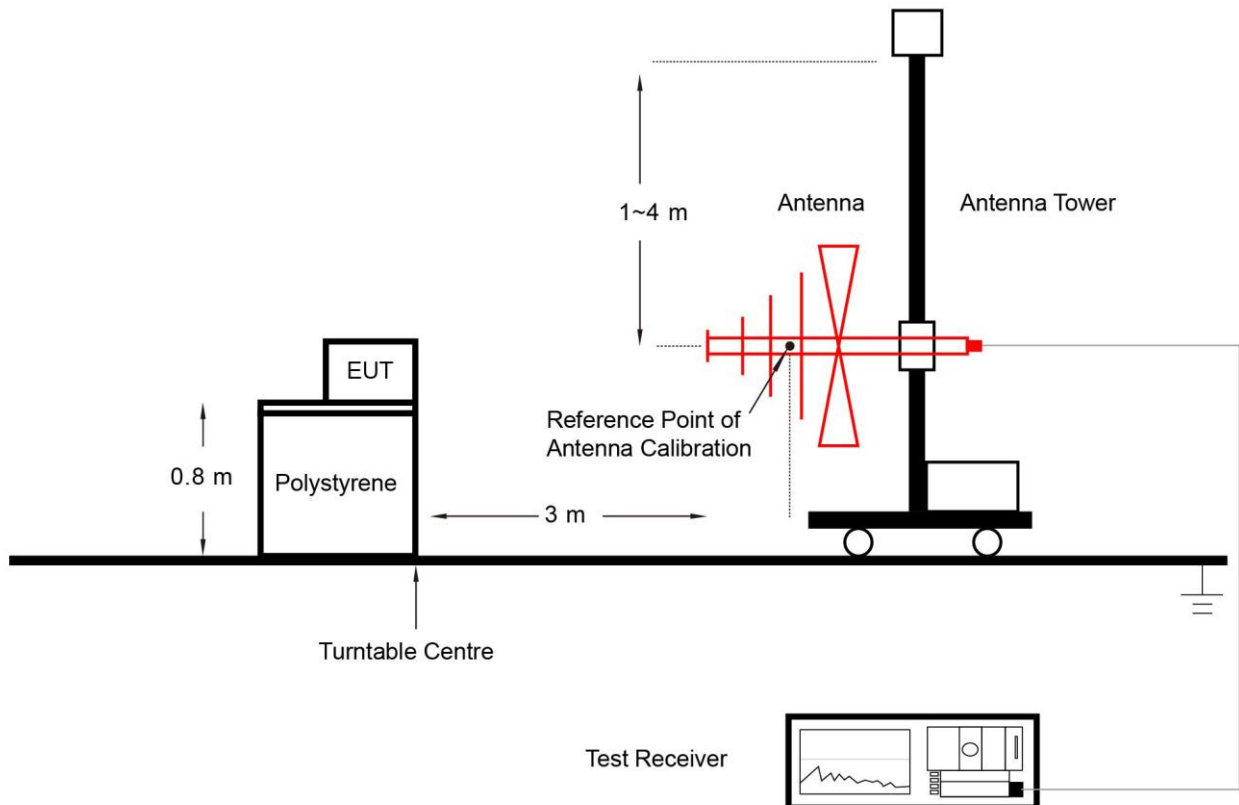

Above 1GHz Test Setup:

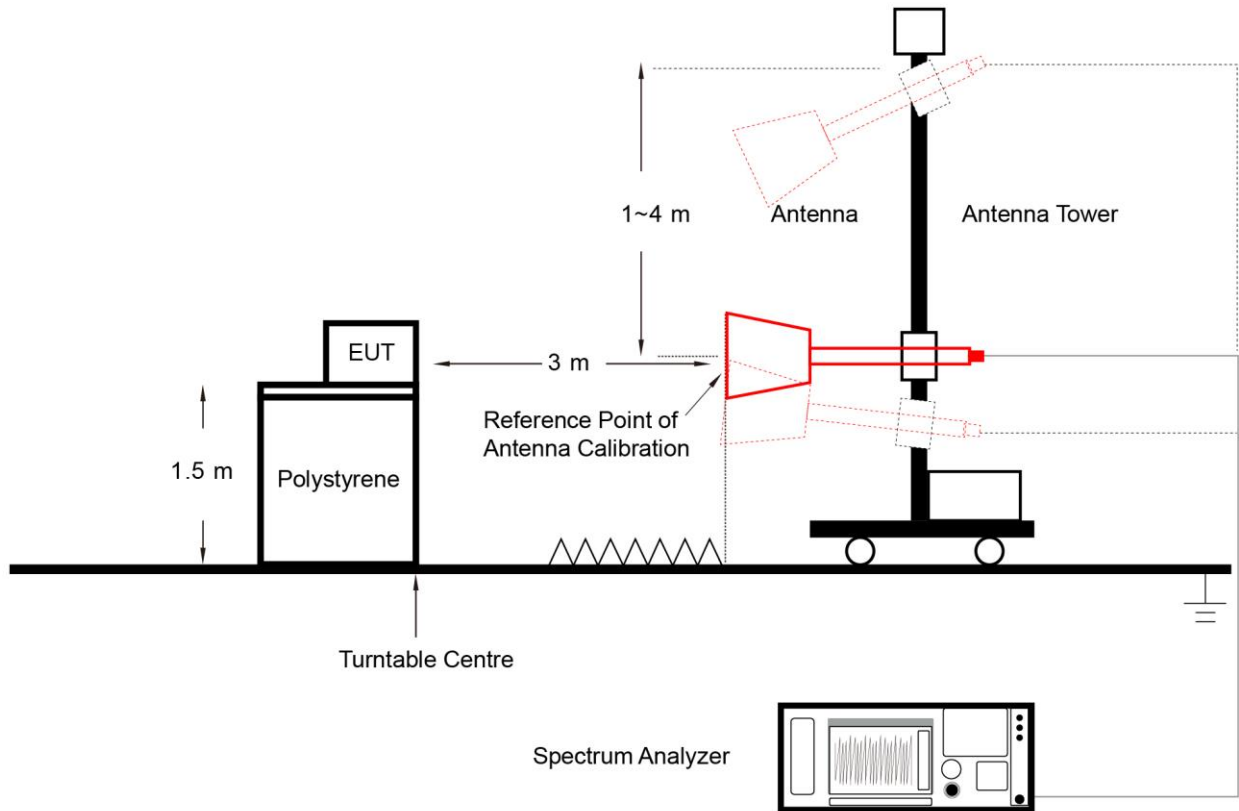

**6.9.5. Test Result**

Refer to Appendix A.9.

## 6.10. Radiated Restricted Band Edge Measurement

### 6.10.1. Test Limit

#### For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

**6.10.2. Test Procedure**

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

**6.10.3. Test Setting**


**Peak Field Strength Measurements**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

### Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle  $\geq 98\%$ , set VBW = 10 Hz.  
If the EUT duty cycle is  $< 98\%$ , set VBW  $\geq 1/T$ . T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

#### 6.10.4. Test Setup

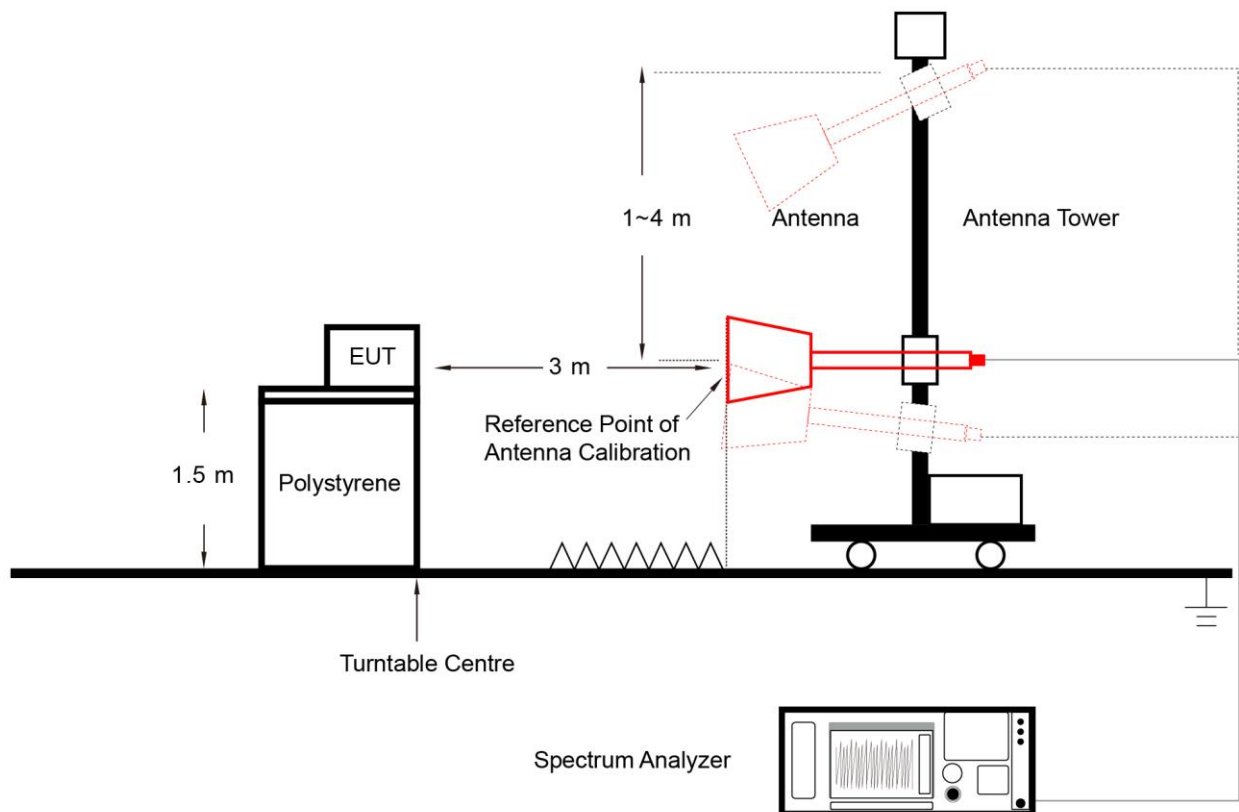

#### 6.10.5. Test Result

Refer to Appendix A.10.

## 6.11. AC Conducted Emissions Measurement


### 6.11.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dB $\mu$ V)	Average (dB $\mu$ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

### 6.11.2. Test Setup

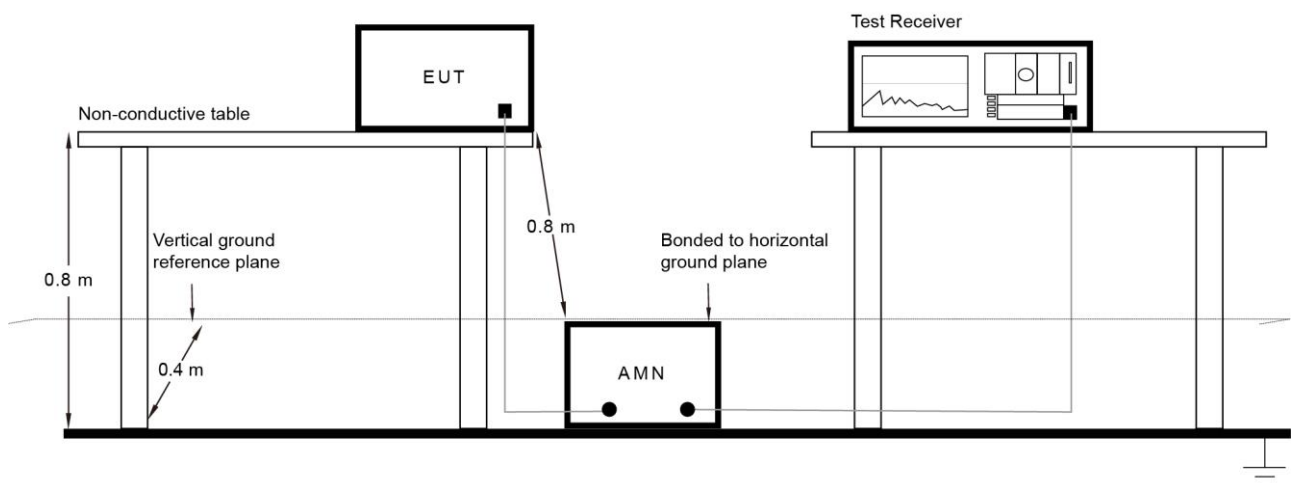

### 6.11.3. Test Result

The Device powered by battery, so this item was not applicable.

## Appendix A - Test Result

### A.1 Duty Cycle Test Result


Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2023-07-06		

Duty Cycle	
902.2MHz	100.0%
902.2MHz	
<p>The screenshot shows a Keysight Spectrum Analyzer interface. The main display shows a single spectral line at 902.2 MHz. The marker 'Mkr1' is set to 5.000 ms and 11.77 dBm. The center frequency is 902.200000 MHz, and the span is 0 Hz. The resolution bandwidth is 50 MHz. The interface includes various control panels for settings, span, and tuning.</p>	

### A.2 20dB Bandwidth Test Result

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2023-07-05		

Channel No.	Frequency (MHz)	20dB Bandwidth (kHz)	Limit (kHz)
01	902.2	97.41	≤ 500
35	909.0	97.79	≤ 500
69	915.8	98.30	≤ 500

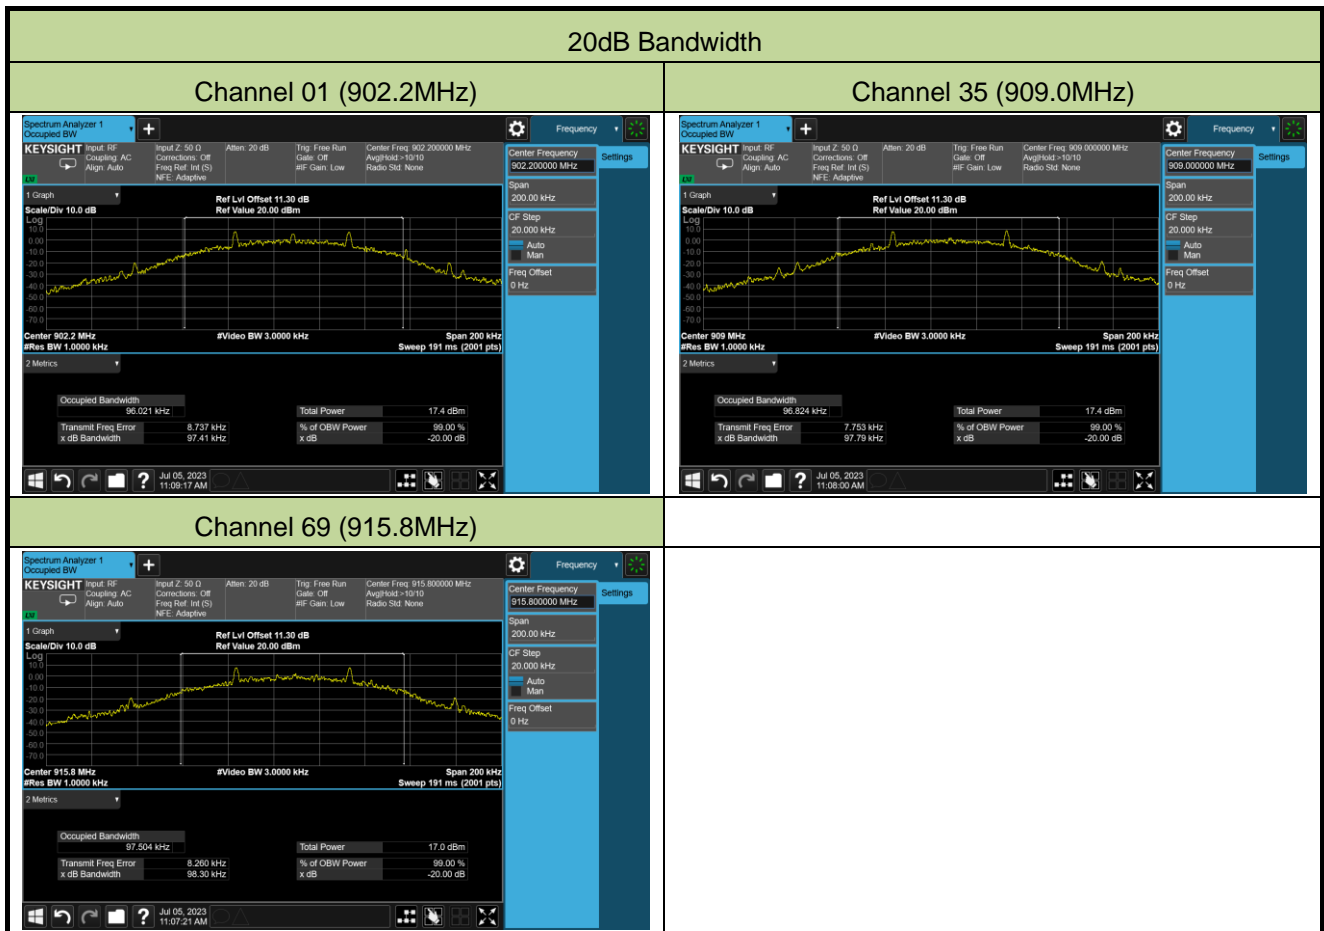




### A.3 Output Power Test Result

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2023-07-05		

Channel No.	Frequency (MHz)	Output Power (dBm)	Power Limit (dBm)
01	902.2	11.77	≤ 30.00
35	909.0	11.94	≤ 30.00
69	915.8	11.74	≤ 30.00

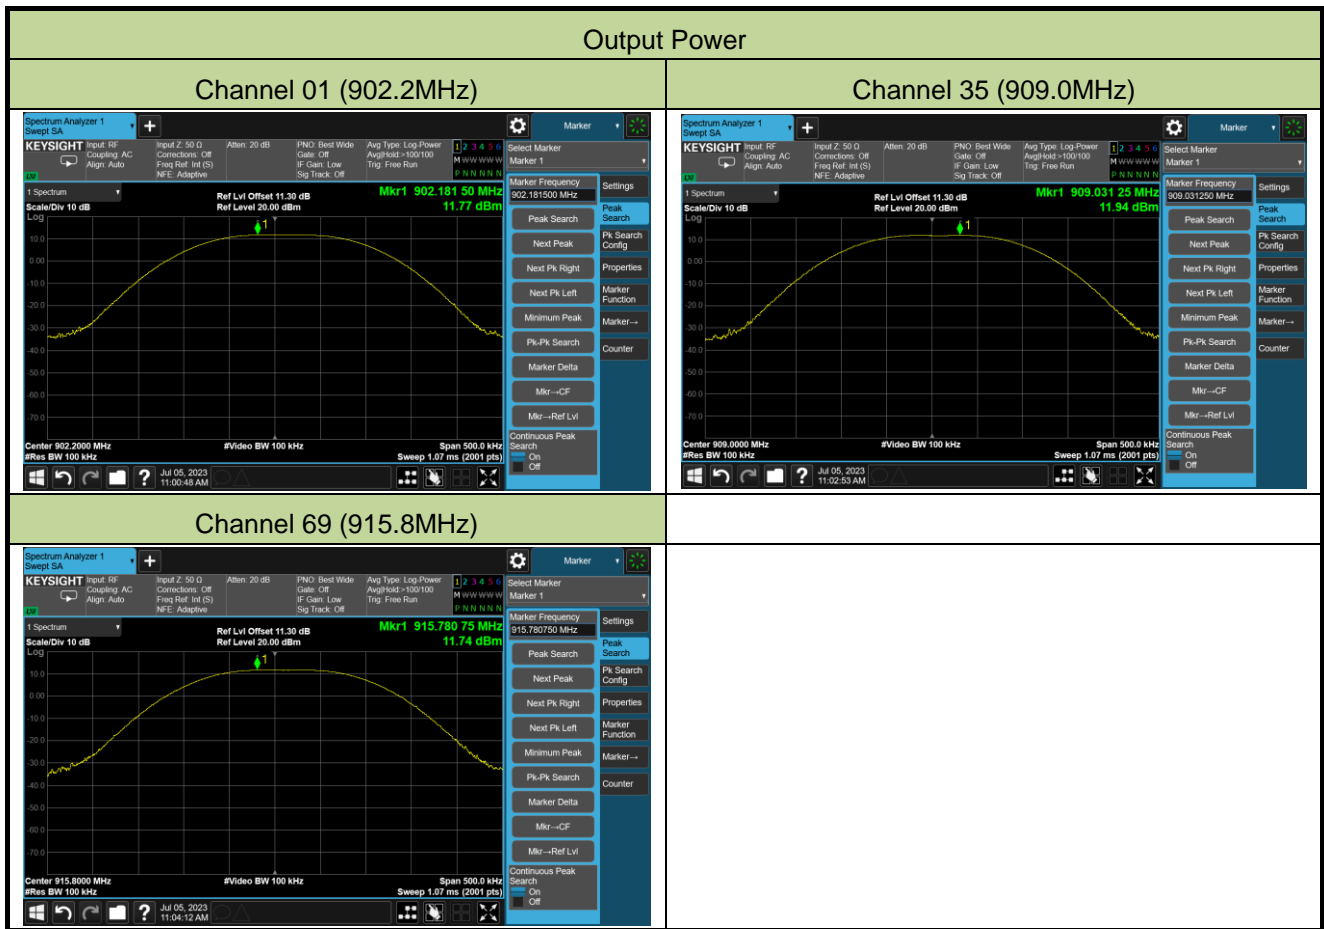


### A.4 Carrier Frequency Separation Test Result

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2023-07-04		

Channel No.	Frequency (MHz)	Carrier Frequency Separation (kHz)	Limit (kHz)	Result
01	902.2	200	≥ 97.41	Pass
35	909.0	200	≥ 97.79	Pass
69	915.8	200	≥ 98.30	Pass


Note: The Limit is the value of the 20dB BW.

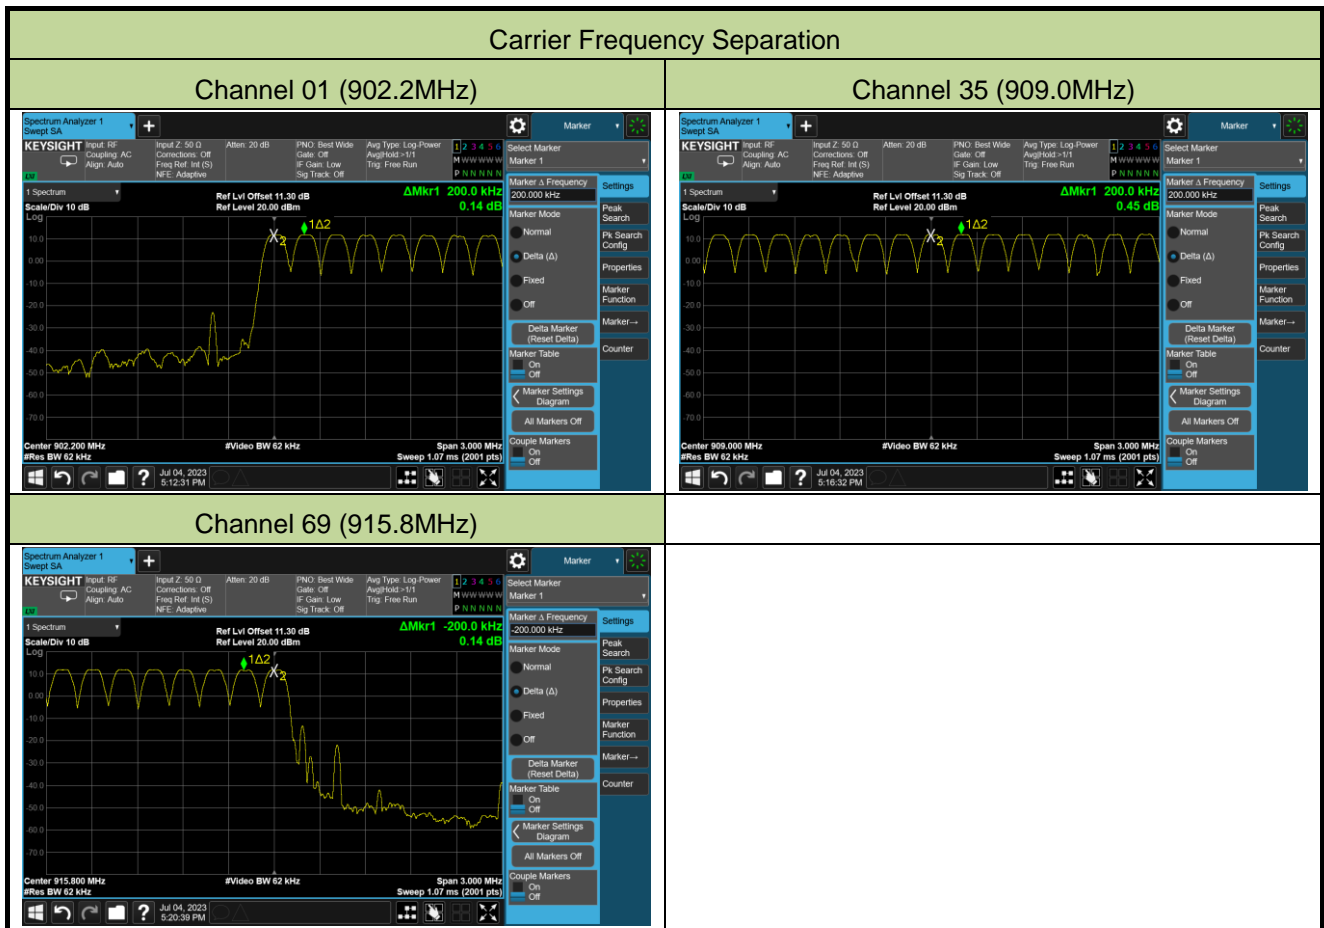

**A.5 Number of Hopping Channels Test Result**

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2023-07-04		

Channel Numbers	Frequency (MHz)	Limit (Hopping Channels)	Result
69	902.2~915.8	≥ 50	Pass

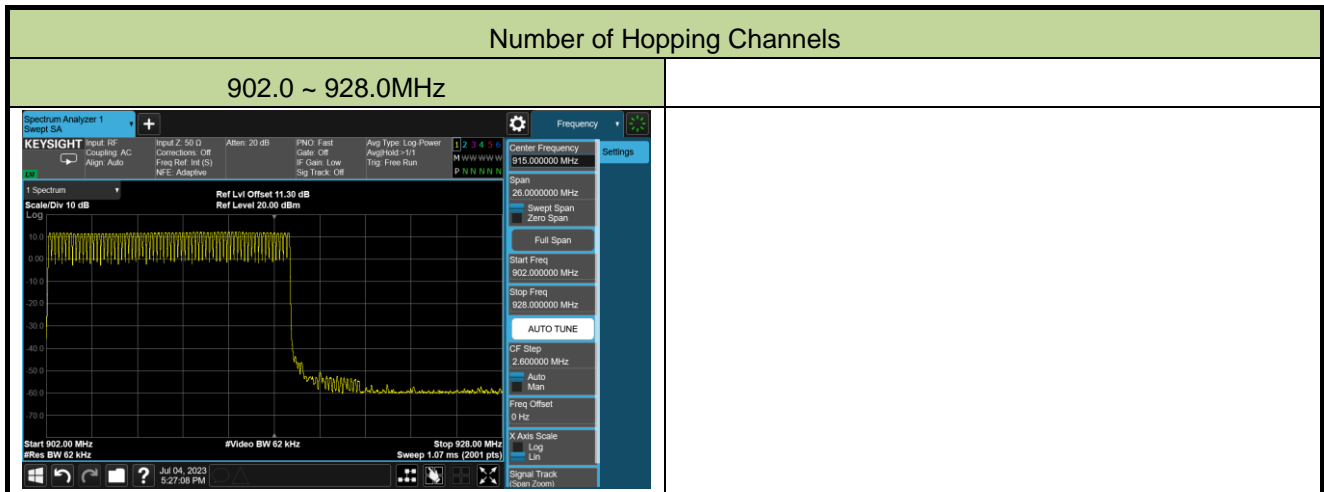


### A.6 Time of Occupancy Test Result

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2023-07-04		

Channel No.	Frequency (MHz)	Transmit Time Per Hop (ms)	Observation Period (s)	Number of Hops in Observation Period	Time of Occupancy (ms)	Limit (ms)	Result
01~69	902.2~915.8	10.13	20	2	20.26	≤ 400	Pass



Note: Time of Occupancy (ms) = Transmit Time Per Hop (ms) \* Number of Hops in Observation Period

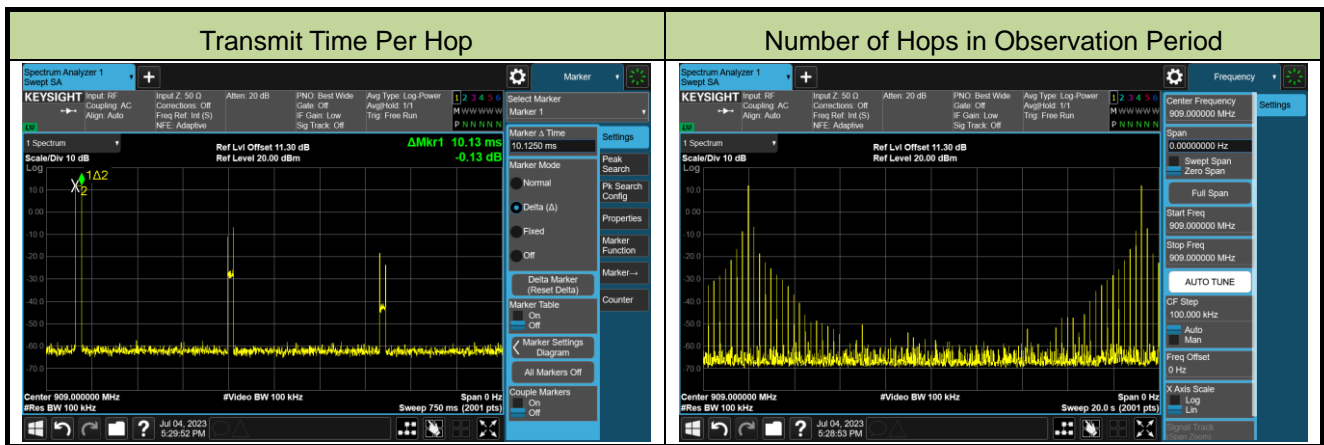

### A.7 Band-edge Compliance Test Result

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2023-07-04~2023-07-05		


Channel No.	Frequency (MHz)	Limit	Result
01	902.2	20dBc	Pass
69	915.8	20dBc	Pass

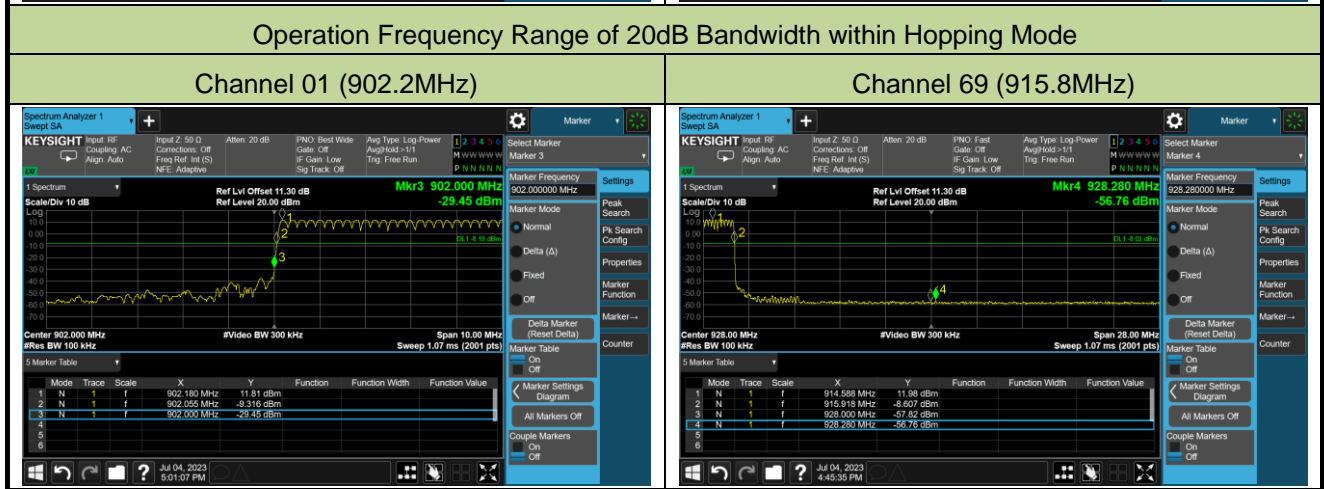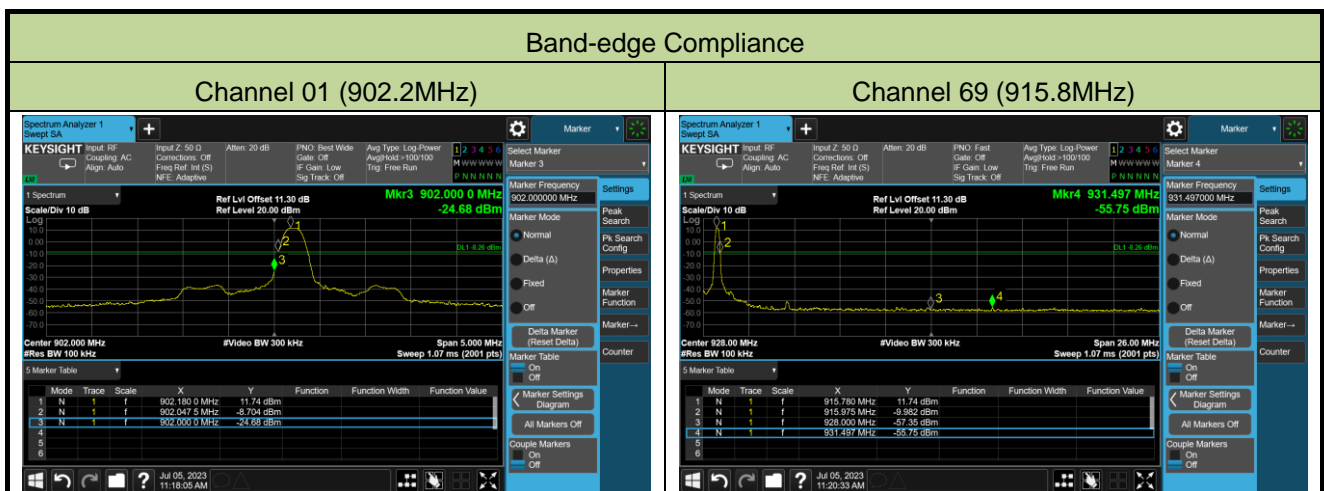

**A.8 Conducted Spurious Emissions Test Result**

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2023-07-05		

Channel No.	Frequency (MHz)	Limit (MHz)	Result
01	902.2	20dBc	Pass
35	909.0	20dBc	Pass
69	915.8	20dBc	Pass

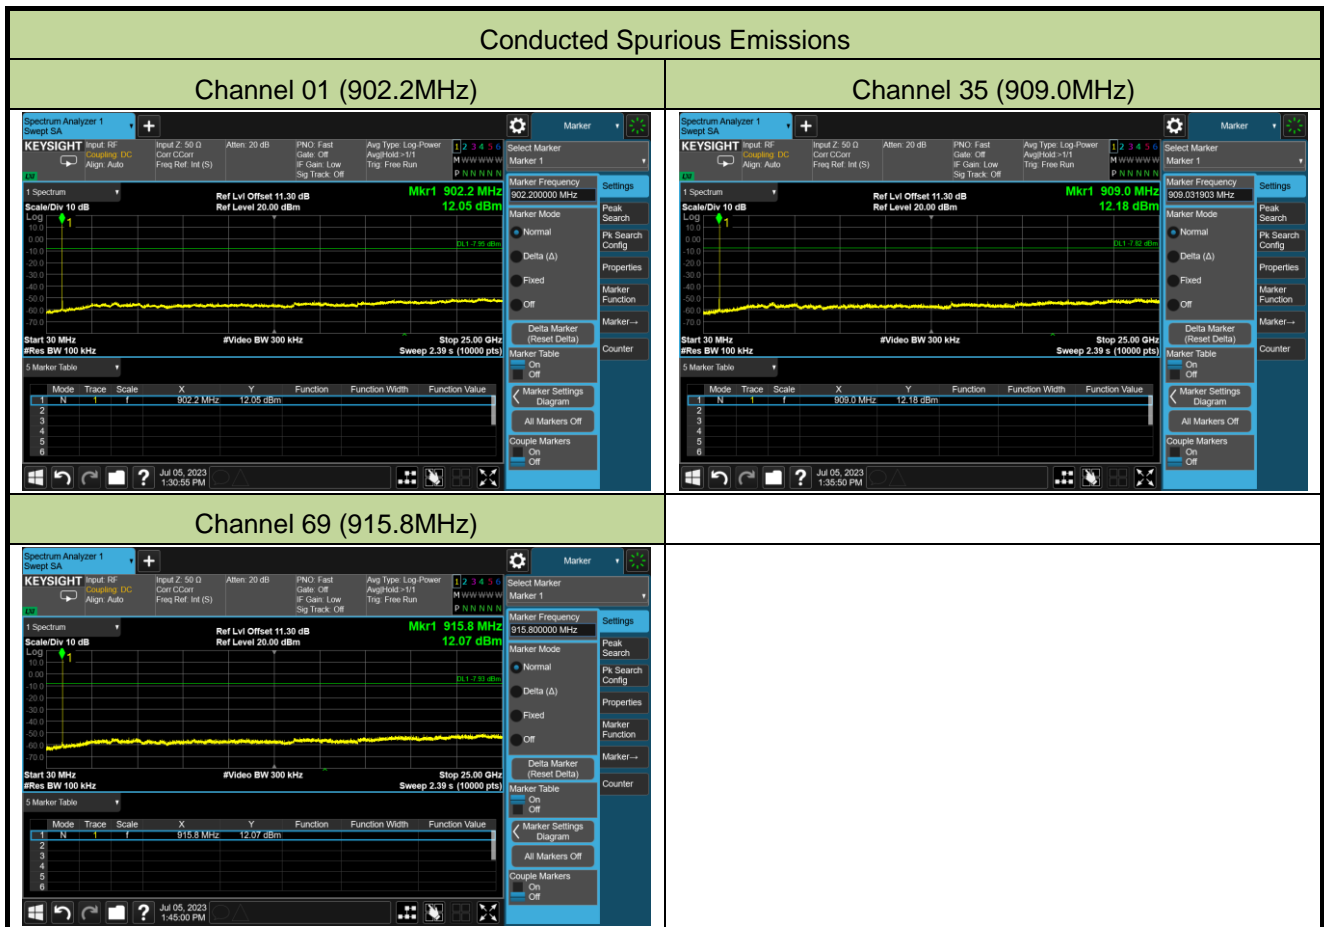

**A.9 Radiated Spurious Emission Test Result**

Test Site	WZ-AC1	Test Engineer	Zach Xu
Test Date	2023-07-10~2023-07-14		
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-10GHz, there is not show in the report.		


Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	2708.5	44.1	-2.4	41.7	74.0	-32.3	Peak	Horizontal
	7604.5	36.9	8.2	45.1	74.0	-28.9	Peak	Horizontal
	10970.5	35.8	13.5	49.3	74.0	-24.7	Peak	Horizontal
	4136.5	37.3	1.2	38.5	74.0	-35.5	Peak	Vertical
	8378.0	36.9	8.8	45.7	74.0	-28.3	Peak	Vertical
	11531.5	35.8	12.8	48.6	74.0	-25.4	Peak	Vertical
35	2708.5	44.4	-2.4	42.0	74.0	-32.0	Peak	Horizontal
	8174.0	35.7	8.8	44.5	74.0	-29.5	Peak	Horizontal
	11480.5	36.3	13.0	49.3	74.0	-24.7	Peak	Horizontal
	4808.0	36.1	3.0	39.1	74.0	-34.9	Peak	Vertical
	7604.5	35.6	8.2	43.8	74.0	-30.2	Peak	Vertical
	11540.0	37.2	12.8	50.0	74.0	-24.0	Peak	Vertical
69	2751.0	44.3	-2.3	42.0	74.0	-32.0	Peak	Horizontal
	7485.5	37.3	8.5	45.8	74.0	-28.2	Peak	Horizontal
	11548.5	36.1	12.8	48.9	74.0	-25.1	Peak	Horizontal
	2751.0	41.0	-2.3	38.7	74.0	-35.3	Peak	Vertical
	8182.5	34.5	8.7	43.2	74.0	-30.8	Peak	Vertical
	11540.0	37.2	12.8	50.0	74.0	-24.0	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor ((dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

**The Result of Radiated Emission below 1GHz (Worst Case):**

Site: WZ-AC1	Test Date: 2023-07-14
Limit: FCC_Part15.209_RE(3m)	Engineer: Zach Xu
Probe: VULB 9168_25-2000MHz	Polarity: Horizontal
EUT: AT-314	Power: By Battery
<b>Test Mode:</b> Transmit at 909MHz	

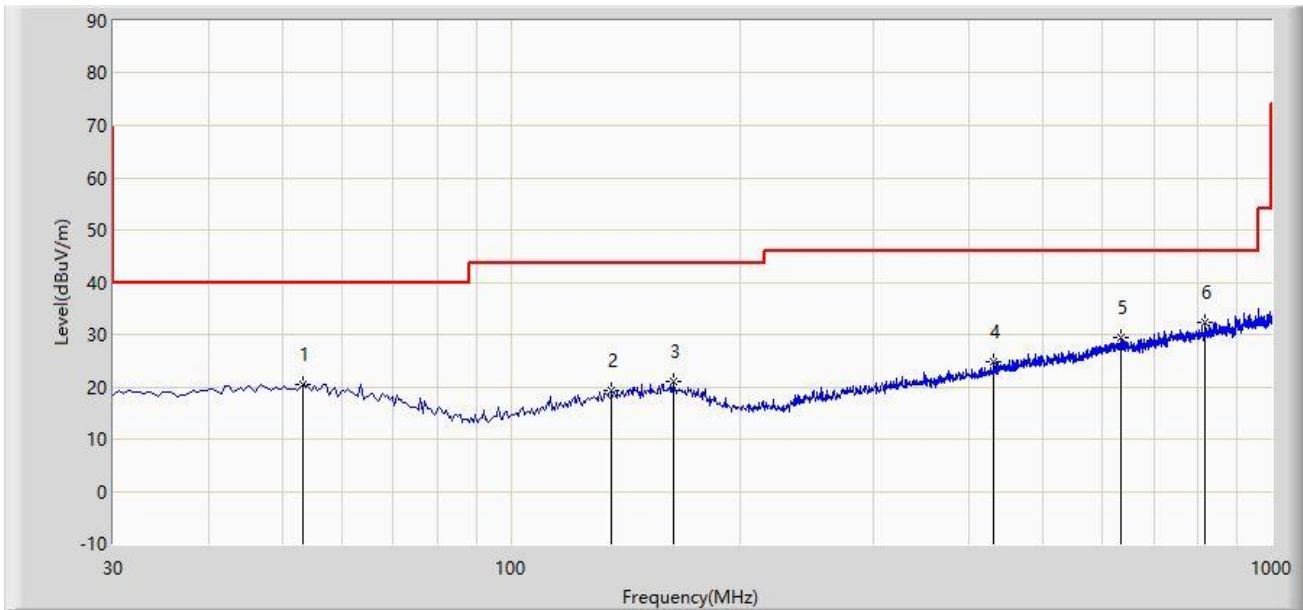

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		53.280	20.324	1.795	-19.676	40.000	18.530	PK
2		135.730	19.392	2.034	-24.108	43.500	17.358	PK
3		163.375	20.994	2.811	-22.506	43.500	18.183	PK
4		431.580	24.701	2.756	-21.299	46.000	21.944	PK
5		635.280	29.406	3.374	-16.594	46.000	26.032	PK
6	*	819.095	32.225	3.487	-13.775	46.000	28.737	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).


Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Note 5: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.



Site: WZ-AC1	Test Date: 2023-07-14
Limit: FCC_Part15.209_RE(3m)	Engineer: Zach Xu
Probe: VULB 9168_25-2000MHz	Polarity: Vertical
EUT: AT-314	Power: By Battery
Test Mode: Transmit at 909MHz	

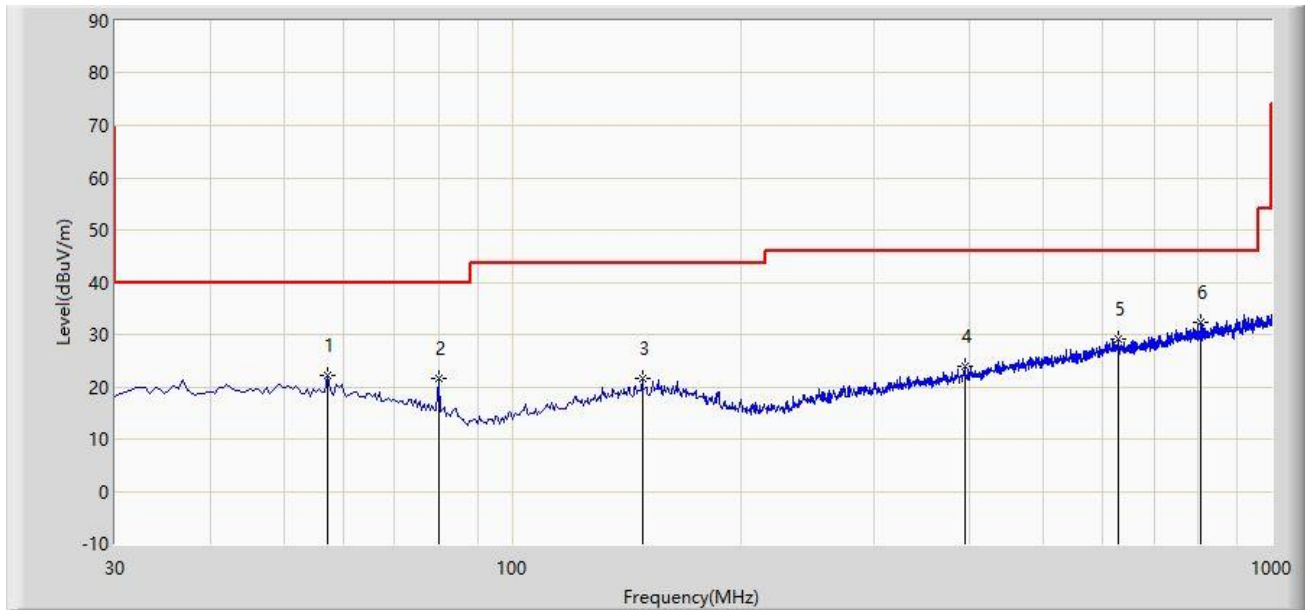

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		57.160	22.236	3.985	-17.764	40.000	18.251	PK
2		79.955	21.667	7.390	-18.333	40.000	14.276	PK
3		148.340	21.673	3.619	-21.827	43.500	18.055	PK
4		394.720	23.810	2.965	-22.190	46.000	20.845	PK
5		628.005	29.056	3.062	-16.944	46.000	25.994	PK
6	*	806.970	32.459	4.032	-13.541	46.000	28.427	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).


Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Note 5: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

**A.10 Radiated Restricted Band Edge Test Result**

Site: WZ-AC1	Test Date: 2023-07-14
Limit: FCC_Part15.209_RE(3m)	Engineer: Zach Xu
Probe: VULB 9168_25-2000MHz	Polarity: Horizontal
EUT: AT-314	Power: By Battery
Test Mode: Transmit at 902.2MHz	

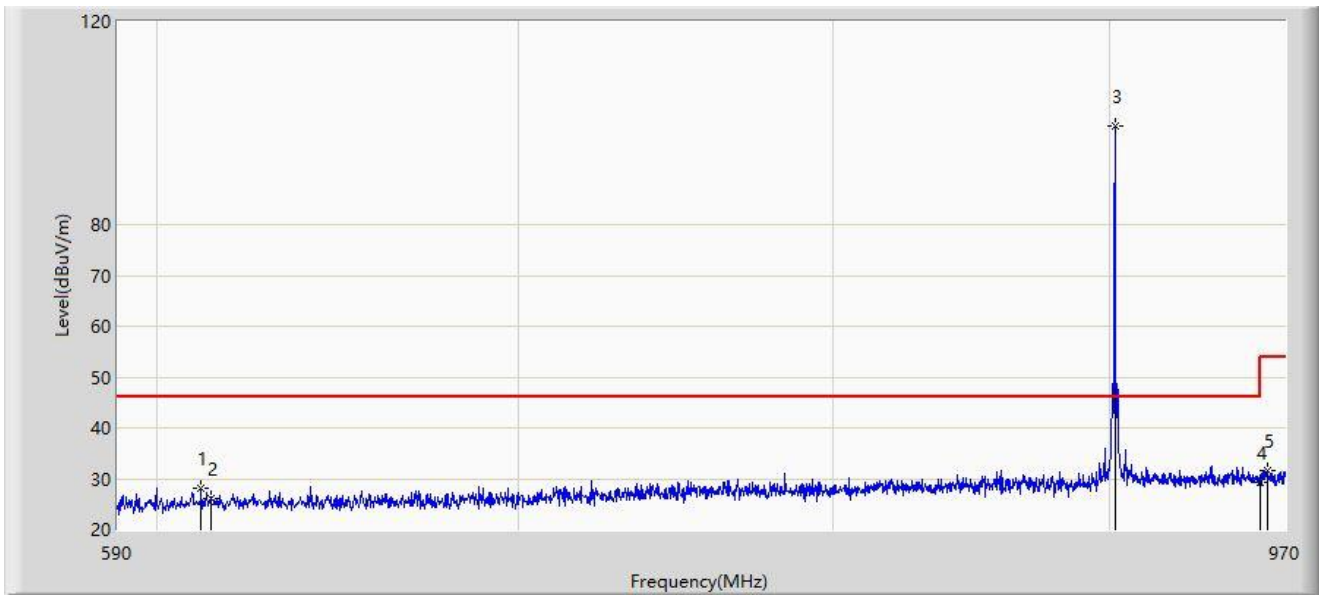


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		611.470	28.039	2.012	-17.961	46.000	26.027	PK
2		614.000	26.085	0.012	-19.915	46.000	26.073	PK
3		902.170	99.340	69.920	N/A	N/A	29.420	PK
4	*	960.000	29.259	-0.905	-16.741	46.000	30.165	PK
5		962.970	31.695	1.550	-22.305	54.000	30.145	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-07-14
Limit: FCC_Part15.209_RE(3m)	Engineer: Zach Xu
Probe: VULB 9168_25-2000MHz	Polarity: Vertical
EUT: AT-314	Power: By Battery
Test Mode: Transmit at 902.2MHz	

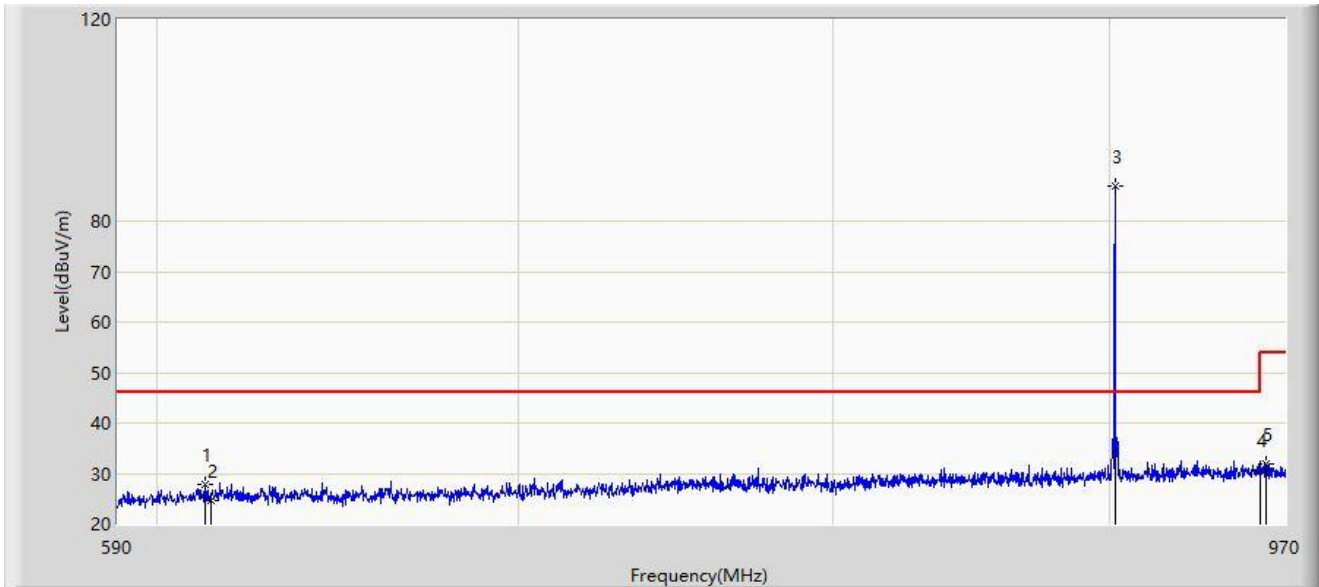


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		612.420	27.710	1.662	-18.290	46.000	26.048	PK
2		614.000	24.684	-1.389	-21.316	46.000	26.073	PK
3		902.170	86.993	57.573	N/A	N/A	29.420	PK
4	*	960.000	30.721	0.557	-15.279	46.000	30.165	PK
5		962.020	32.025	1.877	-21.975	54.000	30.148	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-07-14
Limit: FCC_Part15.209_RE(3m)	Engineer: Zach Xu
Probe: VULB 9168_25-2000MHz	Polarity: Horizontal
EUT: AT-314	Power: By Battery
Test Mode: Transmit at 915.8MHz	

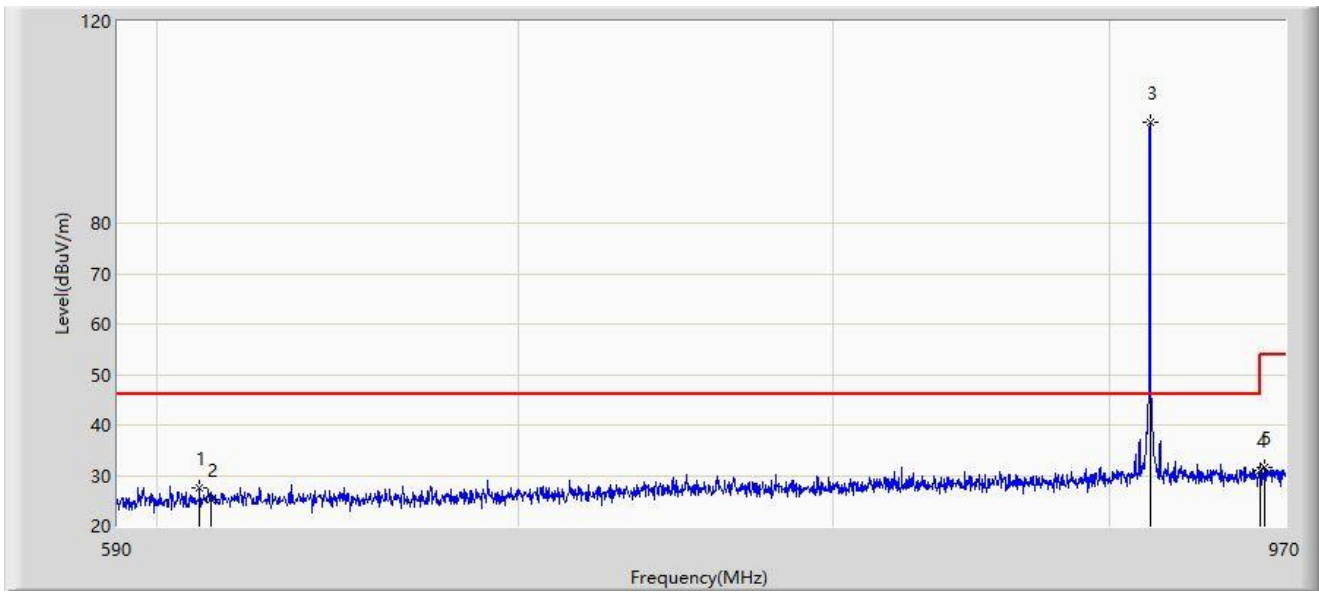


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		611.090	27.658	1.642	-18.342	46.000	26.016	PK
2		614.000	25.170	-0.903	-20.830	46.000	26.073	PK
3		915.850	100.100	70.497	N/A	N/A	29.603	PK
4	*	960.000	31.041	0.877	-14.959	46.000	30.165	PK
5		961.640	31.510	1.359	-22.490	54.000	30.151	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-07-14
Limit: FCC_Part15.209_RE(3m)	Engineer: Zach Xu
Probe: VULB 9168_25-2000MHz	Polarity: Vertical
EUT: AT-314	Power: By Battery
Test Mode: Transmit at 915.8MHz	

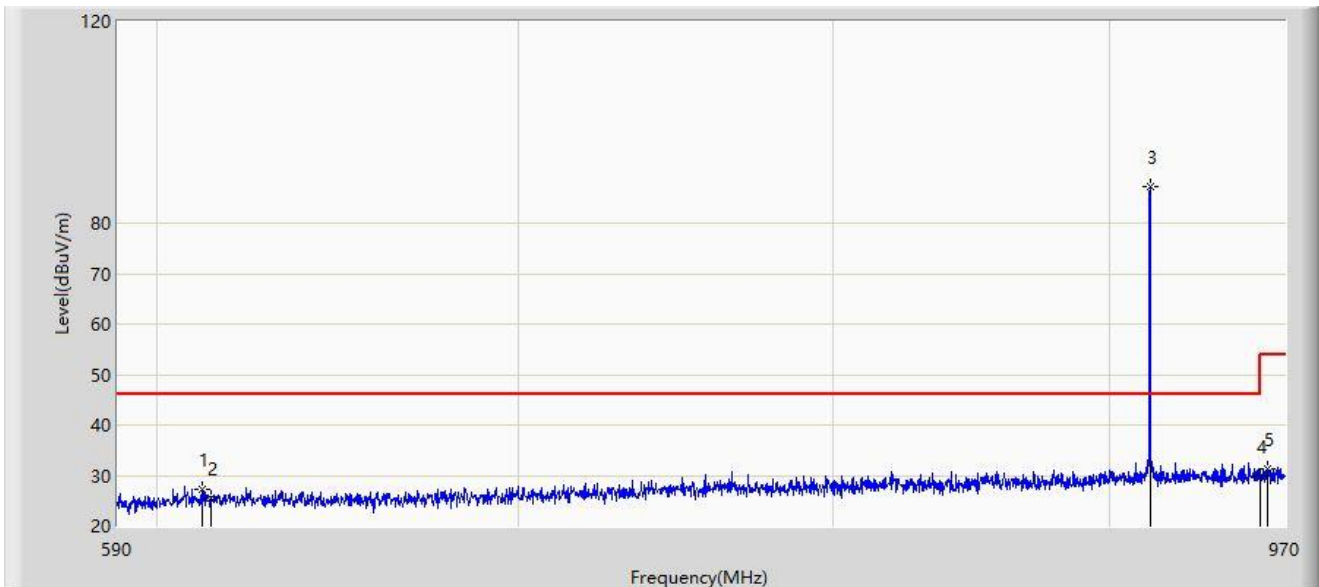

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		611.660	27.107	1.075	-18.893	46.000	26.032	PK
2		614.000	25.452	-0.621	-20.548	46.000	26.073	PK
3		915.850	87.272	57.669	N/A	N/A	29.603	PK
4	*	960.000	29.877	-0.287	-16.123	46.000	30.165	PK
5		962.780	31.228	1.082	-22.772	54.000	30.146	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

## Appendix B - Test Setup Photograph

Refer to "2307RSU008-UT" file.

## Appendix C - EUT Photograph

Refer to "2307RSU008-UE" file.

---

The End