



CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China

Tel: +86-755-27521059 Fax: +86-755-27521011 Http://www.sz-ctc.com.cn

TEST REPORT

Report No. : **GTI20191250E-2**

FCC ID..... : **2APPZ-I33V**

Applicant..... : **Fanvil Technology Co., LTD.**

Address..... : 4F, Block A, Bldg#1, GaoXinQi Hi-TechPark Phase-II, 67th District, Bao'An, Shenzhen, China

Manufacturer..... : Fanvil Technology Co., LTD.

Address..... : 4F, Block A, Bldg#1, GaoXinQi Hi-TechPark Phase-II, 67th District, Bao'An, Shenzhen, China

Product Name : **IP Door Phone**

Trade Mark..... : Fanvil

Model/Type reference : i33V

Listed Model(s) : i33VF

Standard..... : **FCC CFR Title 47 Part 15 Subpart C**

Date of receipt of test sample..... : Jul. 04, 2019

Date of testing..... : Jul. 05, 2019 ~ Jul. 22, 2019

Date of issue..... : Jul. 22, 2019

Result..... : **PASS**

Compiled by:
(Printed name + signature) Terry Su

Supervised by:
(Printed name + signature) Eric Zhang

Approved by:
(Printed name + signature) Walter Chen

Testing Laboratory Name..... : **CTC Laboratories, Inc.**

Address..... : 2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CTC. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CTC within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit. The test report merely correspond to the test sample.



Table of Contents

Page

1. TEST SUMMARY..... 3

1.1. TEST STANDARDS.....3

1.2. REPORT VERSION.....3

1.3. TEST DESCRIPTION.....4

1.4. TEST FACILITY5

1.5. MEASUREMENT UNCERTAINTY5

1.6. ENVIRONMENTAL CONDITIONS6

1.7. EUT OPERATION STATE.....6

1. GENERAL INFORMATION..... 7

1.1. CLIENT INFORMATION7

1.2. GENERAL DESCRIPTION OF EUT7

1.3. ACCESSORY EQUIPMENT INFORMATION7

1.4. MEASUREMENT INSTRUMENTS LIST8

2. TEST ITEM AND RESULTS 10

2.1. CONDUCTED EMISSION.....10

2.2. RADIATED EMISSION13

2.3. OCCUPIED BANDWIDTH 20 dB BANDWIDTH.....21

2.4. FIELD STRENGTH OF THE FUNDAMENTAL23

2.5. ANTENNA REQUIREMENT26

3. LABEL AND LABEL LOCATION 27

4. EUT TEST PHOTOS..... 28

3. PHOTOGRAPHS OF EUT CONSTRUCTIONAL 29



1. TEST SUMMARY

1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15C](#): Intentional Radiators

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices.

1.2. Report version

Revised No.	Date of issue	Description
01	Jul. 22, 2019	Original



1.3. Test Description

FCC Part 15 Subpart C			
Test Item	Standard Section	Result	Test Engineer
Conducted Emission	15.207	Pass	Terry Su
Radiated Emissions	15.209	Pass	Terry Su
Field Strength of the Fundamental	15.209	Pass	Terry Su
Occupied Bandwidth and 20dB Bandwidth	15.215	Pass	Terry Su
Antenna requirement	15.203	Pass	Terry Su

Note: N/A: Not applicable.

The measurement uncertainty is not included in the test result.



1.4. Test Facility

Address of the report laboratory

CTC Laboratories, Inc.

Add: 2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China

Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5365

CTC Laboratories, Inc. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: CN1208

CTC Laboratories, Inc. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

IC Registration No.: 9783A-1

The 3m alternate test site of CTC Laboratories, Inc. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 9783A-1 on Jan, 2016.

FCC-Registration No.: 951311

CTC Laboratories, Inc. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 951311, Aug 26, 2017

1.5. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 2 " and is documented in the CTC Laboratories, Inc. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Below is the best measurement capability for CTC Laboratories, Inc.



Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.42 dB	(1)
Transmitter power Radiated	2.14 dB	(1)
Conducted spurious emissions 9kHz~40GHz	1.60 dB	(1)
Radiated spurious emissions 9kHz~40GHz	2.20 dB	(1)
Conducted Emissions 9kHz~30MHz	3.20 dB	(1)
Radiated Emissions 30~1000MHz	4.70 dB	(1)
Radiated Emissions 1~18GHz	5.00 dB	(1)
Radiated Emissions 18~40GHz	5.54 dB	(1)
Occupied Bandwidth	-----	(1)

Note (1): This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

1.6. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
Relative Humidity:	30~60 %
Air Pressure:	950~1050kPa

1.7. EUT Operation state

The EUT has been tested under typical operating condition. The Applicant provides software to control the EUT for staying in continuous transmitting mode for testing.



1. GENERAL INFORMATION

1.1. Client Information

Applicant:	Fanvil Technology Co., LTD.
Address:	4F, Block A, Bldg#1, GaoXinQi Hi-TechPark Phase-II, 67th District, Bao'An, Shenzhen, China
Manufacturer:	Fanvil Technology Co., LTD.
Address:	4F, Block A, Bldg#1, GaoXinQi Hi-TechPark Phase-II, 67th District, Bao'An, Shenzhen, China

1.2. General Description of EUT

Product Name:	IP Door Phone
Model/Type reference:	Fanvil
Marketing Name:	i33V
Listed Model(s):	i33VF
Model Difference:	All these models are identical in the same PCB, layout and electrical circuit, the only difference is way to install.
Power supply:	12Vdc/1A from External Adapter Supplied from POE
Hardware version:	N/A
Software version:	N/A
RF Parameter	
Operation frequency:	125KHz
Antenna type:	Loop Antenna

1.3. Accessory Equipment information

Equipment Information			
Name	Model	S/N	Manufacturer
AC/DC Adapter	LPL-V0121201100AT	---	Sagemcom
Cable Information			
Name	Shielded Type	Ferrite Core	Length
/	/	/	/



1.4. Measurement Instruments List

Tonscend JS0806-2 Test system					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Rohde & Schwarz	FSU26	100105	Dec. 27, 2019
2	Spectrum Analyzer	Rohde & Schwarz	FUV40-N	101331	Dec. 27, 2019
3	MXG Vector Signal Generator	Agilent	N5182A	MY47420864	Dec. 27, 2019
4	Signal Generator	Agilent	E8257D	MY46521908	Dec. 27, 2019
5	Power Sensor	Agilent	U2021XA	MY5365004	Dec. 27, 2019
6	Power Sensor	Agilent	U2021XA	MY5365006	Dec. 27, 2019
7	Simultaneous Sampling DAQ	Agilent	U2531A	TW54493510	Dec. 27, 2019
8	Climate Chamber	TABAI	PR-4G	A8708055	Dec. 27, 2019
9	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	116410	Dec. 27, 2019
10	Climate Chamber	ESPEC	MT3065	/	Dec. 27, 2019
11	300328 v2.1.1 test system	TONSCEND	v2.6	/	/

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	EMI Test Receiver	Rohde & Schwarz	ESCI	100658	Dec. 27, 2019
2	High pass filter	micro-tranics	HPM50111	142	Dec. 27, 2019
3	Log-Bicon Antenna	Schwarzbeck	CBL6141A	4180	Dec. 27, 2019
4	Ultra-Broadband Antenna	SchwarzBeck	BBHA9170	25841	Dec. 27, 2019
5	Loop Antenna	LAPLAC	RF300	9138	Dec. 27, 2019
6	Loop Antenna	ETS	6507	146	Aug. 26, 2019
7	Spectrum Analyzer	Rohde & Schwarz	FSU26	100105	Dec. 27, 2019
8	Horn Antenna	Schwarzbeck	BBHA 9120D	647	Dec. 27, 2019
9	Pre-Amplifier	HP	8447D	1937A03050	Dec. 27, 2019
10	Pre-Amplifier	EMCI	EMC051835	980075	Dec. 27, 2019
11	Antenna Mast	UC	UC3000	N/A	N/A
12	Turn Table	UC	UC3000	N/A	N/A
13	Cable Below 1GHz	Schwarzbeck	AK9515E	33155	Dec. 27, 2019
14	Cable Above 1GHz	Hubersuhner	SUCOFLEX102	DA1580	Dec. 27, 2019
15	Splitter	Mini-Circuit	ZAPD-4	400059	Dec. 27, 2019
16	RF Connection Cable	HUBER+SUHNER	RE-7-FL	N/A	Dec. 27, 2019
17	RF Connection Cable	Chengdu E-Microwave	---	---	Dec. 27, 2019
18	High pass filter	Compliance Direction systems	BSU-6	34202	Dec. 27, 2019

CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn



中国国家认证认可监督管理委员会
Certification and Accreditation Administration of the People's Republic of China

For anti-fake verification, please visit the official website of Certification and

Accreditation Administration of the People's Republic of China : <http://yz.cnca.cn>



19	Attenuator	Chengdu E-Microwave	EMCAXX-10R NZ-3	---	Dec. 27, 2019
----	------------	------------------------	--------------------	-----	---------------

Note:1. The Cal. Interval was one year.

2. The cable loss has calculated in test result which connection between each test instruments.

2. TEST ITEM AND RESULTS

2.1. Conducted Emission

Limit


FCC CFR Title 47 Part 15 Subpart C Section 15.207/ RSS-Gen 7.2:

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

Notes:

- (1) *Decreasing linearly with logarithm of the frequency.
- (2) The lower limit shall apply at the transition frequencies.
- (3) The limit decrease in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

Test Configuration

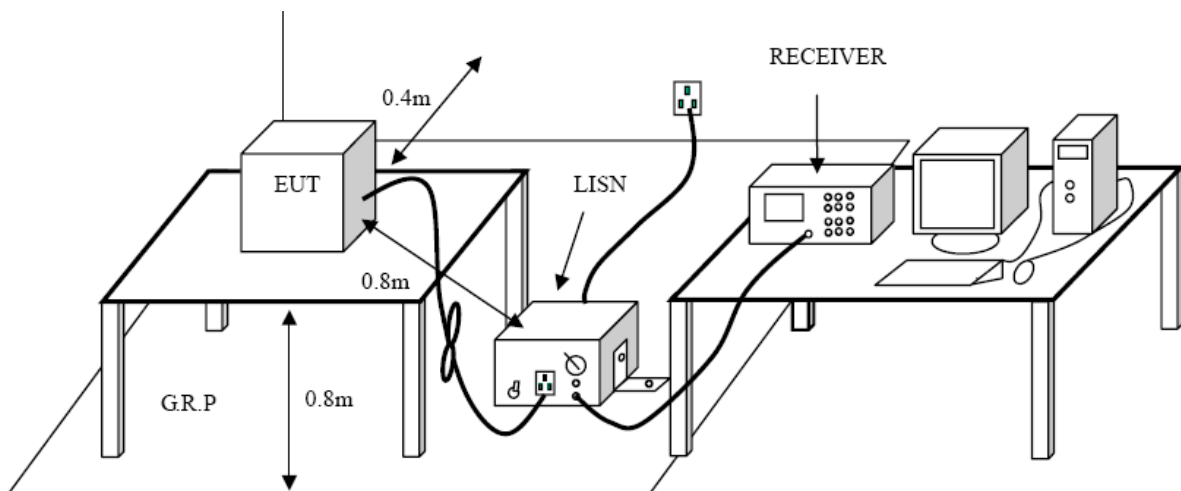

Test Procedure

1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
4. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
5. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
6. Conducted Emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
7. During the above scans, the emissions were maximized by cable manipulation.



Test Mode:

Please refer to the clause 1.7.

Test Results

Test Voltage:	AC 120V/60 Hz
Terminal:	Line

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.152420	47.0	1000.00	9.000	Off	L1	10.0	18.9	65.9	
0.436840	35.5	1000.00	9.000	Off	L1	10.0	21.6	57.1	
0.452840	40.3	1000.00	9.000	Off	L1	10.0	16.5	56.8	


Final Measurement Detector 2

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.435100	28.6	1000.00	9.000	Off	L1	10.0	18.6	47.2	
0.453740	39.2	1000.00	9.000	Off	L1	10.0	7.6	46.8	
0.473190	31.1	1000.00	9.000	Off	L1	10.0	15.4	46.5	

Emission Level= Read Level+ Correct Factor



Test Voltage:	AC 120V/60 Hz
Terminal:	Neutral

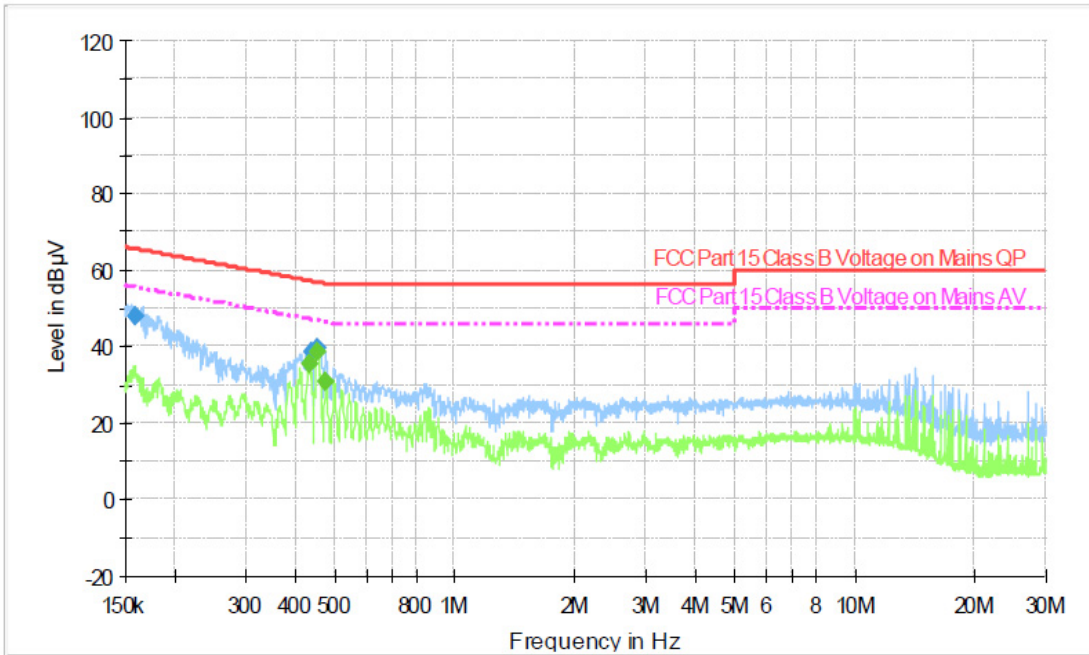

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.158950	47.7	1000.00	9.000	Off	N	9.5	17.8	65.5	
0.439470	38.5	1000.00	9.000	Off	N	9.5	18.6	57.1	
0.452840	39.6	1000.00	9.000	Off	N	9.5	17.2	56.8	

Final Measurement Detector 2

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.431630	35.6	1000.00	9.000	Off	N	9.5	11.6	47.2	
0.454650	38.4	1000.00	9.000	Off	N	9.5	8.4	46.8	
0.473190	31.0	1000.00	9.000	Off	N	9.5	15.5	46.5	

Emission Level= Read Level+ Correct Factor

2.2. Radiated Emission

FCC Limit

Radiated Emission Limits (9 kHz~1000 MHz)

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3


Radiated Emission Limit (Above 1000MHz)

Frequency (MHz)	Distance Meters(at 3m)	
	Peak	Average
Above 1000	74	54


Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission Level (dBuV/m)=20log Emission Level (uV/m).


Test Configuration

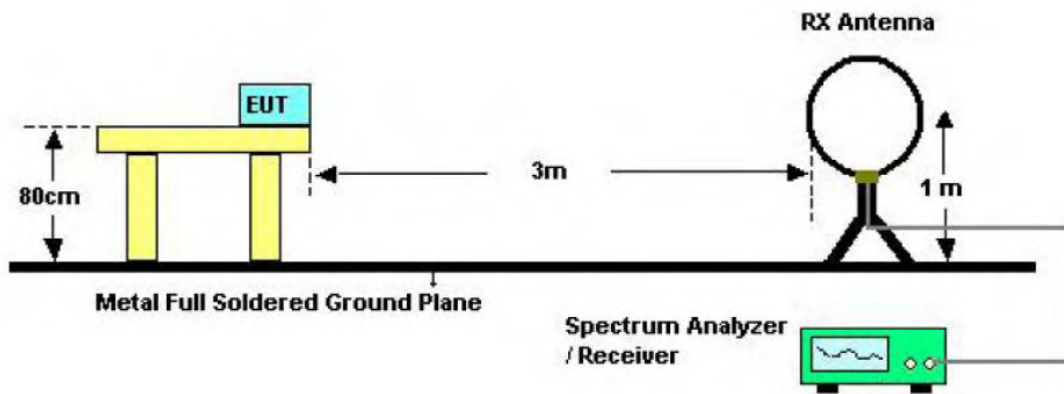

Below 30MHz Test Setup

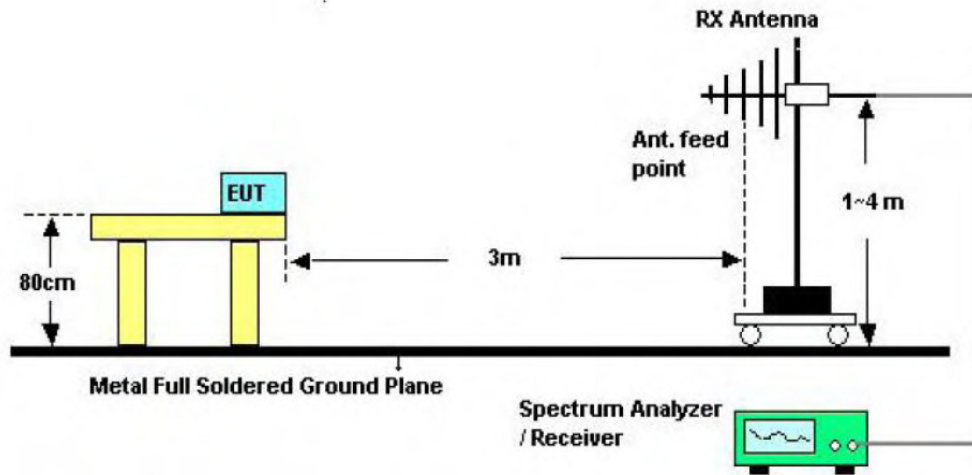

Below 1000MHz Test Setup

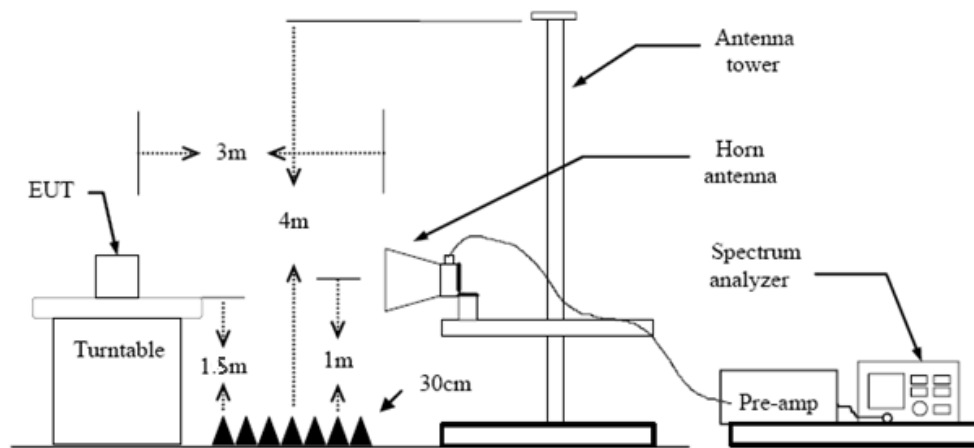

Above 1GHz Test Setup

Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Below 1 GHz:
RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;
If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
 - (3) From 1 GHz to 10th harmonic:
RBW=1MHz, VBW=3MHz Peak detector for Peak value.
RBW=1MHz, VBW=3MHz RMS detector for Average value.





Test Mode

Please refer to the clause 1.7.

Test Result


9KHz~0.15MHz

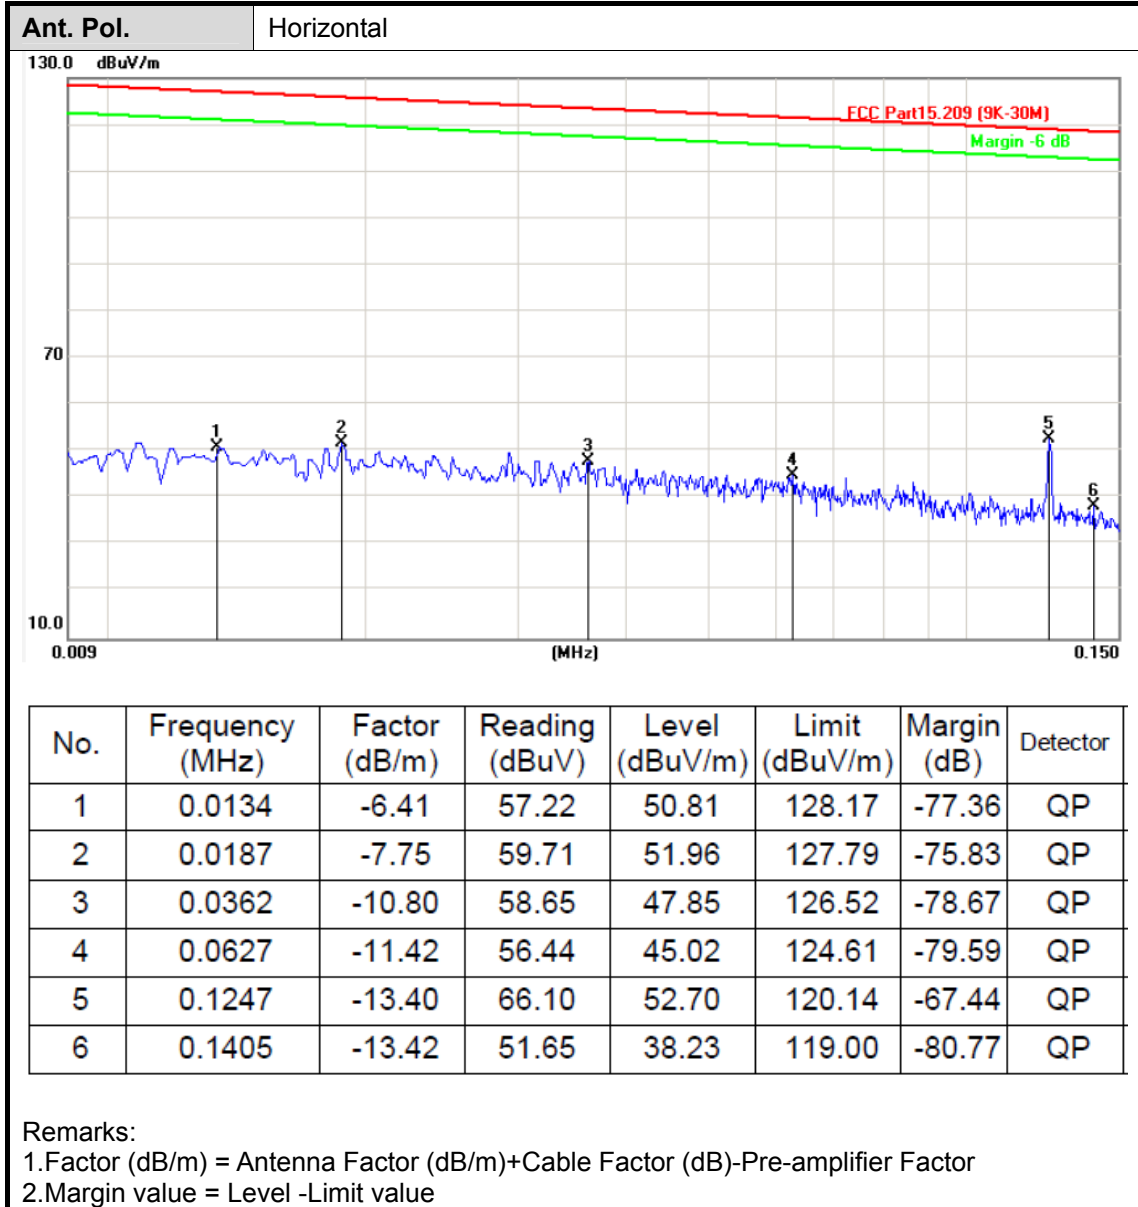


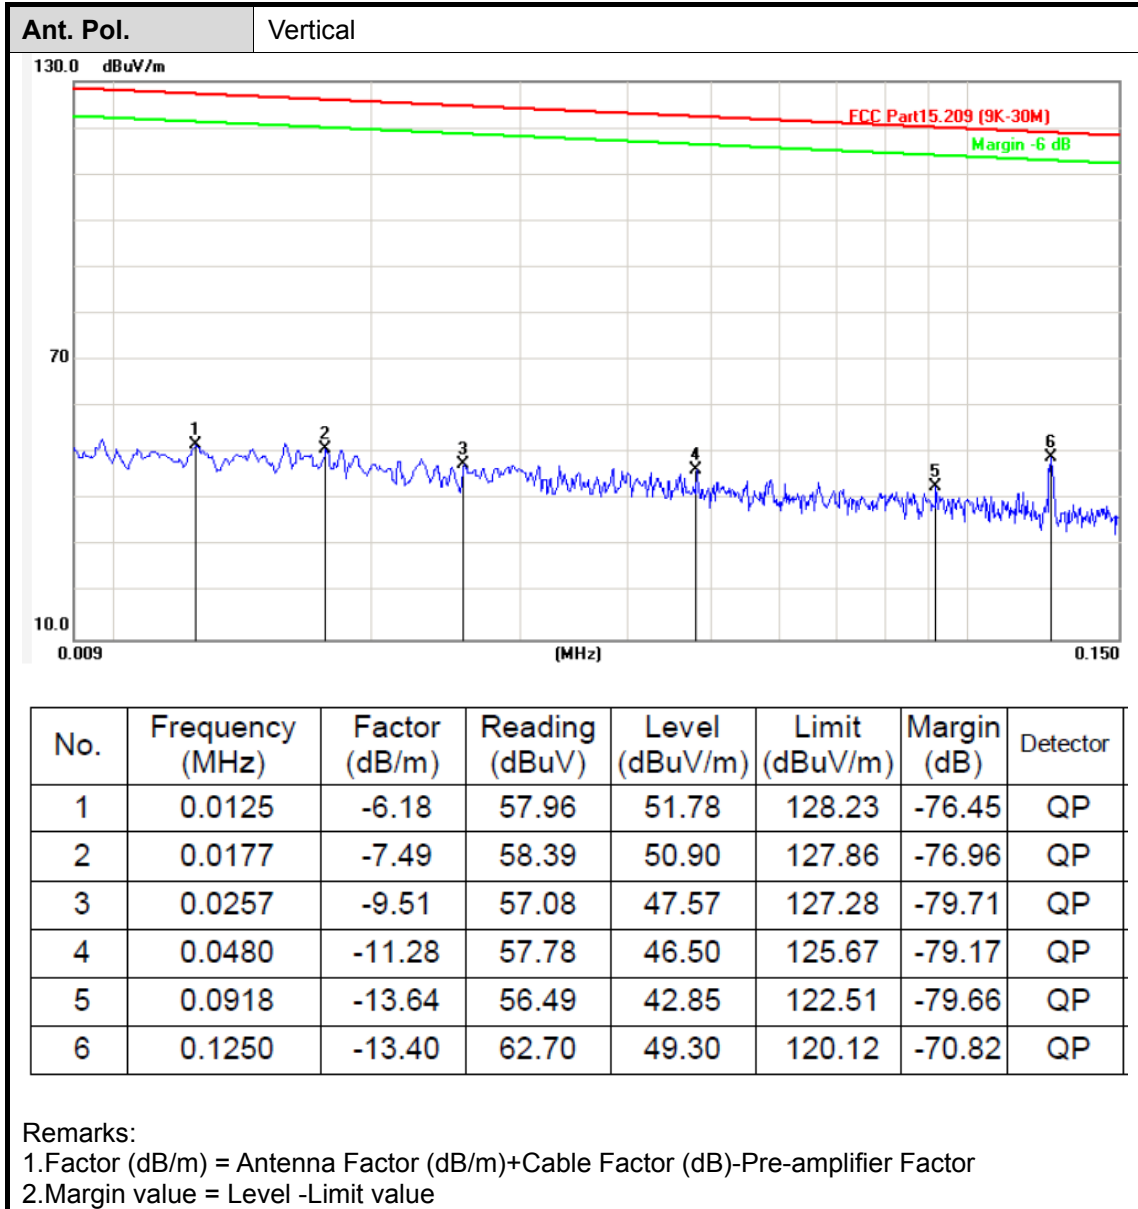




0.15MHz~30MHz

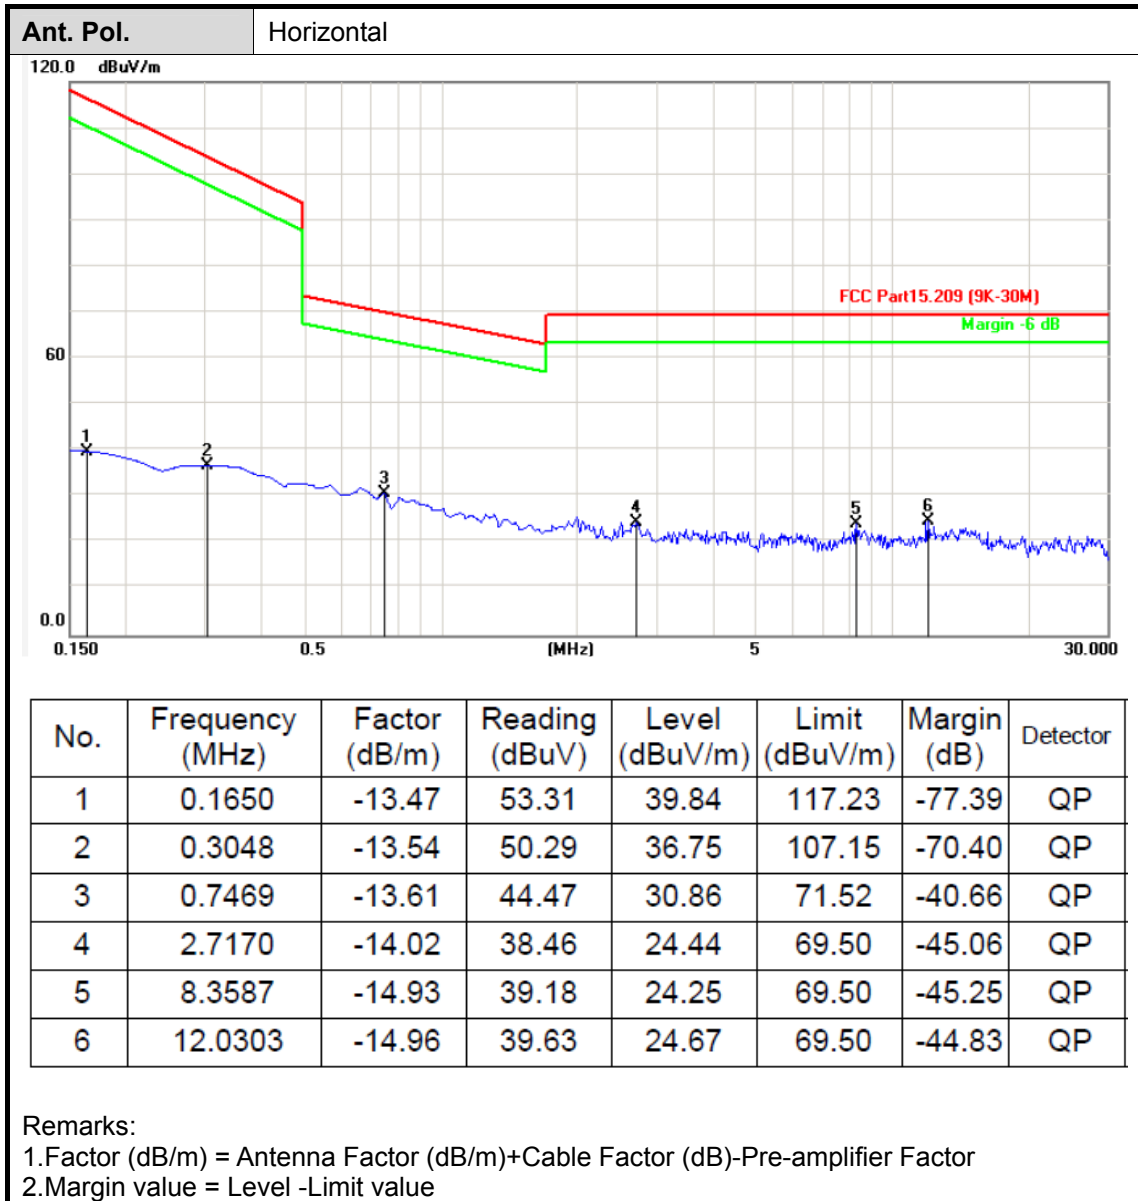


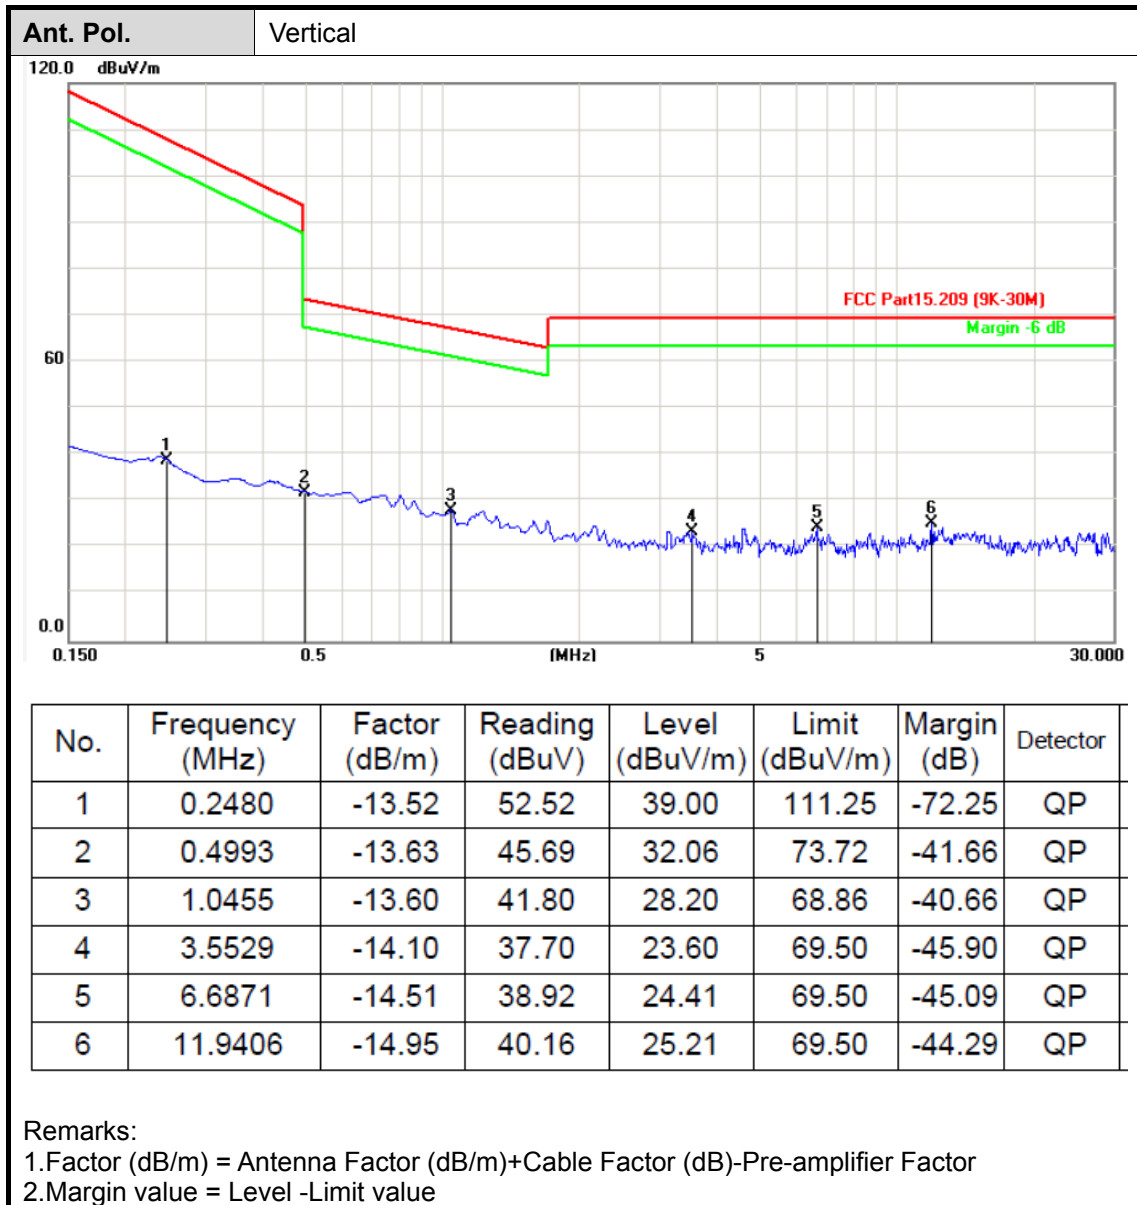



30MHz-1GHz

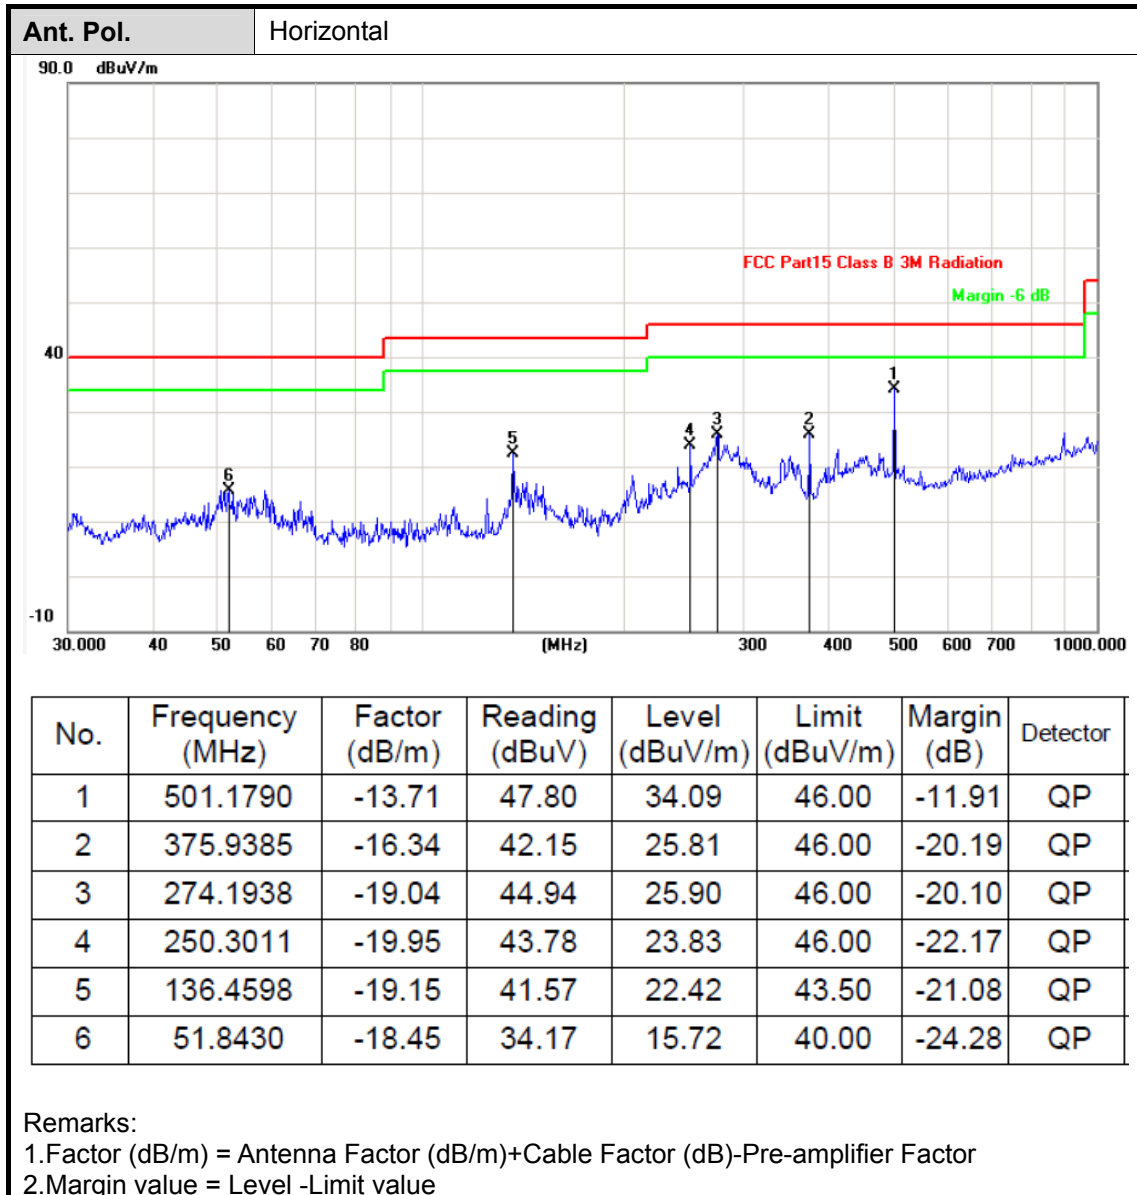

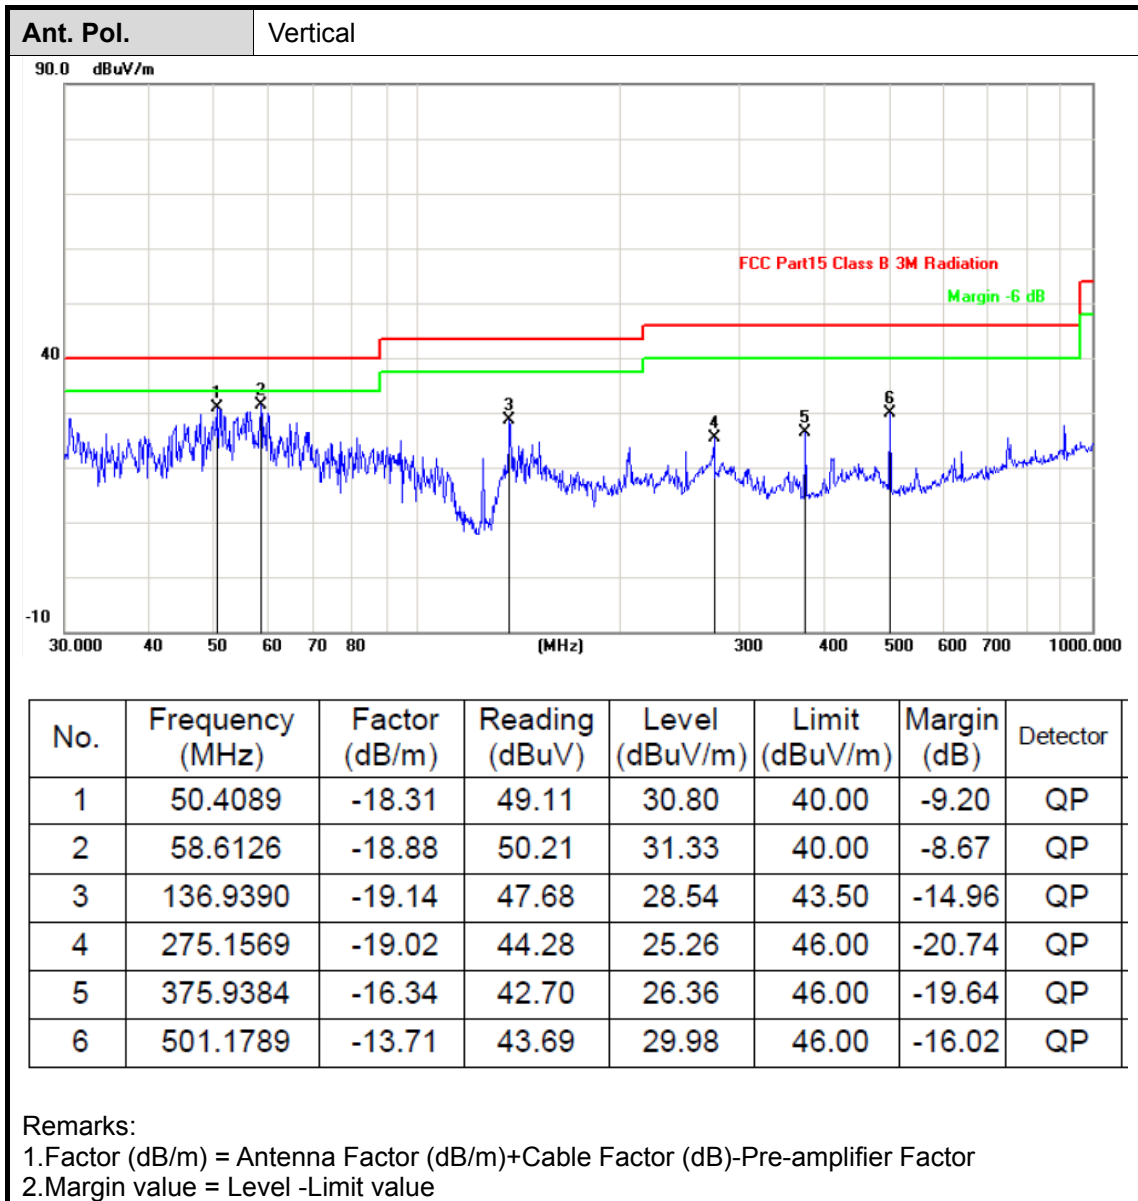


2.3. Occupied Bandwidth 20 dB Bandwidth

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.215

Intentional radiators must be designed to ensure that the 20dB emission bandwidth in the specific band.

Test Configuration



Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. Spectrum Setting:
 - (1) Set RBW \geq 1% of the 20 dB bandwidth.
 - (2) Set the video bandwidth (VBW) \geq RBW.
 - (3) Detector = Peak.
 - (4) Trace mode = Max hold.
 - (5) Sweep = Auto couple.


Test Mode

Please refer to the clause 1.7.

Test Results



Channel Frequency(kHz)	Occupied Bandwidth (kHz)	20dB Bandwidth (kHz)	Result
125	6.686	7.757	PASS

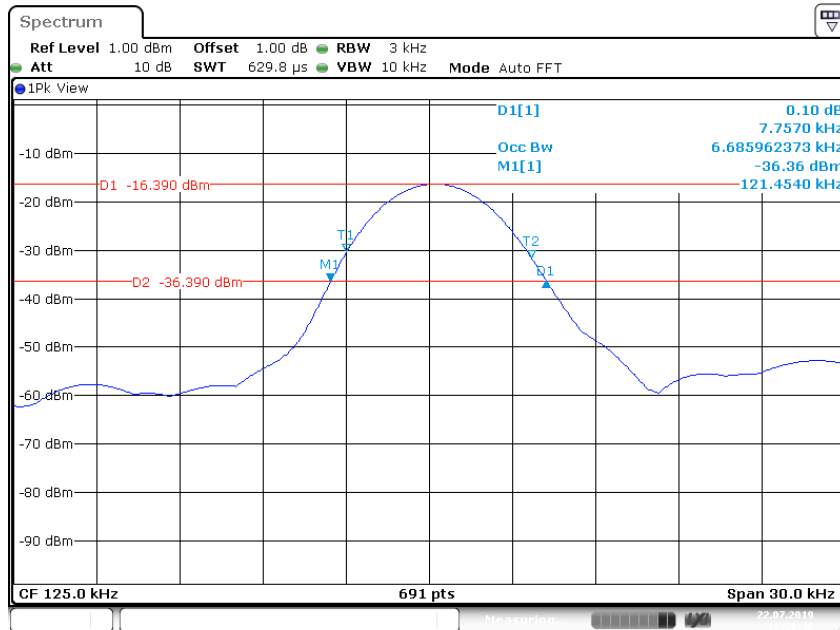

Date: 22.JUL.2019 10:59:47

2.4. Field Strength of the Fundamental

Limit


FCC CFR Title 47 Part 15 Subpart C Section 15.209

Limit for frequency below 30MHz:

Frequency	Limit (uV/m)	Measurement Distance(m)	Remark
0.009~0.490	2400/F(kHz)	300	Quasi-peak
0.490~1.705	24000/F(kHz)	30	Quasi-peak
1.705~30.0	30	30	Quasi-peak

Note: Limit dBuV/m @3m = Limit dBuV/m @300m + 40*log(300/3)= Limit dBuV/m @300m +80,
 Limit dBuV/m @3m = Limit dBuV/m @30m +40*log(30/3)= Limit dBuV/m @30m + 40.

Test Configuration

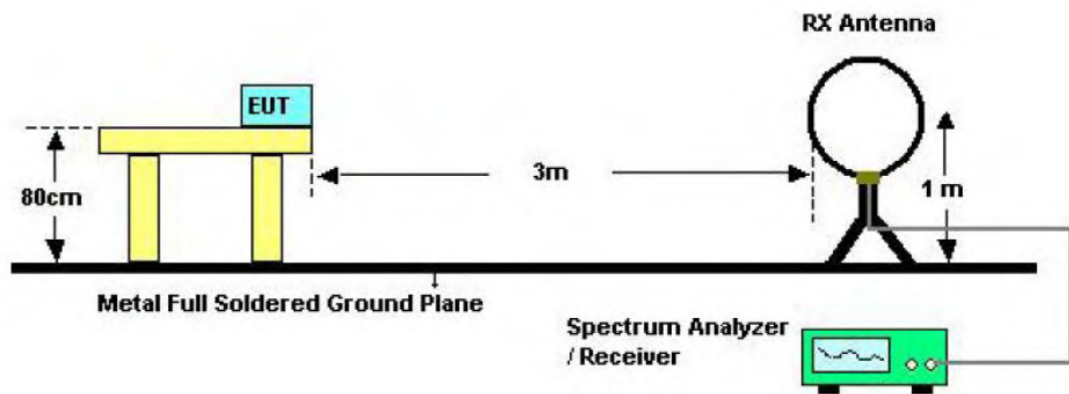

Below 30MHz Test Setup

Test Procedure


1. The EUT was setup and tested according to ANSI C63.10:2013 requirements.
2. The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.


Test Mode

Please refer to the clause 1.7.



Test Result

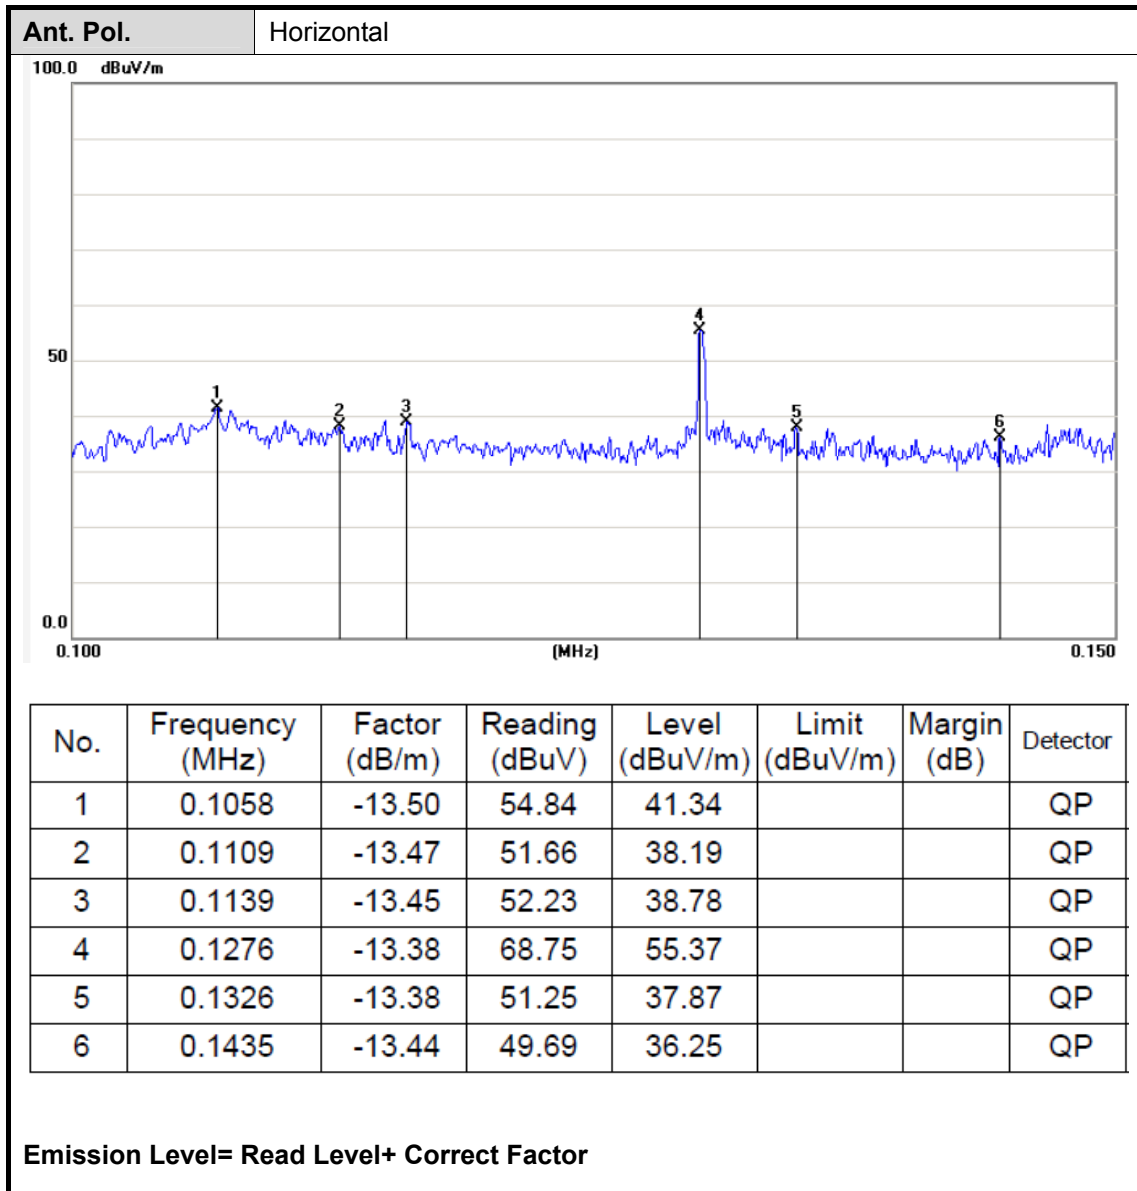

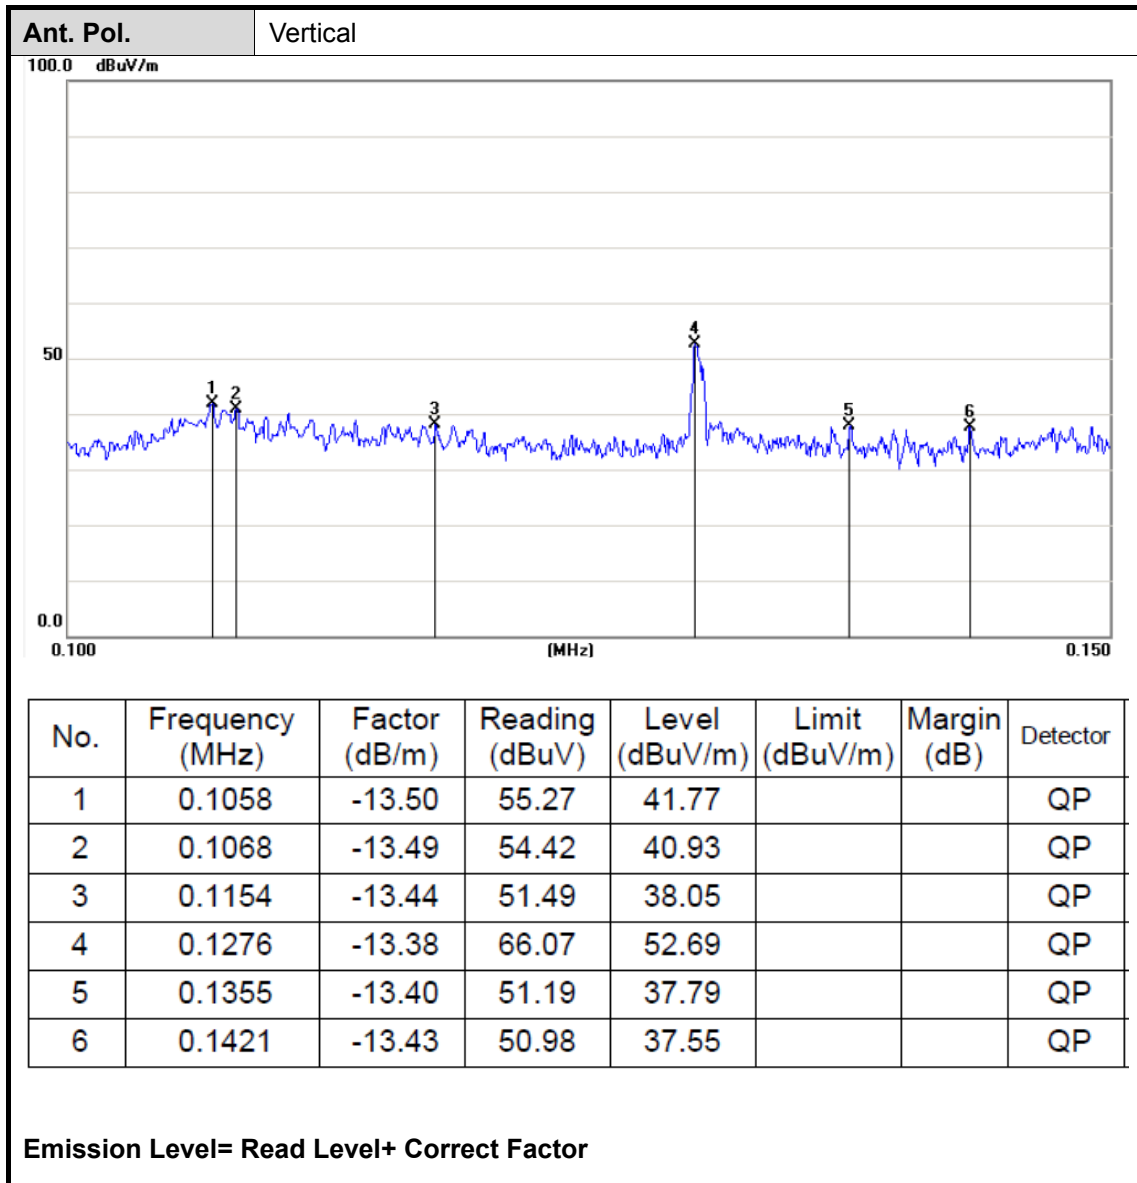



2.5. Antenna requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

The directional gain of the antenna less than 6dBi, please refer to the EUT internal photographs antenna photo.