


Ant 1

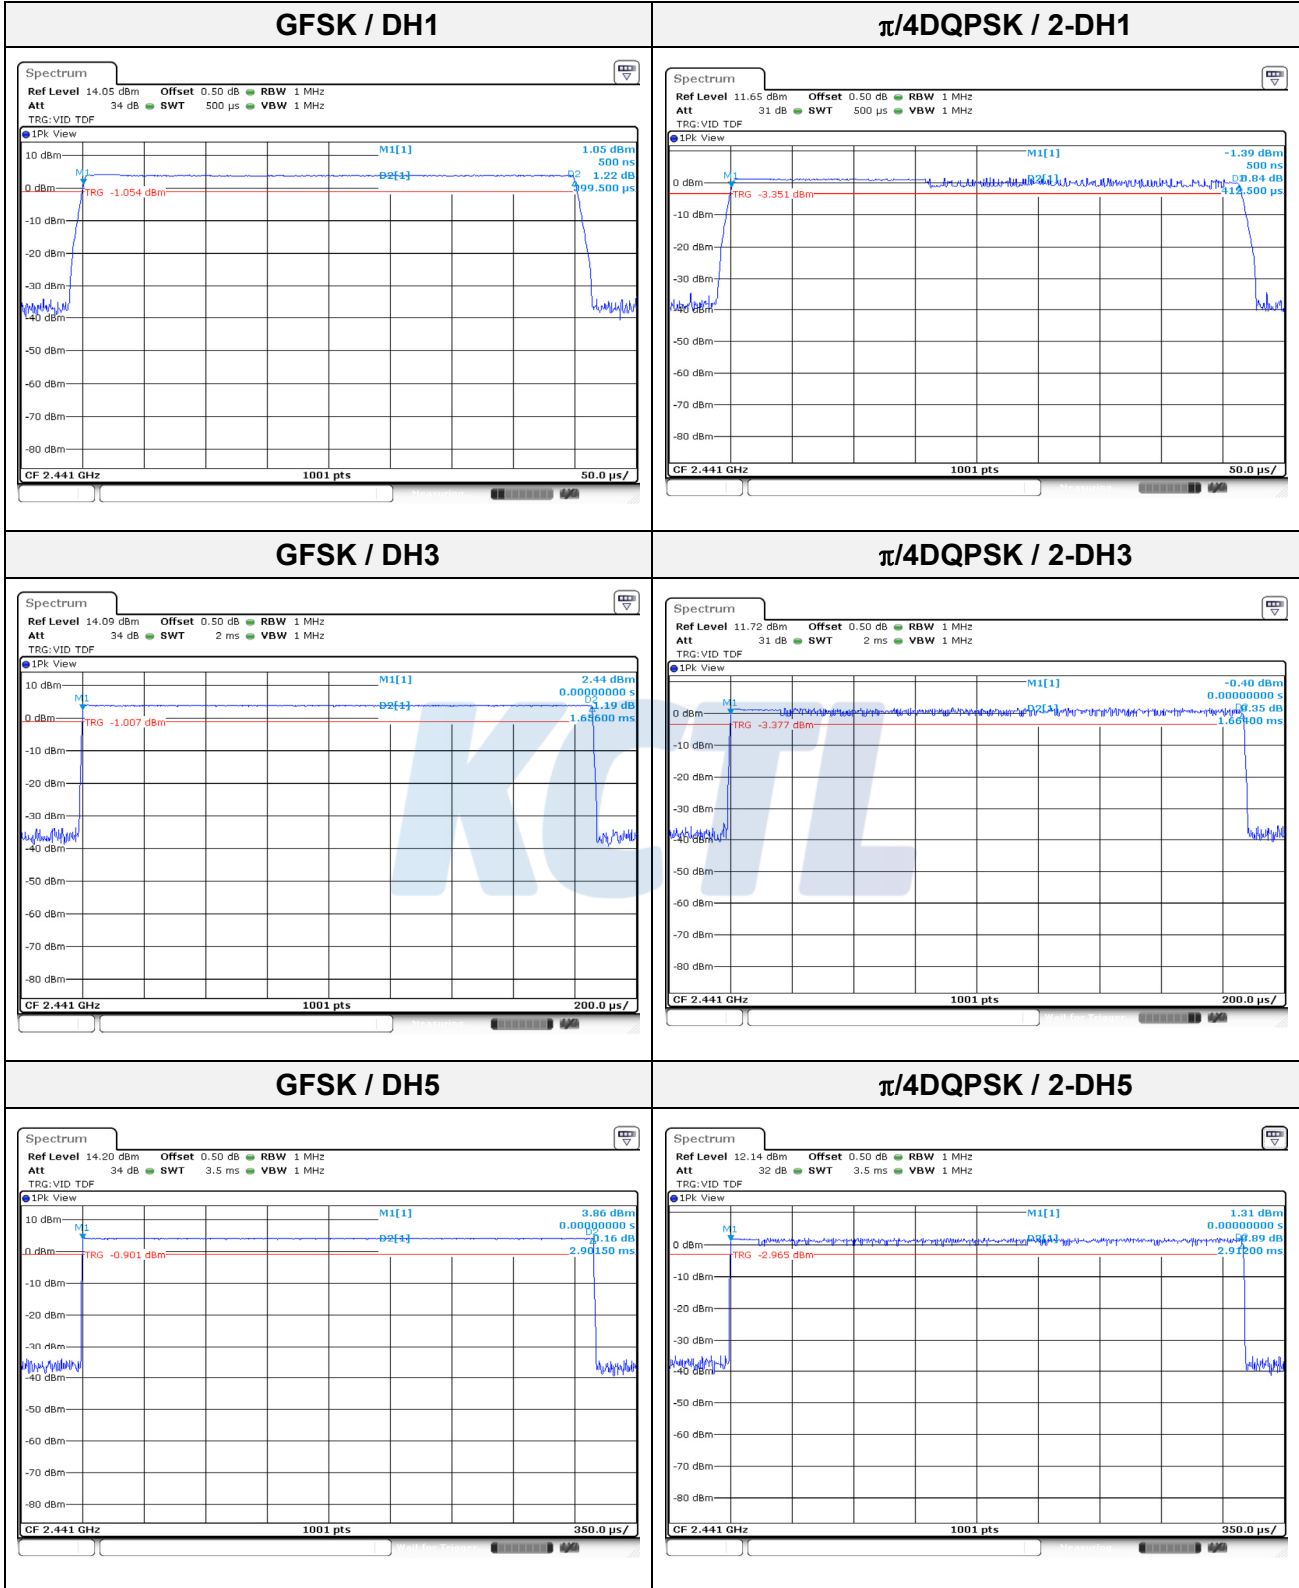

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SRF0081-A


Page (30) of (76)




8DPSK / 3-DH1

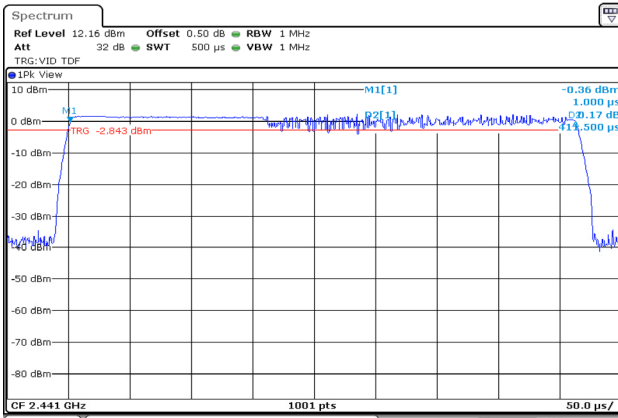

8DPSK / 3-DH3

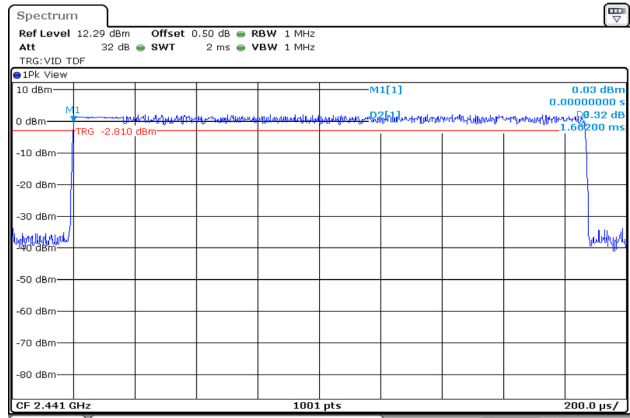


8DPSK / 3-DH5

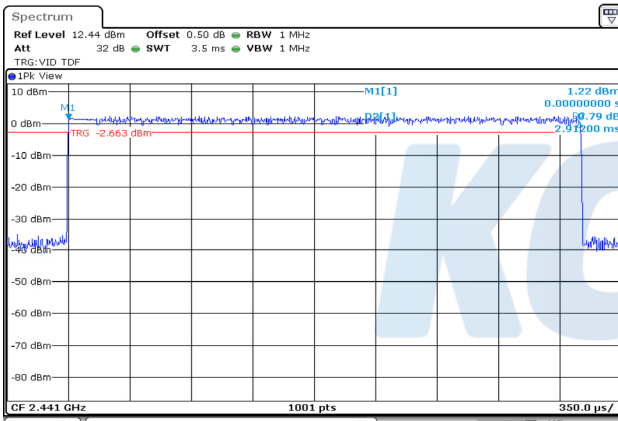

Blank

Ant 2

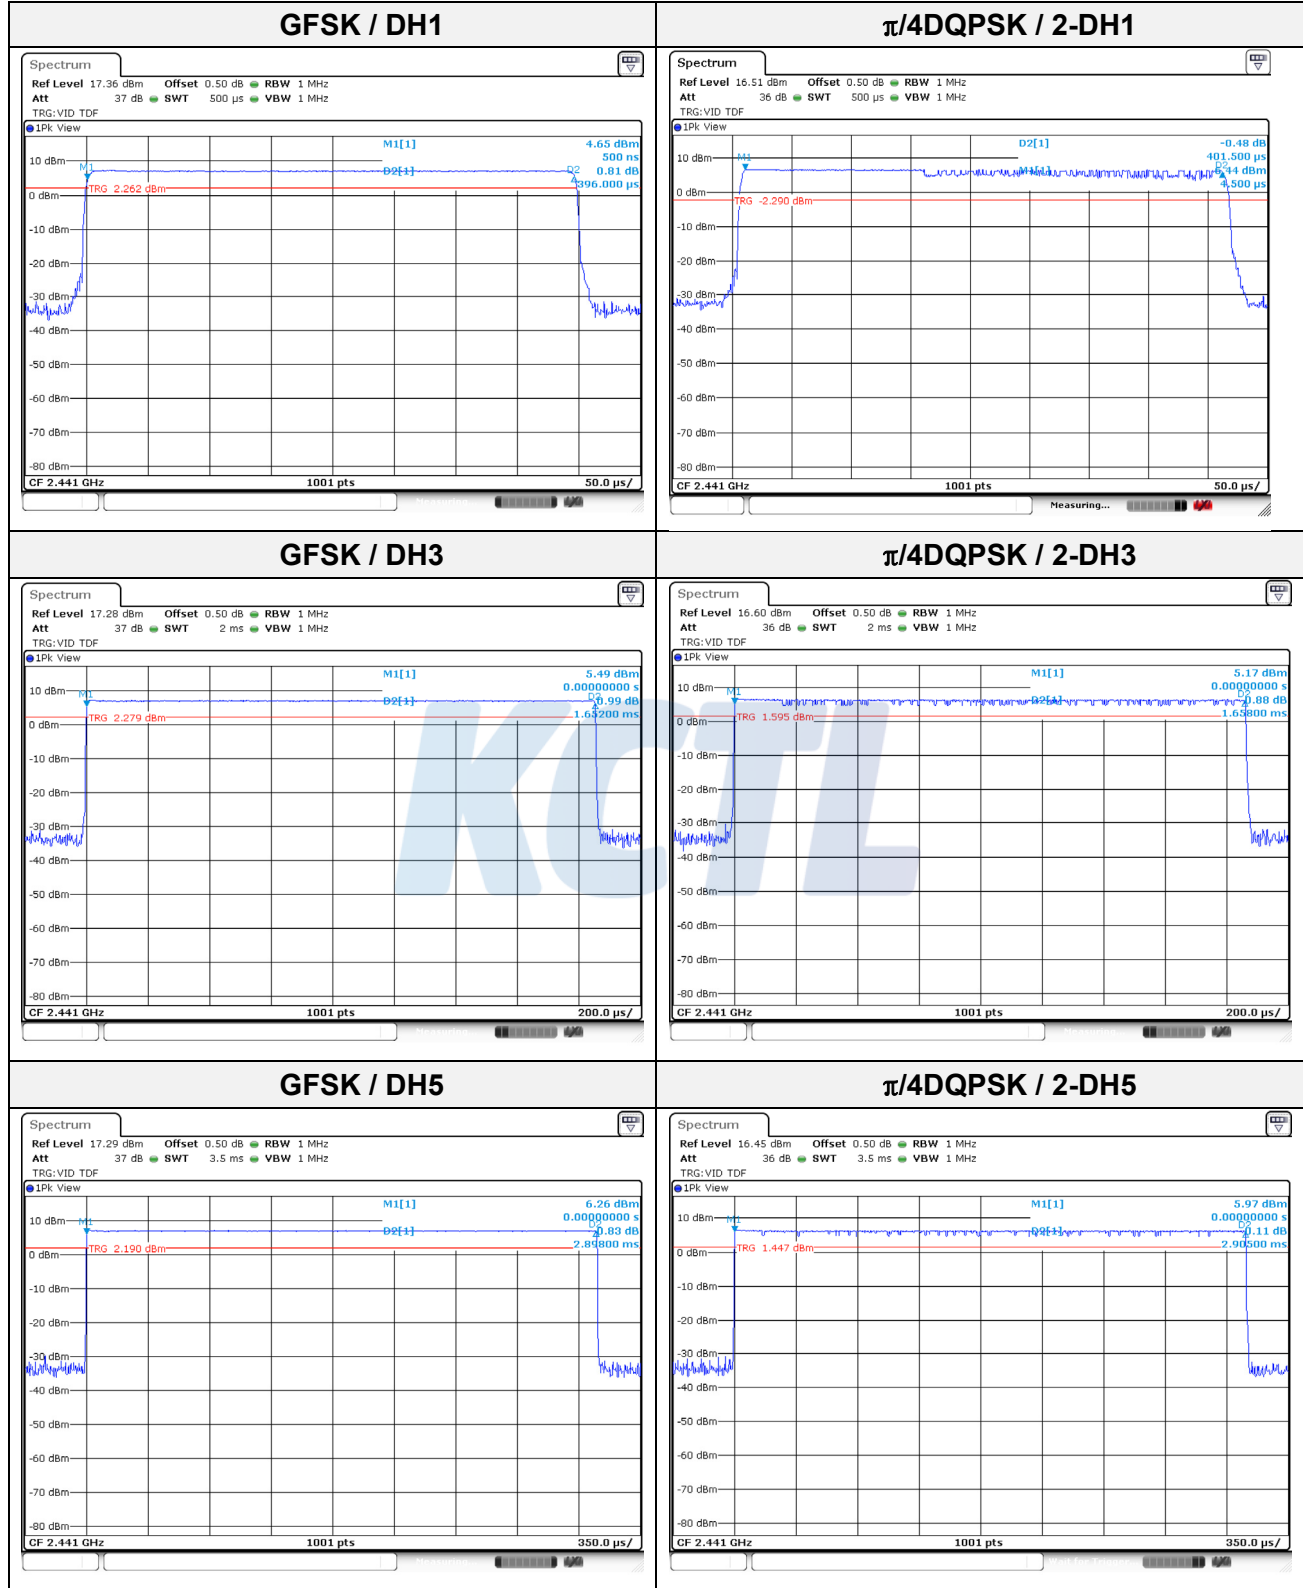

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SRF0081-A


Page (32) of (76)




8DPSK / 3-DH1

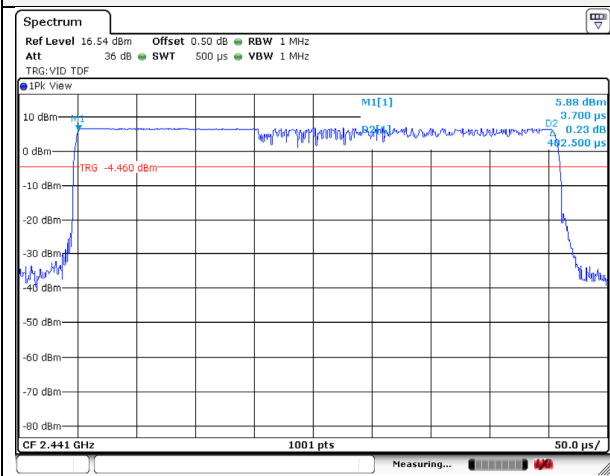

8DPSK / 3-DH3

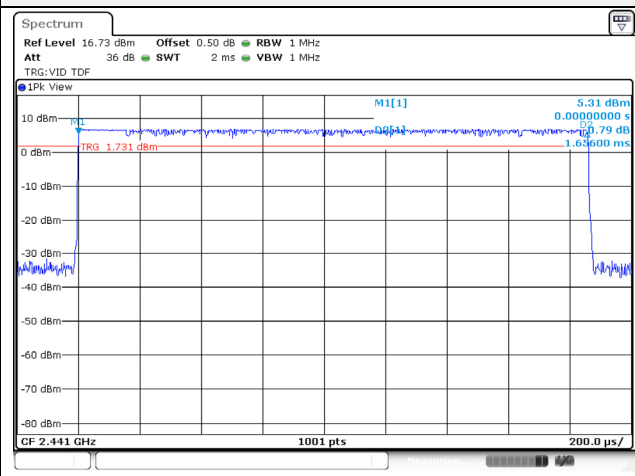

8DPSK / 3-DH5

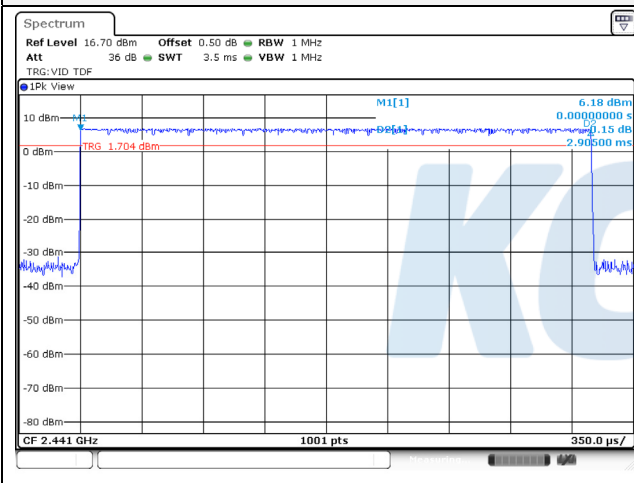


Blank


7.6. Radiated spurious emissions & band edge

Test setup


The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions

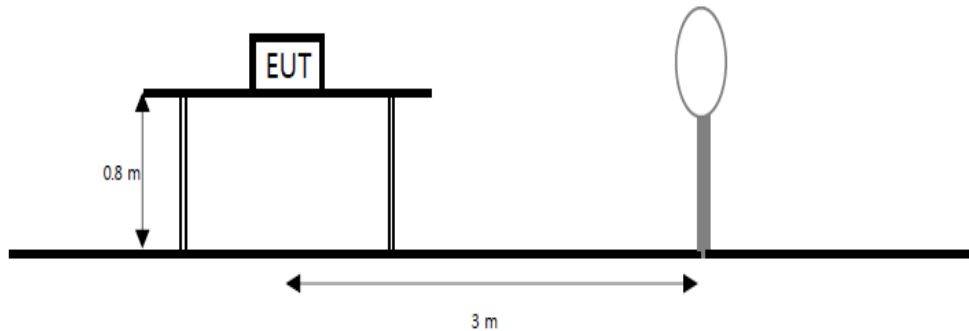

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

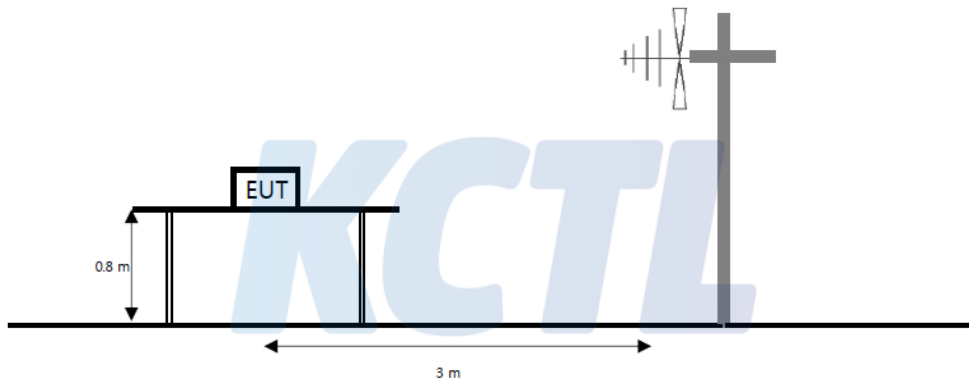

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz emissions, whichever is lower.

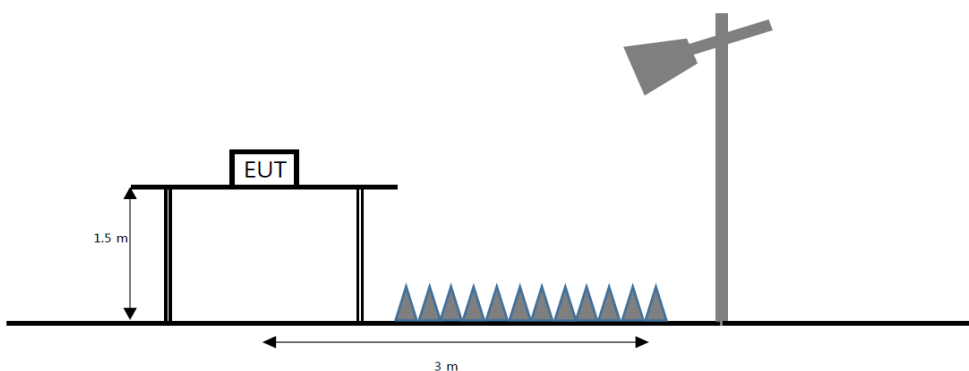

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SRF0081-A

Page (34) of (76)

**Limit**

According to section 15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength ($\mu\text{V}/\text{m}$)	Measurement distance (m)
0.009 - 0.490	2 400/F(kHz)	300
0.490 - 1.705	24 000/F(kHz)	30
1.705 - 30	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54–72 MHz, 76–88 MHz, 174–216 MHz or 470–806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., Section 15.231 and 15.241.

According to section 15.205(a) and (b), only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.009 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.694 75 - 16.695 25	608 - 614	5.35 - 5.46
2.173 5 - 2.190 5	16.804 25 - 16.804 75	960 - 1 240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1 300 - 1 427	8.025 - 8.5
4.177 25 - 4.177 75	37.5 - 38.25	1 435 - 1 626.5	9.0 - 9.2
4.207 25 - 4.207 75	73 - 74.6	1 645.5 - 1 646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1 660 - 1 710	10.6 - 12.7
6.267 75 - 6.268 25	108 - 121.94	1 718.8 - 1 722.2	13.25 - 13.4
6.311 75 - 6.312 25	123 - 138	2 200 - 2 300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2 310 - 2 390	15.35 - 16.2
8.362 - 8.366	156.524 75 - 156.525	2 483.5 - 2 500	17.7 - 21.4
8.376 25 - 8.386 75	25	2 690 - 2 900	22.01 - 23.12
8.414 25 - 8.414 75	156.7 - 156.9	3 260 - 3 267	23.6 - 24.0
12.29 - 12.293	162.012 5 - 167.17	3 332 - 3 339	31.2 - 31.8
12.519 75 - 12.520 25	167.72 - 173.2	3 345.8 - 3 358	36.43 - 36.5
12.576 75 - 12.577 25	240 - 285	3 600 - 4 400	Above 38.6
13.36 - 13.41	322 - 335.4		

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in section 15.209. At frequencies equal to or less than 1 000 MHz, compliance with the limits in section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1 000 MHz, compliance with the emission limits in section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in section 15.35 apply to these measurements.

Test procedure

ANSI C63.10-2013

Test settings**Peak field strength measurements**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in table
3. VBW \geq (3 \times RBW)
4. Detector = peak
5. Sweep time = auto
6. Trace mode = max hold
7. Allow sweeps to continue until the trace stabilizes

Table. RBW as a function of frequency

Frequency	RBW
9 kHz to 150 kHz	200 Hz to 300 Hz
0.15 MHz to 30 MHz	9 kHz to 10 kHz
30 MHz to 1 000 MHz	100 kHz to 120 kHz
> 1 000 MHz	1 MHz

Average field strength measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1 MHz
3. VBW = 1/T \geq 1 Hz
4. Averaging type was set to RMS to ensure that video filtering was applied in the power domain
5. Detector = peak
6. Sweep time = auto
7. Trace mode = max hold
8. Trace was allowed to run for at least 50 times(1/duty cycle) traces

Notes:

1. $f < 30$ MHz, extrapolation factor of 40 dB/decade of distance. $F_d = 40\log(D_m/D_s)$
 $f \geq 30$ MHz, extrapolation factor of 20 dB/decade of distance. $F_d = 20\log(D_m/D_s)$

Where:

 F_d = Distance factor in dB D_m = Measurement distance in meters D_s = Specification distance in meters

2. Factors(dB) = Antenna factor(dB/m) + Cable loss(dB) + or Amp. gain(dB) + or F_d (dB)
3. The worst-case emissions are reported however emissions whose levels were not within 20 dB of respective limits were not reported.
4. Average test would be performed if the peak result were greater than the average limit.
5. ¹⁾ mean is restricted band.

6. According to part 15.31(f)(2), an extrapolation factor of 40 dB/decade is applied because measured distance of radiated emission is 3 m.

Duty cycle correction factor calculation:

According to 7.5 Procedure for determining the average value of pulsed emissions

Duty Cycle Correction Factor Calculation

- Worst case : AFH mode
- Channel hop rate = 800 hops/second
- Hopping rate for DH5 mode = 800 hops/second / 5 (6 slots for DH5) = 133.33 hops/second
- Time per channel hop = 1 / 133.33 hops/second = 7.50 ms
- Time to cycle through all channels = 7.50 x 20 channels(AFH mode) = 150 ms
- Number of times transmitter hits on one channel = 100 ms / Time to cycle through all channels (ms)
= 100 ms / 150 ms = 1 time
- Worst case Dwell time = 7.5 ms
- Duty Cycle Correction Factor = $20\log(7.5 \text{ ms}/100 \text{ ms}) = -22.5 \text{ dB}$

KCTL

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SRF0081-A

Page (37) of (76)




Test results (Below 30 MHz) – Worst case: GFSK High frequency

Ant 1

Frequency	Pol.	Reading	Cable Loss	Amp Gain	Antenna Factor	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB)	(dB($\mu V/m$))	(dB($\mu V/m$))	(dB)
No spurious emissions were detected within 20 dB of the limit.									


Horizontal/Vertical

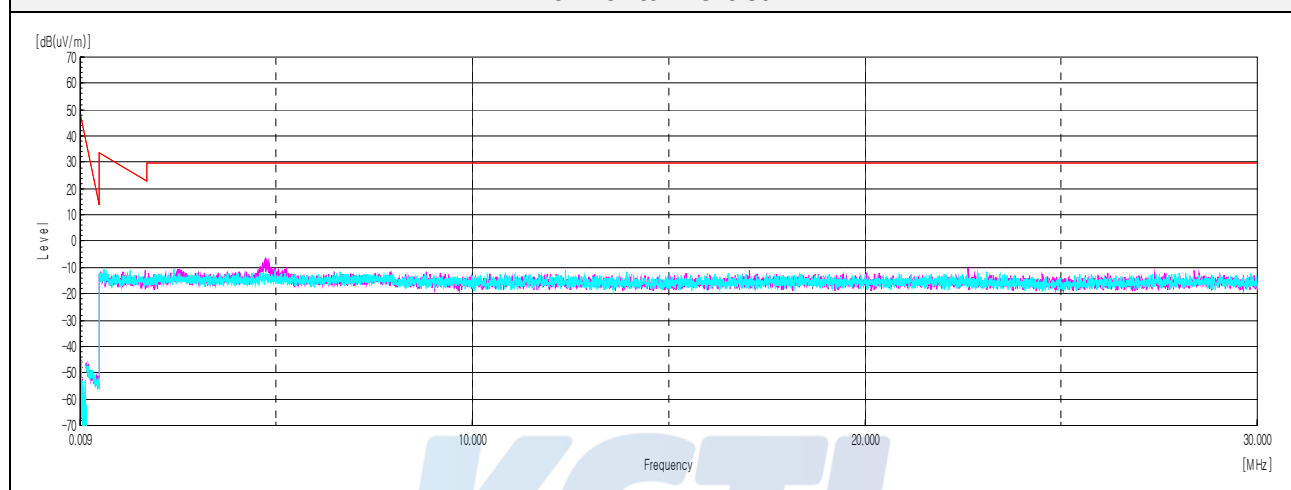

Ant 2

Frequency	Pol.	Reading	Cable Loss	Amp Gain	Antenna Factor	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB)	(dB($\mu V/m$))	(dB($\mu V/m$))	(dB)
No spurious emissions were detected within 20 dB of the limit.									

Horizontal/Vertical

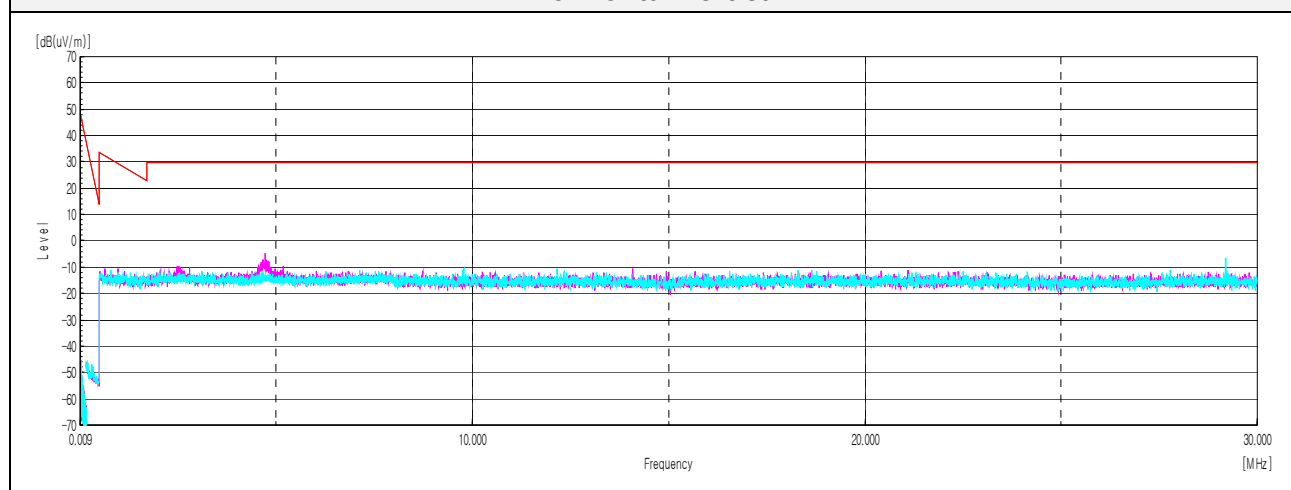

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SRF0081-A

Page (38) of (76)


KCTL

Test results (Below 1 000 MHz) – Worst case: GFSK High frequency

Ant 1

Frequency (MHz)	Pol. (V/H)	Reading (dB(μ V))	Antenna Factor (dB)	Amp. + Cable (dB)	DCCF (dB)	Result (dB(μ V/m))	Limit (dB(μ V/m))	Margin (dB)
Quasi peak data								
35.82	V	47.70	17.56	-30.53	-	34.73	40.00	5.27
41.76	H	40.70	18.40	-30.41	-	28.69	40.00	11.31
66.38	V	22.40	16.91	-30.01	-	9.30	40.00	30.70
95.96	H	22.00	14.43	-29.42	-	7.01	43.50	36.49
224.00	H	21.50	16.30	-28.19	-	9.61	46.00	36.39
400.18	H	19.60	21.70	-27.08	-	14.22	46.00	31.78

Horizontal/Vertical

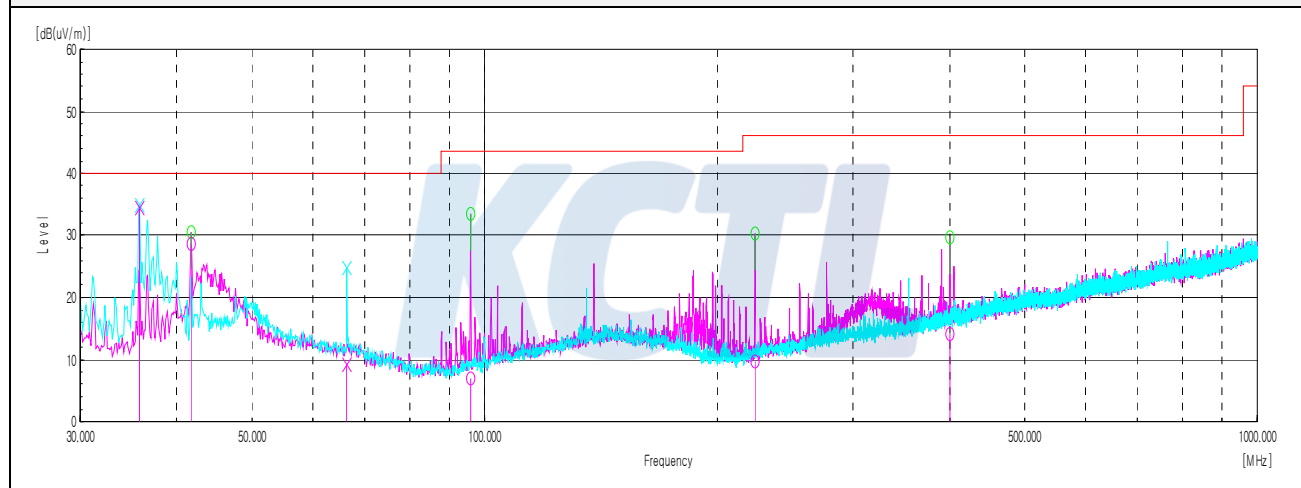

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SRF0081-A


Page (39) of (76)

KCTL

Ant 2

Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB($\mu V/m$))	(dB($\mu V/m$))	(dB)
Quasi peak data								
35.70	V	44.20	17.54	-30.54	-	31.20	40.00	8.80
68.44	H	38.90	16.62	-29.97	-	25.55	40.00	14.45
92.20	V	40.20	13.96	-29.44	-	24.72	43.50	18.78
149.31	H	36.60	19.19	-28.81	-	26.98	43.50	16.52
288.02	H	44.00	19.06	-27.90	-	35.16	46.00	10.84
394.11	H	26.90	21.58	-27.12	-	21.36	46.00	24.64

Horizontal/Vertical

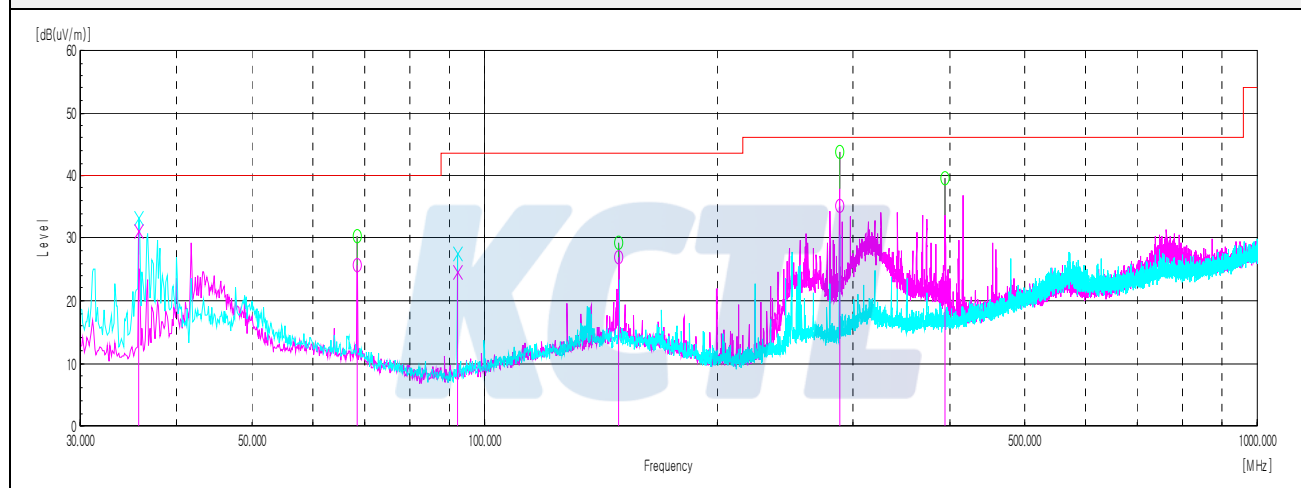

This test report shall not be reproduced, except in full, without the written approval

KCTL-TIR001-003/2

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SRF0081-A

Page (40) of (76)

KCTL

Test results (Above 1 000 MHz)


GFSK

Ant 1

Low Channel

Frequency (MHz)	Pol. (V/H)	Reading (dB(μ V))	Antenna Factor (dB)	Amp. + Cable (dB)	DCCF (dB)	Result (dB(μ V/m))	Limit (dB(μ V/m))	Margin (dB)
Peak data								
1 601.80 ¹⁾	H	72.48	28.63	-50.10	-	51.01	74.00	22.99
2 387.73 ¹⁾	V	39.71	31.88	-29.05	-	42.54	74.00	31.46
4 804.09 ¹⁾	V	77.95	33.92	-52.28	-	59.59	74.00	14.41
Average Data								
4 804.09 ¹⁾	V	77.95	33.92	-52.28	-22.50	37.09	54.00	16.91

Horizontal/Vertical for Band-edge

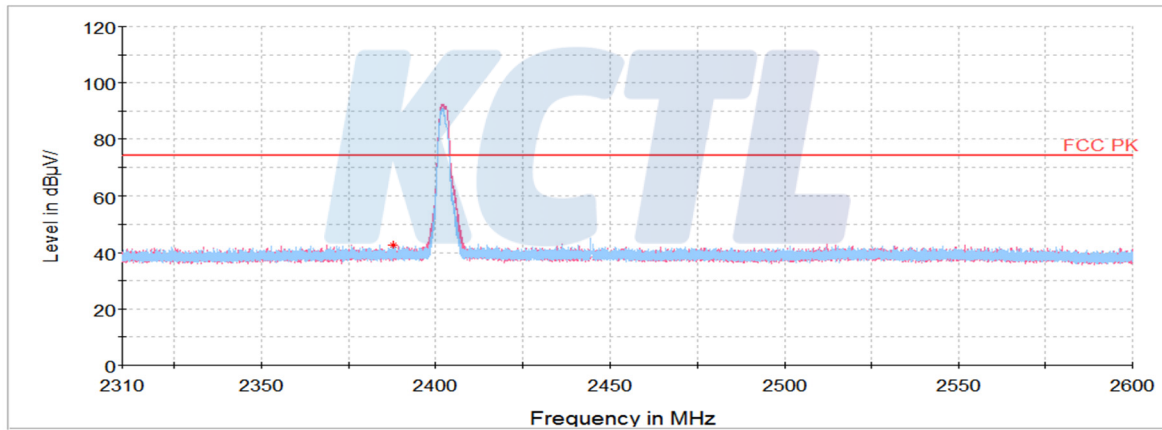

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SRF0081-A


Page (41) of (76)




Horizontal/Vertical for 1 GHz ~ 3.5 GHz

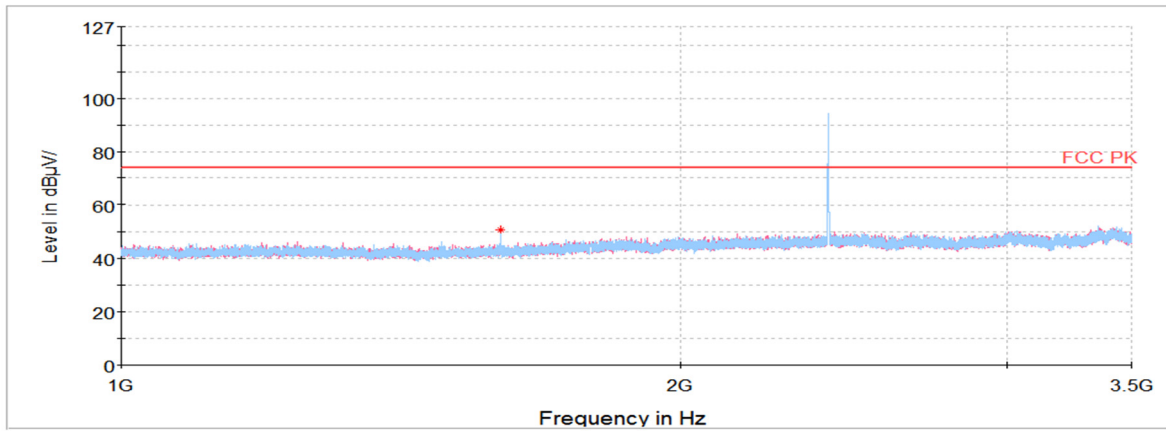

Horizontal/Vertical for 3.5 GHz ~ 18 GHz

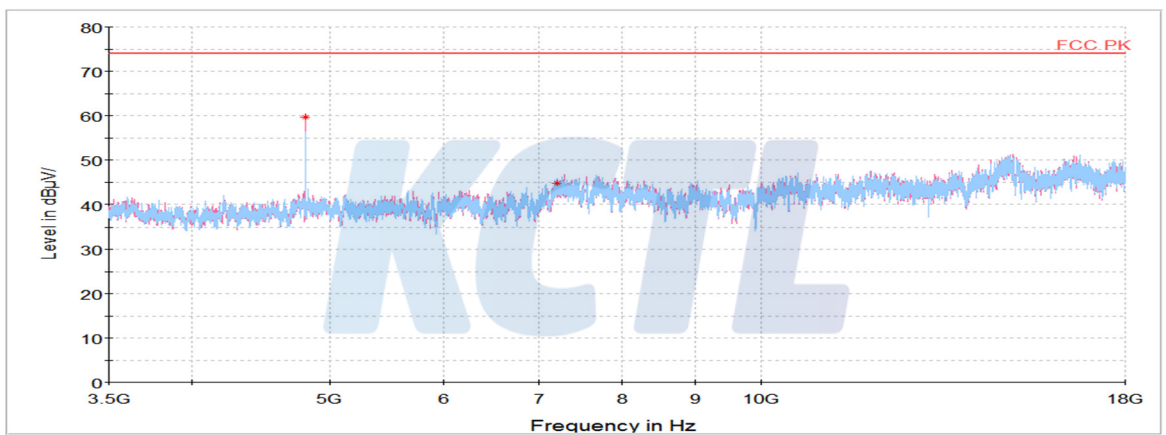

Horizontal/Vertical for 18 GHz ~ 26.5 GHz

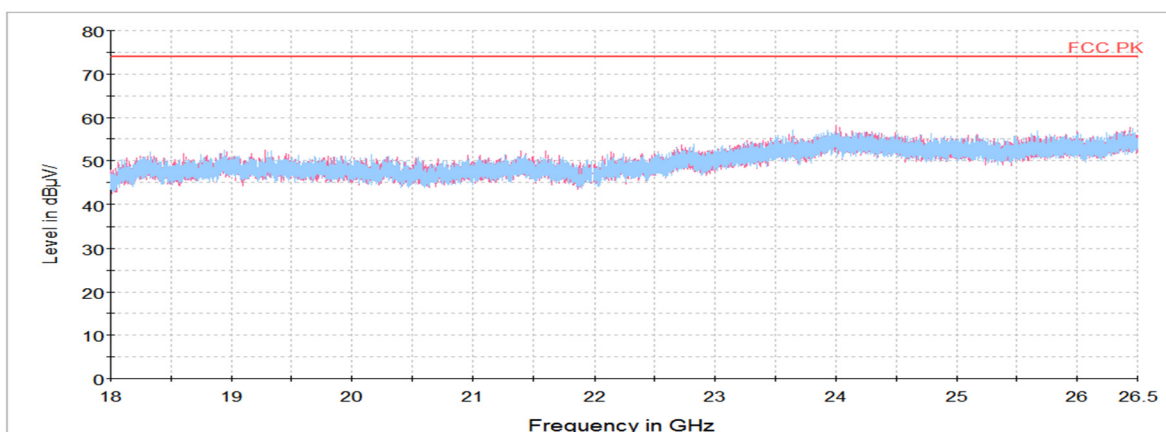

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SRF0081-A


Page (42) of (76)

**Middle Channel**


Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μ V))	(dB)	(dB)	(dB)	(dB(μ V/m))	(dB(μ V/m))	(dB)
Peak data								
1 626.48 ¹⁾	H	70.51	28.78	-50.01	-	49.28	74.00	24.72
4 881.58 ¹⁾	V	71.21	33.95	-54.42	-	50.74	74.00	23.26
7 323.02 ¹⁾	H	61.26	35.40	-51.44	-	45.22	74.00	28.78
Average Data								
No spurious emissions were detected within 20 dB of the limit.								




Horizontal/Vertical for 1 GHz ~ 3.5 GHz

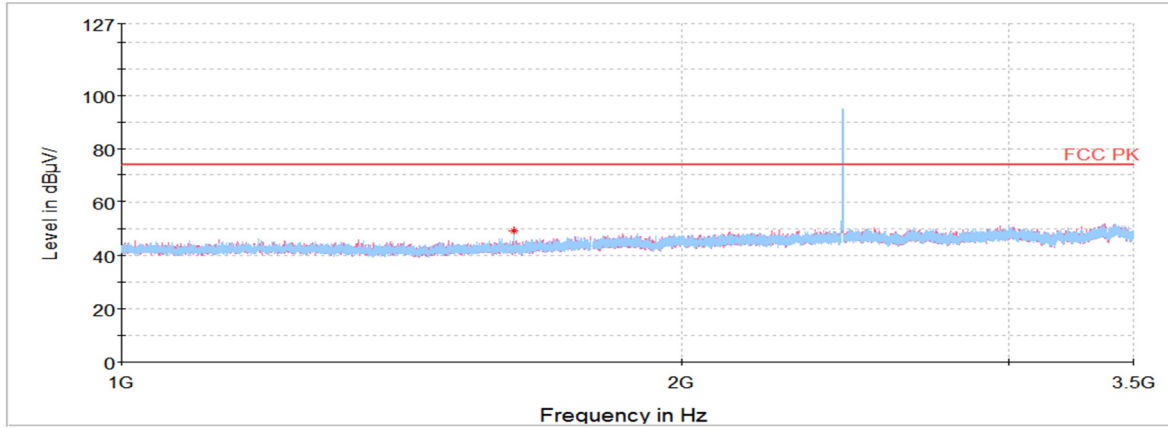

Horizontal/Vertical for 3.5 GHz ~ 18 GHz

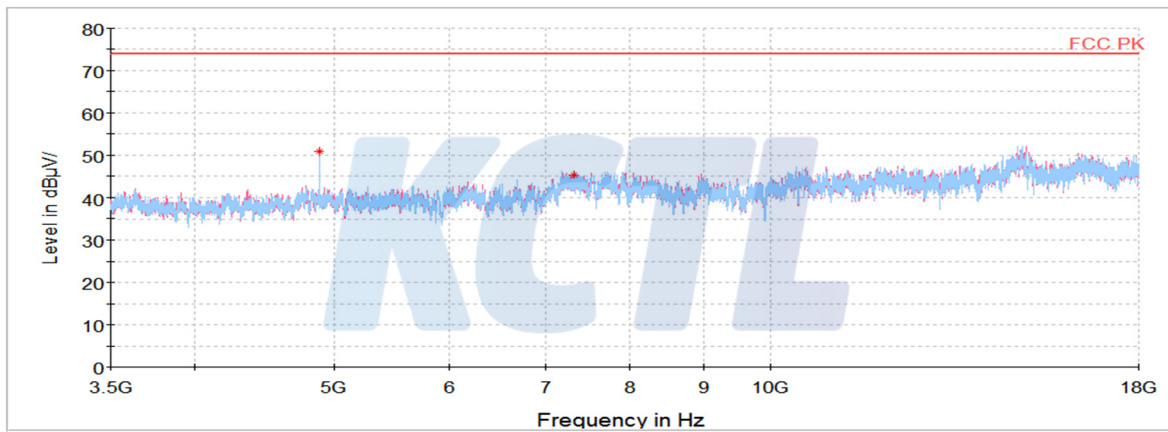

Horizontal/Vertical for 18 GHz ~ 26.5 GHz

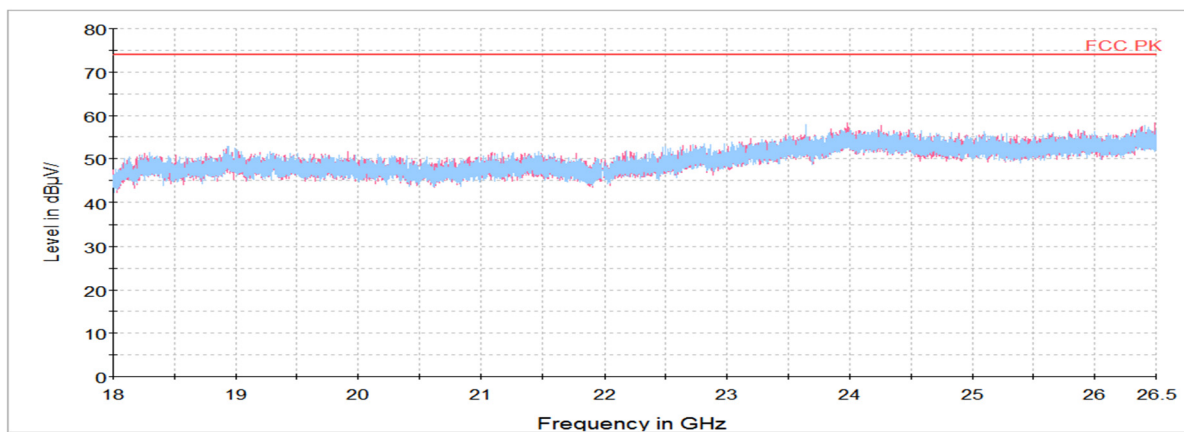

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SRF0081-A


Page (44) of (76)

KCTL


High Channel

Frequency (MHz)	Pol. (V/H)	Reading (dB(μ V))	Antenna Factor (dB)	Amp. + Cable (dB)	DCCF (dB)	Result (dB(μ V/m))	Limit (dB(μ V/m))	Margin (dB)
Peak data								
2 483.57 ¹⁾	V	40.91	32.07	-29.21	-	43.77	74.00	30.23
4 957.70 ¹⁾	V	67.09	33.98	-54.81	-	46.26	74.00	27.74
7 440.83 ¹⁾	V	60.16	35.40	-50.86	-	44.70	74.00	29.30
Average Data								
No spurious emissions were detected within 20 dB of the limit.								


Horizontal/Vertical for Band-edge

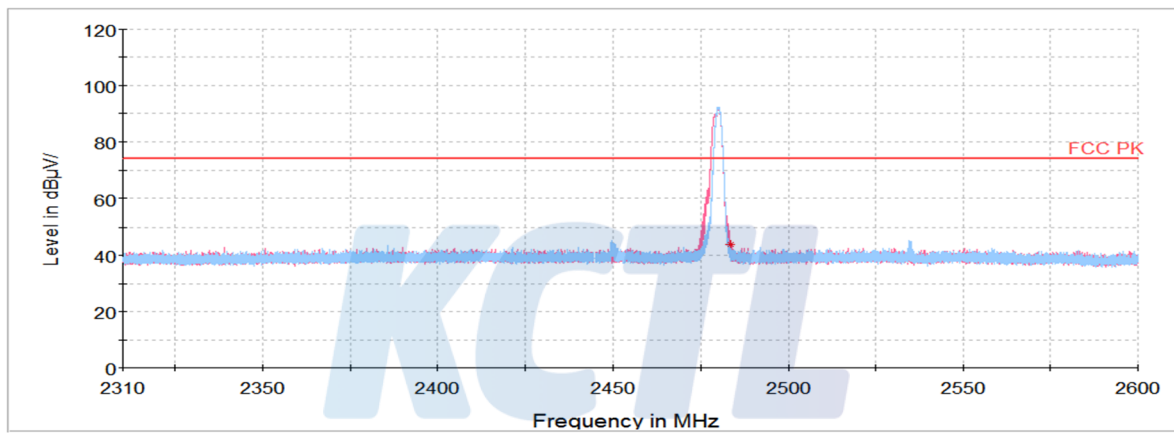


Horizontal/Vertical for 1 GHz ~ 3.5 GHz

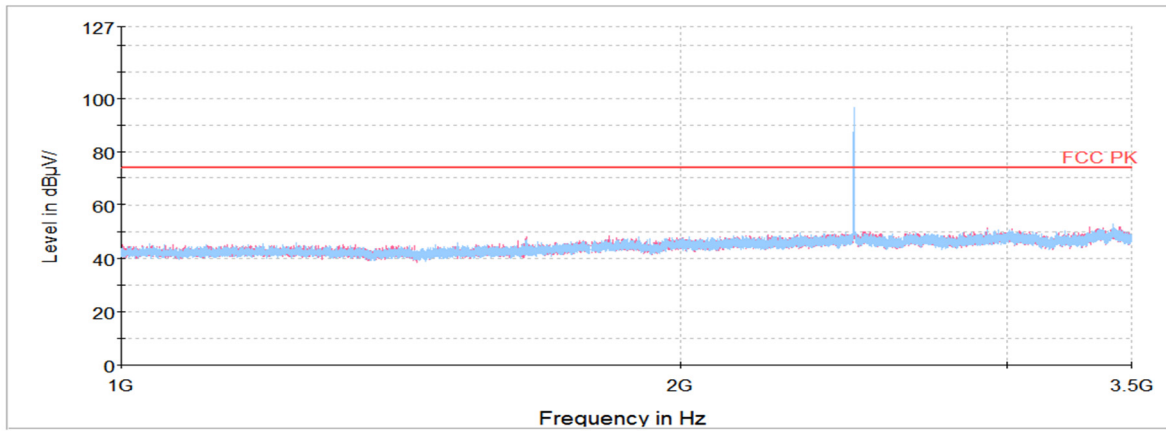

Horizontal/Vertical for 3.5 GHz ~ 18 GHz

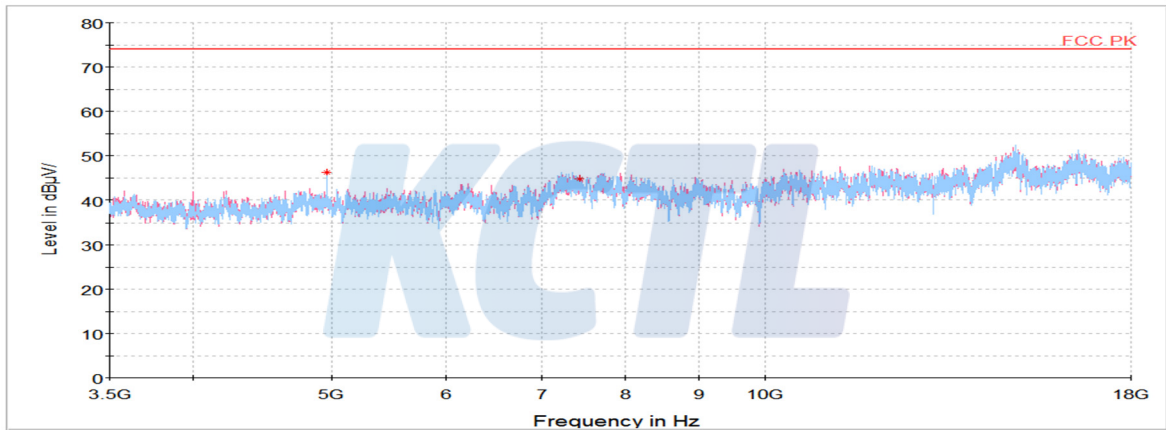

Horizontal/Vertical for 18 GHz ~ 26.5 GHz

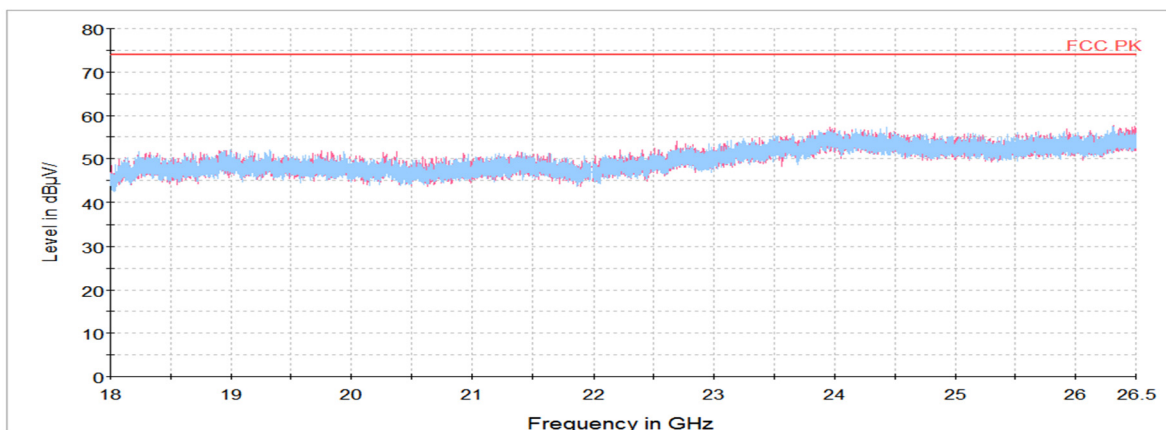

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SRF0081-A

Page (46) of (76)


KCTL

8DPSK

Low Channel

Frequency (MHz)	Pol. (V/H)	Reading (dB(μ V))	Antenna Factor (dB)	Amp. + Cable (dB)	DCCF (dB)	Result (dB(μ V/m))	Limit (dB(μ V/m))	Margin (dB)
Peak data								
1 602.19 ¹⁾	H	71.86	28.63	-50.10	-	50.39	74.00	23.61
2 389.35 ¹⁾	V	39.82	31.88	-29.04	-	42.66	74.00	31.34
4 803.64 ¹⁾	V	67.43	33.92	-52.27	-	49.08	74.00	24.92
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

Horizontal/Vertical for Band-edge

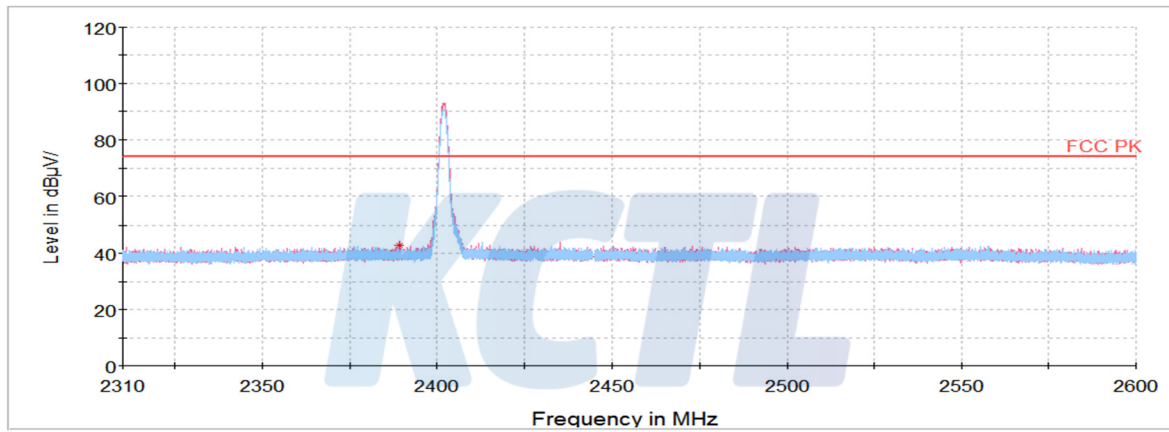

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SRF0081-A


Page (47) of (76)

KCTL


Horizontal/Vertical for 1 GHz ~ 3.5 GHz

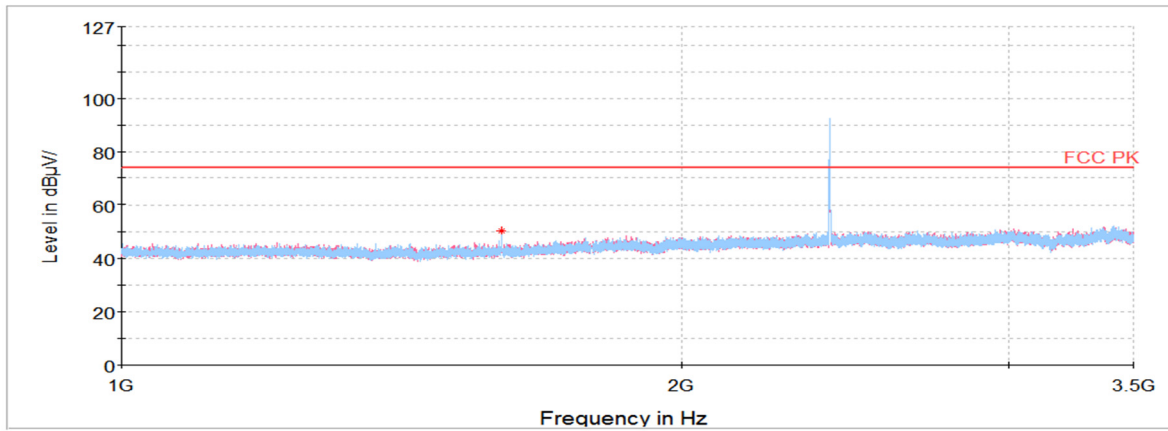

Horizontal/Vertical for 3.5 GHz ~ 18 GHz

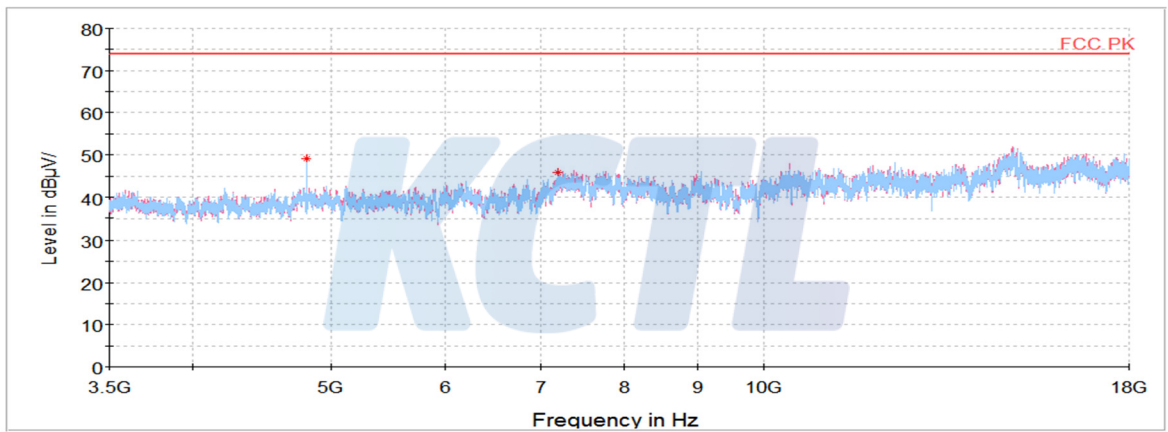

Horizontal/Vertical for 18 GHz ~ 26.5 GHz

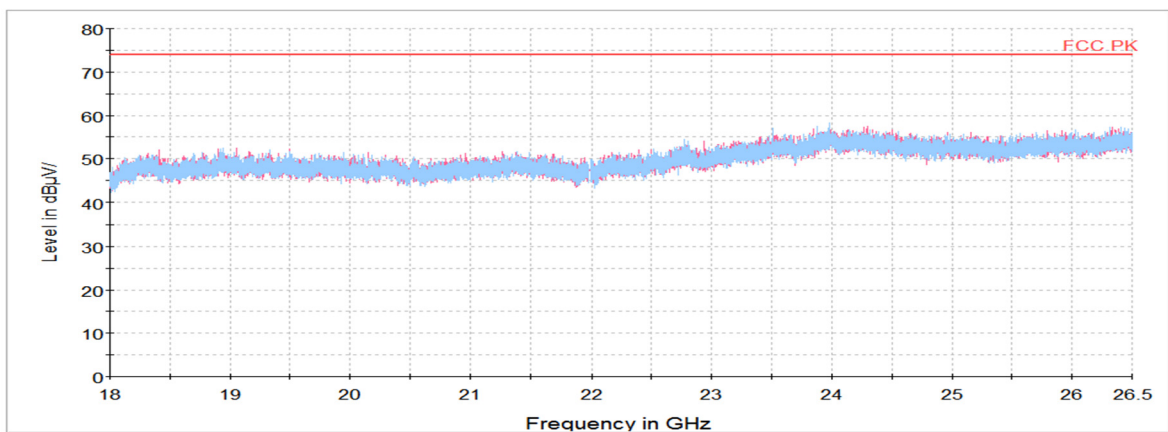

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SRF0081-A

Page (48) of (76)

**Middle Channel**

Frequency	Pol.	Reading	Antenna Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB($\mu V/m$))	(dB($\mu V/m$))	(dB)
Peak data								
1 626.88	H	70.34	28.79	-50.01	-	49.12	74.00	19.08
4 881.58 ¹⁾	H	71.93	33.95	-54.42	-	51.46	74.00	22.54
7 323.92 ¹⁾	H	60.82	35.40	-51.44	-	44.78	74.00	29.22
Average Data								
No spurious emissions were detected within 20 dB of the limit.								



KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SRF0081-A


Page (49) of (76)



Horizontal/Vertical for 1 GHz ~ 3.5 GHz

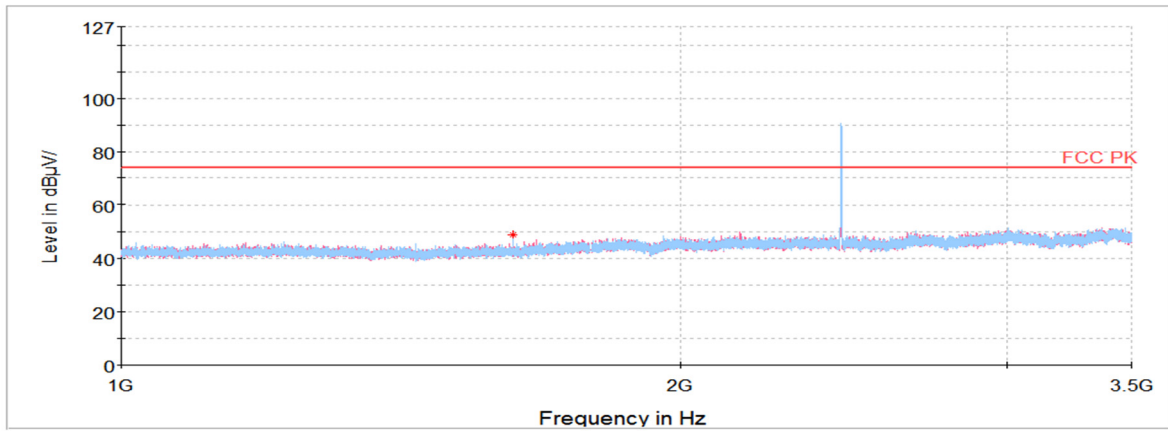

Horizontal/Vertical for 3.5 GHz ~ 18 GHz

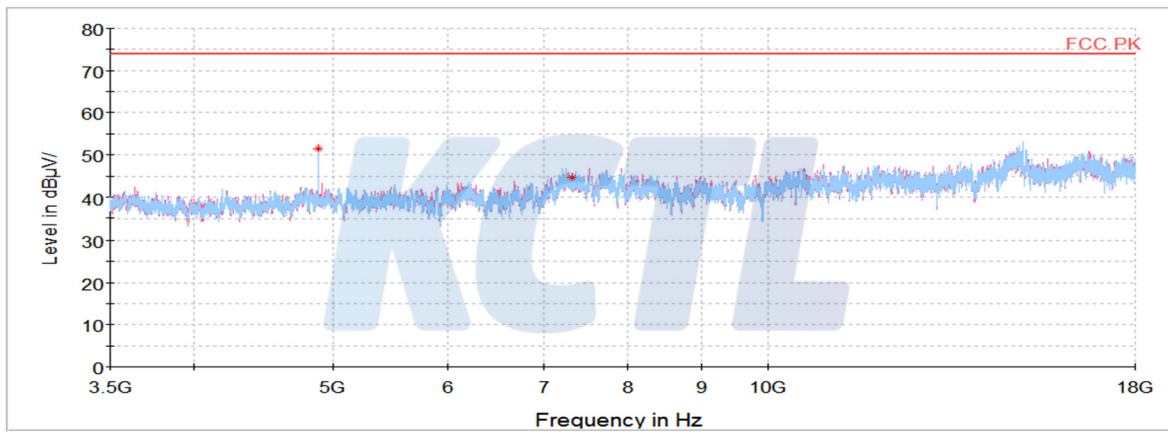

Horizontal/Vertical for 18 GHz ~ 26.5 GHz

