



FCC PART 22H, PART 24E

TEST REPORT

For

Panasonic India Pvt Ltd

12th Floor ,Ambience Tower, Ambience Island NH-8, Gurgaon, Haryana, 122 002, India

FCC ID: 2APTIS54T8

Report Type: Original Report	Product Type: Tablet
Report Number: <u>RSZ191015003-00D</u>	
Report Date:	<u>2019-11-25</u>
Nancy Wang	
Reviewed By:	<u>RF Engineer</u>
Prepared By:	Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

Note: This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “★”.

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk *. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY	3
MEASUREMENT UNCERTAINTY.....	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	5
DESCRIPTION OF TEST CONFIGURATION	5
EQUIPMENT MODIFICATIONS	5
SUPPORT EQUIPMENT LIST AND DETAILS	5
BLOCK DIAGRAM OF TEST SETUP	5
SUMMARY OF TEST RESULTS	6
TEST EQUIPMENT LIST	7
FCC §1.1307(B) & §2.1093 - RF EXPOSURE INFORMATION.....	9
APPLICABLE STANDARD	9
TEST RESULT	9
FCC §2.1047 - MODULATION CHARACTERISTIC	10
FCC § 2.1046, § 22.913 (A) & § 24.232 (C); - RF OUTPUT POWER	11
APPLICABLE STANDARD	11
TEST PROCEDURE	11
TEST DATA	11
FCC §2.1049, §22.917, §22.905 & §24.238 - OCCUPIED BANDWIDTH	19
APPLICABLE STANDARD	19
TEST PROCEDURE	19
TEST DATA	19
FCC §2.1051, §22.917(A) & §24.238(A); - SPURIOUS EMISSIONS AT ANTENNA TERMINALS	28
APPLICABLE STANDARD	28
TEST PROCEDURE	28
TEST DATA	28
FCC § 2.1053; § 22.917 (A); § 24.238 (A) SPURIOUS RADIATED EMISSIONS	40
APPLICABLE STANDARD	40
TEST PROCEDURE	40
TEST DATA	40
FCC § 22.917 (A); § 24.238 (A) - BAND EDGES.....	43
APPLICABLE STANDARD	43
TEST PROCEDURE	43
TEST DATA	43
FCC § 2.1055; § 22.355; § 24.235 - FREQUENCY STABILITY	56
APPLICABLE STANDARD	56
TEST PROCEDURE	56
TEST DATA	57

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	Tablet
Tested Model	Tab 8
Frequency Range	Cellular: 824-849 MHz PCS: 1850-1910 MHz LTE B5: 824-849 MHz
Conducted Average Power	GSM850: 29.86dBm(GMSK), 23.46dBm(8PSK) PCS1900: 27.86dBm(GMSK), 22.86dBm(8PSK) LTE Band 5: 19.28dBm
Modulation Technique	2G: GMSK,8PSK 4G: QPSK, 16QAM
Antenna Specification	2G/4G: FPC Antennas
Voltage Range	DC 3.7 V from battery or DC 5.0V from adapter
Date of Test	2019-10-17 to 2019-11-22
Sample serial number	191015003 (Assigned by BACL, Shenzhen)
Received date	2019-10-15
Sample/EUT Status	Good condition
Adapter information	Model:A8A-050200U-US1 Input: AC 100-240V, 50/60Hz, 0.35A Output: DC 5V, 2A

Objective

This test report is prepared on behalf of *Panasonic India Pvt Ltd* in accordance with Part 2-Subpart J, Part 22-Subpart H and Part 24-Subpart E and Subpart 27 of the Federal Communication Commissions rules.

The objective is to determine the compliance of the EUT with FCC rules for output power, modulation characteristic, occupied bandwidth, and spurious emission at antenna terminal, spurious radiated emission, frequency stability and band edge.

Related Submittal(s)/Grant(s)

FCC Part 15.247 DSS and Part 15.247 DTS submissions with FCC ID: 2APTIS54T8.

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2-Subpart J as well as the following parts:

Part 22 Subpart H - Public Mobile Services
Part 24 Subpart E - Personal Communication Services

Applicable Standards: TIA/EIA 603-D.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter	Uncertainty	
Occupied Channel Bandwidth	±5%	
RF output power, conducted	±0.73dB	
Unwanted Emission, conducted	±1.6dB	
Emissions, Radiated	Below 1GHz	±4.75dB
	Above 1GHz	±4.88dB
Temperature	±1°C	
Humidity	±6%	
Supply voltages	±0.4%	

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 342867, the FCC Designation No.: CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The EUT was configured for testing according to TIA/EIA-603-D.

The final qualification test was performed with the EUT operating at normal mode.

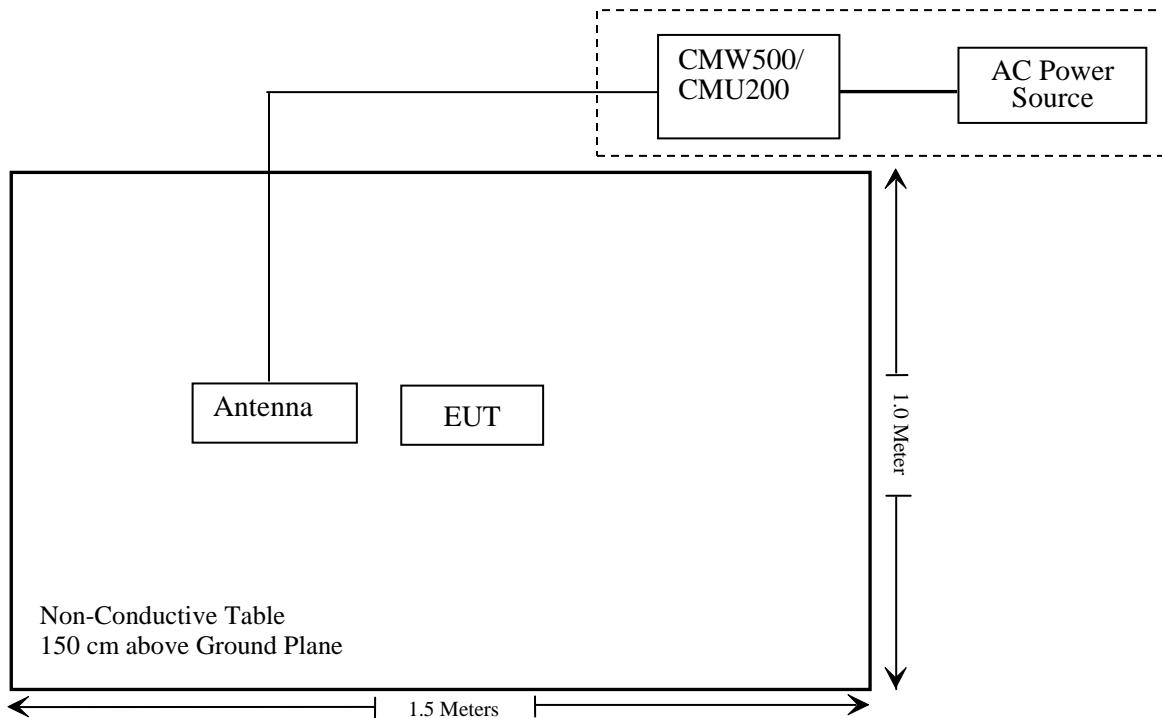
Equipment Modifications

No modification was made to the EUT.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Rohde & Schwarz	Wideband Radio Communication Tester	CMW500	1201.002K50-116218-UY
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	110605

Block Diagram of Test Setup



SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§ 1.1307 , §2.1093	RF Exposure (SAR)	Compliance*
§2.1046; § 22.913 (a); § 24.232 (c)	RF Output Power	Compliance
§ 2.1047	Modulation Characteristics	Not Applicable
§ 2.1049; § 22.905; § 22.917; § 24.238;	Occupied Bandwidth	Compliance
§ 2.1051; § 22.917 (a); § 24.238 (a);	Spurious Emissions at Antenna Terminal	Compliance
§ 2.1053; § 22.917 (a); § 24.238 (a);	Field Strength of Spurious Radiation	Compliance
§ 22.917 (a); § 24.238 (a);	Band Edge	Compliance
§ 2.1055; § 22.355; § 24.235;	Frequency stability	Compliance

Note: * Please refer to SAR report released by BACL, report number: RSZ191015003-SA.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test					
Sunol Sciences	Horn Antenna	DRH-118	A052604	2017-12-22	2020-12-21
Rohde & Schwarz	Signal Analyzer	FSEM	845987/005	2019-07-22	2020-07-21
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2017-12-22	2020-12-21
COM-POWER	pre-amplifier	PA-122	181919	2019-04-20	2020-04-20
Sonoma instrument	Amplifier	310 N	186238	2019-04-20	2020-04-20
Agilent	Signal Generator	N5183A	MY51040755	2018-12-03	2019-12-03
Rohde & Schwarz	EMI Test Receiver	ESR3	102455	2019-07-09	2020-07-08
COM-POWER	Dipole Antenna	AD-100	41000	NCR	NCR
A.H. System	Horn Antenna	SAS-200/571	135	2018-09-01	2021-08-31
UTiFLEX MICRO-C0AX	RF Cable	UFA147A-2362-100100	MFR64639 231029-003	2019-11-12	2020-11-12
Ducommun Technologies	RF Cable	104PEA	218124002	2019-11-12	2020-11-12
Ducommun Technologies	RF Cable	RG-214	1	2019-11-19	2020-05-21
Ducommun Technologies	RF Cable	RG-214	2	2019-11-12	2020-11-12
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-04	2017-12-29	2020-12-28
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-03	2017-12-29	2020-12-28
Heatsink Required	Amplifier	QLW-18405536-J0	15964001002	2019-11-12	2020-11-12
Unknown	High Pass filter	2.8GHz	Unknown	2019-04-20	2020-04-20
Unknown	High Pass filter	1.3GHz	Unknown	2019-04-20	2020-04-20

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSU26	200120	2019-03-02	2020-03-01
ESPEC	Temperature & Humidity Chamber	EL-10KA	9107726	2019-01-05	2020-01-05
Long Wei	DC Power Supply	TPR-6420D	398363	NCR	NCR
Fluke	Digital Multimeter	287	19000011	2019-04-12	2020-04-12
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891	2019-01-15	2020-01-15
Rohde & Schwarz	Wideband Radio Communication Tester	CMW500	1201.002K50-146520-wh	2019-07-09	2020-07-08
Ducommun Technologies	RF Cable	RG-214	3	Each Time	
Ducommun technologies	RF Cable	UFA210A-1-4724-30050U	MFR64369 223410-001	2019-11-12	2020-11-12
WEINSCHEL	3dB Attenuator	6231	666	Each Time	
Unknown	Power Splitter	1620	129	Each Time	

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1307(b) & §2.1093 - RF EXPOSURE INFORMATION

Applicable Standard

FCC§1.1310 and §2.1093.

Test Result

Compliance, please refer to the SAR report: RSZ191015003-SA.

FCC §2.1047 - MODULATION CHARACTERISTIC

According to FCC § 2.1047(d), Part 22H & 24E & 27 there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

FCC §2.1046, §22.913 (a) & §24.232 (c); - RF OUTPUT POWER

Applicable Standard

According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.


According to FCC §2.1046 and §24.232 (C), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB.

Test Procedure

Conducted method:

The RF output of the transmitter was connected to the CMW500/CMU200 through sufficient attenuation.



Radiated method:

TIA 603-D section 2.2.17

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Leo Huang on 2019-10-17.

Conducted Power**Cellular Band (Part 22H)**

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
GSM	128	824.2	29.59	38.45
	190	836.6	29.86	38.45
	251	848.8	29.53	38.45

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
GPRS	128	824.2	29.63	27.53	26.02	24.75	38.45
	190	836.6	29.80	27.62	26.12	24.58	38.45
	251	848.8	29.49	27.57	26.07	24.65	38.45

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
EGPRS	128	824.2	23.34	22.59	20.46	19.54	38.45
	190	836.6	23.46	22.30	20.49	19.72	38.45
	251	848.8	23.18	22.47	20.63	19.68	38.45

PCS Band (Part 24E)

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)		Limit (dBm)
GSM	512	1850.2	27.86		33
	661	1880.0	27.35		33
	810	1909.8	27.39		33

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
GPRS	512	1850.2	27.24	25.96	24.05	22.56	33
	661	1880.0	27.12	25.86	24.20	22.52	33
	810	1909.8	27.16	25.89	24.18	22.36	33

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
EGPRS	512	824.2	22.48	21.41	19.49	18.17	33
	661	836.6	22.86	21.72	19.83	18.35	33
	810	848.8	22.35	21.58	19.95	18.26	33

Peak-to-average ratio (PAR)**Cellular Band**

Mode	Channel	PAR (dB)	Limit (dB)
GSM	Low	1.37	13
	Middle	1.43	13
	High	1.36	13

Mode	Channel	PAR (dB)	Limit (dB)
EGPRS	Low	1.39	13
	Middle	1.56	13
	High	1.45	13

PCS Band

Mode	Channel	PAR (dB)	Limit (dB)
GSM	Low	1.68	13
	Middle	1.46	13
	High	1.55	13

Mode	Channel	PAR (dB)	Limit (dB)
EGPRS	Low	1.24	13
	Middle	1.36	13
	High	1.58	13

Radiated Power
GSM Mode:

Frequency (MHz)	Receiver Reading (dB μ V)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	Level (dBm)	Cable loss (dB)	Antenna Gain (dBd/dBi)			
ERP for Cellular Band (Part 22H), Middle Channel										
836.6	89.04	243	1.3	H	27.0	0.28	0	26.72	38.45	11.73
836.6	82.78	115	1.5	V	20.8	0.28	0	20.52	38.45	17.93
EIRP for PCS Band (Part 24E), Middle Channel										
1880.00	85.72	172	1.6	H	15.9	1.30	9.40	24.00	33	9.00
1880.00	82.71	316	1.5	V	12.9	1.30	9.40	21.00	33	12.00

EDGE Mode:

Frequency (MHz)	Receiver Reading (dB μ V)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	Level (dBm)	Cable loss (dB)	Antenna Gain (dBd/dBi)			
ERP, Cellular Band (Part 22H), Middle Channel										
836.6	83.86	344	1.8	H	21.9	0.28	0	21.62	38.45	16.83
836.6	79.29	196	1.1	V	17.3	0.28	0	17.02	38.45	21.43
EIRP, PCS Band (Part 24E), Middle Channel										
1880.00	82.42	134	1.7	H	12.6	1.30	9.40	20.70	33	12.30
1880.00	79.20	114	1.4	V	9.4	1.30	9.40	17.50	33	15.50

Note:

Absolute Level = Substituted Level - Cable loss + Antenna Gain

Margin = Limit- Absolute Level

dBd is for the ERP, dBi is for EIRP.

LTE Band 5:**Maximum Output Power**

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4	QPSK	RB Size=1, RB Offset=0	19.01	19.16	18.52
		RB Size=1, RB Offset=2	19.09	18.57	18.58
		RB Size=1, RB Offset=5	18.76	18.74	19.21
		RB Size=3, RB Offset=0	18.62	18.08	18.35
		RB Size=3, RB Offset=1	18.31	18.46	18.17
		RB Size=3, RB Offset=2	18.43	18.59	18.50
		RB Size=6, RB Offset=0	18.64	18.26	18.06
	16QAM	RB Size=1, RB Offset=0	18.52	18.95	19.02
		RB Size=1, RB Offset=2	19.16	18.58	19.21
		RB Size=1, RB Offset=5	18.86	19.12	19.28
		RB Size=3, RB Offset=0	18.50	18.62	18.45
		RB Size=3, RB Offset=1	18.11	18.10	18.63
		RB Size=3, RB Offset=2	18.25	18.45	18.47
		RB Size=6, RB Offset=0	18.43	18.18	18.57
3.0	QPSK	RB Size=1, RB Offset=0	18.71	18.71	19.25
		RB Size=1, RB Offset=7	18.76	18.99	18.83
		RB Size=1, RB Offset=14	18.93	18.51	18.74
		RB Size=8, RB Offset=0	18.40	18.51	18.01
		RB Size=8, RB Offset=4	18.38	18.46	18.30
		RB Size=8, RB Offset=7	18.13	18.12	18.63
		RB Size=15, RB Offset=0	18.76	18.65	18.76
	16QAM	RB Size=1, RB Offset=0	18.59	19.17	18.62
		RB Size=1, RB Offset=7	19.15	19.22	19.09
		RB Size=1, RB Offset=14	19.27	18.96	18.58
		RB Size=8, RB Offset=0	18.69	18.48	18.05
		RB Size=8, RB Offset=4	18.53	18.66	18.16
		RB Size=8, RB Offset=7	18.28	18.48	18.33
		RB Size=15, RB Offset=0	18.70	18.41	18.09

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5.0	QPSK	RB Size=1, RB Offset=0	18.55	19.22	19.26
		RB Size=1, RB Offset=12	18.62	19.08	18.77
		RB Size=1, RB Offset=24	18.86	18.67	19.16
		RB Size=12, RB Offset=0	18.65	18.44	18.58
		RB Size=12, RB Offset=6	18.71	18.29	18.29
		RB Size=12, RB Offset=11	18.44	18.78	18.25
		RB Size=25, RB Offset=0	18.26	18.52	18.35
	16QAM	RB Size=1, RB Offset=0	18.73	18.90	18.93
		RB Size=1, RB Offset=12	19.02	18.94	18.73
		RB Size=1, RB Offset=24	18.96	18.67	19.04
		RB Size=12, RB Offset=0	18.07	18.65	18.06
		RB Size=12, RB Offset=6	18.34	18.21	18.54
		RB Size=12, RB Offset=11	18.63	18.18	18.22
		RB Size=25, RB Offset=0	18.36	18.68	18.43
10.0	QPSK	RB Size=1, RB Offset=0	18.97	18.93	18.98
		RB Size=1, RB Offset=24	18.56	19.20	19.24
		RB Size=1, RB Offset=49	18.84	18.81	19.21
		RB Size=25, RB Offset=0	18.31	18.48	18.49
		RB Size=25, RB Offset=12	18.37	18.08	18.73
		RB Size=25, RB Offset=24	18.17	18.52	18.41
		RB Size=50, RB Offset=0	18.66	18.27	18.47
	16QAM	RB Size=1, RB Offset=0	18.55	18.77	18.8
		RB Size=1, RB Offset=24	18.52	18.68	18.71
		RB Size=1, RB Offset=49	18.88	19.17	18.87
		RB Size=25, RB Offset=0	18.78	18.47	18.68
		RB Size=25, RB Offset=12	18.47	18.48	18.63
		RB Size=25, RB Offset=24	18.59	18.01	18.18
		RB Size=50, RB Offset=0	18.36	18.03	18.51

Peak-to-average ratio (PAR)

Modulation	Middle Channel (dB)	PAR Limit (dB)	Result
QPSK (1RB Size)	4.56	13	Pass
QPSK (50RB Size)	4.83	13	Pass
16QAM (1RB Size)	4.45	13	Pass
16QAM (50RB Size)	4.58	13	Pass

QPSK:

Frequency (MHz)	Receiver Reading (dB μ V)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)				
			Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dBd)						
Middle Channel													
1.4 MHz Bandwidth													
836.5	77.43	353	1.1	H	15.4	0.28	0	15.12	38.45				
836.5	74.69	256	1.7	V	12.7	0.28	0	12.42	38.45				
3 MHz Bandwidth													
836.5	76.98	218	1.6	H	15.0	0.28	0	14.72	38.45				
836.5	73.86	333	1.7	V	11.9	0.28	0	11.62	38.45				
5 MHz Bandwidth													
836.5	77.25	308	1.2	H	15.3	0.28	0	15.02	38.45				
836.5	73.44	286	1.7	V	11.4	0.28	0	11.12	38.45				
10 MHz Bandwidth													
836.5	77.18	217	1.3	H	15.2	0.28	0	14.92	38.45				
836.5	73.35	320	1.5	V	11.4	0.28	0	11.12	38.45				

16QAM:

Frequency (MHz)	Receiver Reading (dB μ V)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)				
			Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dBd)						
Middle Channel													
1.4 MHz Bandwidth													
836.5	78.96	328	1.3	H	17.0	0.28	0	16.72	38.45				
836.5	75.03	138	1.8	V	13.0	0.28	0	12.72	38.45				
3 MHz Bandwidth													
836.5	78.25	328	1.7	H	16.3	0.28	0	16.02	38.45				
836.5	74.83	106	1.8	V	12.8	0.28	0	12.52	38.45				
5 MHz Bandwidth													
836.5	78.19	174	1.8	H	16.2	0.28	0	15.92	38.45				
836.5	74.20	127	2.2	V	12.2	0.28	0	11.92	38.45				
10 MHz Bandwidth													
836.5	78.37	226	1.5	H	16.4	0.28	0	16.12	38.45				
836.5	74.13	331	1.3	V	12.1	0.28	0	11.82	38.45				

Note:

All above data were tested with no amplifier

Absolute Level = Substituted Level - Cable loss + Antenna Gain

Margin = Limit- Absolute Level

FCC §2.1049, §22.917, §22.905 & §24.238 - OCCUPIED BANDWIDTH

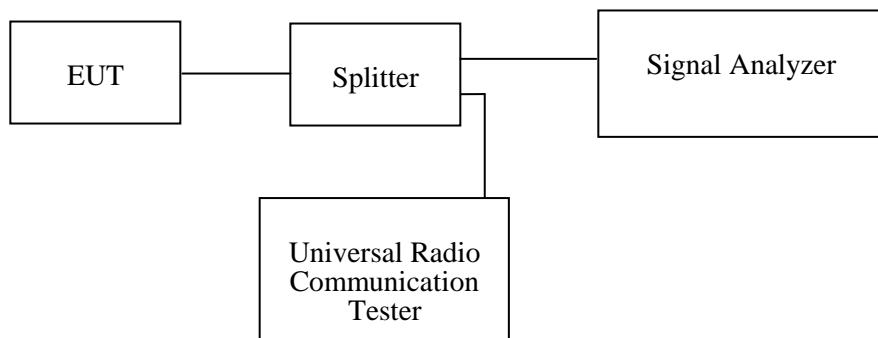
Applicable Standard

FCC 47 §2.1049, §22.917, §22.905 and §24.238.

Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 1% to 5% of the anticipated emission bandwidth and the 26 dB & 99% bandwidth was recorded.



Test Data

Environmental Conditions

Temperature:	24~25 °C
Relative Humidity:	50~55 %
ATM Pressure:	100.9~101.0 kPa

The testing was performed by Leo Huang on 2019-10-19 to 2019-11-20.

EUT operation mode: Transmitting

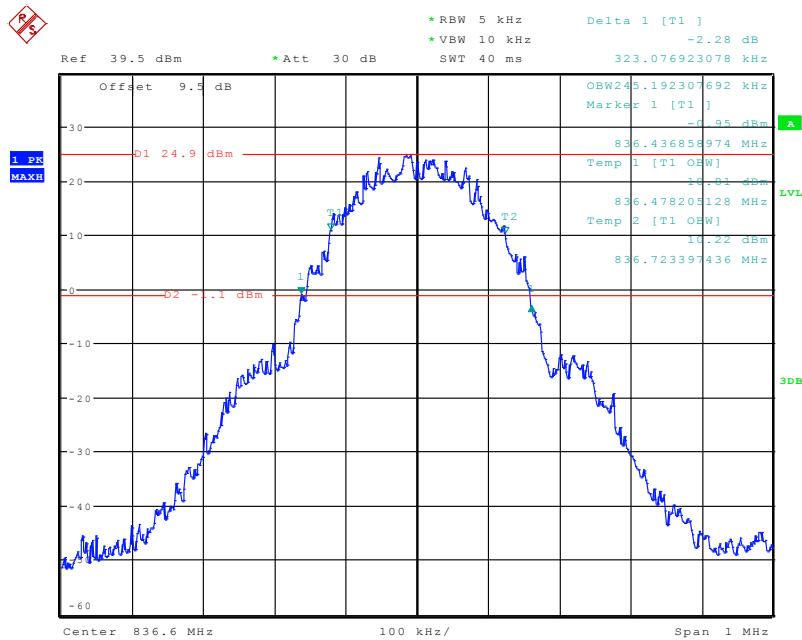
Test Result: Compliance. Please refer to the following tables and plots.

Cellular Band (Part 22H)

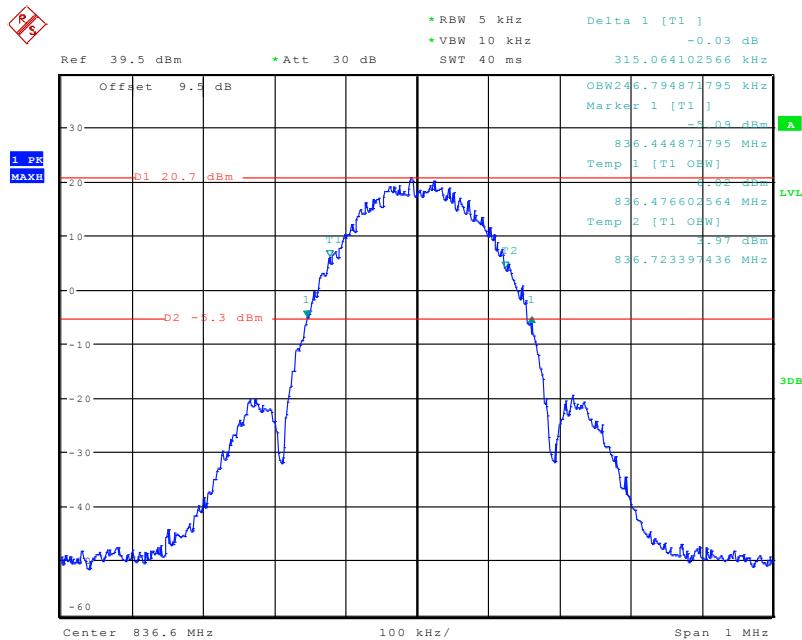
Mode	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM(GMSK)	836.6	245.19	323.08
EGPRS(8PSK)	836.6	246.79	315.06

PCS Band (Part 24E)

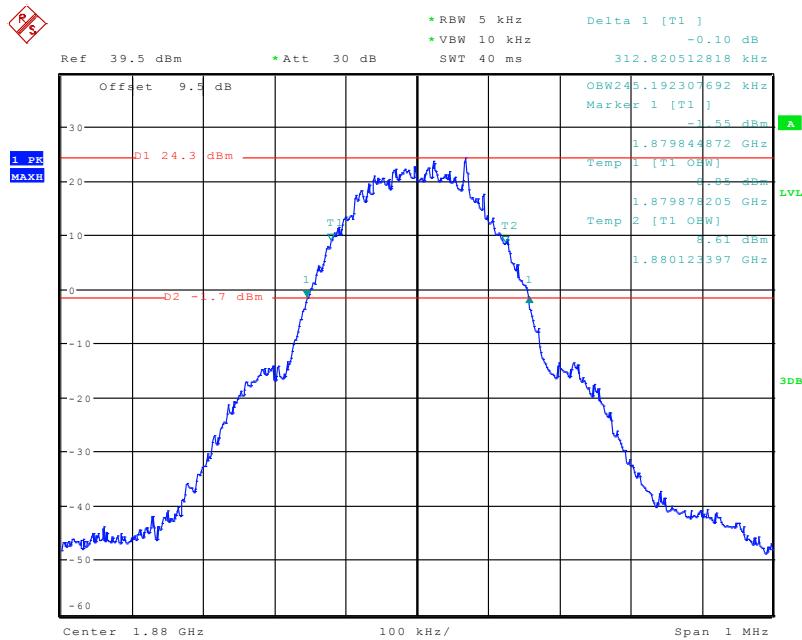
Mode	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM(GMSK)	1880.0	245.19	312.82
EGPRS(8PSK)	1880.0	246.79	319.23

Cellular Band (Part 22H)**26 dB Emissions &99% Occupied Bandwidth for GSM (GMSK) Mode**

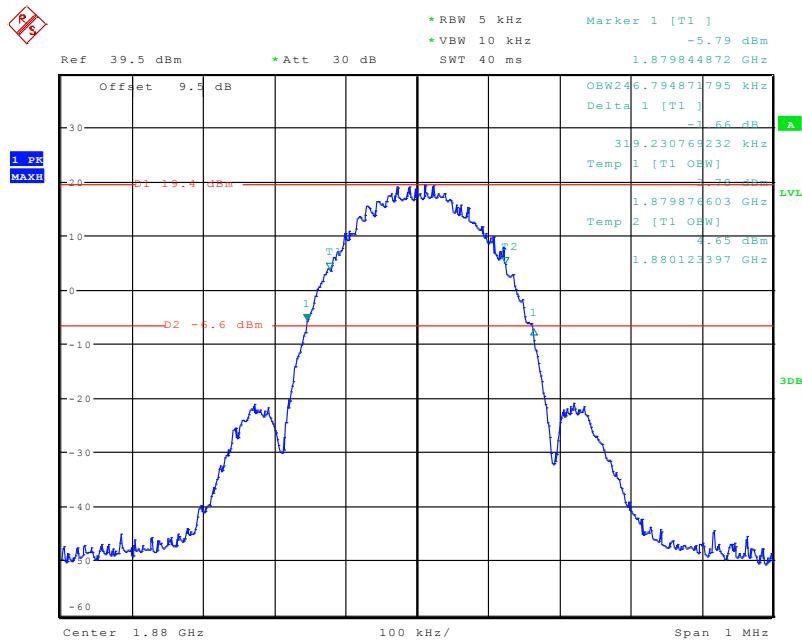
Date: 20.NOV.2019 11:06:36

26 dB Emissions &99% Occupied Bandwidth for EDGE Mode

Date: 20.NOV.2019 11:26:27

PCS Band (Part 24E)**26 dB Emissions &99% Occupied Bandwidth for GSM (GMSK) Mode**

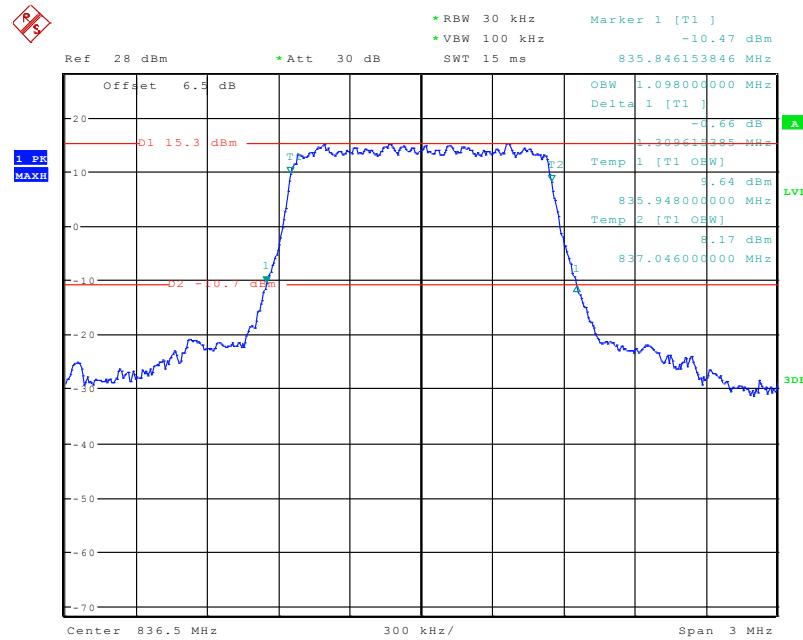
Date: 20.NOV.2019 11:36:54

26 dB Emissions &99% Occupied Bandwidth for EDGE Mode

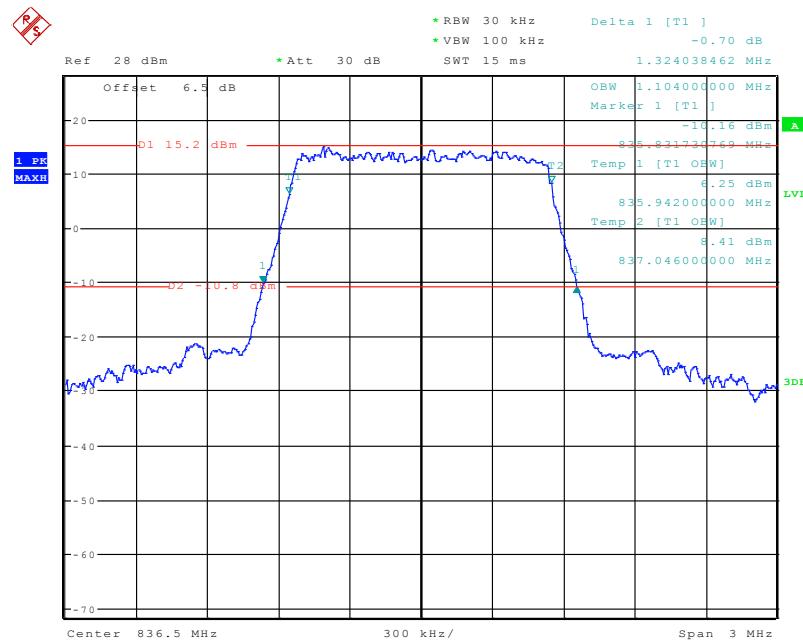
Date: 20.NOV.2019 11:53:26

LTE Band 5: (Middle Channel)

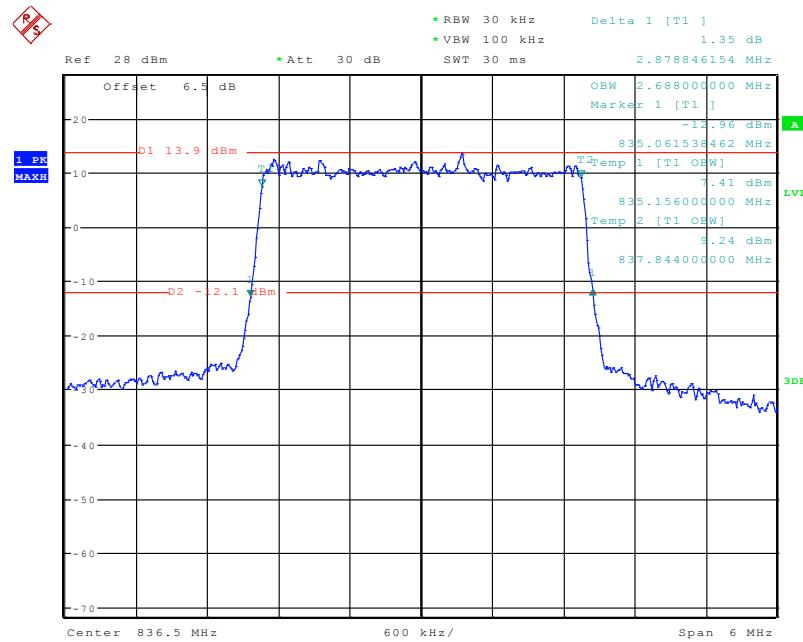
Bandwidth (MHz)	Modulation	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
1.4	QPSK	1.10	1.31
	16QAM	1.10	1.32
3.0	QPSK	2.69	2.88
	16QAM	2.69	2.91
5.0	QPSK	4.48	4.83
	16QAM	4.48	4.78
10.0	QPSK	8.96	9.45
	16QAM	8.96	9.33

QPSK (1.4 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

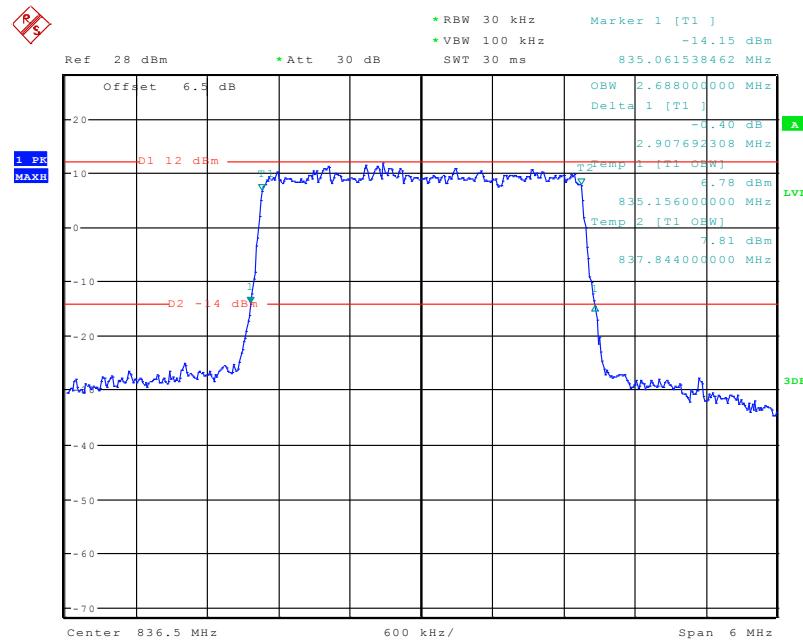
Date: 19.OCT.2019 14:35:03

16-QAM (1.4 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

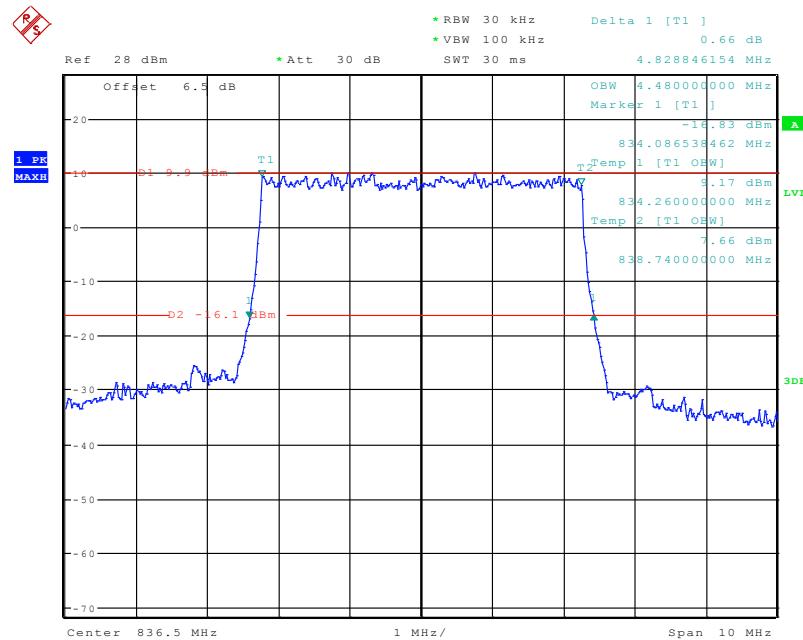
Date: 19.OCT.2019 14:36:11

QPSK (3.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

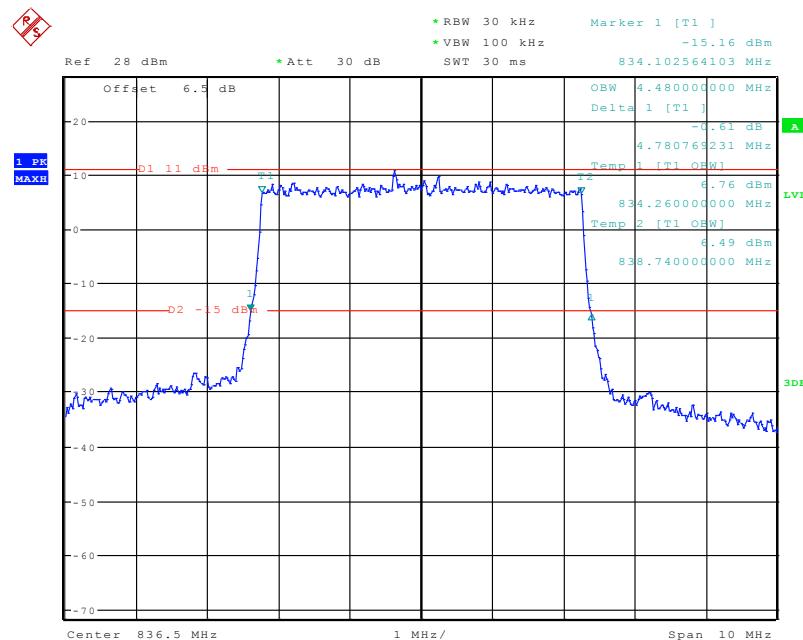
Date: 19.OCT.2019 14:34:08

16-QAM (3.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

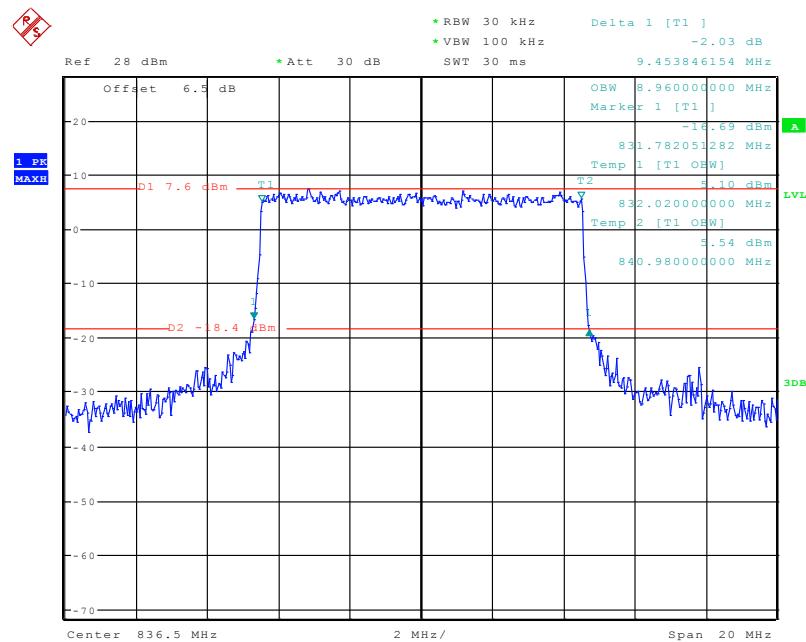
Date: 19.OCT.2019 14:32:50

QPSK (5.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

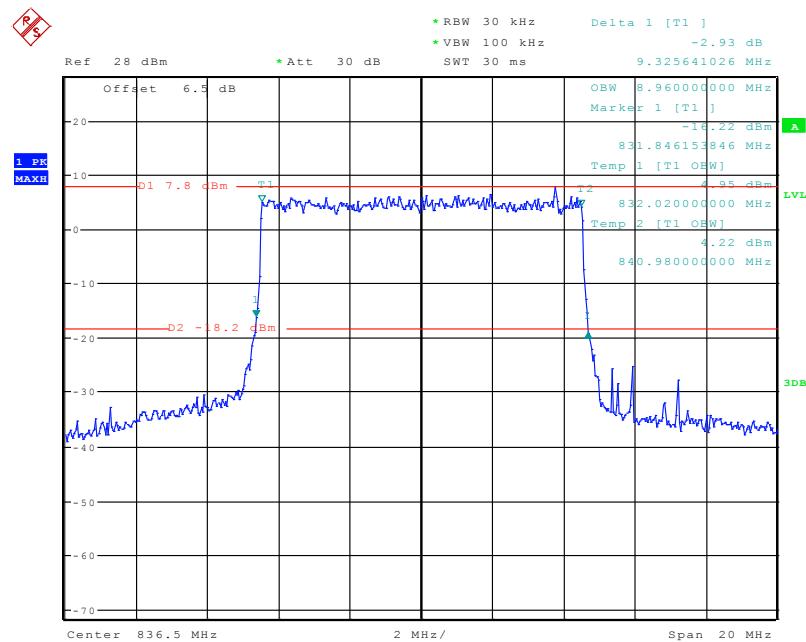
Date: 19.OCT.2019 14:32:07

16-QAM (5.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

Date: 19.OCT.2019 14:30:58

QPSK (10.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

Date: 19.OCT.2019 14:28:12

16-QAM (10.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

Date: 19.OCT.2019 14:29:36

FCC §2.1051, §22.917(a) & §24.238(a); - SPURIOUS EMISSIONS AT ANTENNA TERMINALS

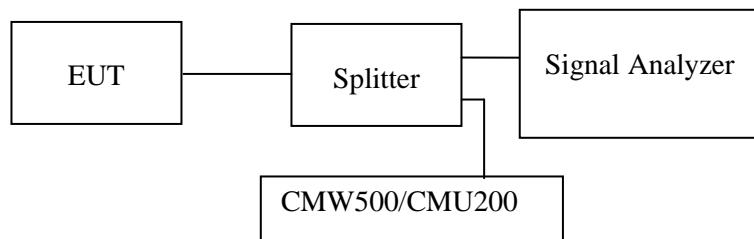
Applicable Standard

FCC §2.1051, §22.917(a) and §24.238(a).

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 1MHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.



Test Data

Environmental Conditions

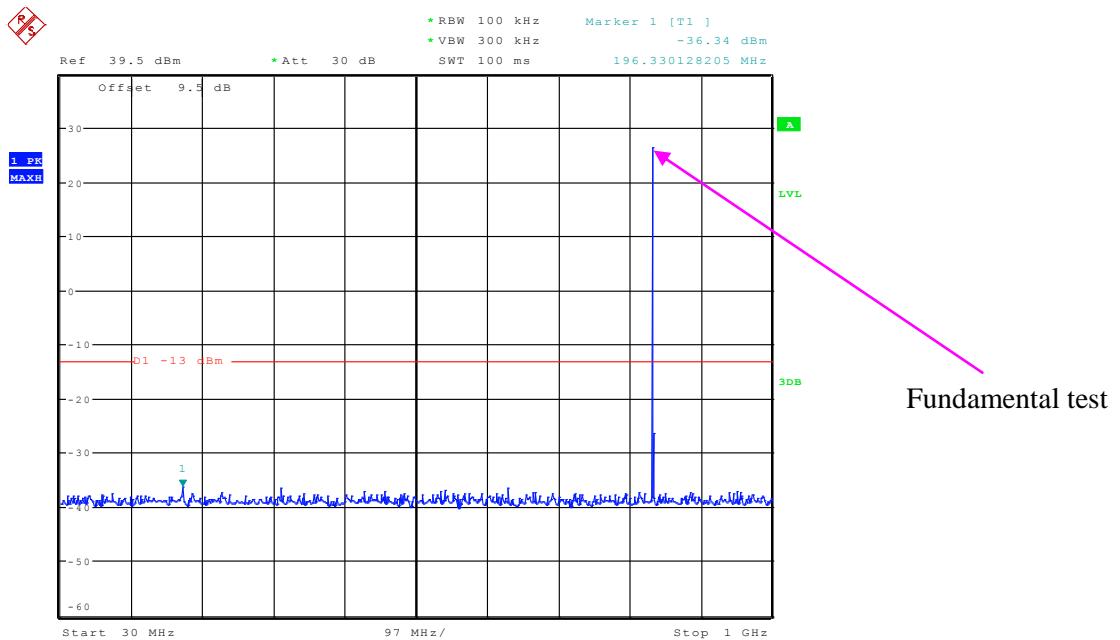
Temperature:	24~25 °C
Relative Humidity:	50~60 %
ATM Pressure:	100.9~101.0 kPa

The testing was performed by Leo Huang from 2019-10-19 to 2019-11-22.

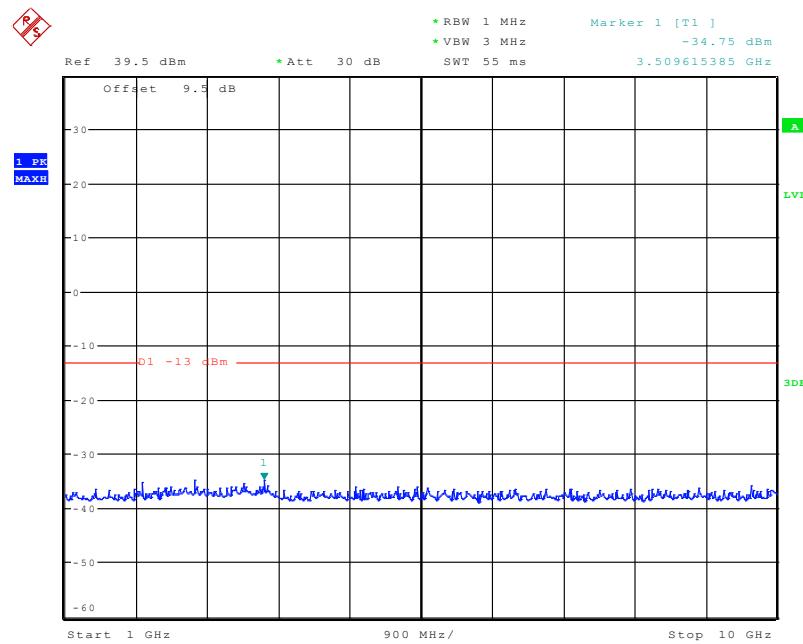
Test result: Compliance.

EUT operation mode: transmitting

Please refer to the following plots.

Cellular Band (Part 22H)**30 MHz – 1 GHz (GSM Mode)**

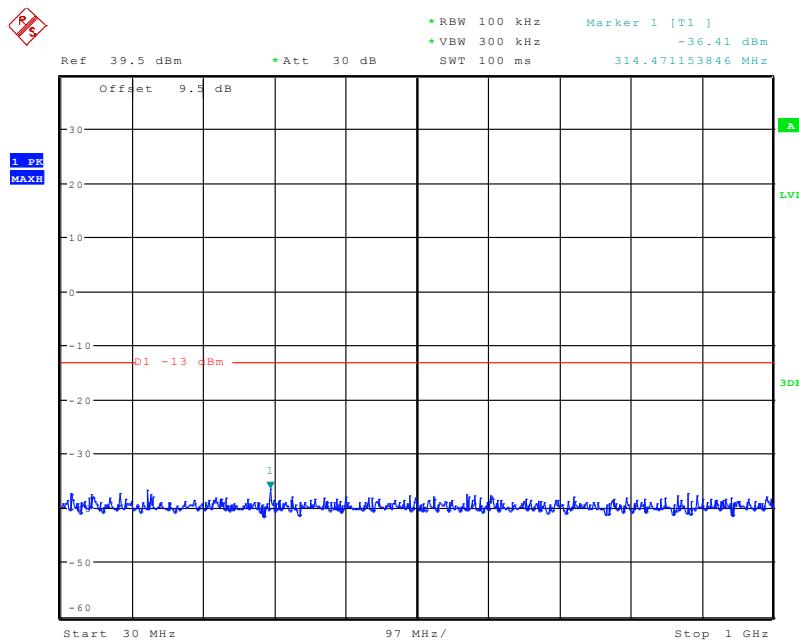
Date: 20.NOV.2019 11:27:06

1 GHz – 10 GHz (GSM Mode)

Date: 20.NOV.2019 11:27:32

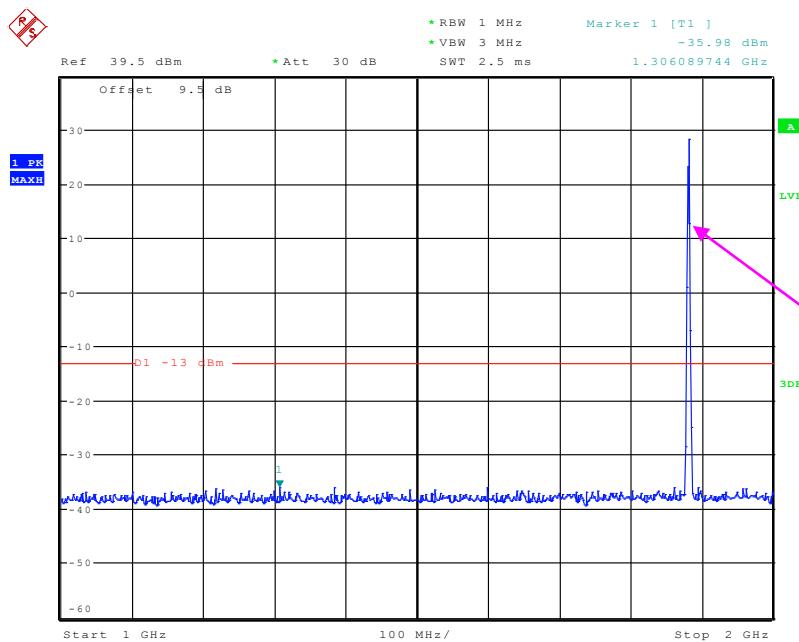
PCS Band (Part 24E)

30 MHz – 1 GHz (GSM Mode)



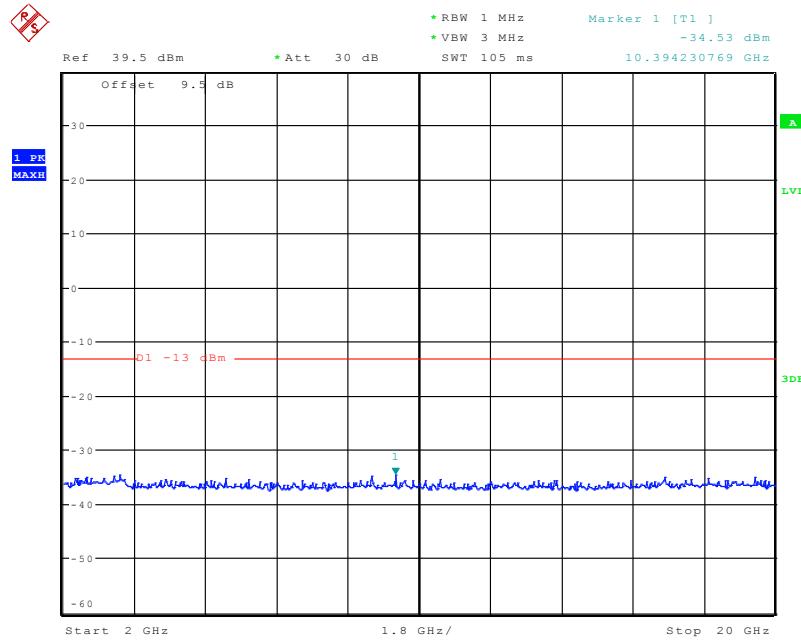
Date: 20.NOV.2019 11:34:05

1 GHz – 2 GHz (GSM Mode)

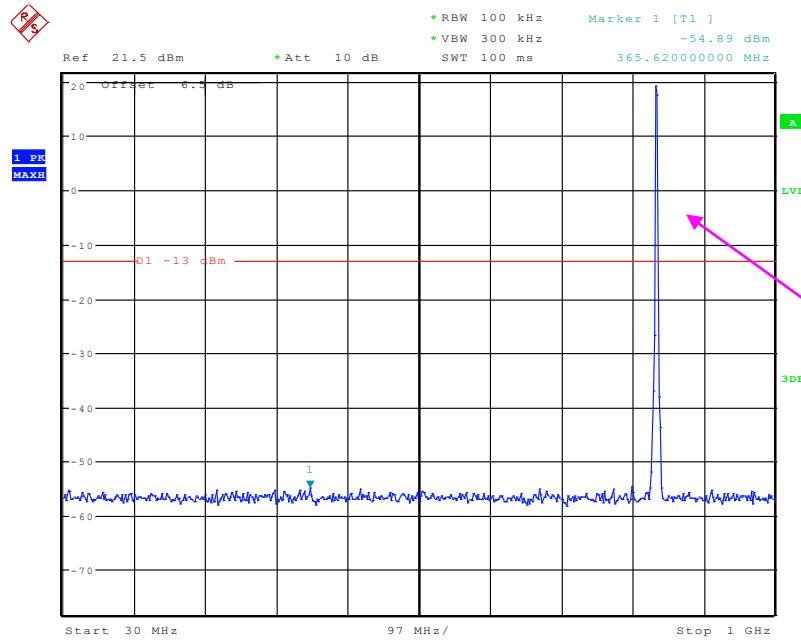


Fundamental test

Date: 20.NOV.2019 11:32:28

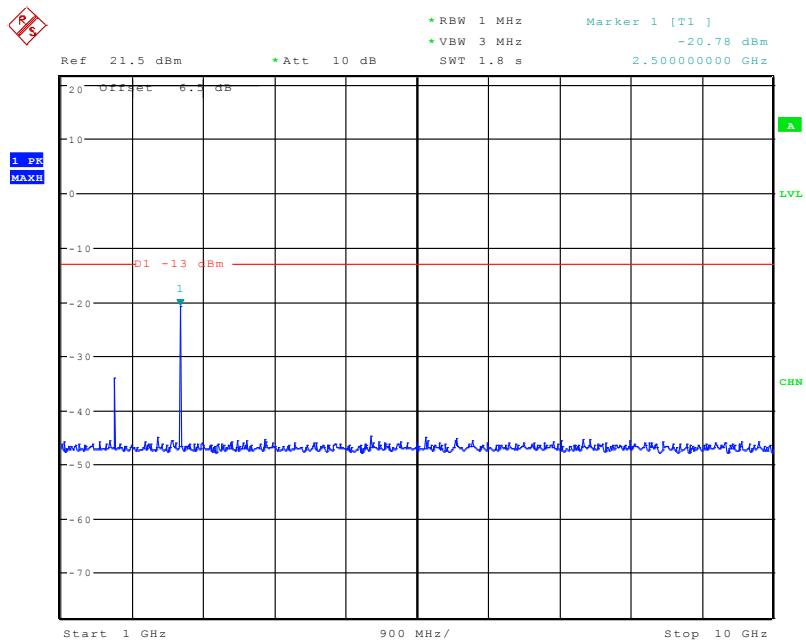
2 GHz – 20 GHz (GSM Mode)

Date: 20.NOV.2019 11:33:37

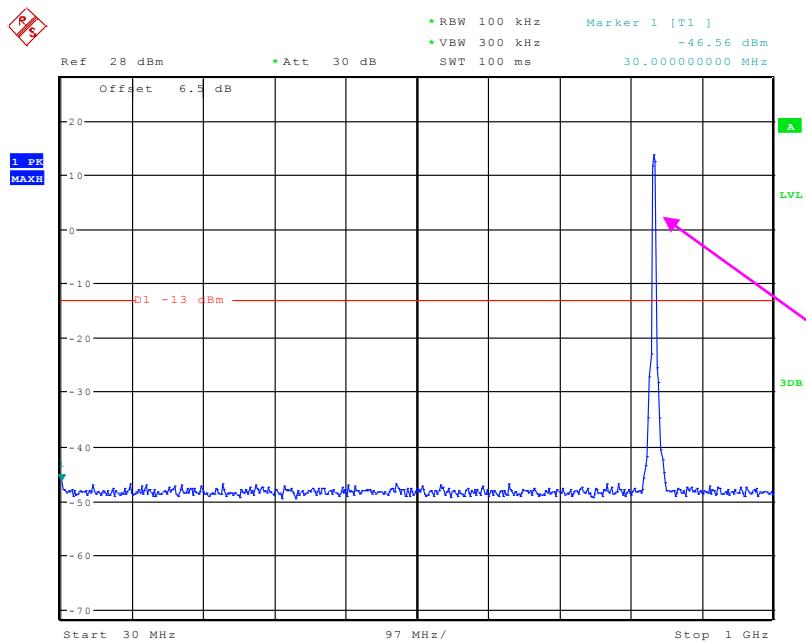
**LTE Band 5:
QPSK****30 MHz - 1 GHz (1.4 MHz, Middle Channel)**

Fundamental test

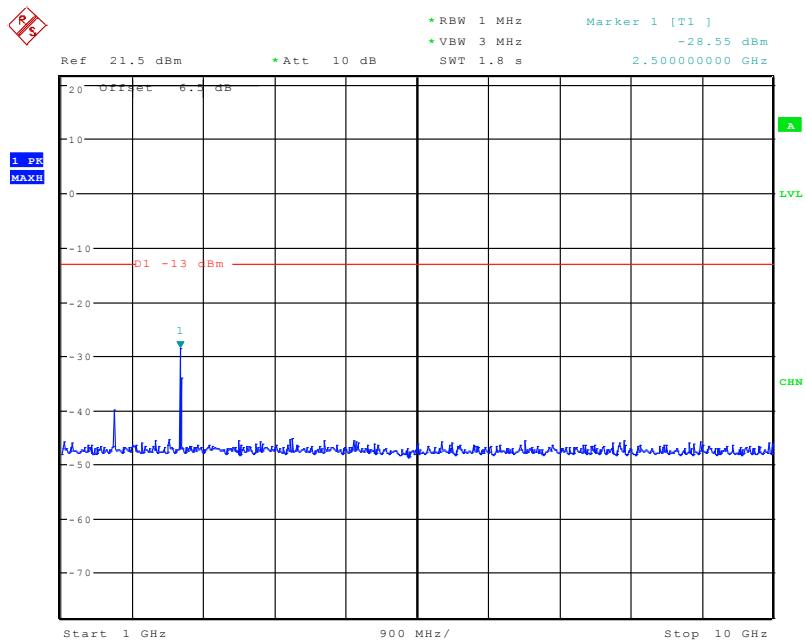
Date: 19.OCT.2019 14:10:47

1 GHz – 10 GHz (1.4 MHz, Middle Channel)

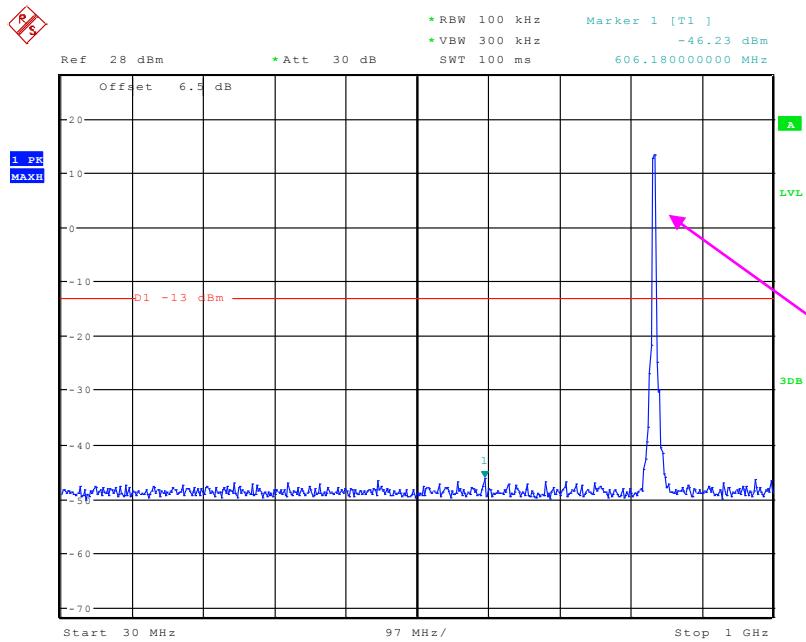
Date: 22.NOV.2019 14:20:58

30 MHz - 1 GHz (3.0 MHz, Middle Channel)

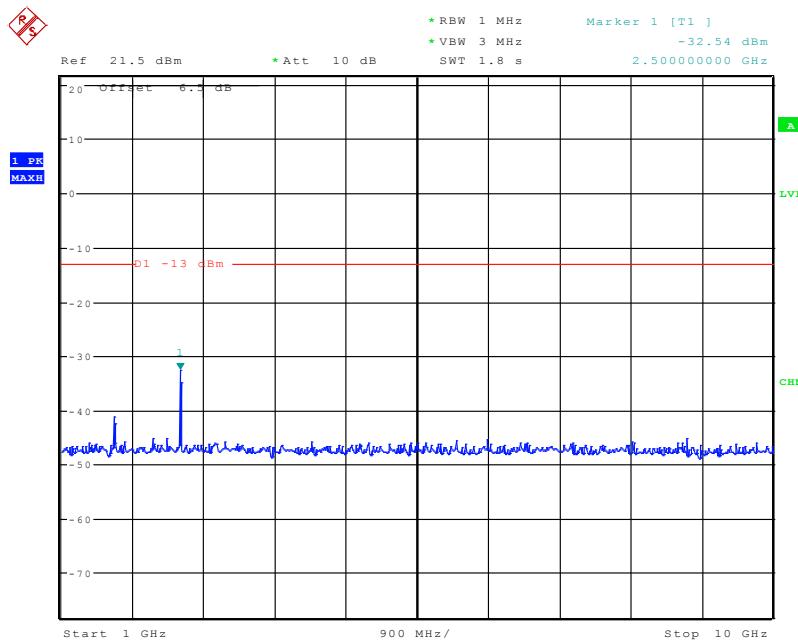
Date: 19.OCT.2019 14:20:42

1 GHz – 10 GHz (3.0 MHz, Middle Channel)

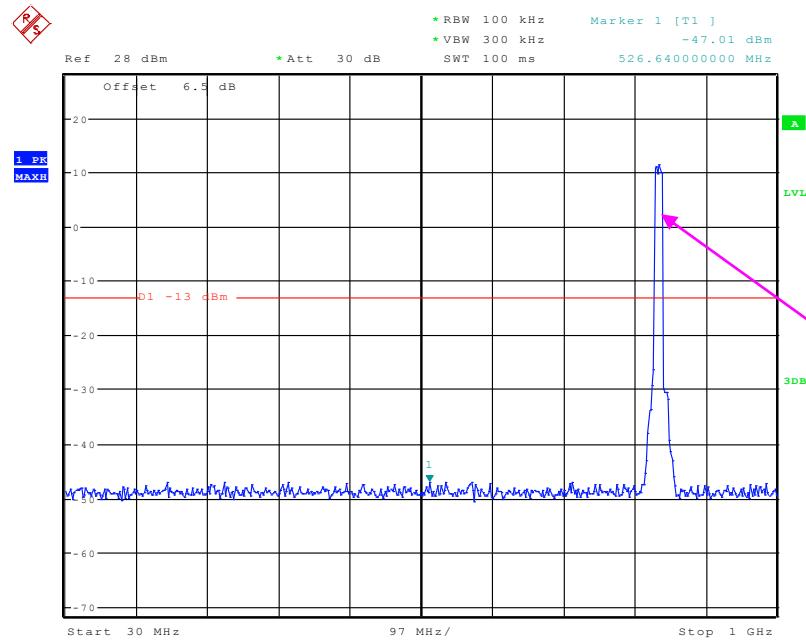
Date: 22.NOV.2019 14:22:27

30 MHz - 1 GHz (5.0 MHz, Middle Channel)

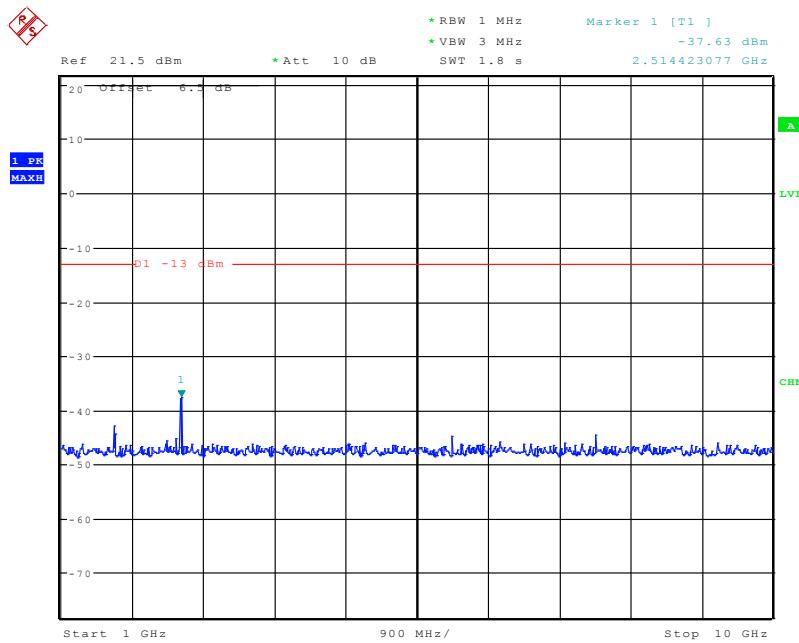
Date: 19.OCT.2019 14:22:21

1 GHz – 10 GHz (5.0 MHz, Middle Channel)

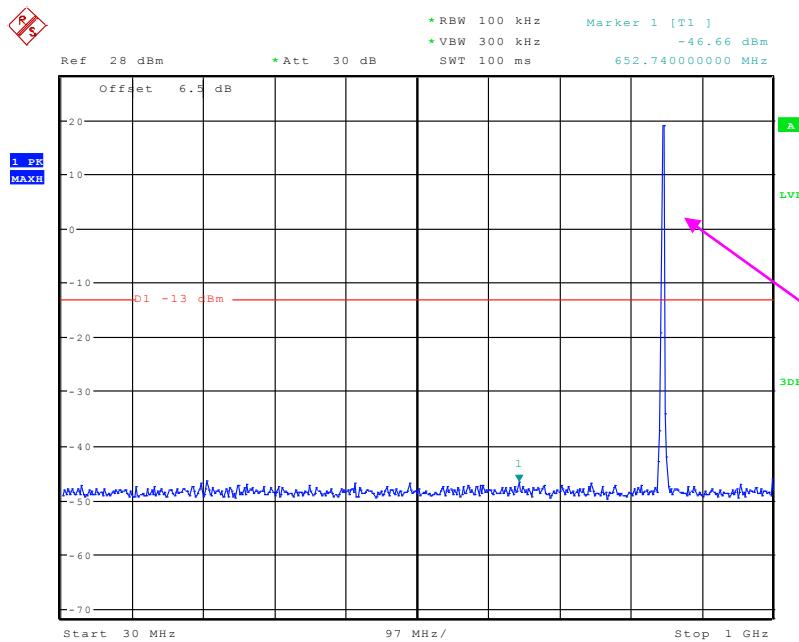
Date: 22.NOV.2019 14:22:48

30 MHz - 1 GHz (10.0 MHz, Middle Channel)

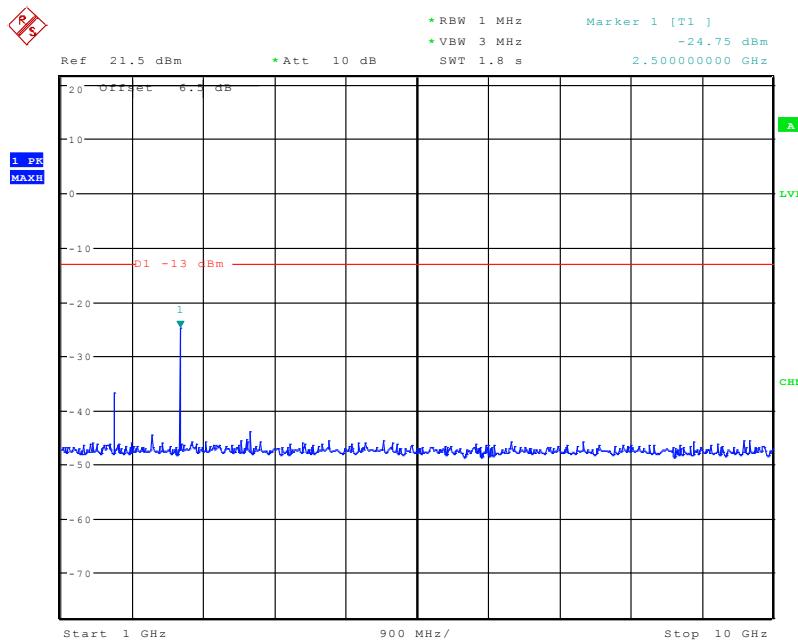
Date: 19.OCT.2019 14:26:14

1 GHz – 10 GHz (10.0 MHz, Middle Channel)

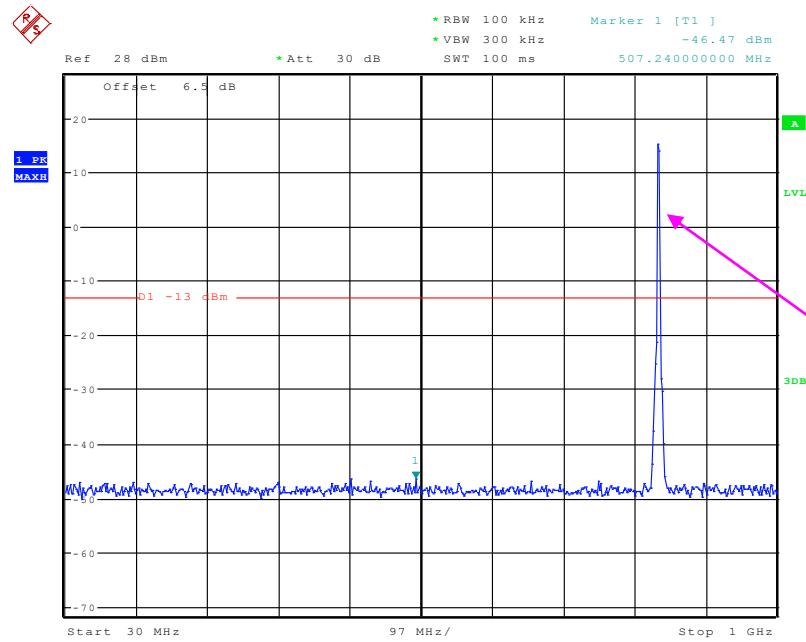
Date: 22.NOV.2019 14:23:10

16QAM**30 MHz - 1 GHz (1.4 MHz, Middle Channel)**

Date: 19.OCT.2019 13:20:11

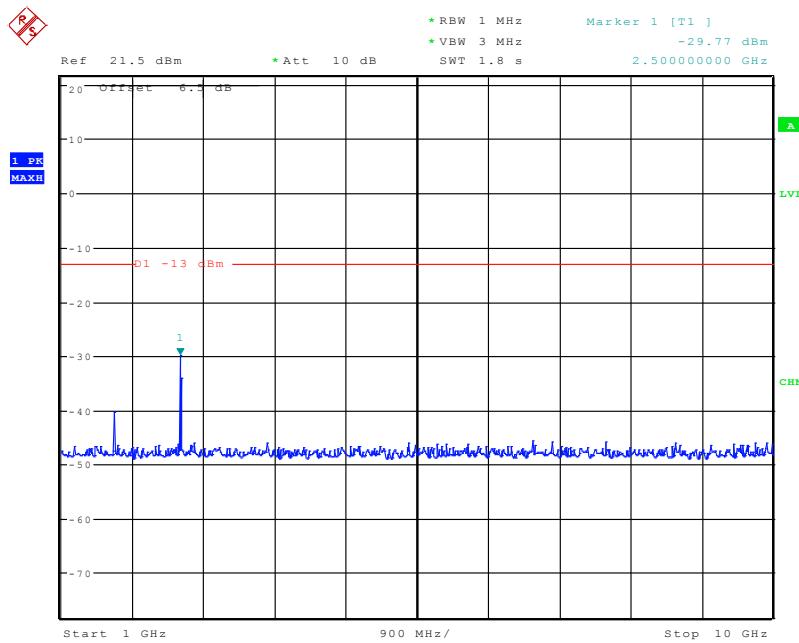
1 GHz – 10 GHz (1.4 MHz, Middle Channel)

Date: 22.NOV.2019 14:33:43

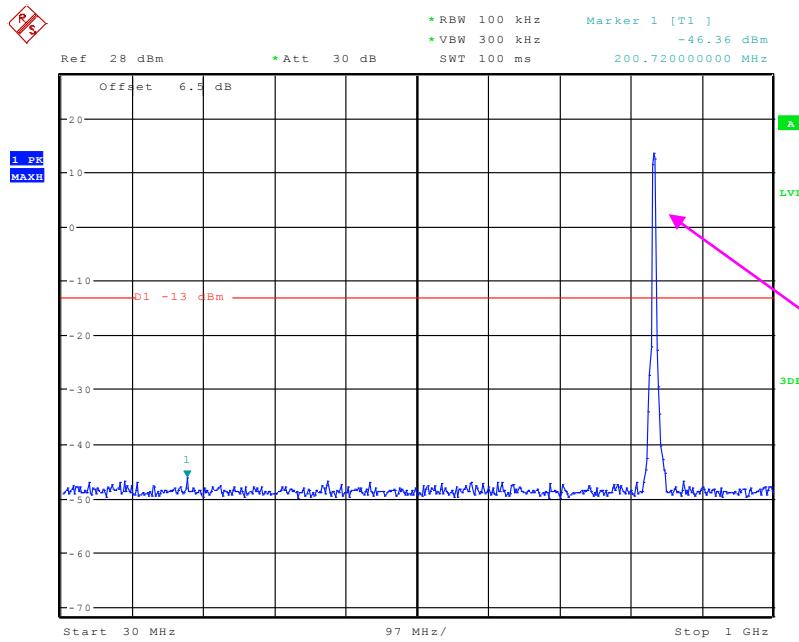
30 MHz - 1 GHz (3.0 MHz, Middle Channel)

Fundamental test

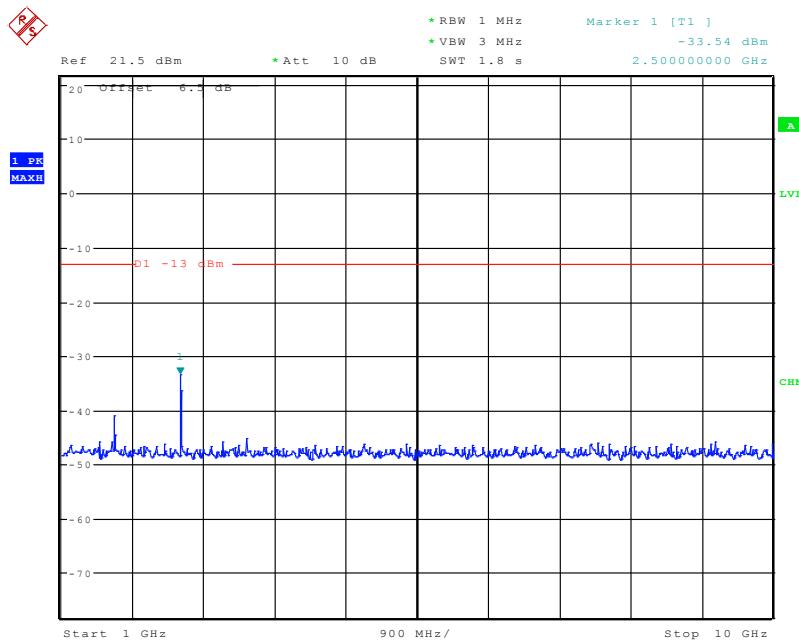
Date: 19.OCT.2019 14:21:29

1 GHz – 10 GHz (3.0 MHz, Middle Channel)

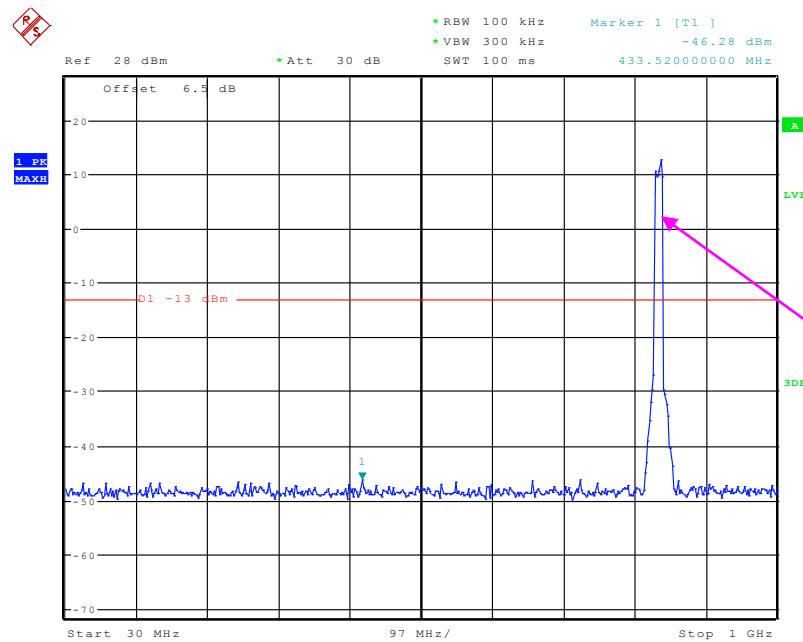
Date: 22.NOV.2019 14:32:53

30 MHz - 1 GHz (5.0 MHz, Middle Channel)

Date: 19.OCT.2019 14:21:56

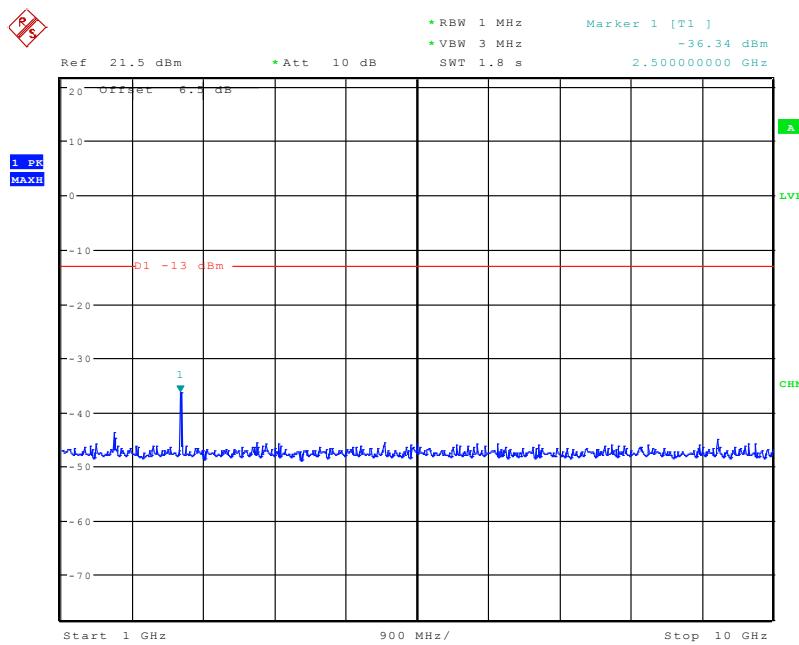
1 GHz – 10 GHz (5.0 MHz, Middle Channel)

Date: 22.NOV.2019 14:32:38

30 MHz - 1 GHz (10.0 MHz, Middle Channel)

Fundamental test

Date: 19.OCT.2019 14:25:35

1 GHz – 10 GHz (10.0 MHz, Middle Channel)

Date: 22.NOV.2019 14:32:24

FCC §2.1053; §22.917 (a); §24.238 (a) SPURIOUS RADIATED EMISSIONS**Applicable Standard**

FCC §2.1053, §22.917(a) and §24.238(a).

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the receiving antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Charlie Cha on 2019-11-18.

EUT operation mode: Transmitting

Pre-scan with Low, Middle and High channel, the worst case as below:

30 MHz ~ 10 GHz:

Cellular Band (Part 22H)

Frequency (MHz)	Receiver Reading (dB μ V)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 22H	
			Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dBd/dBi)		Limit (dBm)	Margin (dB)
GSM Mode, middle channel										
347.45	38.54	319	1.4	H	-58.5	0.38	0	-58.88	-13	45.88
347.45	35.21	122	2.1	V	-61.8	0.38	0	-62.18	-13	49.18
1673.20	49.52	268	2.4	H	-56.8	1.30	8.90	-49.20	-13	36.20
1673.20	49.28	89	1.2	V	-56.5	1.30	8.90	-48.90	-13	35.90
2509.80	45.51	337	1.1	H	-57.8	2.60	10.20	-50.20	-13	37.20
2509.80	45.37	2	1.9	V	-57.4	2.60	10.20	-49.80	-13	36.80
3346.40	45.26	277	1.6	H	-55.6	1.50	11.70	-45.40	-13	32.40
3346.40	45.64	131	1.3	V	-55.3	1.50	11.70	-45.10	-13	32.10

30 MHz ~ 20 GHz:

PCS Band (Part 24E)

Frequency (MHz)	Receiver Reading (dB μ V)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 24E	
			Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dBd/dBi)		Limit (dBm)	Margin (dB)
GSM Mode, middle channel										
347.45	38.84	355	1.8	H	-58.2	0.38	0	-58.58	-13	45.58
347.45	35.56	149	1.5	V	-61.4	0.38	0	-61.78	-13	48.78
3760.00	44.83	101	1.3	H	-57.2	1.50	11.80	-46.90	-13	33.90
3760.00	45.18	322	1.3	V	-56.4	1.50	11.80	-46.10	-13	33.10
5640.00	44.91	158	2.2	H	-54.8	1.70	12.40	-44.10	-13	31.10
5640.00	47.34	35	2.1	V	-52.0	1.70	12.40	-41.30	-13	28.30
7520.00	44.26	226	1.5	H	-51.7	1.90	10.70	-42.90	-13	29.90
7520.00	44.39	40	1.3	V	-51.1	1.90	10.70	-42.30	-13	29.30

LTE Band: (Pre-scan with all the bandwidth, and worse case as below)

Frequency (MHz)	Receiver Reading (dB μ V)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)					
			Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dBd/dBi)								
Band 5 (QPSK Mode, 1.4 MHz, Middle Channel)															
Test frequency range:30 MHz ~ 10 GHz															
347.45	38.21	185	2.1	H	-58.8	0.38	0	-59.18	-13	46.18					
347.45	35.04	237	1.7	V	-62.0	0.38	0	-62.38	-13	49.38					
1673.00	45.44	38	1.7	H	-60.9	1.30	8.90	-53.30	-13	40.30					
1673.00	45.18	13	1.0	V	-60.6	1.30	8.90	-53.00	-13	40.00					
2509.50	48.20	170	2.0	H	-55.2	2.60	10.20	-47.60	-13	34.60					
2509.50	48.13	238	2.3	V	-54.6	2.60	10.20	-47.00	-13	34.00					
3346.00	44.34	147	2.2	H	-56.6	1.50	11.70	-46.40	-13	33.40					
3346.00	44.32	293	1.1	V	-56.6	1.50	11.70	-46.40	-13	33.40					

Note:

Absolute Level = Substituted Level - Cable loss + Antenna Gain

Margin = Limit- Absolute Level

dBd is for the ERP, dBi is for EIRP.

FCC §22.917 (a); §24.238 (a) - BAND EDGES

Applicable Standard

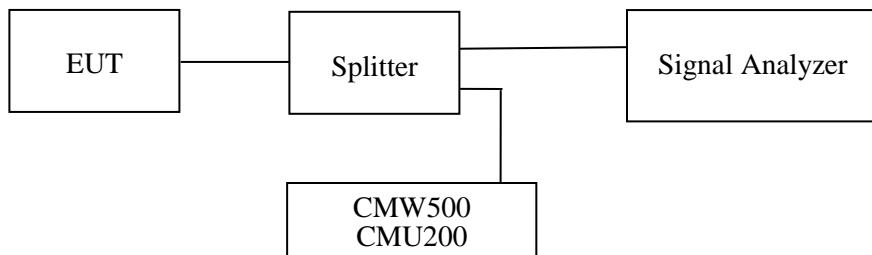
According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency



Test Data

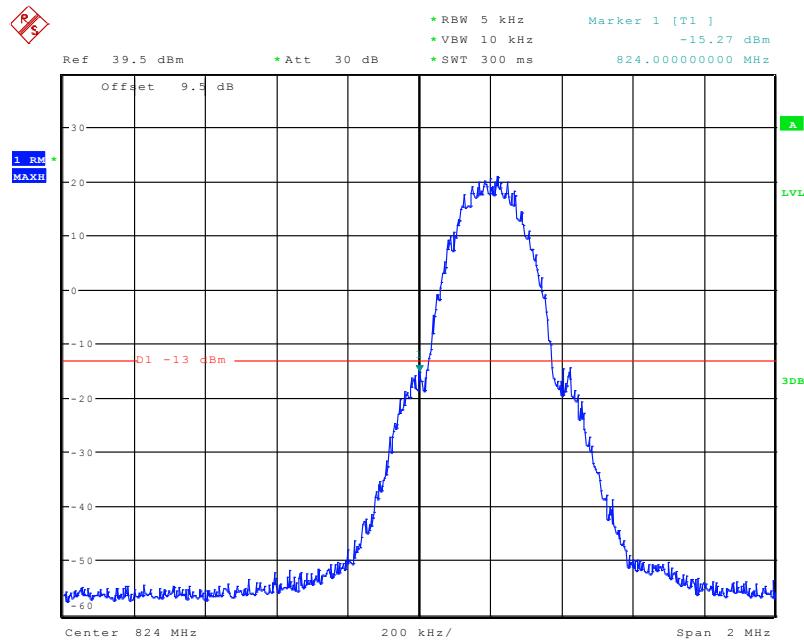
Environmental Conditions

Temperature:	24~25 °C
Relative Humidity:	55~60 %
ATM Pressure:	100.9~101.0 kPa

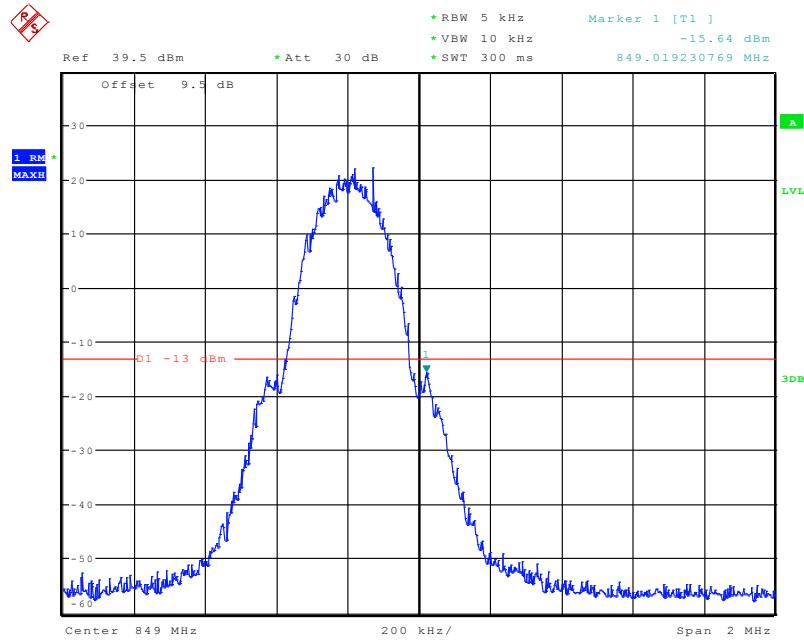
The testing was performed by Leo Huang on 2019-10-19 to 2019-11-22.

EUT operation mode: Transmitting

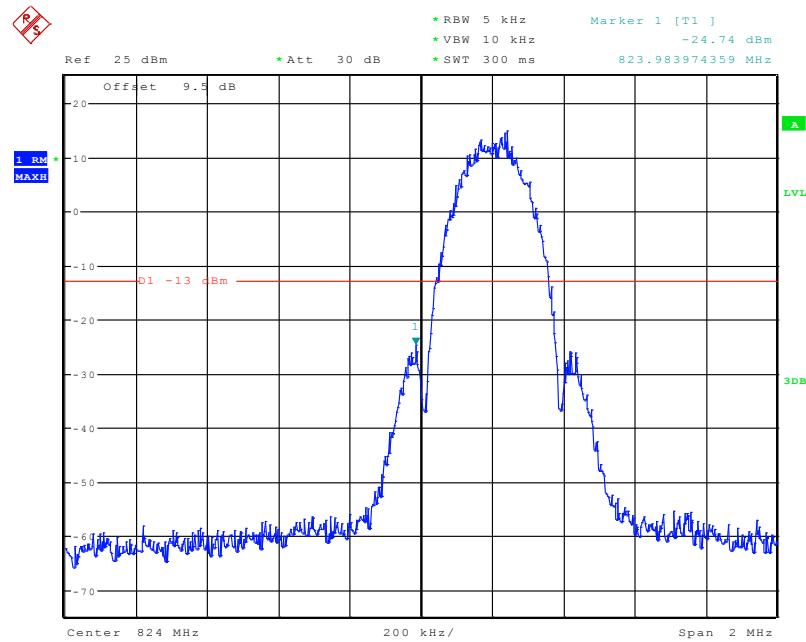
Test Result: Compliance. Please refer to the following plots.

Cellular Band, Left Band Edge for GSM (GMSK) Mode

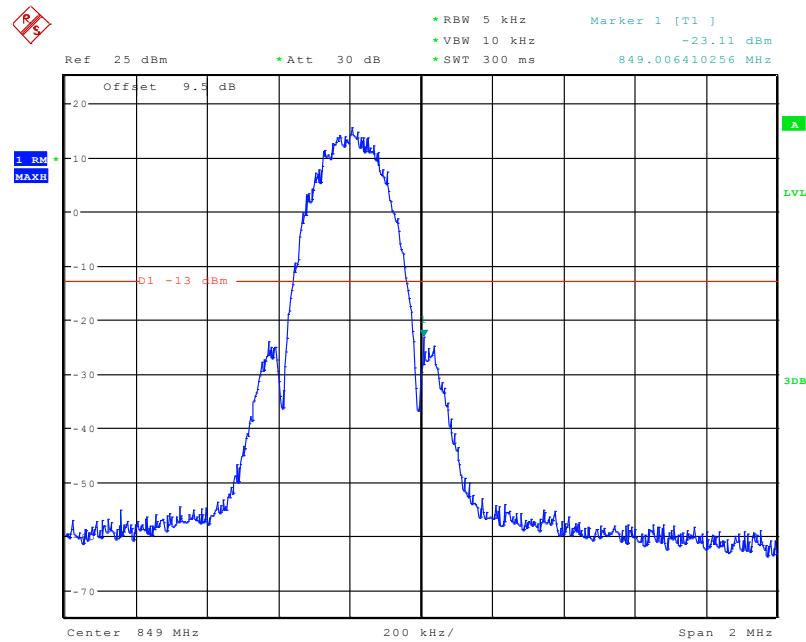
Date: 20.NOV.2019 11:09:43

Cellular Band, Right Band Edge for GSM (GMSK) Mode

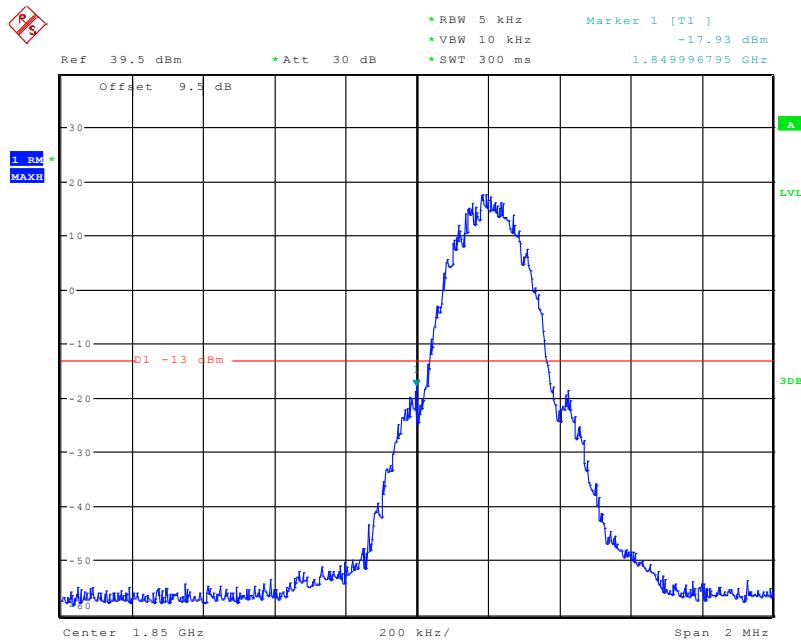
Date: 20.NOV.2019 11:10:42

Cellular Band, Left Band Edge for EDGE Mode

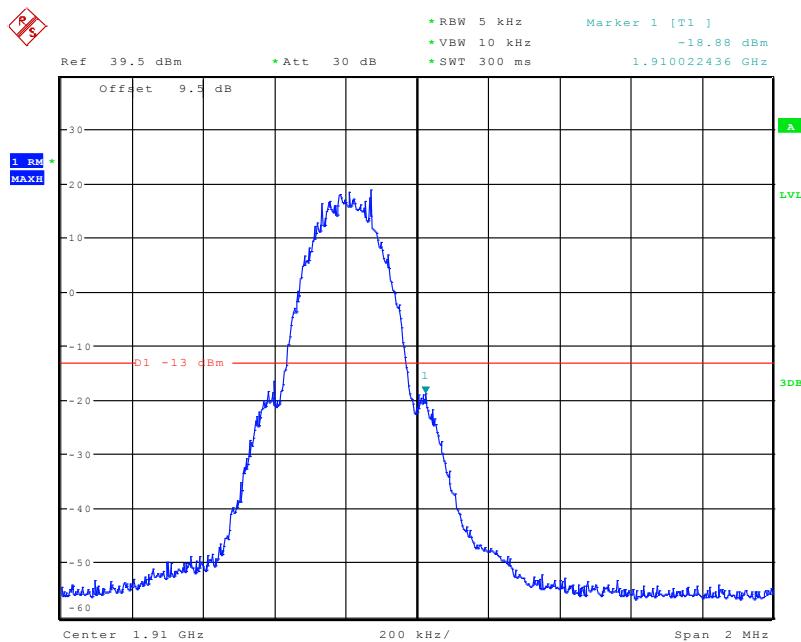
Date: 20.NOV.2019 11:20:59

Cellular Band, Right Band Edge for EDGE Mode

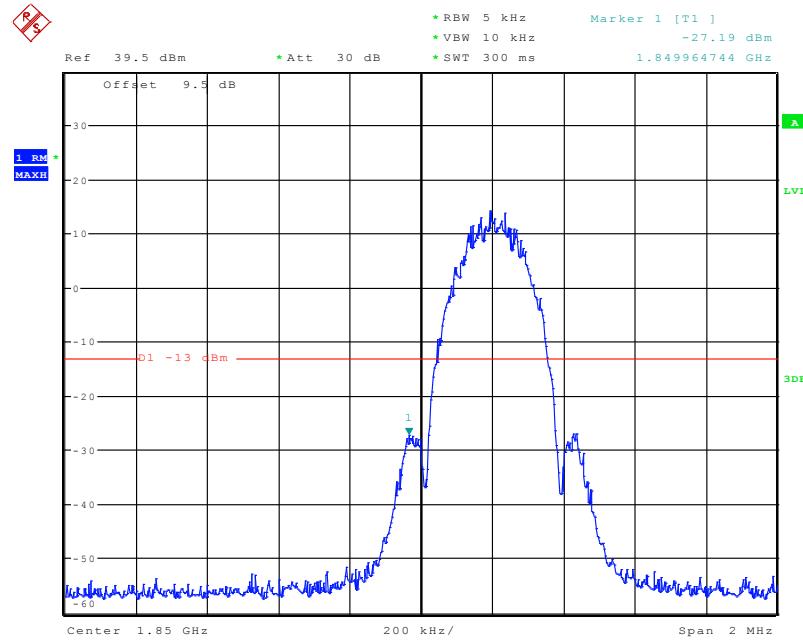
Date: 20.NOV.2019 11:22:12

PCS Band, Left Band Edge for GSM (GMSK) Mode

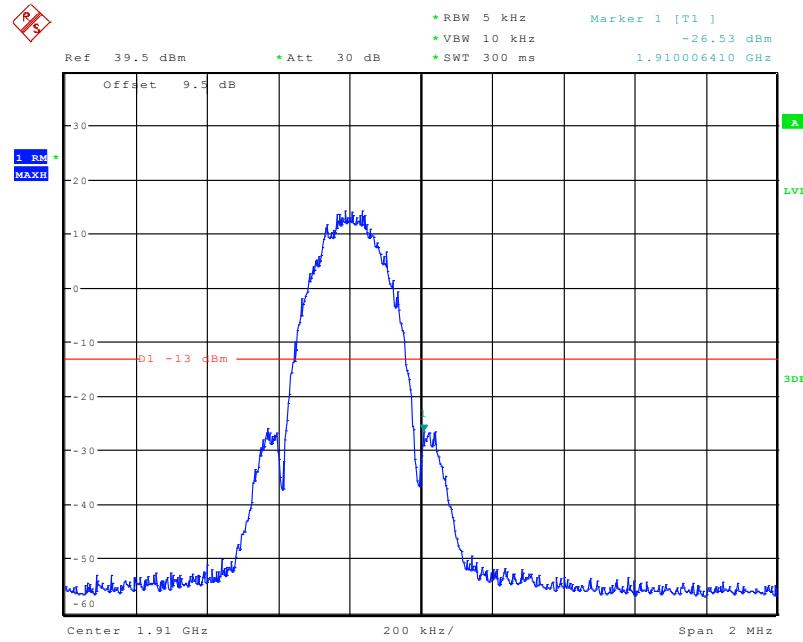
Date: 20.NOV.2019 11:41:26

PCS Band, Right Band Edge for GSM (GMSK) Mode

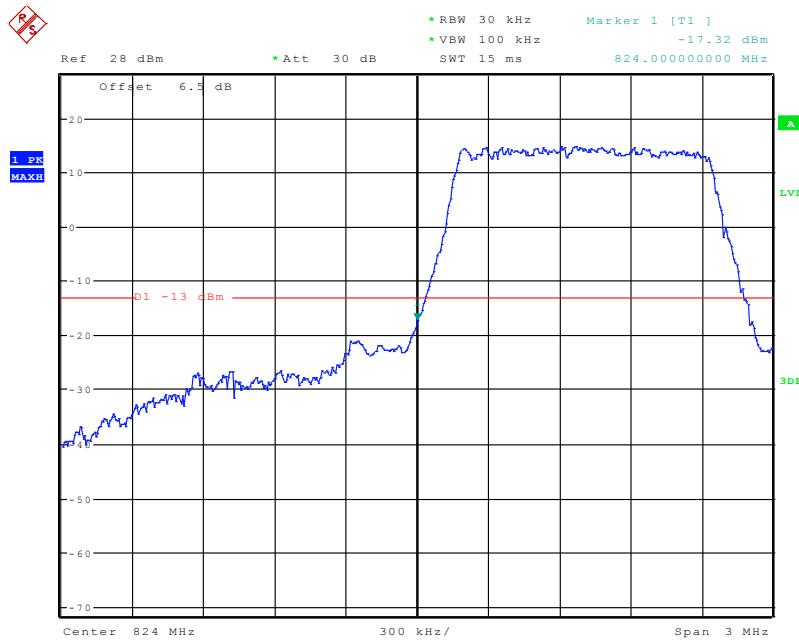
Date: 20.NOV.2019 11:44:38

PCS Band, Left Band Edge for EDGE Mode

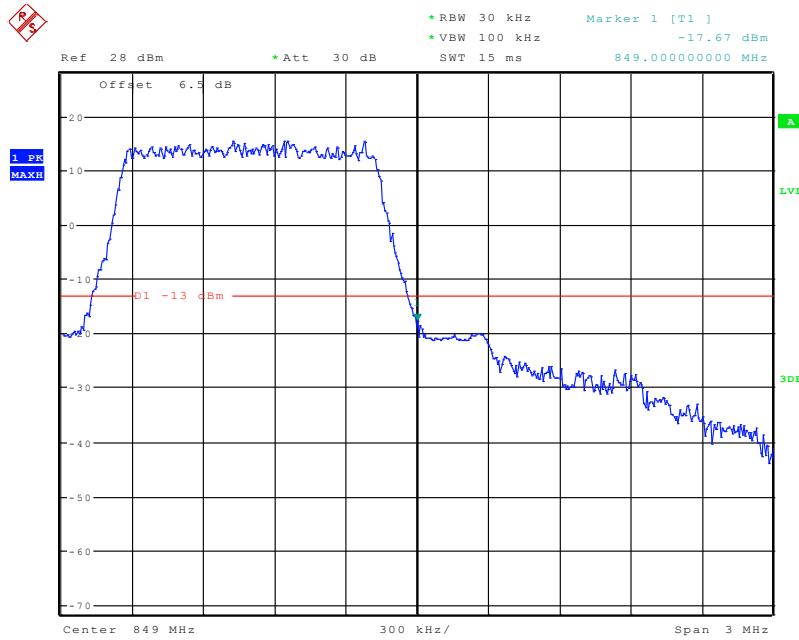
Date: 20.NOV.2019 11:48:36

PCS Band, Right Band Edge for EDGE Mode

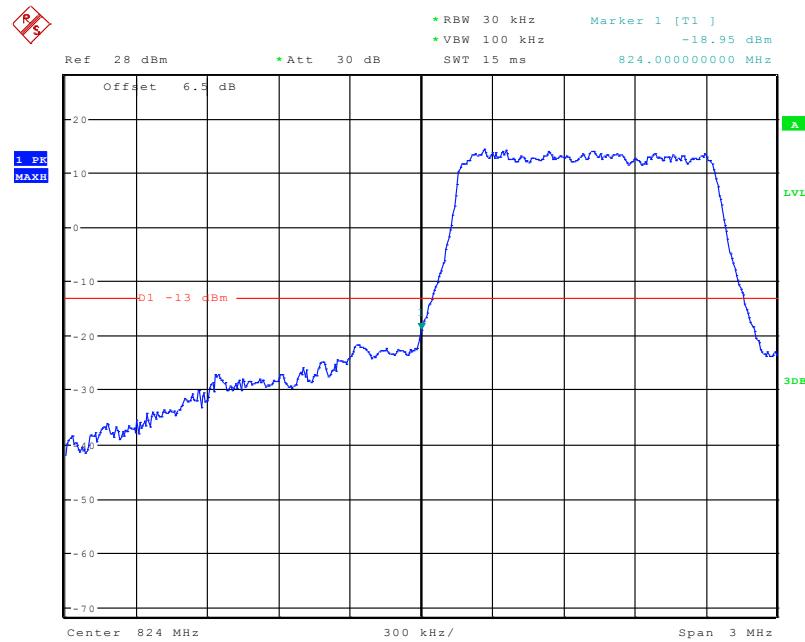
Date: 20.NOV.2019 11:47:44

Band 5:**QPSK (1.4 MHz, FULL RB) - Left Band Edge**

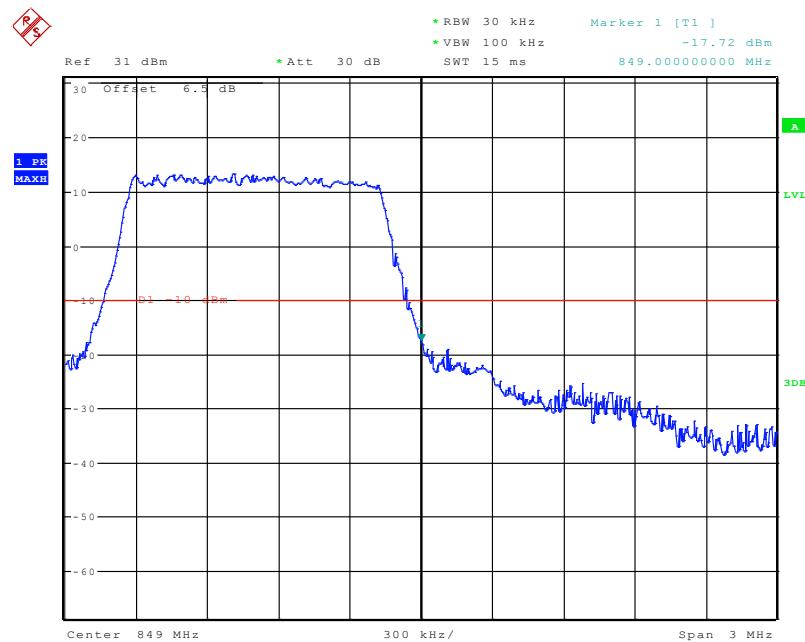
Date: 19.OCT.2019 14:44:57

QPSK (1.4 MHz, FULL RB) - Right Band Edge

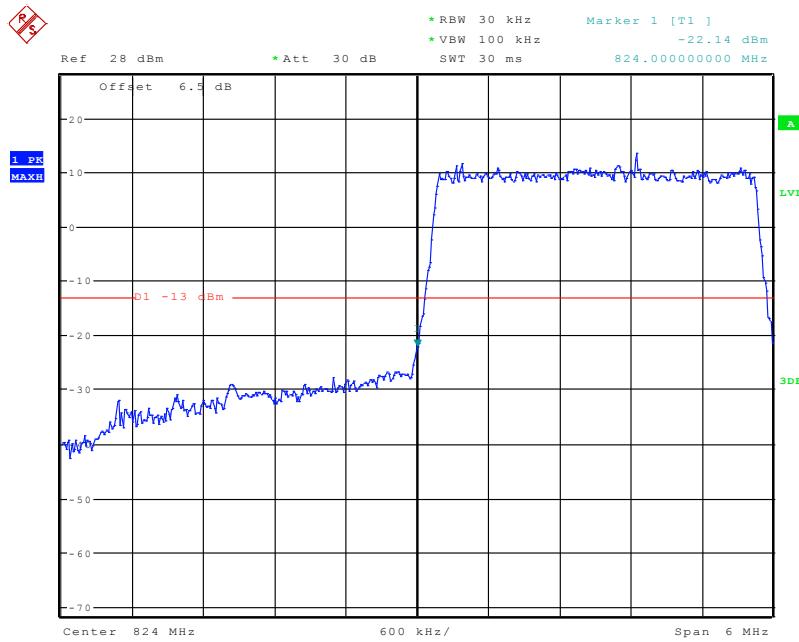
Date: 19.OCT.2019 14:48:38

16-QAM 1.4 MHz, FULL RB) - Left Band Edge

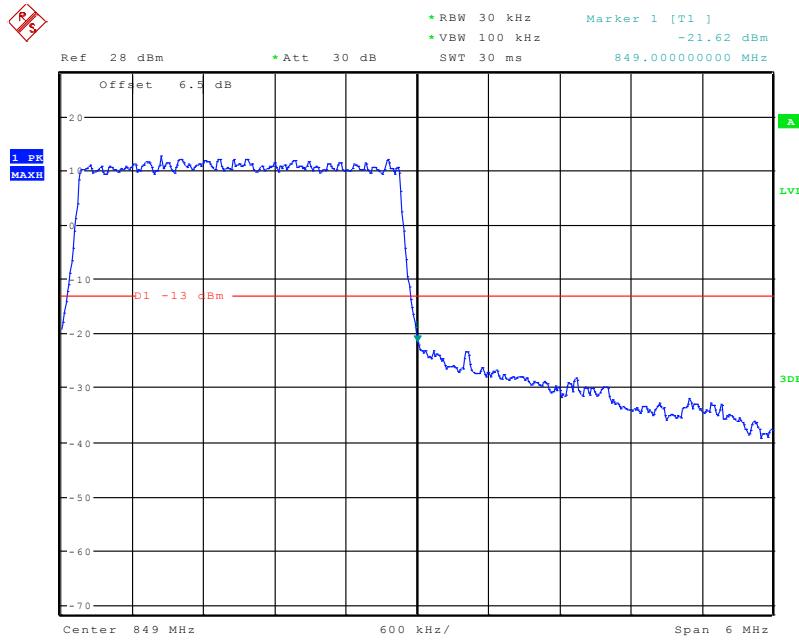
Date: 19.OCT.2019 14:45:45

16-QAM (1.4MHz, FULL RB) - Right Band Edge

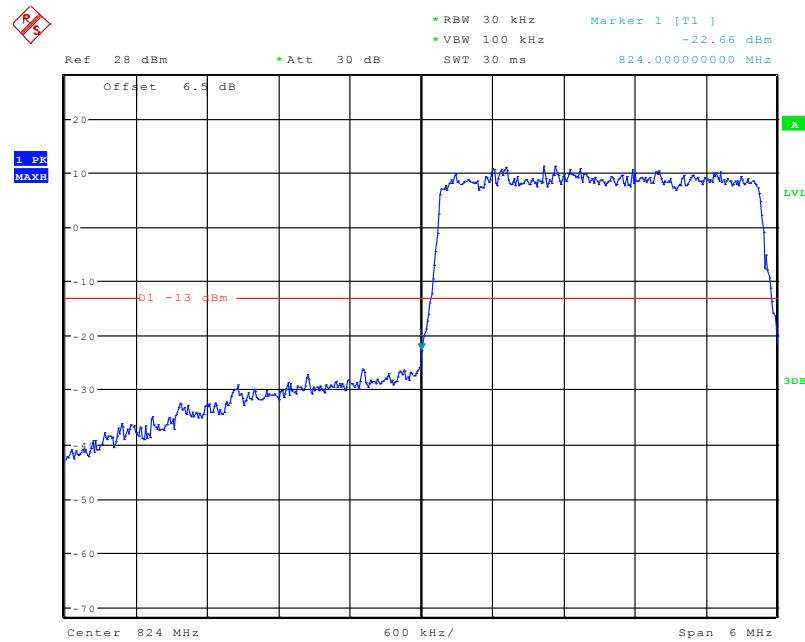
Date: 22.NOV.2019 13:53:39

QPSK (3.0 MHz, FULL RB) - Left Band Edge

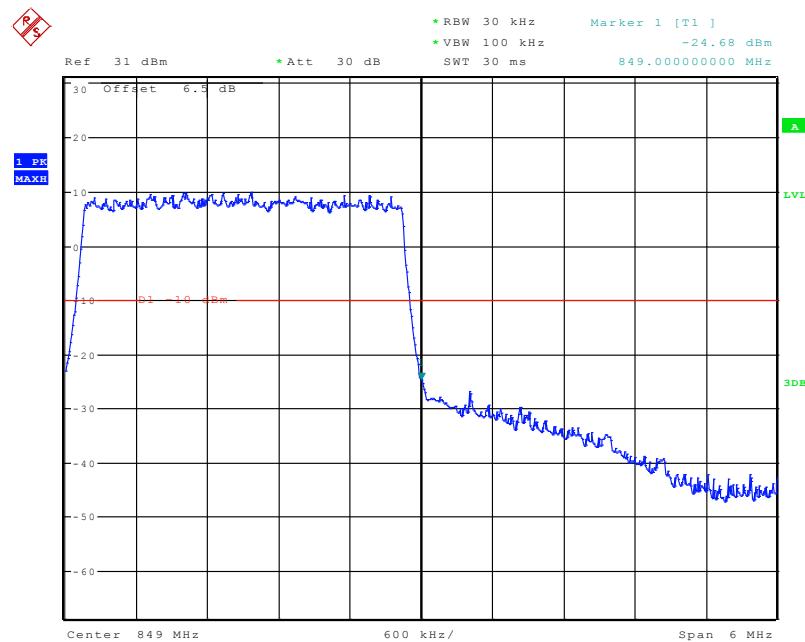
Date: 19.OCT.2019 15:03:05

QPSK (3.0 MHz, FULL RB) - Right Band Edge

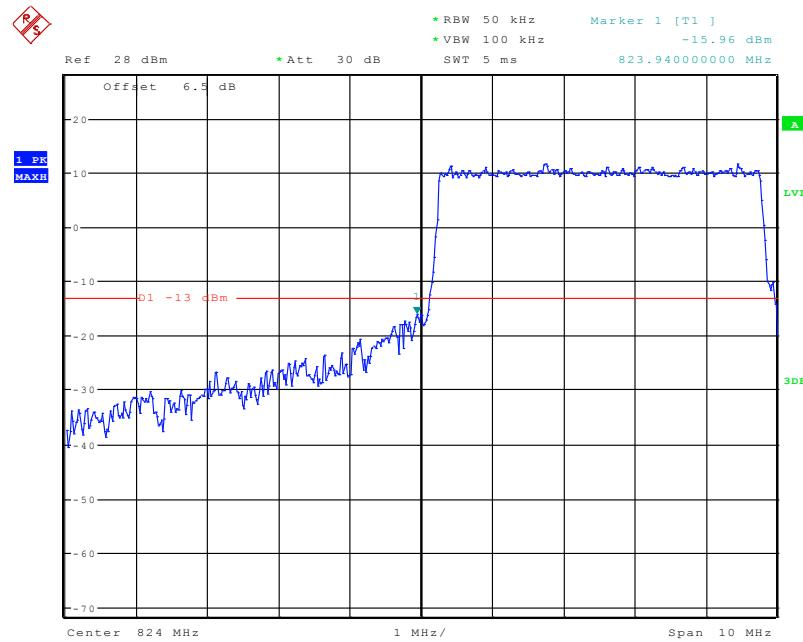
Date: 19.OCT.2019 14:56:54

16-QAM (3.0 MHz, FULL RB) - Left Band Edge

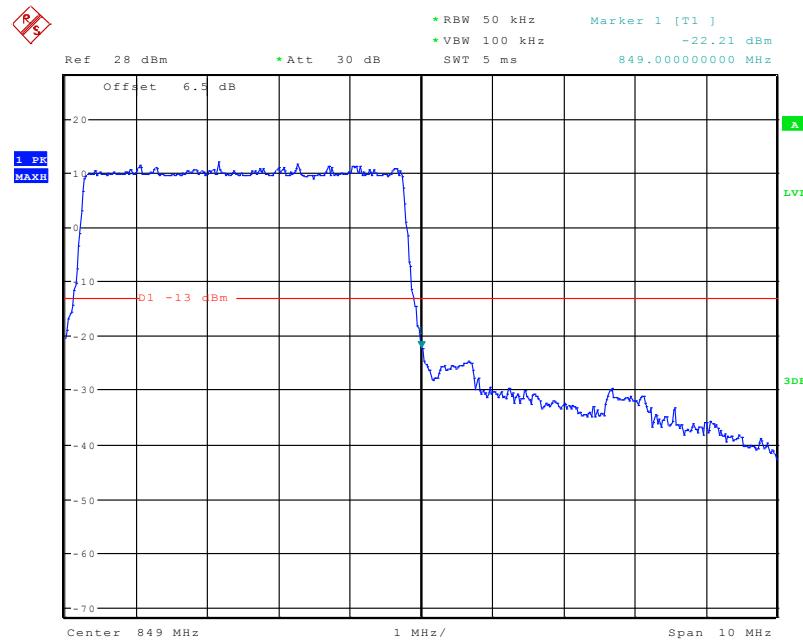
Date: 19.OCT.2019 15:00:56

16-QAM (3.0 MHz, FULL RB) - Right Band Edge

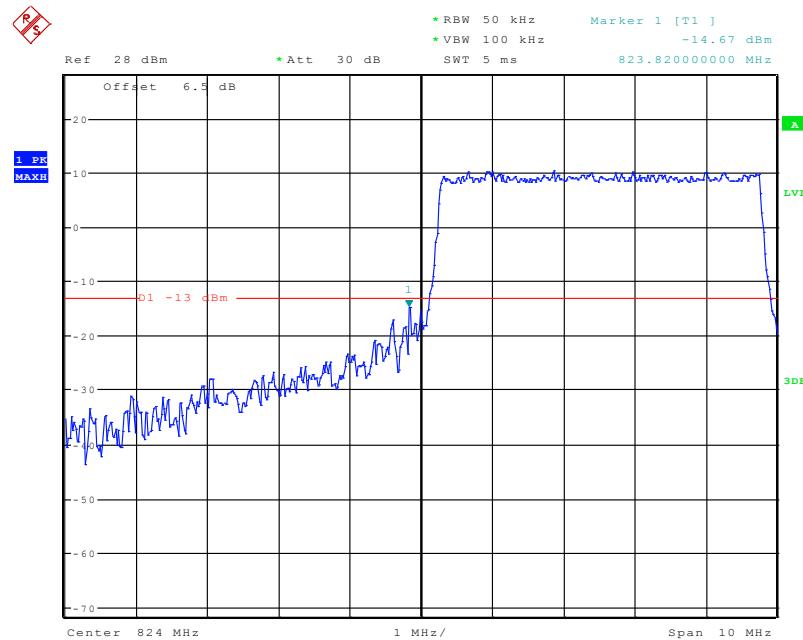
Date: 22.NOV.2019 13:52:27

QPSK (5.0 MHz, FULL RB) - Left Band Edge

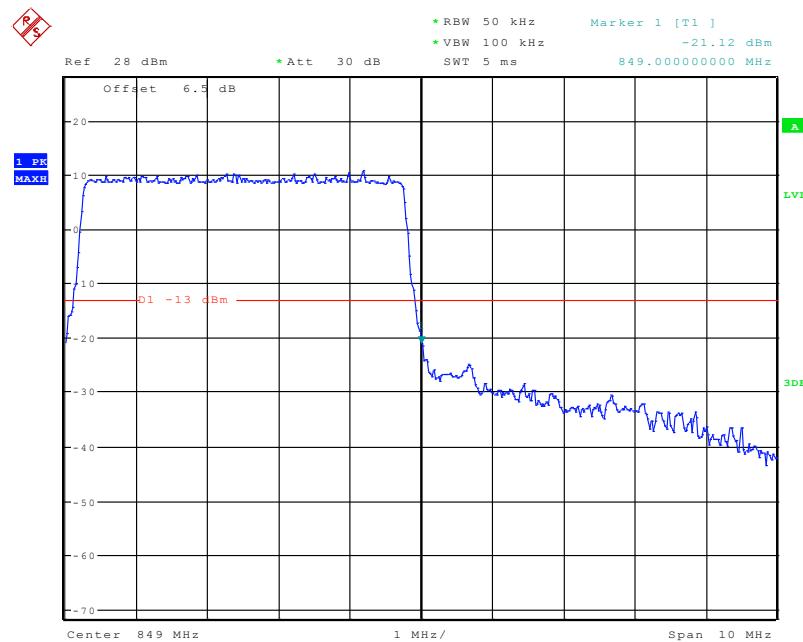
Date: 19.OCT.2019 15:04:44

QPSK (5.0 MHz, FULL RB) - Right Band Edge

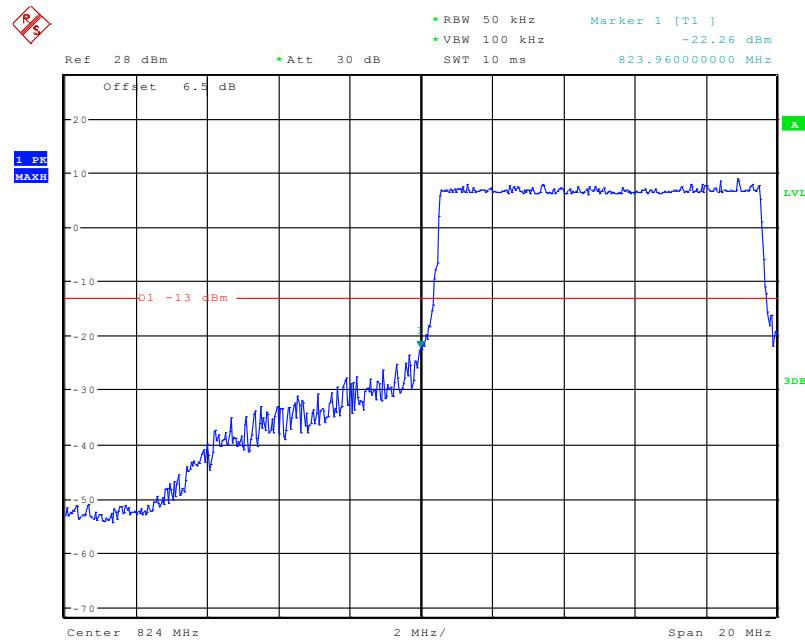
Date: 19.OCT.2019 15:06:32

16-QAM (5.0 MHz, FULL RB) - Left Band Edge

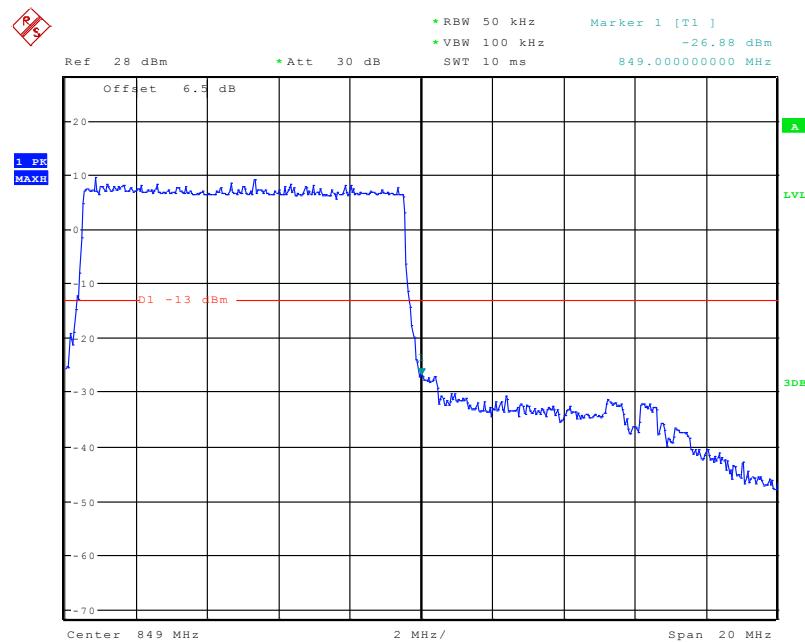
Date: 19.OCT.2019 15:05:17

16-QAM (5.0 MHz, FULL RB) - Right Band Edge

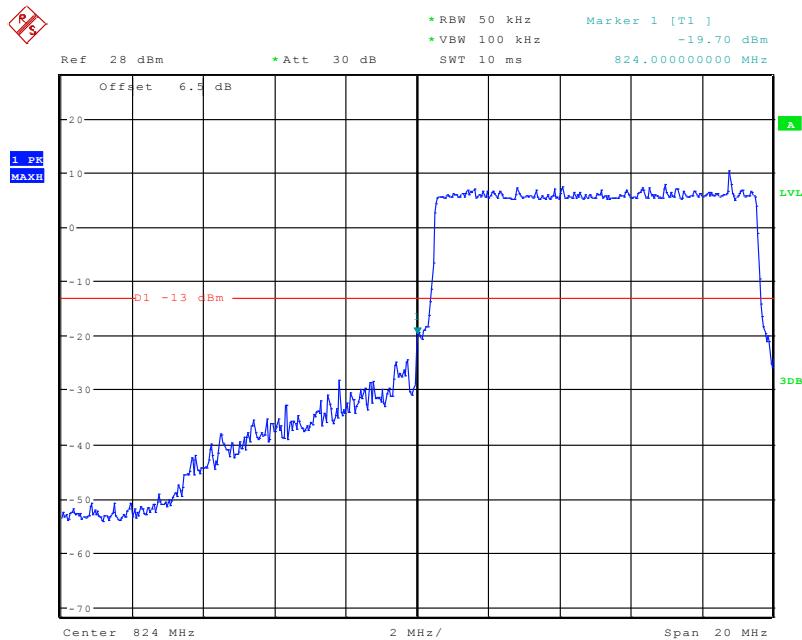
Date: 19.OCT.2019 15:06:00

QPSK (10.0 MHz, FULL RB) - Left Band Edge

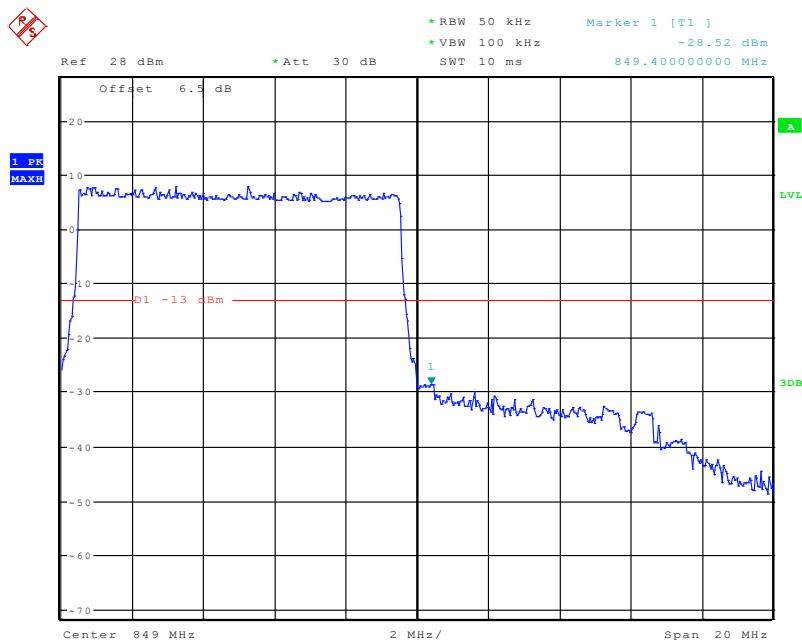
Date: 19.OCT.2019 15:11:40

QPSK (10.0 MHz, FULL RB) - Right Band Edge

Date: 19.OCT.2019 15:10:55

16-QAM (10.0 MHz, FULL RB) - Left Band Edge

Date: 19.OCT.2019 15:12:17

16-QAM (10.0 MHz, FULL RB) - Right Band Edge

Date: 19.OCT.2019 15:09:29

FCC §2.1055; §22.355; §24.235 - FREQUENCY STABILITY

Applicable Standard

FCC §2.1055, §22.355 and §24.235.

According to FCC §2.1055, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency Range (MHz)	Base, fixed (ppm)	Mobile ≤ 3 watts (ppm)	Mobile > 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929.	5.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A

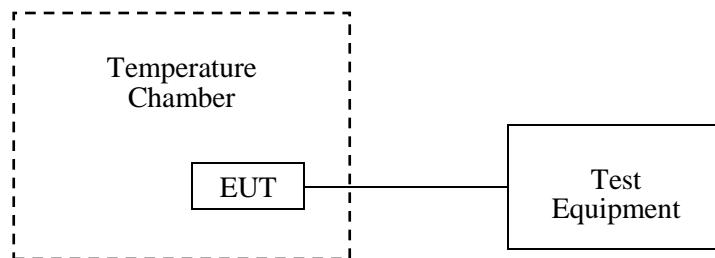
According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: For hand carried, battery powered equipment; reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.



Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Leo Huang on 2019-10-17.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to the following tables.

Cellular Band (Part 22H)

GSM Mode

Middle Channel, $f_o = 836.6\text{MHz}$				
Temperature (°C)	Voltage Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.7	10	0.0120	2.5
-20		12	0.0143	2.5
-10		9	0.0108	2.5
0		7	0.0084	2.5
10		6	0.0072	2.5
20		5	0.0060	2.5
30		3	0.0036	2.5
40		2	0.0024	2.5
50		4	0.0048	2.5
20	V min.= 3.5	6	0.0072	2.5
	V max.= 4.2	8	0.0096	2.5

EDGE Mode

Middle Channel, $f_o=836.6\text{MHz}$				
Temperature (°C)	Voltage Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.7	10	0.0120	2.5
-20		10	0.0120	2.5
-10		5	0.0060	2.5
0		5	0.0060	2.5
10		4	0.0048	2.5
20		2	0.0024	2.5
30		4	0.0048	2.5
40		6	0.0072	2.5
50		10	0.0120	2.5
20	V min.= 3.5	15	0.0179	2.5
	V max.= 4.2	20	0.0239	2.5

PCS Band (Part 24E)**GSM Mode**

Middle Channel, $f_o=1880.0\text{ MHz}$				
Temperature (°C)	Voltage Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.7	2	0.0011	pass
-20		4	0.0021	pass
-10		2	0.0011	pass
0		-4	-0.0021	pass
10		-3	-0.0016	pass
20		-3	-0.0016	pass
30		4	0.0021	pass
40		5	0.0027	pass
50		3	0.0016	pass
20	V min.= 3.5	2	0.0011	pass
	V max.= 4.2	-3	-0.0016	pass

EDGE Mode

Middle Channel, $f_o=1880.0$ MHz				
Temperature (°C)	Voltage Supplied (V_{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.7	9	0.0048	pass
-20		8	0.0043	pass
-10		7	0.0037	pass
0		6	0.0032	pass
10		4	0.0021	pass
20		2	0.0011	pass
30		1	0.0005	pass
40		-2	-0.0011	pass
50		-4	-0.0021	pass
20	V min.= 3.5	4	0.0021	pass
	V max.= 4.2	1	0.0005	pass

**LTE:
QPSK:**

Band 5:

10.0 MHz Middle Channel, $f_o=836.6\text{MHz}$				
Temperature (°C)	Voltage Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.7	5	0.0060	2.5
-20		6	0.0072	2.5
-10		3	0.0036	2.5
0		-1	-0.0012	2.5
10		2	0.0024	2.5
20		-2	-0.0024	2.5
30		-4	-0.0048	2.5
40		-6	-0.0072	2.5
50		-5	-0.0060	2.5
20	V min.= 3.5	4	0.0048	2.5
	V max.= 4.2	-1	-0.0012	2.5

16QAM:

Band 5:

10.0 MHz Middle Channel, $f_o=836.6\text{MHz}$				
Temperature (°C)	Voltage Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.7	-4	-0.0048	2.5
-20		-1	-0.0012	2.5
-10		-3	-0.0036	2.5
0		-2	-0.0024	2.5
10		-4	-0.0048	2.5
20		-5	-0.0060	2.5
30		-8	-0.0096	2.5
40		-7	-0.0084	2.5
50		-9	-0.0108	2.5
20	V min.= 3.5	-8	-0.0096	2.5
	V max.= 4.2	-2	-0.0024	2.5

***** END OF REPORT *****