

Report No.: SHEM210500492001

Page: 1 of 61

TEST REPORT

Application No.: SHEM2105004920CR FCC ID: 2APV2-CSDB22C

Applicant: Hangzhou Ezviz Software Co., Ltd.

Address of Applicant: Room 302, Unit B, Building 2,399 Danfeng Road, Binjiang

District, Hangzhou, Zhejiang

Manufacturer: Hangzhou Ezviz Software Co., Ltd.

Address of Manufacturer: Room 302, Unit B, Building 2,399 Danfeng Road, Binjiang

District, Hangzhou, Zhejiang

Equipment Under Test (EUT):

EUT Name: Wire-Free Video Doorbell

Model No.: CS-DB2
Trade mark: EZVIZ

Standard(s): 47 CFR Part 15, Subpart C 15.247

Date of Receipt: 2021-05-31

Date of Test: 2021-05-28 to 2021-06-14

Date of Issue: 2021-06-14

Test Result: Pass*

parlan shan

Parlam Zhan Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, recently the prosecution of the content o

NO.588 West Jindu Road,Songjiang District,Shanghai,China 201612 中国・上海・松江区金都西路588号 邮编: 201612 t(86-21) 61915666 f(86-21) 61915678 www.sgsgroup.com.cn t(86-21) 61915666 f(86-21) 61915678 e sgs.china@sgs.com

^{*} In the configuration tested, the EUT complied with the standards specified above.



Report No.: SHEM210500492001

Page: 2 of 61

Revision Record									
Version Description Date Remark									
00	Original	2021-06-14	1						

Authorized for issue by:		
	Michael Mil	
	Micheal Niu / Project Engineer	
	Parlam Zhan	
	Parlam Zhan / Reviewer	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

NO.588 West Jindu Road, Songjiang District, Shanghai, China 201612 中国・上海・松江区金都西路588号 邮编: 201612





Page: 3 of 61

2 Test Summary

Radio Spectrum Technical Requirement								
Item	Standard	Method	Requirement	Result				
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)	Pass				

Radio Spectrum Matter Part								
Item	Standard	Method	Requirement	Result				
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass				
Minimum 6dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass				
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.9.1	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass				
Power Spectrum Density	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass				
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass				
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass				
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass				
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass				



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

NO.588 West Jindu Road,Songjiang District,Shanghai,China 201612 中国・上海・松江区金都西路588号 邮编: 201612



Report No.: SHEM210500492001

Page: 4 of 61

3 Contents

1	CO'	VER PAGE	Page 1
2		ST SUMMARY	
3		NTENTS	
4	GEI	NERAL INFORMATION	5
	4.1	DETAILS OF E.U.T.	F
	4.2	Power Level Setting Using in Test:	
	4.3	DESCRIPTION OF SUPPORT UNITS.	
	4.4	MEASUREMENT UNCERTAINTY	
	4.5	TEST LOCATION	7
	4.6	TEST FACILITY	
	4.7	DEVIATION FROM STANDARDS	
	4.8	ABNORMALITIES FROM STANDARD CONDITIONS	7
5	EQ	UIPMENT LIST	8
6	RAI	DIO SPECTRUM TECHNICAL REQUIREMENT	10
	6.1	Antenna Requirement	10
7	RA	DIO SPECTRUM MATTER TEST RESULTS	11
	7.1	CONDUCTED EMISSIONS AT AC POWER LINE (150kHz-30MHz)	11
	7.2	MINIMUM 6DB BANDWIDTH	
	7.3	CONDUCTED PEAK OUTPUT POWER	
	7.4	POWER SPECTRUM DENSITY	
	7.5	CONDUCTED BAND EDGES MEASUREMENT	19
	7.6	CONDUCTED SPURIOUS EMISSIONS	21
	7.7	RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS	23
	7.8	RADIATED SPURIOUS EMISSIONS	38
8	TES	ST SETUP PHOTOGRAPHS	61
9	E11.	T CONSTRUCTIONAL DETAILS	C4
IJ	⊏U	I CUNSTRUCTIUNAL DETAILS	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

NO.588 West Jindu Road, Songjiang District, Shanghai, China 201612 中国・上海・松江区金都西路588号 邮编: 201612





Page: 5 of 61

4 General Information

4.1 Details of E.U.T.

Power supply: DC 5V by Adapter

Battery Model: HIK60110H

Nominal Voltage:3.7V

Nominal Capacity:5200mAh

Rated Capacity:5100mAh/18.87Wh Charging Limited Voltage:4.2V

Test voltage: AC 120V/60Hz

Antenna Gain: 2.73dBi (Provided by manufacturer)

Antenna Type: PIFA Antenna

Channel Spacing: 5MHz

Modulation Type: 802.11b: DSSS (CCK, DQPSK, DBPSK)

802.11g/n: OFDM (64QAM, 16QAM, QPSK, BPSK)

Data Rate: 802.11b: 1/2/5.5/11Mbps,

802.11g: 6/9/12/18/24/36/48/54Mbps 802.11n: MCS 0 to 7 for HT20MHz

Number of Channels: 802.11b/g/n(HT20):11

Operation Frequency: 802.11b/g/n(HT20): 2412MHz to 2462MHz

4.2 Power level setting using in test:

Channal	802.11b	802.11g	802.11n(HT20)
Channel	Ant 1	Ant 1	Ant 1
1	30	30	30
6	30	30	30
11	30	30	30

4.3 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Note Book	LENOVO	Y510P	SZSMT55INP141501639
SecureCRT	VanDyke	V 6.2.0	1
Serial port adapter plate	1	Test Plate 3	1



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@ags.com

NO.588 West Jindu Road, Songjiang District, Shanghai, China 201612 中国・上海・松江区金都西路588号 邮编: 201612





Page: 6 of 61

4.4 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	8.4 x 10 ⁻⁸
2	Timeout	2s
3	Duty Cycle	0.37%
4	Occupied Bandwidth	3%
5	RF Conducted Power	0.6dB
6	RF Power Density	2.9dB
7	Conducted Spurious Emissions	0.75dB
0	DE Dadieted Deves	5.2dB (Below 1GHz)
8	RF Radiated Power	5.9dB (Above 1GHz)
		4.2dB (Below 30MHz)
	Dedicted Courieus Fraissian Test	4.5dB (30MHz-1GHz)
9	Radiated Spurious Emission Test	5.1dB (1GHz-18GHz)
		5.4dB (Above 18GHz)
10	Temperature Test	1°C
11	Humidity Test	3%
12	Supply Voltages	1.5%
13	Time	3%

Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's Instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@ags.com

NO.588 West Jindu Road,Songjiang District,Shanghai,China 201612 中国・上海・松江区金都西路588号 邮编: 201612





Page: 7 of 61

4.5 Test Location

All tests were performed at:

Compliance Certification Services (Kunshan) Inc.

No.10 Weiye Rd, Innovation park, Eco&Tec, Development Zone, Kunshan City, Jiangsu, China.

Tel: +86 512 5735 5888 Fax: +86 512 5737 0818

No tests were sub-contracted.

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• CNAS (No. CNAS L4354)

CNAS has accredited Compliance Certification Services (Kunshan) Inc. to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• A2LA (Certificate No. 2541.01)

Compliance Certification Services (Kunshan) Inc. is accredited by the American Association for Laboratory Accreditation (A2LA). Certificate No. 2541.01.

• FCC (Designation Number: CN1172)

Compliance Certification Services Inc. has been recognized as an accredited testing laboratory. Designation Number: CN1172.

• ISED (CAB identifier: CN0072)

Compliance Certification Services (Kunshan) Inc. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory.

Company Number: 2324E

• VCCI (Member No.: 1938)

The 3m and 10m Semi-anechoic chamber and Shielded Room of Compliance Certification Services (Kunshan) Inc. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-1600, C-1707, T-1499, G-10216 respectively.

4.7 Deviation from Standards

None

4.8 Abnormalities from Standard Conditions

None



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.apx, and, for electronic format documents, subject to Terms and Conditions for Electronic Document at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@ags.com

NO.588 West Jindu Road, Songjiang District, Shanghai, China 201612 中国・上海・松江区金都西路588号 邮编: 201612





Page: 8 of 61

5 Equipment List

Item	Equipment	Manufacturer	Model	Serial Number	Cal Date	Cal. Due Date
Con	ducted Emission at Mains Terminals (150	kHz-30MHz)				
1	EMI Test Receive	R&S	ESCI	100781	02/01/2021	01/31/2022
2	LISN	R&S	ENV216	101604	10/19/2020	10/18/2021
3	LISN	Schwarzbeck	NNLK 8129	8129-143	10/19/2020	10/18/2021
4	Pulse Limiter	R&S	ESH3-Z2	100609	02/01/2021	01/31/2022
5	CE test Cable	Thermax	1	14	10/17/2020	10/16/2021
6	Test Software	Farad	EZ-EMC	CCS-03A1	N.C.R	N.C.R
RF	Conducted Test					
1	Spectrum Analyzer	Agilent	E4446A	MY44020154	04/16/2021	04/15/2022
2	Spectrum Analyzer	Keysight	N9020A	MY55370209	12/02/2020	12/01/2021
3	Spectrum Analyzer	Keysight	N9010A	MY56480443	02/01/2021	01/31/2022
4	Signal Generator	Agilent	N5182A	MY50142015	09/25/2020	09/24/2021
5	Radio Communication Test Station	Anritsu	MT8000A	6262012849	N/A	N/A
6	Radio Communication Analyzer	Anritsu	MT8821C	6201692222	N/A	N/A
7	Universal Radio Communication Tester	R&S	CMW500	159275	10/19/2020	10/18/2021
8	Universal Radio Communication Tester	R&S	CMW500	167239	04/16/2021	04/15/2022
9	Power Meter	Anritsu	ML2495A	1445010	04/15/2021	04/14/2022
10	Switcher	CCSRF	FY562	KUS2001M001 -3	10/19/2020	10/18/2021
11	AC Power Source	EXTECH	6605	1570106	N.C.R	N.C.R
12	DC Power Supply	Aglient	E3632A	MY50340053	N.C.R	N.C.R
13	6dB Attenuator	Mini-Circuits	NAT-6-2W	15542-1	N.C.R	N.C.R
14	Power Divider	AISI	IOWOPE2068	PE2068	N.C.R	N.C.R
15	Filter	MICRO-TRONICS	BRM50701	5	N.C.R	N.C.R
16	Conducted test cable	/	RF01-RF04	/	04/15/2021	04/14/2022
17	Software	BST	TST-PASS	N/A	N/A	N/A
18	Temp. / Humidity Chamber	TERCHY	MHK-120AK	X30109	04/15/2021	04/14/2022
19	Thermometer	Anymetre	TH603	CCS007	10/16/2020	10/15/2021
RF R	adiated Test	,				
1	Spectrum Analyzer	R&S	FSV40	101493	10/19/2020	10/18/2021
2	Signal Generator	Agilent	E8257C	MY43321570	10/19/2020	10/18/2021
3	Loop Antenna	Schwarzbeck	HXYZ9170	9170-108	02/22/2021	02/21/2022
4	Bilog Antenna	TESEQ	CBL 6112D	35403	06/22/2019	06/21/2021
5	Bilog Antenna	SCHWARZBECK	VULB9160	9160-3342	04/13/2021	04/12/2023
6	Horn-antenna(1-18GHz)	Schwarzbeck	BBHA9120D	267	10/26/2020	10/25/2022
7	Horn-antenna(1-18GHz)	ETS-LINDGREN	3117	00143290	02/22/2021	02/21/2023
8	Horn Antenna(18-40GHz)	Schwarzbeck	BBHA9170	BBHA9170171	02/22/2021	02/21/2022
9	Horn-antenna(40-60GHz)	REBES	SAZ-2410-19-S1	06299-01	N/A	N/A
10	Horn-antenna(50-75GHz)	REBES	SAZ-2410-15-S1	01731-01	N/A	N/A
11	Horn-antenna(75-110GHz)	REBES	SAZ-2410-10-S1	01773-09	N/A	N/A
12	Horn-antenna(110-170GHz)	REBES	SAZ-2410-06-S1	01776-05	N/A	N/A
13	Horn-antenna(140-220GHz)	REBES	SAZ-2410-05-S1	01759-04	N/A	N/A
14	Horn-antenna(220-325GHz)	REBES	SAR-2309-03-S2	06300-01	N/A	N/A
15	Extended waveguide(40-60GHz)	REBES	SWG-19025-FB	06303-01	N/A	N/A
16	Extended waveguide(50-75GHz)	REBES	SWG-15025-FB	01525-09	N/A	N/A



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Cond

NO.588 West Jindu Road,Songjiang District,Shanghai,China 201612 中国・上海・松江区金都西路588号 邮编: 201612



Report No.: SHEM210500492001

Page: 9 of 61

Extended waveguide(75-110GHz) REBES SWG-10025-FB 01509-01 N/A N/A							
Stended waveguide(140-220GHz)	17	Extended waveguide(75-110GHz)	REBES	SWG-10025-FB	01509-01	N/A	N/A
Extended waveguide(220-325GHz) REBES SWG-03025-FB 06301-01 N/A N/A	18	Extended waveguide(110-170GHz)	REBES	SWG-06025-FB	06302-01	N/A	N/A
21 Harmonic mixer(110-170GHz) REBES STH-06SF-S1 06110-01 N/A N/A 22 Harmonic mixer(40-60GHz) REBES STH-19SF-S1 06937-01 N/A N/A 23 Waveguide Harmonic Mixer(50-75GHz) KEYSIGHT M1970V MY51390966 N/A N/A 24 Vaveguide Harmonic Mixer(50-75GHz) cable Silverline SLU18-SMSM -01.00M 99612 N/A N/A 25 Waveguide Harmonic Mixer(75-110GHz) cable KEYSIGHT M1970W MY51430883 N/A N/A 26 vaveguide Harmonic Mixer(75-110GHz) cable Silverline SLU18-SMSM -01.00M 99612 N/A N/A N/A 26 vaveguide Harmonic Mixer(75-110GHz) cable Silverline SLU18-SMSM -01.00M 94202 N/A N/A N/A 27 Pre-Amplifier(30MHz~18GHz) LNA / / 04/15/2021 04/14/2022 28 Amplifier(18~40GHz) COM-POWER PAM-840A 461332 10/23/2020 10/22/2021 29 Low Pass Filter MICRO-TR	19	Extended waveguide(140-220GHz)	REBES	SWG-05025-FB	06304-01	N/A	N/A
22 Harmonic mixer(40-60GHz) REBES STH-19SF-S1 06937-01 N/A N/A 23 Waveguide Harmonic Mixer(50-75GHz) KEYSIGHT M1970V MY51390966 N/A N/A 24 Vaveguide Harmonic Mixer(50-75GHz) cable Silverline SLU18-SMSM -01.00M 99612 N/A N/A 25 Waveguide Harmonic Mixer(75-110GHz) KEYSIGHT M1970W MY51430883 N/A N/A 26 Waveguide Harmonic Mixer(75-110GHz) cable Silverline SLU18-SMSM -01.00M 94202 N/A N/A 27 Pre-Amplifier(30MHz~18GHz) LNA / / 04/15/2021 04/14/2022 28 Amplifier(18~40GHz) COM-POWER PAM-840A 461332 10/23/2020 10/22/2021 29 Low Pass Filter MICRO-TRONICS VLFX-950 RV142900829 N.C.R N.C.R 30 High Pass Filter MicRO-TRONICS BRC50704-01 2 N.C.R N.C.R 31 Filter (5450MHz~5930 MHz) MICRO-TRONICS BRC50705-01 4	20	Extended waveguide(220-325GHz)	REBES	SWG-03025-FB	06301-01	N/A	N/A
23 Waveguide Harmonic Mixer(50-75GHz) KEYSIGHT M1970V MY51390966 N/A N/A 24 Vaveguide Harmonic Mixer(50-75GHz) cable Silverline SLU18-SMSM	21	Harmonic mixer(110-170GHz)	REBES	STH-06SF-S1	06110-01	N/A	N/A
24 Waveguide Harmonic Mixer(50-75GHz) cable Silverline SLU18-SMSM -01.00M 99612 N/A N/A 25 Waveguide Harmonic Mixer(75-110GHz) KEYSIGHT M1970W MY51430883 N/A N/A 26 Vaveguide Harmonic Mixer(75-110GHz) cable Silverline SLU18-SMSM -01.00M 94202 N/A N/A 27 Pre-Amplifier(30MHz~18GHz) LNA / / 04/15/2021 04/14/2022 28 Amplifier(18~40GHz) COM-POWER PAM-840A 461332 10/23/2020 10/22/2021 29 Low Pass Filter MICRO-TRONICS VLFX-950 RV142900829 N.C.R N.C.R 30 High Pass Filter Micro-TRONICS BRC50704-01 2 N.C.R N.C.R 31 Filter (5450MHz~5770 MHz) MICRO-TRONICS BRC50705-01 4 N.C.R N.C.R 32 Filter (5690 MHz~5930 MHz) MICRO-TRONICS BRC50703-01 2 N.C.R N.C.R 33 Filter (858 MHz~915 MHz) MICRO-TRONICS BRM14698 1	22	Harmonic mixer(40-60GHz)	REBES	STH-19SF-S1	06937-01	N/A	N/A
Waveguide Harmonic Mixer(50-75GHz) cable Silverline -01.00M 99612 N/A N/A 25 Waveguide Harmonic Mixer(75-110GHz) KEYSIGHT M1970W MY51430883 N/A N/A 26 Vaveguide Harmonic Mixer(75-110GHz) cable Silverline SLU18-SMSM -01.00M 94202 N/A N/A 27 Pre-Amplifier(30MHz~18GHz) LNA / 04/15/2021 04/14/2022 28 Amplifier(18~40GHz) COM-POWER PAM-840A 461332 10/23/2020 10/22/2021 29 Low Pass Filter MICRO-TRONICS VLFX-950 RV142900829 N.C.R N.C.R 30 High Pass Filter Micro-TRONICS BRC50704-01 2 N.C.R N.C.R 31 Filter (5450MHz~5770 MHz) MICRO-TRONICS BRC50705-01 4 N.C.R N.C.R 32 Filter (5690 MHz~5930 MHz) MICRO-TRONICS BRC50703-01 2 N.C.R N.C.R 33 Filter (815MHz~915 MHz) MICRO-TRONICS BRM14698 1 N.C.R N.C.R	23	Waveguide Harmonic Mixer(50-75GHz)	KEYSIGHT	M1970V	MY51390966	N/A	N/A
26 Vaveguide Harmonic Mixer(75-110GHz) cabl Silverline SLU18-SMSM -01.00M 94202 N/A N/A 27 Pre-Amplifier(30MHz~18GHz) LNA / / 04/15/2021 04/14/2022 28 Amplifier(18~40GHz) COM-POWER PAM-840A 461332 10/23/2020 10/22/2021 29 Low Pass Filter MICRO-TRONICS VLFX-950 RV142900829 N.C.R N.C.R 30 High Pass Filter Min-Circuits VHF-1200 15542 N.C.R N.C.R 31 Filter (5450MHz~5770 MHz) MICRO-TRONICS BRC50704-01 2 N.C.R N.C.R 32 Filter (5690 MHz~5930 MHz) MICRO-TRONICS BRC50705-01 4 N.C.R N.C.R 33 Filter (5150 MHz~5350 MHz) MICRO-TRONICS BRC50703-01 2 N.C.R N.C.R 34 Filter (885 MHz~915 MHz) MICRO-TRONICS BRM14698 1 N.C.R N.C.R 35 Filter (815 MHz~860 MHz) MICRO-TRONICS BRM14700 1 N.C.R N	24	Naveguide Harmonic Mixer(50-75GHz) cable	Silverline		99612	N/A	N/A
Vaveguide Harmonic Mixer(75-110GHz) cabl Silverline -01.00M 94202 N/A N/A N/A -01.00M 94202 N/A N/A -01.00M N/A N/A -01.00M 94202 N/A N/A -01.00M N/A N/A -01.00M 94202 N/A N/A -01.00M N/C/3020 -01.00M N/C/3020	25	Waveguide Harmonic Mixer(75-110GHz)	KEYSIGHT	M1970W	MY51430883	N/A	N/A
28 Amplifier(18~40GHz) COM-POWER PAM-840A 461332 10/23/2020 10/22/2021 29 Low Pass Filter MICRO-TRONICS VLFX-950 RV142900829 N.C.R N.C.R 30 High Pass Filter Micro-Tronics VHF-1200 15542 N.C.R N.C.R 31 Filter (5450MHz~5770 MHz) MICRO-TRONICS BRC50704-01 2 N.C.R N.C.R 32 Filter (5690 MHz~5930 MHz) MICRO-TRONICS BRC50703-01 4 N.C.R N.C.R 33 Filter (5150 MHz~5930 MHz) MICRO-TRONICS BRC50703-01 2 N.C.R N.C.R 34 Filter (885 MHz~915 MHz) MICRO-TRONICS BRM14698 1 N.C.R N.C.R 35 Filter (815 MHz~860 MHz) MICRO-TRONICS BRM14697 1 N.C.R N.C.R 36 Filter (1745 MHz~1910 MHz) MICRO-TRONICS BRM50715 1 N.C.R N.C.R 37 Filter (1922 MHz~1977 MHz) MICRO-TRONICS BRM50715 1 N.C.R N.C.R	26	/aveguide Harmonic Mixer(75-110GHz) cabl	Silverline		94202	N/A	N/A
29 Low Pass Filter MICRO-TRONICS VLFX-950 RV142900829 N.C.R N.C.R 30 High Pass Filter Mini-Circuits VHF-1200 15542 N.C.R N.C.R 31 Filter (5450MHz~5770 MHz) MICRO-TRONICS BRC50704-01 2 N.C.R N.C.R 32 Filter (5690 MHz~5930 MHz) MICRO-TRONICS BRC50705-01 4 N.C.R N.C.R 33 Filter (5150 MHz~5350 MHz) MICRO-TRONICS BRC50703-01 2 N.C.R N.C.R 34 Filter (885 MHz~915 MHz) MICRO-TRONICS BRM14698 1 N.C.R N.C.R 35 Filter (815 MHz~860 MHz) MICRO-TRONICS BRM14697 1 N.C.R N.C.R 36 Filter (1745 MHz~1910 MHz) MICRO-TRONICS BRM50715 1 N.C.R N.C.R 37 Filter (1922 MHz~1977 MHz) MICRO-TRONICS BRM50715 1 N.C.R N.C.R 38 Filter (2550 MHz) MICRO-TRONICS BRM50713 1 N.C.R N.C.R <	27	Pre-Amplifier(30MHz~18GHz)	LNA	/	/	04/15/2021	04/14/2022
30 High Pass Filter Mini-Circuits VHF-1200 15542 N.C.R N.C.R 31 Filter (5450MHz~5770 MHz) MICRO-TRONICS BRC50704-01 2 N.C.R N.C.R 32 Filter (5690 MHz~5930 MHz) MICRO-TRONICS BRC50705-01 4 N.C.R N.C.R 33 Filter (5150 MHz~5350 MHz) MICRO-TRONICS BRC50703-01 2 N.C.R N.C.R 34 Filter (885 MHz~915 MHz) MICRO-TRONICS BRM14698 1 N.C.R N.C.R 35 Filter (815 MHz~860 MHz) MICRO-TRONICS BRM14697 1 N.C.R N.C.R 36 Filter (1745 MHz~1910 MHz) MICRO-TRONICS BRM14700 1 N.C.R N.C.R 37 Filter (1922 MHz~1977 MHz) MICRO-TRONICS BRM50715 1 N.C.R N.C.R 38 Filter (2550 MHz) MICRO-TRONICS BRM50713 1 N.C.R N.C.R 39 Filter (1532 MHz~1845 MHz) MICRO-TRONICS BRM50713 1 N.C.R N.C.R	28	Amplifier(18~40GHz)	COM-POWER	PAM-840A	461332	10/23/2020	10/22/2021
31 Filter (5450MHz~5770 MHz) MICRO-TRONICS BRC50704-01 2 N.C.R N.C.R 32 Filter (5690 MHz~5930 MHz) MICRO-TRONICS BRC50705-01 4 N.C.R N.C.R 33 Filter (5150 MHz~5350 MHz) MICRO-TRONICS BRC50703-01 2 N.C.R N.C.R 34 Filter (885 MHz~915 MHz) MICRO-TRONICS BRM14698 1 N.C.R N.C.R 35 Filter (815 MHz~860 MHz) MICRO-TRONICS BRM14697 1 N.C.R N.C.R 36 Filter (1745 MHz~1910 MHz) MICRO-TRONICS BRM14700 1 N.C.R N.C.R 37 Filter (1922 MHz~1977 MHz) MICRO-TRONICS BRM50715 1 N.C.R N.C.R 38 Filter (2550 MHz) MICRO-TRONICS HPM13362 5 N.C.R N.C.R 39 Filter (1532 MHz~1845 MHz) MICRO-TRONICS BRM50713 1 N.C.R N.C.R 40 Filter (2.4GHz) MICRO-TRONICS BRM50701 5 N.C.R N.C.R 41 RE test cable / RE01-RE04 / 04/15/2021 04/14/2022	29	Low Pass Filter	MICRO-TRONICS	VLFX-950	RV142900829	N.C.R	N.C.R
32 Filter (5690 MHz~5930 MHz) MICRO-TRONICS BRC50705-01 4 N.C.R N.C.R 33 Filter (5150 MHz~5350 MHz) MICRO-TRONICS BRC50703-01 2 N.C.R N.C.R 34 Filter (885 MHz~915 MHz) MICRO-TRONICS BRM14698 1 N.C.R N.C.R 35 Filter (815 MHz~860 MHz) MICRO-TRONICS BRM14697 1 N.C.R N.C.R 36 Filter (1745 MHz~1910 MHz) MICRO-TRONICS BRM14700 1 N.C.R N.C.R 37 Filter (1922 MHz~1977 MHz) MICRO-TRONICS BRM50715 1 N.C.R N.C.R 38 Filter (2550 MHz) MICRO-TRONICS HPM13362 5 N.C.R N.C.R 39 Filter (1532 MHz~1845 MHz) MICRO-TRONICS BRM50713 1 N.C.R N.C.R 40 Filter (2.4GHz) MICRO-TRONICS BRM50701 5 N.C.R N.C.R 41 RE test cable / RE01-RE04 / 04/15/2021 04/14/2022	30	High Pass Filter	Mini-Circuits	VHF-1200	15542	N.C.R	N.C.R
33 Filter (5150 MHz~5350 MHz) MICRO-TRONICS BRC50703-01 2 N.C.R N.C.R 34 Filter (885 MHz~915 MHz) MICRO-TRONICS BRM14698 1 N.C.R N.C.R 35 Filter (815 MHz~860 MHz) MICRO-TRONICS BRM14697 1 N.C.R N.C.R 36 Filter (1745 MHz~1910 MHz) MICRO-TRONICS BRM14700 1 N.C.R N.C.R 37 Filter (1922 MHz~1977 MHz) MICRO-TRONICS BRM50715 1 N.C.R N.C.R 38 Filter (2550 MHz) MICRO-TRONICS HPM13362 5 N.C.R N.C.R 39 Filter (1532 MHz~1845 MHz) MICRO-TRONICS BRM50713 1 N.C.R N.C.R 40 Filter (2.4GHz) MICRO-TRONICS BRM50701 5 N.C.R N.C.R 41 RE test cable / RE01-RE04 / 04/15/2021 04/14/2022	31	Filter (5450MHz~5770 MHz)	MICRO-TRONICS	BRC50704-01	2	N.C.R	N.C.R
34 Filter (885 MHz~915 MHz) MICRO-TRONICS BRM14698 1 N.C.R N.C.R 35 Filter (815 MHz~860 MHz) MICRO-TRONICS BRM14697 1 N.C.R N.C.R 36 Filter (1745 MHz~1910 MHz) MICRO-TRONICS BRM14700 1 N.C.R N.C.R 37 Filter (1922 MHz~1977 MHz) MICRO-TRONICS BRM50715 1 N.C.R N.C.R 38 Filter (2550 MHz) MICRO-TRONICS HPM13362 5 N.C.R N.C.R 39 Filter (1532 MHz~1845 MHz) MICRO-TRONICS BRM50713 1 N.C.R N.C.R 40 Filter (2.4GHz) MICRO-TRONICS BRM50701 5 N.C.R N.C.R 41 RE test cable / RE01-RE04 / 04/15/2021 04/14/2022	32	Filter (5690 MHz~5930 MHz)	MICRO-TRONICS	BRC50705-01	4	N.C.R	N.C.R
35 Filter (815 MHz~860 MHz) MICRO-TRONICS BRM14697 1 N.C.R N.C.R 36 Filter (1745 MHz~1910 MHz) MICRO-TRONICS BRM14700 1 N.C.R N.C.R 37 Filter (1922 MHz~1977 MHz) MICRO-TRONICS BRM50715 1 N.C.R N.C.R 38 Filter (2550 MHz) MICRO-TRONICS HPM13362 5 N.C.R N.C.R 39 Filter (1532 MHz~1845 MHz) MICRO-TRONICS BRM50713 1 N.C.R N.C.R 40 Filter (2.4GHz) MICRO-TRONICS BRM50701 5 N.C.R N.C.R 41 RE test cable / RE01-RE04 / 04/15/2021 04/14/2022	33	Filter (5150 MHz~5350 MHz)	MICRO-TRONICS	BRC50703-01	2	N.C.R	N.C.R
36 Filter (1745 MHz~1910 MHz) MICRO-TRONICS BRM14700 1 N.C.R N.C.R 37 Filter (1922 MHz~1977 MHz) MICRO-TRONICS BRM50715 1 N.C.R N.C.R 38 Filter (2550 MHz) MICRO-TRONICS HPM13362 5 N.C.R N.C.R 39 Filter (1532 MHz~1845 MHz) MICRO-TRONICS BRM50713 1 N.C.R N.C.R 40 Filter (2.4GHz) MICRO-TRONICS BRM50701 5 N.C.R N.C.R 41 RE test cable / RE01-RE04 / 04/15/2021 04/14/2022	34	Filter (885 MHz~915 MHz)	MICRO-TRONICS	BRM14698	1	N.C.R	N.C.R
37 Filter (1922 MHz~1977 MHz) MICRO-TRONICS BRM50715 1 N.C.R N.C.R 38 Filter (2550 MHz) MICRO-TRONICS HPM13362 5 N.C.R N.C.R 39 Filter (1532 MHz~1845 MHz) MICRO-TRONICS BRM50713 1 N.C.R N.C.R 40 Filter (2.4GHz) MICRO-TRONICS BRM50701 5 N.C.R N.C.R 41 RE test cable / RE01-RE04 / 04/15/2021 04/14/2022	35	Filter (815 MHz~860 MHz)	MICRO-TRONICS	BRM14697	1	N.C.R	N.C.R
38 Filter (2550 MHz) MICRO-TRONICS HPM13362 5 N.C.R N.C.R 39 Filter (1532 MHz~1845 MHz) MICRO-TRONICS BRM50713 1 N.C.R N.C.R 40 Filter (2.4GHz) MICRO-TRONICS BRM50701 5 N.C.R N.C.R 41 RE test cable / RE01-RE04 / 04/15/2021 04/14/2022	36	Filter (1745 MHz~1910 MHz)	MICRO-TRONICS	BRM14700	1	N.C.R	N.C.R
39 Filter (1532 MHz∼1845 MHz) MICRO-TRONICS BRM50713 1 N.C.R N.C.R 40 Filter (2.4GHz) MICRO-TRONICS BRM50701 5 N.C.R N.C.R 41 RE test cable / RE01-RE04 / 04/15/2021 04/14/2022	37	Filter (1922 MHz~1977 MHz)	MICRO-TRONICS	BRM50715	1	N.C.R	N.C.R
40 Filter (2.4GHz) MICRO-TRONICS BRM50701 5 N.C.R N.C.R 41 RE test cable / RE01-RE04 / 04/15/2021 04/14/2022	38	Filter (2550 MHz)	MICRO-TRONICS	HPM13362	5	N.C.R	N.C.R
41 RE test cable / RE01-RE04 / 04/15/2021 04/14/2022	39	Filter (1532 MHz~1845 MHz)	MICRO-TRONICS	BRM50713	1	N.C.R	N.C.R
	40	Filter (2.4GHz)	MICRO-TRONICS	BRM50701	5	N.C.R	N.C.R
42 Software Farad EZ-EMC CCS-03A1 N/A N/A	41	RE test cable	1	RE01-RE04	/	04/15/2021	04/14/2022
	42	Software	Farad	EZ-EMC	CCS-03A1	N/A	N/A



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

NO.588 West Jindu Road, Songjiang District, Shanghai, China 201612 中国・上海・松江区金都西路588号 邮編: 201612





Page: 10 of 61

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)

6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is PIFA antenna and no consideration of replacement.. The best case gain of the antenna is 2.73dBi.

Antenna location: Refer to Appendix(internal photo)



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@ggs.com

NO.588 West Jindu Road, Songjiang District, Shanghai, China 201612 中国・上海・松江区金都西路588号 邮编: 201612





Page: 11 of 61

7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207 Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

Deak Average 56* 56 to 46*
56* 56 to 46*
30 10 40
46
50



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@ags.com

NO.588 West Jindu Road, Songjiang District, Shanghai, China 201612 中国・上海・松江区金都西路588号 邮编: 201612

Member of the SGS Group (SGS SA)





Page: 12 of 61

7.1.1 E.U.T. Operation


Operating Environment:

Temperature: 24 °C Humidity: 48 % RH Atmospheric Pressure: 1010 mbar

Test mode a:TX mode_Keep the EUT in continuously transmitting mode with all modulation

types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20). Only the data of worst case is recorded in the report.

7.1.2 Test Setup Diagram

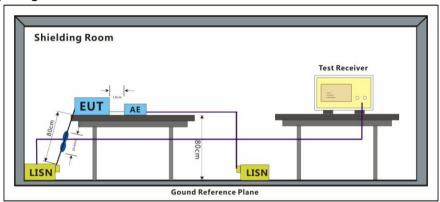

7.1.3 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50 \text{ohm}/50 \mu\text{H} + 5 \text{ohm}$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: LISN=Read Level+ Cable Loss+ LISN Factor



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.apx, and, for electronic format documents, subject to Terms and Conditions for Electronic Document at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@ags.com


NO.588 West Jindu Road, Songjiang District, Shanghai, China 201612 中国・上海・松江区金都西路588号 邮编: 201612





Page: 13 of 61

Mode:a; Line:Live Line

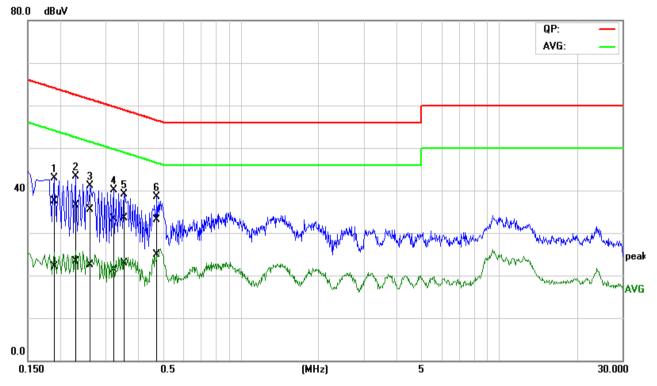

No.	Frequency	QuasiPeak	Average	Correction	QuasiPeak	Average	QuasiPeak	Average	QuasiPeak	Average	Remark
		reading	reading	factor	result	result	limit	limit	margin	margin	
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1	0.1892	18.14	2.74	19.43	37.57	22.17	64.07	54.07	-26.50	-31.90	Pass
2	0.2275	17.14	3.95	19.42	36.56	23.37	62.54	52.54	-25.98	-29.17	Pass
3	0.2603	16.03	3.11	19.42	35.45	22.53	61.42	51.42	-25.97	-28.89	Pass
4	0.3236	13.84	1.91	19.43	33.27	21.34	59.61	49.61	-26.34	-28.27	Pass
5	0.3546	14.16	3.57	19.43	33.59	23.00	58.85	48.85	-25.26	-25.85	Pass
6*	0.4763	13.61	5.50	19.46	33.07	24.96	56.40	46.40	-23.33	-21.44	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Cond


NO.588 West Jindu Road, Songjiang District, Shanghai, China 201612 中国・上海・松江区金都西路588号 邮编: 201612





Page: 14 of 61

Mode:a; Line:Neutral Line

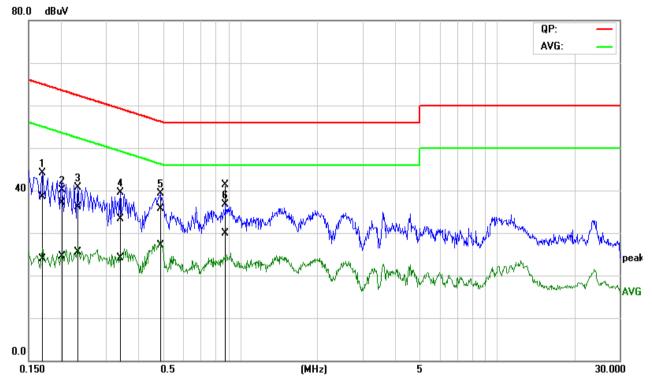

No.	Frequency	QuasiPeak reading	Average reading	Correction factor	QuasiPeak result	Average result	QuasiPeak limit	Average limit	QuasiPeak margin	Average margin	Remark
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1	0.1703	19.10	4.46	19.39	38.49	23.85	64.94	54.95	-26.45	-31.10	Pass
2	0.2049	17.76	5.18	19.39	37.15	24.57	63.41	53.41	-26.26	-28.84	Pass
3	0.2325	16.72	6.13	19.40	36.12	25.53	62.36	52.36	-26.24	-26.83	Pass
4	0.3392	13.97	4.72	19.41	33.38	24.13	59.22	49.22	-25.84	-25.09	Pass
5	0.4902	16.31	7.61	19.45	35.76	27.06	56.16	46.16	-20.40	-19.10	Pass
6*	0.8750	21.77	10.45	19.47	41.24	29.92	56.00	46.00	-14.76	-16.08	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

NO.588 West Jindu Road,Songjiang District,Shanghai,China 201612 中国・上海・松江区金都西路588号 邮编: 201612



Report No.: SHEM210500492001

Page: 15 of 61

7.2 Minimum 6dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247a(2)
Test Method: ANSI C63.10 (2013) Section 11.8.1

Limit: ≥500 kHz

7.2.1 E.U.T. Operation

Operating Environment:


Temperature: 25 °C Humidity: 49 % RH Atmospheric Pressure: 1006 mbar

Test mode a:TX mode Keep the EUT in continuously transmitting mode with all modulation

types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20). Only the data of worst case is recorded in the report.

7.2.2 Test Setup Diagram

Spectrum Analyzer

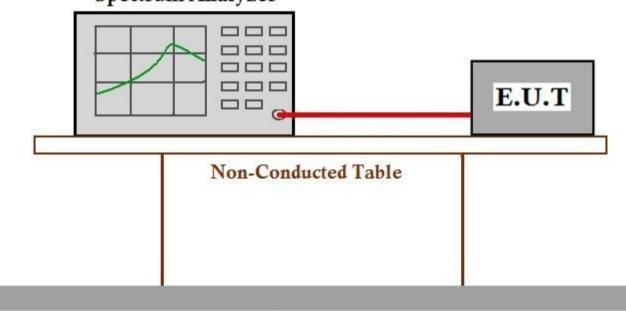

Ground Reference Plane

7.2.3 Measurement Procedure and Data

The detailed test data see: Appendix A for SHEM210500492001



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@ags.com

NO.588 West Jindu Road, Songjiang District, Shanghai, China 201612 中国・上海・松江区金都西路588号 邮编: 201612 t(86-21) 61915666 f(86-21) 61915678 www.sgsgroup.com.cn t(86-21) 61915666 f(86-21) 61915678 e sgs.china@sgs.com



Report No.: SHEM210500492001

Page: 16 of 61

7.3 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)
Test Method: ANSI C63.10 (2013) Section 11.9.1

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)					
	1 for ≥50 hopping channels					
902-928	0.25 for 25≤ hopping channels <50					
	1 for digital modulation					
	1 for ≥75 non-overlapping hopping channels					
2400-2483.5	0.125 for all other frequency hopping systems					
	1 for digital modulation					
5725-5850	1 for frequency hopping systems and digital modulation					



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CR.Doccheck@ags.com

NO.588 West Jindu Road,Songjiang District,Shanghai,China 201612 中国・上海・松江区金都西路588号 邮编: 201612



Report No.: SHEM210500492001

Page: 17 of 61

7.3.1 E.U.T. Operation

Operating Environment:


Temperature: 25 °C Humidity: 49 % RH Atmospheric Pressure: 1006 mbar

Test mode a:TX mode Keep the EUT in continuously transmitting mode with all modulation

types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE

802.11n(HT20). Only the data of worst case is recorded in the report.

7.3.2 Test Setup Diagram

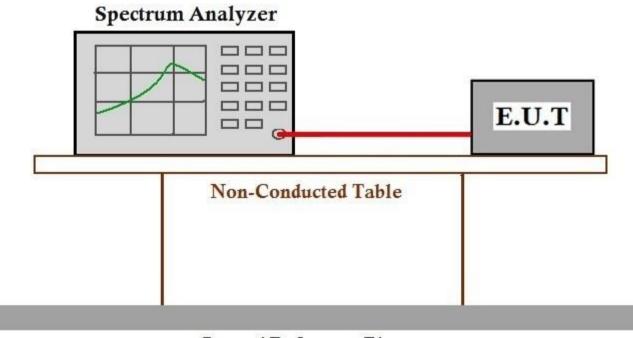

Ground Reference Plane

7.3.3 Measurement Procedure and Data

The detailed test data see: Appendix A for SHEM210500492001



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@ags.com

NO.588 West Jindu Road, Songjiang District, Shanghai, China 201612 中国・上海・松江区金都西路588号 邮编: 201612



Report No.: SHEM210500492001

Page: 18 of 61

7.4 Power Spectrum Density

Test Requirement 47 CFR Part 15, Subpart C 15.247(e)
Test Method: ANSI C63.10 (2013) Section 11.10.2

Limit: ≤8dBm in any 3 kHz band during any time interval of continuous

transmission

7.4.1 E.U.T. Operation

Operating Environment:


Temperature: 25 °C Humidity: 49 % RH Atmospheric Pressure: 1006 mbar

Test mode a:TX mode_Keep the EUT in continuously transmitting mode with all modulation

types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20). Only the data of worst case is recorded in the report.

7.4.2 Test Setup Diagram

Spectrum Analyzer

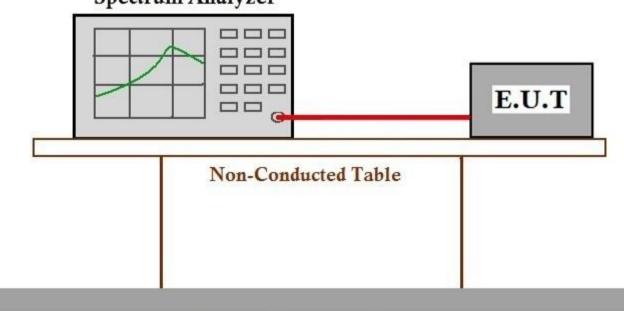

Ground Reference Plane

7.4.3 Measurement Procedure and Data

The detailed test data see: Appendix A for SHEM210500492001



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@ags.com

NO.588 West Jindu Road, Songjiang District, Shanghai, China 201612 中国・上海・松江区金都西路588号 邮编: 201612



Report No.: SHEM210500492001

Page: 19 of 61

7.5 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)
Test Method: ANSI C63.10 (2013) Section 11.13.3.2

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in

§15.209(a) (see §15.205(c)



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@ags.com

NO.588 West Jindu Road,Songjiang District,Shanghai,China 201612 中国・上海・松江区金都西路588号 邮编: 201612 t(86-21)61915666 f(86-21)61915678 www.sgsgroup.com.cn t(86-21)61915666 f(86-21)61915678 e sgs.china@sgs.com



Report No.: SHEM210500492001

Page: 20 of 61

7.5.1 E.U.T. Operation


Operating Environment:

Temperature: 25 °C Humidity: 49 % RH Atmospheric Pressure: 1006 mbar

Test mode a:TX mode_Keep the EUT in continuously transmitting mode with all modulation

types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20). Only the data of worst case is recorded in the report.

7.5.2 Test Setup Diagram

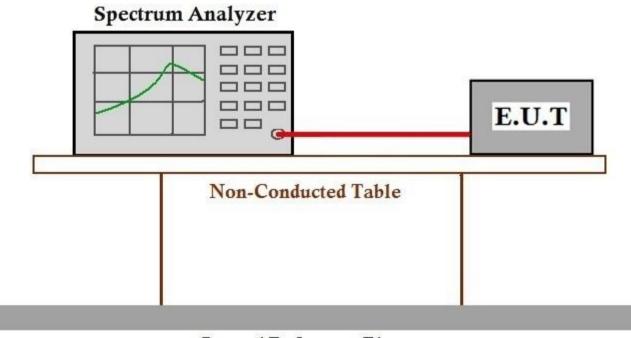

Ground Reference Plane

7.5.3 Measurement Procedure and Data

The detailed test data see: Appendix A for SHEM210500492001



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@ags.com

NO.588 West Jindu Road,Songjiang District,Shanghai,China 201612 中国・上海・松江区金都西路588号 邮编: 201612



Report No.: SHEM210500492001

Page: 21 of 61

7.6 Conducted Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)
Test Method: ANSI C63.10 (2013) Section 11.11

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in

§15.209(a) (see §15.205(c)



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@ags.com

NO.588 West Jindu Road,Songjiang District,Shanghai,China 201612 中国・上海・松江区金都西路588号 邮编: 201612



Report No.: SHEM210500492001

Page: 22 of 61

7.6.1 E.U.T. Operation

Operating Environment:


Temperature: 25 °C Humidity: 49 % RH Atmospheric Pressure: 1006 mbar

Test mode a:TX mode_Keep the EUT in continuously transmitting mode with all modulation

types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE

802.11n(HT20). Only the data of worst case is recorded in the report.

7.6.2 Test Setup Diagram

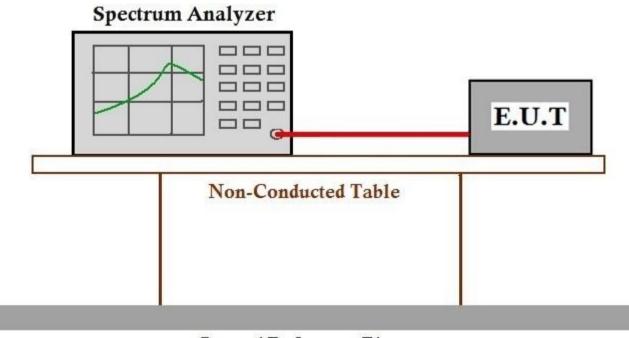

Ground Reference Plane

7.6.3 Measurement Procedure and Data

The detailed test data see: Appendix A for SHEM210500492001



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@ags.com

NO.588 West Jindu Road,Songjiang District,Shanghai,China 201612 中国・上海・松江区金都西路588号 邮编: 201612



Report No.: SHEM210500492001

Page: 23 of 61

7.7 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.209 & 15.247(d)

Test Method: ANSI C63.10 (2013) Section 6.10.5

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@ags.com

NO.588 West Jindu Road, Songjiang District, Shanghai, China 201612 中国・上海・松江区金都西路588号 邮编: 201612





Page: 24 of 61

7.7.1 E.U.T. Operation


Operating Environment:


Temperature: 25 °C Humidity: 49 % RH Atmospheric Pressure: 1006 mbar


Test mode a:TX mode_Keep the EUT in continuously transmitting mode with all modulation

types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20). Only the data of worst case is recorded in the report.

7.7.2 Test Setup Diagram









Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@ags.com

NO.588 West Jindu Road, Songjiang District, Shanghai, China 201612 中国・上海・松江区金都西路588号 邮编: 201612



Report No.: SHEM210500492001

Page: 25 of 61

7.7.3 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.ssx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@ags.com





Page: 26 of 61

Mode:a; Polarization:Horizontal; Modulation:b; bandwidth:20MHz; Channel:Low

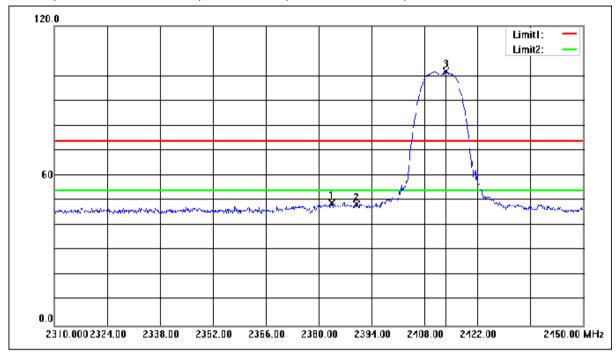

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	()	factor()	()	()	(dB)	
1	2383.500	56.30	-7.35	48.95	74.00	-25.05	peak
2	2390.000	55.70	-7.34	48.36	74.00	-25.64	peak
3	2413.600	109.16	-7.27	101.89	74.00	27.89	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


NO.588 West Jindu Road,Songjiang District,Shanghai,China 201612 中国・上海・松江区金都西路588号 邮编: 201612





Page: 27 of 61

Mode:a; Polarization:Vertical; Modulation:b; bandwidth:20MHz; Channel:Low

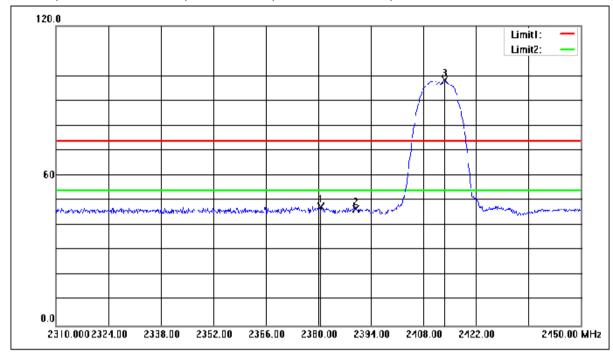

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	()	factor()	()	()	(dB)	
1	2380.700	54.90	-7.35	47.55	74.00	-26.45	peak
2	2390.000	53.86	-7.34	46.52	74.00	-27.48	peak
3	2413.600	105.61	-7.27	98.34	74.00	24.34	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


NO.588 West Jindu Road, Songjiang District, Shanghai, China 201612 中国・上海・松江区金都西路588号 邮编: 201612





Page: 28 of 61

Mode:a; Polarization:Horizontal; Modulation:b; bandwidth:20MHz; Channel:High

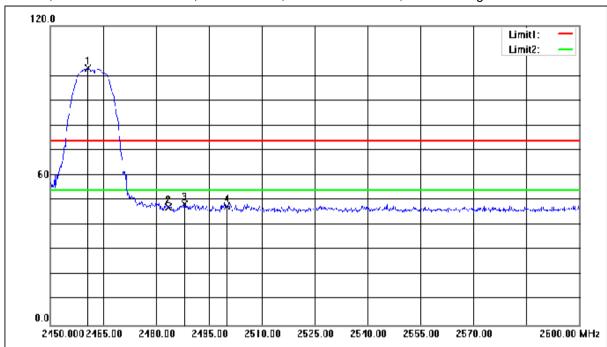

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	()	factor()	()	()	(dB)	
1	2460.650	110.23	-7.12	103.11	74.00	29.11	peak
2	2483.500	54.28	-7.06	47.22	74.00	-26.78	peak
3	2488.100	55.61	-7.04	48.57	74.00	-25.43	peak
4	2500.000	54.57	-7.00	47.57	74.00	-26.43	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


NO.588 West Jindu Road,Songjiang District,Shanghai,China 201612 中国・上海・松江区金都西路588号 邮编: 201612





Page: 29 of 61

Mode:a; Polarization:Vertical; Modulation:b; bandwidth:20MHz; Channel:High

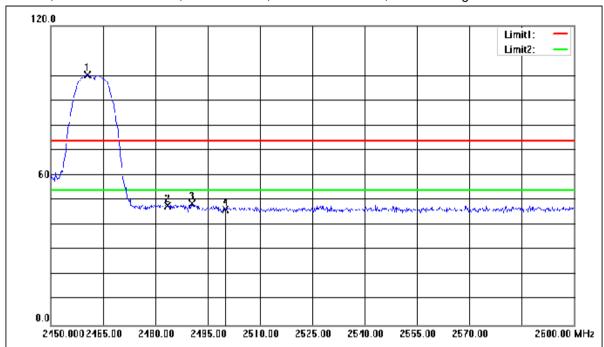

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	()	factor()	()	()	(dB)	
1	2460.500	107.58	-7.12	100.46	74.00	26.46	peak
2	2483.500	54.86	-7.06	47.80	74.00	-26.20	peak
3	2490.500	55.73	-7.04	48.69	74.00	-25.31	peak
4	2500.000	53.44	-7.00	46.44	74.00	-27.56	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


NO.588 West Jindu Road, Songjiang District, Shanghai, China 201612 中国・上海・松江区金都西路588号 邮編: 201612





Page: 30 of 61

Mode:a; Polarization:Horizontal; Modulation:g; bandwidth:20MHz; Channel:Low

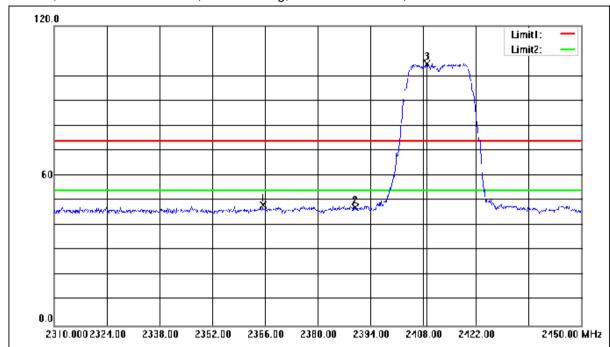

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	()	factor()	()	()	(dB)	
1	2365.440	55.57	-7.39	48.18	74.00	-25.82	peak
2	2390.000	54.74	-7.34	47.40	74.00	-26.60	peak
3	2408.980	112.15	-7.28	104.87	74.00	30.87	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


NO.588 West Jindu Road,Songjiang District,Shanghai,China 201612 中国・上海・松江区金都西路588号 邮编: 201612





Page: 31 of 61

Mode:a; Polarization:Vertical; Modulation:g; bandwidth:20MHz; Channel:Low

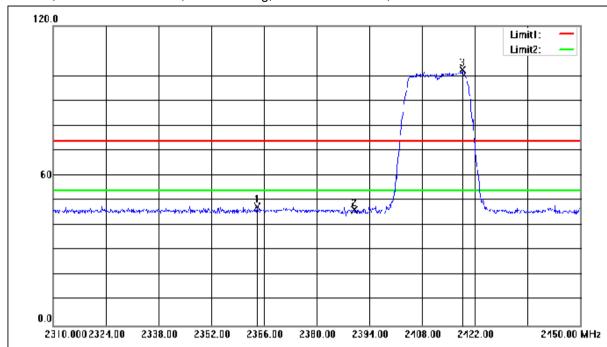

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	()	factor()	()	()	(dB)	
1	2364.180	54.83	-7.39	47.44	74.00	-26.56	peak
2	2390.000	53.58	-7.34	46.24	74.00	-27.76	peak
3	2418.780	109.71	-7.25	102.46	74.00	28.46	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


NO.588 West Jindu Road,Songjiang District,Shanghai,China 201612 中国・上海・松江区金都西路588号 邮编: 201612





Page: 32 of 61

Mode:a; Polarization:Horizontal; Modulation:g; bandwidth:20MHz; Channel:High

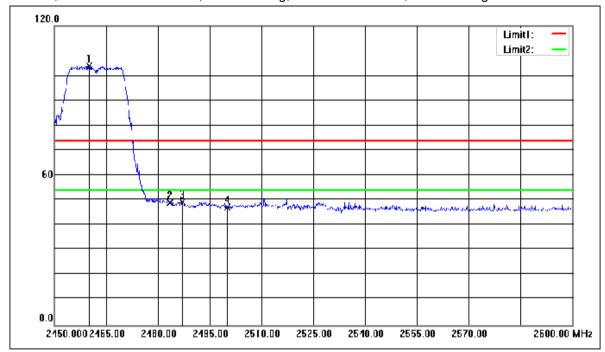

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	()	factor()	()	()	(dB)	
1	2460.050	111.02	-7.12	103.90	74.00	29.90	peak
2	2483.500	56.15	-7.06	49.09	74.00	-24.91	peak
3	2487.050	56.55	-7.05	49.50	74.00	-24.50	peak
4	2500.000	54.23	-7.00	47.23	74.00	-26.77	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


NO.588 West Jindu Road,Songjiang District,Shanghai,China 201612 中国・上海・松江区金都西路588号 邮编: 201612





Page: 33 of 61

Mode:a; Polarization:Vertical; Modulation:g; bandwidth:20MHz; Channel:High

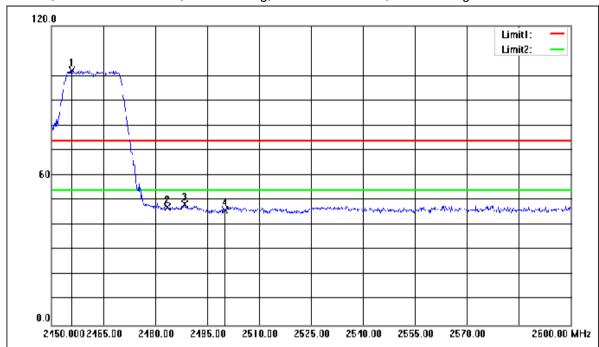

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	()	factor()	()	()	(dB)	
1	2455.850	109.26	-7.14	102.12	74.00	28.12	peak
2	2483.500	54.23	-7.06	47.17	74.00	-26.83	peak
3	2488.550	55.61	-7.04	48.57	74.00	-25.43	peak
4	2500.000	53.13	-7.00	46.13	74.00	-27.87	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


NO.588 West Jindu Road,Songjiang District,Shanghai,China 201612 中国・上海・松江区金都西路588号 邮编: 201612





Page: 34 of 61

Mode:a; Polarization:Horizontal; Modulation:n; bandwidth:20MHz; Channel:Low

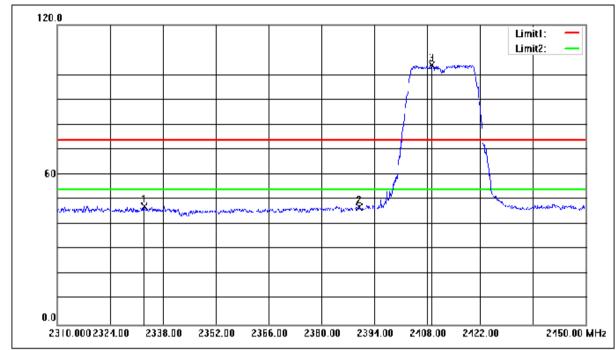

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	()	factor()	()	()	(dB)	
1	2332.960	54.81	-7.47	47.34	74.00	-26.66	peak
2	2390.000	54.18	-7.34	46.84	74.00	-27.16	peak
3	2409.120	111.37	-7.28	104.09	74.00	30.09	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


NO.588 West Jindu Road,Songjiang District,Shanghai,China 201612 中国・上海・松江区金都西路588号 邮编: 201612





Page: 35 of 61

Mode:a; Polarization:Vertical; Modulation:n; bandwidth:20MHz; Channel:Low

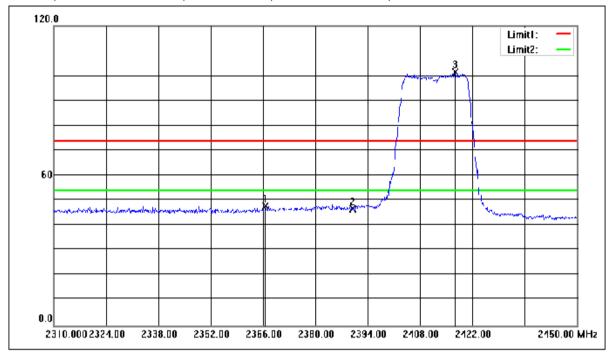

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	()	factor()	()	()	(dB)	
1	2366.700	55.26	-7.39	47.87	74.00	-26.13	peak
2	2390.000	54.01	-7.34	46.67	74.00	-27.33	peak
3	2417.380	108.78	-7.26	101.52	74.00	27.52	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


NO.588 West Jindu Road,Songjiang District,Shanghai,China 201612 中国・上海・松江区金都西路588号 邮编: 201612





Page: 36 of 61

Mode:a; Polarization:Horizontal; Modulation:n; bandwidth:20MHz; Channel:High

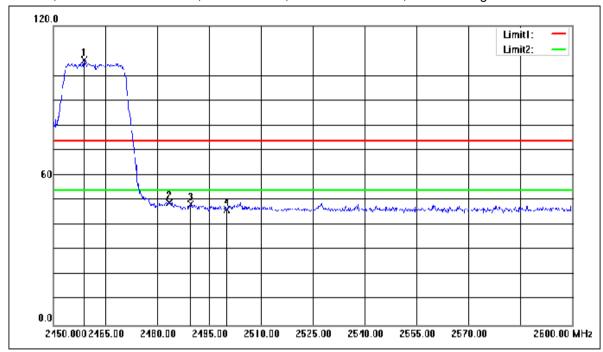

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	()	factor()	()	()	(dB)	
1	2458.850	113.45	-7.13	106.32	74.00	32.32	peak
2	2483.500	56.03	-7.06	48.97	74.00	-25.03	peak
3	2489.750	55.38	-7.04	48.34	74.00	-25.66	peak
4	2500.000	53.27	-7.00	46.27	74.00	-27.73	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


NO.588 West Jindu Road, Songjiang District, Shanghai, China 201612 中国・上海・松江区金都西路588号 邮编: 201612





Page: 37 of 61

Mode:a; Polarization:Vertical; Modulation:n; bandwidth:20MHz; Channel:High

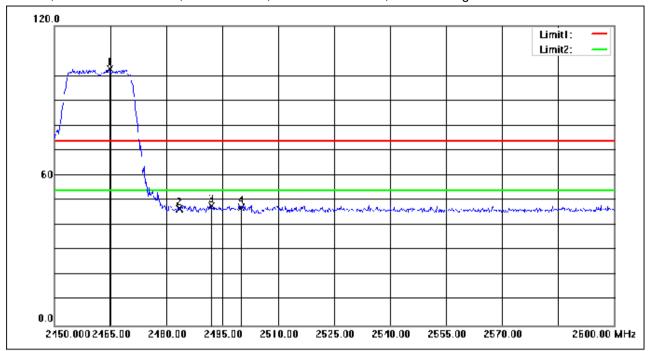

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	()	factor()	()	()	(dB)	
1	2464.850	109.99	-7.11	102.88	74.00	28.88	peak
2	2483.500	53.77	-7.06	46.71	74.00	-27.29	peak
3	2492.000	54.77	-7.02	47.75	74.00	-26.25	peak
4	2500.000	54.22	-7.00	47.22	74.00	-26.78	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

NO.588 West Jindu Road,Songjiang District,Shanghai,China 201612 中国・上海・松江区金都西路588号 邮编: 201612



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

Report No.: SHEM210500492001

Page: 38 of 61

7.8 Radiated Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.209 & 15.247(d)

Test Method: ANSI C63.10 (2013) Section 6.4,6.5,6.6

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@ags.com

NO.588 West Jindu Road, Songjiang District, Shanghai, China 201612 中国・上海・松江区金都西路588号 邮编: 201612





Page: 39 of 61

7.8.1 E.U.T. Operation

Operating Environment:


Temperature: 25 49 % RH Humidity: Atmospheric Pressure: 1006 mbar


Test mode a:TX mode Keep the EUT in continuously transmitting mode with all modulation


types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE

802.11n(HT20). Only the data of worst case is recorded in the report.

7.8.2 Test Setup Diagram









Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@ags.com

NO.588 West Jindu Road, Songjiang District, Shanghai, China 201612 中国・上海・松江区金都西路588号 邮编: 201612 t(86-21) 61915666 f(86-21) 61915678 www.sgsgroup.com.cn t(86-21) 61915666 f(86-21) 61915678 e sgs.china@sgs.com

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.



Report No.: SHEM210500492001

Page: 40 of 61

7.8.3 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark:

- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

- 3) Scan from 9kHz to 25GHz, the disturbance above 18GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.ssx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@ags.com






Page: 41 of 61

30MHz-1GHz

Horizontal

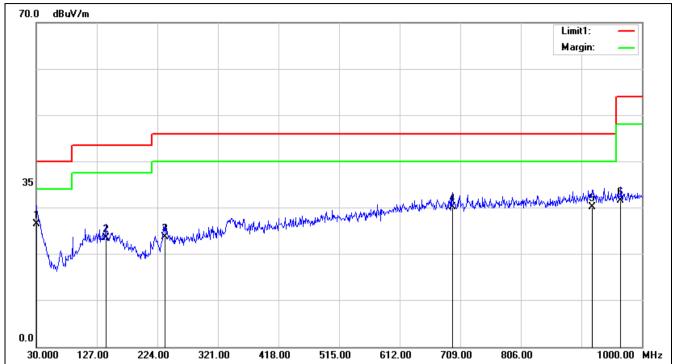

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	30.0000	0.66	25.93	26.59	40.00	-13.41	200	62	QP
2	141.5500	3.70	19.86	23.56	43.50	-19.94	100	322	QP
3	235.6400	5.34	18.44	23.78	46.00	-22.22	100	355	QP
4	696.3900	2.76	27.47	30.23	46.00	-15.77	300	179	QP
5	920.4600	1.28	28.93	30.21	46.00	-15.79	400	21	QP
6	966.0500	2.39	29.27	31.66	54.00	-22.34	100	247	QP



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


NO.588 West Jindu Road,Songjiang District,Shanghai,China 201612 中国・上海・松江区金都西路588号 邮编: 201612





Page: 42 of 61

Vertical

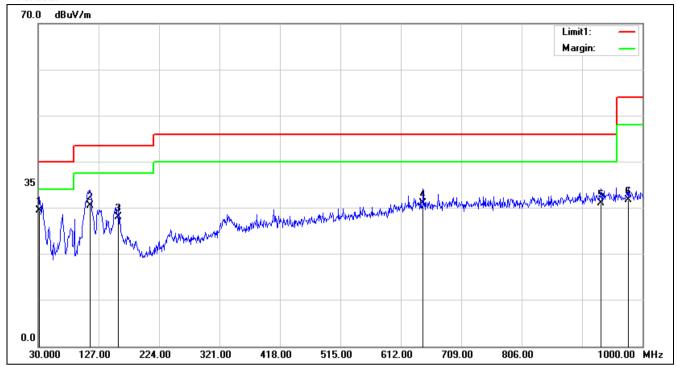

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	31.9400	4.64	24.82	29.46	40.00	-10.54	300	62	QP
2	113.4200	11.51	18.95	30.46	43.50	-13.04	200	309	QP
3	159.0100	8.59	19.44	28.03	43.50	-15.47	100	10	QP
4	647.8900	3.96	27.08	31.04	46.00	-14.96	100	173	QP
5	933.0700	1.96	29.09	31.05	46.00	-14.95	400	260	QP
6	976.7200	2.51	29.25	31.76	54.00	-22.24	100	207	QP



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

NO.588 West Jindu Road, Songjiang District, Shanghai, China 201612 中国・上海・松江区金都西路588号 邮编: 201612






Page: 43 of 61

Above 1GHz

Mode:a; Polarization:Horizontal; Modulation:b; bandwidth:20MHz; Channel:Low

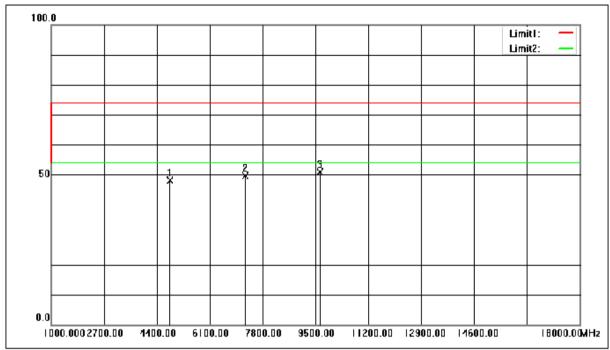

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	()	factor()	()	()	(dB)	
1	4824.000	50.78	-2.63	48.15	74.00	-25.85	peak
2	7236.000	50.22	-0.57	49.65	74.00	-24.35	peak
3	9648.000	47.88	2.98	50.86	74.00	-23.14	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


NO.588 West Jindu Road, Songjiang District, Shanghai, China 201612 中国・上海・松江区金都西路588号 邮编: 201612





Page: 44 of 61

Mode:a; Polarization:Vertical; Modulation:b; bandwidth:20MHz; Channel:Low

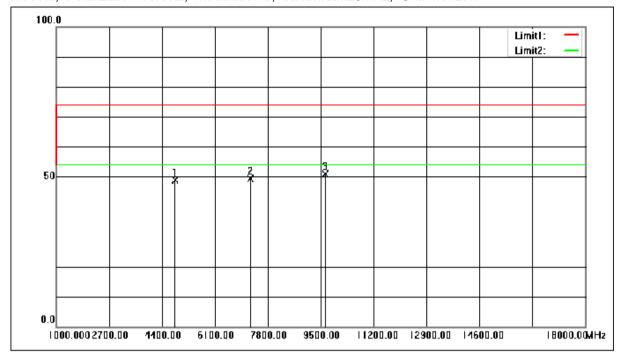

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	()	factor()	()	()	(dB)	
1	4824.000	51.54	-2.63	48.91	74.00	-25.09	peak
2	7236.000	49.98	-0.57	49.41	74.00	-24.59	peak
3	9648.000	47.85	2.98	50.83	74.00	-23.17	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


NO.588 West Jindu Road,Songjiang District,Shanghai,China 201612 中国・上海・松江区金都西路588号 邮编: 201612





Page: 45 of 61

Mode:a; Polarization:Horizontal; Modulation:b; bandwidth:20MHz; Channel:middle

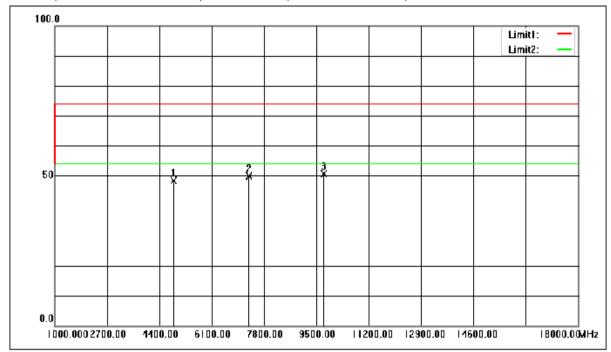

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	()	factor()	()	()	(dB)	
1	4874.000	50.80	-2.49	48.31	74.00	-25.69	peak
2	7311.000	50.41	-0.55	49.86	74.00	-24.14	peak
3	9748.000	47.95	2.70	50.65	74.00	-23.35	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


NO.588 West Jindu Road,Songjiang District,Shanghai,China 201612 中国・上海・松江区金都西路588号 邮编: 201612





Page: 46 of 61

Mode:a; Polarization:Vertical; Modulation:b; bandwidth:20MHz; Channel:middle

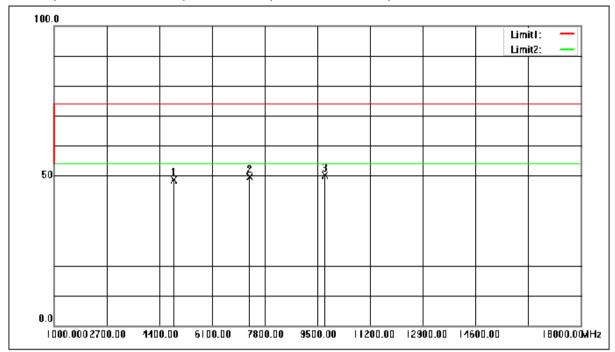

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	()	factor()	()	()	(dB)	
1	4874.000	51.20	-2.49	48.71	74.00	-25.29	peak
2	7311.000	50.17	-0.55	49.62	74.00	-24.38	peak
3	9748.000	47.32	2.70	50.02	74.00	-23.98	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


NO.588 West Jindu Road,Songjiang District,Shanghai,China 201612 中国・上海・松江区金都西路588号 邮编: 201612





Page: 47 of 61

Mode:a; Polarization:Horizontal; Modulation:b; bandwidth:20MHz; Channel:High

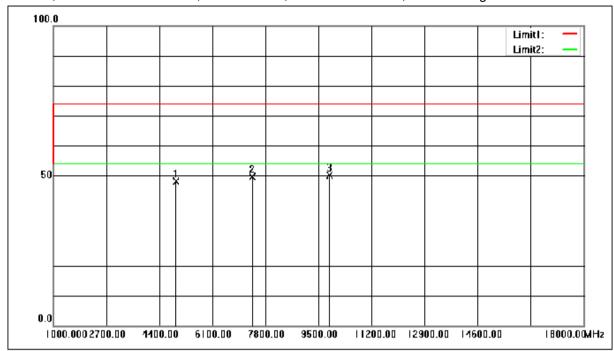

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	()	factor()	()	()	(dB)	
1	4924.000	50.53	-2.35	48.18	74.00	-25.82	peak
2	7386.000	50.19	-0.52	49.67	74.00	-24.33	peak
3	9848.000	47.23	2.81	50.04	74.00	-23.96	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


NO.588 West Jindu Road,Songjiang District,Shanghai,China 201612 中国・上海・松江区金都西路588号 邮编: 201612





Page: 48 of 61

Mode:a; Polarization:Vertical; Modulation:b; bandwidth:20MHz; Channel:High

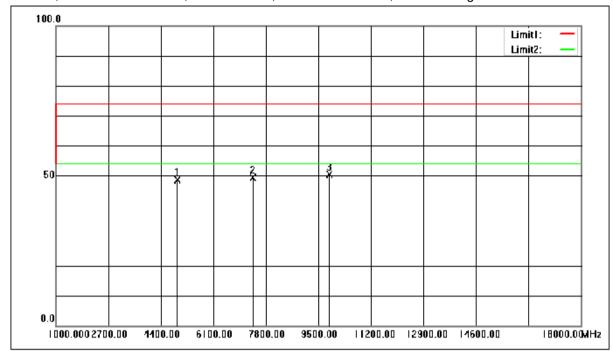

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	()	factor()	()	()	(dB)	
1	4924.000	50.93	-2.35	48.58	74.00	-25.42	peak
2	7386.000	49.95	-0.52	49.43	74.00	-24.57	peak
3	9848.000	47.60	2.81	50.41	74.00	-23.59	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

NO.588 West Jindu Road,Songjiang District,Shanghai,China 201612 中国・上海・松江区金都西路588号 邮编: 201612





Page: 49 of 61

Mode:a; Polarization:Horizontal; Modulation:g; bandwidth:20MHz; Channel:Low



No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	()	factor()	()	()	(dB)	
1	4824.000	51.24	-2.63	48.61	74.00	-25.39	peak
2	7236.000	49.79	-0.57	49.22	74.00	-24.78	peak
3	9648.000	47.77	2.98	50.75	74.00	-23.25	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


NO.588 West Jindu Road,Songjiang District,Shanghai,China 201612 中国・上海・松江区金都西路588号 邮编: 201612





Page: 50 of 61

Mode:a; Polarization:Vertical; Modulation:g; bandwidth:20MHz; Channel:Low

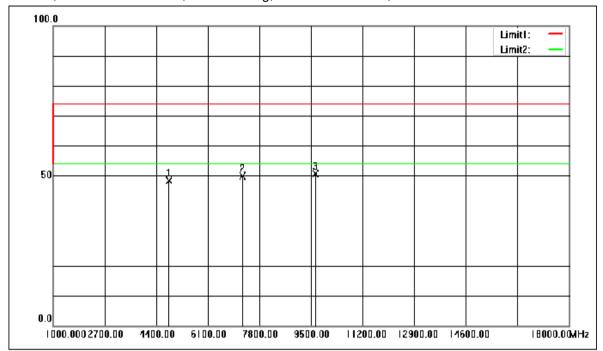

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	()	factor()	()	()	(dB)	
1	4824.000	51.00	-2.63	48.37	74.00	-25.63	peak
2	7236.000	50.55	-0.57	49.98	74.00	-24.02	peak
3	9648.000	47.77	2.98	50.75	74.00	-23.25	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


NO.588 West Jindu Road,Songjiang District,Shanghai,China 201612 中国・上海・松江区金都西路588号 邮编: 201612





Page: 51 of 61

Mode:a; Polarization:Horizontal; Modulation:g; bandwidth:20MHz; Channel:middle

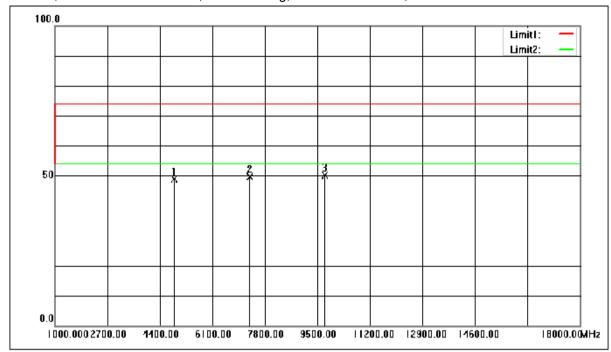

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	()	factor()	()	()	(dB)	
1	4874.000	51.25	-2.49	48.76	74.00	-25.24	peak
2	7311.000	50.30	-0.55	49.75	74.00	-24.25	peak
3	9748.000	47.41	2.70	50.11	74.00	-23.89	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


NO.588 West Jindu Road, Songjiang District, Shanghai, China 201612 中国・上海・松江区金都西路588号 邮编: 201612





Page: 52 of 61

Mode:a; Polarization:Vertical; Modulation:g; bandwidth:20MHz; Channel:middle

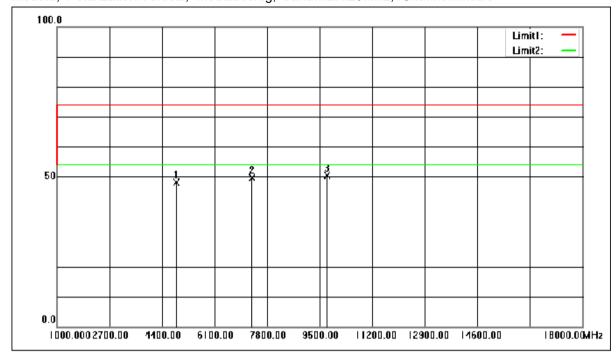

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	()	factor()	()	()	(dB)	
1	4874.000	50.65	-2.49	48.16	74.00	-25.84	peak
2	7311.000	50.06	-0.55	49.51	74.00	-24.49	peak
3	9748.000	47.78	2.70	50.48	74.00	-23.52	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


NO.588 West Jindu Road,Songjiang District,Shanghai,China 201612 中国・上海・松江区金都西路588号 邮编: 201612





Page: 53 of 61

Mode:a; Polarization:Horizontal; Modulation:g; bandwidth:20MHz; Channel:High

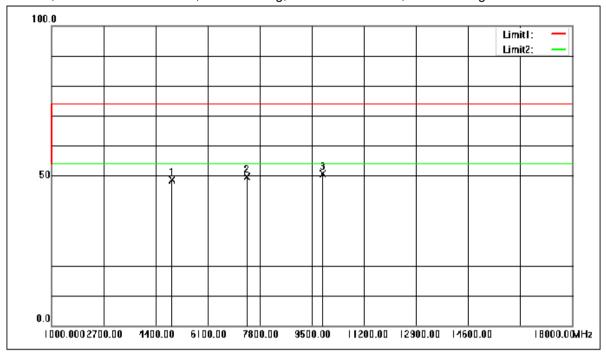

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	()	factor()	()	()	(dB)	
1	4924.000	51.08	-2.35	48.73	74.00	-25.27	peak
2	7386.000	50.16	-0.52	49.64	74.00	-24.36	peak
3	9848.000	47.81	2.81	50.62	74.00	-23.38	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


NO.588 West Jindu Road,Songjiang District,Shanghai,China 201612 中国・上海・松江区金都西路588号 邮编: 201612





Page: 54 of 61

Mode:a; Polarization:Vertical; Modulation:g; bandwidth:20MHz; Channel:High

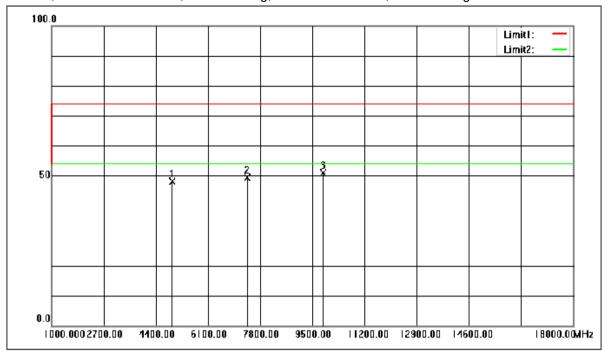

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	()	factor()	()	()	(dB)	
1	4924.000	50.48	-2.35	48.13	74.00	-25.87	peak
2	7386.000	49.92	-0.52	49.40	74.00	-24.60	peak
3	9848.000	48.08	2.81	50.89	74.00	-23.11	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


NO.588 West Jindu Road,Songjiang District,Shanghai,China 201612 中国・上海・松江区金都西路588号 邮编: 201612





Page: 55 of 61

Mode:a; Polarization:Horizontal; Modulation:n; bandwidth:20MHz; Channel:Low

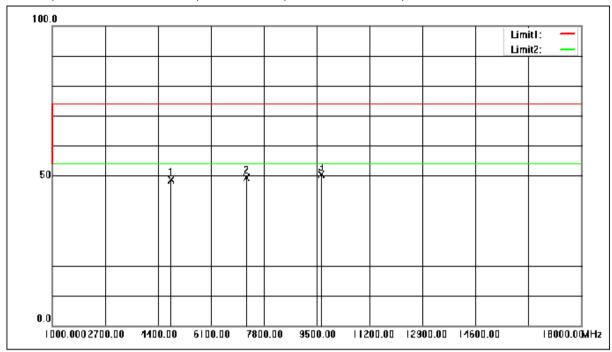

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	()	factor()	()	()	(dB)	
1	4824.000	51.33	-2.63	48.70	74.00	-25.30	peak
2	7236.000	49.89	-0.57	49.32	74.00	-24.68	peak
3	9648.000	47.47	2.98	50.45	74.00	-23.55	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


NO.588 West Jindu Road,Songjiang District,Shanghai,China 201612 中国・上海・松江区金都西路588号 邮编: 201612





Page: 56 of 61

Mode:a; Polarization:Vertical; Modulation:n; bandwidth:20MHz; Channel:Low

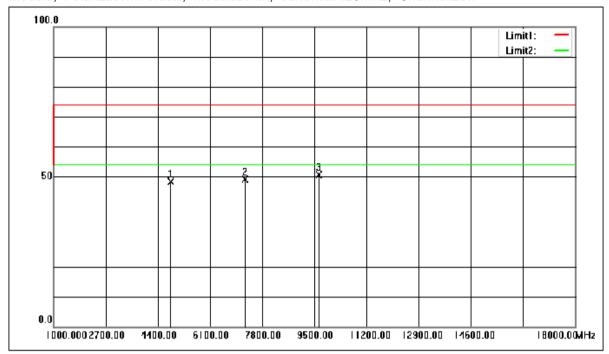

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	()	factor()	()	()	(dB)	
1	4824.000	51.09	-2.63	48.46	74.00	-25.54	peak
2	7236.000	49.65	-0.57	49.08	74.00	-24.92	peak
3	9648.000	47.54	2.98	50.52	74.00	-23.48	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


NO.588 West Jindu Road, Songjiang District, Shanghai, China 201612 中国・上海・松江区金都西路588号 邮编: 201612





Page: 57 of 61

Mode:a; Polarization:Horizontal; Modulation:n; bandwidth:20MHz; Channel:middle

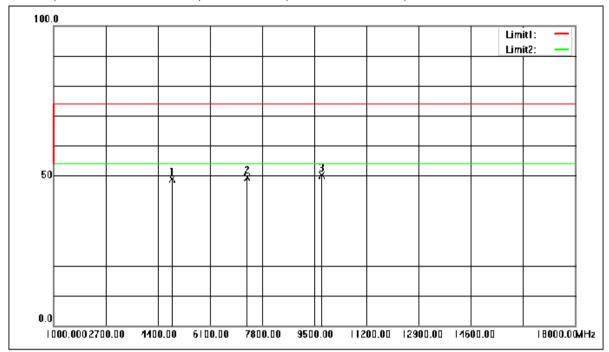

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	()	factor()	()	()	(dB)	
1	4874.000	51.30	-2.49	48.81	74.00	-25.19	peak
2	7311.000	49.97	-0.55	49.42	74.00	-24.58	peak
3	9748.000	47.46	2.70	50.16	74.00	-23.84	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


NO.588 West Jindu Road,Songjiang District,Shanghai,China 201612 中国・上海・松江区金都西路588号 邮编: 201612





Page: 58 of 61

Mode:a; Polarization:Vertical; Modulation:n; bandwidth:20MHz; Channel:middle

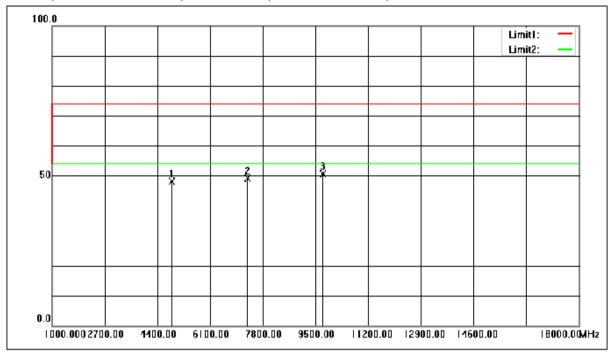

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	()	factor()	()	()	(dB)	
1	4874.000	50.70	-2.49	48.21	74.00	-25.79	peak
2	7311.000	49.73	-0.55	49.18	74.00	-24.82	peak
3	9748.000	47.83	2.70	50.53	74.00	-23.47	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


NO.588 West Jindu Road,Songjiang District,Shanghai,China 201612 中国・上海・松江区金都西路588号 邮编: 201612





Page: 59 of 61

Mode:a; Polarization:Horizontal; Modulation:n; bandwidth:20MHz; Channel:High

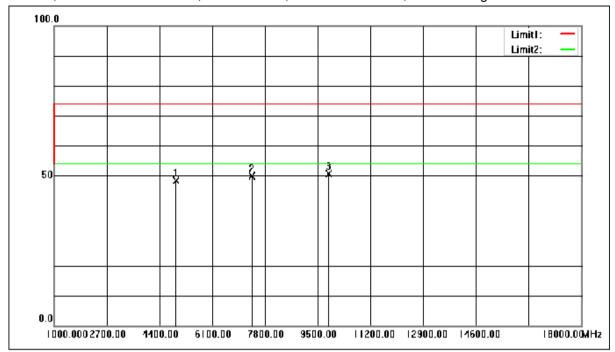

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	()	factor()	()	()	(dB)	
1	4924.000	50.63	-2.35	48.28	74.00	-25.72	peak
2	7386.000	50.44	-0.52	49.92	74.00	-24.08	peak
3	9848.000	47.75	2.81	50.56	74.00	-23.44	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

NO.588 West Jindu Road, Songjiang District, Shanghai, China 201612 中国・上海・松江区金都西路588号 邮編: 201612





Page: 60 of 61

Mode:a; Polarization:Vertical; Modulation:n; bandwidth:20MHz; Channel:High



No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	()	factor()	()	()	(dB)	
1	4924.000	51.03	-2.35	48.68	74.00	-25.32	peak
2	7386.000	50.20	-0.52	49.68	74.00	-24.32	peak
3	9748.000	48.23	2.70	50.93	74.00	-23.07	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

NO.588 West Jindu Road, Songjiang District, Shanghai, China 201612 中国・上海・松江区金都西路588号 邮编: 201612





Page: 61 of 61

8 Test Setup Photographs

Refer to the < Test Setup photos-FCC>.

9 EUT Constructional Details

Refer to the < External Photos > & < Internal Photos >.

- End of the Report -



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@ags.com

NO.588 West Jindu Road, Songjiang District, Shanghai, China 201612 中国・上海・松江区金都西路588号 邮编: 201612