

FCC Report (Bluetooth)

Applicant: Shenzhen Qianhai YueDong Smart Wearable Equipment Co., Ltd.

Address of Applicant: Room 201, Building A, No. 1, Qianwan 1st Road, SZ-HK Cooperation Area, Qianhai, Shenzhen, Guangdong, China.

Manufacturer/Factory: Shenzhen Qianhai YueDong Smart Wearable Equipment Co., Ltd.

Address of Manufacturer/Factory: Room 201, Building A, No. 1, Qianwan 1st Road, SZ-HK Cooperation Area, Qianhai, Shenzhen, Guangdong, China.

Equipment Under Test (EUT)

Product Name: YueDong Smart Wristband

Model No.: YD618, YD818, YD918, YD518, YD118, YD218

Trade mark: N/A

FCC ID: 2APVK-YD618

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247

Date of sample receipt: May 15, 2018

Date of Test: May 15, 2018-August 21, 2018

Date of report issued: August 21, 2018

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

S

Authorized Signature:



Robinson Lo

Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

1 Version

Version No.	Date	Description
00	August 21, 2018	Original

Prepared By:




Date:

August 21, 2018

Project Engineer

Check By:



Date:

August 21, 2018

Reviewer

2 Contents

Page

1	VERSION.....	2
2	CONTENTS.....	3
3	TEST SUMMARY	4
4	GENERAL INFORMATION	5
4.1	GENERAL DESCRIPTION OF EUT	5
4.2	TEST MODE	7
4.3	TEST FACILITY.....	7
4.4	TEST LOCATION.....	7
4.5	OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	7
4.6	DESCRIPTION OF SUPPORT UNITS.....	7
4.7	ADDITIONAL INSTRUCTIONS.....	8
5	TEST INSTRUMENTS LIST	9
6	TEST RESULTS AND MEASUREMENT DATA	10
6.1	ANTENNA REQUIREMENT	10
6.2	CONDUCTED EMISSIONS	11
6.3	CONDUCTED PEAK OUTPUT POWER	14
6.4	20DB EMISSION BANDWIDTH.....	21
6.5	CARRIER FREQUENCIES SEPARATION	25
6.6	HOPPING CHANNEL NUMBER.....	29
6.7	DWELL TIME.....	31
6.8	PSEUDORANDOM FREQUENCY HOPPING SEQUENCE.....	34
6.9	BAND EDGE	35
6.9.1	Conducted Emission Method	35
6.9.2	Radiated Emission Method	39
6.10	SPURIOUS EMISSION.....	52
6.10.1	Conducted Emission Method.....	52
6.10.2	Radiated Emission Method.....	54
7	TEST SETUP PHOTO.....	61
8	EUT CONSTRUCTIONAL DETAILS.....	63

3 Test Summary

Test Item	Section in CFR 47	Result
Antenna Requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(1)	Pass
20dB Occupied Bandwidth	15.247 (a)(1)	Pass
Carrier Frequencies Separation	15.247 (a)(1)	Pass
Hopping Channel Number	15.247 (a)(1)	Pass
Dwell Time	15.247 (a)(1)	Pass
Pseudorandom Frequency Hopping Sequence	15.247(b)(4)	Pass
Radiated Emission	15.205/15.209	Pass
Band Edge	15.247(d)	Pass

Pass: The EUT complies with the essential requirements in the standard.

Remark: Test according to ANSI C63.10:2013.

Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz ~ 30MHz	± 4.34dB	(1)
Radiated Emission	30MHz ~ 1000MHz	± 4.24dB	(1)
Radiated Emission	1GHz ~ 26.5GHz	± 4.68dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	± 3.45dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

4 General Information

4.1 General Description of EUT

Product Name:	YueDong Smart Wristband
Model No.:	YD618, YD818, YD918, YD518, YD118, YD218
Test Model No:	YD618
<i>Remark: All above models are identical in the same PCB layout, interior structure and electrical circuits. The differences are color and model name for commercial purpose.</i>	
Quantity of tested samples	1
Serial No.:	N/A
Tested Sample(s) ID:	N/A
Hardware Version:	YD618_V1.1
Software Version:	V1.1.28.0.0
Operation Frequency:	2402MHz~2480MHz
Channel numbers:	79
Channel separation:	1MHz
Modulation type:	GFSK, Pi/4 QPSK, 8DPSK
Antenna Type:	MULTILAYER CERAMIC ANTENNA
Antenna gain:	2.0dBi
Power supply:	DC 3.8V by battery or DC 5V from adapter input AC 120V, 60Hz
Bluetooth Version:	4.2

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2441MHz
The Highest channel	2480MHz

4.2 Test mode

Transmitting mode	Keep the Bluetooth in continuously transmitting mode
<p><i>Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i></p>	

4.3 Test Facility

<p>The test facility is recognized, certified, or accredited by the following organizations:</p> <ul style="list-style-type: none"> ● FCC —Registration No.: 381383 <p>Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383, January 08, 2018.</p> <ul style="list-style-type: none"> ● Industry Canada (IC) —Registration No.: 9079A-2 <p>The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, August 15, 2016.</p>

4.4 Test Location

All tests were performed at:
<p>Global United Technology Services Co., Ltd. Address: No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102 Tel: 0755-27798480 Fax: 0755-27798960</p>

4.5 Other Information Requested by the Customer

None.

4.6 Description of Support Units

No.	Description	Manufacturer	Model	Serial Number	Certification or DOC
1	Notebook	Acer	ZQT	/	DOC


4.7 Additional instructions

Software (Used for test) from client

Mode	Special software is used. The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.
------	--

Power level setup in software			
Test Software Name	WCN Combo Tool		
Test Software Version	W1537		
Support Units (Software installation media)	Description	Manufacturer	Model
	Laptop	Apple	A1278
Mode	Channel	Frequency (MHz)	Soft Set
GFSK, Pi/4 QPSK, 8DPSK	CH1	2402	TX LEVEL is built-in set parameters and cannot be changed and selected.
	CH40	2441	
	CH79	2480	

Run Software

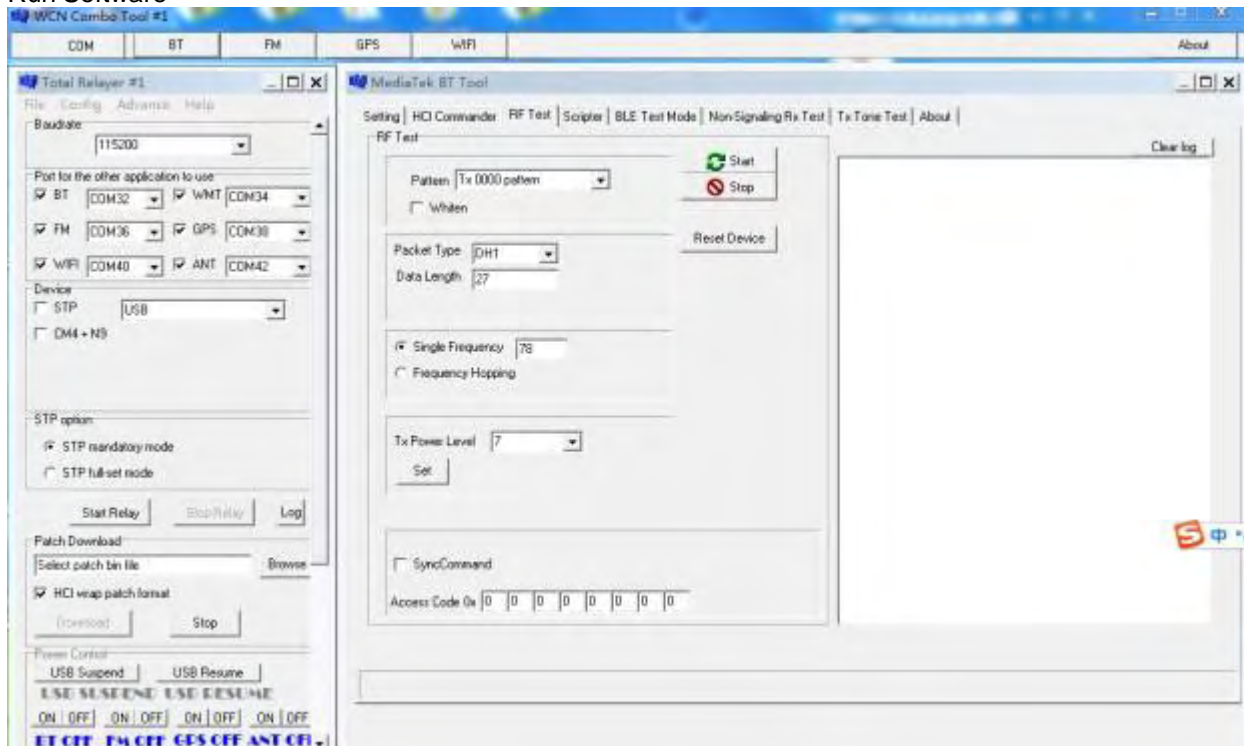

5 Test Instruments list


Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.0(L)*6.0(W)* 6.0(H)	GTS250	July. 03 2015	July. 02 2020
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June 28 2017	June 27 2018
4	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June 28 2017	June 27 2018
5	Loop Antenna	SCHWARZBECK	FMZB 1519B	GTS200	June 28 2017	June 27 2018
6	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June 28 2017	June 27 2018
7	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	June 28 2017	June 27 2018
8	Horn Antenna	ETS-LINDGREN	3160	GTS217	June 28 2017	June 27 2018
9	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
10	Coaxial Cable	GTS	N/A	GTS213	June 28 2017	June 27 2018
11	Coaxial Cable	GTS	N/A	GTS211	June 28 2017	June 27 2018
12	Coaxial cable	GTS	N/A	GTS210	June 28 2017	June 27 2018
13	Coaxial Cable	GTS	N/A	GTS212	June 28 2017	June 27 2018
14	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June 28 2017	June 27 2018
15	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	June 28 2017	June 27 2018
16	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June 28 2017	June 27 2018
17	Band filter	Amindeon	82346	GTS219	June 28 2017	June 27 2018

Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.16 2014	May.15 2019
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June 28 2017	June 27 2018
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June 28 2017	June 27 2018
4	Artificial Mains Network	SCHWARZBECK MESS	NSLK8127	GTS226	June 28 2017	June 27 2018
5	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Thermo meter	KTJ	TA328	GTS233	June 28 2017	June 27 2018

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Barometer	ChangChun	DYM3	GTS257	June 28 2017	June 27 2018

6 Test results and Measurement Data

6.1 Antenna requirement

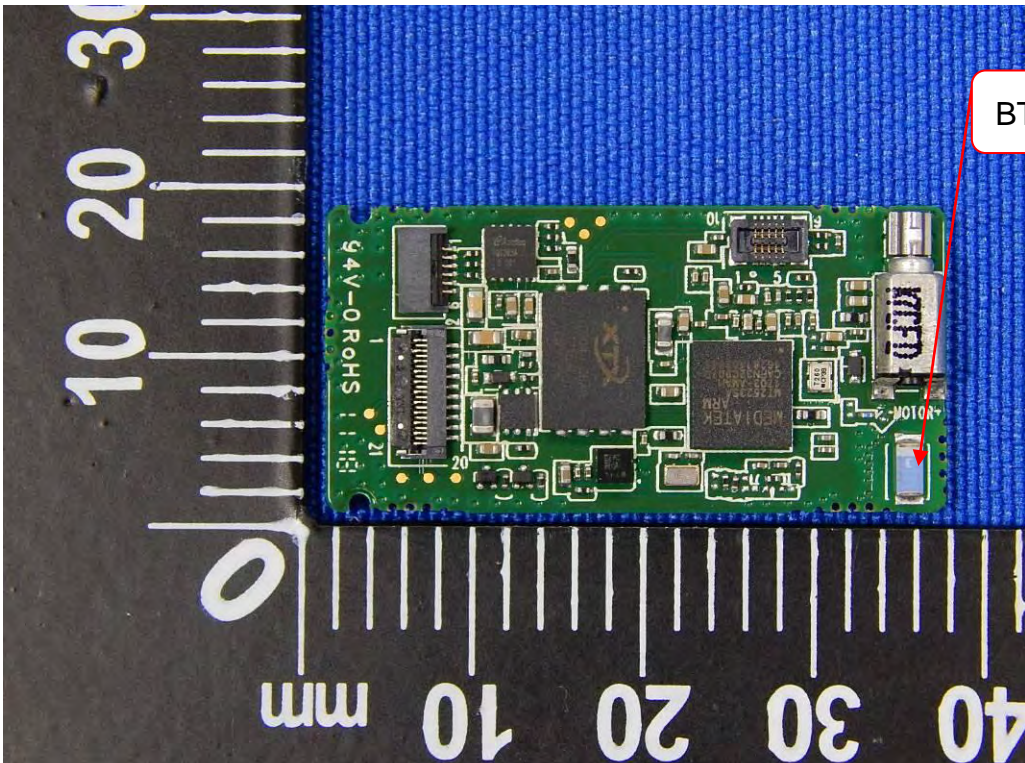Standard requirement:	FCC Part15 C Section 15.203 /247(c)
<p>15.203 requirement:</p> <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(c) (1)(i) requirement:</p> <p>(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.</p>	
E.U.T Antenna:	
<p><i>The antenna is MULTILAYER CERAMIC ANTENNA, the best case gain of the antenna is 2.0dBi</i></p> 	

6.2 Conducted Emissions


Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10:2013														
Test Frequency Range:	150KHz to 30MHz														
Class / Severity:	Class B														
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto														
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> <p>* Decreases with the logarithm of the frequency.</p>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test setup:	<p>Remark E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>														
Test procedure:	<ol style="list-style-type: none"> 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement. 														
Test Instruments:	Refer to section 6.0 for details														
Test mode:	Refer to section 5.2 for details														
Test results:	Pass														

Measurement data:

Test result for BT4.2 (GFSK: 2441MHz), AC 120V/ 60Hz

Neutral:

Conducted Emission Measurement

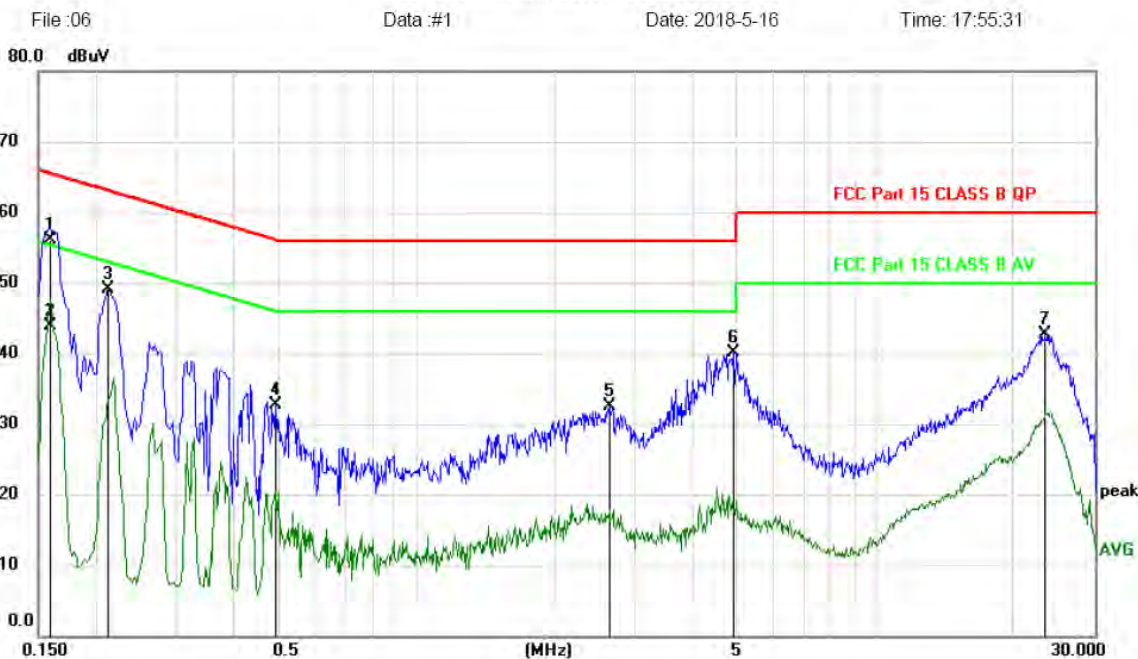

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1	*	0.1590	46.48	9.66	56.14	65.52	-9.38	QP	
2		0.1590	34.21	9.66	43.87	55.52	-11.65	AVG	
3		0.2130	39.47	9.68	49.15	63.09	-13.94	peak	
4		0.4920	22.98	9.71	32.69	56.13	-23.44	peak	
5		2.6250	22.62	9.96	32.58	56.00	-23.42	peak	
6		4.9110	29.93	10.16	40.09	56.00	-15.91	peak	
7		23.4870	32.03	10.68	42.71	60.00	-17.29	peak	


*:Maximum data x:Over limit !:over margin

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Test result for BT4.2 (GFSK: 2441MHz), AC 120V/ 60Hz

Line:

Conducted Emission Measurement

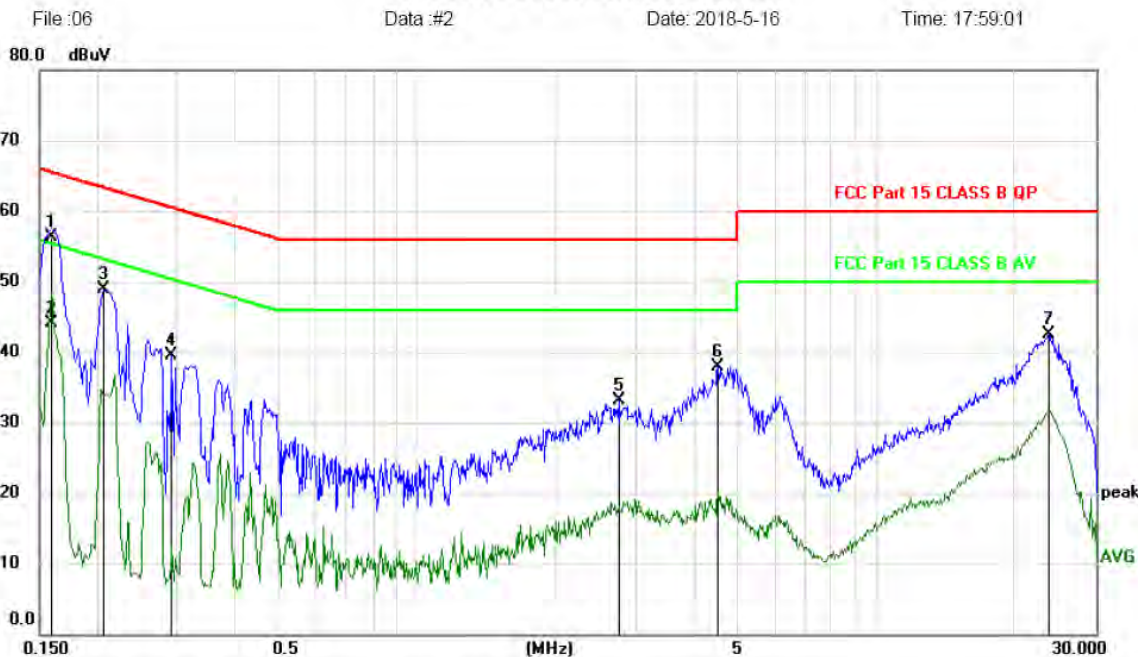


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1590	46.68	9.66	56.34	65.52	-9.18	QP	
2		0.1590	34.35	9.66	44.01	55.52	-11.51	AVG	
3		0.2070	39.16	9.67	48.83	63.32	-14.49	peak	
4		0.2910	29.74	9.69	39.43	60.50	-21.07	peak	
5		2.7480	23.09	9.97	33.06	56.00	-22.94	peak	
6		4.5180	27.79	10.13	37.92	56.00	-18.08	peak	
7		23.7600	31.91	10.69	42.60	60.00	-17.40	peak	

*:Maximum data x:Over limit !:over margin

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

6.3 Conducted Peak Output Power

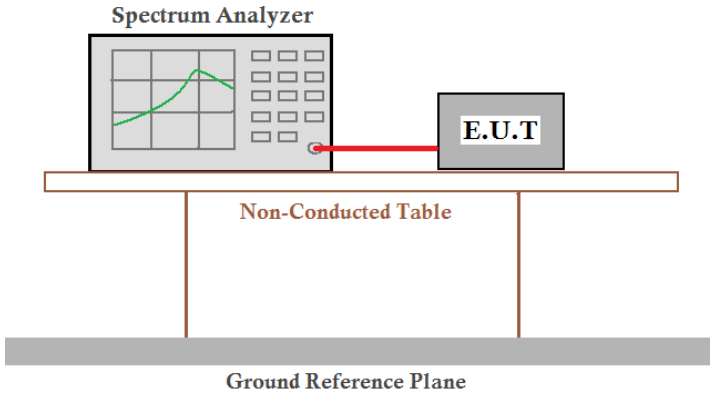
Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	ANSI C63.10:2013
Limit:	30dBm(for GFSK),20.97dBm(for EDR)
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data


Mode	Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
GFSK	Lowest	0.624	30.00	Pass
	Middle	0.250		
	Highest	-1.338		
Pi/4QPSK	Lowest	0.315	20.97	Pass
	Middle	-0.085		
	Highest	-1.914		
8DPSK	Lowest	0.319	20.97	Pass
	Middle	0.404		
	Highest	-1.266		

Test plot as follows:


Test mode:	GFSK mode
------------	-----------

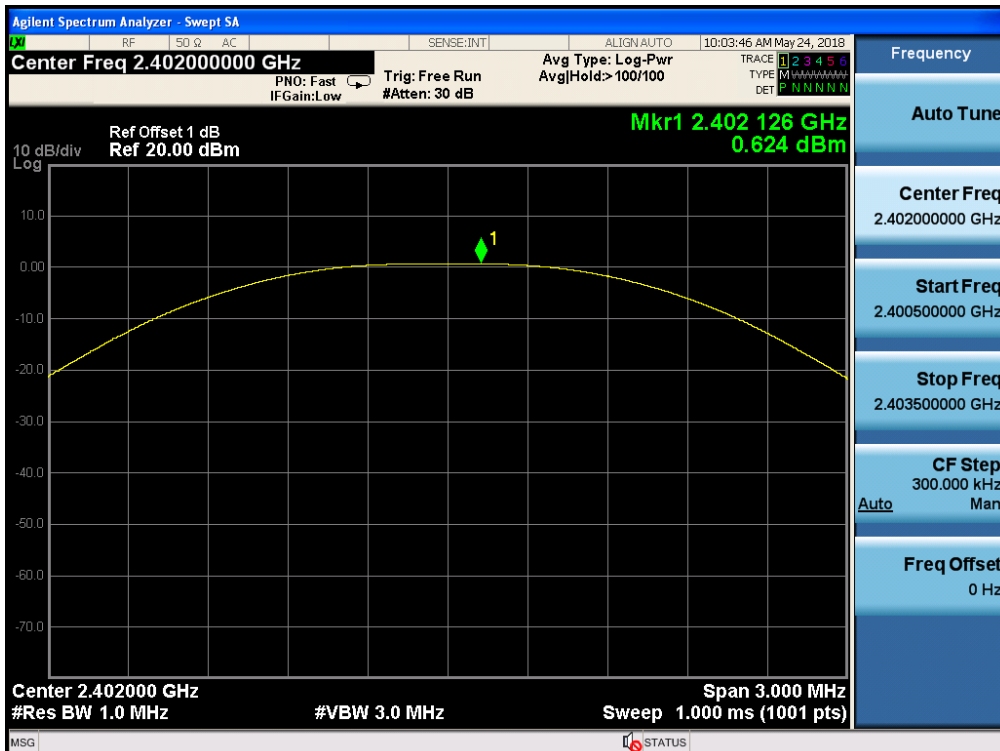

Lowest channel

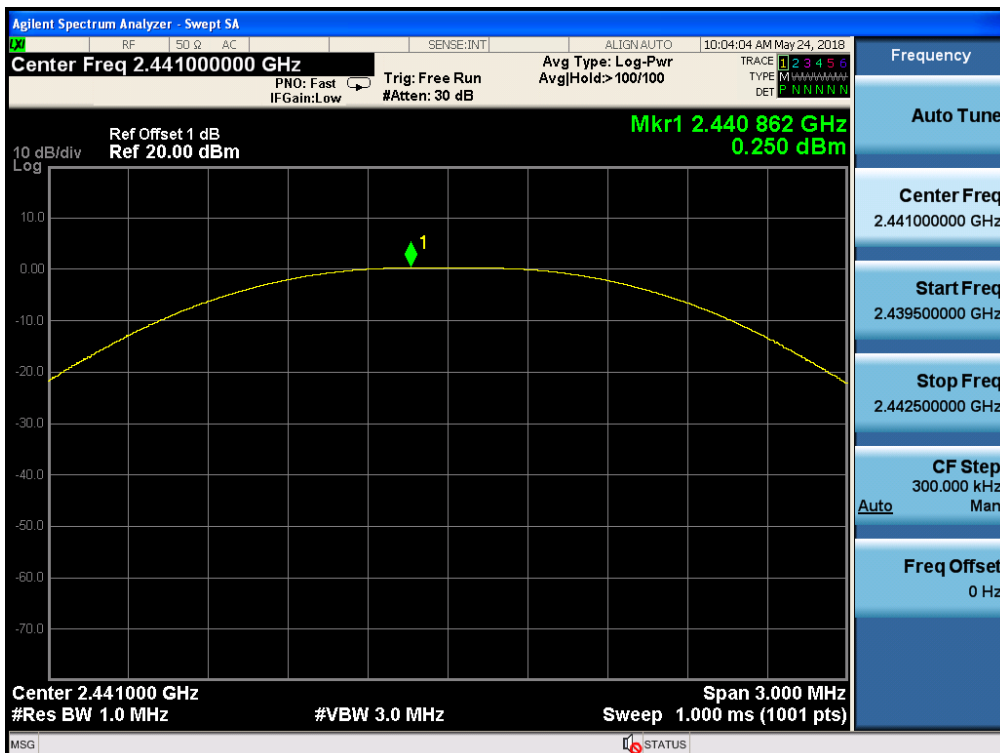


Middle channel

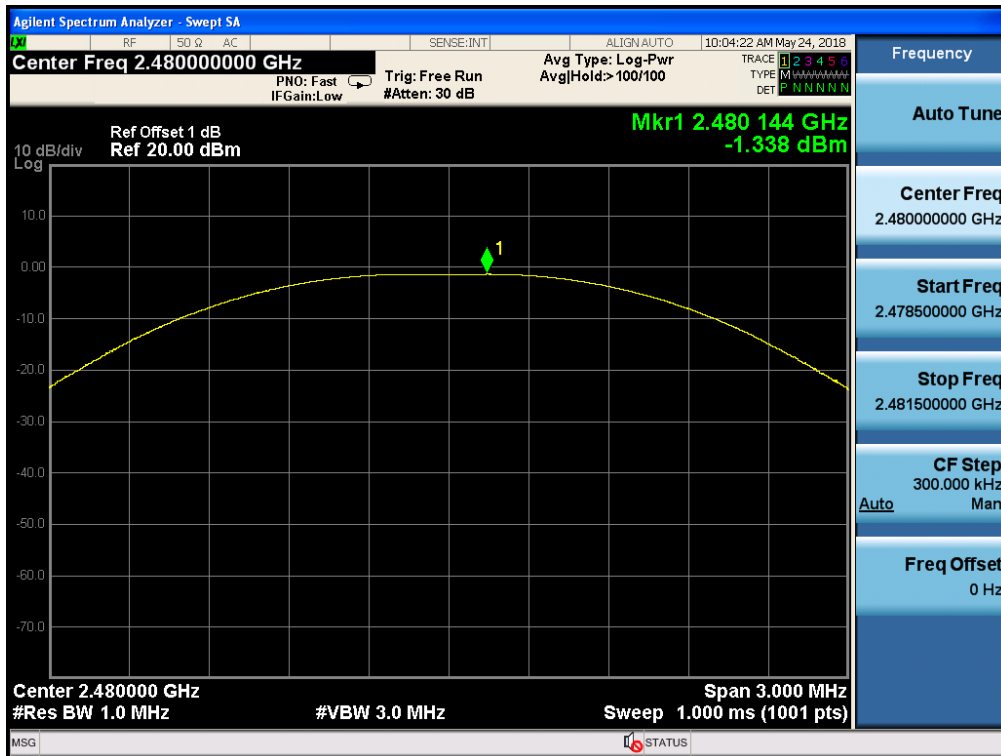


Highest channel


Test mode: Pi/4QPSK mode

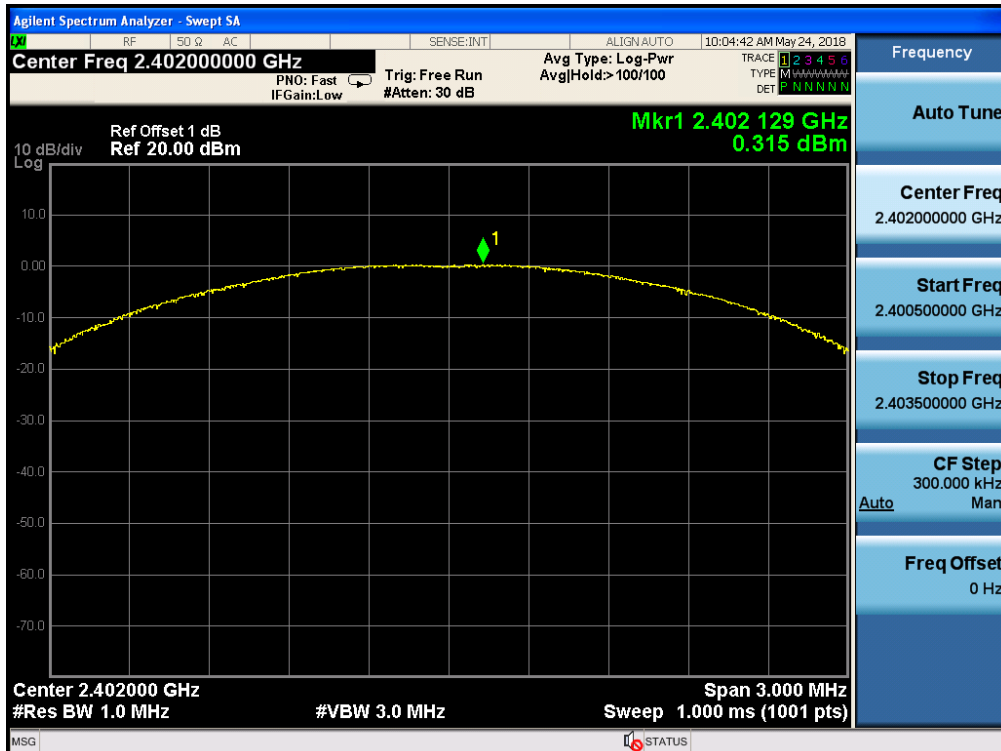

Lowest channel

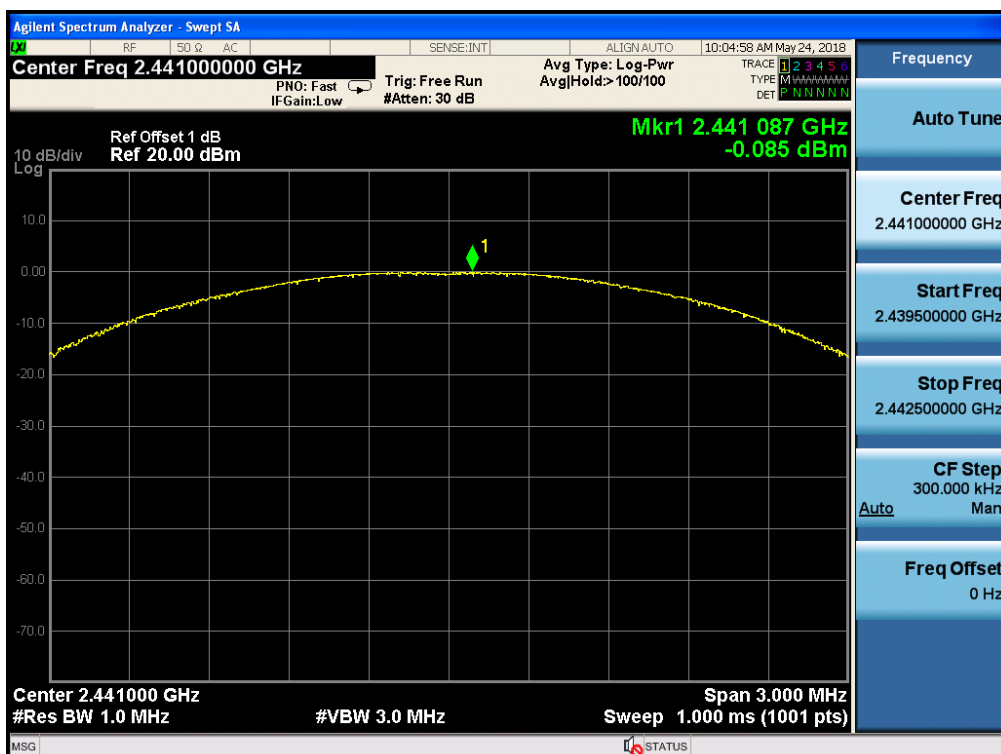


Middle channel

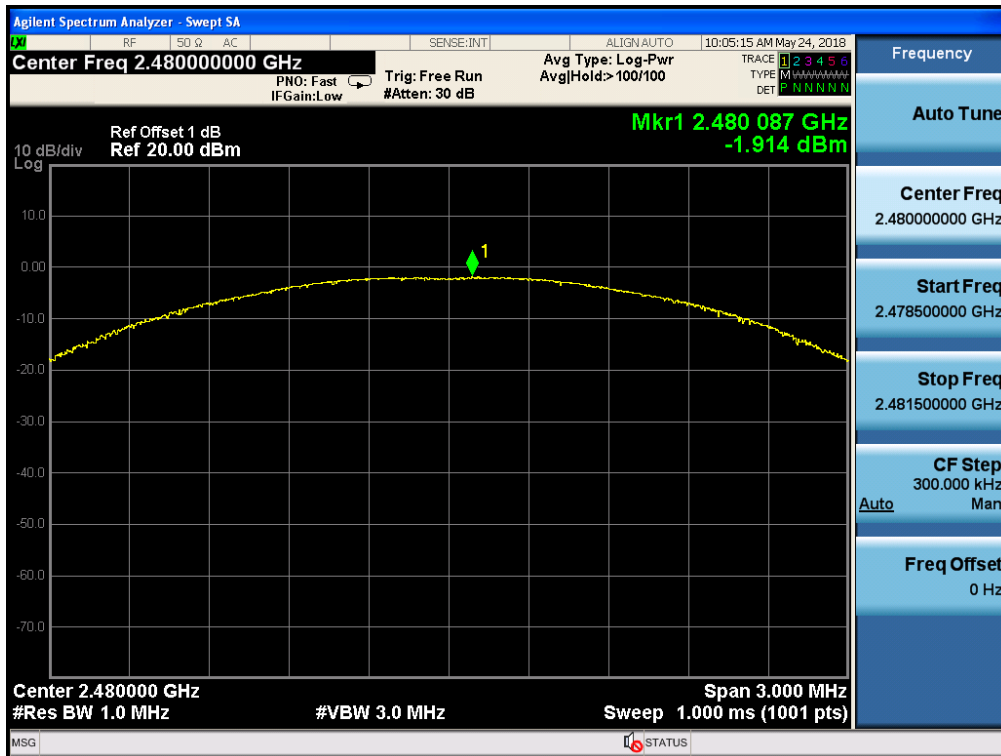


Highest channel


Test mode: 8DPSK mode

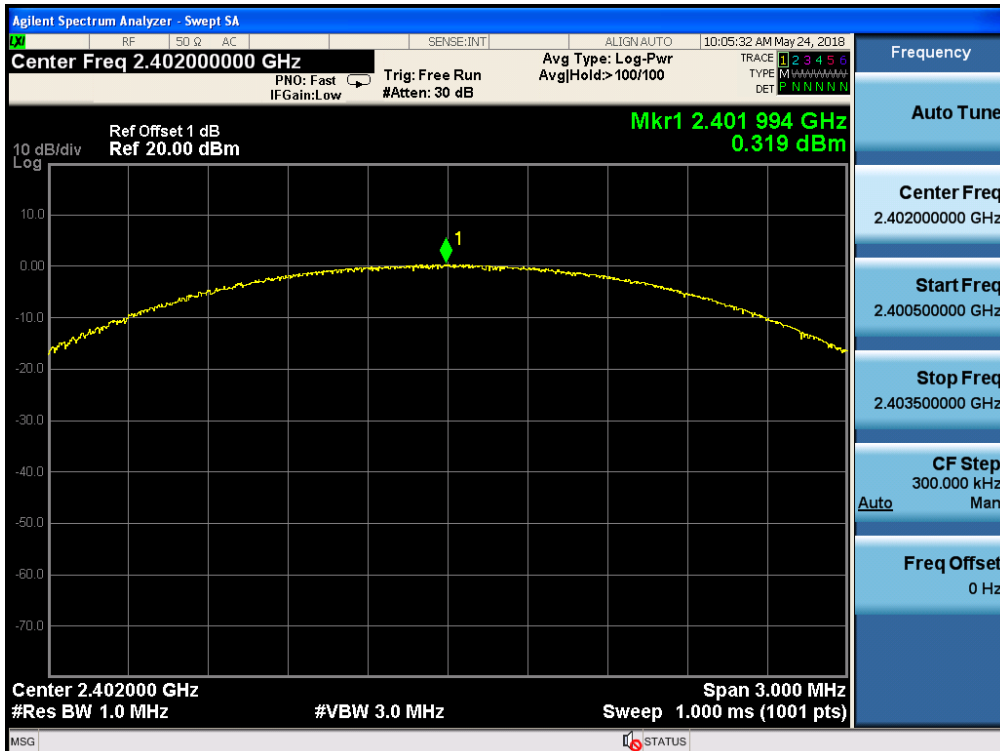

Lowest channel

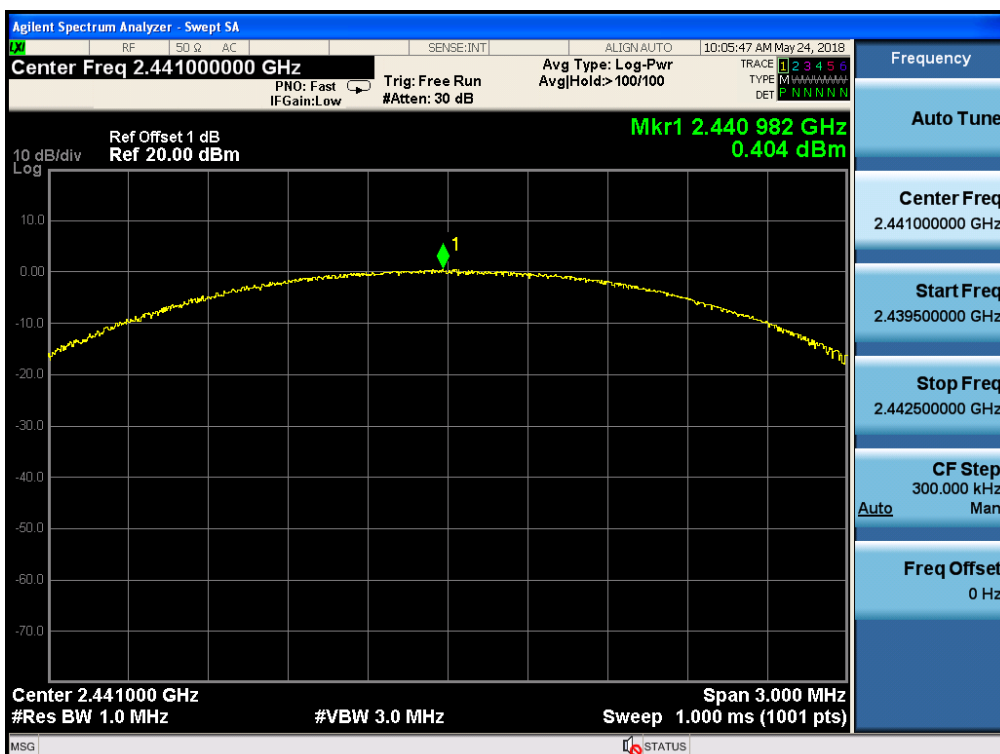


Middle channel

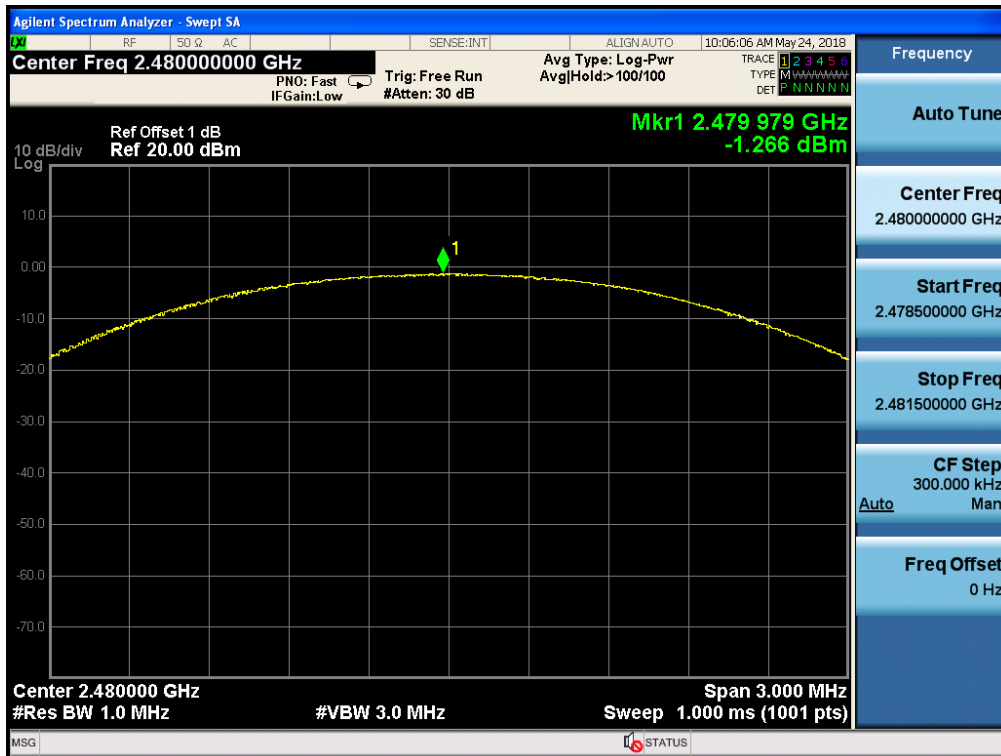

Highest channel

6.4 20dB Emission Bandwidth

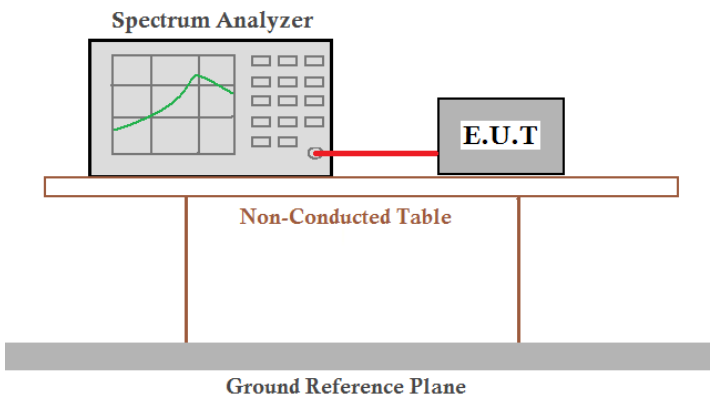Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	ANSI C63.10:2013
Limit:	N/A
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by two vertical legs. Below the table is a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data

Mode	Test channel	20dB Emission Bandwidth (MHz)	Result
GFSK	Lowest	0.932	Pass
	Middle	0.935	
	Highest	0.924	
Pi/4QPSK	Lowest	1.263	Pass
	Middle	1.261	
	Highest	1.262	
8DPSK	Lowest	1.222	Pass
	Middle	1.226	
	Highest	1.224	

Test plot as follows:

Test mode:	GFSK mode
------------	-----------



Lowest channel



Middle channel



Highest channel

Test mode: Pi/4QPSK mode



Lowest channel



Middle channel



Highest channel

Test mode: 8DPSK mode



Lowest channel




Middle channel



Highest channel

6.5 Carrier Frequencies Separation

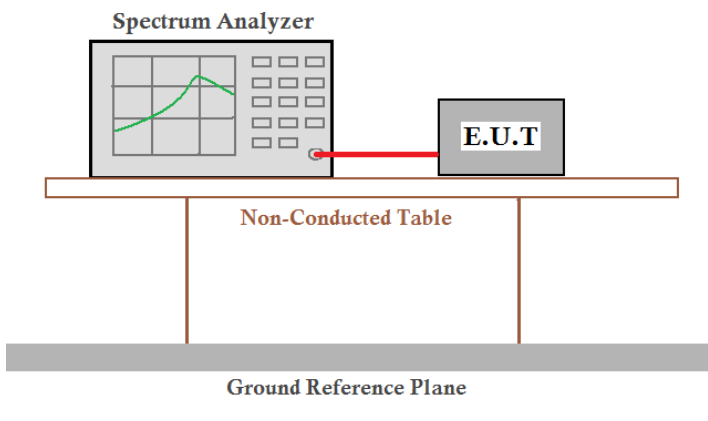Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=20KHz, VBW=62KHz, detector=Peak
Limit:	0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. The table is supported by two legs and sits on a Ground Reference Plane. The Spectrum Analyzer screen shows a frequency spectrum with a peak.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data

Mode	Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
GFSK	Lowest	992	623	Pass
	Middle	1010	623	Pass
	Highest	1000	623	Pass
Pi/4QPSK	Lowest	990	842	Pass
	Middle	1004	842	Pass
	Highest	998	842	Pass
8DSK	Lowest	1000	817	Pass
	Middle	994	817	Pass
	Highest	1000	817	Pass

Note: According to section 7.4

Mode	20dB bandwidth (kHz) (worse case)	Limit (kHz) (Carrier Frequencies Separation)
GFSK	935	623
Pi/4QPSK	1263.00	842
8DSK	1226.00	817

Test plot as follows:

Modulation mode:	GFSK
------------------	------



Lowest channel




Middle channel




Highest channel

Test mode: Pi/4QPSK mode

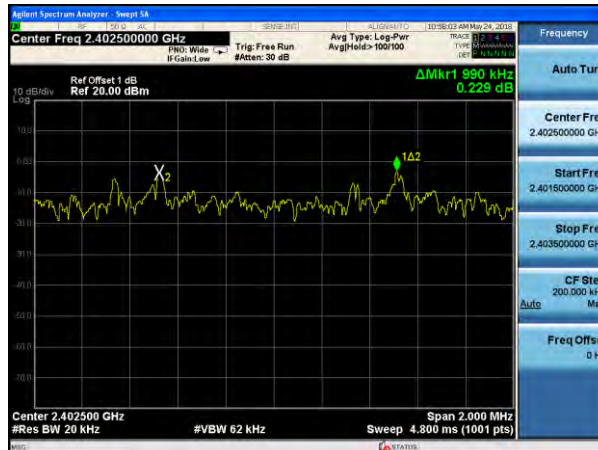

Lowest channel

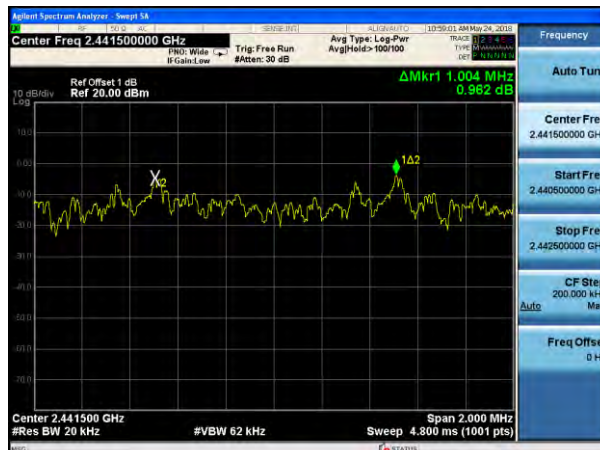

Middle channel



Highest channel

Test mode: 8DPSK mode



Lowest channel




Middle channel




Highest channel

6.6 Hopping Channel Number

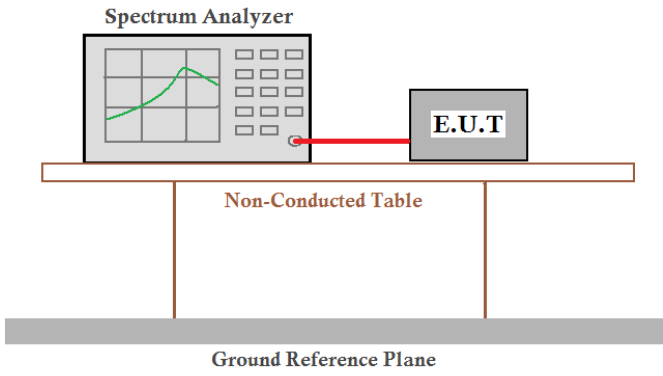
Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=100kHz, VBW=300kHz, Frequency range=2400MHz-2483.5MHz, Detector=Peak
Limit:	15 channels
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. This table is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data:


Mode	Hopping channel numbers	Limit	Result
GFSK	79	15	Pass
Pi/4QPSK	79	15	Pass
8DPSK	79	15	Pass

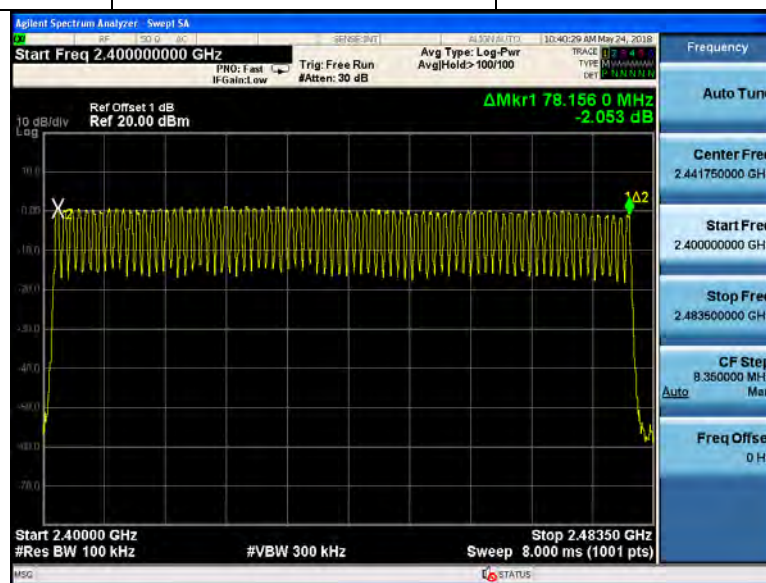

GFSK

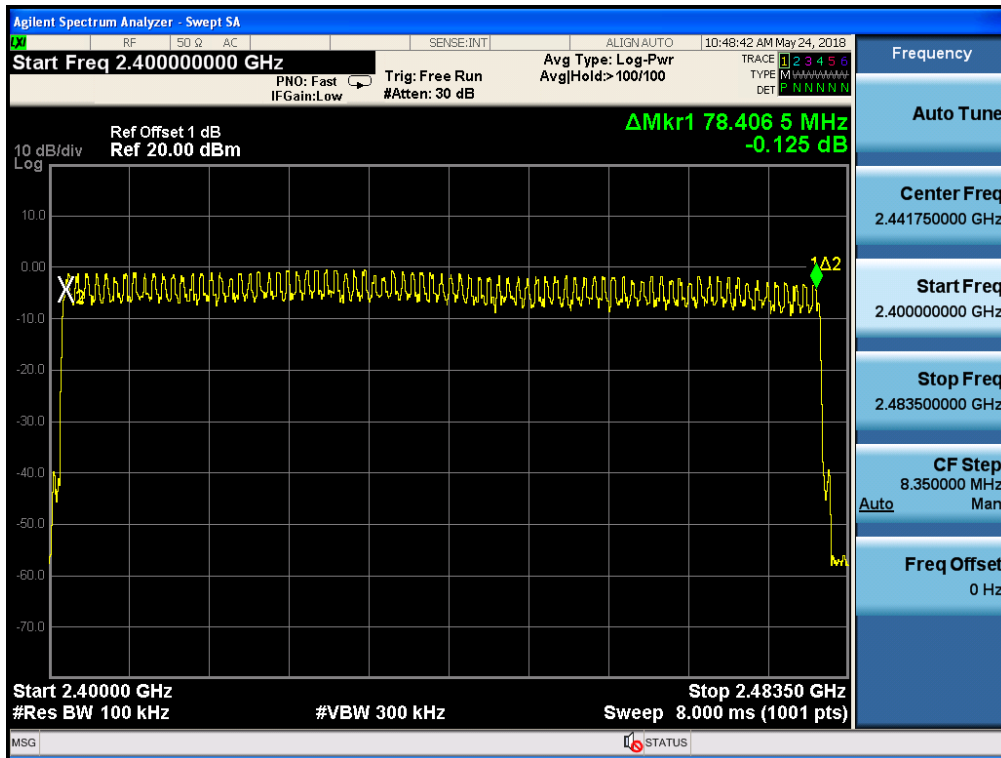


Pi/4QPSK

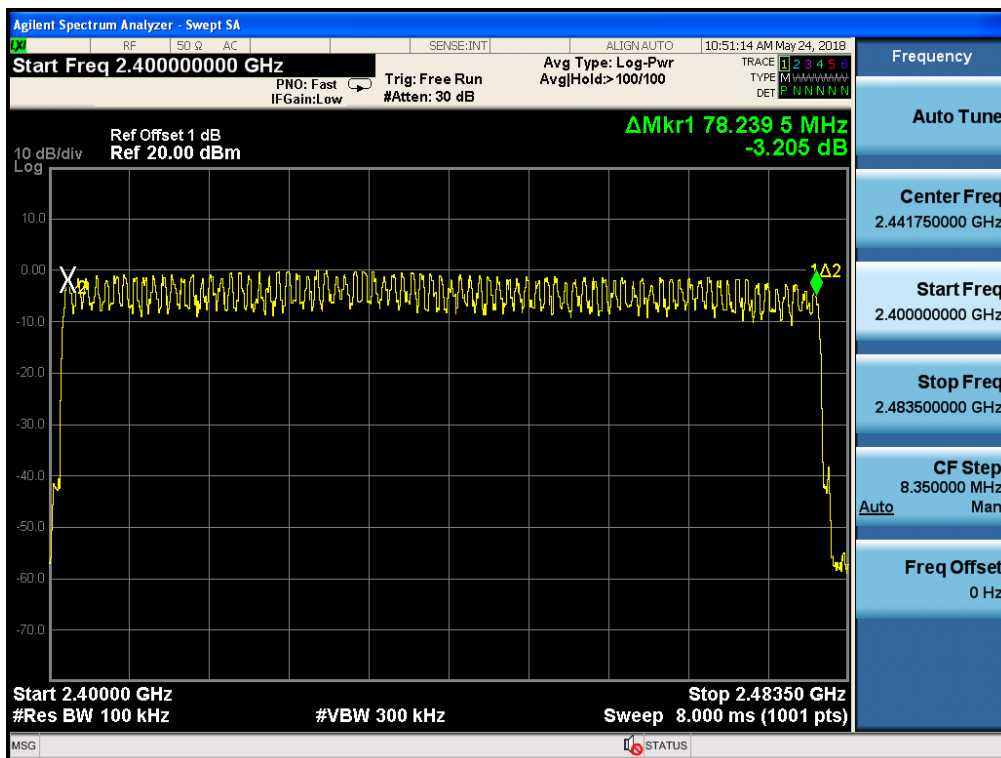

8DPSK

6.7 Dwell Time

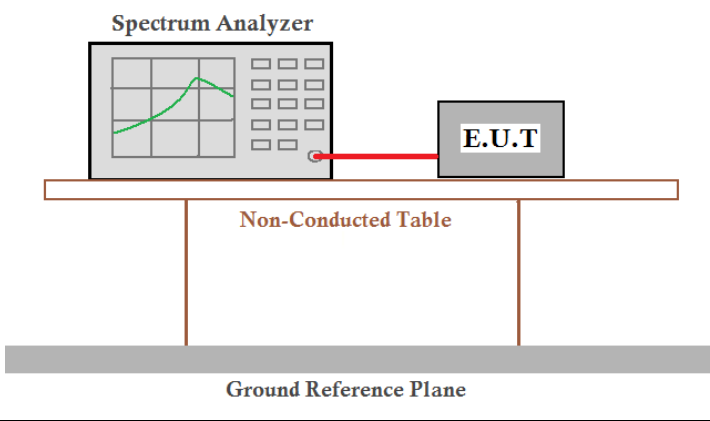Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=1MHz, VBW=1MHz, Span=0Hz, Detector=Peak
Limit:	0.4 Second
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data

Mode	Frequency (MHz)	Burst Type	Pulse Width (ms)	Dwell Time (ms)	Limit (ms)	Verdict
GFSK	2441	DH1	0.384	122.880	400	PASS
		DH3	1.637	261.920		
		DH5	2.890	308.267		
π/4-DQPSK	2441	DH1	0.384	122.880	400	PASS
		DH3	1.642	262.720		
		DH5	2.880	307.200		
8DPSK	2441	DH1	0.394	126.080	400	PASS
		DH3	1.642	262.720		
		DH5	2.890	308.267		

The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$

Test channel: 2402MHz/2441MHz/2480MHz as blow

DH1 time slot= Pulse time (ms)*(1600/ (2*79))*31.6

DH3 time slot= Pulse time (ms)*(1600/ (4*79))*31.6



DH5 time slot= Pulse time (ms)*(1600/ (6*79))*31.6

Test plot as follows:

Dwell time



GFSK

$\pi/4$ -DQPSK

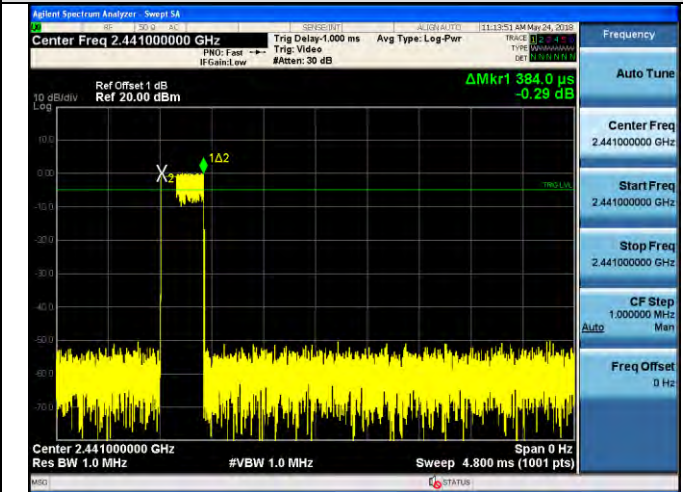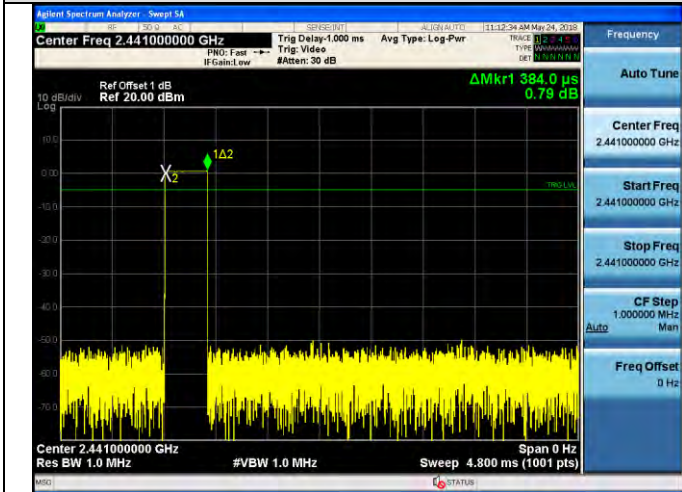


Channel 39 / 2441 MHz - DH1

Channel 39 / 2441 MHz - 2DH1

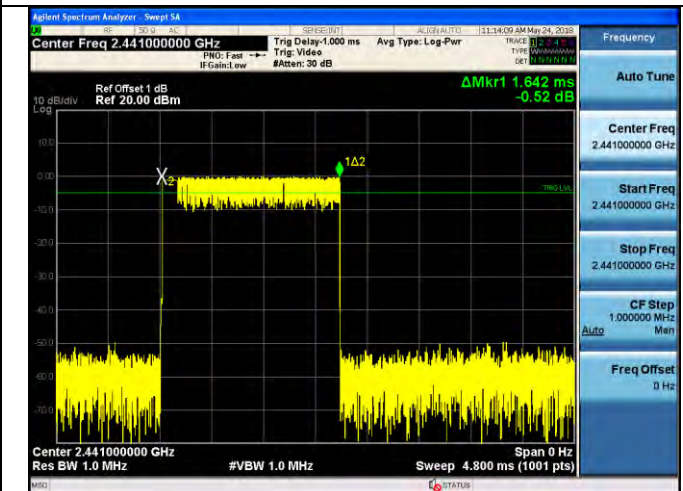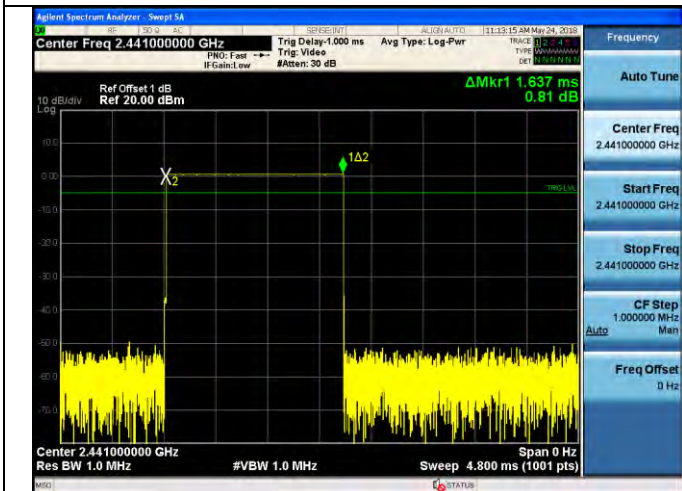

Channel 39 / 2441 MHz - DH3

Channel 39 / 2441 MHz - 2DH3

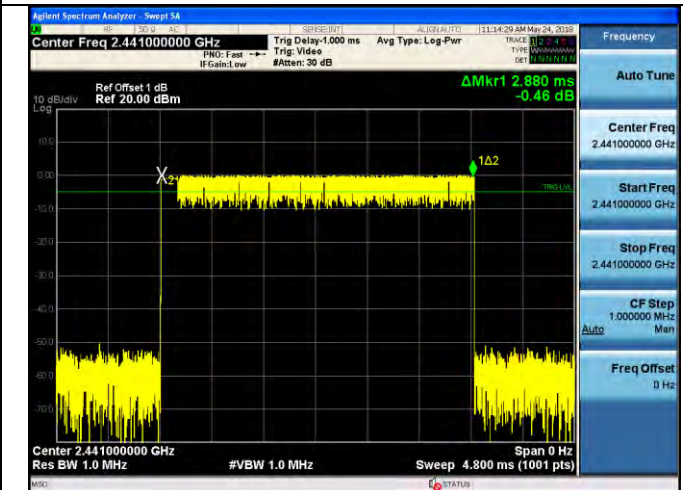


Channel 39 / 2441 MHz - DH5

Channel 39 / 2441 MHz - 2DH5

Dwell time


8DPSK

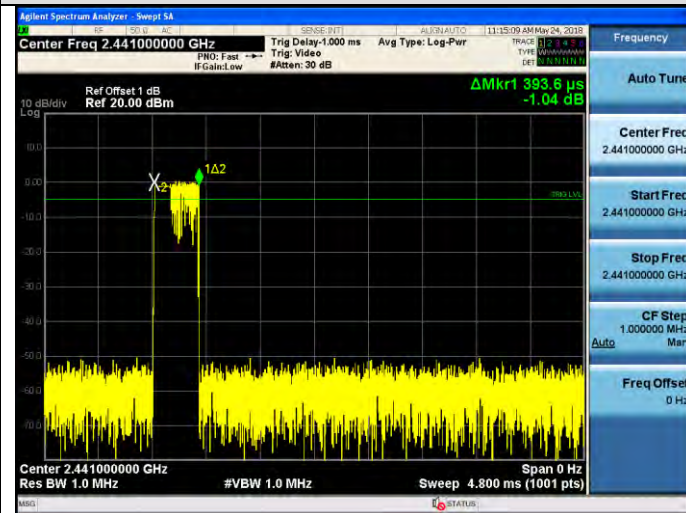

Channel 39 / 2441 MHz - 3DH1





2 Channel 39 / 2441 MHz - 3DH3

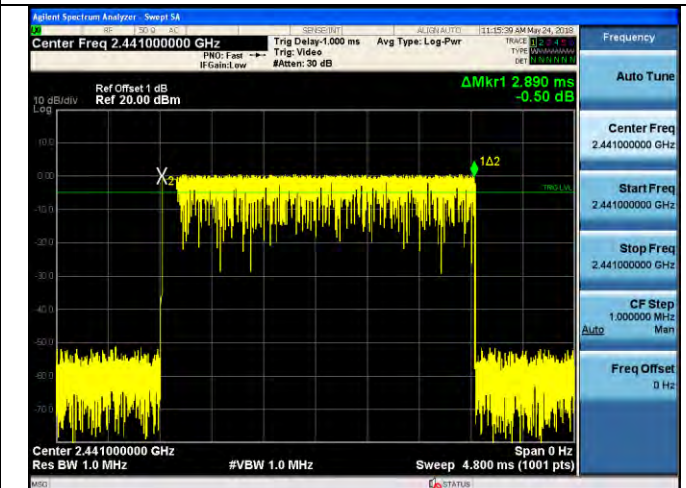


Channel 39 / 2441 MHz - 3DH5

6.8 Pseudorandom Frequency Hopping Sequence

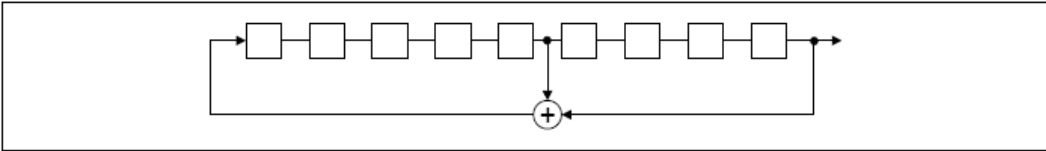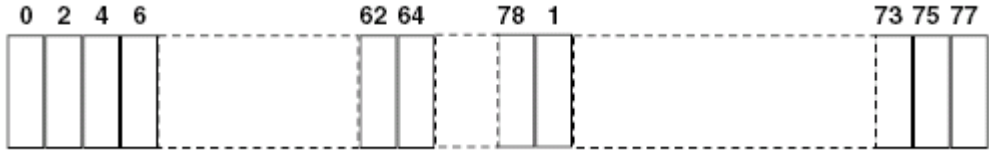Test Requirement:	FCC Part15 C Section 15.247 (a)(1) requirement:
<p><i>Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.</i></p> <p><i>Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.</i></p>	
EUT Pseudorandom Frequency Hopping Sequence	
<p><i>The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.</i></p> <ul style="list-style-type: none"> • Number of shift register stages: 9 • Length of pseudo-random sequence: $2^9 - 1 = 511$ bits • Longest sequence of zeros: 8 (non-inverted signal) <div style="text-align: center;">  </div> <p style="text-align: center;"><i>Linear Feedback Shift Register for Generation of the PRBS sequence</i></p> <p><i>An example of Pseudorandom Frequency Hopping Sequence as follow:</i></p> <div style="text-align: center;">  </div> <p><i>Each frequency used equally on the average by each transmitter.</i></p> <p><i>The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.</i></p>	

6.9 Band Edge


6.9.1 Conducted Emission Method

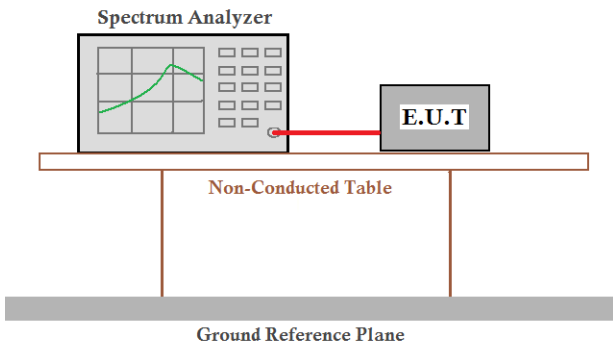Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=100kHz, VBW=300kHz, Detector=Peak
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Test plot as follows:

GFSK Mode:

Test channel: Lowest channel

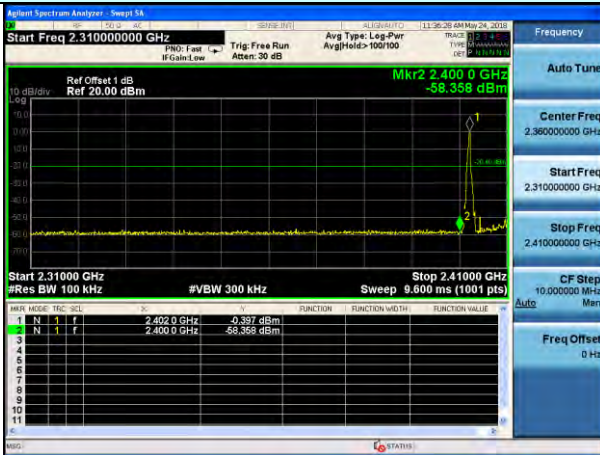


No-hopping mode

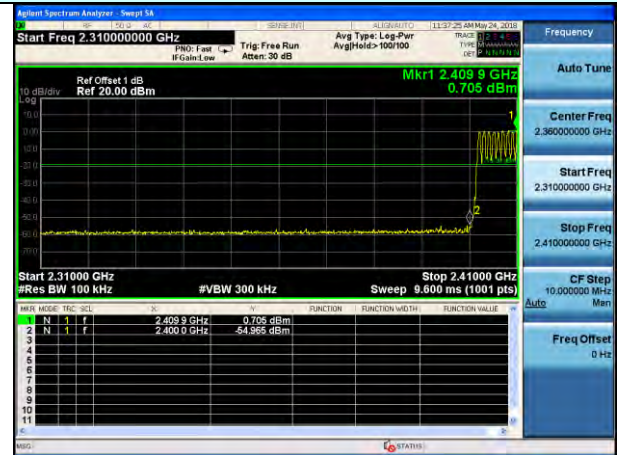


Hopping mode

Test channel: Highest channel

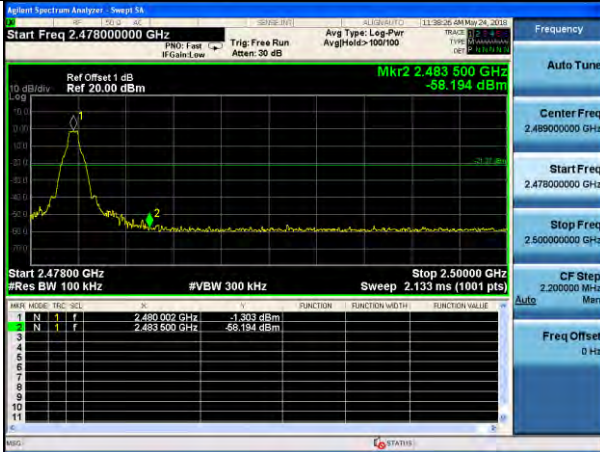


No-hopping mode

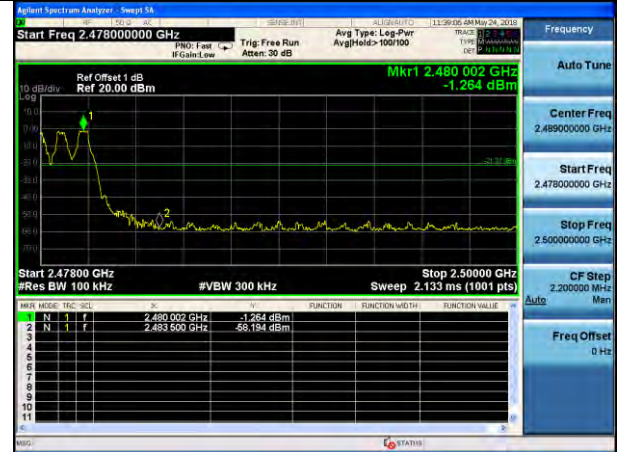


Hopping mode

Pi/4QPSK Mode:

Test channel: Lowest channel

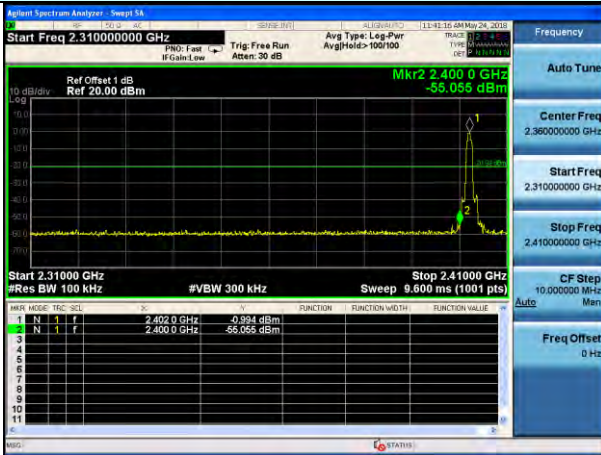


No-hopping mode

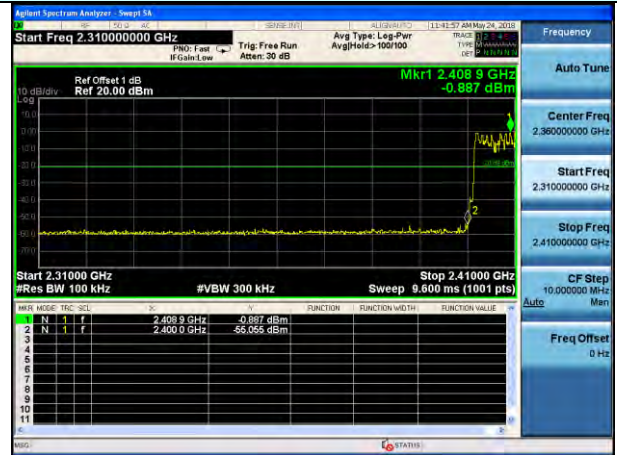


Hopping mode

Test channel: Highest channel

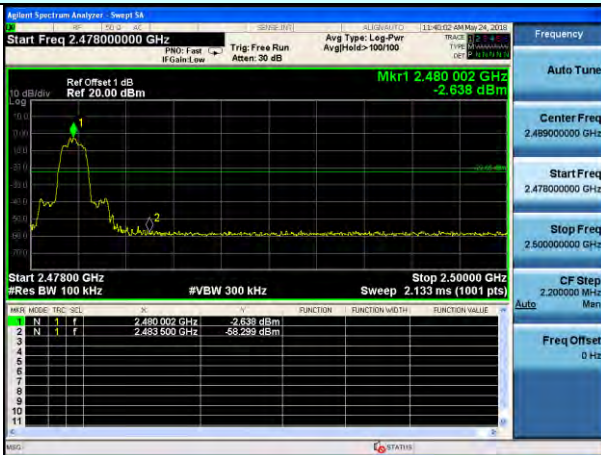


No-hopping mode

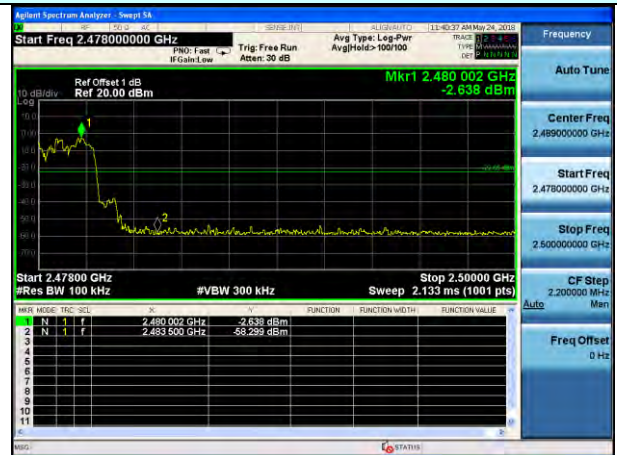


Hopping mode

8DPSK Mode:

Test channel: Lowest channel

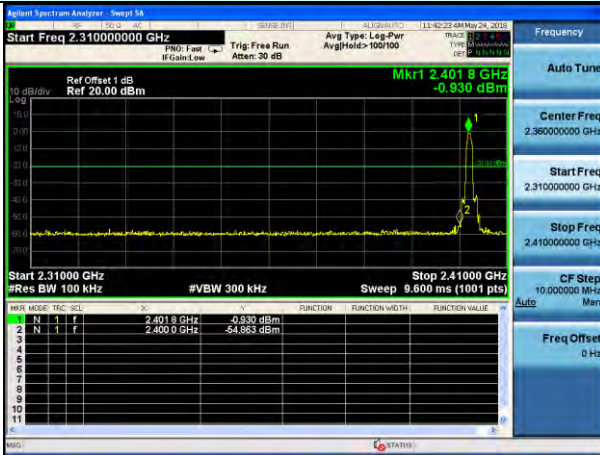


No-hopping mode

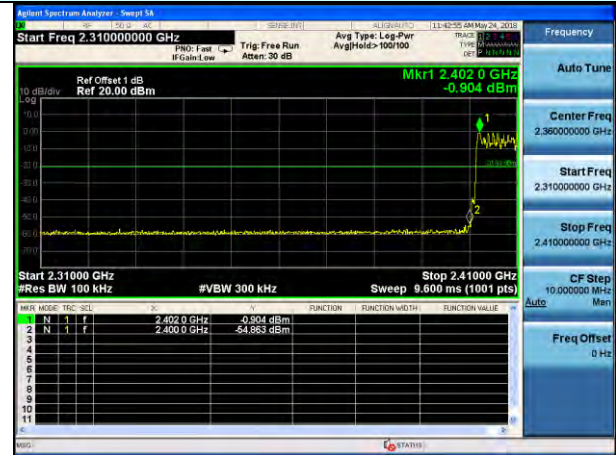


Hopping mode

Test channel: Highest channel

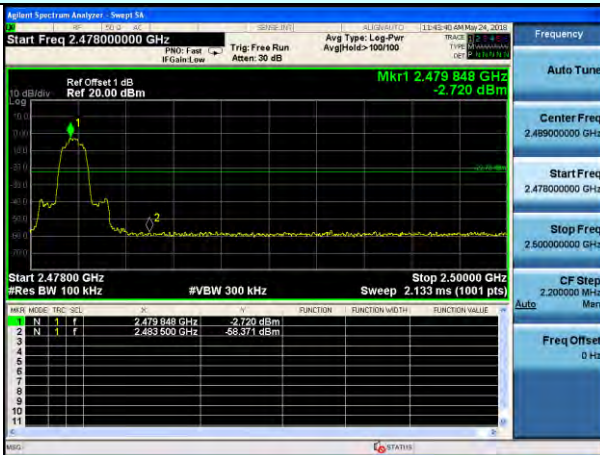

No-hopping mode

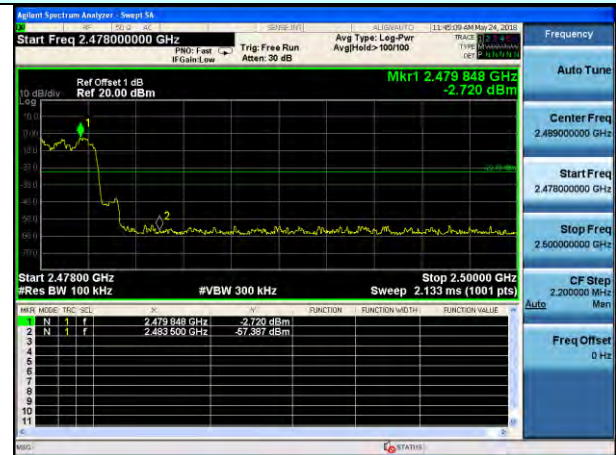

Hopping mode


6.9.2 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209 and 15.205			
Test Method:	ANSI C63.10:2013			
Test Frequency Range:	All restriction band have been tested, and 2.3GHz to 2.5GHz band is the worse case			
Test site:	Measurement Distance: 3m			
Receiver setup:	Frequency	Detector	RBW	VBW
	Above 1GHz	Peak	1MHz	3MHz
		Peak	1MHz	10Hz
Remark				Peak Value
Limit:	Frequency	Limit (dBuV/m @3m)		Remark
	Above 1GHz	54.00		Average Value
		74.00		Peak Value
Test setup:				
Test Procedure:	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 			
Test Instruments:	Refer to section 6.0 for details			
Test mode:	Refer to section 5.2 for details			

Polarization: Vertical

Test Mode: GFSK-Low


Radiated Emission Measurement

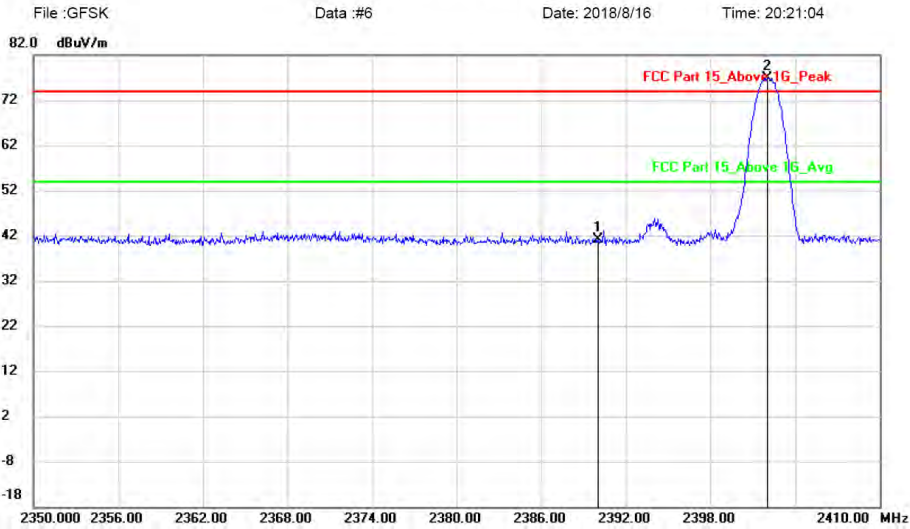

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1		2390.000	44.44	-3.40	41.04	74.00	-32.96	peak	
2	*	2402.020	80.33	-3.41	76.92	74.00	2.92	peak	

hopping-off

Radiated Emission Measurement

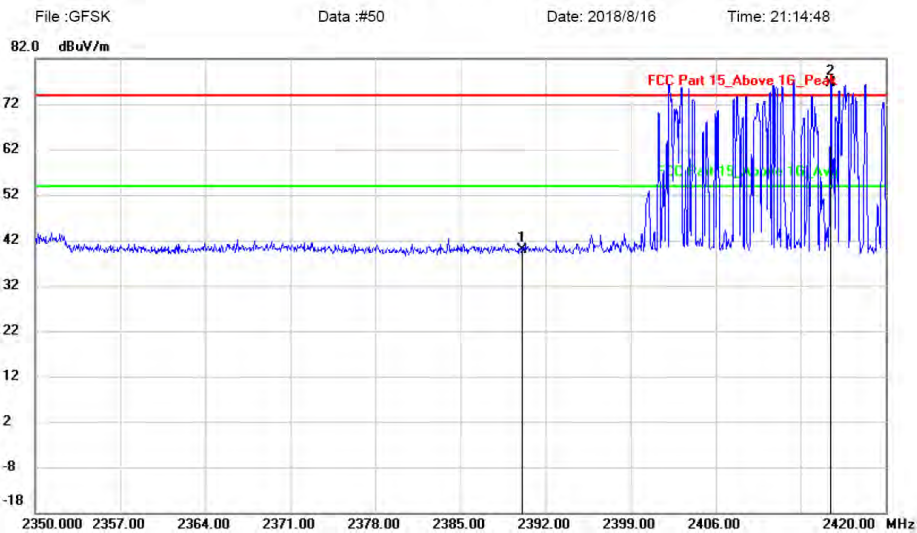


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1		2390.000	43.20	-3.40	39.80	74.00	-34.20	peak	
2	*	2415.450	80.03	-3.41	76.62	74.00	2.62	peak	

hopping-on

Polarization: Horizontal:

Test Mode: GFSK-Low


Radiated Emission Measurement

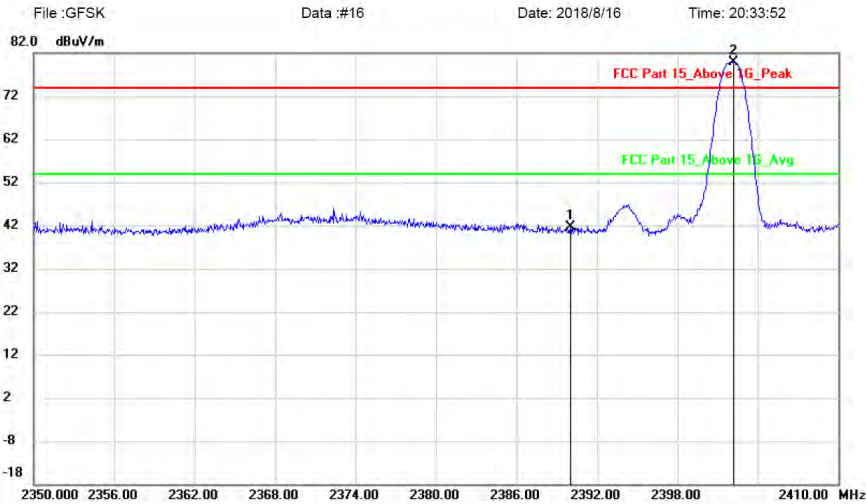

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1		2390.000	45.12	-3.40	41.72	74.00	-32.28	peak	
2	*	2402.200	83.38	-3.41	79.97	74.00	5.97	peak	

hopping-off

Radiated Emission Measurement

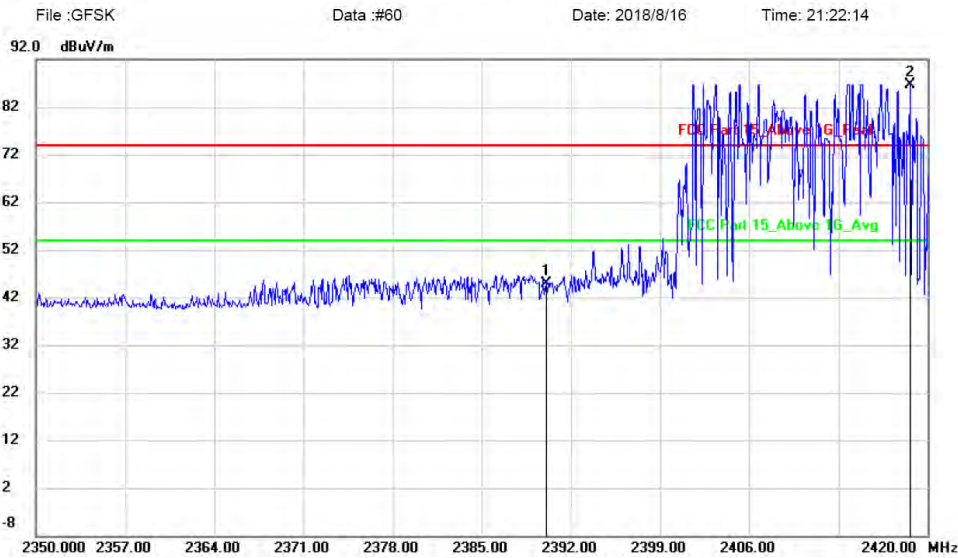


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1		2390.000	48.34	-3.40	44.94	74.00	-29.06	peak	
2	*	2418.670	90.11	-3.41	86.70	74.00	12.70	peak	

hopping-on

Polarization: Vertical

Test Mode: GFSK-High


Radiated Emission Measurement

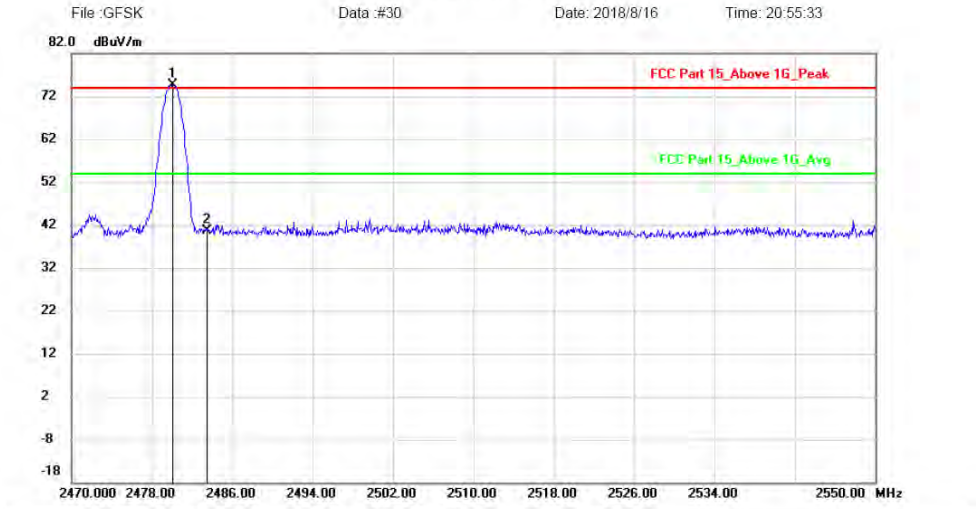

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2480.080	77.98	-3.38	74.60	74.00	0.60			peak
2		2483.500	44.07	-3.38	40.69	74.00	-33.31			peak

hopping-off

Radiated Emission Measurement

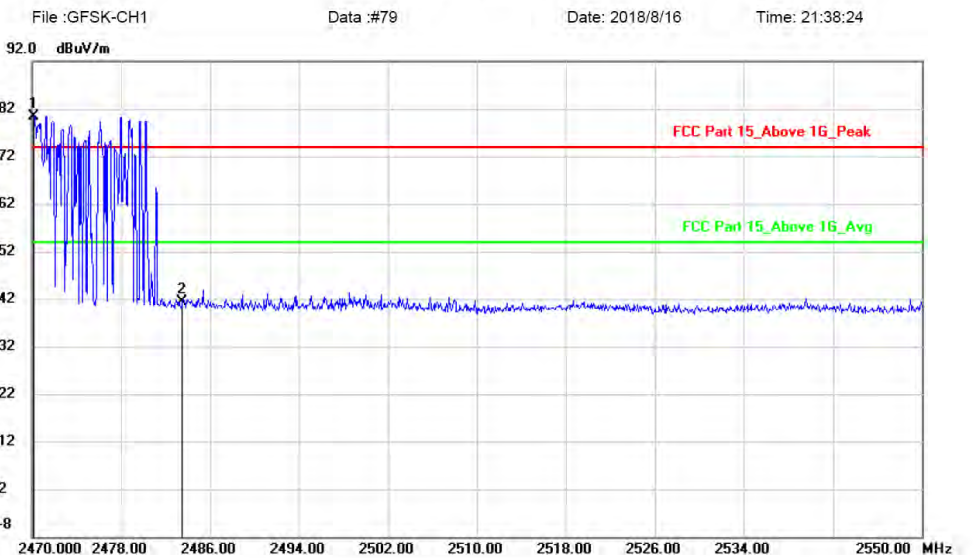


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2470.160	83.83	-3.39	80.44	74.00	6.44			peak
2		2483.500	44.76	-3.38	41.38	74.00	-32.62			peak

hopping-on

Polarization: Horizontal Test Mode: GFSK-High


Radiated Emission Measurement

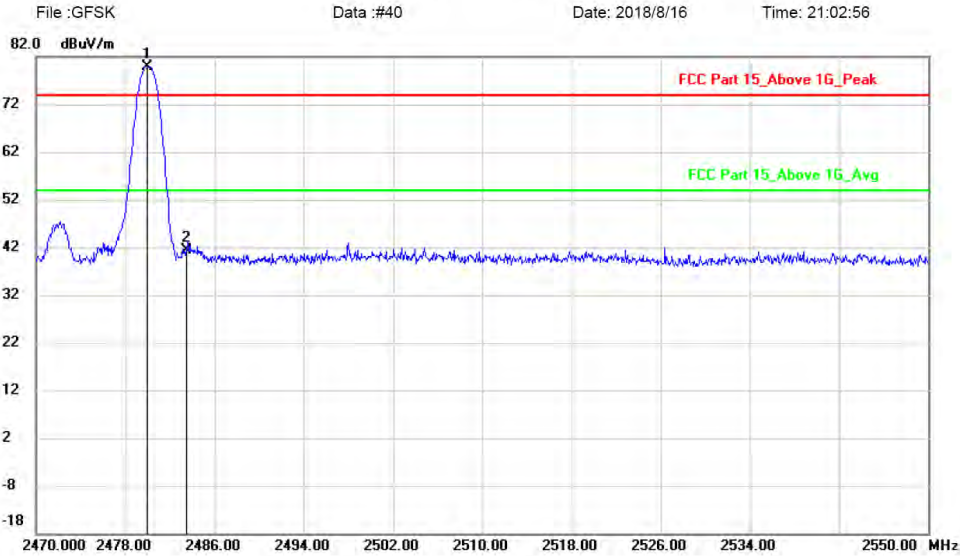

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	2479.920	83.34	-3.38	79.96	74.00	5.96	peak		
2		2483.500	44.80	-3.38	41.42	74.00	-32.58	peak		

hopping-off

Radiated Emission Measurement

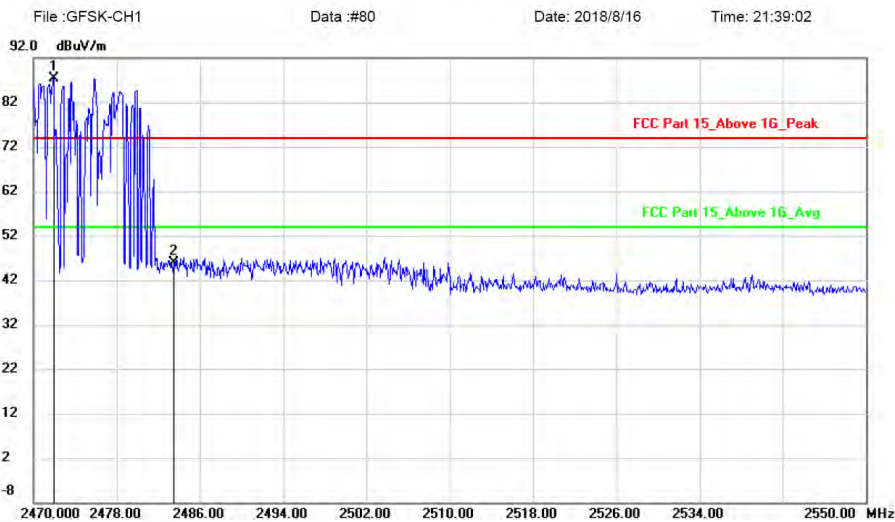


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	2471.920	90.73	-3.39	87.34	74.00	13.34	peak		
2		2483.500	49.30	-3.38	45.92	74.00	-28.08	peak		

hopping-on

Polarization: Vertical


Test Mode: $\pi/4$ DQPSK-Low

Radiated Emission Measurement

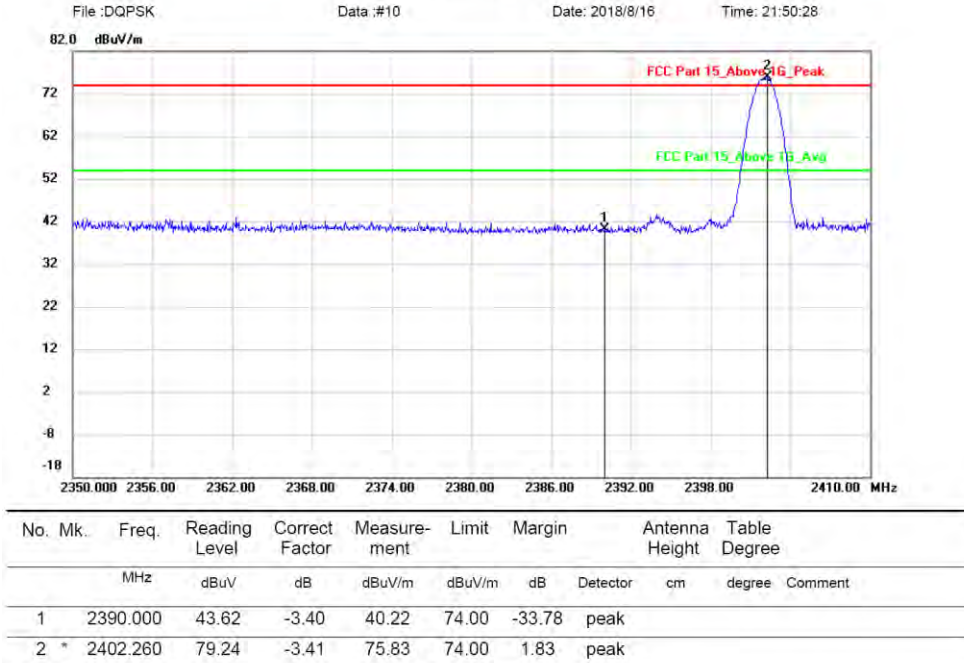

hopping-off

Radiated Emission Measurement

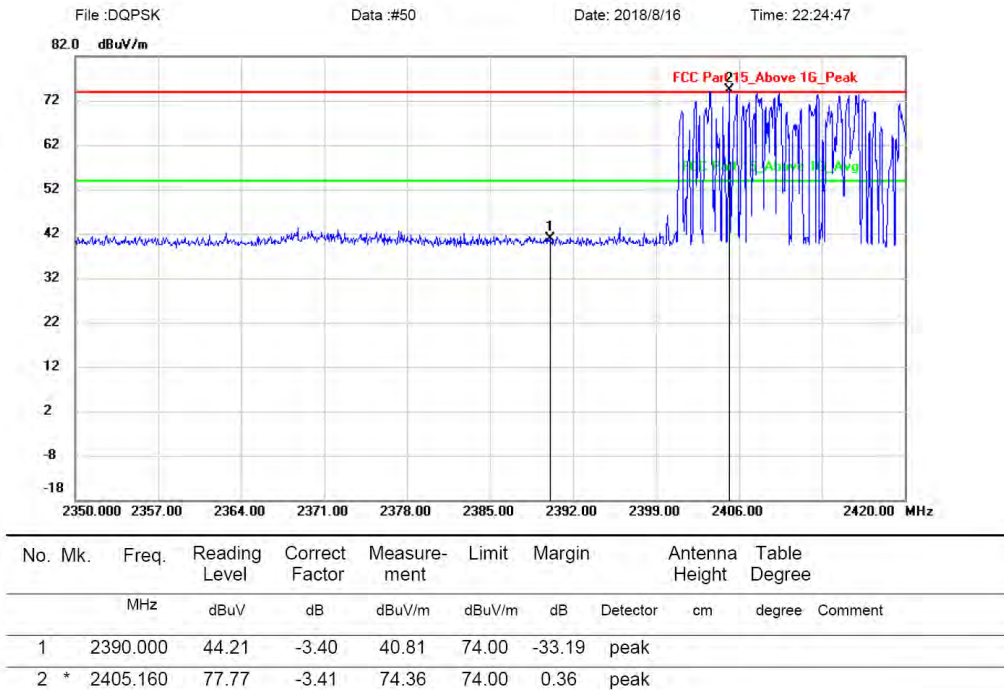


hopping-on

Polarization: Horizontal


Test Mode: $\pi/4$ DQPSK-Low

Radiated Emission Measurement

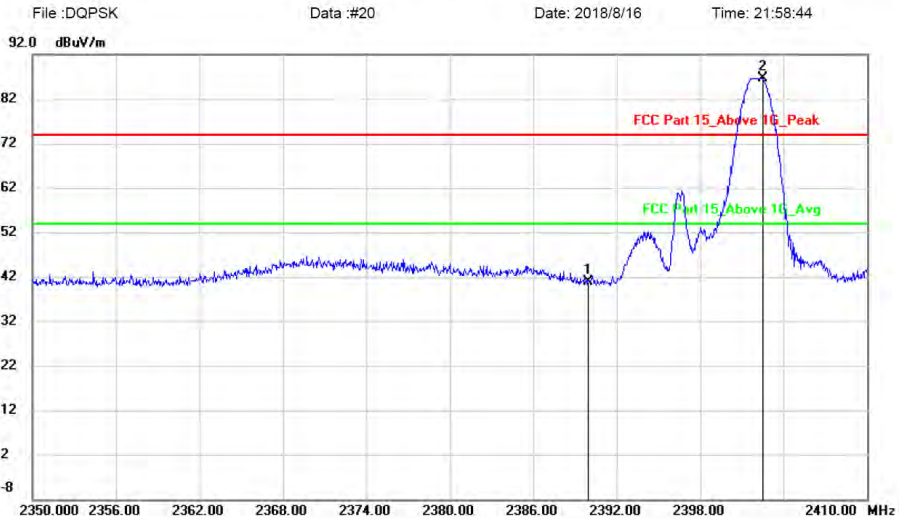

No.	Mk.	Freq.	Reading	Correct	Measurement	Limit	Margin	Antenna	Table	
		MHz	dBuV	Factor	dBuV/m	dBuV/m	dB	Height	Degree	Comment
1		2390.000	44.28	-3.40	40.88	74.00	-33.12	peak		
2	*	2402.500	89.99	-3.41	86.58	74.00	12.58	peak		

hopping-off Radiated Emission Measurement

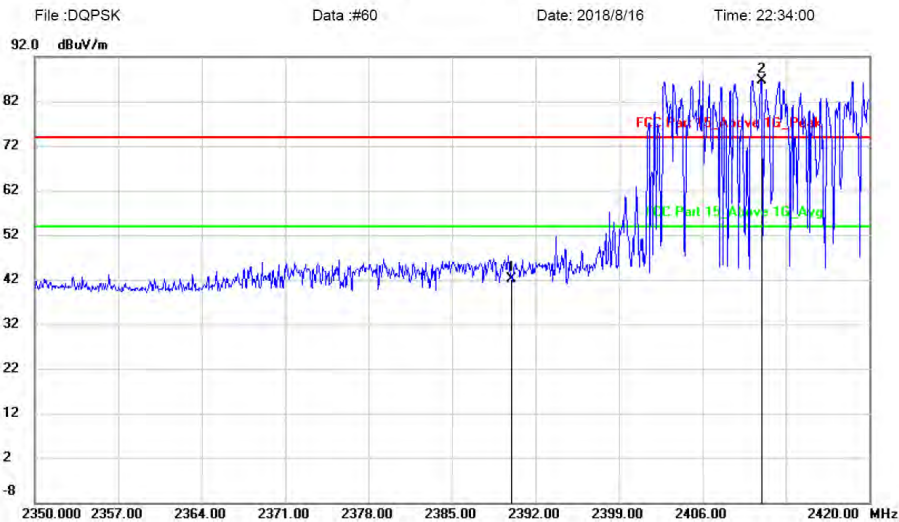


No.	Mk.	Freq.	Reading	Correct	Measurement	Limit	Margin	Antenna	Table	
		MHz	dBuV	Factor	dBuV/m	dBuV/m	dB	Height	Degree	Comment
1		2390.000	45.57	-3.40	42.17	74.00	-31.83	peak		

hopping-on

Polarization: Vertical

Test Mode: $\pi/4$ DQPSK-High


Radiated Emission Measurement

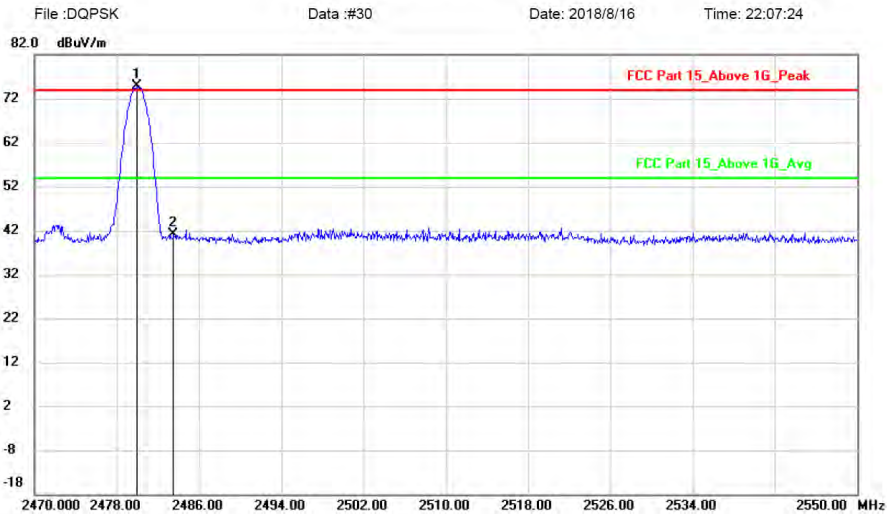

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	2480.000	78.16	-3.38	74.78	74.00	0.78	peak		
2		2483.500	44.47	-3.38	41.09	74.00	-32.91	peak		

hopping-off

Radiated Emission Measurement

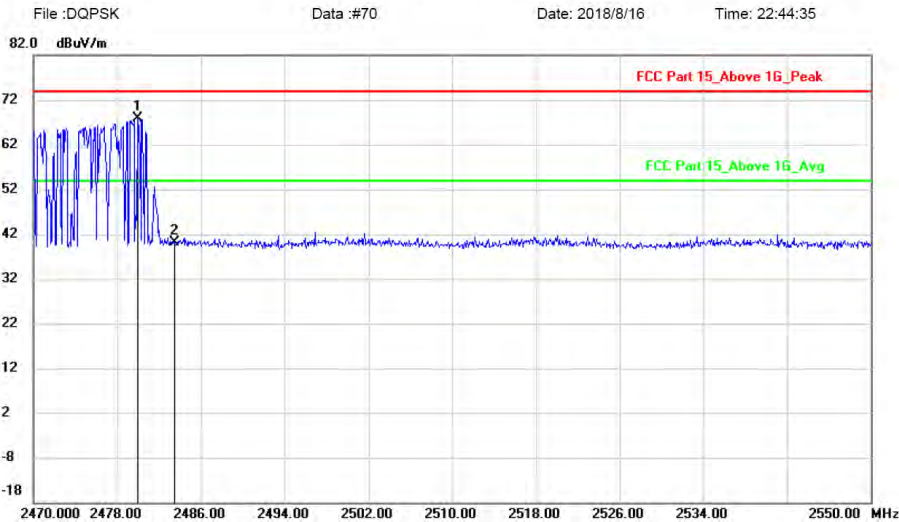


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	2480.000	71.17	-3.38	67.79	74.00	-6.21	peak		
2		2483.500	43.49	-3.38	40.11	74.00	-33.89	peak		

hopping-on

Polarization: Horizontal


Test Mode: $\pi/4$ DQPSK-High

Radiated Emission Measurement

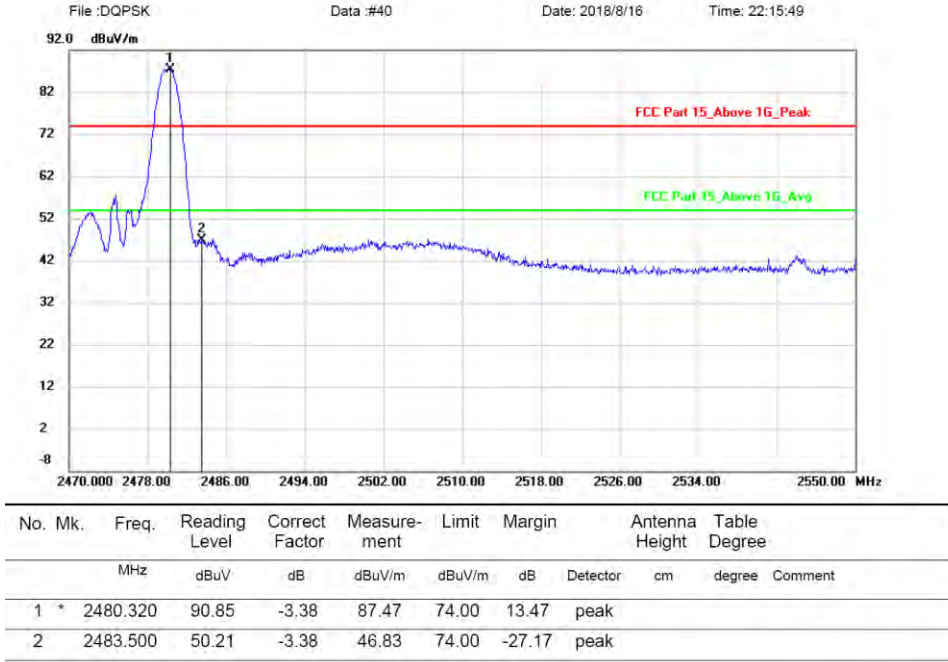

hopping-off

Radiated Emission Measurement

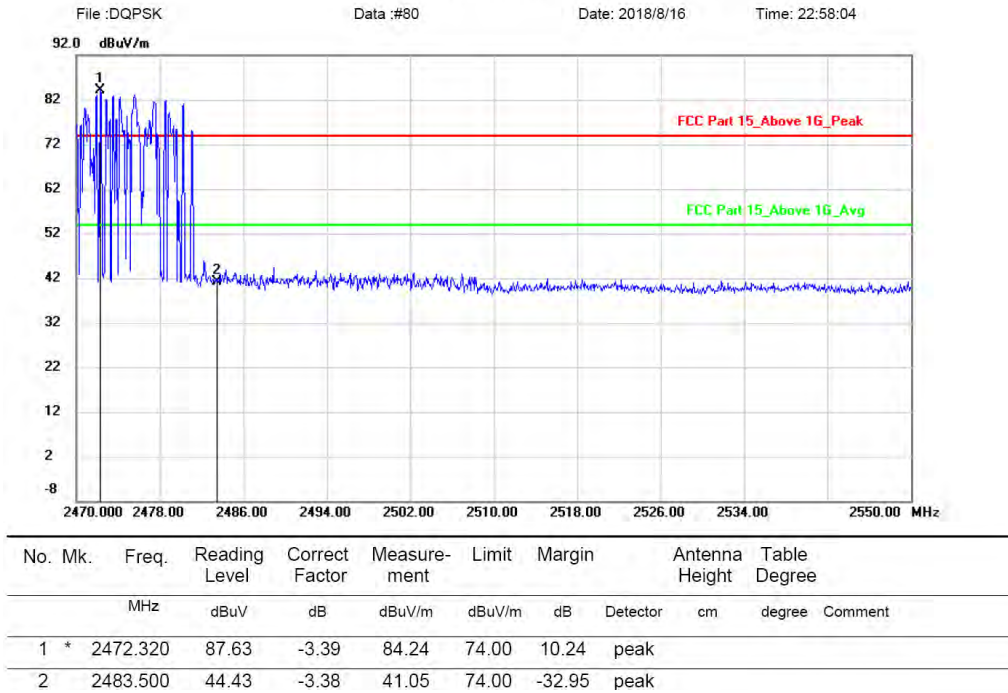


hopping-on

Polarization: Vertical


Test Mode: 8-DPSK-Low

Radiated Emission Measurement

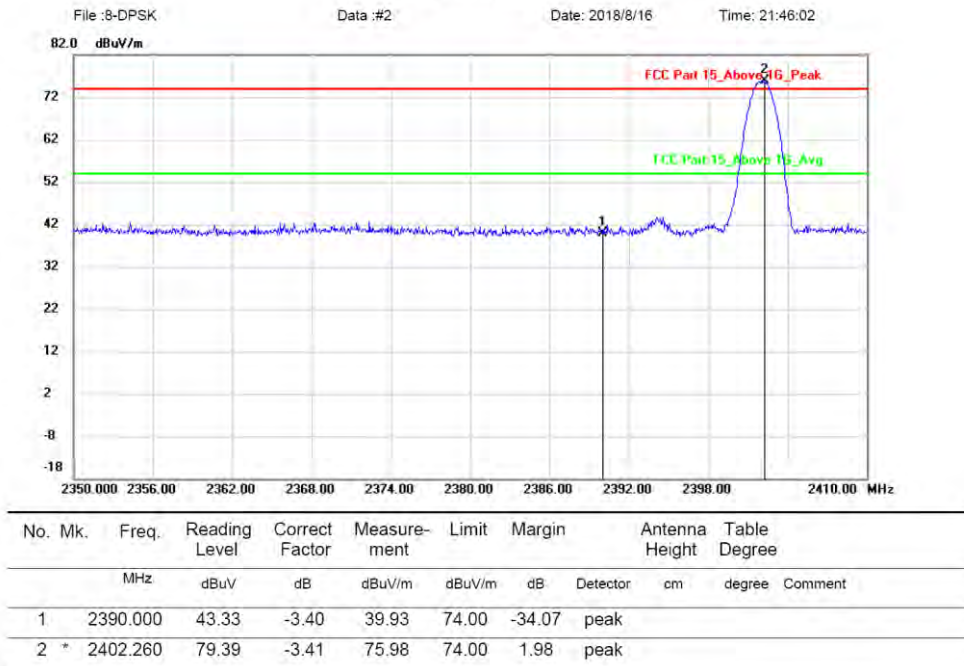

hopping-off

Radiated Emission Measurement

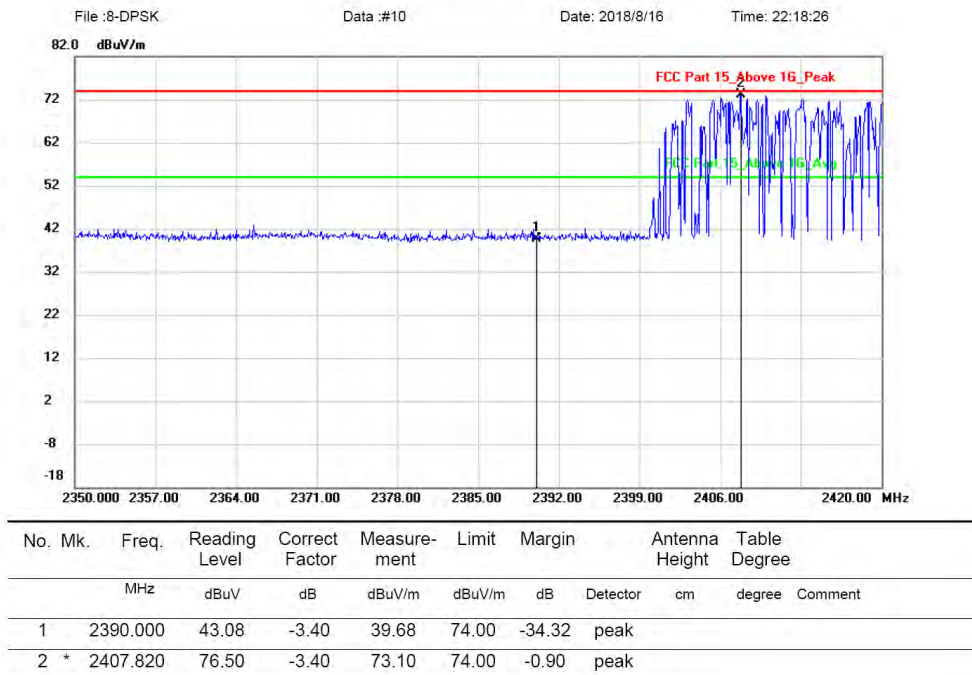


hopping-on

Polarization: Horizontal

Test Mode: 8-DPSK -Low


Radiated Emission Measurement

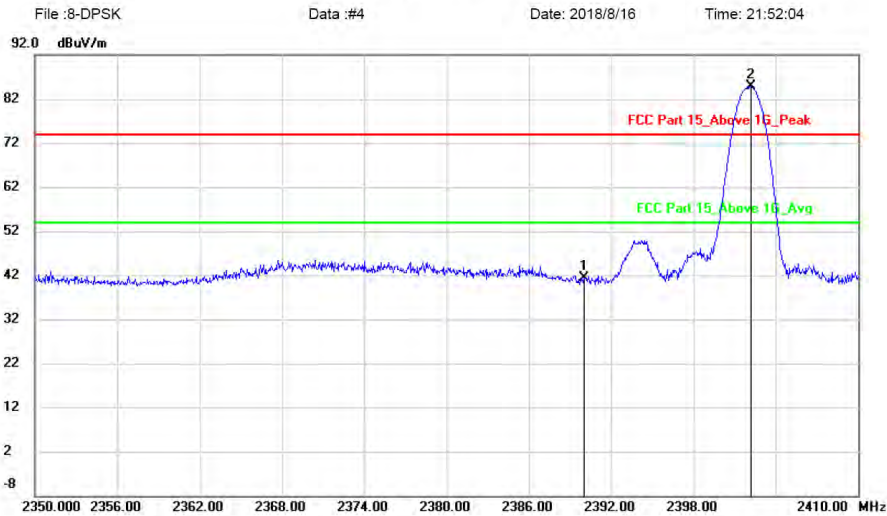

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1		2390.000	44.74	-3.40	41.34	74.00	-32.66	peak	
2	*	2402.200	88.26	-3.41	84.85	74.00	10.85	peak	

hopping-off

Radiated Emission Measurement

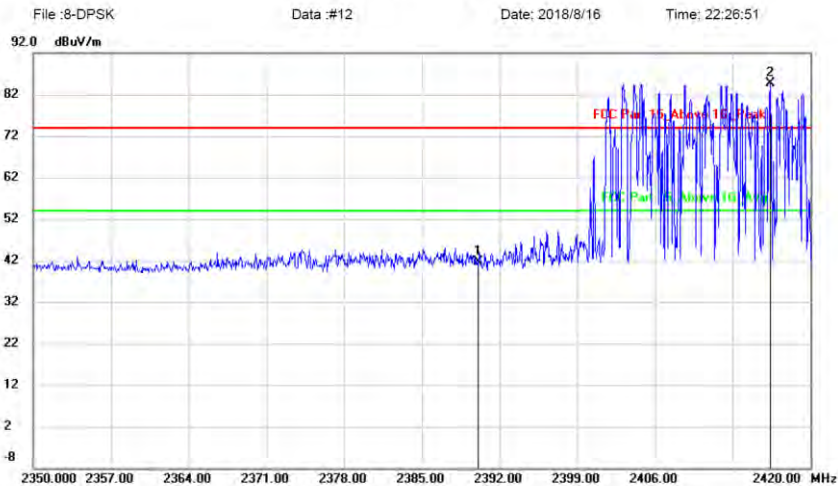


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1		2390.000	44.95	-3.40	41.55	74.00	-32.45	peak	
2	*	2416.360	88.03	-3.41	84.62	74.00	10.62	peak	

hopping-on

Polarization: Vertical

Test Mode: 8-DPSK -High


Radiated Emission Measurement

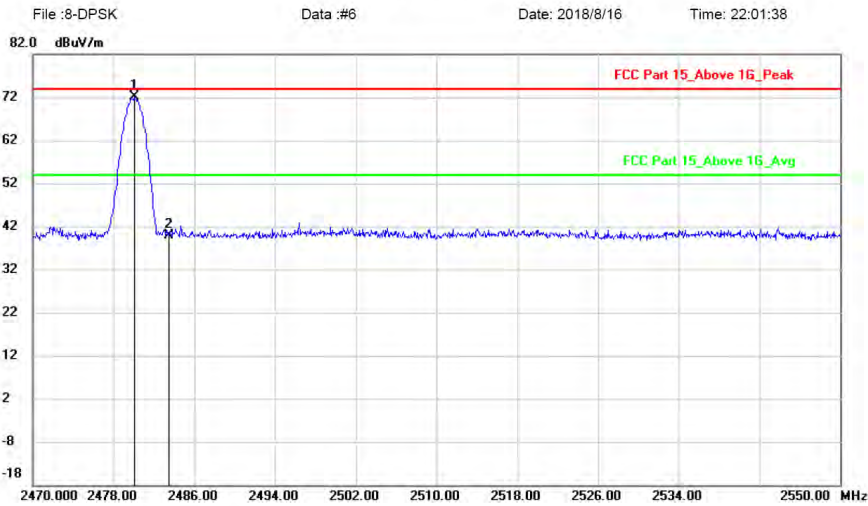

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	2480.080	75.43	-3.38	72.05	74.00	-1.95	peak	
2		2483.500	43.36	-3.38	39.98	74.00	-34.02	peak	

hopping-off

Radiated Emission Measurement

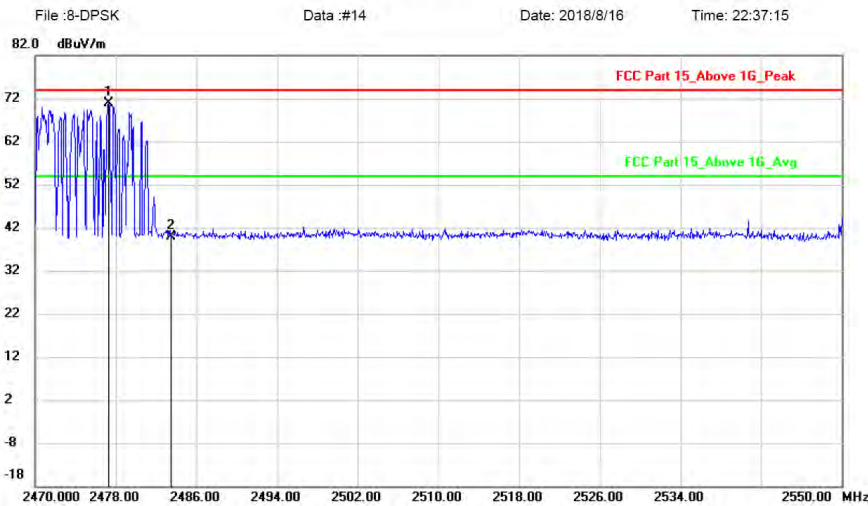


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	2477.280	74.37	-3.39	70.98	74.00	-3.02	peak	
2		2483.500	43.36	-3.38	39.98	74.00	-34.02	peak	

hopping-on

Polarization: Horizontal


Test Mode: 8-DPSK -High

Radiated Emission Measurement

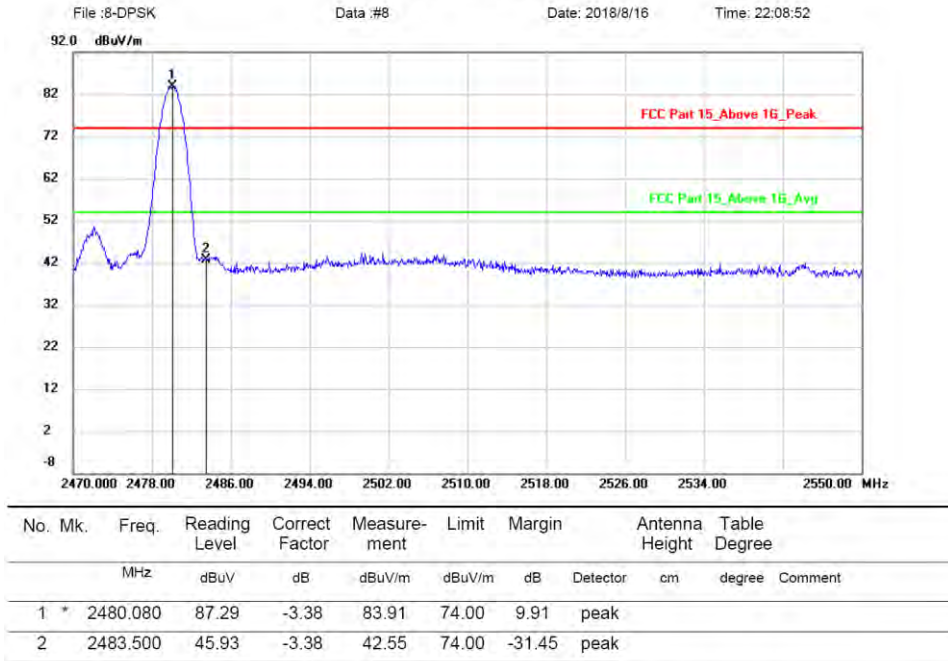

hopping-off

Radiated Emission Measurement

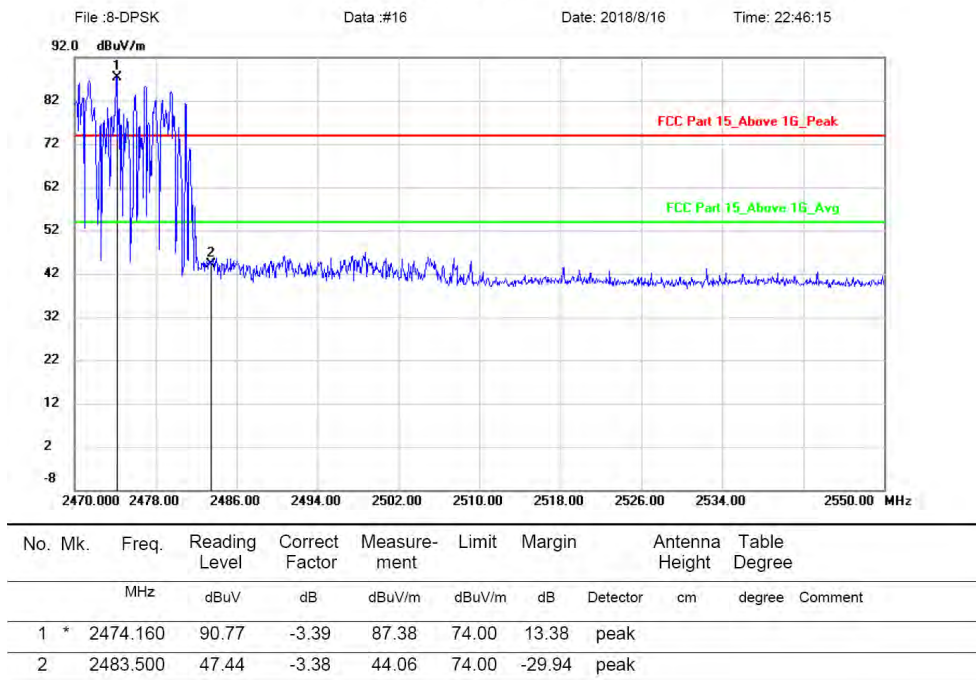


hopping-on

Note: 1. *:Maximum data; x:Over limit; !:over margin.
 2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

6.10 Spurious Emission


6.10.1 Conducted Emission Method

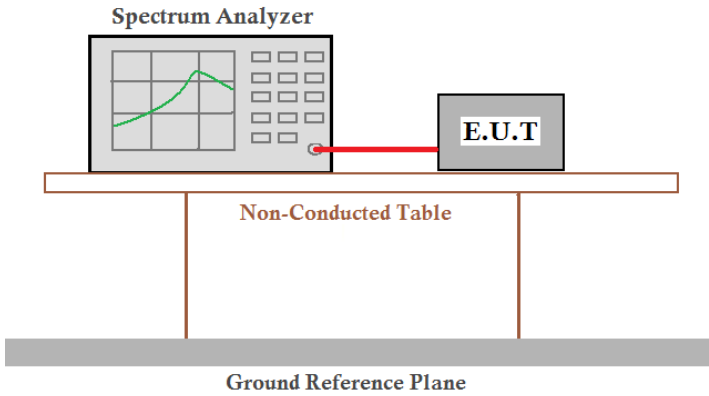Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 Meas Guidance V04
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Remark:


During the test, pre-scan the GFSK, Pi/4QPSK, 8DPSK modulation, and found the GFSK modulation which it is worse case.

Test channel: Lowest channel

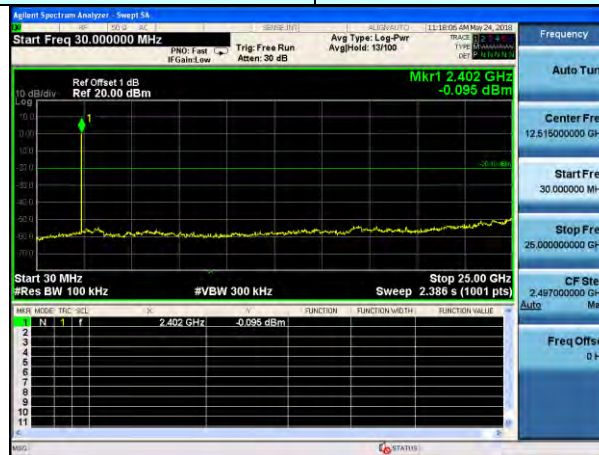


30MHz~25GHz

Test channel: Middle channel

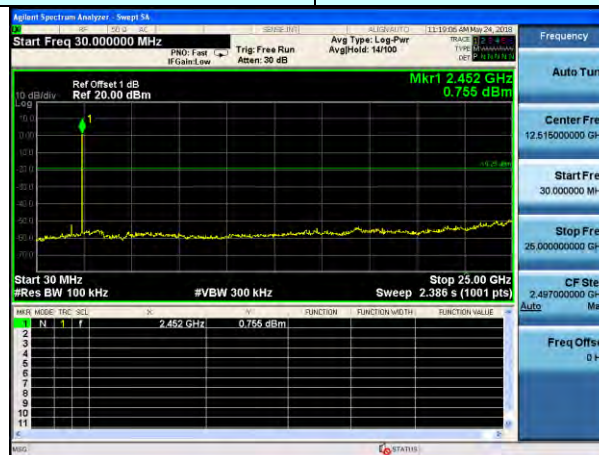

30MHz~25GHz

Test channel: Highest channel

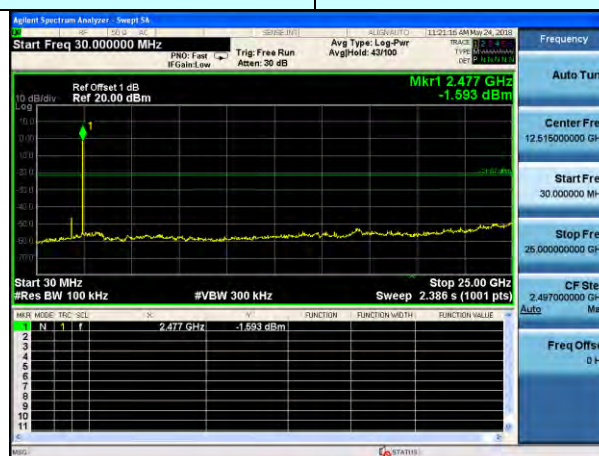

30MHz~25GHz

6.10.2 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	30MHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
Limit:	Frequency	Limit (dBuV/m @3m)		Remark	
	30MHz-88MHz	40.0		Quasi-peak Value	
	88MHz-216MHz	43.5		Quasi-peak Value	
	216MHz-960MHz	46.0		Quasi-peak Value	
	960MHz-1GHz	54.0		Quasi-peak Value	
	Above 1GHz	54.0		Average Value	
74.0		Peak Value			
Test setup:	Below 1GHz				
Above 1GHz					

<p>Test Procedure:</p>	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table (0.8 meters below 1G and 1.5 meters above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
<p>Test Instruments:</p>	<p>Refer to section 6.0 for details</p>
<p>Test mode:</p>	<p>Refer to section 5.2 for details</p>
<p>Test results:</p>	<p>Pass</p>


Remark:

1. During the test, pre-scan the GFSK, Pi/4QPSK, 8DPSK modulation, and found the GFSK modulation low channel which it is worse case.
2. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.
3. The test data below 30MHz is too lower than the limit, so not show in this report.

Test result for BT4.2 (Channel 2441MHz), AC 120V/ 60Hz

Vertical:

Radiated Emission Measurement

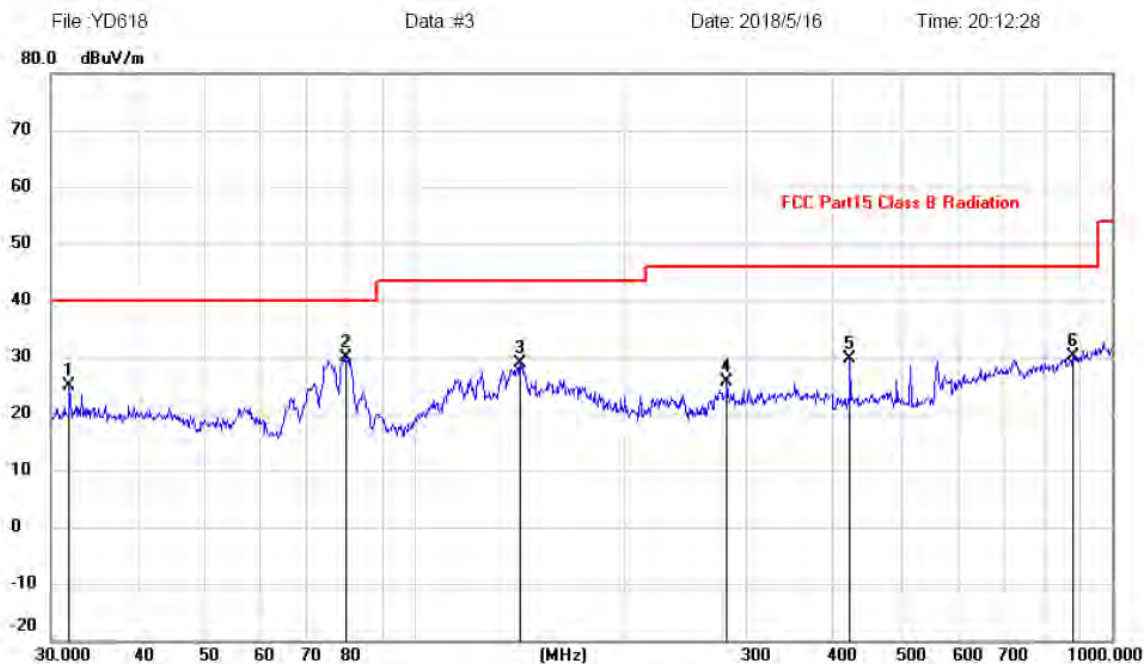


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		31.8427	11.60	13.38	24.98	40.00	-15.02			peak
2	*	79.5209	20.29	9.47	29.76	40.00	-10.24			peak
3		141.3298	14.86	13.93	28.79	43.50	-14.71			peak
4		280.0237	12.69	12.97	25.66	46.00	-20.34			peak
5		420.5803	13.60	16.05	29.65	46.00	-16.35			peak
6		878.3214	7.24	22.90	30.14	46.00	-15.86			peak

Note:1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Test result for BT4.2 (Channel 2441MHz), AC 120V/ 60Hz

Horizontal:

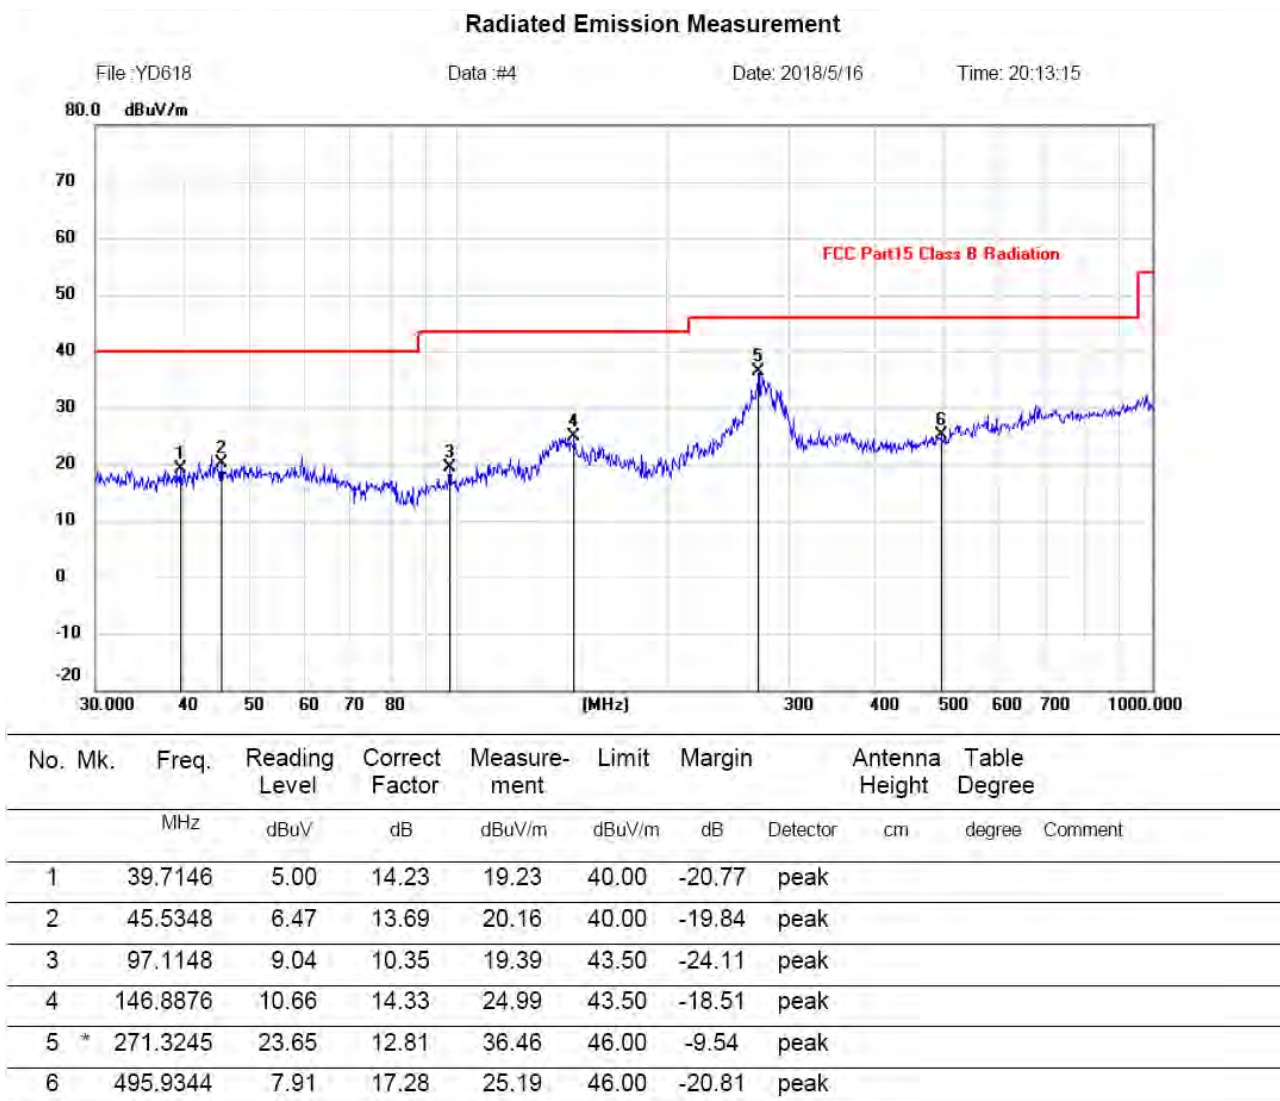

Note:1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Above 1GHz

Test channel:	Lowest
---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804.00	38.86	31.78	8.6	32.09	47.15	74.00	-26.85	Vertical
7206.00	32.48	36.15	11.65	32	48.28	74.00	-25.72	Vertical
9608.00	31.83	37.95	14.14	31.62	52.30	74.00	-21.70	Vertical
12010.00	*					74.00		Vertical
14412.00	*					74.00		Vertical
4804.00	42.87	31.78	8.6	32.09	51.16	74.00	-22.84	Horizontal
7206.00	34.21	36.15	11.65	32	50.01	74.00	-23.99	Horizontal
9608.00	31.92	37.95	14.14	31.62	52.39	74.00	-21.61	Horizontal
12010.00	*					74.00		Horizontal
14412.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804.00	27.75	31.78	8.6	32.09	36.04	54.00	-17.96	Vertical
7206.00	21.31	36.15	11.65	32	37.11	54.00	-16.89	Vertical
9608.00	21.07	37.95	14.14	31.62	41.54	54.00	-12.46	Vertical
12010.00	*					54.00		Vertical
14412.00	*					54.00		Vertical
4804.00	30.93	31.78	8.6	32.09	39.22	54.00	-14.78	Horizontal
7206.00	23.30	36.15	11.65	32	39.10	54.00	-14.90	Horizontal
9608.00	20.42	37.95	14.14	31.62	40.89	54.00	-13.11	Horizontal
12010.00	*					54.00		Horizontal
14412.00	*					54.00		Horizontal

Remark:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *“*” means this data is too weak instrument of signal is unable to test.*
3. *The emission levels of other frequencies are very lower than the limit and not show in test report.*

Test channel:	Middle
---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4882.00	38.60	31.85	8.67	32.12	47.00	74.00	-27.00	Vertical
7323.00	33.34	36.37	11.72	31.89	49.54	74.00	-24.46	Vertical
9764.00	31.88	38.35	14.25	31.62	52.86	74.00	-21.14	Vertical
12205.00	*					74.00		Vertical
14646.00	*					74.00		Vertical
4882.00	43.46	31.85	8.67	32.12	51.86	74.00	-22.14	Horizontal
7323.00	33.99	36.37	11.72	31.89	50.19	74.00	-23.81	Horizontal
9764.00	31.81	38.35	14.25	31.62	52.79	74.00	-21.21	Horizontal
12205.00	*					74.00		Horizontal
14646.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4882.00	26.88	31.85	8.67	32.12	35.28	54.00	-18.72	Vertical
7323.00	21.53	36.37	11.72	31.89	37.73	54.00	-16.27	Vertical
9764.00	20.25	38.35	14.25	31.62	41.23	54.00	-12.77	Vertical
12205.00	*					54.00		Vertical
14646.00	*					54.00		Vertical
4882.00	31.73	31.85	8.67	32.12	40.13	54.00	-13.87	Horizontal
7323.00	22.94	36.37	11.72	31.89	39.14	54.00	-14.86	Horizontal
9764.00	20.11	38.35	14.25	31.62	41.09	54.00	-12.91	Horizontal
12205.00	*					54.00		Horizontal
14646.00	*					54.00		Horizontal

Remark:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor*
2. *“*”*, means this data is the too weak instrument of signal is unable to test.
3. *The emission levels of other frequencies are very lower than the limit and not show in test report.*

Test channel:	Highest
---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4960.00	37.85	31.93	8.73	32.16	46.35	74.00	-27.65	Vertical
7440.00	32.77	36.59	11.79	31.78	49.37	74.00	-24.63	Vertical
9920.00	32.03	38.81	14.38	31.88	53.34	74.00	-20.66	Vertical
12400.00	*					74.00		Vertical
14880.00	*					74.00		Vertical
4960.00	43.21	31.93	8.73	32.16	51.71	74.00	-22.29	Horizontal
7440.00	34.78	36.59	11.79	31.78	51.38	74.00	-22.62	Horizontal
9920.00	32.22	38.81	14.38	31.88	53.53	74.00	-20.47	Horizontal
12400.00	*					74.00		Horizontal
14880.00	*					74.00		Horizontal

Average value:


Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4960.00	26.73	31.93	8.73	32.16	35.23	54.00	-18.77	Vertical
7440.00	20.96	36.59	11.79	31.78	37.56	54.00	-16.44	Vertical
9920.00	21.06	38.81	14.38	31.88	42.37	54.00	-11.63	Vertical
12400.00	*					54.00		Vertical
14880.00	*					54.00		Vertical
4960.00	31.82	31.93	8.73	32.16	40.32	54.00	-13.68	Horizontal
7440.00	23.71	36.59	11.79	31.78	40.31	54.00	-13.69	Horizontal
9920.00	20.26	38.81	14.38	31.88	41.57	54.00	-12.43	Horizontal
12400.00	*					54.00		Horizontal
14880.00	*					54.00		Horizontal

Remark:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor*
2. *“*” means this data is too weak instrument of signal is unable to test.*
3. *The emission levels of other frequencies are very lower than the limit and not show in test report.*

7 Test Setup Photo


Radiated Emission

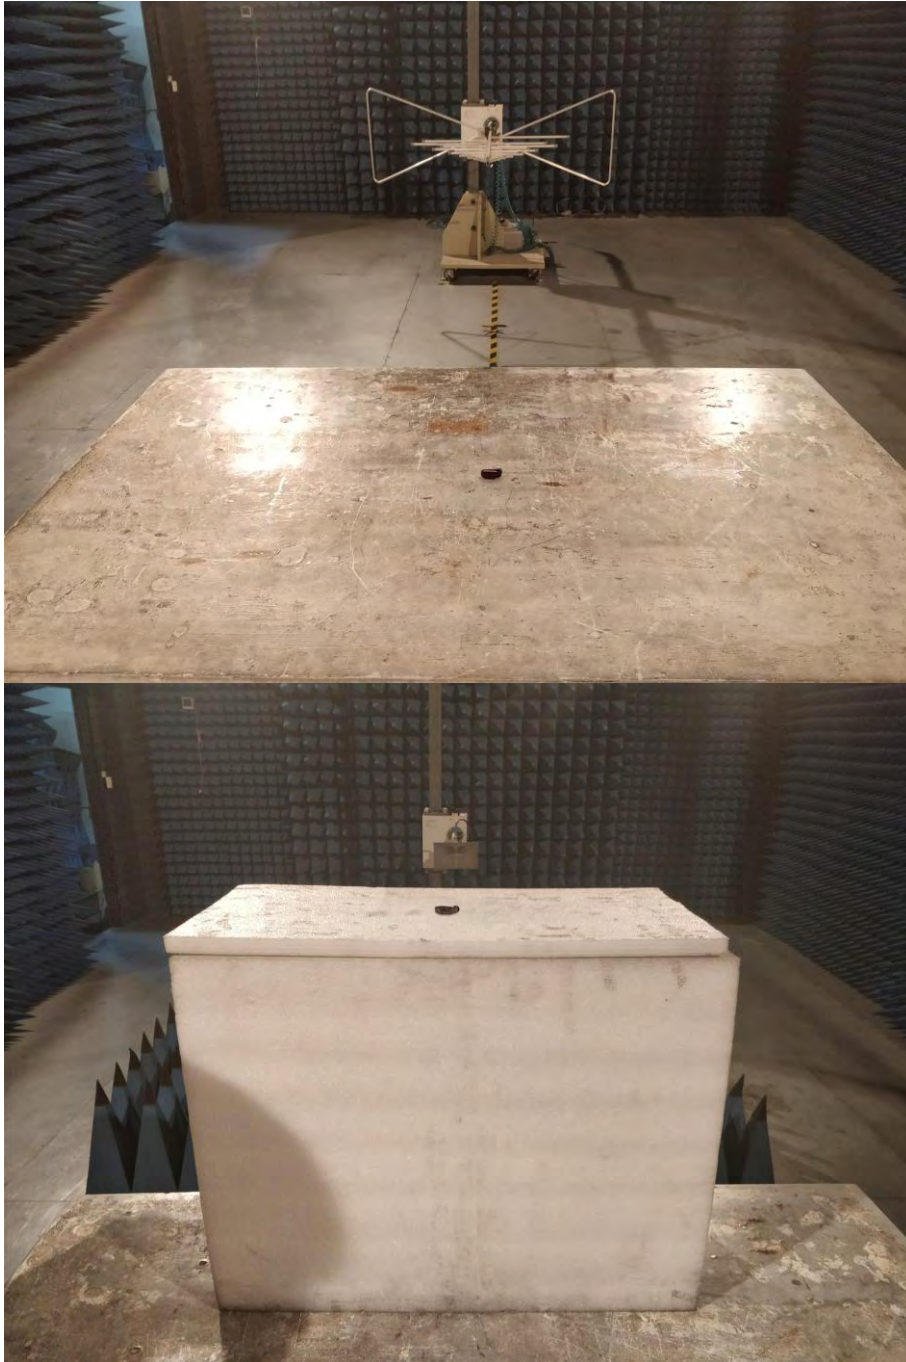

Conducted Emission







8 EUT Constructional Details


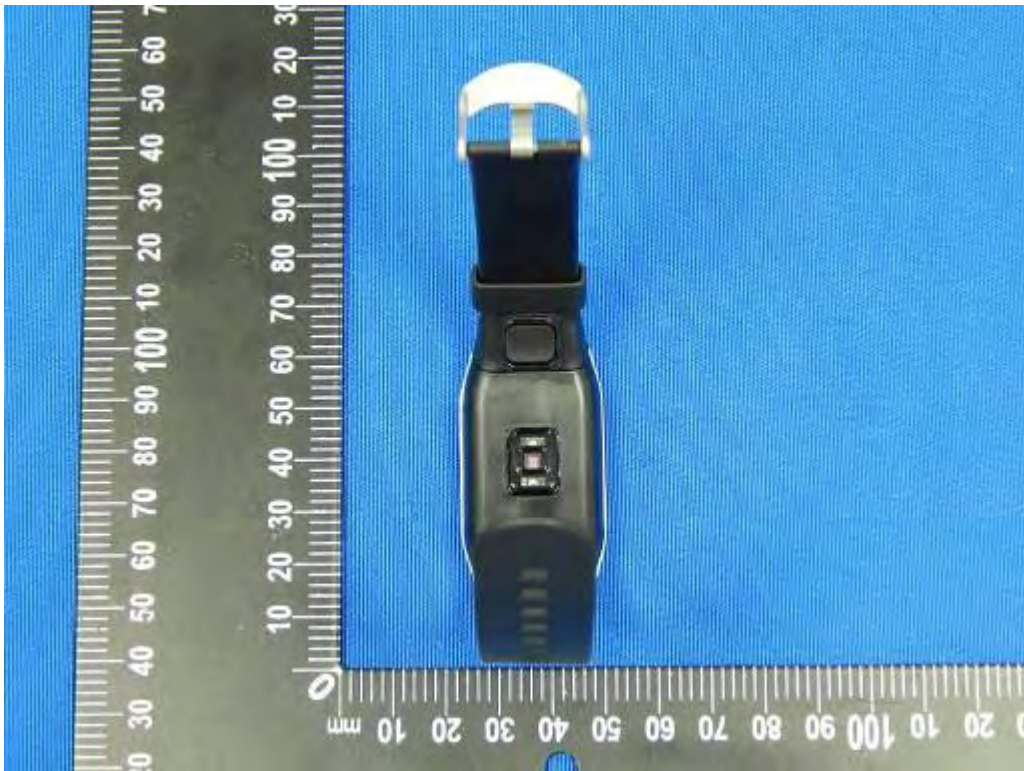







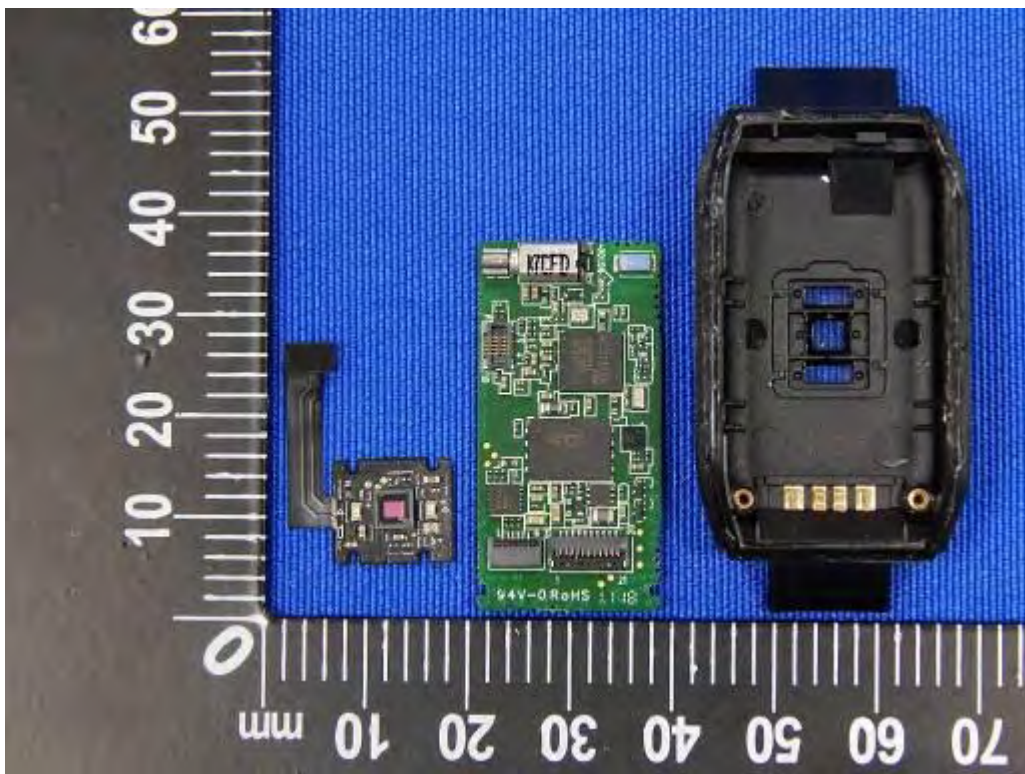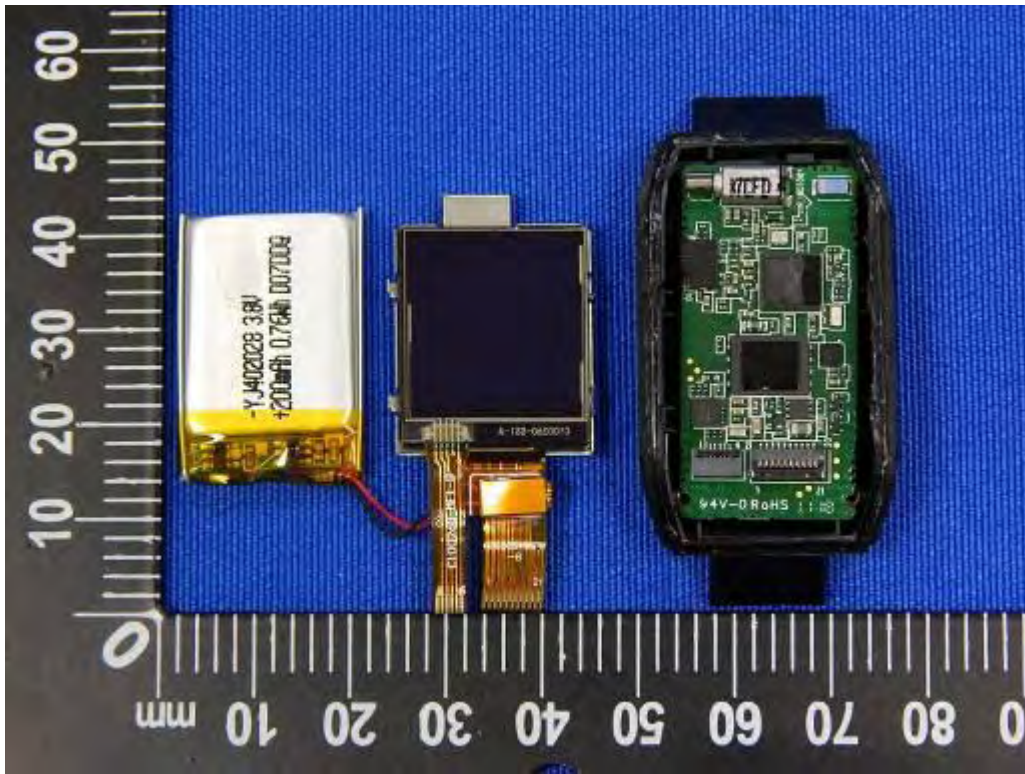

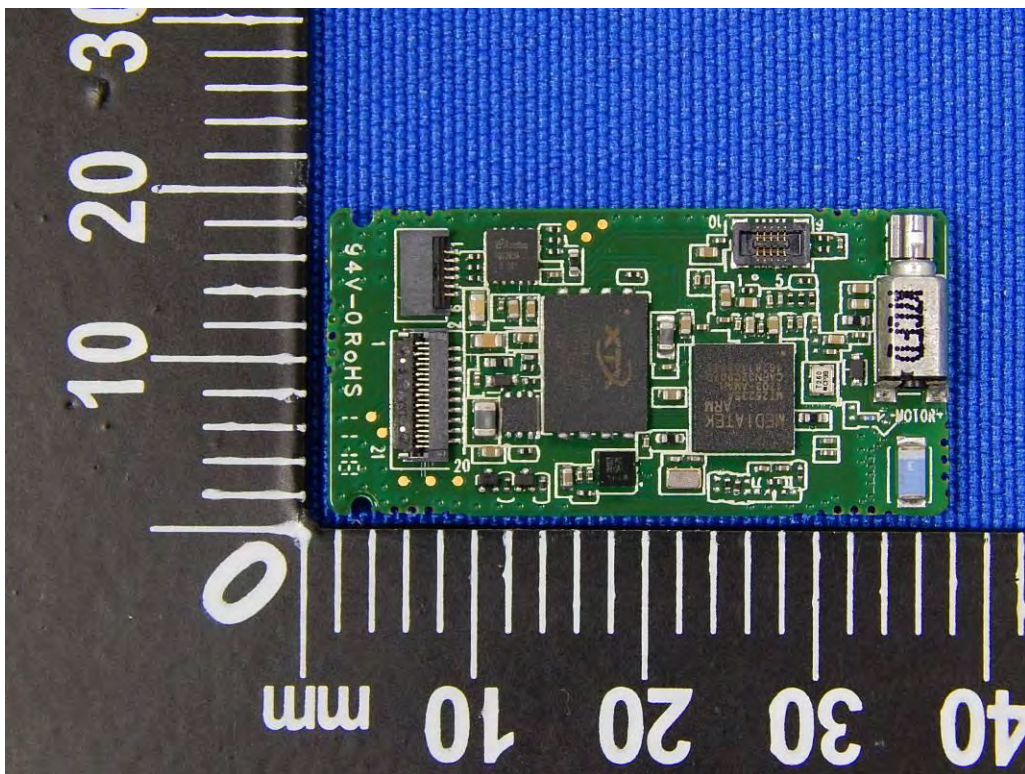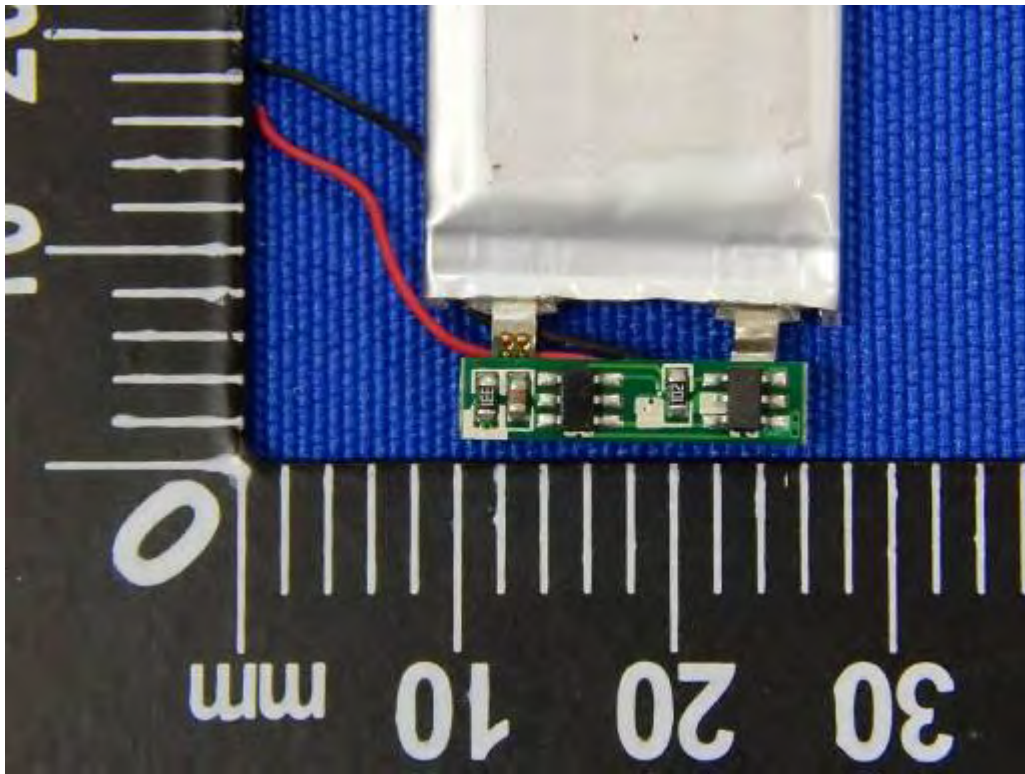

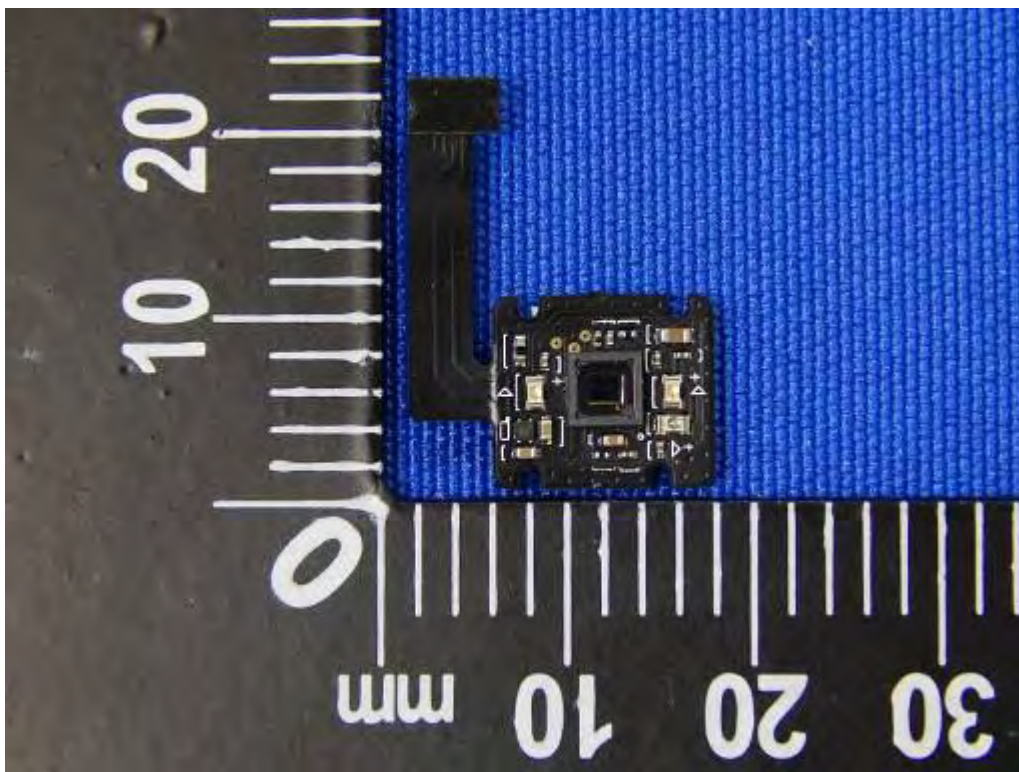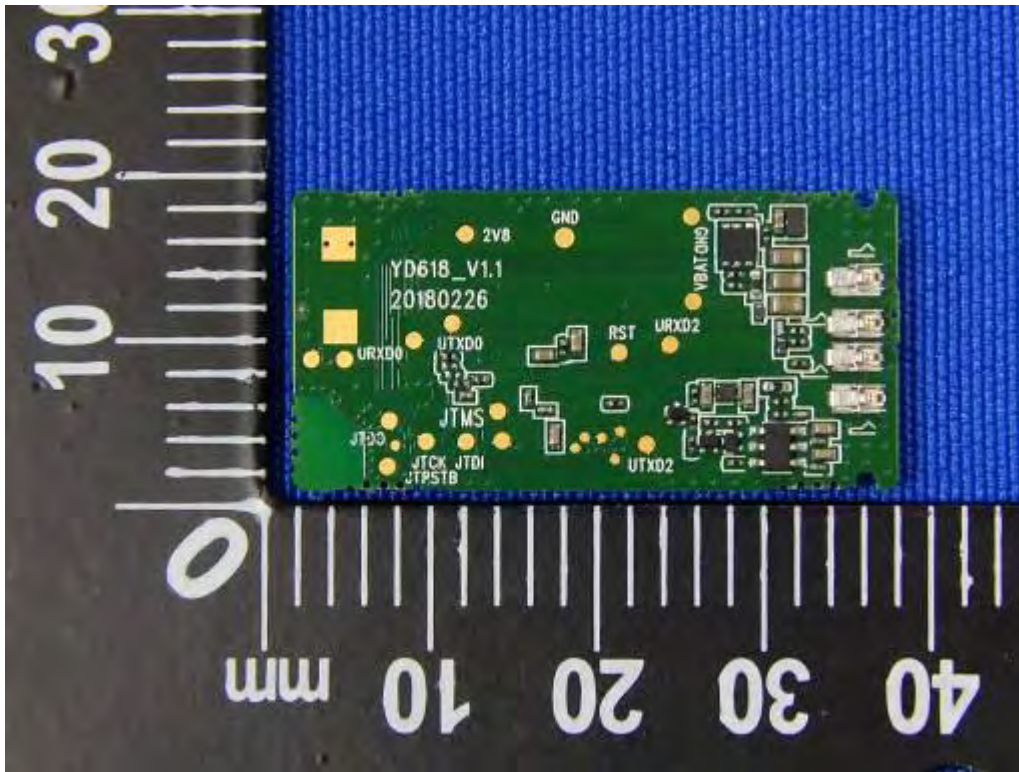

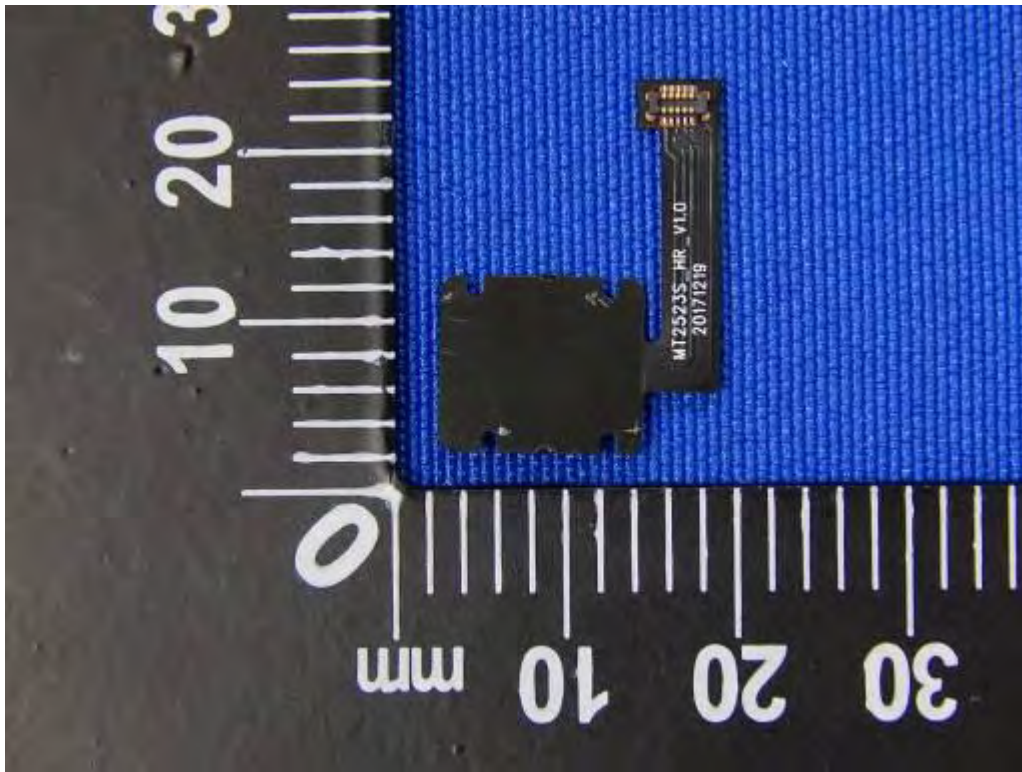

-----End-----