



Test Report No.: RF190730N011-3



TEST REPORT

Applicant	Zultys, Inc.
Address	785 Lucerne Drive, Sunnyvale, CA 94085, USA

Manufacturer or Supplier	Zultys, Inc.
Address	785 Lucerne Drive, Sunnyvale, CA 94085, USA
Product	Gigabit SIP IP Phone
Brand Name	ZULTYS
Model	ZIP 45GW
Additional Model & Model Difference	N/A
Date of tests	Jul. 30, 2019 ~ Aug. 15, 2019

The tests have been carried out according to the requirements of the following standard:

FCC Part 15, Subpart C, Section 15.247

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Tested by Andy Zhu
Project Engineer / EMC Department

Approved by Glyn He
Assistant Manager / EMC Department

Date: Sep. 16, 2019

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TABLE OF CONTENTS

RELEASE CONTROL RECORD4

1 SUMMARY OF TEST RESULTS5

2 MEASUREMENT UNCERTAINTY5

3 GENERAL INFORMATION.....6

3.1 GENERAL DESCRIPTION OF EUT.....6

3.2 DESCRIPTION OF TEST MODES.....6

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST9

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL9

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS 11

3.4 DESCRIPTION OF SUPPORT UNITS 11

4 TEST TYPES AND RESULTS12

4.1. CONDUCTED EMISSION MEASUREMENT12

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT12

4.1.2 TEST INSTRUMENTS12

4.1.3 TEST PROCEDURES.....13

4.1.4 DEVIATION FROM TEST STANDARD13

4.1.5 TEST SETUP.....14

4.1.6 EUT OPERATING CONDITIONS14

4.1.7 TEST RESULTS.....15

4.2. RADIATED EMISSION MEASUREMENT17

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT17

4.2.2 TEST INSTRUMENTS18

4.2.3 TEST PROCEDURES.....19

4.2.4 DEVIATION FROM TEST STANDARD20

4.2.5 TEST SETUP.....20

4.2.6 EUT OPERATING CONDITIONS21

4.2.7 TEST RESULTS.....22

4.3 6DB BANDWIDTH MEASUREMENT36

4.3.1 LIMITS OF 6DB BANDWIDTH MEASUREMENT36

4.3.2 TEST INSTRUMENTS36

4.3.3 TEST PROCEDURE36

4.3.4 DEVIATION FROM TEST STANDARD37

4.3.5 TEST SETUP.....37

4.3.6 EUT OPERATING CONDITIONS37

4.3.7 TEST RESULTS.....38



Test Report No.: RF190730N011-3

4.4	CONDUCTED OUTPUT POWER.....	40
4.4.1	LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT.....	40
4.4.2	TEST SETUP.....	40
4.4.3	TEST INSTRUMENTS	40
4.4.4	TEST PROCEDURES.....	41
4.4.5	DEVIATION FROM TEST STANDARD.....	41
4.4.6	EUT OPERATING CONDITIONS	41
4.4.7	TEST RESULTS.....	42
4.5	POWER SPECTRAL DENSITY MEASUREMENT	44
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	44
4.5.2	TEST SETUP.....	44
4.5.3	TEST INSTRUMENTS	44
4.5.4	TEST PROCEDURE	44
4.5.5	DEVIATION FROM TEST STANDARD.....	44
4.5.6	EUT OPERATING CONDITION.....	45
4.5.7	TEST RESULTS.....	45
4.6	OUT OF BAND EMISSION MEASUREMENT	47
4.6.1	LIMITS OF OUT OF BAND EMISSION MEASUREMENT.....	47
4.6.2	TEST SETUP.....	47
4.6.3	TEST INSTRUMENTS	47
4.6.4	TEST PROCEDURE	47
4.6.5	DEVIATION FROM TEST STANDARD.....	48
4.6.6	EUT OPERATING CONDITION.....	48
4.6.7	TEST RESULTS.....	49
5	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	55
6	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	56



Test Report No.: RF190730N011-3

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF190730N011-3	Original release	Sep. 16, 2019

1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit.
15.247(d) 15.209	Radiated Emissions	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted Output power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is i-pex not a standard connector.

2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.70dB
Radiated emissions	9KHz ~ 30MHz	2.90dB
	30MHz ~ 1GMHz	3.76dB
	1GHz ~ 18GHz	4.84dB
	18GHz ~ 40GHz	4.96dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Gigabit SIP IP Phone
MODEL NO.	ZIP 45GW
ADDITIONAL NO.	N/A
FCC ID	2APWA-ZIP45GW
NOMINAL VOLTAGE	DC 5V from Adapter or DC 48V From POE
MODULATION TECHNOLOGY	DSSS, OFDM
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
OPERATING FREQUENCY	2412-2462MHz for 11b/g/n(HT20) 2422-2452MHz for 11n(HT40)
PEAK OUTPUT POWER	21.48dBm(Maximum)
ANTENNA TYPE	FPC Antenna, with 3.31dBi gain
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	RJ45 Line: Shielded detachable 200cm Handset Line: unshielded detachable 330cm

NOTE:

1. The EUT provides completed transmitters and receivers:

MODULATION MODE	FUNCTION
802.11b	1TX/1RX
802.11g	1TX/1RX
802.11n (HT20)	1TX/1RX
802.11n (HT40)	1TX/1RX

2. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
3. Please refer to the EUT photo document (Reference No.: 190730N011) for detailed product photo.
4. EUT can be powered by POE or Adapter, and the worst case was tested under DC 5V From Adapter.
5. The EUT uses following adapter.

Adapter1 :	
Brand	JQH
Model	NSA6EU-05012000
Input Power	AC 100-240V, 50/60Hz 0.5A
Output Power	DC 5V, 1.2A
DC Line	Unshielded, Non-detachable, 1.80m
Adapter2 :	
Brand	OH



**BUREAU
VERITAS**

Test Report No.: RF190730N011-3

Model	OH-1006B0501200U2-UL
Input Power	AC 100-240V, 50/60Hz 0.5A
Output Power	DC 5V, 1.2A
DC Line	Unshielded, Non-detachable, 1.80m

3.2 DESCRIPTION OF TEST MODES

11 channels are provided for 802.11b, 802.11g and 802.11n(HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

7 channels are provided for 802.11n (HT40):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

Please see section 5 photographs of the test configuration for reference.

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports.

The worst case was found when positioned on X axis for radiated emission. Following test modes were selected for the final test, and the final worst case is marked in boldface and recorded in the report:

EUT CONFIGURE MODE	APPLICABLE TO				MODE
	RE<1G	RE≥1G	PLC	APCM	
A	√	√	√	√	Powered By AC 120V with BT link

Where **RE<1G**: Radiated Emission below 1GHz **RE≥1G**: Radiated Emission above 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
A	0 to 78	Hopping	FHSS	GFSK	DH5

RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1	DSSS	DBPSK	1.0

For the test results, only the worst case was shown in test report.

RADIATED EMISSION TEST (ABOVE 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
A	802.11n HT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5
A	802.11n HT40	3 to 9	3, 9	OFDM	BPSK	13.5

ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
A	802.11n HT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5
A	802.11n HT40	3 to 9	3, 6, 9	OFDM	BPSK	13.5

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE	TESTED BY
RE<1G	25deg. C, 53%RH	AC 120V 60Hz	Daniel
RE≥1G	25deg. C, 53%RH	AC 120V 60Hz	Daniel
PLC	20deg. C, 56%RH	AC 120V 60Hz	Eric Fang
APCM	25deg. C, 60%RH	AC 120V 60Hz	Eric Fang



3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

- FCC Part 15, Subpart C, Section 15.247**
- KDB 558074 D01 15.247 Meas Guidance v05r02**
- ANSI C63.10-2013**

All test items have been performed and recorded as per the above standards.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	POE Power	Yealink	YLPOE30	N/A	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	AC Mains: Unshielded, detachable 1.8m

4 TEST TYPES AND RESULTS

4.1. CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTES:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	101494	Mar. 12,19	Mar. 11,20
Artificial Mains Network	Rohde&Schwarz	ENV216	101173	Mar. 12,19	Mar. 11,20
Artificial Mains Network	Rohde&Schwarz	ESH3-Z5	100317	Mar. 13,19	Mar. 12,20
Voltage probe	SCHWARZBECK	TK 9421	TK 9421-176	Jan. 17,19	Jan. 16,20
Test software	ADT	ADT_Cond_V7.3.7	N/A	N/A	N/A

- NOTES:**
1. The test was performed in shielded room 553.
 2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

4.1.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

4.1.5 TEST SETUP

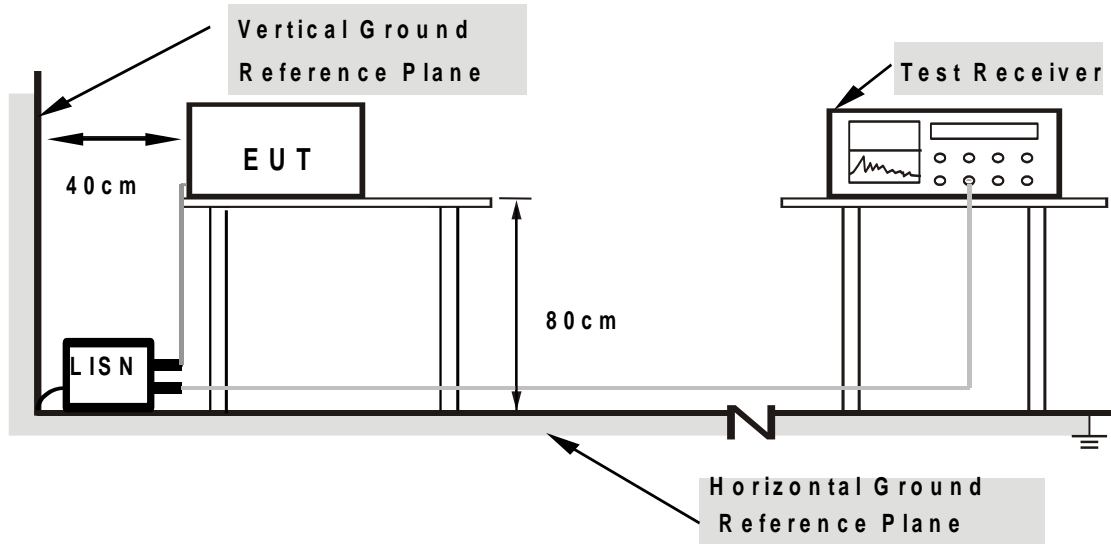

- Note: 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- Turned on the power and connected of all equipment.
- EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.


4.1.7 TEST RESULTS

CONDUCTED WORST-CASE DATA: WIFI

PHASE	Line	6dB BANDWIDTH	9kHz
--------------	------	----------------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15225	9.90	34.52	17.74	44.42	27.64	65.88	55.88	-21.45	-28.23
2	0.19725	10.23	31.42	18.77	41.65	29.00	63.73	53.73	-22.08	-24.73
3	0.45825	10.29	21.77	11.83	32.06	22.12	56.72	46.72	-24.66	-24.60
4	0.50085	10.39	25.20	18.56	35.59	28.95	56.00	46.00	-20.41	-17.05
5	0.60450	10.38	17.59	10.69	27.97	21.07	56.00	46.00	-28.03	-24.93
6	0.77841	10.34	15.46	10.08	25.80	20.42	56.00	46.00	-30.20	-25.58


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

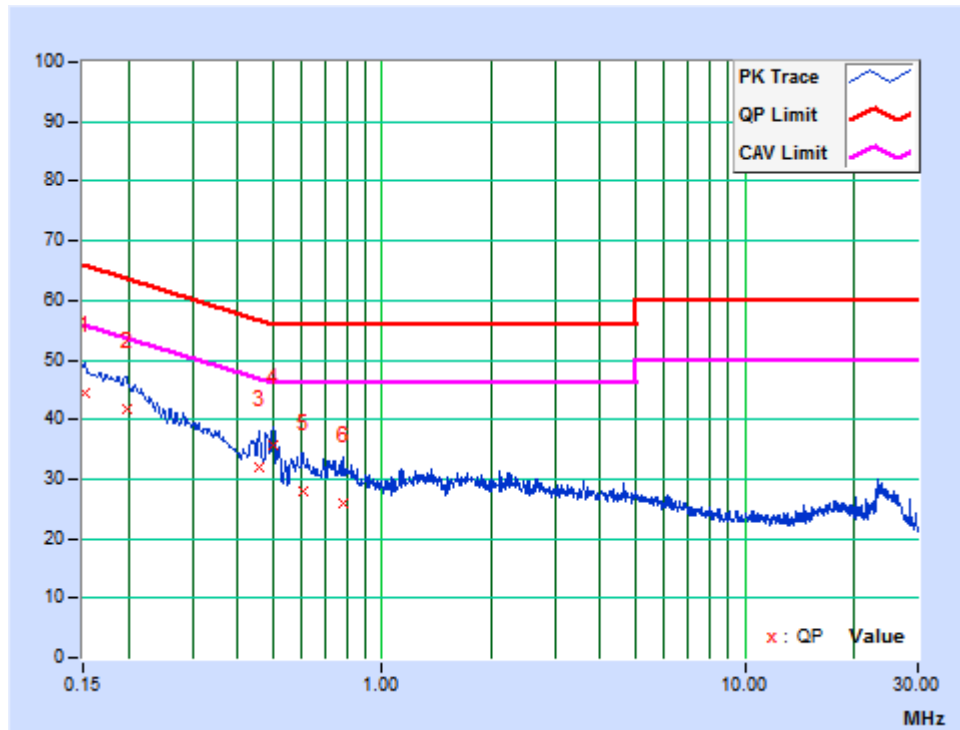

PHASE	Neutral	6dB BANDWIDTH	9kHz
--------------	---------	----------------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17146	10.32	33.79	16.93	44.11	27.25	64.89	54.89	-20.78	-27.64
2	0.43575	10.14	20.49	9.02	30.63	19.16	57.14	47.14	-26.51	-27.98
3	0.49953	9.66	26.91	19.55	36.57	29.21	56.01	46.01	-19.43	-16.79
4	0.72600	10.01	15.04	5.65	25.05	15.66	56.00	46.00	-30.95	-30.34
5	1.28175	9.73	13.86	6.78	23.59	16.51	56.00	46.00	-32.41	-29.49
6	2.02650	10.27	10.47	0.93	20.74	11.20	56.00	46.00	-35.26	-34.80

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

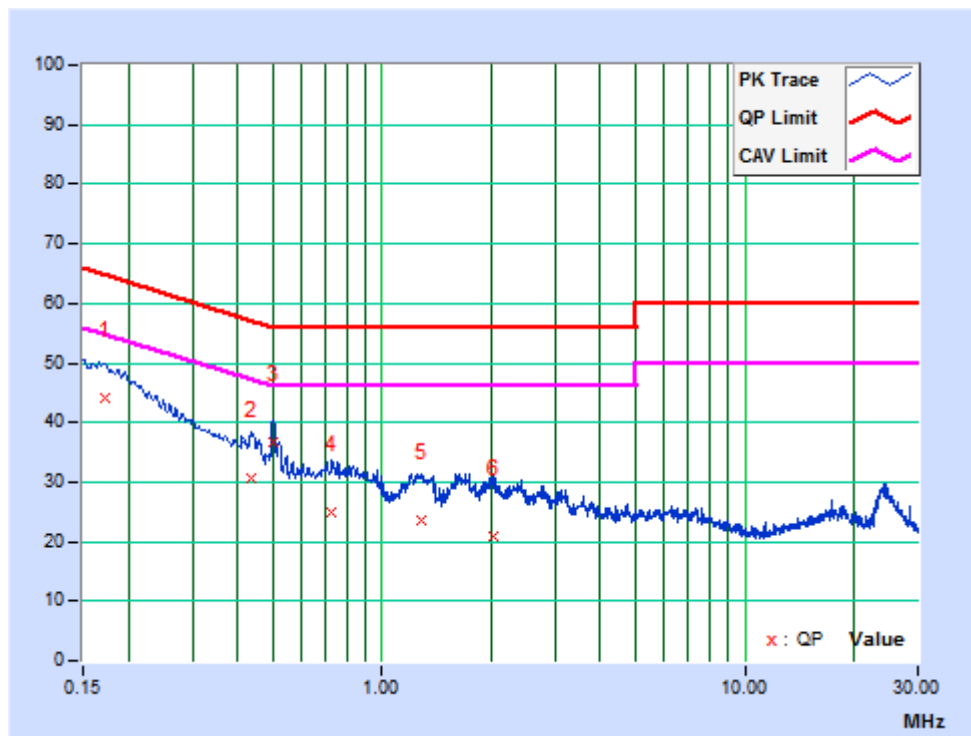

4.2. RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTES:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESU40	100449	Mar. 12,19	Mar. 11,20
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV7	102331	Aug. 02,19	Aug. 01,20
Active Loop Antenna (9KHz -30MHz)	SCHWARZBECK	FMZB 1519B	1519B-045	May 04,19	May 03,20
Amplifier (9KHz -1GHz)	Burgeon	BPA-530	100210	Apr. 17,19	Apr. 18,20
Bilog Antenna (20MHz -2GHz)	Teseq	CBL 6111D	30643	Aug. 11, 19	Aug. 10, 20
Horn Antenna (1GHz -18GHz)	ETS -Lindgren	3117	00062558	Jul. 21, 19	Jul. 20, 20
Horn Antenna (18GHz -40GHz)	SCHWARZBECK	BBHA 9170	BBHA9170242	May 05,19	May 04,20
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	NSEMC003	Feb. 10,19	Feb. 09,20
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A
Broadband Preamplifier (1GHz~18GHz)	SCHWARZBECK	BBV9718	305	Apr. 17,19	Apr. 18,20
Pre-Amplifier (18GHz-40GHz)	EMCI	EMC 184045	980102	Nov. 09,18	Nov. 08,19
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A

NOTES:

1. The test was performed in 966 Chamber.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 749762.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 1.5 meters (above 1GHz) and 0.8 meters (below 1GHz) above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. For below 1GHz was used bilog antenna, and above 1GHz was used horn antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.
- g. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

NOTES:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The testing of the EUT was performed on all 3 orthogonal axes, the worst-case test configuration was reported on the file test setup photo.

4.2.4 DEVIATION FROM TEST STANDARD


No deviation.

4.2.5 TEST SETUP

Below 30MHz test setup

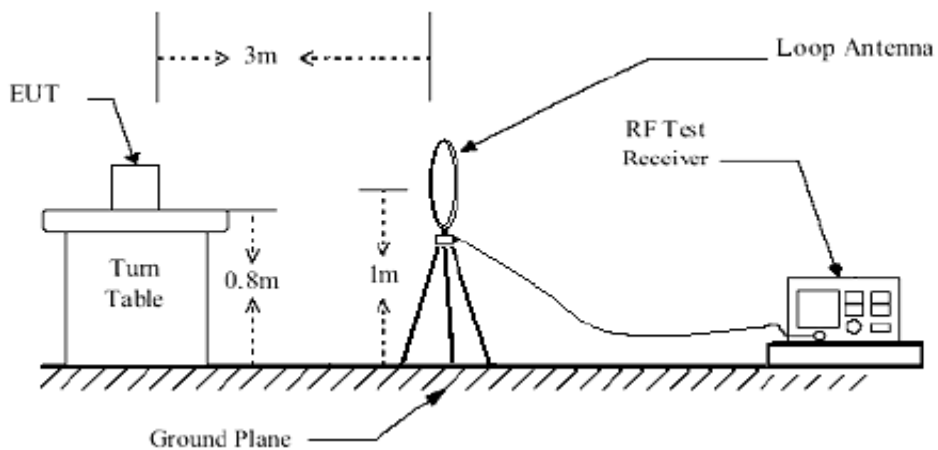


Below 1GHz test setup

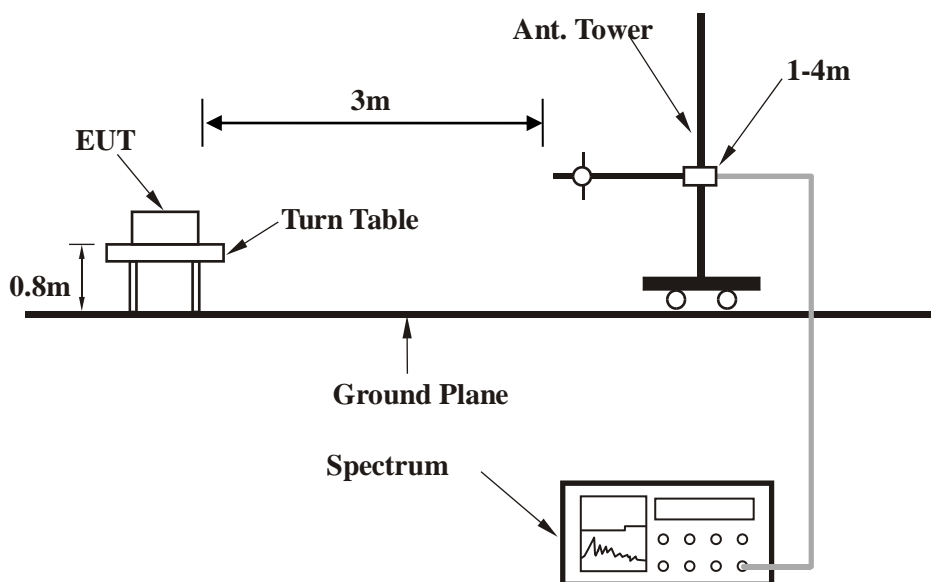

Note: For the actual test configuration, please refer to the attached file (Test Setup Photo).

Above 1GHz test setup

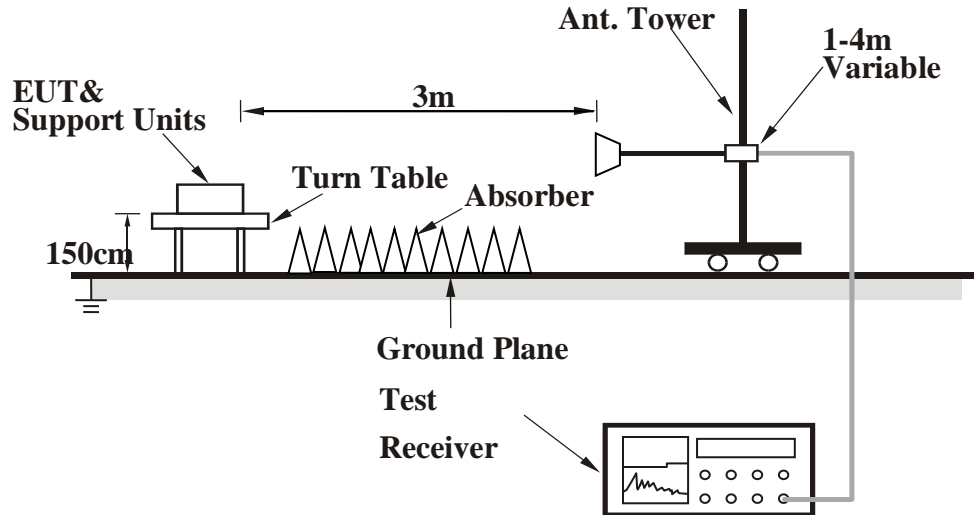

Note: For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

- a. Placed the EUT on a testing table.
- b. Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- c. The necessary accessories enable the EUT in full functions.

4.2.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA:


802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9KHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.00	30.80 QP	40.00	-9.20	1.00 H	152	40.93	-10.13
2	190.11	25.77 QP	43.50	-17.73	1.00 H	303	43.65	-17.88
3	230.53	25.34 QP	46.00	-20.66	1.00 H	179	41.98	-16.64
4	249.18	28.33 QP	46.00	-17.67	1.00 H	204	43.72	-15.39
5	269.39	36.56 QP	46.00	-9.44	1.00 H	82	50.76	-14.20
6	294.26	42.10 QP	46.00	-3.90	1.00 H	77	55.14	-13.04

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.

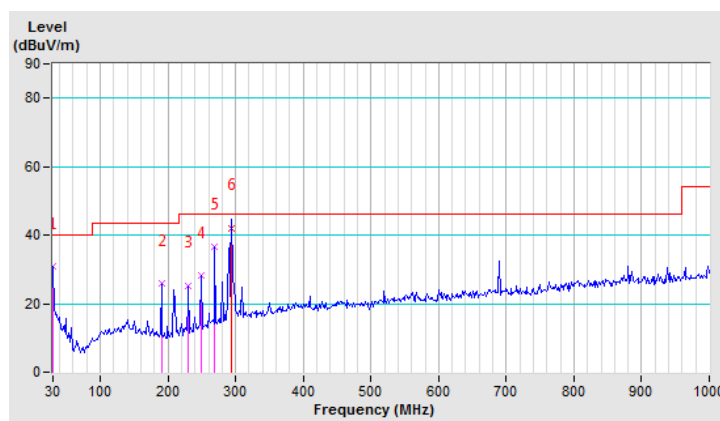


CHANNEL	TX Channel 1	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9KHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	48.65	32.52 QP	40.00	-7.48	1.00 V	61	52.69	-20.17
2	104.62	24.05 QP	43.50	-19.45	1.00 V	46	41.71	-17.66
3	169.90	30.07 QP	43.50	-13.43	1.00 V	34	47.15	-17.08
4	190.11	31.08 QP	43.50	-12.42	1.00 V	23	48.96	-17.88
5	269.39	32.57 QP	46.00	-13.43	1.00 V	12	46.77	-14.20
6	294.26	32.57 QP	46.00	-13.43	1.00 V	2	45.61	-13.04

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.

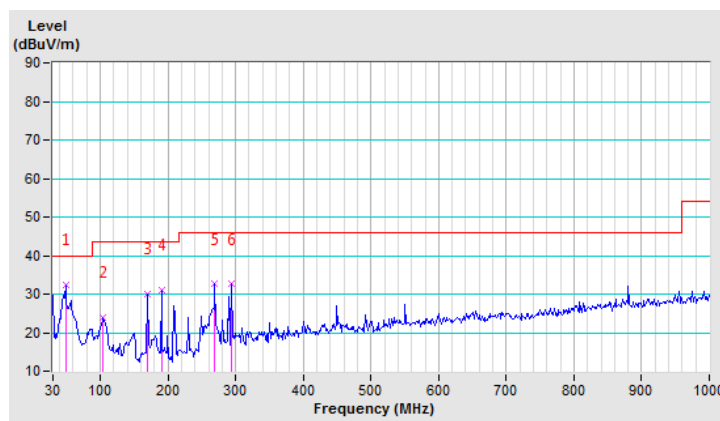

ABOVE 1GHZ DATA
802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	52.38 PK	74.00	-21.62	1.28 H	86	50.33	2.05
2	2390.00	39.85 AV	54.00	-14.15	1.28 H	86	37.80	2.05
3	*2412.00	105.89 PK			1.28 H	86	103.68	2.21
4	*2412.00	100.65 AV			1.28 H	86	98.44	2.21
5	4824.00	48.81 PK	74.00	-25.19	1.00 H	360	43.95	4.86
6	4824.00	37.38 AV	54.00	-16.62	1.00 H	360	32.52	4.86
7	#7236.00	58.24 PK	74.00	-15.76	1.00 H	360	49.58	8.66
8	#7236.00	41.38 AV	54.00	-12.62	1.00 H	360	32.72	8.66
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	56.15 PK	74.00	-17.85	1.53 V	350	54.10	2.05
2	2390.00	42.69 AV	54.00	-11.31	1.53 V	350	40.64	2.05
3	*2412.00	110.14 PK			1.53 V	350	107.93	2.21
4	*2412.00	105.20 AV			1.53 V	350	102.99	2.21
5	4824.00	47.65 PK	74.00	-26.35	1.00 V	0	42.79	4.86
6	4824.00	33.27 AV	54.00	-20.73	1.00 V	0	28.41	4.86
7	#7236.00	51.37 PK	74.00	-22.63	1.00 V	360	42.71	8.66
8	#7236.00	37.18 AV	54.00	-16.82	1.00 V	360	28.52	8.66

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	106.21 PK			1.00 H	112	103.83	2.38
2	*2437.00	101.20 AV			1.00 H	112	98.82	2.38
3	4874.00	45.72 PK	74.00	-28.28	1.00 H	360	40.75	4.97
4	4874.00	32.16 AV	54.00	-21.84	1.00 H	360	27.19	4.97
5	7311.00	49.13 PK	74.00	-24.87	1.00 H	0	40.37	8.76
6	7311.00	37.18 AV	54.00	-16.82	1.00 H	0	28.42	8.76
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	108.25 PK			1.68 V	360	105.87	2.38
2	*2437.00	103.40 AV			1.68 V	360	101.02	2.38
3	4874.00	46.14 PK	74.00	-27.86	1.00 V	0	41.17	4.97
4	4874.00	33.89 AV	54.00	-20.11	1.00 V	0	28.92	4.97
5	7311.00	49.49 PK	74.00	-24.51	1.00 V	360	40.73	8.76
6	7311.00	36.65 AV	54.00	-17.35	1.00 V	360	27.89	8.76

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	104.15 PK			1.22 H	88	101.60	2.55
2	*2462.00	99.28 AV			1.22 H	88	96.73	2.55
3	2483.50	50.79 PK	74.00	-23.21	1.22 H	88	48.09	2.70
4	2483.50	37.39 AV	54.00	-16.61	1.22 H	88	34.69	2.70
5	4924.00	46.26 PK	74.00	-27.74	1.00 H	0	41.18	5.08
6	4924.00	34.05 AV	54.00	-19.95	1.00 H	0	28.97	5.08
7	7386.00	49.44 PK	74.00	-24.56	1.00 H	360	40.60	8.84
8	7386.00	36.81 AV	54.00	-17.19	1.00 H	360	27.97	8.84
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	104.71 PK			1.66 V	350	102.16	2.55
2	*2462.00	99.85 AV			1.66 V	350	97.30	2.55
3	2483.50	48.20 PK	74.00	-25.80	1.66 V	350	45.50	2.70
4	2483.50	35.68 AV	54.00	-18.32	1.66 V	350	32.98	2.70
5	4924.00	45.86 PK	74.00	-28.14	1.00 V	0	40.78	5.08
6	4924.00	33.77 AV	54.00	-20.23	1.00 V	0	28.69	5.08
7	7386.00	48.30 PK	74.00	-25.70	1.00 V	360	39.47	8.83
8	7386.00	36.75 AV	54.00	-17.25	1.00 V	360	27.92	8.83

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. "* ": Fundamental frequency.

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	62.34 PK	74.00	-11.66	1.00 H	167	60.29	2.05
2	2390.00	45.15 AV	54.00	-8.85	1.00 H	167	43.10	2.05
3	*2412.00	105.31 PK			1.00 H	167	103.10	2.21
4	*2412.00	94.10 AV			1.00 H	167	91.89	2.21
5	4824.00	47.34 PK	74.00	-26.66	1.00 H	0	42.48	4.86
6	4824.00	33.26 AV	54.00	-20.74	1.00 H	0	28.40	4.86
7	#7236.00	52.81 PK	74.00	-21.19	1.00 H	360	44.15	8.66
8	#7236.00	38.54 AV	54.00	-15.46	1.00 H	360	29.88	8.66
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.23 PK	74.00	-7.77	1.05 V	346	64.18	2.05
2	2390.00	48.81 AV	54.00	-5.19	1.05 V	346	46.76	2.05
3	*2412.00	109.25 PK			1.05 V	346	107.04	2.21
4	*2412.00	95.71 AV			1.05 V	346	93.50	2.21
5	4824.00	48.34 PK	74.00	-25.66	1.00 V	0	43.48	4.86
6	4824.00	32.48 AV	54.00	-21.52	1.00 V	0	27.62	4.86
7	#7236.00	52.14 PK	74.00	-21.86	1.00 V	360	43.48	8.66
8	#7236.00	38.64 AV	54.00	-15.36	1.00 V	360	29.98	8.66

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	107.92 PK			1.08 H	112	105.54	2.38
2	*2437.00	94.27 AV			1.08 H	112	91.89	2.38
3	4874.00	49.35 PK	74.00	-24.65	1.00 H	0	44.38	4.97
4	4874.00	33.26 AV	54.00	-20.74	1.00 H	0	28.29	4.97
5	7311.00	54.15 PK	74.00	-19.85	1.00 H	360	45.39	8.76
6	7311.00	36.24 AV	54.00	-17.76	1.00 H	360	27.48	8.76
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	108.65 PK			1.04 V	360	106.27	2.38
2	*2437.00	95.11 AV			1.04 V	360	92.73	2.38
3	4874.00	47.56 PK	74.00	-26.44	1.00 V	0	42.59	4.97
4	4874.00	34.24 AV	54.00	-19.76	1.00 V	0	29.27	4.97
5	7311.00	51.45 PK	74.00	-22.55	1.00 V	360	42.69	8.76
6	7311.00	37.21 AV	54.00	-16.79	1.00 V	360	28.45	8.76

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	105.95 PK			1.23 H	115	103.40	2.55
2	*2462.00	92.63 AV			1.23 H	115	90.08	2.55
3	2483.50	59.43 PK	74.00	-14.57	1.23 H	115	56.73	2.70
4	2483.50	42.25 AV	54.00	-11.75	1.23 H	115	39.55	2.70
5	4924.00	48.67 PK	74.00	-25.33	1.00 H	360	43.59	5.08
6	4924.00	33.92 AV	54.00	-20.08	1.00 H	360	28.84	5.08
7	7386.00	52.15 PK	74.00	-21.85	1.00 H	0	43.31	8.84
8	7386.00	38.64 AV	54.00	-15.36	1.00 H	0	29.80	8.84
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	104.02 PK			1.00 V	113	101.47	2.55
2	*2462.00	90.65 AV			1.00 V	113	88.10	2.55
3	2483.50	56.04 PK	74.00	-17.96	1.00 V	113	53.34	2.70
4	2483.50	39.75 AV	54.00	-14.25	1.00 V	113	37.05	2.70
5	4924.00	45.34 PK	74.00	-28.66	1.00 V	0	40.26	5.08
6	4924.00	33.28 AV	54.00	-20.72	1.00 V	0	28.20	5.08
7	7386.00	50.36 PK	74.00	-23.64	1.00 V	360	41.52	8.84
8	7386.00	36.48 AV	54.00	-17.52	1.00 V	360	27.64	8.84

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

802.11n HT20

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.35 PK	74.00	-16.65	1.26 H	97	55.30	2.05
2	2390.00	42.15 AV	54.00	-11.85	1.26 H	97	40.10	2.05
3	*2412.00	104.88 PK			1.26 H	97	102.67	2.21
4	*2412.00	90.92 AV			1.26 H	97	88.71	2.21
5	4824.00	47.54 PK	74.00	-26.46	1.00 H	0	42.68	4.86
6	4824.00	33.20 AV	54.00	-20.80	1.00 H	0	28.34	4.86
7	#7236.00	50.44 PK	74.00	-23.56	1.00 H	360	41.78	8.66
8	#7236.00	37.51 AV	54.00	-16.49	1.00 H	360	28.85	8.66
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	64.96 PK	74.00	-9.04	1.54 V	346	62.91	2.05
2	2390.00	48.97 AV	54.00	-5.03	1.54 V	346	46.92	2.05
3	*2412.00	107.25 PK			1.54 V	346	105.04	2.21
4	*2412.00	94.24 AV			1.54 V	346	92.03	2.21
5	4824.00	48.54 PK	74.00	-25.46	1.00 V	0	43.68	4.86
6	4824.00	33.69 AV	54.00	-20.31	1.00 V	0	28.83	4.86
7	#7236.00	51.24 PK	74.00	-22.76	1.00 V	360	42.58	8.66
8	#7236.00	37.47 AV	54.00	-16.53	1.00 V	360	28.81	8.66

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	104.23 PK			1.00 H	245	101.85	2.38
2	*2437.00	90.35 AV			1.00 H	245	87.97	2.38
3	4874.00	47.64 PK	74.00	-26.36	1.00 H	360	42.67	4.97
4	4874.00	32.46 AV	54.00	-21.54	1.00 H	360	27.49	4.97
5	7311.00	51.32 PK	74.00	-22.68	1.00 H	0	42.56	8.76
6	7311.00	37.65 AV	54.00	-16.35	1.00 H	0	28.89	8.76
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	108.43 PK			1.69 V	360	106.05	2.38
2	*2437.00	94.91 AV			1.69 V	360	92.53	2.38
3	4874.00	48.34 PK	74.00	-25.66	1.00 V	0	43.37	4.97
4	4874.00	33.21 AV	54.00	-20.79	1.00 V	0	28.24	4.97
5	7311.00	50.16 PK	74.00	-23.84	1.00 V	360	41.40	8.76
6	7311.00	37.13 AV	54.00	-16.87	1.00 V	360	28.37	8.76

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	100.23 PK			1.43 H	274	97.68	2.55
2	*2462.00	88.64 AV			1.43 H	274	86.09	2.55
3	2483.50	54.23 PK	74.00	-19.77	1.43 H	274	51.53	2.70
4	2483.50	38.65 AV	54.00	-15.35	1.43 H	274	35.95	2.70
5	4924.00	48.65 PK	74.00	-25.35	1.00 H	360	43.57	5.08
6	4924.00	33.48 AV	54.00	-20.52	1.00 H	360	28.40	5.08
7	7386.00	50.31 PK	74.00	-23.69	1.00 H	0	41.47	8.84
8	7386.00	38.65 AV	54.00	-15.35	1.00 H	0	29.81	8.84
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	103.96 PK			1.00 V	113	101.41	2.55
2	*2462.00	90.11 AV			1.00 V	113	87.56	2.55
3	2483.50	56.81 PK	74.00	-17.19	1.00 V	113	54.11	2.70
4	2483.50	40.62 AV	54.00	-13.38	1.00 V	113	37.92	2.70
5	4924.00	47.23 PK	74.00	-26.77	1.00 V	0	42.15	5.08
6	4924.00	34.09 AV	54.00	-19.91	1.00 V	0	29.01	5.08
7	7386.00	49.65 PK	74.00	-24.35	1.00 V	360	40.81	8.84
8	7386.00	36.79 AV	54.00	-17.21	1.00 V	360	27.95	8.84

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. "*" : Fundamental frequency.

802.11n HT40

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.35 PK	74.00	-7.65	1.00 H	263	64.30	2.05
2	2390.00	47.35 AV	54.00	-6.65	1.00 H	263	45.30	2.05
3	*2422.00	100.48 PK			1.00 H	263	98.20	2.28
4	*2422.00	86.65 AV			1.00 H	263	84.37	2.28
5	4844.00	46.35 PK	74.00	-27.65	1.00 H	360	41.44	4.91
6	4844.00	34.28 AV	54.00	-19.72	1.00 H	360	29.37	4.91
7	7266.00	51.23 PK	74.00	-22.77	1.00 H	0	42.52	8.71
8	7266.00	37.34 AV	54.00	-16.66	1.00 H	0	28.63	8.71
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.97 PK	74.00	-4.03	1.06 V	346	67.92	2.05
2	2390.00	50.78 AV	54.00	-3.22	1.06 V	346	48.73	2.05
3	*2422.00	103.83 PK			1.06 V	246	101.55	2.28
4	*2422.00	87.34 AV			1.06 V	246	85.06	2.28
5	4844.00	44.83 PK	74.00	-29.17	1.00 V	0	39.92	4.91
6	4844.00	34.95 AV	54.00	-19.05	1.00 V	0	30.04	4.91
7	7266.00	50.51 PK	74.00	-23.49	1.00 V	360	41.80	8.71
8	7266.00	37.80 AV	54.00	-16.20	1.00 V	360	29.09	8.71

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	102.35 PK			1.00 H	214	99.97	2.38
2	*2437.00	88.47 AV			1.00 H	214	86.09	2.38
3	4874.00	46.35 PK	74.00	-27.65	1.00 H	0	41.38	4.97
4	4874.00	33.17 AV	54.00	-20.83	1.00 H	0	28.20	4.97
5	7311.00	50.17 PK	74.00	-23.83	1.00 H	360	41.41	8.76
6	7311.00	37.46 AV	54.00	-16.54	1.00 H	360	28.70	8.76
7	7311.00	50.47 PK	74.00	-23.53	1.00 H	360	41.71	8.76
8	7311.00	38.42 AV	54.00	-15.58	1.00 H	360	29.66	8.76
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	106.48 PK			1.07 V	0	104.10	2.38
2	*2437.00	90.15 AV			1.07 V	0	87.77	2.38
3	4874.00	44.50 PK	74.00	-29.50	1.00 V	360	39.53	4.97
4	4874.00	33.12 AV	54.00	-20.88	1.00 V	360	28.15	4.97
5	7311.00	51.92 PK	74.00	-22.08	1.00 V	0	43.16	8.76
6	7311.00	38.25 AV	54.00	-15.75	1.00 V	0	29.49	8.76
7	7311.00	50.27 PK	74.00	-23.73	1.00 V	0	41.51	8.76
8	7311.00	38.08 AV	54.00	-15.92	1.00 V	0	29.32	8.76

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	101.46 PK			1.27 H	175	98.98	2.48
2	*2452.00	86.47 AV			1.27 H	175	83.99	2.48
3	2483.50	57.45 PK	74.00	-16.55	1.27 H	175	54.75	2.70
4	2483.50	43.68 AV	54.00	-10.32	1.27 H	175	40.98	2.70
5	4904.00	48.35 PK	74.00	-25.65	1.00 H	360	43.31	5.04
6	4904.00	33.26 AV	54.00	-20.74	1.00 H	360	28.22	5.04
7	7356.00	51.43 PK	74.00	-22.57	1.00 H	0	42.63	8.80
8	7356.00	39.46 AV	54.00	-14.54	1.00 H	0	30.66	8.80
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	104.11 PK			1.70 V	360	101.63	2.48
2	*2452.00	87.97 AV			1.70 V	360	85.49	2.48
3	2483.50	60.76 PK	74.00	-13.24	1.70 V	360	58.06	2.70
4	2483.50	45.78 AV	54.00	-8.22	1.70 V	360	43.08	2.70
5	4904.00	46.07 PK	74.00	-27.93	1.00 V	0	41.03	5.04
6	4904.00	34.37 AV	54.00	-19.63	1.00 V	0	29.33	5.04
7	7356.00	50.25 PK	74.00	-23.75	1.00 V	360	41.45	8.80
8	7356.00	38.98 AV	54.00	-15.02	1.00 V	360	30.18	8.80

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Sensor	Keysight	U2021XA	MY55060016	Jun. 13,19	Jun. 12,20
Power Sensor	Keysight	U2021XA	MY55060018	Jun. 13,19	Jun. 12,20
Power Meter	Anritsu	ML2495A	1139001	Mar. 12,19	Mar. 11,20
Power Sensor	Anritsu	MA2411B	1531155	Mar. 12,19	Mar. 11,20
Digital Multimeter	FLUKE	15B	A1220010DG	Oct. 17, 18	Oct.16, 19
Humid & Temp Programmable Tester	Haida	HD-2257	110807201	Nov.15,18	Nov. 14,19
Oscilloscope	Agilent	DSO9254A	MY51260160	Nov. 09,18	Nov. 08,19
Signal Analyzer	Rohde & Schwarz	FSV7	102331	Aug. 02,19	Aug. 01,20
Signal Generator	Agilent	N5183A	MY50140980	Dec. 07,18	Dec. 06,19
Agile Signal Generator	Agilent	8645A	Agilent	Oct.27, 18	Oct.26, 19
Spectrum Analyzer	Keysight	N9020A	MY55400499	Mar. 12,19	Mar. 11,20
MXG-B RF Vector Signal Generator	Keysight	N5182B	MY56200288	Dec. 07, 18	Dec. 06, 19
Attenuator	MINI	BW-S10W2+	S130129FGE2	N/A	N/A
DC Source	Keysight	E3642A	MY56146098	N/A	N/A

NOTES: 1. The test was performed in RF Oven room.

2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.


4.3.3 TEST PROCEDURE

1. Set resolution bandwidth (RBW) = 100KHz
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
3. Trace mode = max hold.
4. Sweep = auto couple.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

4.3.5 TEST SETUP

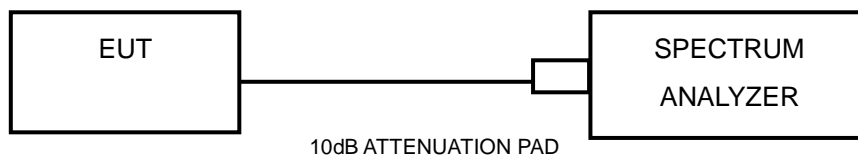

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 TEST RESULTS

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	8.10	0.5	PASS
6	2437	8.10	0.5	PASS
11	2462	8.10	0.5	PASS

802.11g


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	15.17	0.5	PASS
6	2437	15.18	0.5	PASS
11	2462	15.19	0.5	PASS

802.11n HT20

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	15.18	0.5	PASS
6	2437	15.19	0.5	PASS
11	2462	15.19	0.5	PASS

802.11n HT40

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
3	2422	35.22	0.5	PASS
6	2437	35.22	0.5	PASS
9	2452	35.21	0.5	PASS

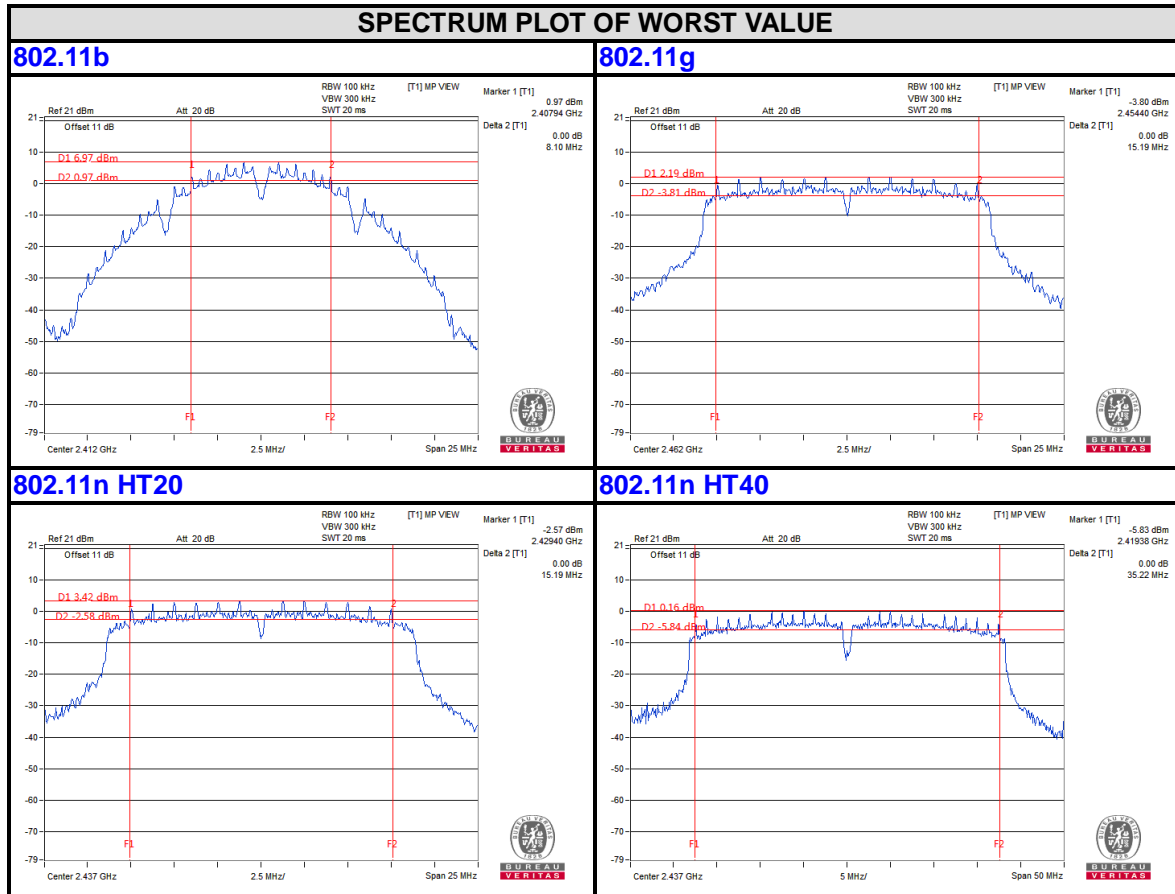


4.4 CONDUCTED OUTPUT POWER

4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm).

4.4.2 TEST SETUP

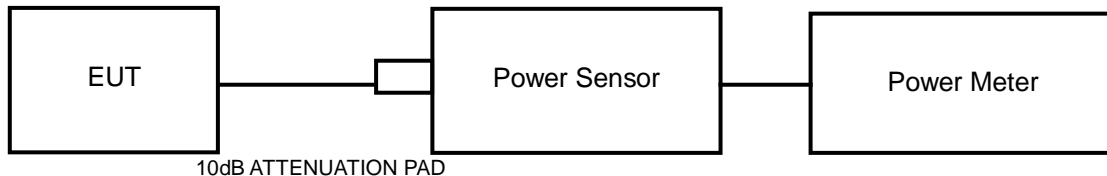

4.4.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Sensor	Keysight	U2021XA	MY55060016	Jun. 13,19	Jun. 12,20
Power Sensor	Keysight	U2021XA	MY55060018	Jun. 13,19	Jun. 12,20
Power Meter	Anritsu	ML2495A	1139001	Mar. 12,19	Mar. 11,20
Power Sensor	Anritsu	MA2411B	1531155	Mar. 12,19	Mar. 11,20
Digital Multimeter	FLUKE	15B	A1220010DG	Oct. 17, 18	Oct.16, 19
Humid & Temp Programmable Tester	Haida	HD-2257	110807201	Nov.15,18	Nov. 14,19
Oscilloscope	Agilent	DSO9254A	MY51260160	Nov. 09,18	Nov. 08,19
Signal Analyzer	Rohde & Schwarz	FSV7	102331	Aug. 02,19	Aug. 01,20
Signal Generator	Agilent	N5183A	MY50140980	Dec. 07,18	Dec. 06,19
Agile Signal Generator	Agilent	8645A	Agilent	Oct.27, 18	Oct.26, 19
Spectrum Analyzer	Keysight	N9020A	MY55400499	Mar. 12,19	Mar. 11,20
MXG-B RF Vector Signal Generator	Keysight	N5182B	MY56200288	Dec. 07, 18	Dec. 06, 19
Attenuator	MINI	BW-S10W2+	S130129FGE2	N/A	N/A
DC Source	Keysight	E3642A	MY56146098	N/A	N/A

NOTES:

1. The test was performed in RF Oven room.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.



4.4.4 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A peak power meter was used to read the response of the peak power sensor. Record the peak power level.

4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

4.4.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.4.7 TEST RESULTS

MAXIMUM PEAK OUTPUT POWER

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (W)	PASS/FAIL
1	2412	17.72	59.156	1	PASS
6	2437	17.38	54.702	1	PASS
11	2462	16.02	39.994	1	PASS

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (W)	PASS/FAIL
1	2412	19.81	95.719	1	PASS
6	2437	21.48	140.605	1	PASS
11	2462	20.23	105.439	1	PASS

802.11n HT20

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (W)	PASS/FAIL
1	2412	18.74	74.817	1	PASS
6	2437	21.29	134.586	1	PASS
11	2462	20.08	101.859	1	PASS

02.11n HT40

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (W)	PASS/FAIL
3	2422	16.65	46.238	1	PASS
6	2437	21.34	136.144	1	PASS
9	2452	20.52	112.720	1	PASS

AVERAGE OUTPUT POWER (FOR REFERENCE)

The average power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	AVG. POWER (mW)
1	2412	15.06	32.063
6	2437	14.65	29.174
11	2462	13.39	21.827

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	AVG. POWER (mW)
1	2412	12.26	16.827
6	2437	13.97	24.946
11	2462	12.67	18.493

802.11n HT20

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	AVG. POWER (mW)
1	2412	11.18	13.122
6	2437	13.60	22.909
11	2462	12.46	17.620

802.11n HT40


CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	AVG. POWER (mW)
3	2422	8.89	7.745
6	2437	13.46	22.182
9	2452	12.74	18.793

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm/3KHz.

4.5.2 TEST SETUP



4.5.3 TEST INSTRUMENTS

Refer to section 4.3.2 to get information of above instrument.

4.5.4 TEST PROCEDURE

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to 1.5 times the DTS bandwidth.
- c) Set RBW to: 3KHz
- d) Set VBW $\geq 3 \times$ RBW.
- e) Detector = peak
- f) Ensure that the number of measurement points in the sweep $\geq 2 \times$ span/RBW.
- g) Sweep time = auto couple.
- h) Use the peak marker function to determine the maximum amplitude level.

4.5.5 DEVIATION FROM TEST STANDARD

No deviation.

4.5.6 EUT OPERATING CONDITION

Same as item 4.3.6.

4.5.7 TEST RESULTS

802.11b

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-8.85	8.00	PASS
6	2437	-8.59	8.00	PASS
11	2462	-10.46	8.00	PASS

802.11g


Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-13.40	8.00	PASS
6	2437	-12.25	8.00	PASS
11	2462	-14.59	8.00	PASS

802.11n HT20

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-14.68	8.00	PASS
6	2437	-13.16	8.00	PASS
11	2462	-14.13	8.00	PASS

802.11n HT40

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
3	2422	-19.42	8.00	PASS
6	2437	-15.12	8.00	PASS
9	2452	-15.87	8.00	PASS

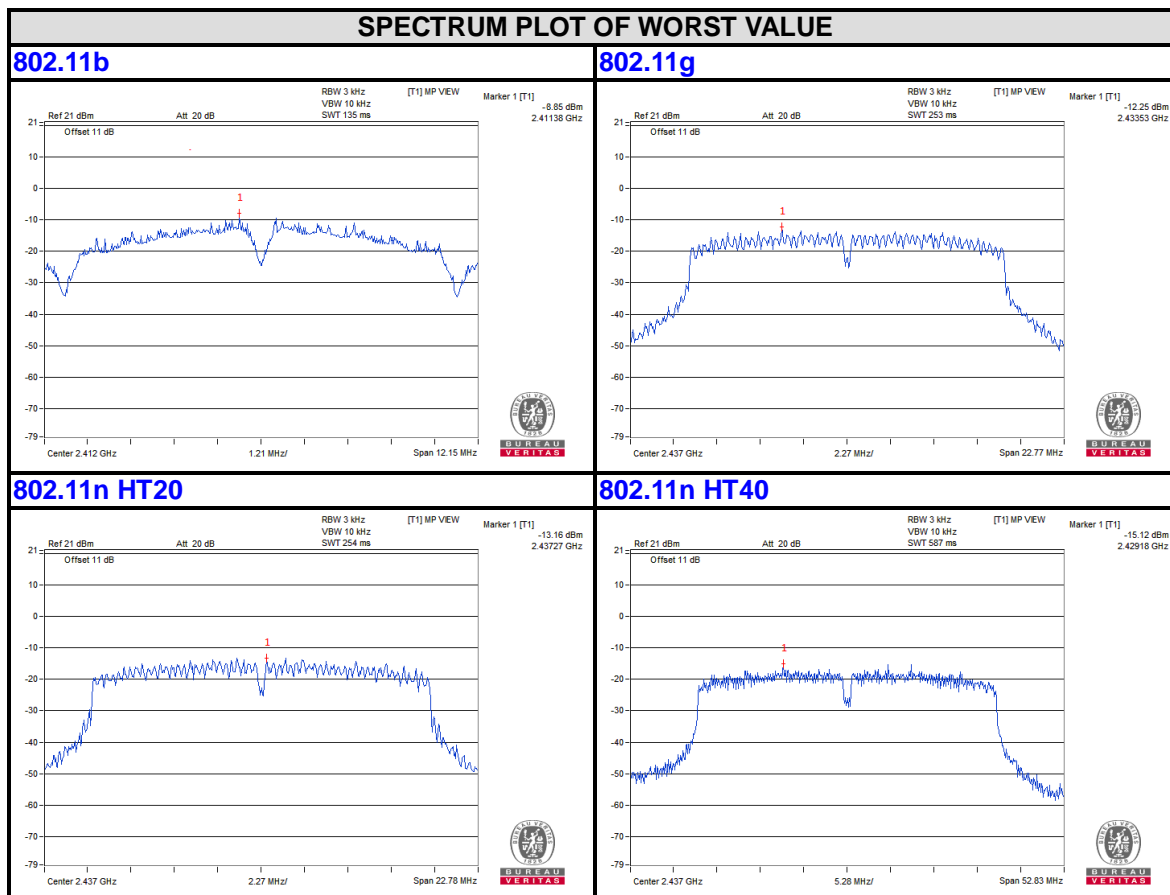


4.6 OUT OF BAND EMISSION MEASUREMENT

4.6.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST SETUP

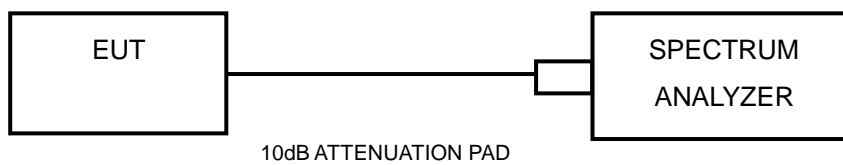

4.6.3 TEST INSTRUMENTS

Refer to section 4.3.2 to get information of above instrument.

4.6.4 TEST PROCEDURE

Measurement Procedure - Reference Level

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

Measurement Procedure –Unwanted Emission Level

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

4.6.5 DEVIATION FROM TEST STANDARD


No deviation.

4.6.6 EUT OPERATING CONDITION


Same as item 4.3.6

4.6.7 TEST RESULTS

802.11b


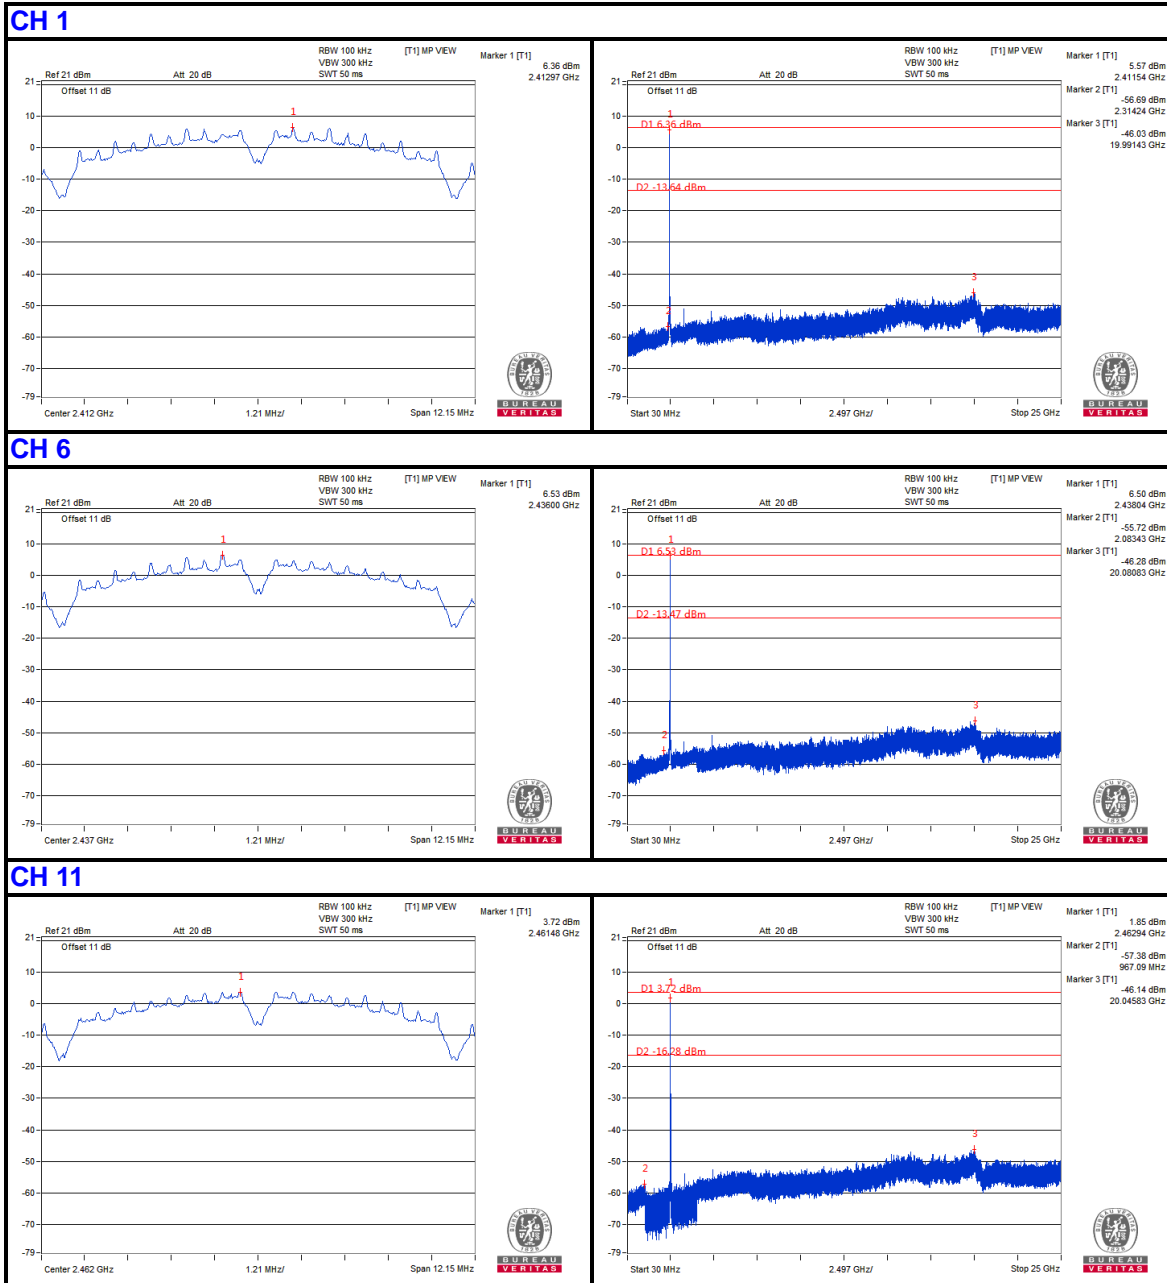


802.11g


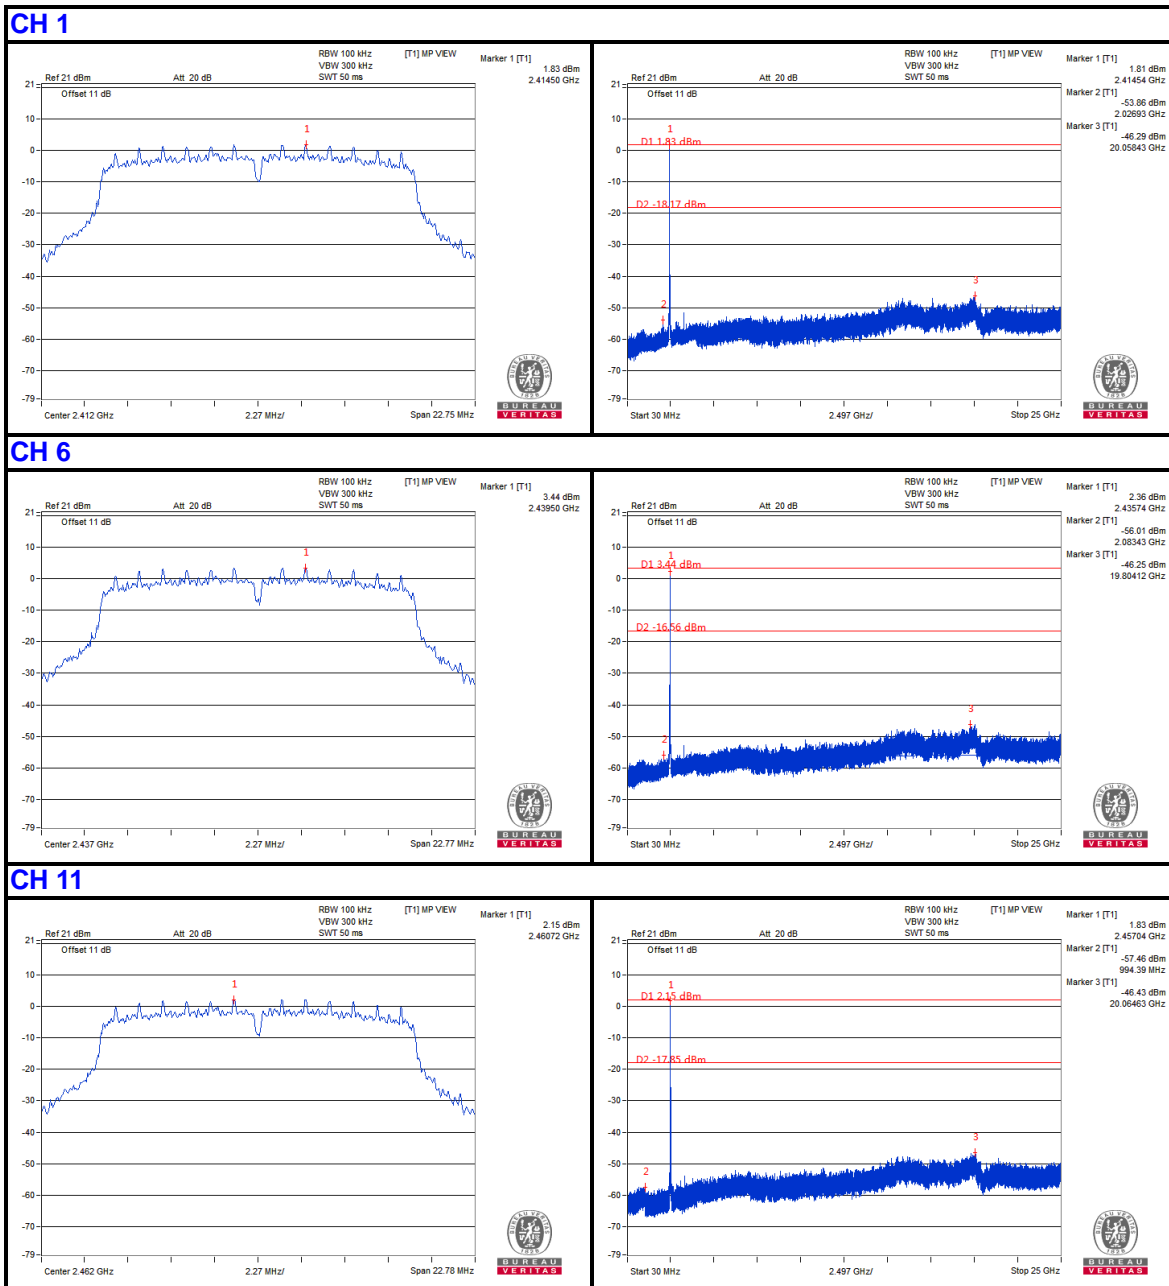


802.11n HT20



CH 1

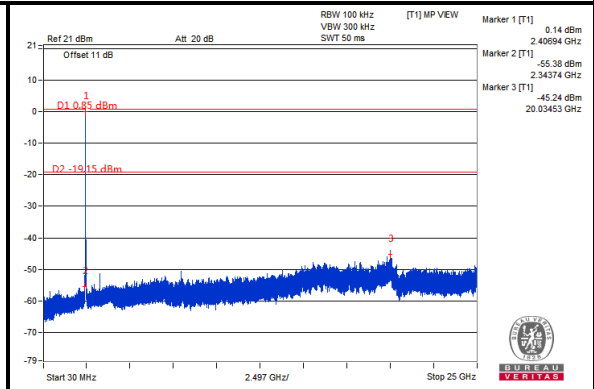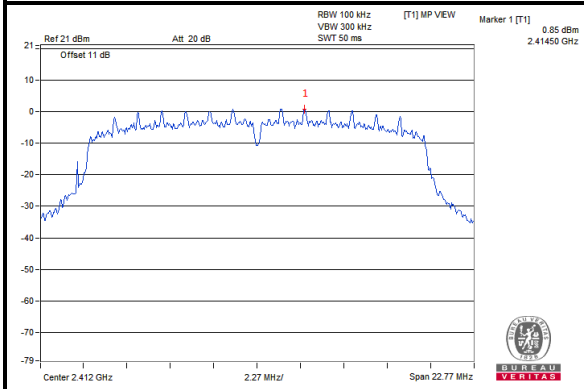

CH 6

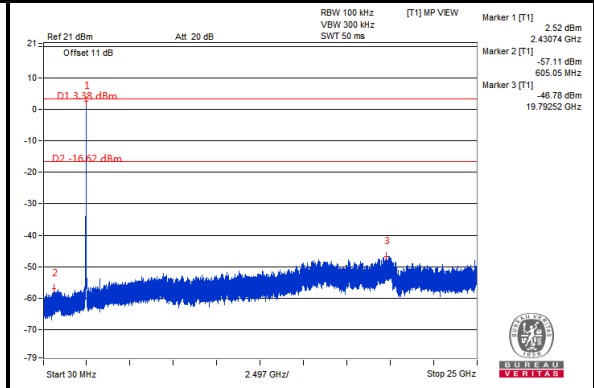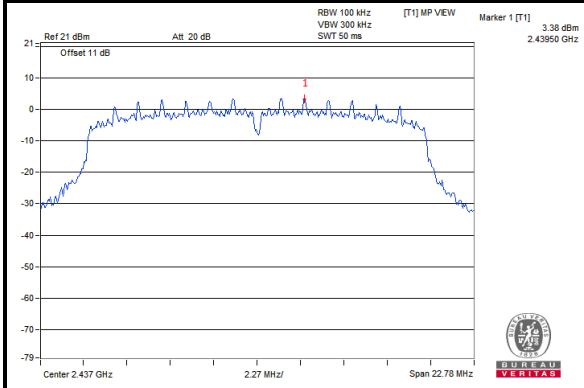


CH 11

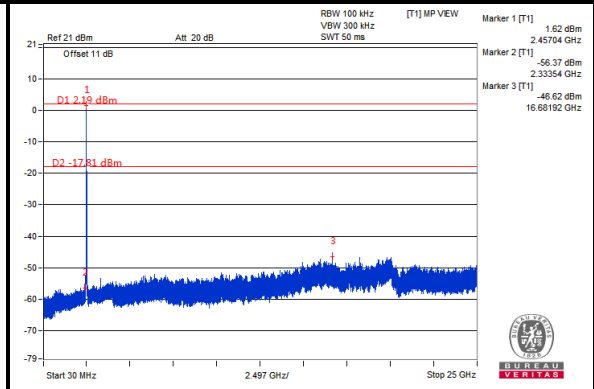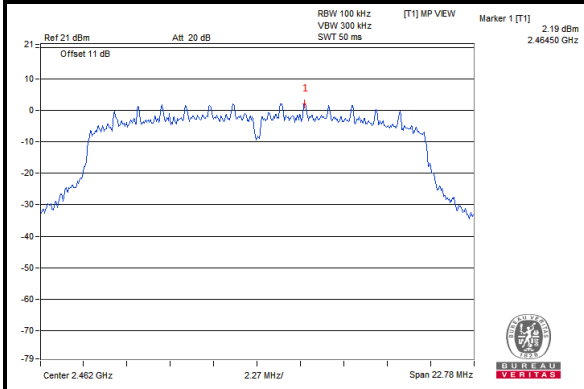


802.11n HT40


CH 3

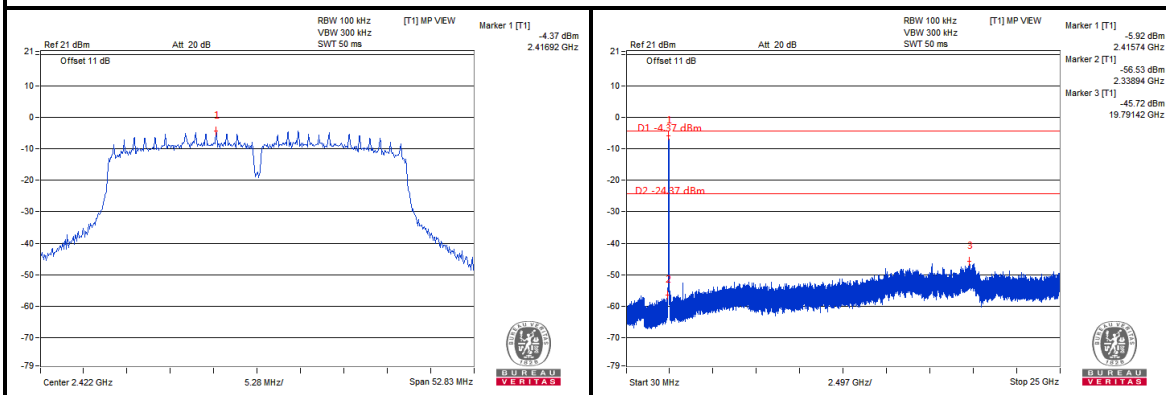


CH 6

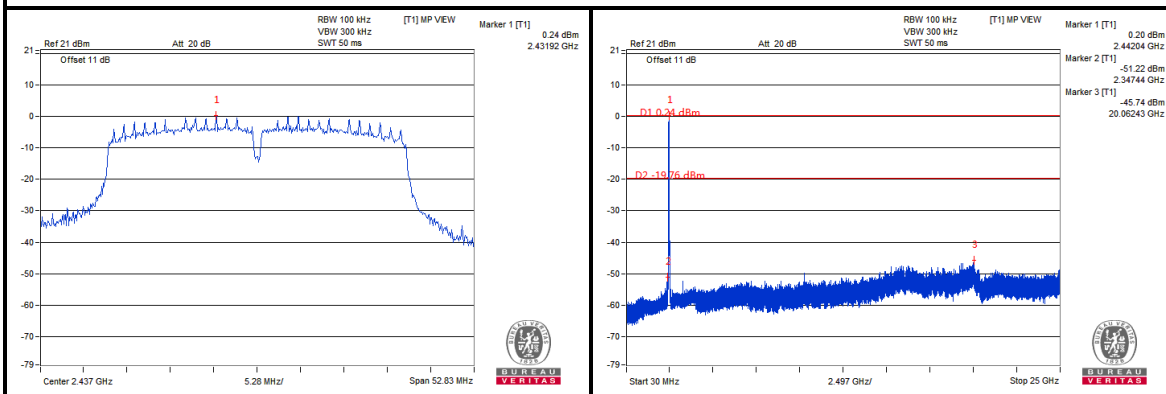


CH 9

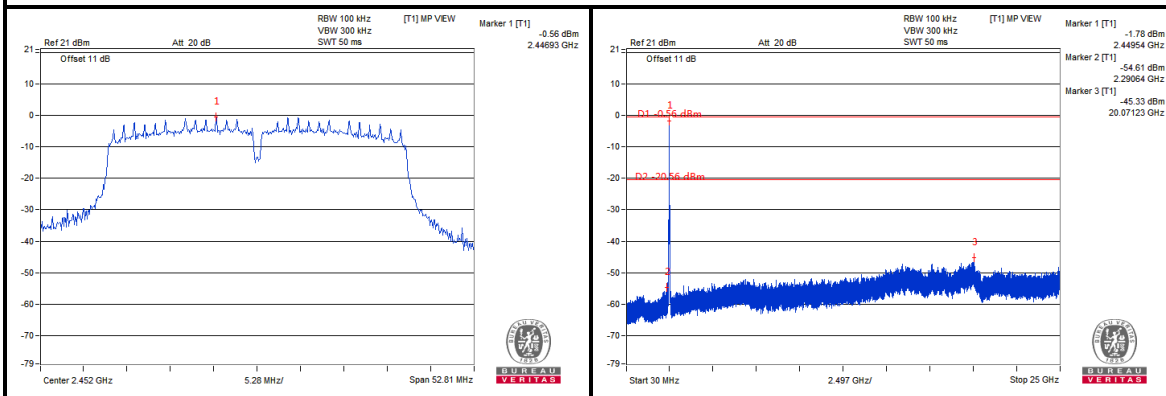


802.11b

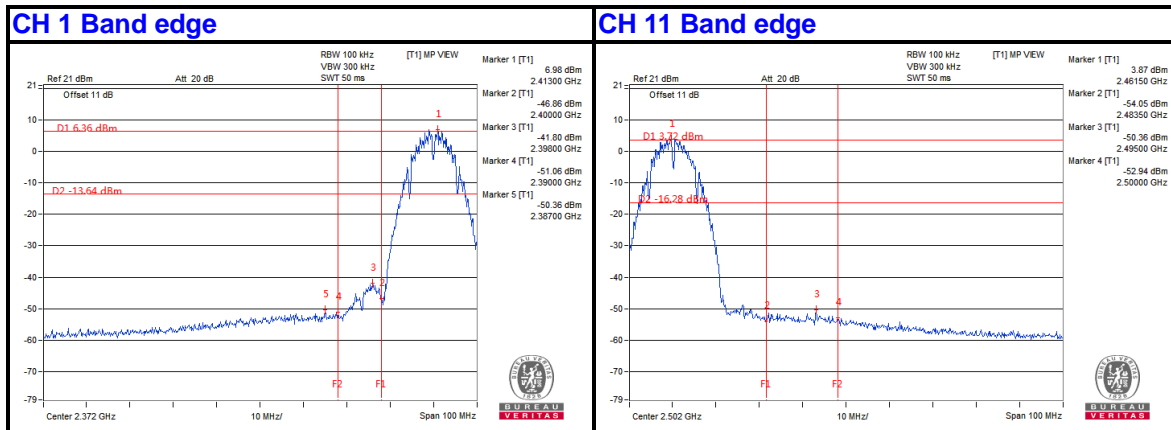


802.11g

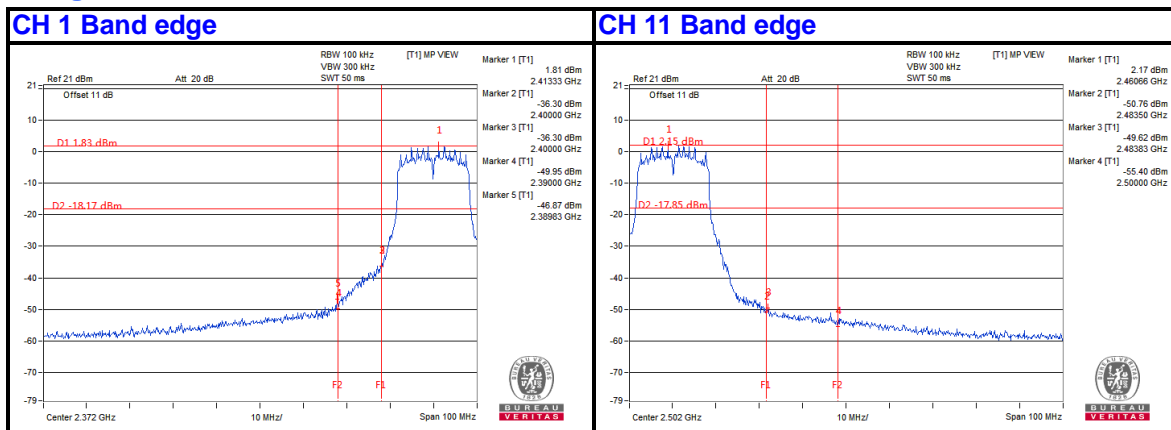

802.11n HT20

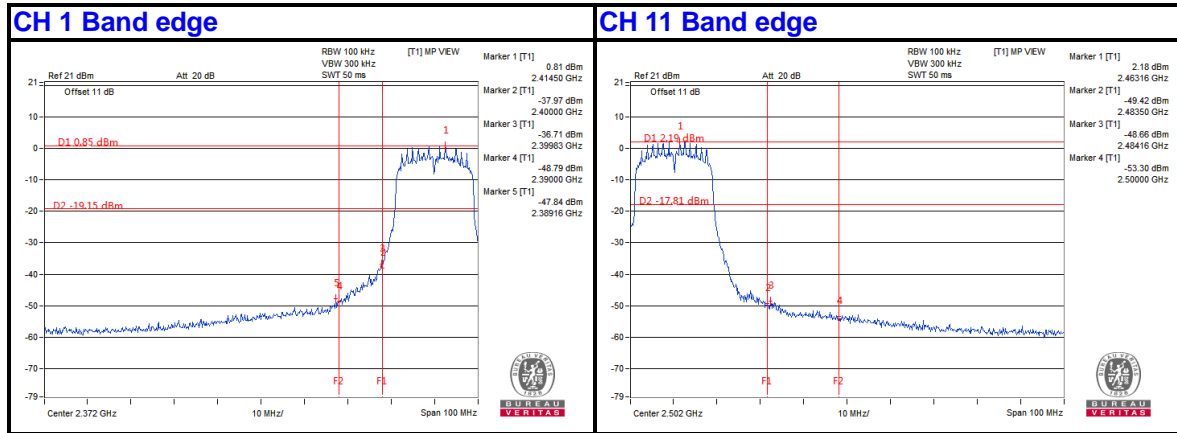

802.11n HT40

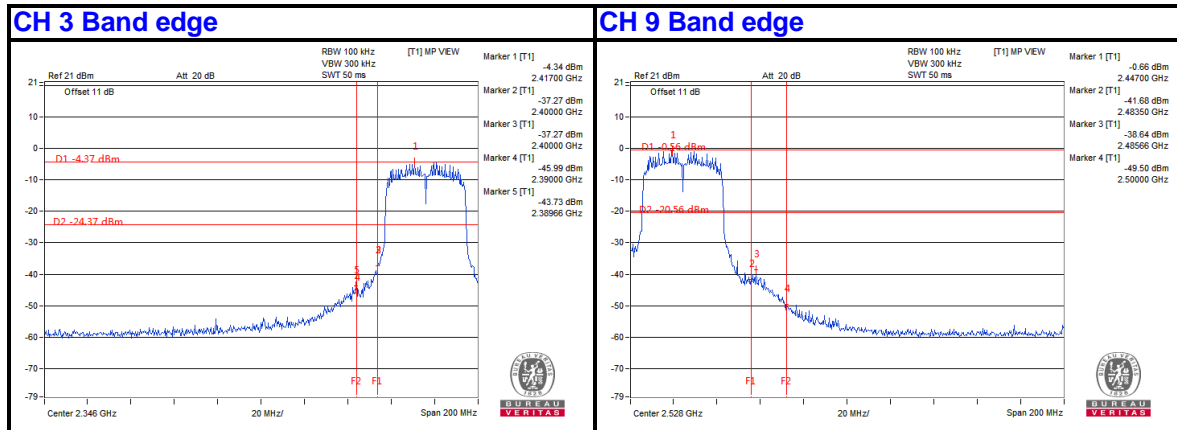



Test Report No.: RF190730N011-3

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



Test Report No.: RF190730N011-3

6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---