

ATC

TEST REPORT

Applicant Name : KRIPTO MOBILE CORPORATION
Address : 7640 NW 25TH ST STE 101 MIAMI Florida United States 33122
Report Number : RA230413-19132E-RF-00A
FCC ID: 2APX7K69

Test Standard (s)

FCC PART 15.247

Sample Description

Product Type: 4G Smart Phone
Model No.: K69
Multiple Model(s) No.: N/A
Trade Mark: KRIP
Date Received: 2023/04/13
Report Date: 2023/05/18

Test Result:	Pass*
--------------	-------

* In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Handwritten signature of Andy Yu.

Andy Yu
EMC Engineer

Approved By:

Handwritten signature of Candy Li.

Candy Li
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “*”.

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk “**”. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China
Tel: +86 755-26503290 Fax: +86 755-26503290 Web: www.atc-lab.com

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY4
GENERAL INFORMATION.....	.5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	.5
OBJECTIVE5
TEST METHODOLOGY5
MEASUREMENT UNCERTAINTY6
TEST FACILITY6
SYSTEM TEST CONFIGURATION.....	.7
DESCRIPTION OF TEST CONFIGURATION7
EUT EXERCISE SOFTWARE7
SPECIAL ACCESSORIES.....	.7
EQUIPMENT MODIFICATIONS7
SUPPORT EQUIPMENT LIST AND DETAILS7
EXTERNAL I/O CABLE.....	.7
BLOCK DIAGRAM OF TEST SETUP8
SUMMARY OF TEST RESULTS9
TEST EQUIPMENT LIST10
FCC§15.247 (I), §1.1307 (B) &§2.1093 – RF EXPOSURE12
APPLICABLE STANDARD12
FCC §15.203 – ANTENNA REQUIREMENT13
APPLICABLE STANDARD13
ANTENNA CONNECTOR CONSTRUCTION13
FCC §15.207 (A) – AC LINE CONDUCTED EMISSIONS14
APPLICABLE STANDARD14
EUT SETUP.....	.14
EMI TEST RECEIVER SETUP.....	.14
TEST PROCEDURE14
FACTOR & MARGIN CALCULATION15
TEST DATA15
FCC §15.205, §15.209 & §15.247(D) – RADIATED EMISSIONS18
APPLICABLE STANDARD18
EUT SETUP.....	.18
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP19
TEST PROCEDURE19
FACTOR & MARGIN CALCULATION19
TEST DATA19
FCC §15.247(A) (1)-CHANNEL SEPARATION TEST27
APPLICABLE STANDARD27
TEST PROCEDURE27
TEST DATA27

FCC §15.247(A) (1) – 20 DB EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH	28
APPLICABLE STANDARD	28
TEST PROCEDURE	28
TEST DATA	29
FCC §15.247(A) (1) (III)-QUANTITY OF HOPPING CHANNEL TEST.....	30
APPLICABLE STANDARD	30
TEST PROCEDURE	30
TEST DATA	30
FCC §15.247(A) (1) (III) - TIME OF OCCUPANCY (DWELL TIME).....	31
APPLICABLE STANDARD	31
TEST PROCEDURE	31
TEST DATA	31
FCC §15.247(B) (1) - PEAK OUTPUT POWER MEASUREMENT	32
APPLICABLE STANDARD	32
TEST PROCEDURE	32
TEST DATA	32
FCC §15.247(D) & RSS-247 § 5.5 - BAND EDGES TESTING	33
APPLICABLE STANDARD	33
TEST PROCEDURE	33
TEST DATA	33
APPENDIX	34
APPENDIX A: 20dB EMISSION BANDWIDTH.....	34
APPENDIX B: OCCUPIED CHANNEL BANDWIDTH	40
APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER	45
APPENDIX D: CARRIER FREQUENCY SEPARATION	50
APPENDIX E: TIME OF OCCUPANCY	52
APPENDIX F: NUMBER OF HOPPING CHANNELS	62
APPENDIX G: BAND EDGE MEASUREMENTS	64

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	RA230413-19132E-RF-00A	Original Report	2023-05-18

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Frequency Range	Bluetooth: 2402~2480MHz
Maximum conducted Peak output power	Bluetooth: 5.39dBm
Modulation Technique	Bluetooth: GFSK, $\pi/4$ -DQPSK, 8DPSK
Antenna Specification*	-1.1dBi (provided by the applicant)
Voltage Range	DC 3.87V from battery or DC 5V from adapter
Test Sample serial number	24LB_1 for Conducted and Radiated Emissions Test 24LB_4 for RF Conducted Test (Assigned by ATC)
Sample/EUT Status	Good condition
Adapter information	Model: C69 Input: AC 100-240V, 50/60Hz, 0.3A Output: DC 5.0V, 2.0A

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter	Uncertainty	
Occupied Channel Bandwidth	5%	
RF Frequency	0.082×10^{-7}	
RF output power, conducted	0.71dB	
Unwanted Emission, conducted	1.6dB	
AC Power Lines Conducted Emissions	2.72dB	
Emissions, Radiated	9kHz - 30MHz	2.06dB
	30MHz - 1GHz	5.08dB
	1GHz - 18GHz	4.96dB
	18GHz - 26.5GHz	5.16dB
	26.5GHz - 40GHz	4.64dB
Temperature	1°C	
Humidity	6%	
Supply voltages	0.4%	

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the Floor 1, KuMaKe Building, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 429 7.01.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0016. The Registration Number is 30241.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode.

EUT Exercise Software

EUT was test in the engineering mode and the power level is 9*. The power level was provided by the manufacturer.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
/	/	/	/

External I/O Cable


Cable Description	Length (m)	From Port	To
Un-shielding Un-Detachable AC Cable	1.0	LISN	Receptacle
Un-shielding Detachable USB Cable	1.0	EUT	Adapter

Block Diagram of Test Setup

For Conducted Emissions

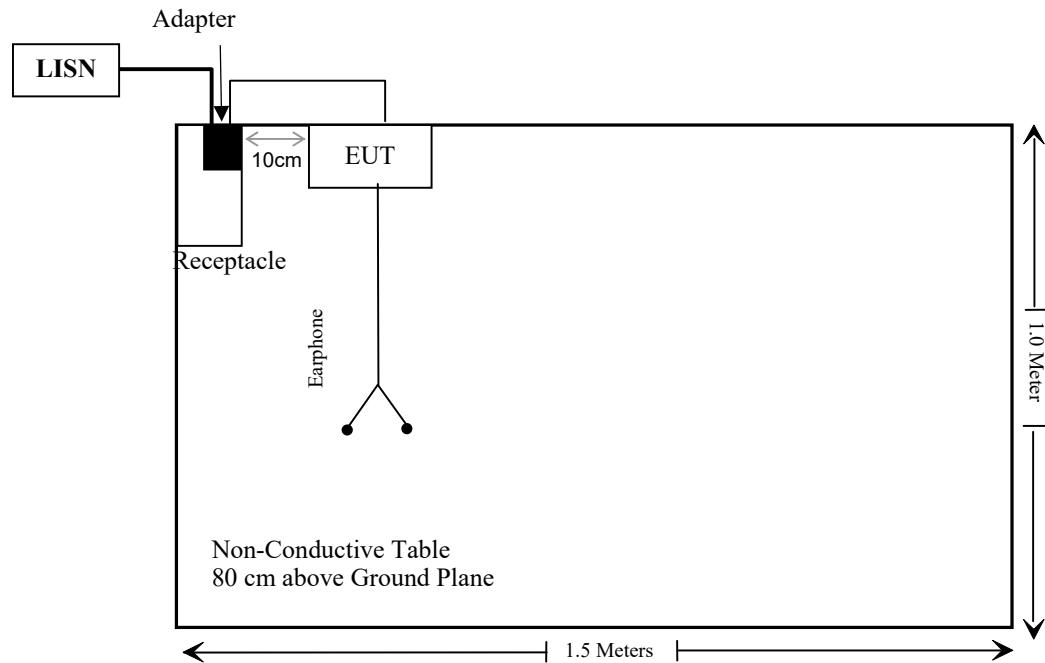

For Radiated Emissions:

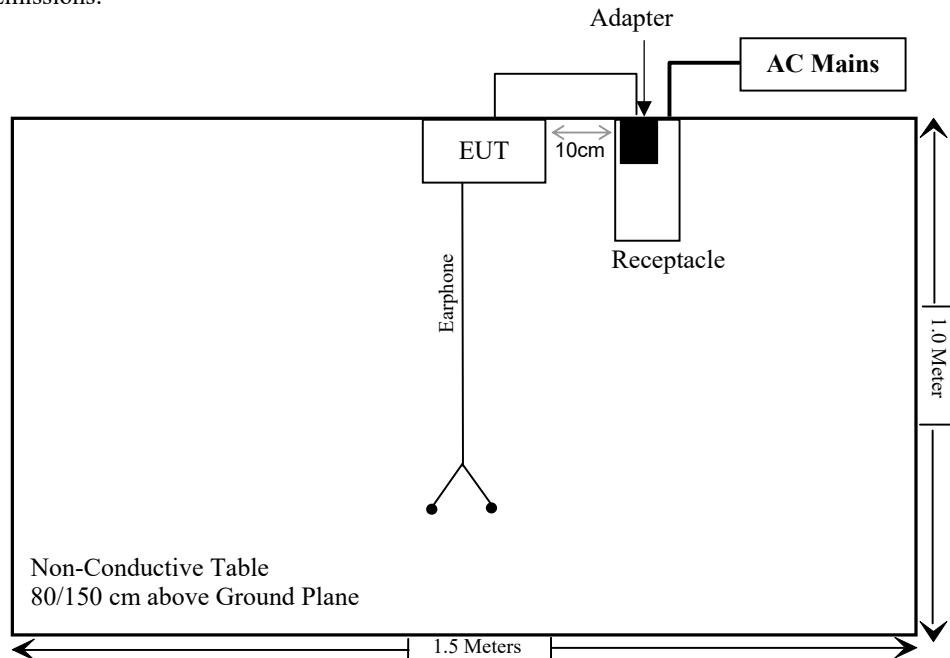

Note: the support table edge was flush with center of turntable

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1307 (b) & §2.1093	RF Exposure	Compliant
§15.203	Antenna Requirement	Compliant
§15.207(a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliant
§15.247(a)(1)	20 dB Emission Bandwidth & 99% Occupied Bandwidth	Compliant
§15.247(a)(1)	Channel Separation Test	Compliant
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliant
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliant
§15.247(b)(1)	Peak Output Power Measurement	Compliant
§15.247(d)	Band edges	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	100784	2022/11/25	2023/11/24
Rohde & Schwarz	L.I.S.N.	ESH3-Z5	100305	2022/12/01	2023/11/30
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2022/12/07	2023/12/06
Unknown	RF Coaxial Cable	No.17	N0350	2022/11/25	2023/11/24
Conducted Emission Test Software: e3 19821b (V9)					
Radiated Emissions Test					
Rohde & Schwarz	Test Receiver	ESR	102725	2022/11/25	2023/11/24
Rohde & Schwarz	Spectrum Analyzer	FSV40	101949	2022/11/25	2023/11/24
SONOMA INSTRUMENT	Amplifier	310 N	186131	2022/11/08	2023/11/07
A.H. Systems, inc.	Preamplifier	PAM-0118P	135	2022/11/08	2023/11/07
Quinstar	Amplifier	QLW-18405536-J0	15964001002	2022/11/08	2023/11/07
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2021/07/06	2024/07/05
Schwarzbeck	Horn Antenna	BBHA9120D	837	2023/02/22	2026/02/21
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2022/12/26	2025/12/25
Radiated Emission Test Software: e3 19821b (V9)					
Unknown	RF Coaxial Cable	No.10	N050	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.11	N1000	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.12	N040	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.13	N300	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.14	N800	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.15	N600	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.16	N650	2022/11/25	2023/11/24
Wainwright	High Pass Filter	WHKX3.6/18 G-10SS	5	2022/11/25	2023/11/24

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Rohde&Schwarz	Spectrum Analyzer	FSV-40	101948	2022/11/25	2023/11/24
WEINSCHEL	3dB Attenuator	Unknown	F-03-EM121	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.31	RF-01	Each time	

* **Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§15.247 (i), §1.1307 (b) &§2.1093 – RF EXPOSURE**Applicable Standard**

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 General RF Exposure Guidance

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

1. $f(\text{GHz})$ is the RF channel transmit frequency in GHz.

2. Power and distance are rounded to the nearest mW and mm before calculation.

3. The result is rounded to one decimal place for comparison.

4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

Measurement Result

Mode	Frequency (MHz)	Max tune-up conducted power* (dBm)	Max tune-up conducted power* (mW)	Distance (mm)	Calculated value	Threshold (1-g SAR)	SAR Test Exclusion
BT	2402-2480	5.5	3.55	5	1.1	3.0	Yes

Note: The tune-up power was declared by the applicant.

Result: No Standalone SAR test is required

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has one internal antenna arrangement, which was permanently attached, the antenna gain is -1.1dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

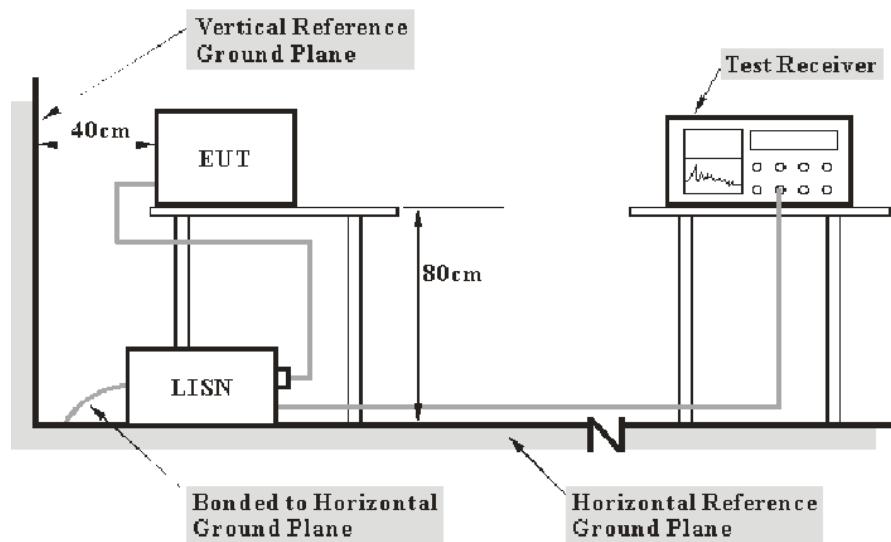

- Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Factor & Margin Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a over limit of -7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{level} - \text{Limit} \\ \text{Level} &= \text{Read level} + \text{Factor}\end{aligned}$$


Test Data

Environmental Conditions

Temperature:	23 °C
Relative Humidity:	59 %
ATM Pressure:	101.2 kPa


The testing was performed by Jerry Wu on 2023-05-11.

EUT operation mode: Transmitting (the worst case is 8DPSK Mode, Low channel)

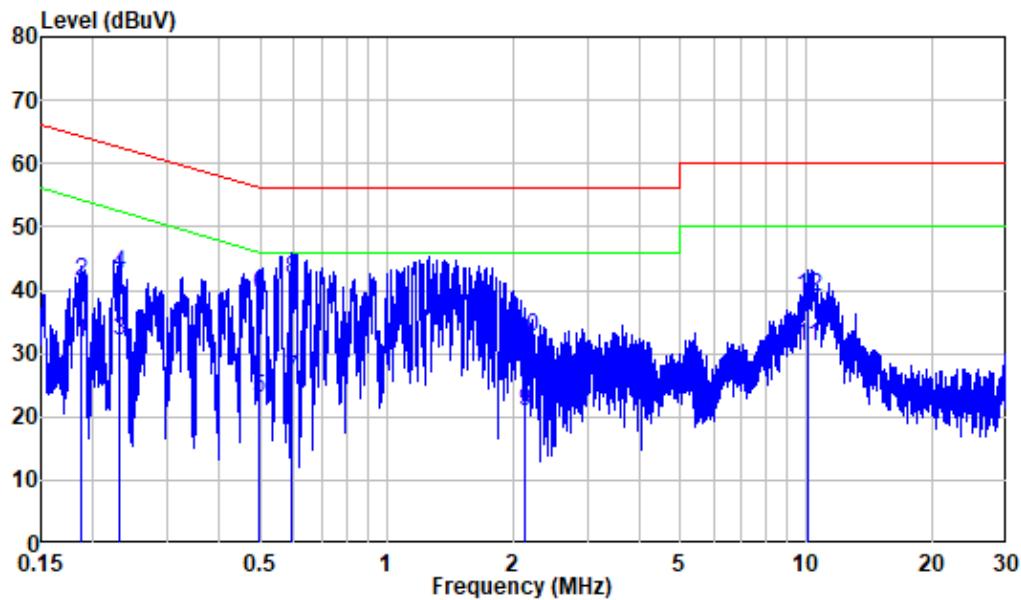AC 120V/60 Hz, Line

Site : Shielding Room
Condition: Line
Job No. : RA230413-19132E-RF
Mode : Charging+BT Transmitting
Power : AC 120V 60Hz

Freq	Factor	Read		Limit		Over	Remark
		MHz	dB	Level	dBuV	Line	
1	0.187	10.30	21.47	31.77	54.17	-22.40	Average
2	0.187	10.30	31.15	41.45	64.17	-22.72	QP
3	0.231	10.33	21.64	31.97	52.41	-20.44	Average
4	0.231	10.33	32.32	42.65	62.41	-19.76	QP
5	0.494	10.57	12.38	22.95	46.10	-23.15	Average
6	0.494	10.57	28.66	39.23	56.10	-16.87	QP
7	0.591	10.62	15.27	25.89	46.00	-20.11	Average
8	0.591	10.62	31.16	41.78	56.00	-14.22	QP
9	2.130	10.41	10.38	20.79	46.00	-25.21	Average
10	2.130	10.41	22.13	32.54	56.00	-23.46	QP
11	10.079	10.61	20.36	30.97	50.00	-19.03	Average
12	10.079	10.61	28.35	38.96	60.00	-21.04	QP


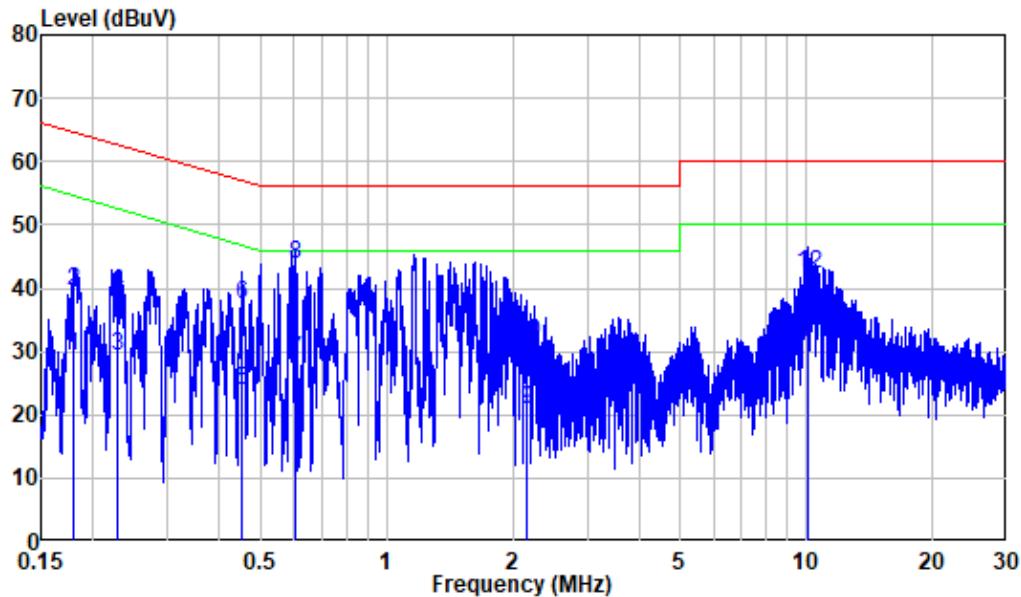
AC 120V/60 Hz, Neutral

Site : Shielding Room
Condition: Neutral
Job No. : RA230413-19132E-RF
Mode : Charging+BT Transmitting
Power : AC 120V 60Hz

Freq	Factor	Read		Limit		Over Limit	Remark
		MHz	dB	Level	dBuV	Line	
1	0.180	10.28	19.11	29.39	54.50	-25.11	Average
2	0.180	10.28	29.16	39.44	64.50	-25.06	QP
3	0.229	10.31	18.91	29.22	52.47	-23.25	Average
4	0.229	10.31	29.03	39.34	62.47	-23.13	QP
5	0.453	10.45	13.54	23.99	46.82	-22.83	Average
6	0.453	10.45	26.98	37.43	56.82	-19.39	QP
7	0.606	10.47	18.29	28.76	46.00	-17.24	Average
8	0.606	10.47	33.28	43.75	56.00	-12.25	QP
9	2.150	10.50	10.48	20.98	46.00	-25.02	Average
10	2.150	10.50	20.85	31.35	56.00	-24.65	QP
11	10.099	10.71	20.83	31.54	50.00	-18.46	Average
12	10.099	10.71	31.53	42.24	60.00	-17.76	QP

FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS**Applicable Standard**

FCC §15.205; §15.209; §15.247(d)

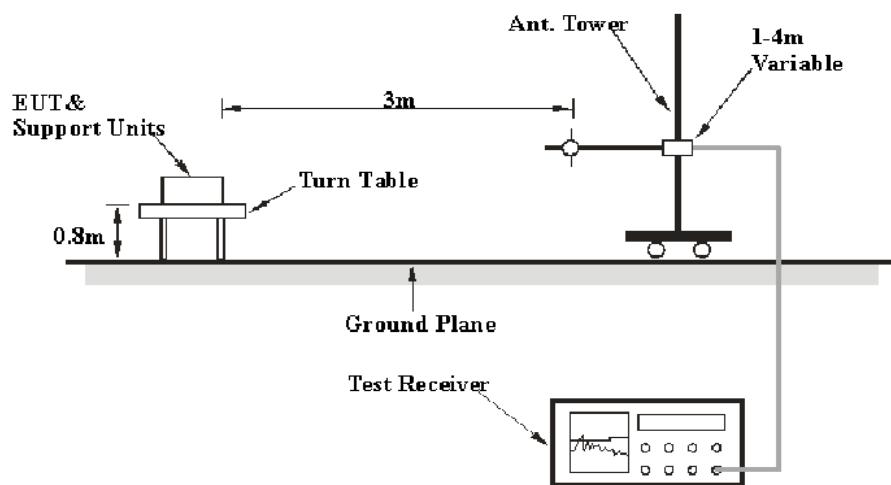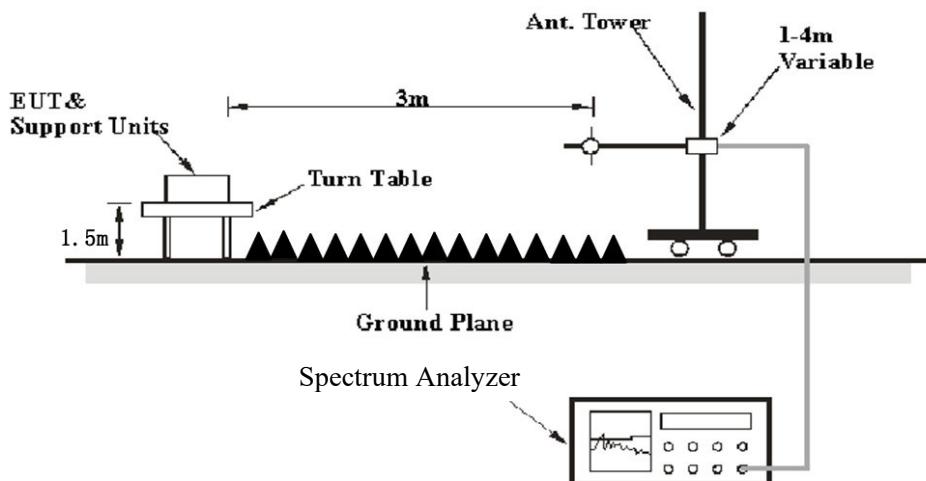EUT Setup**Below 1 GHz:****Above 1GHz:**

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK

For average measurement:

Use the duty cycle factor correction factor method per 15.35(c).

Duty cycle=On time/100milliseconds, On time=N1*L1+N2*L2+...Nn-1*Ln-1+Nn*Ln,

Where N1 is number of type 1 pulses, L1 is length of type 1 pulse, etc.

Average Emission Level=Peak Emission Level+20*log(Duty cycle)

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Factor & Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Over Limit or Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an over limit/margin of -7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\begin{aligned}\text{Margin/Over Limit} &= \text{Corrected Amplitude/Level-Limit} \\ \text{Corrected Amplitude/Level} &= \text{Reading} + \text{Factor}\end{aligned}$$

Test Data

Environmental Conditions

Temperature:	24~25.3 °C
Relative Humidity:	56~57 %
ATM Pressure:	101 kPa


The testing was performed by Jimi Zheng on 2023-05-11 for below 1GHz and Zeki Ma on 2023-04-26 for above 1GHz.

Test mode: Transmitting (Pre-scan in the X, Y and Z axes of orientation, the worst case X-axes of orientation were recorded)

30MHz-1GHz: (the worst case is 8DPSK Mode, Low channel)

Note: When the test result of Peak was more than 6dB below the limit of QP, just the Peak value was recorded.

Horizontal:

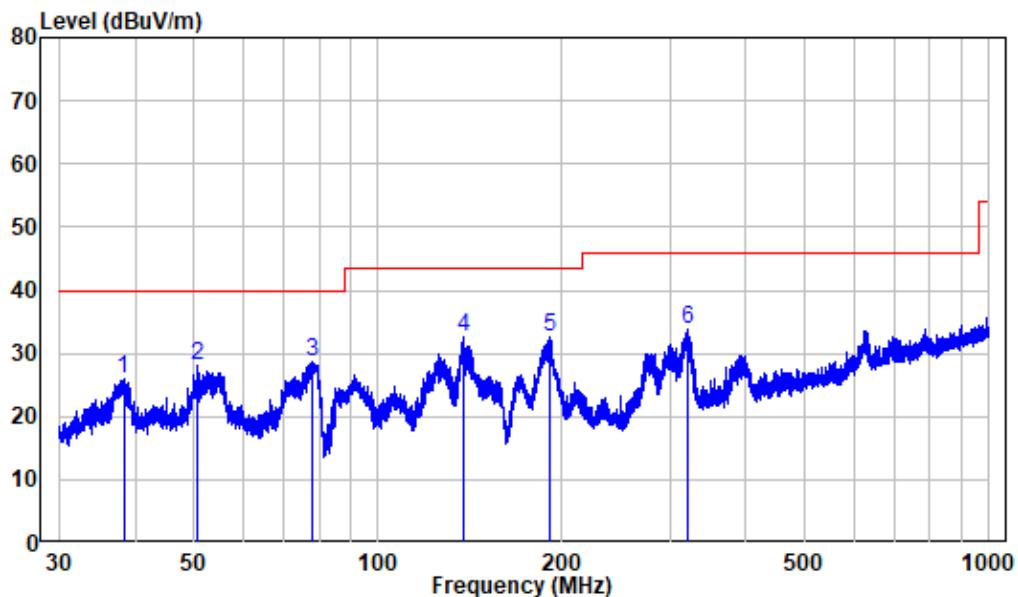

Site : chamber


Condition: 3m HORIZONTAL

Job No. : RA230413-19132E-RF

Test Mode: Charging+BT Transmitting

Freq	Factor	Read	Limit	Over	Remark
		Level	Level	Line	
1	38.296	-10.75	36.70	25.95	40.00 -14.05 Peak
2	50.542	-9.93	38.01	28.08	40.00 -11.92 Peak
3	78.139	-16.61	45.22	28.61	40.00 -11.39 Peak
4	137.903	-15.35	47.95	32.60	43.50 -10.90 Peak
5	190.322	-11.52	44.23	32.71	43.50 -10.79 Peak
6	320.498	-8.43	42.32	33.89	46.00 -12.11 Peak

Vertical

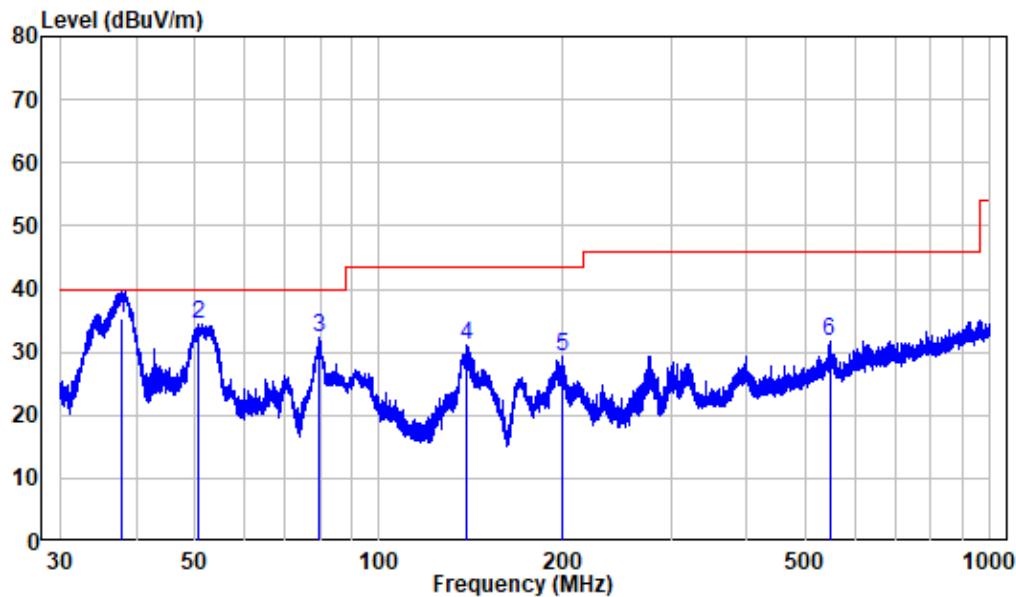

Site : chamber
Condition: 3m VERTICAL
Job No. : RA230413-19132E-RF
Test Mode: Charging+BT Transmitting

Freq	Factor	Read		Limit Line	Over Limit	Remark
		MHz	dB/m	dBuV	dBuV/m	
1	37.845	-10.84	46.29	35.45	40.00	-4.55 QP
2	50.719	-9.94	44.40	34.46	40.00	-5.54 QP
3	79.975	-16.79	49.13	32.34	40.00	-7.66 Peak
4	139.239	-15.41	46.53	31.12	43.50	-12.38 Peak
5	199.986	-11.40	40.55	29.15	43.50	-14.35 Peak
6	546.139	-4.02	35.74	31.72	46.00	-14.28 Peak

Above 1GHz: (worst case is 8DPSK Mode)

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Factor (dB/m)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	PK/Ave		Height (m)	Polar (H/V)				
Low Channel 2402MHz									
2310.17	65.24	PK	178	1.3	H	-10.37	54.87	74	-19.13
2327.05	65.33	PK	54	1.6	V	-10.55	54.78	74	-19.22
2390	65.02	PK	303	1.7	H	-10.70	54.32	74	-19.68
2390	64.80	PK	246	1.1	V	-10.70	54.10	74	-19.90
4804	59.34	PK	153	2.4	H	-6.11	53.23	74	-20.77
4804	59.13	PK	337	2.4	V	-6.11	53.02	74	-20.98
Middle Channel 2441MHz									
4882	58.79	PK	72	1.9	H	-5.90	52.89	74	-21.11
4882	58.30	PK	314	1.9	V	-5.90	52.40	74	-21.60
High Channel 2480MHz									
2483.5	65.33	PK	143	1.5	H	-10.55	54.78	74	-19.22
2483.5	65.05	PK	340	1.8	V	-10.55	54.50	74	-19.50
2499.22	66.77	PK	38	2.2	H	-10.43	56.34	74	-17.66
2483.59	65.64	PK	292	1.4	V	-10.55	55.09	74	-18.91
4960	57.29	PK	167	2.3	H	-5.47	51.82	74	-22.18
4960	56.65	PK	129	2.3	V	-5.47	51.18	74	-22.82

Frequency (MHz)	Peak Measurement @3m (dB μ V/m)	Polar (H/V)	Duty Cycle Correction Factor (dB)	Corrected Amplitude (dB μ V/m)	FCC Part 15.247		
					Limit (dB μ V/m)	Margin (dB)	Comment
Low Channel(2402MHz)							
2310.17	54.87	H	-24.77	30.10	54	-23.90	Band Edge
2327.05	54.78	V	-24.77	30.01	54	-23.99	Band Edge
2390	54.32	H	-24.77	29.55	54	-24.45	Band Edge
2390	54.10	V	-24.77	29.33	54	-24.67	Band Edge
4804	53.23	H	-24.77	28.46	54	-25.54	Harmonic
4804	53.02	V	-24.77	28.25	54	-25.75	Harmonic
Middle Channel(2441MHz)							
4882	52.89	H	-24.77	28.12	54	-25.88	Harmonic
4882	52.40	V	-24.77	27.63	54	-26.37	Harmonic
High Channel(2480MHz)							
2483.5	54.78	H	-24.77	30.01	54	-23.99	Band Edge
2483.5	54.50	V	-24.77	29.73	54	-24.27	Band Edge
2499.22	56.34	H	-24.77	31.57	54	-22.43	Band Edge
2483.59	55.09	V	-24.77	30.32	54	-23.68	Band Edge
4960	51.82	H	-24.77	27.05	54	-26.95	Harmonic
4960	51.18	V	-24.77	26.41	54	-27.59	Harmonic

Note:

Corrected. Amplitude = Factor + Reading

Margin = Corrected. Amplitude - Limit


Average level= Peak level+ Duty Cycle Corrected Factor

The other spurious emission which is in the noise floor level was not recorded.


Worst case duty cycle:

Duty cycle = Ton/100ms = $2.8875 * 2 / 100 = 0.05775$



Duty Cycle Corrected Factor = $20\lg(\text{Duty cycle}) = 20\lg 0.05775 = -24.77$


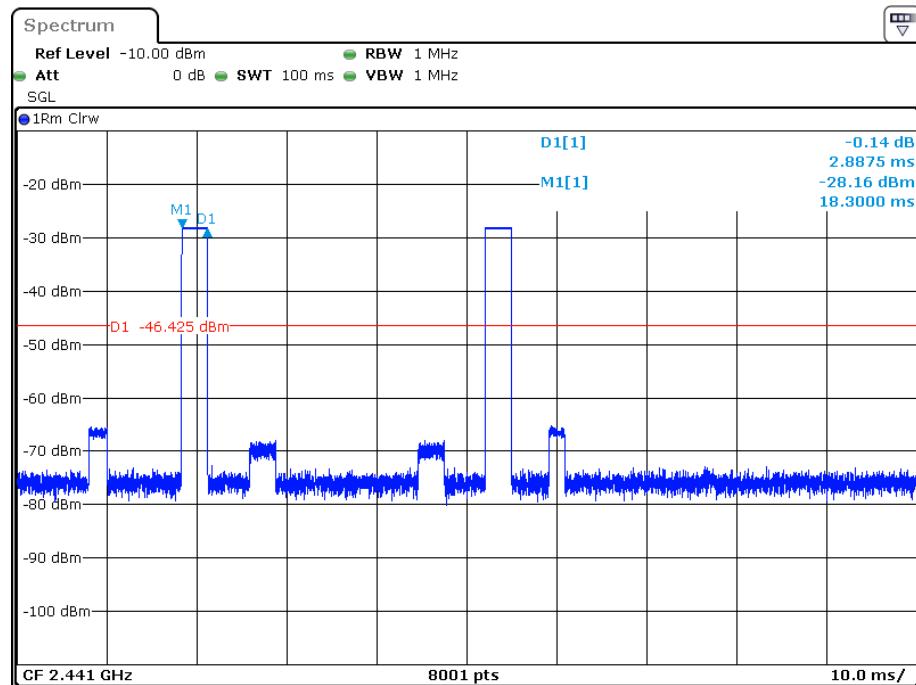
Duty cycle

Date: 26.APR.2023 19:59:24

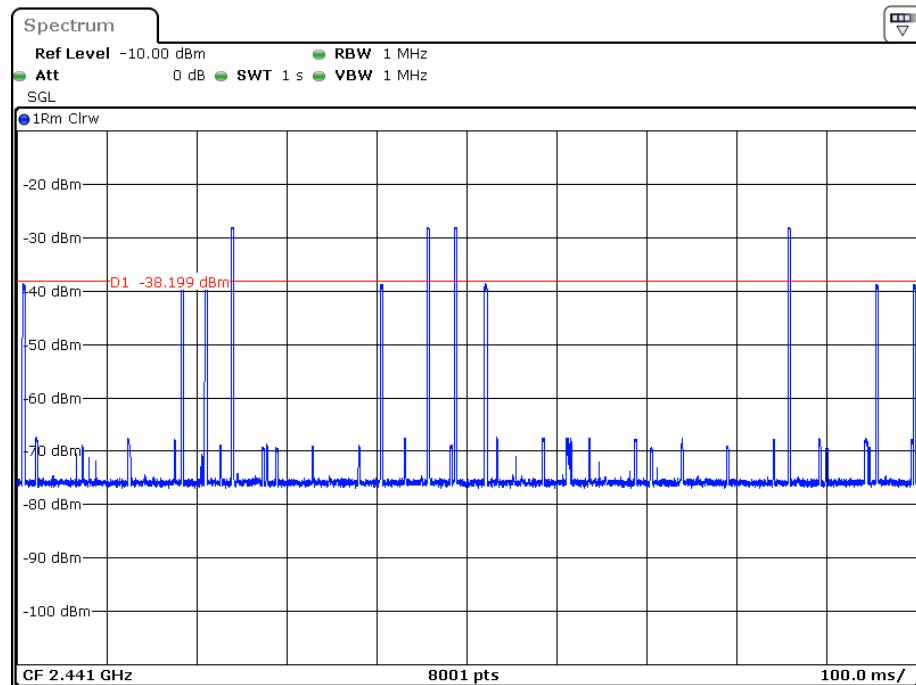

Date: 26.APR.2023 20:01:14

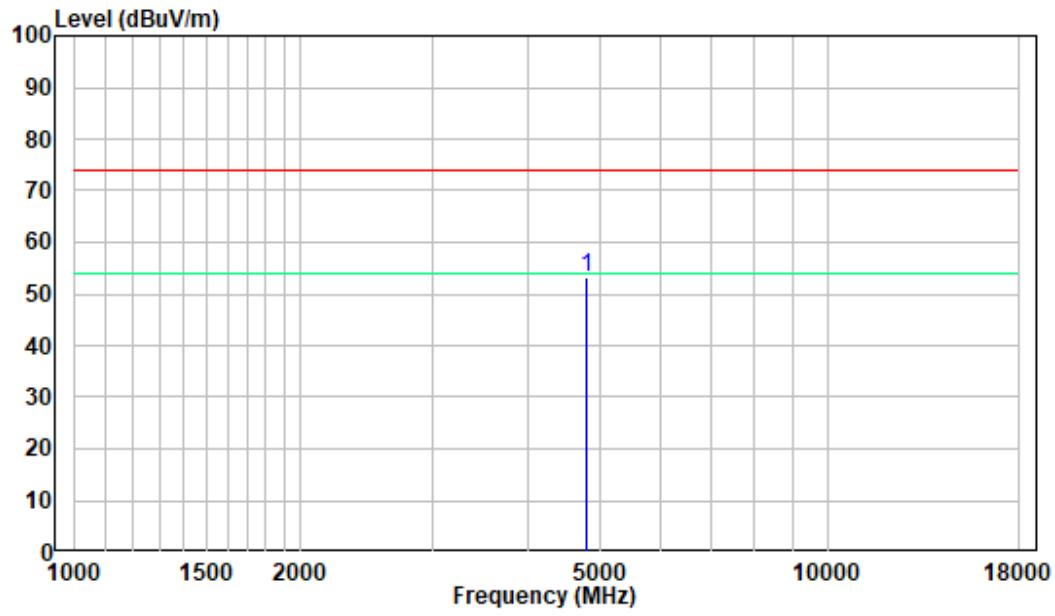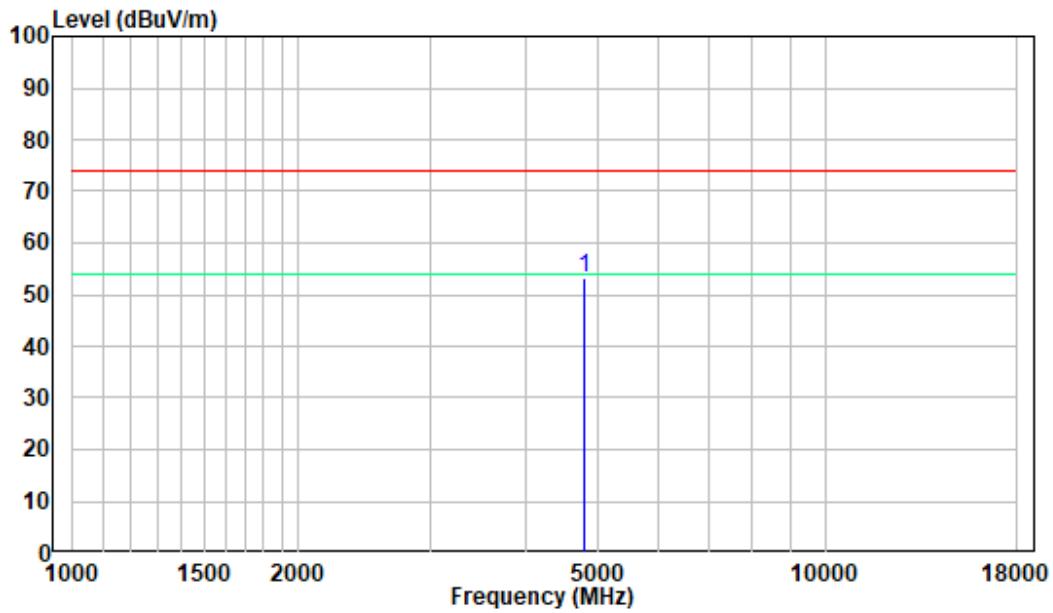1-18GHz**Pre-scan, Low Channel (worst case)****Horizontal:****Vertical:**

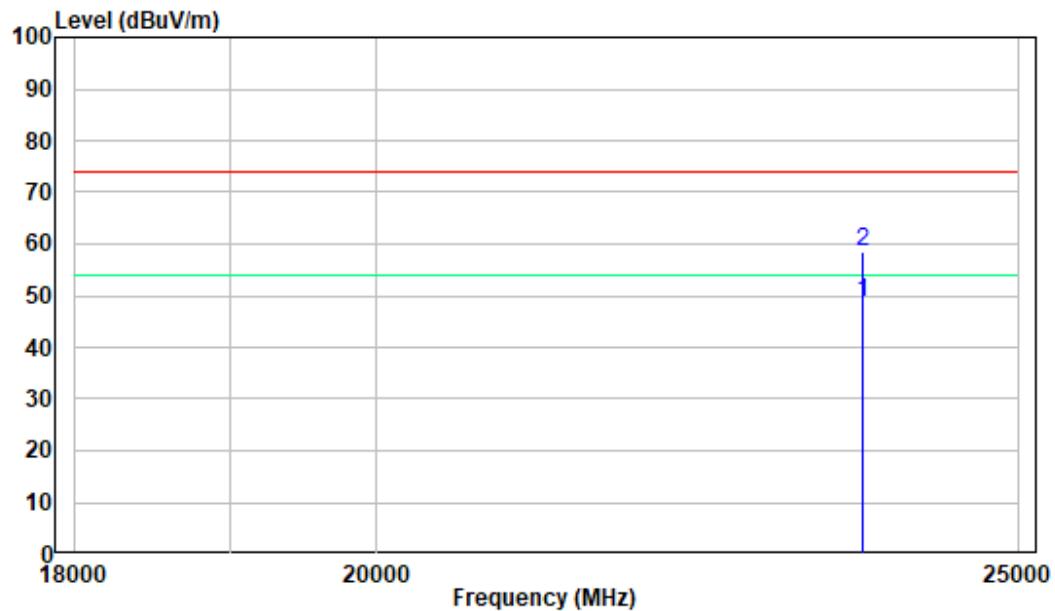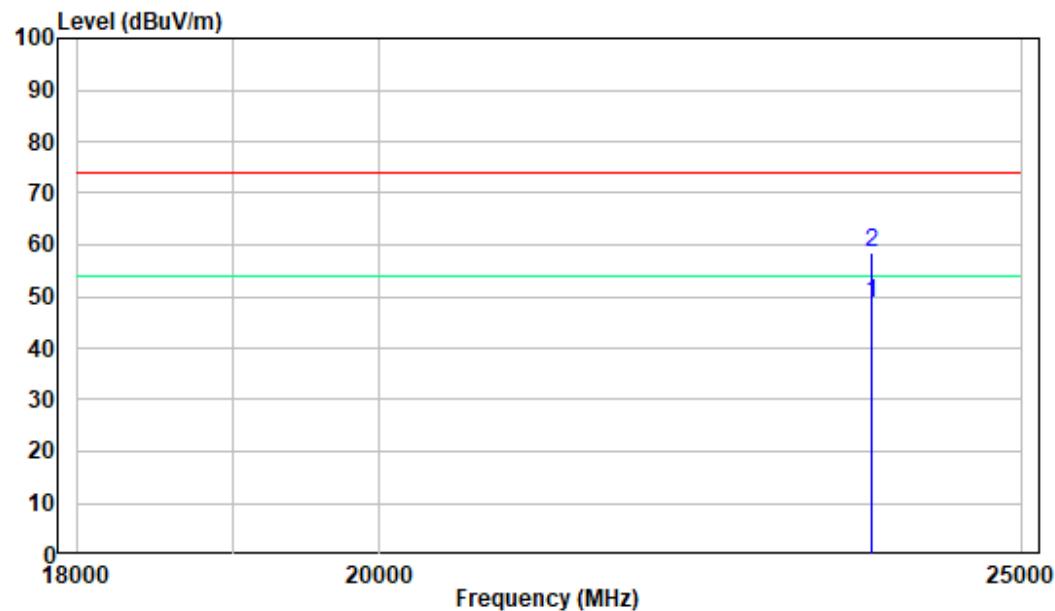18-25GHz**Pre-scan, Low Channel (worst case)****Horizontal:****Vertical:**

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST


Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.2

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.

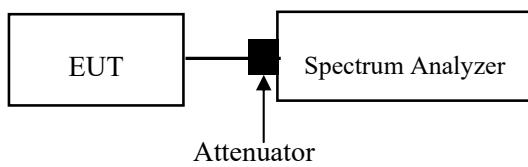

Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Jacob Huang on 2023-04-28 to 2023-05-03.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure


Test Method: ANSI C63.10-2013 Clause 7.8.7 & Clause 6.9.2

The following conditions shall be observed for measuring the occupied bandwidth and 20 dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / 20 dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / 20 dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).

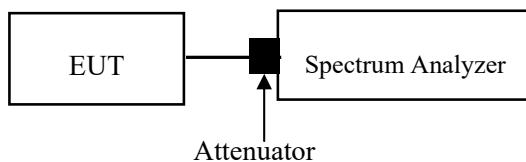

Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Jacob Huang on 2023-04-28.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST


Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.3

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

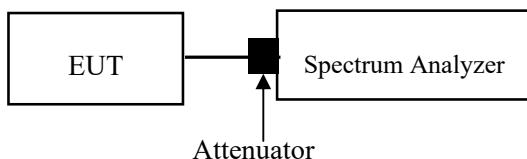

Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Jacob Huang on 2023-04-28 to 2023-05-03.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)


Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.4

1. The EUT was worked in channel hopping.
2. Set the RBW to: 1MHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to 0Hz.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Recorded the time of single pulses

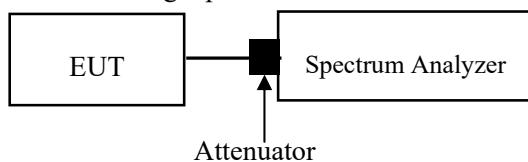

Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Jacob Huang on 2023-04-28 to 2023-05-04.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT


Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.5

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

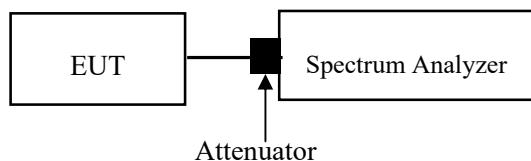

Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Jacob Huang on 2023-04-28.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(d) & RSS-247 § 5.5 - BAND EDGES TESTING


Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.6 & Clause 6.10

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

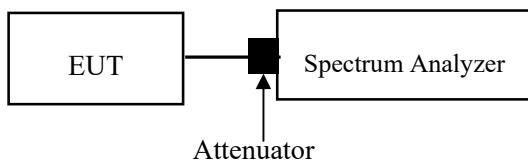

Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Jacob Huang from 2023-04-28 to 2023-05-03.

EUT operation mode: Transmitting


Test Result: Compliant. Please refer to the Appendix.


APPENDIX


Appendix A: 20dB Emission Bandwidth Test Result


Mode	Channel	Frequency (MHz)	20 dB Emission Bandwidth (MHz)
BDR (GFSK)	Low	2402	0.963
	Middle	2441	0.966
	High	2480	0.966
EDR ($\pi/4$ -DQPSK)	Low	2402	1.290
	Middle	2441	1.290
	High	2480	1.290
EDR (8DPSK)	Low	2402	1.299
	Middle	2441	1.299
	High	2480	1.299


Test Graphs

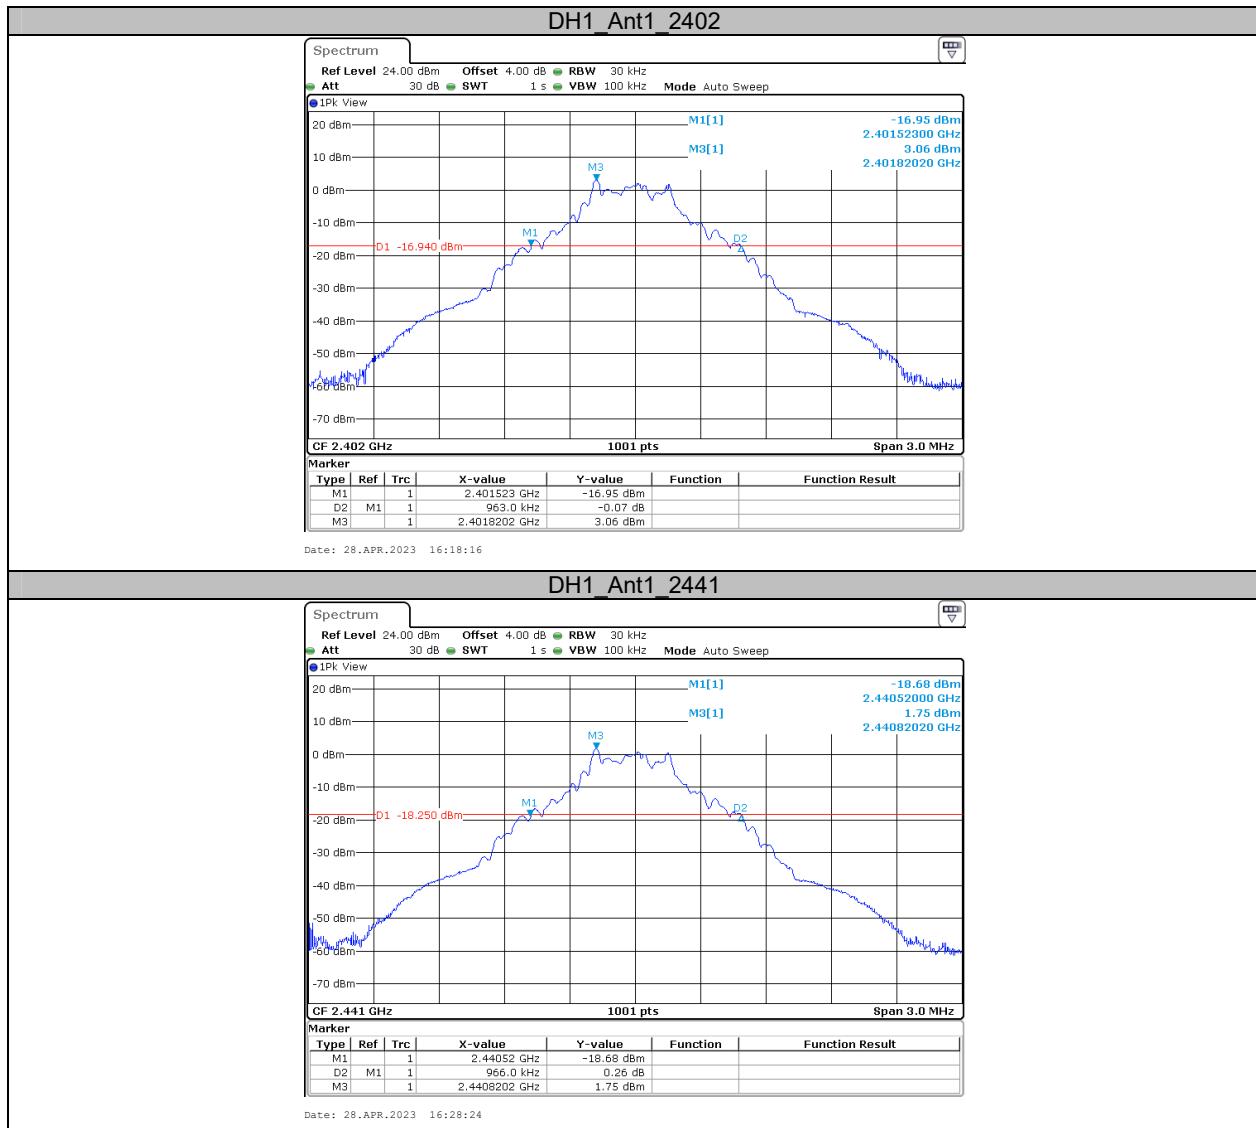

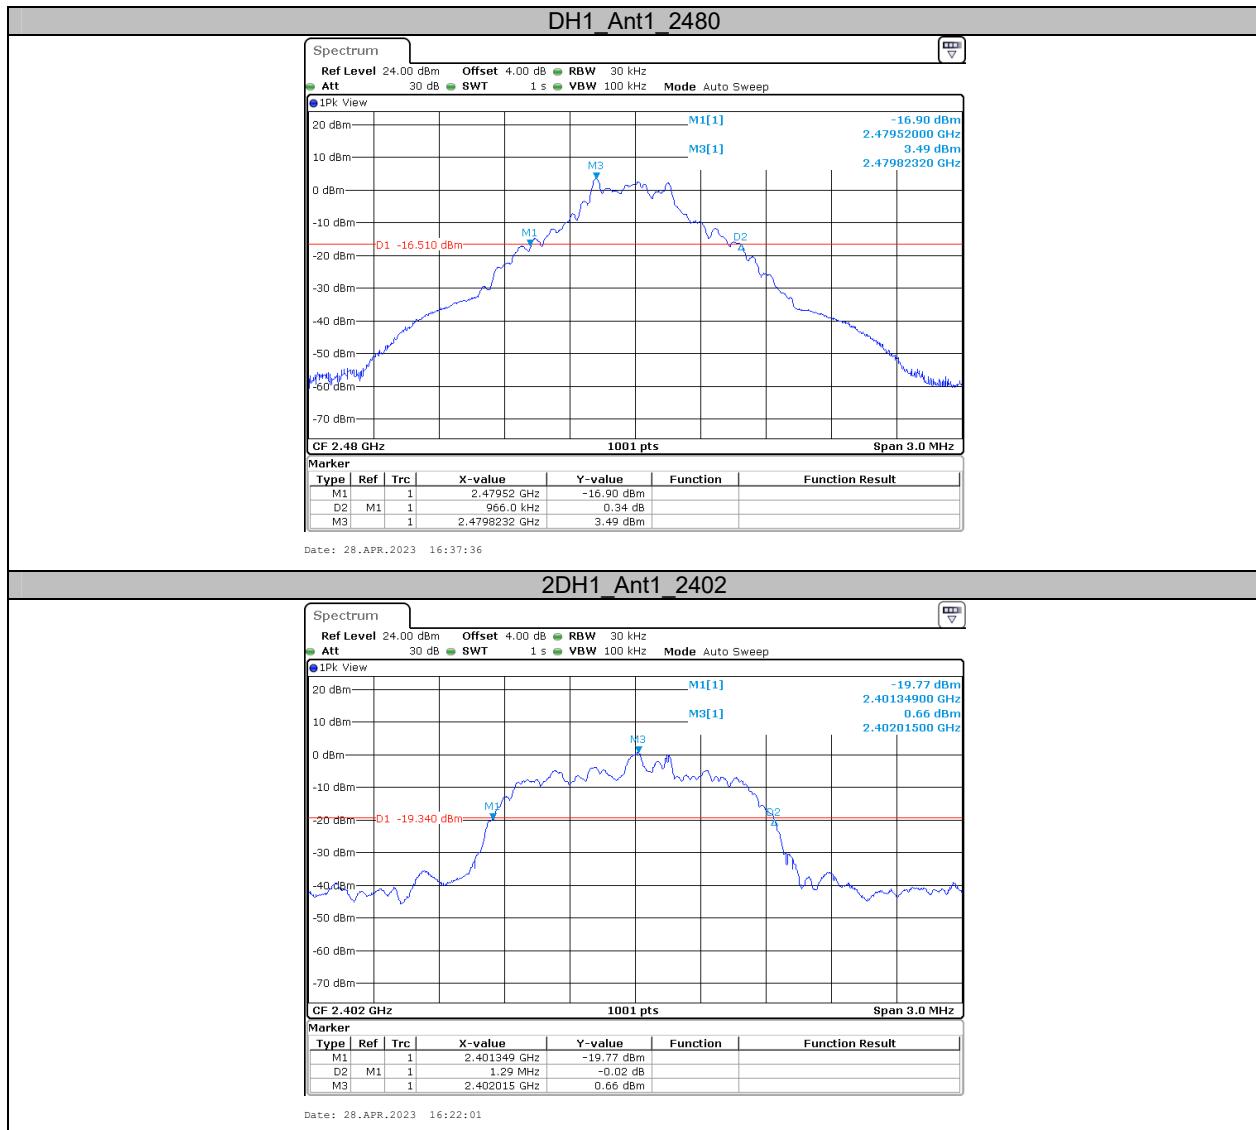

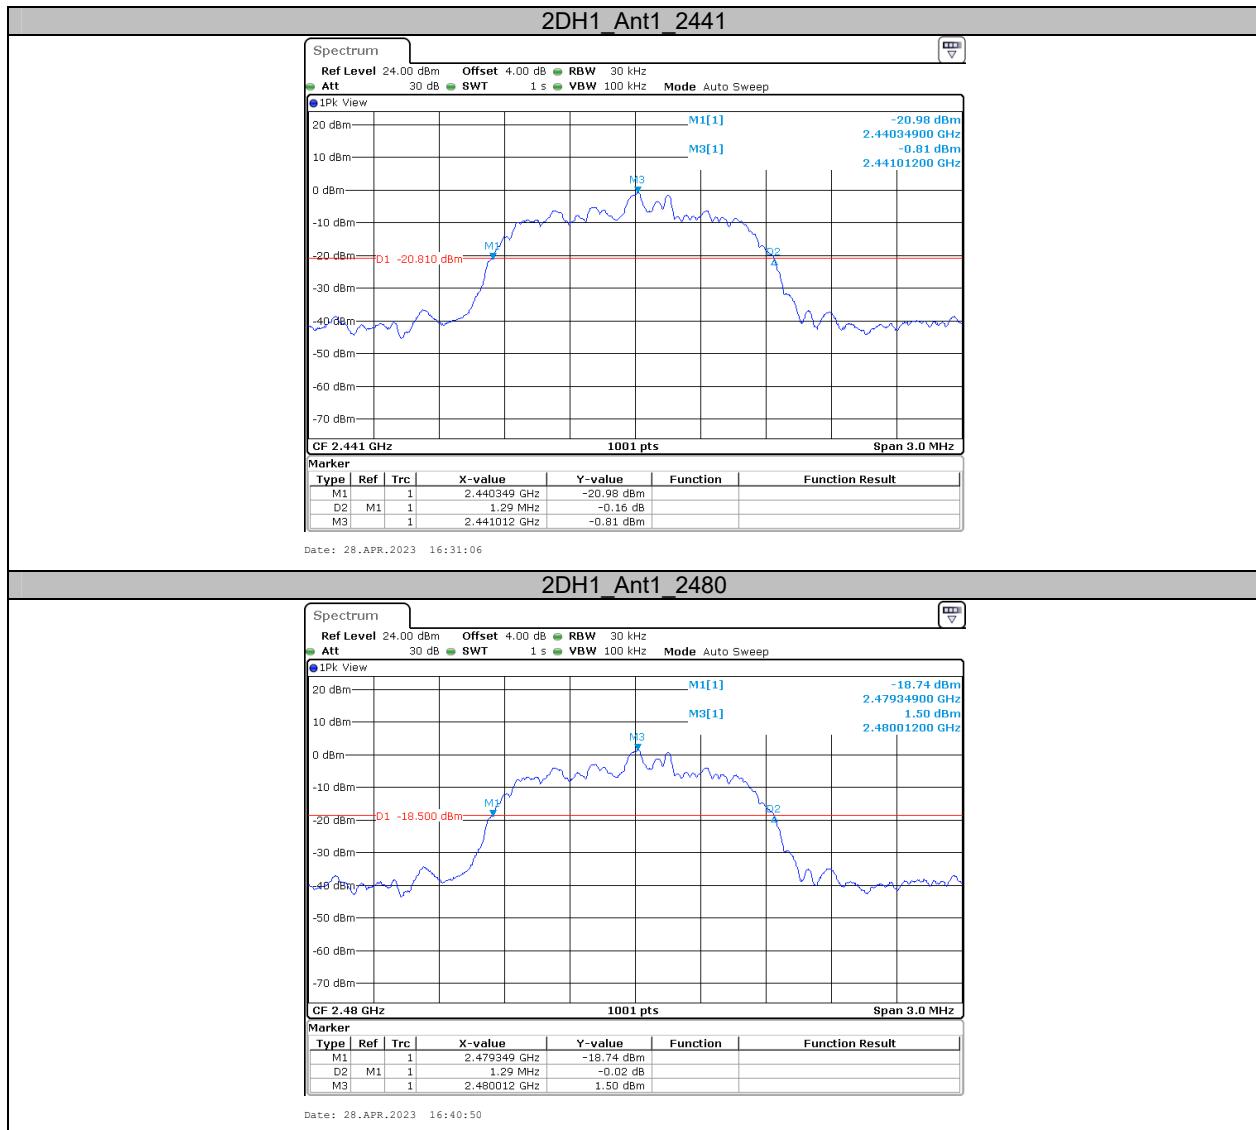

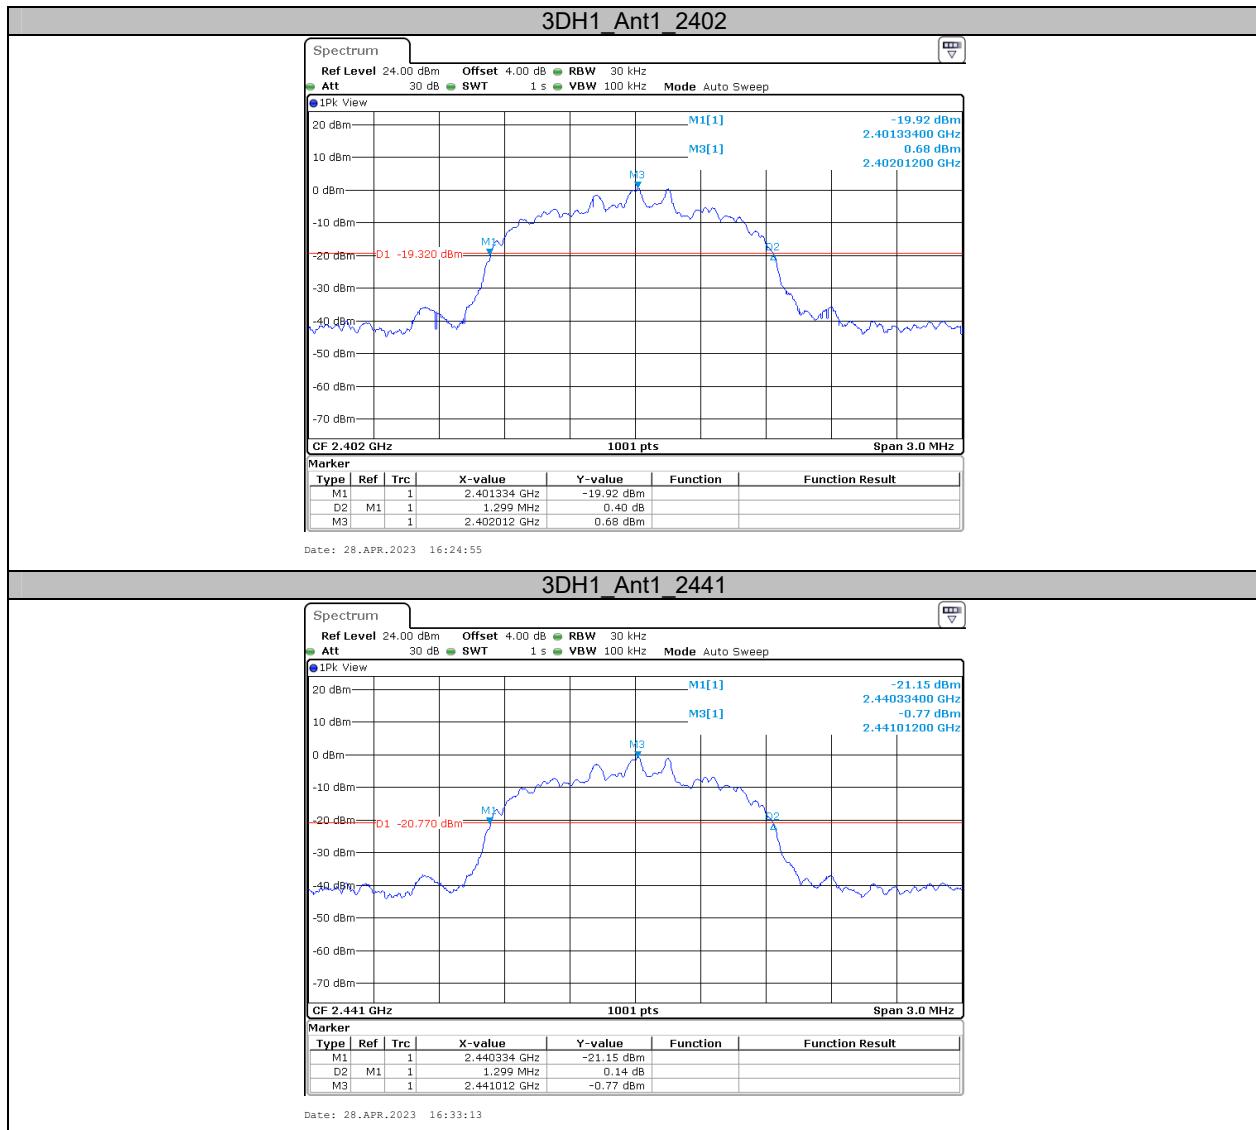


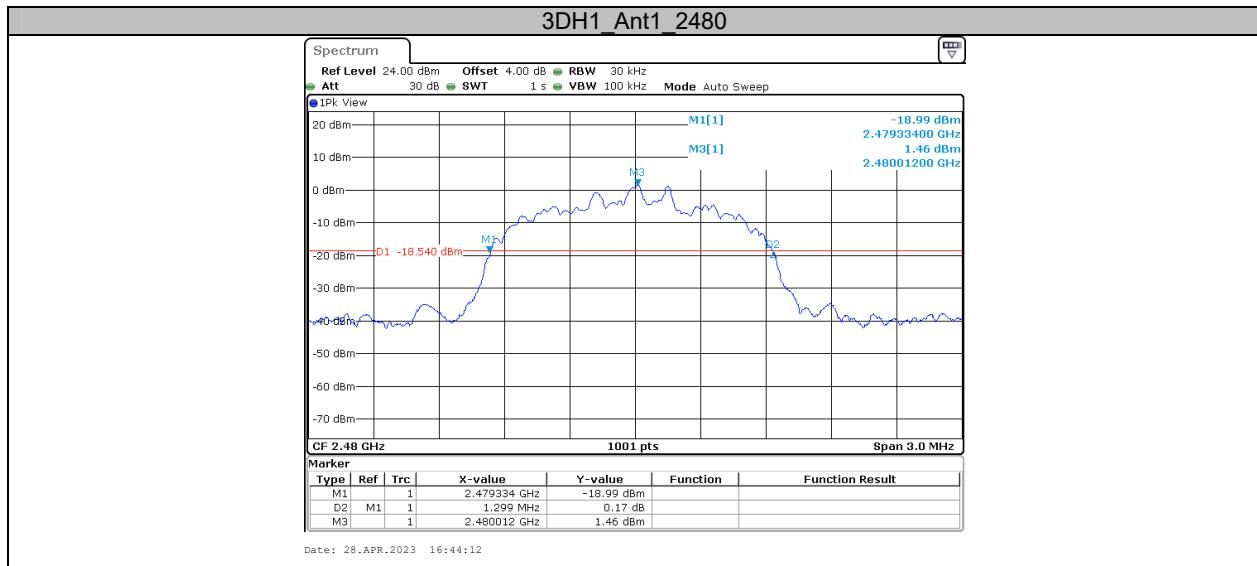



Appendix B: Occupied Channel Bandwidth Test Result


Test Mode	Antenna	Frequency[MHz]	OCB [MHz]	Limit[MHz]	Verdict
DH1	Ant1	2402	0.872	---	---
		2441	0.875	---	---
		2480	0.875	---	---
2DH1	Ant1	2402	1.178	---	---
		2441	1.181	---	---
		2480	1.178	---	---
3DH1	Ant1	2402	1.178	---	---
		2441	1.181	---	---
		2480	1.181	---	---


Test Graphs

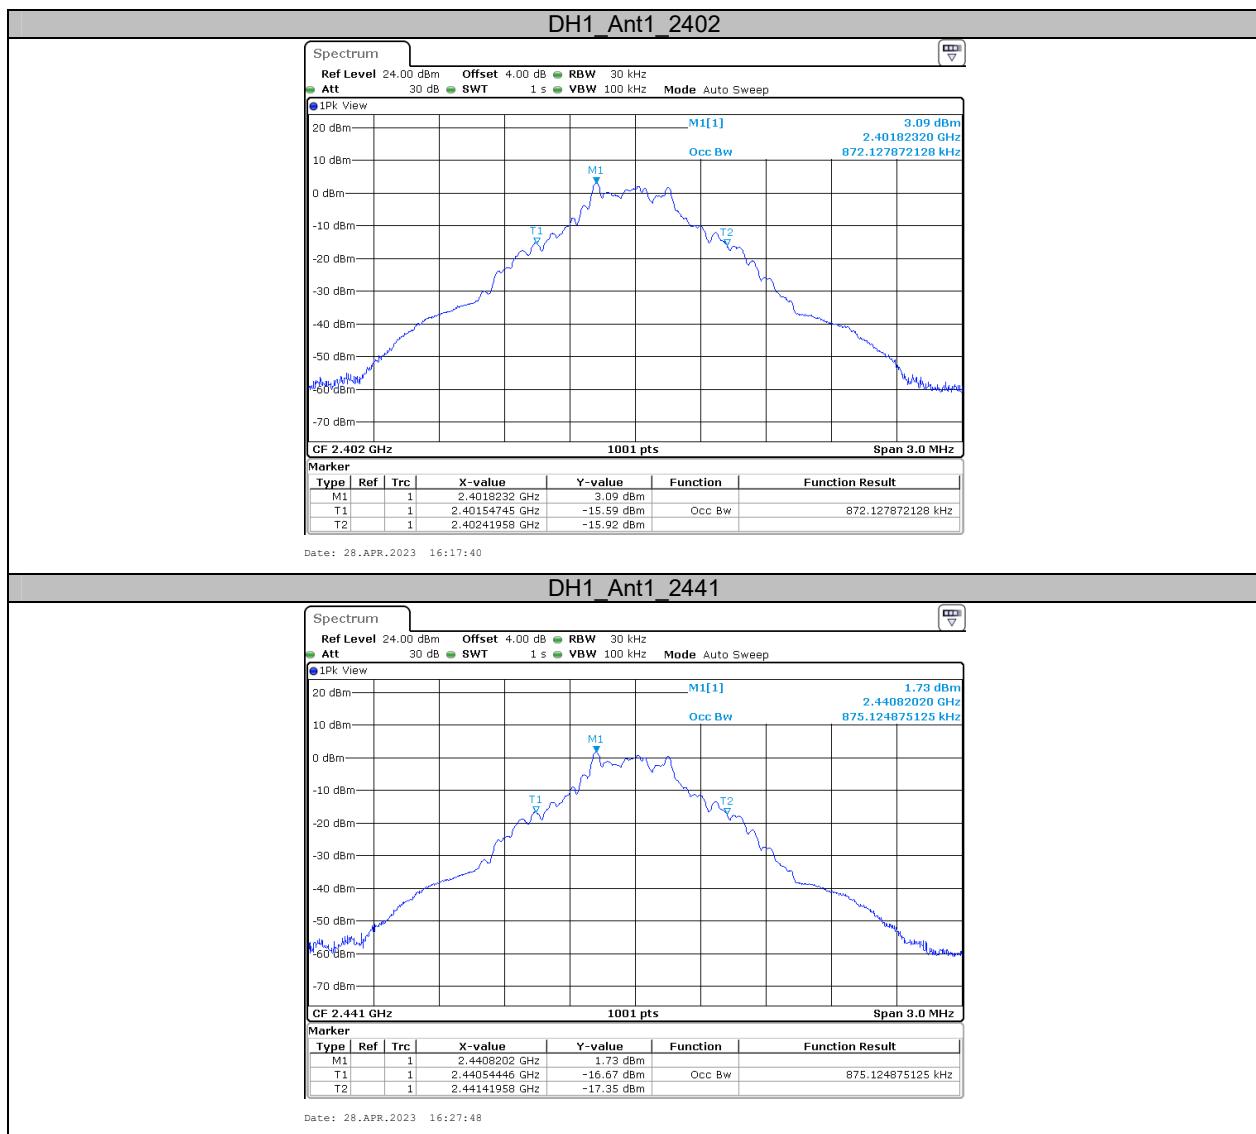

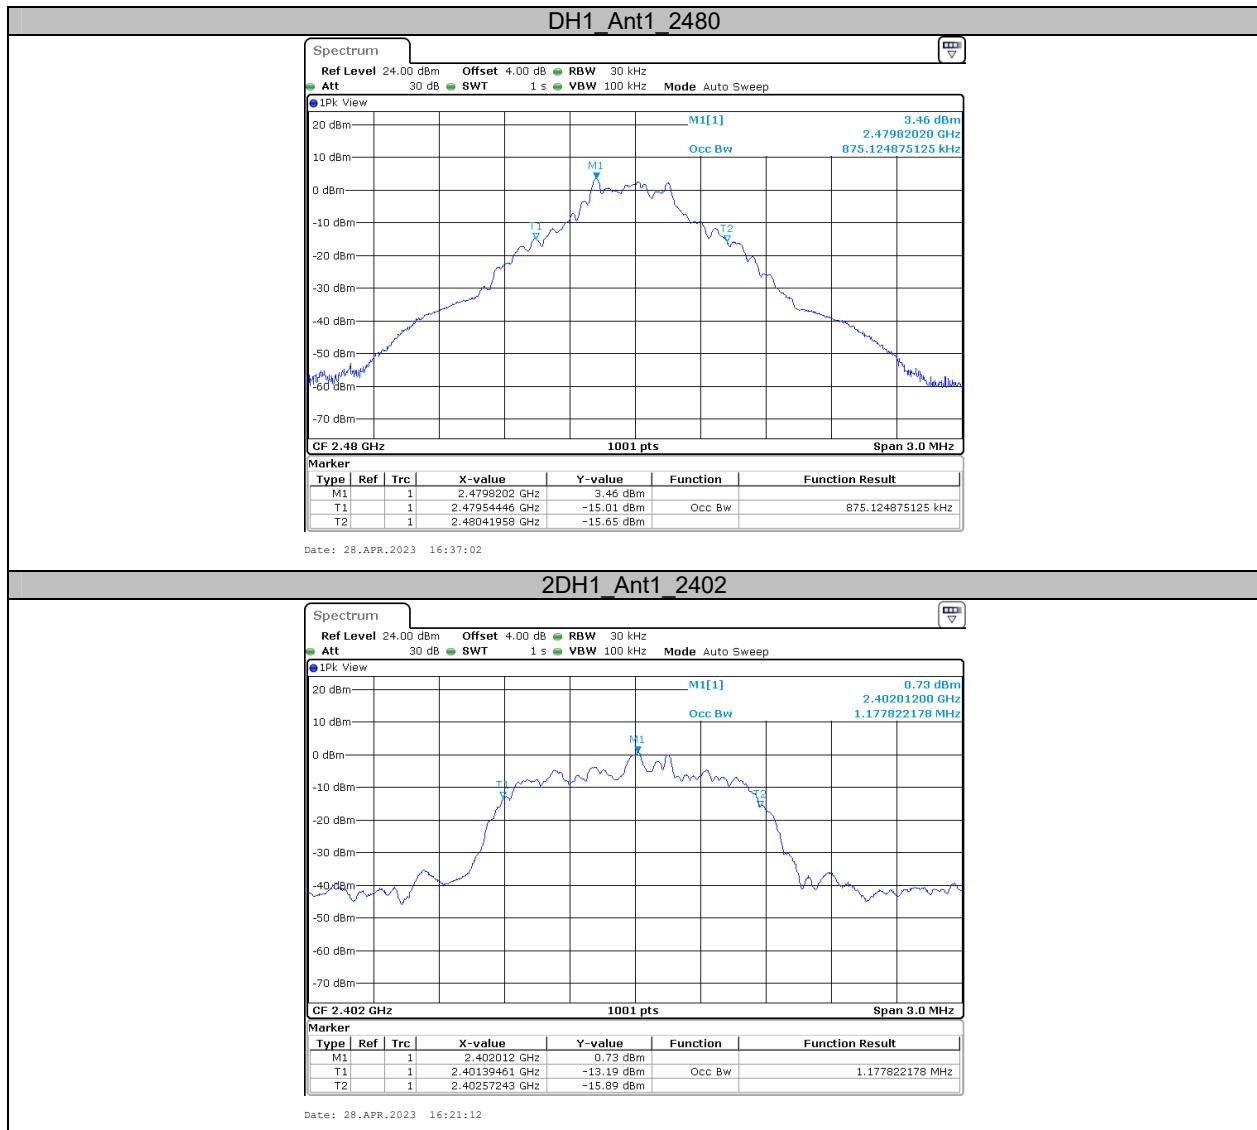

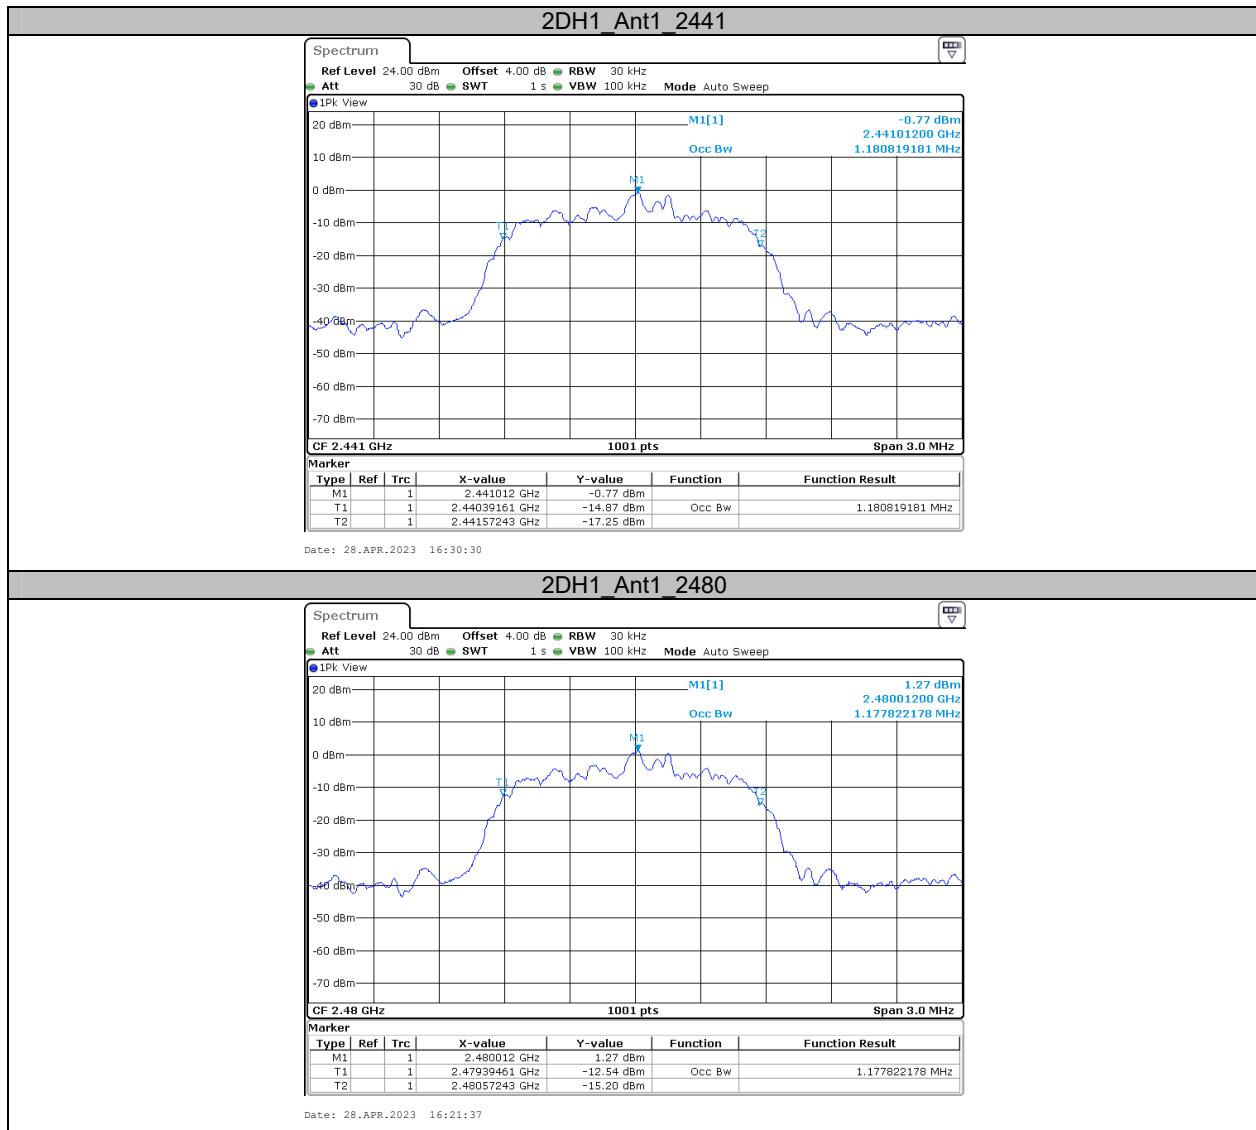

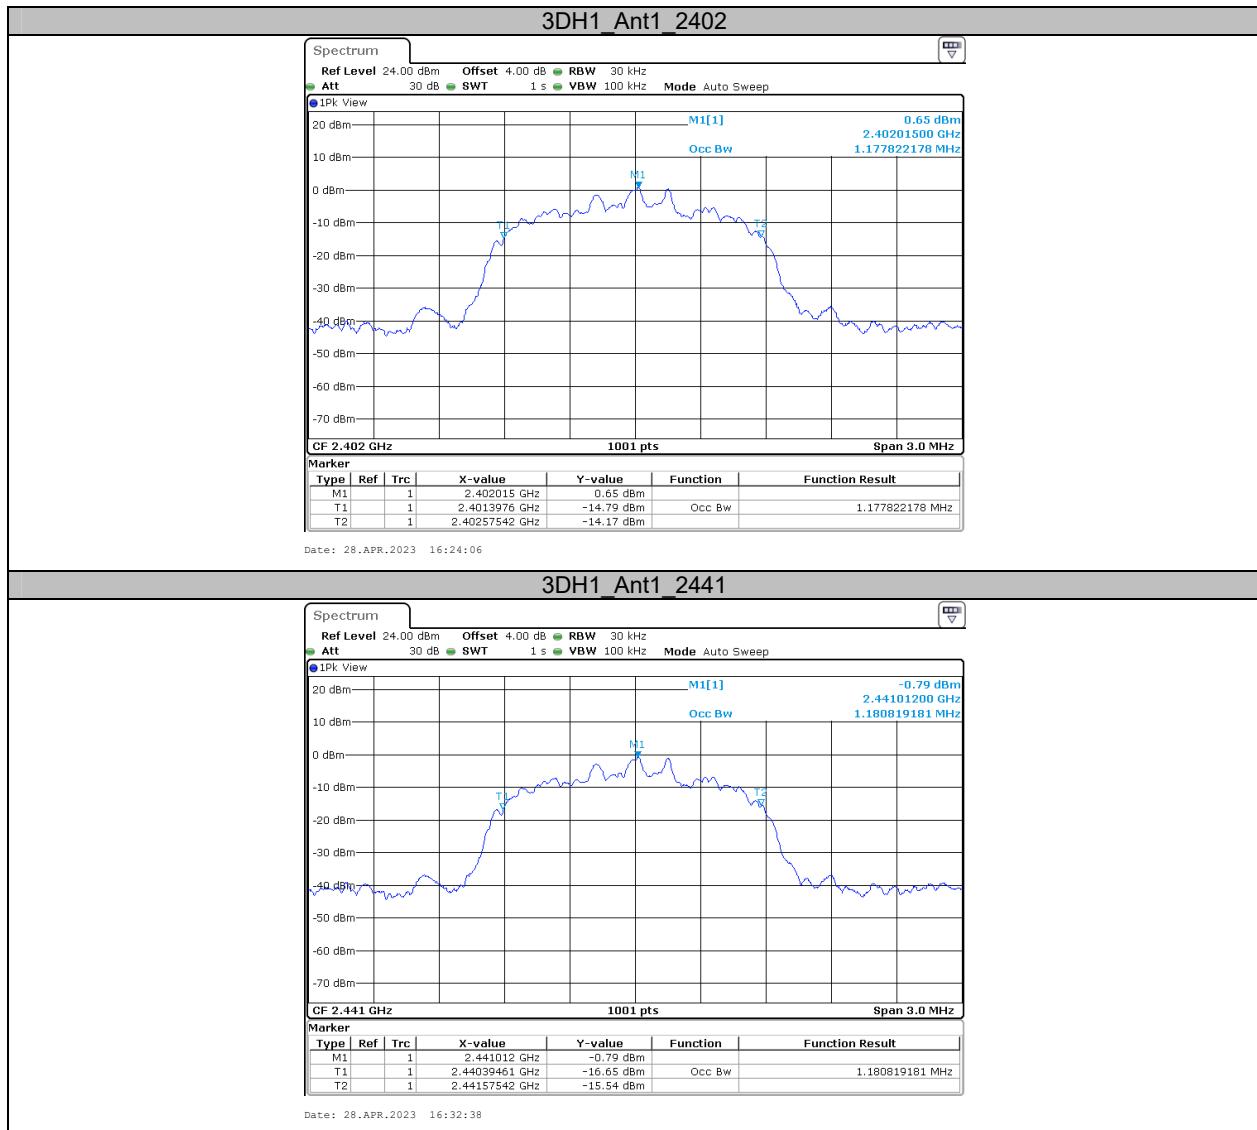


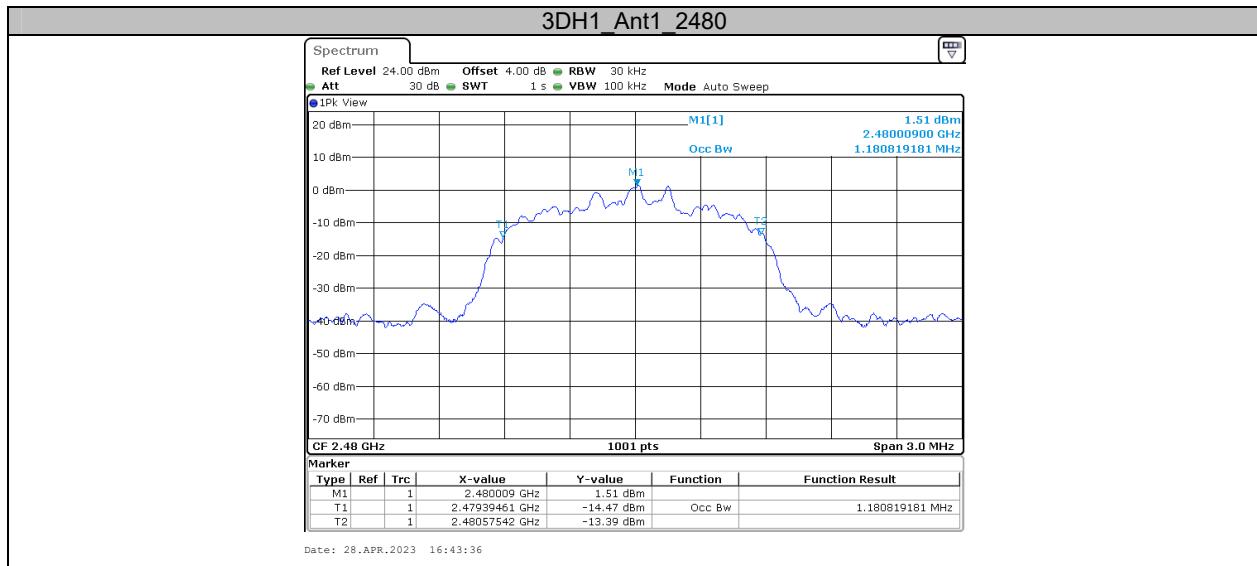



Appendix C: Maximum conducted output power Test Result Peak


Mode	Channel	Frequency (MHz)	Peak Output Power	
			(dBm)	Limit (dBm)
BDR (GFSK)	Low	2402	4.46	21
	Middle	2441	3.06	21
	High	2480	4.78	21
EDR ($\pi/4$ -DQPSK)	Low	2402	4.41	21
	Middle	2441	2.89	21
	High	2480	5.27	21
EDR (8DPSK)	Low	2402	4.69	21
	Middle	2441	3.18	21
	High	2480	5.39	21

Test Graphs

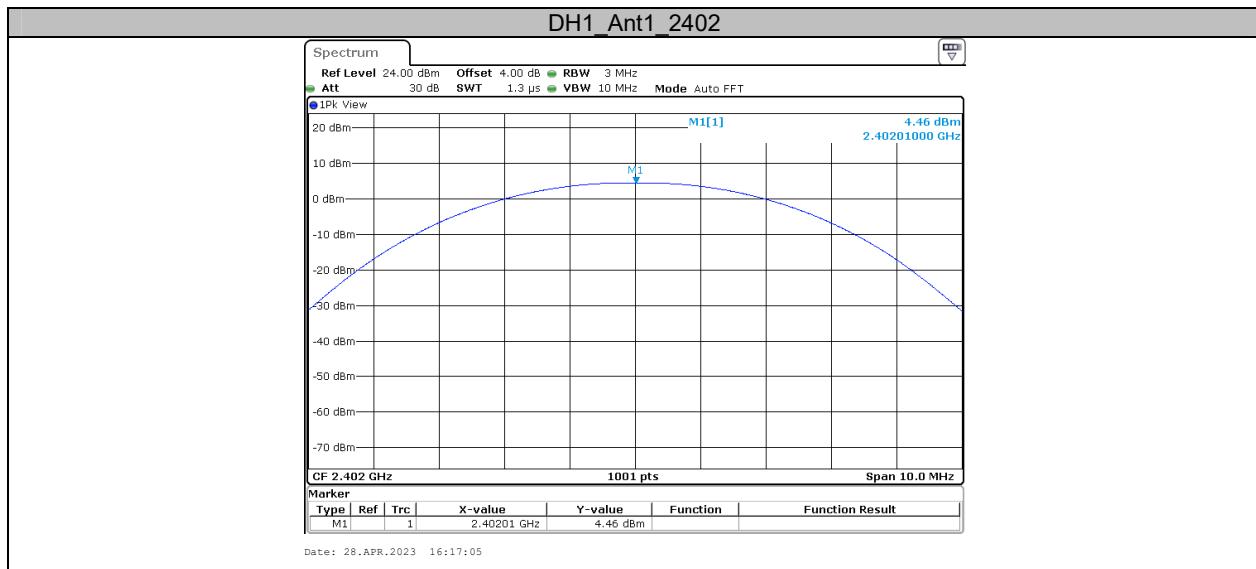

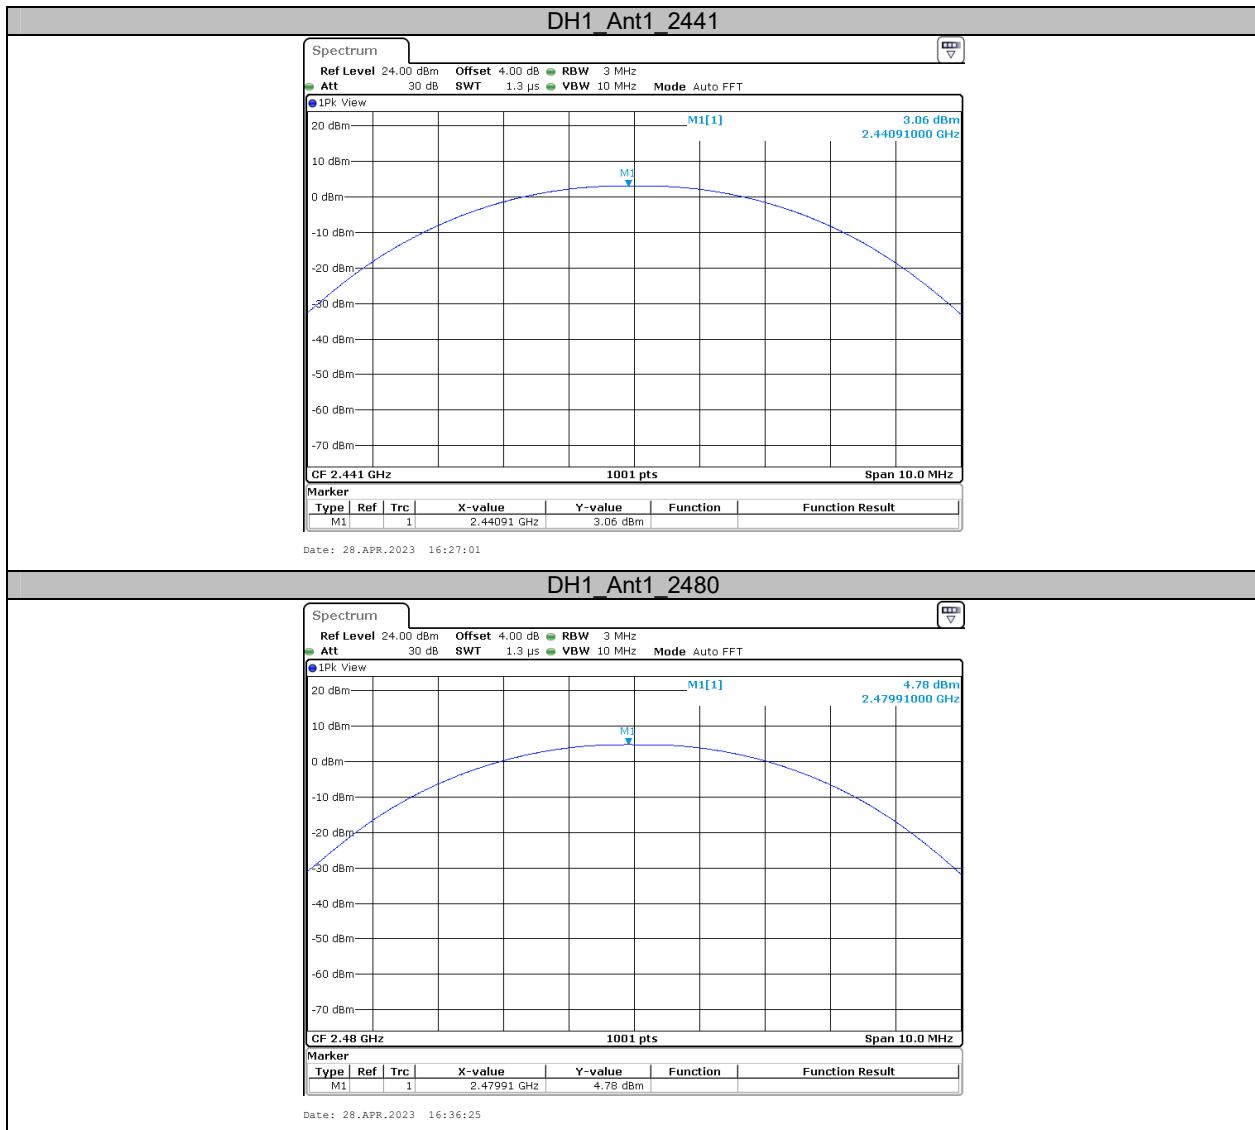

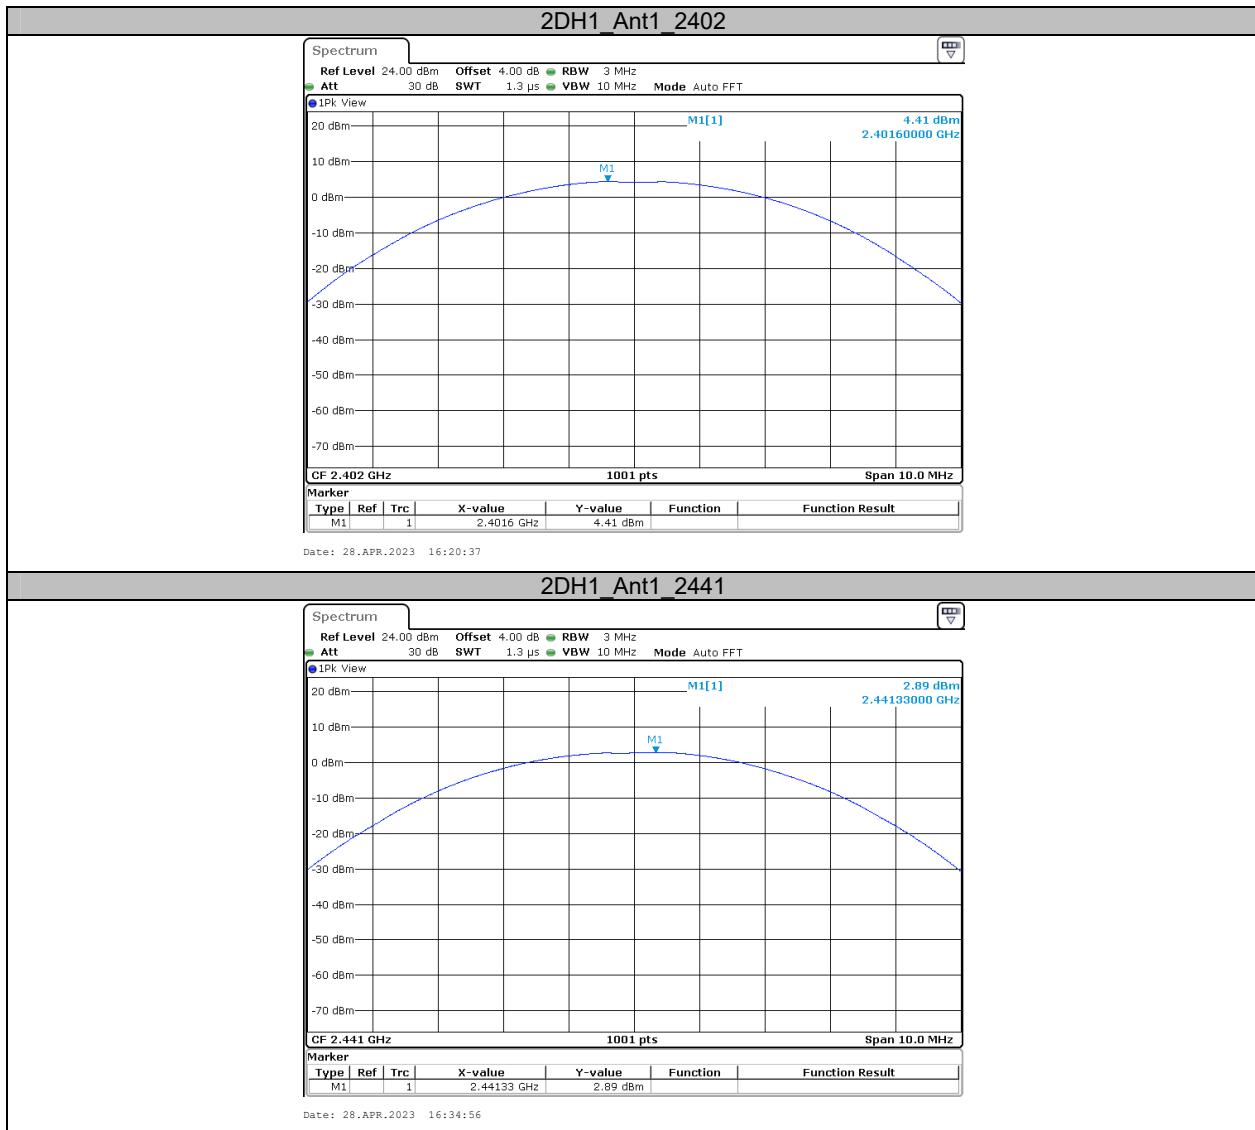

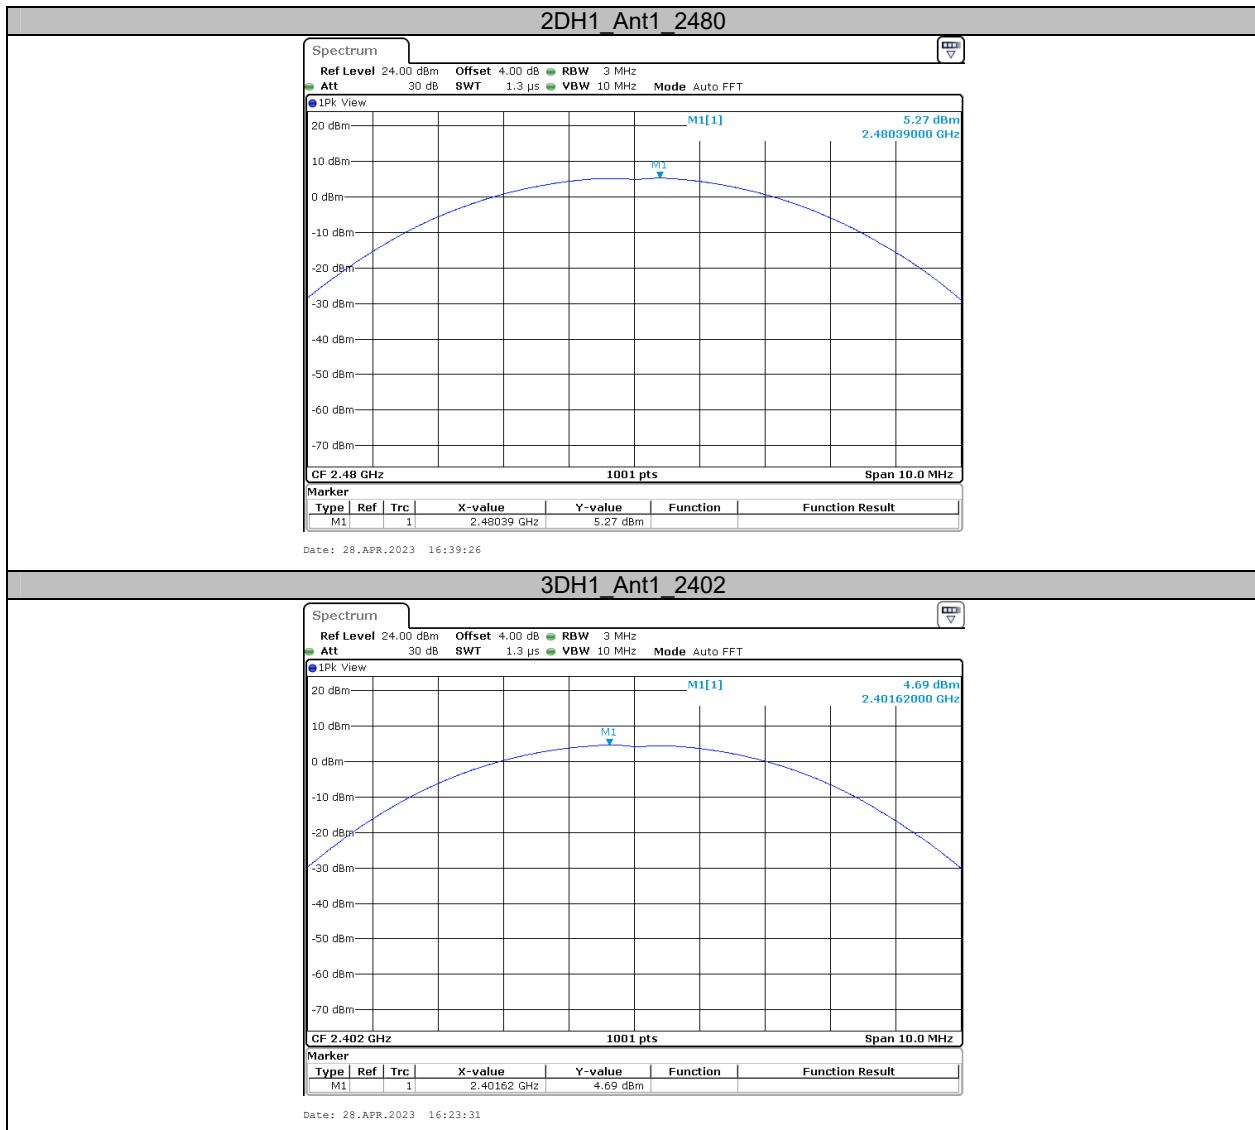






Appendix D: Carrier frequency separation Test Result

Test Mode	Channel Separation (MHz)	20 dBc BW (MHz)	Two-thirds of the 20 dB bandwidth (MHz)	Channel Separation Limit
BDR(GFSK)				
Hopping	1.004	0.966	0.644	> two-thirds of the 20 dB bandwidth
EDR($\pi/4$-DQPSK)				
Hopping	1.004	1.290	0.860	> two-thirds of the 20 dB bandwidth
EDR(8DPSK)				
Hopping	0.968	1.299	0.866	> two-thirds of the 20 dB bandwidth

Test Graphs

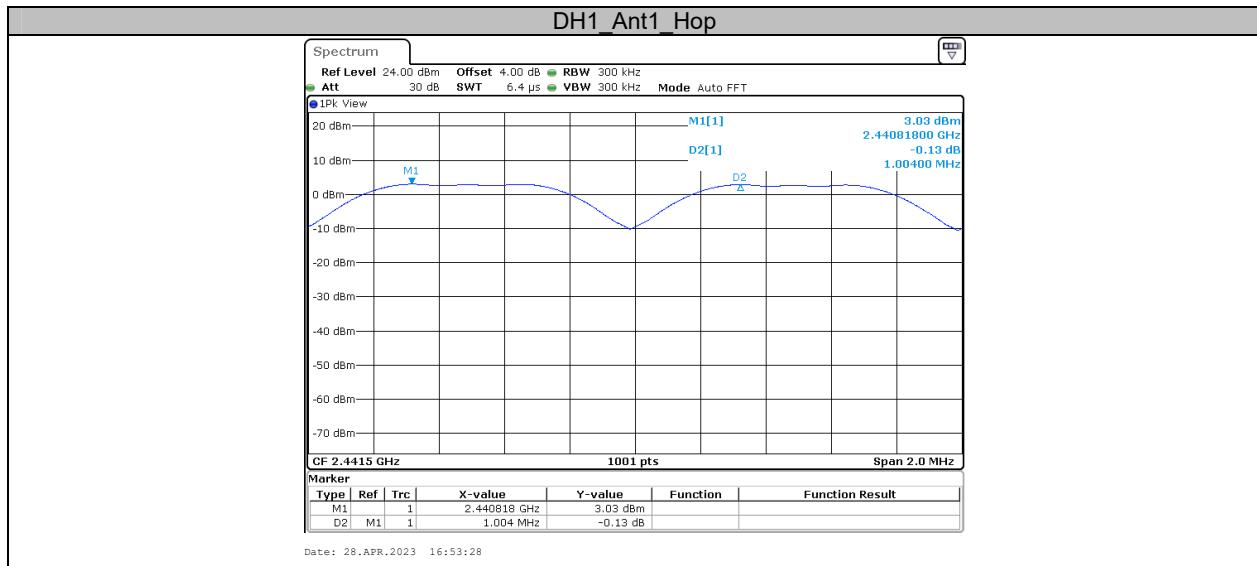

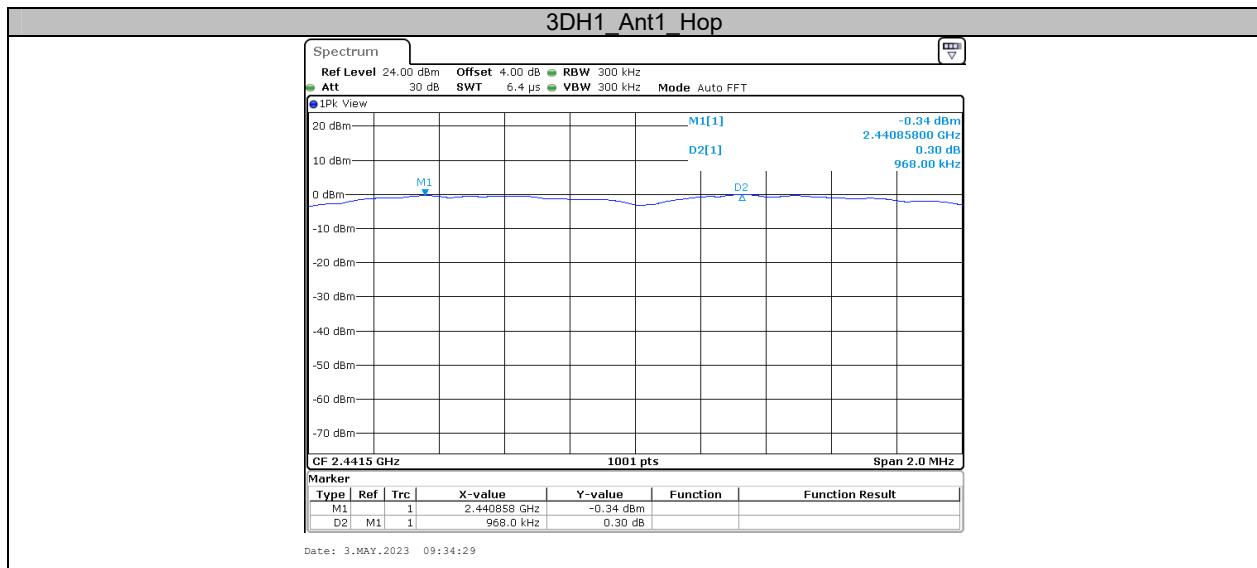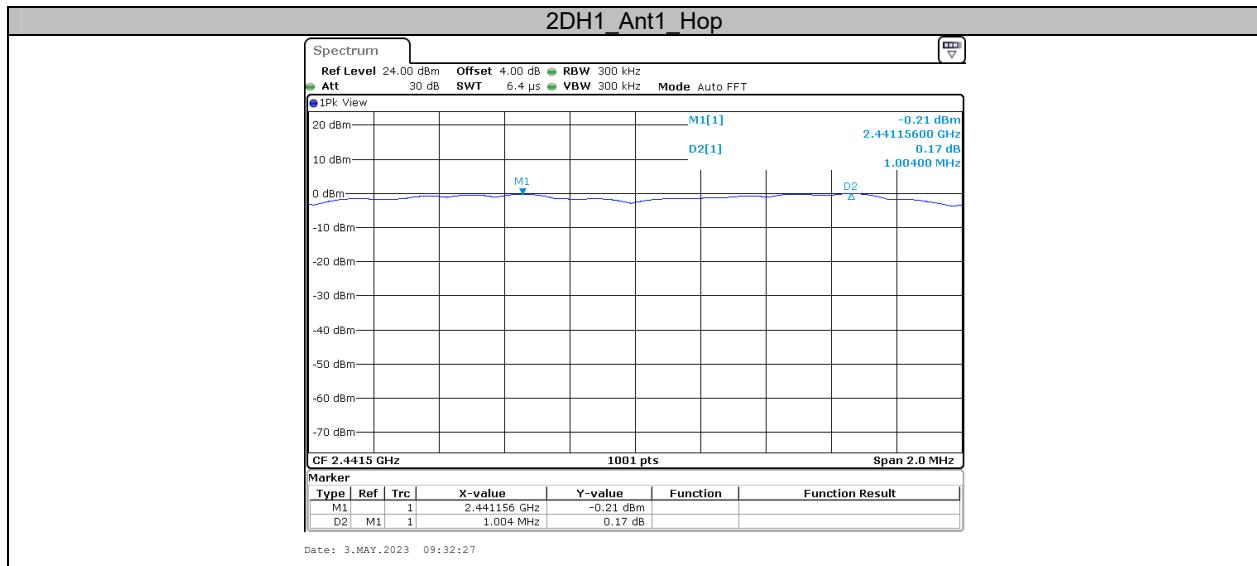

**Appendix E: Time of occupancy
Test Result**


Test Mode	Channel	Pulse Time [ms]	Total Hops [Num]	Result[s]	Limit[s]	Verdict
DH1	Hop	0.406	320	0.130	<=0.4	PASS
DH3	Hop	1.662	170	0.283	<=0.4	PASS
DH5	Hop	2.910	120	0.349	<=0.4	PASS
2DH1	Hop	0.399	320	0.128	<=0.4	PASS
2DH3	Hop	1.650	150	0.248	<=0.4	PASS
2DH5	Hop	2.900	130	0.377	<=0.4	PASS
3DH1	Hop	0.397	320	0.127	<=0.4	PASS
3DH3	Hop	1.650	150	0.248	<=0.4	PASS
3DH5	Hop	2.900	110	0.319	<=0.4	PASS


Note 1: A period time=0.4*79=31.6(S), Result= Pulse Time *Total hops


Note 2: Total hops=Hopping Number in 3.16s*10


Note 3: Hopping Number in 3.16s=Total of highest signals in 3.16s (Second high signals were other channel)


Test Graphs

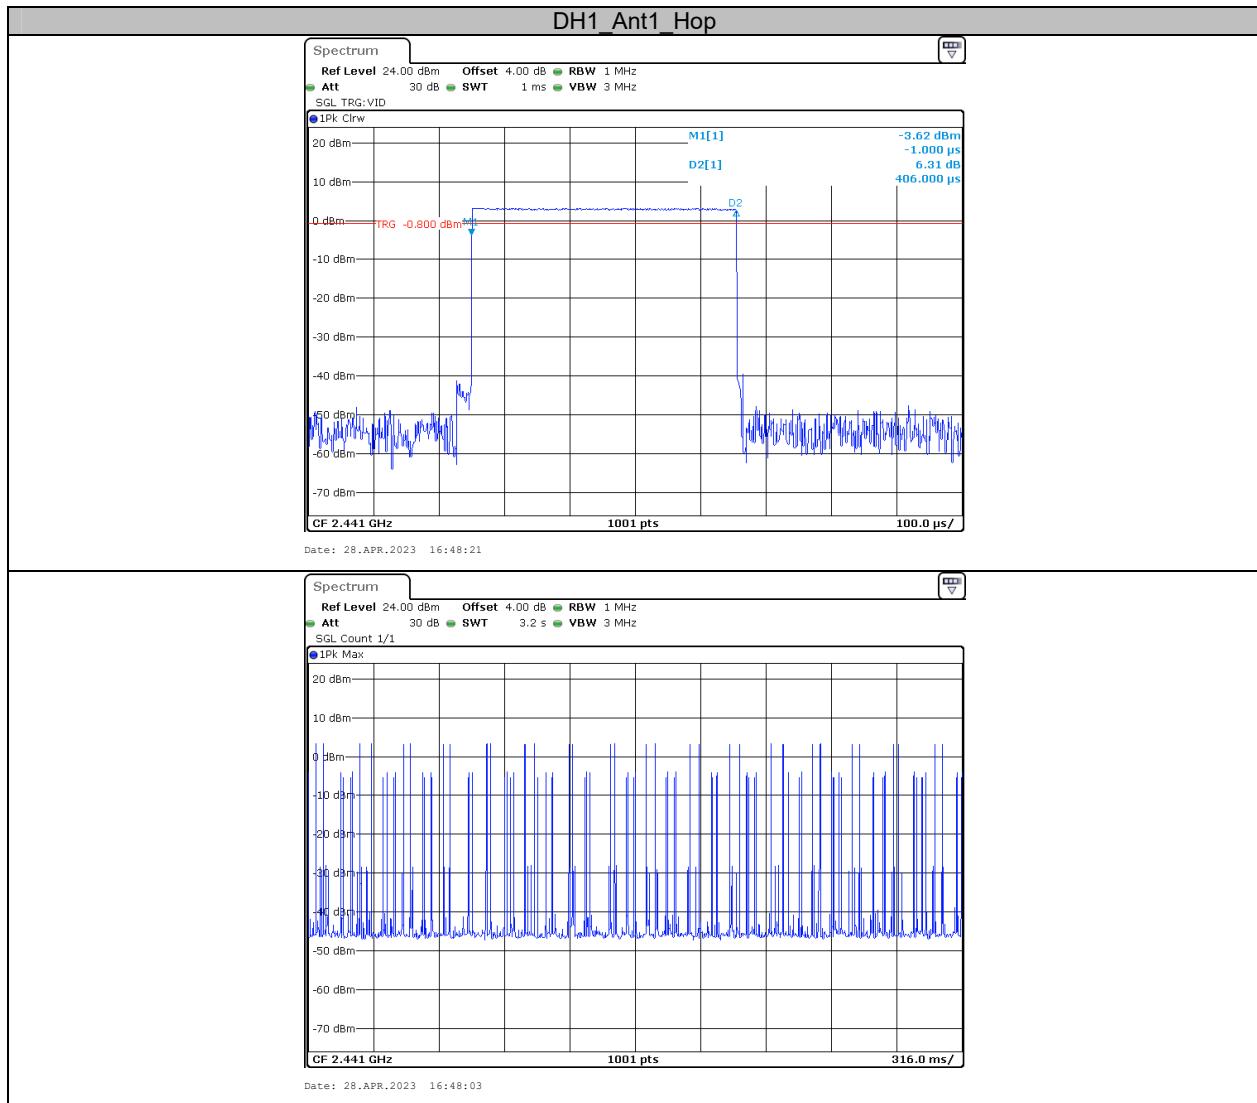


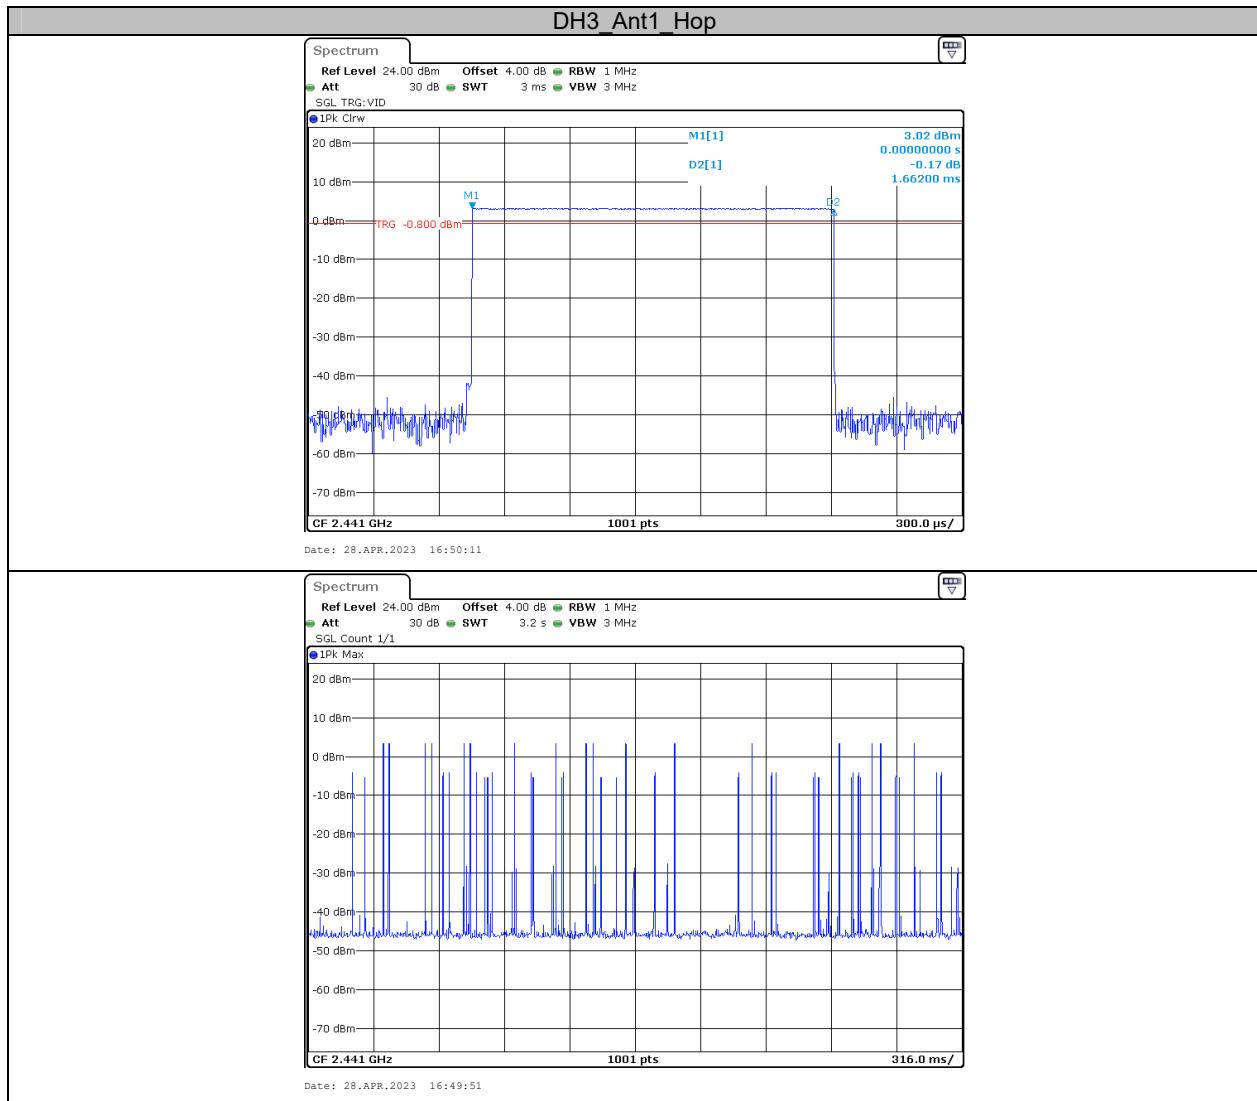


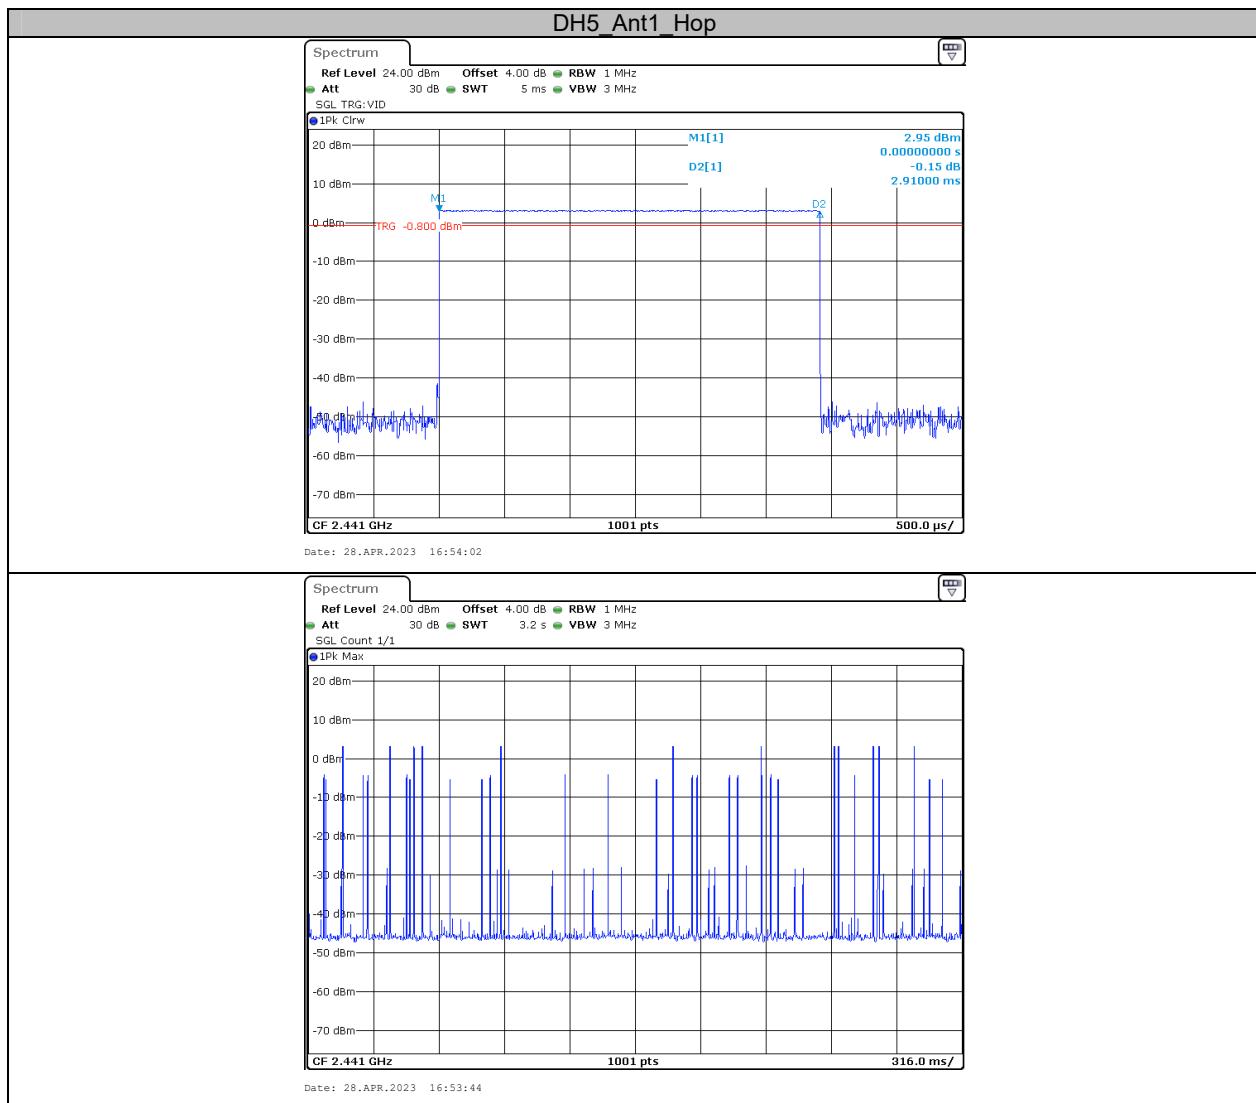


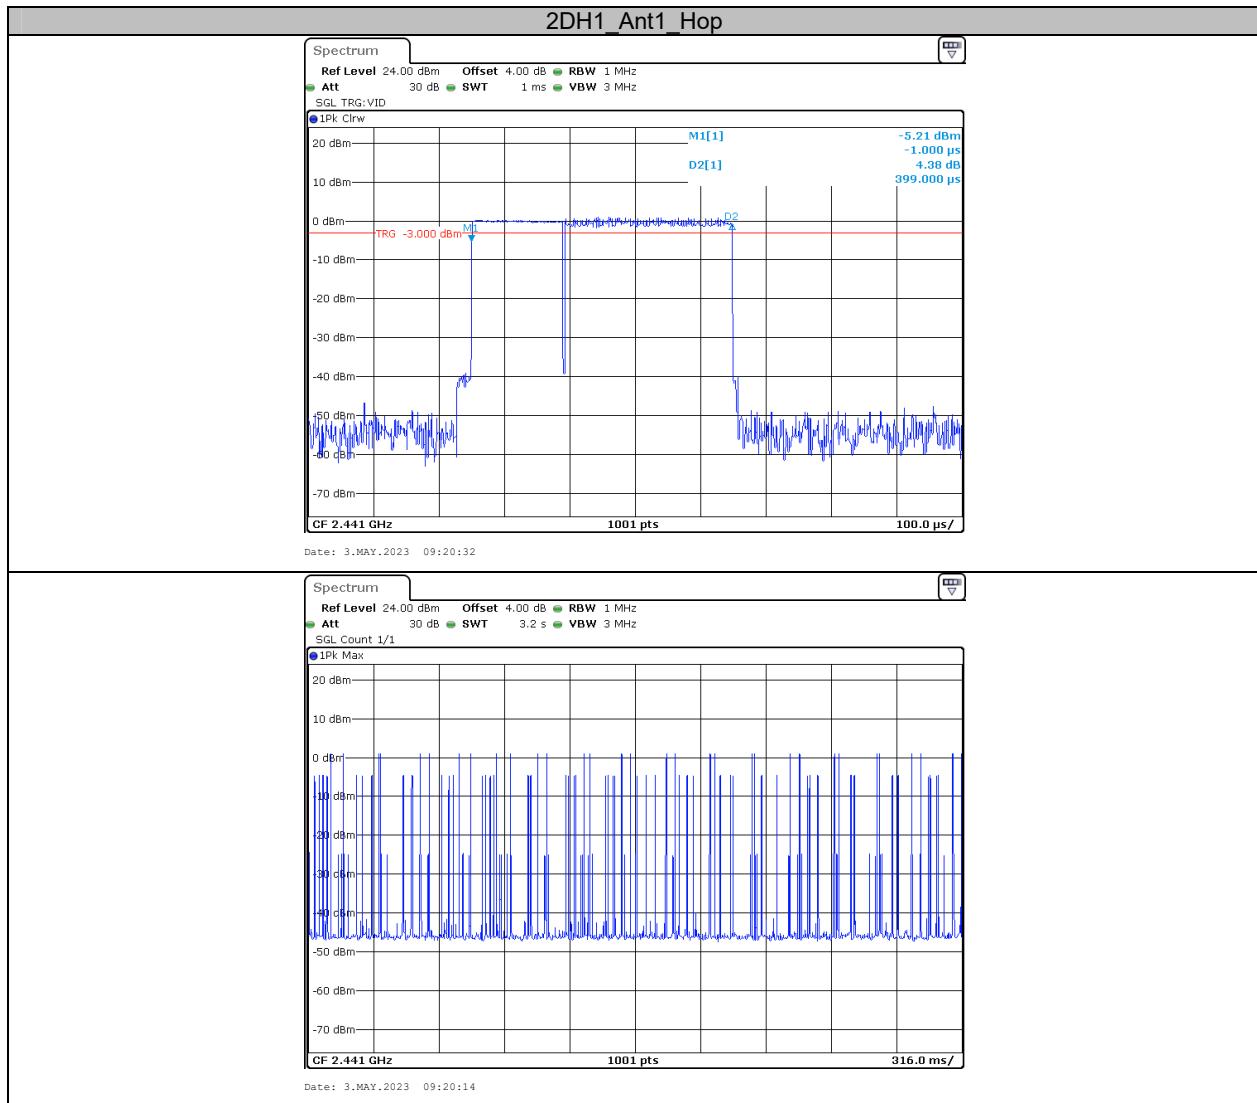


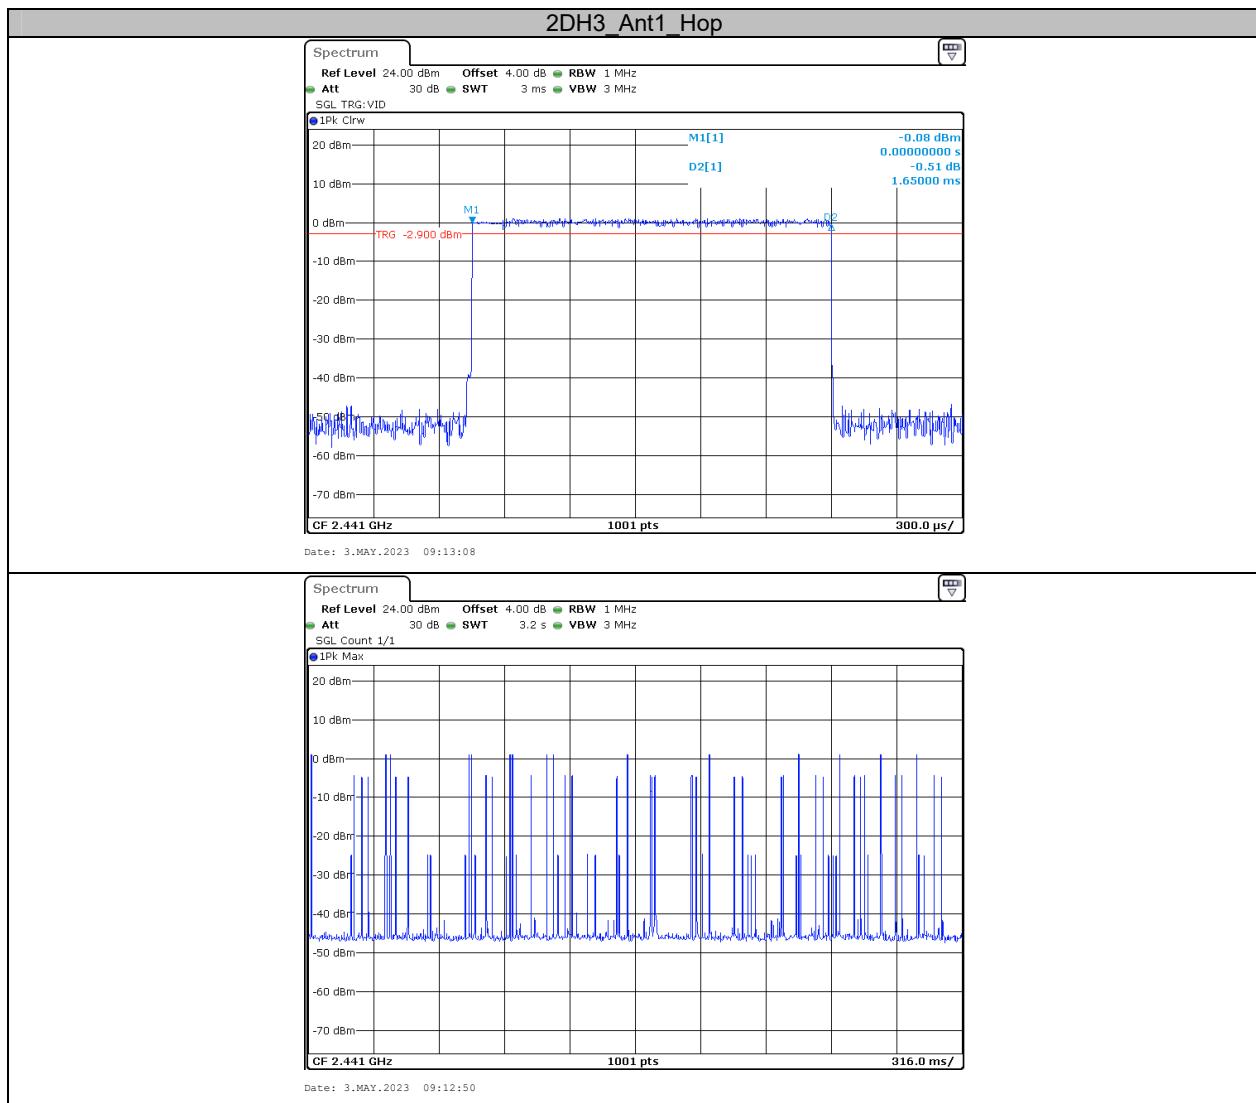

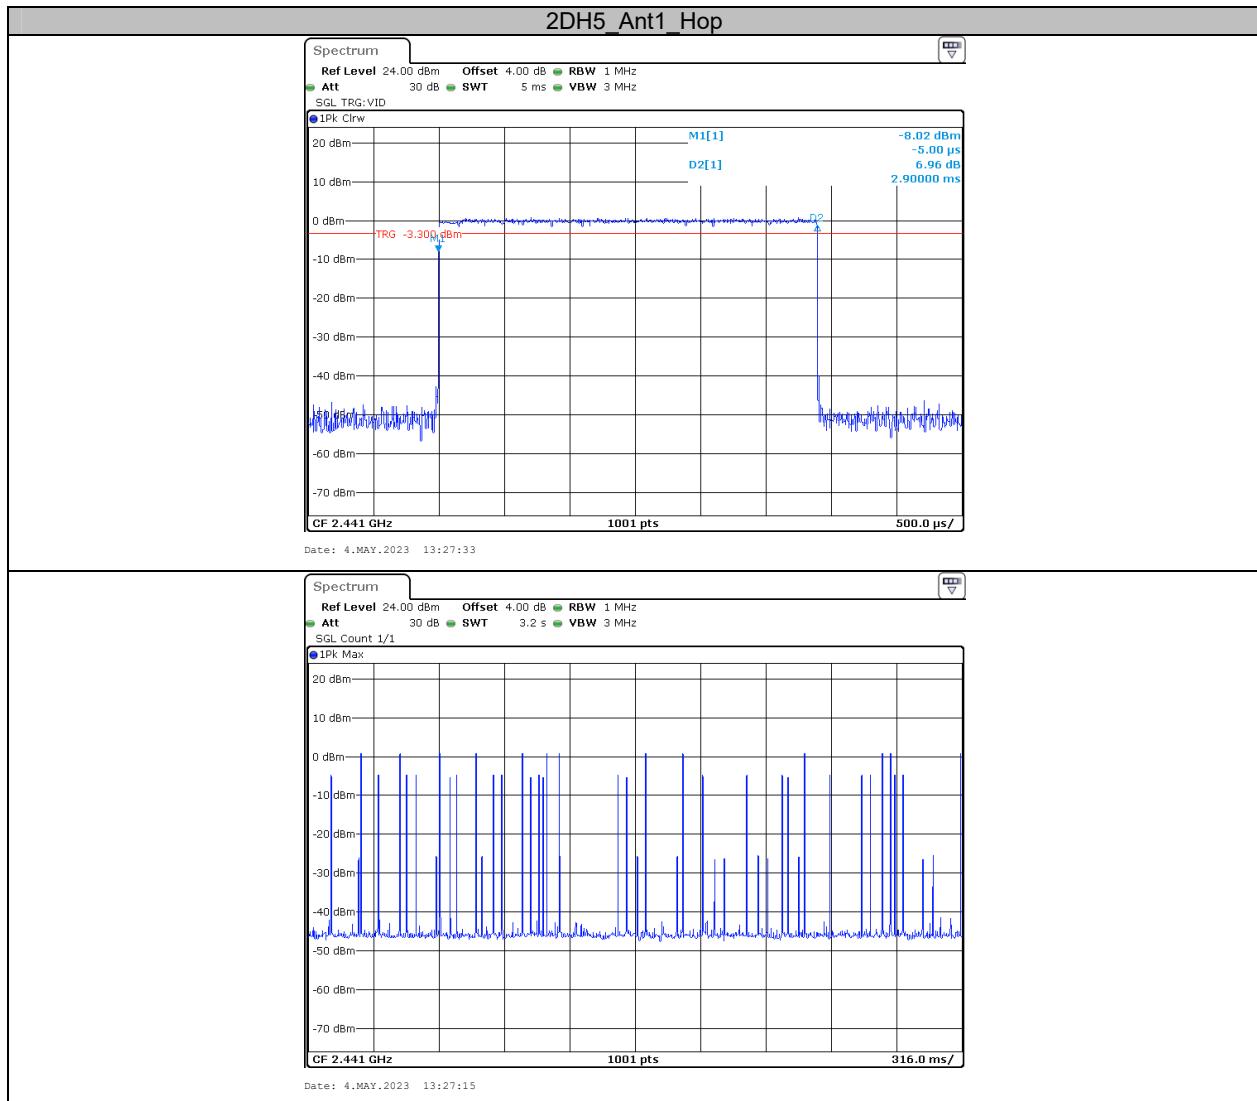

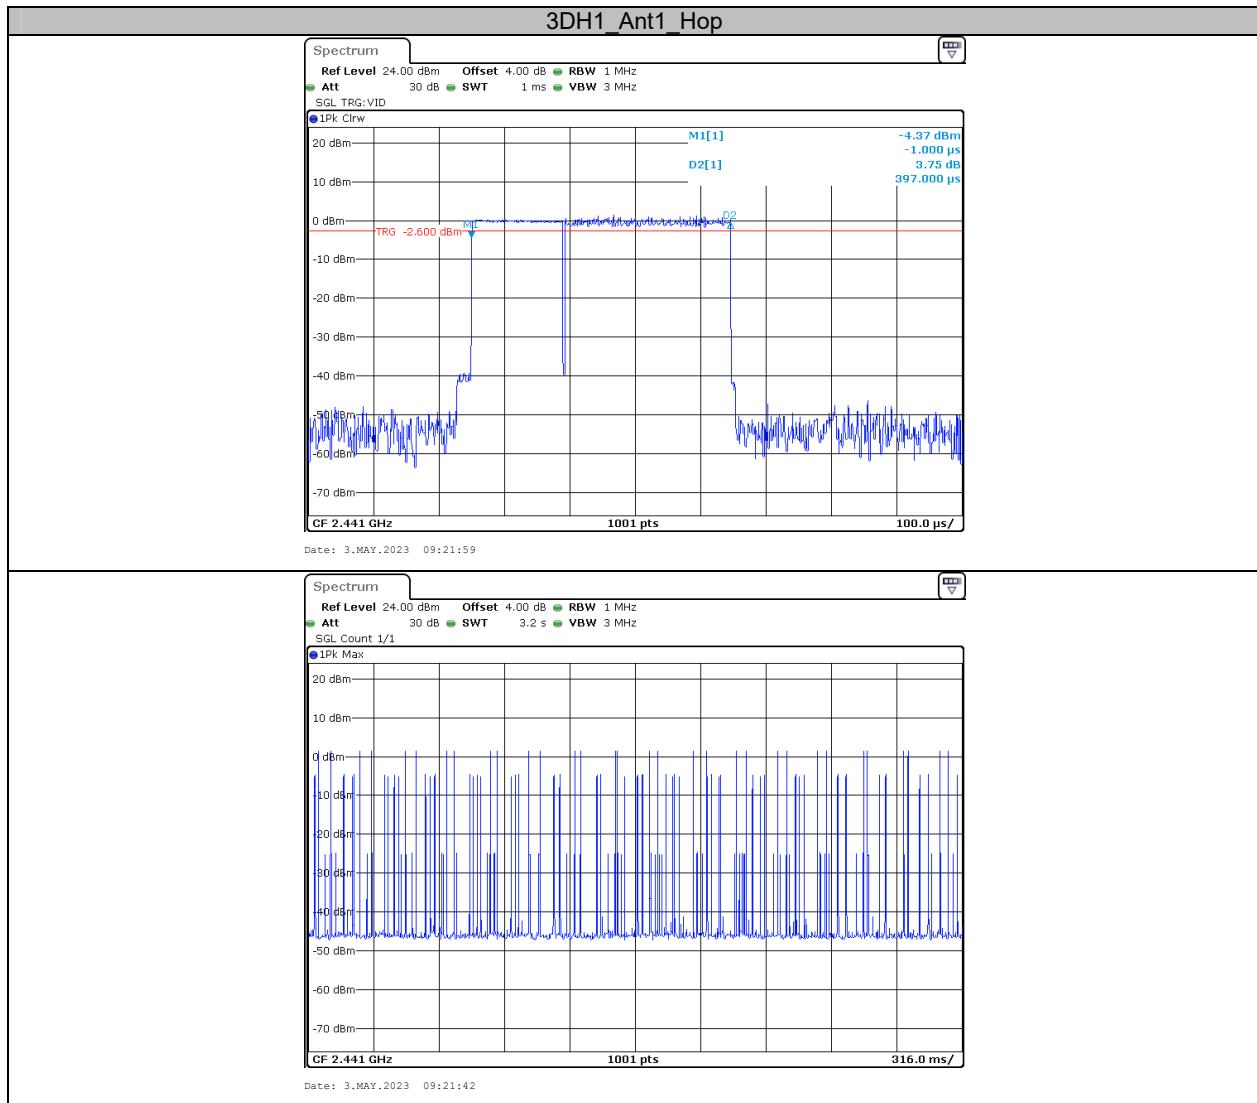

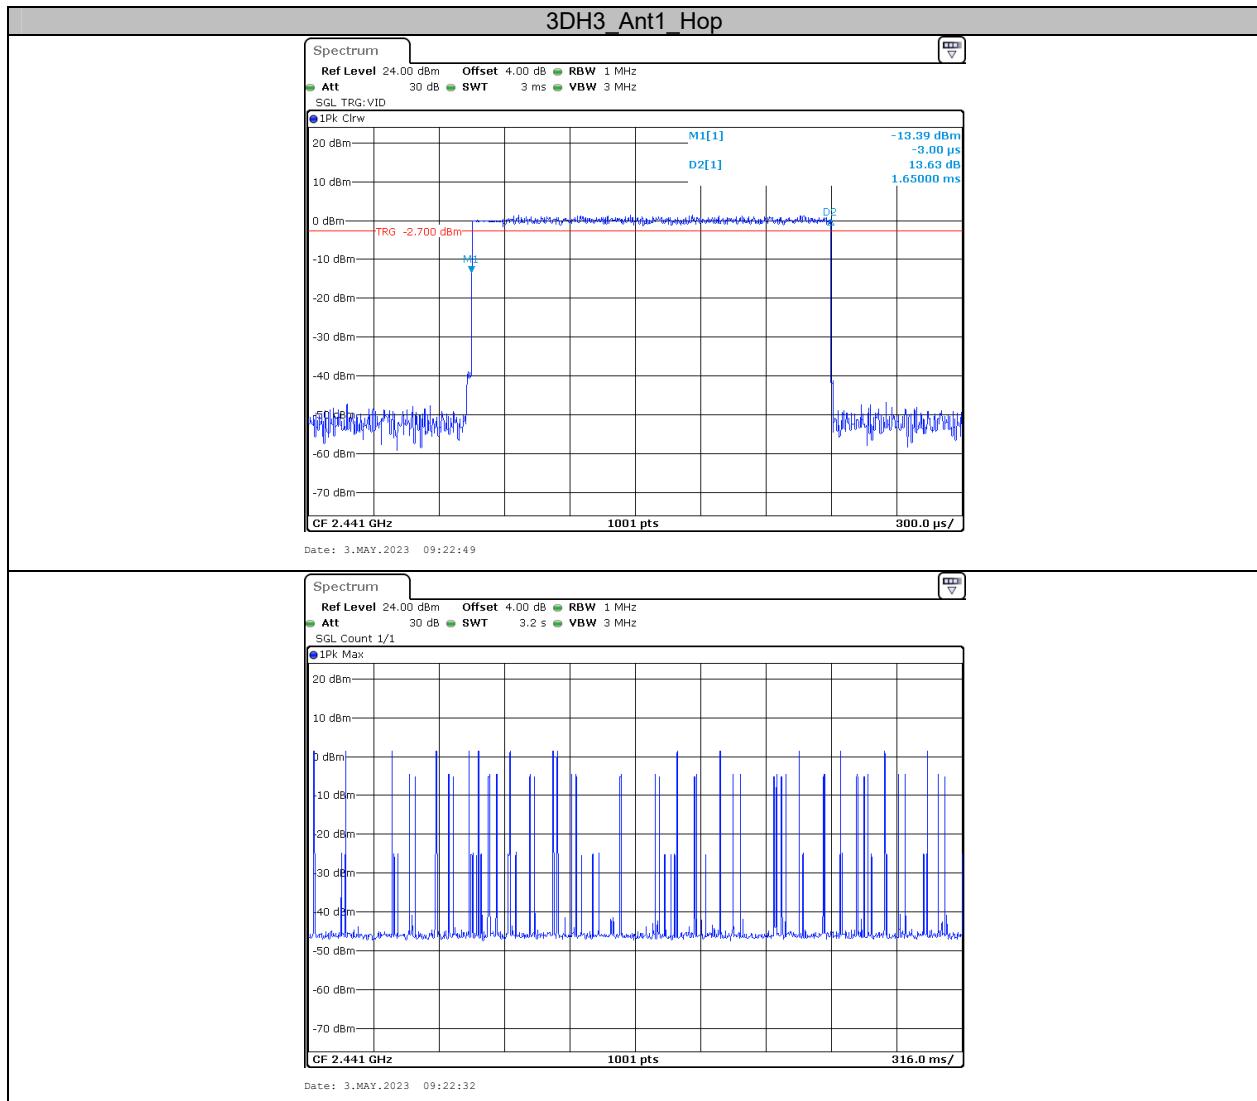

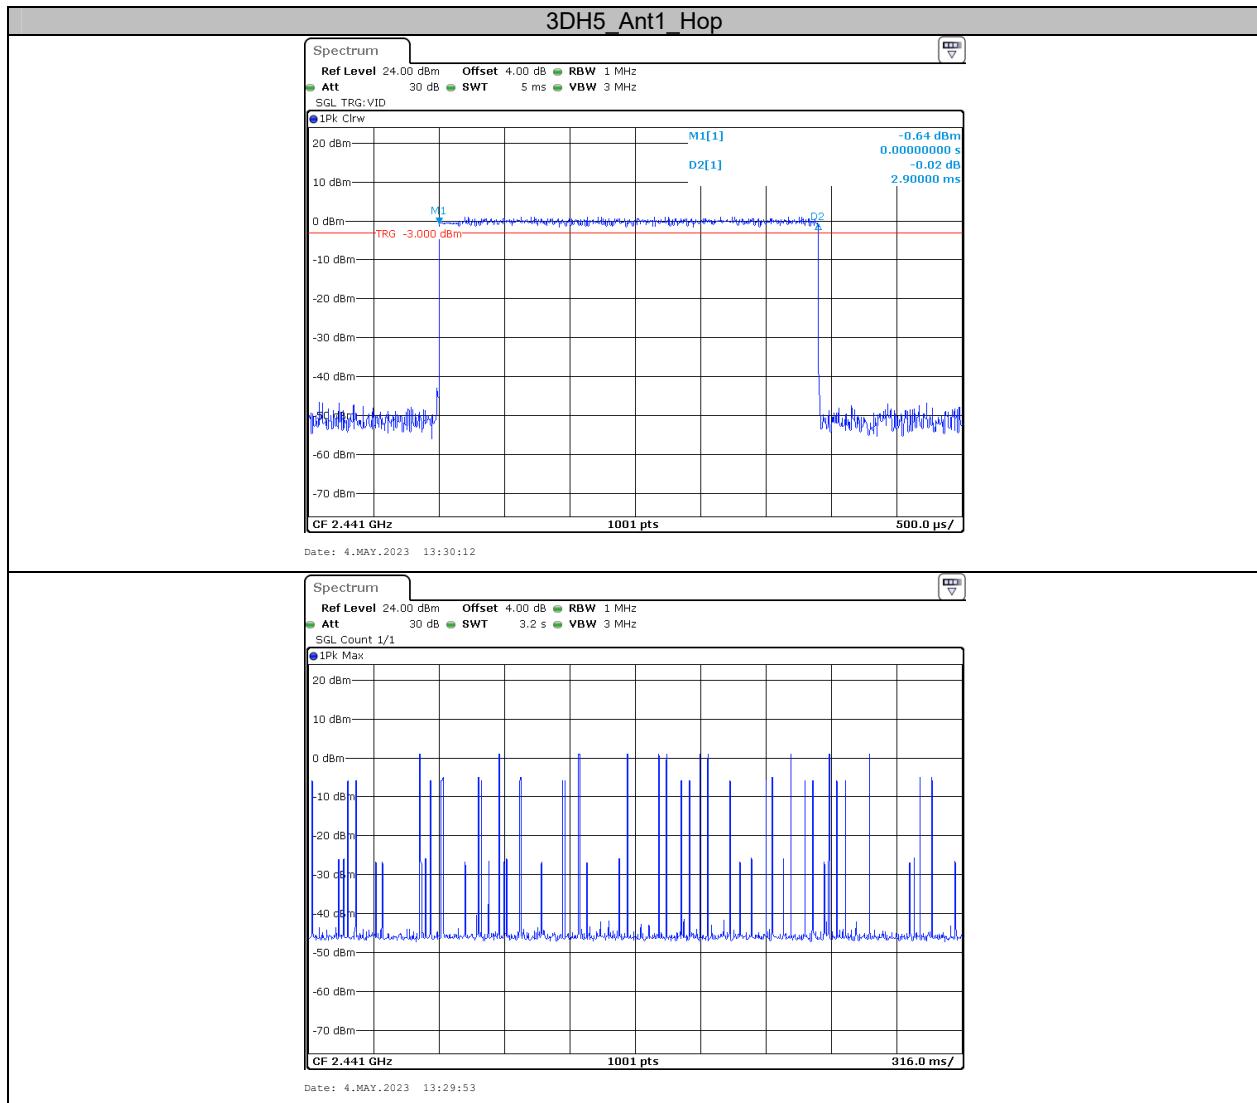



Appendix F: Number of hopping channels

Test Result

Mode	Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
BDR (GFSK)	2400-2483.5	79	≥ 15
EDR ($\pi/4$ -DQPSK)	2400-2483.5	79	≥ 15
EDR (8DPSK)	2400-2483.5	79	≥ 15


Test Graphs

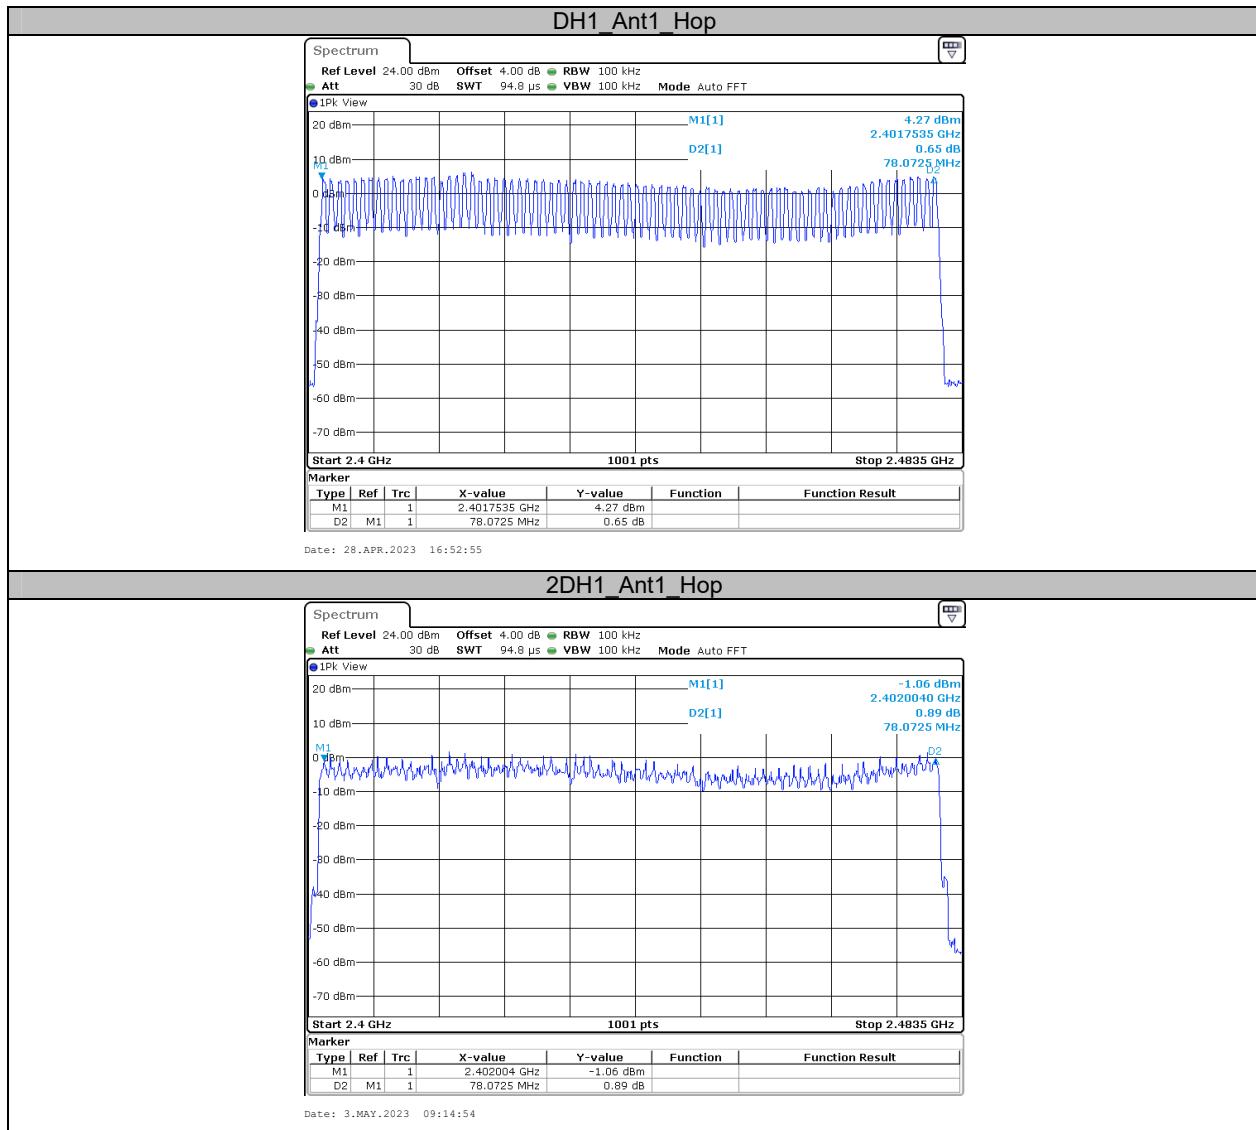


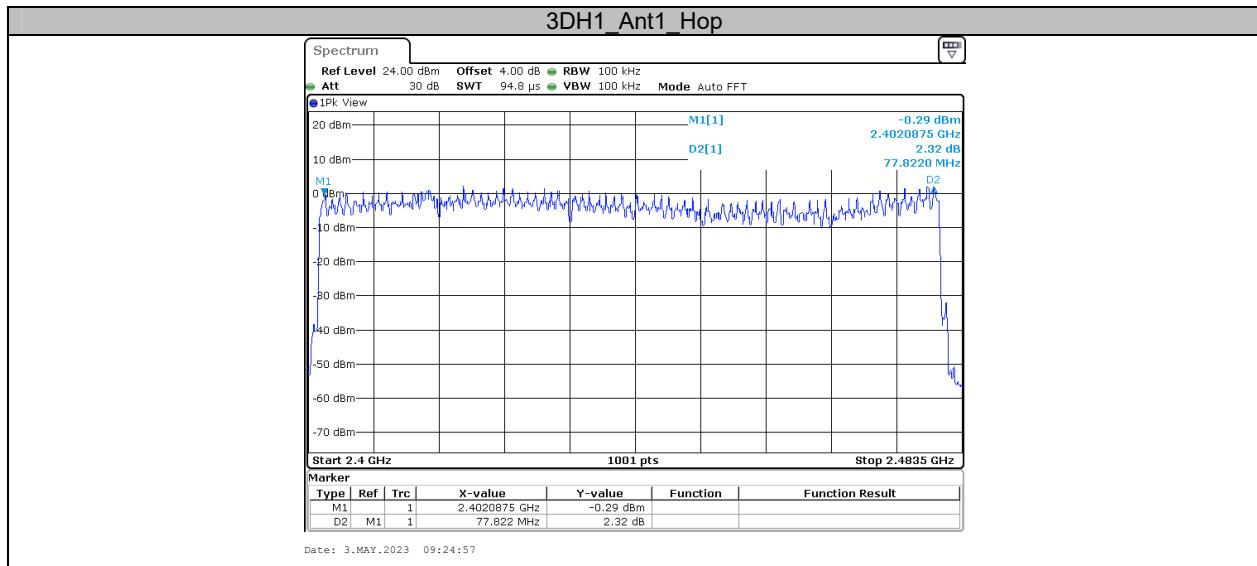



Appendix G: Band edge measurements


Test Graphs

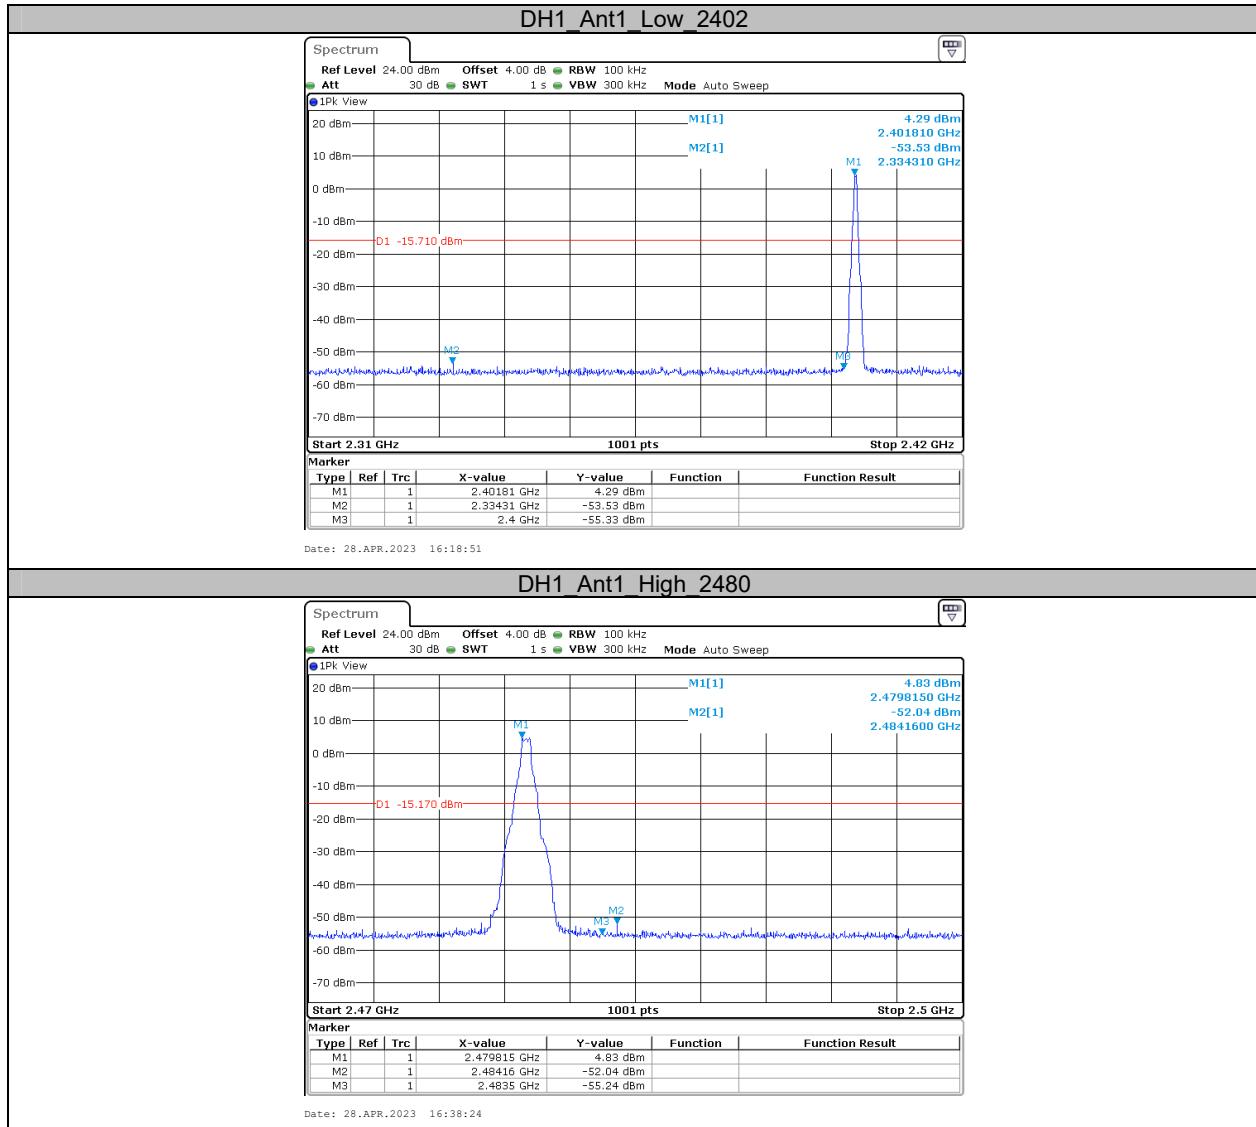


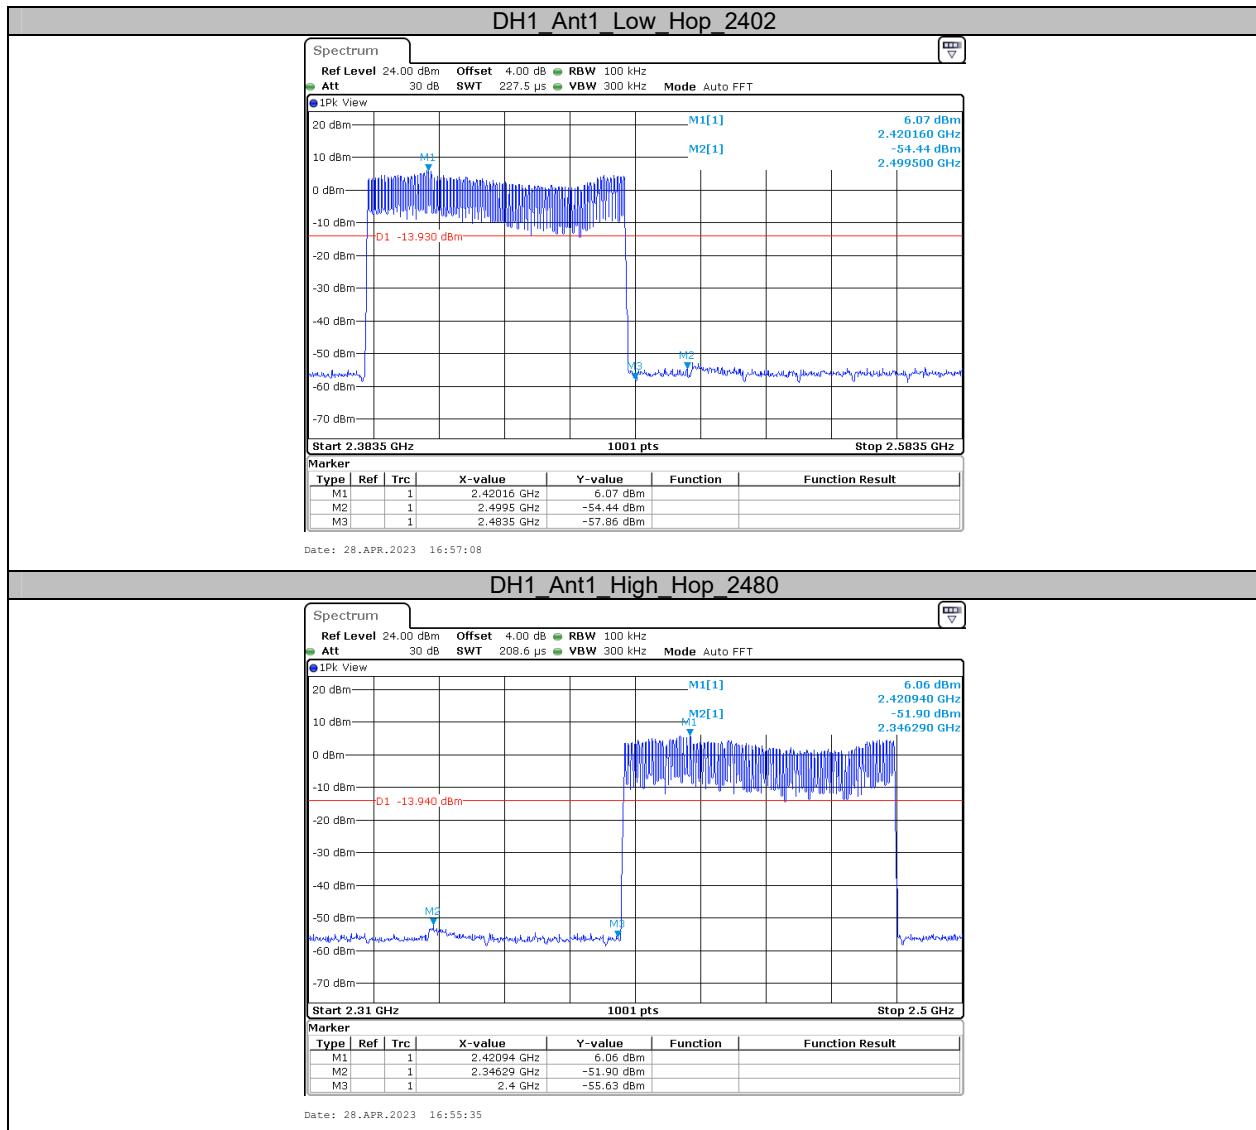

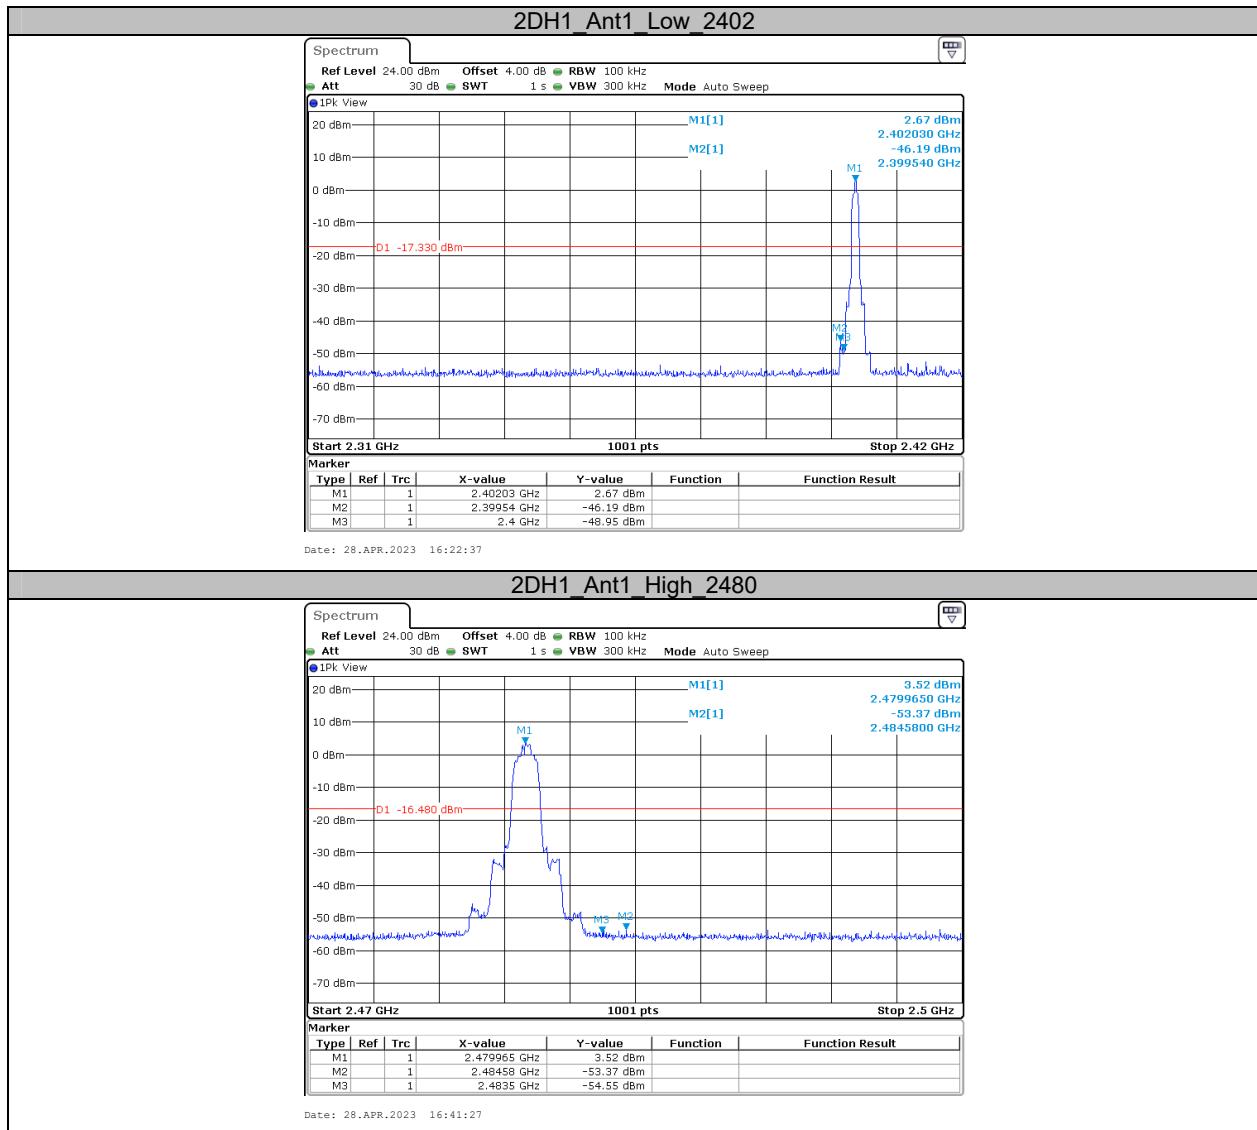

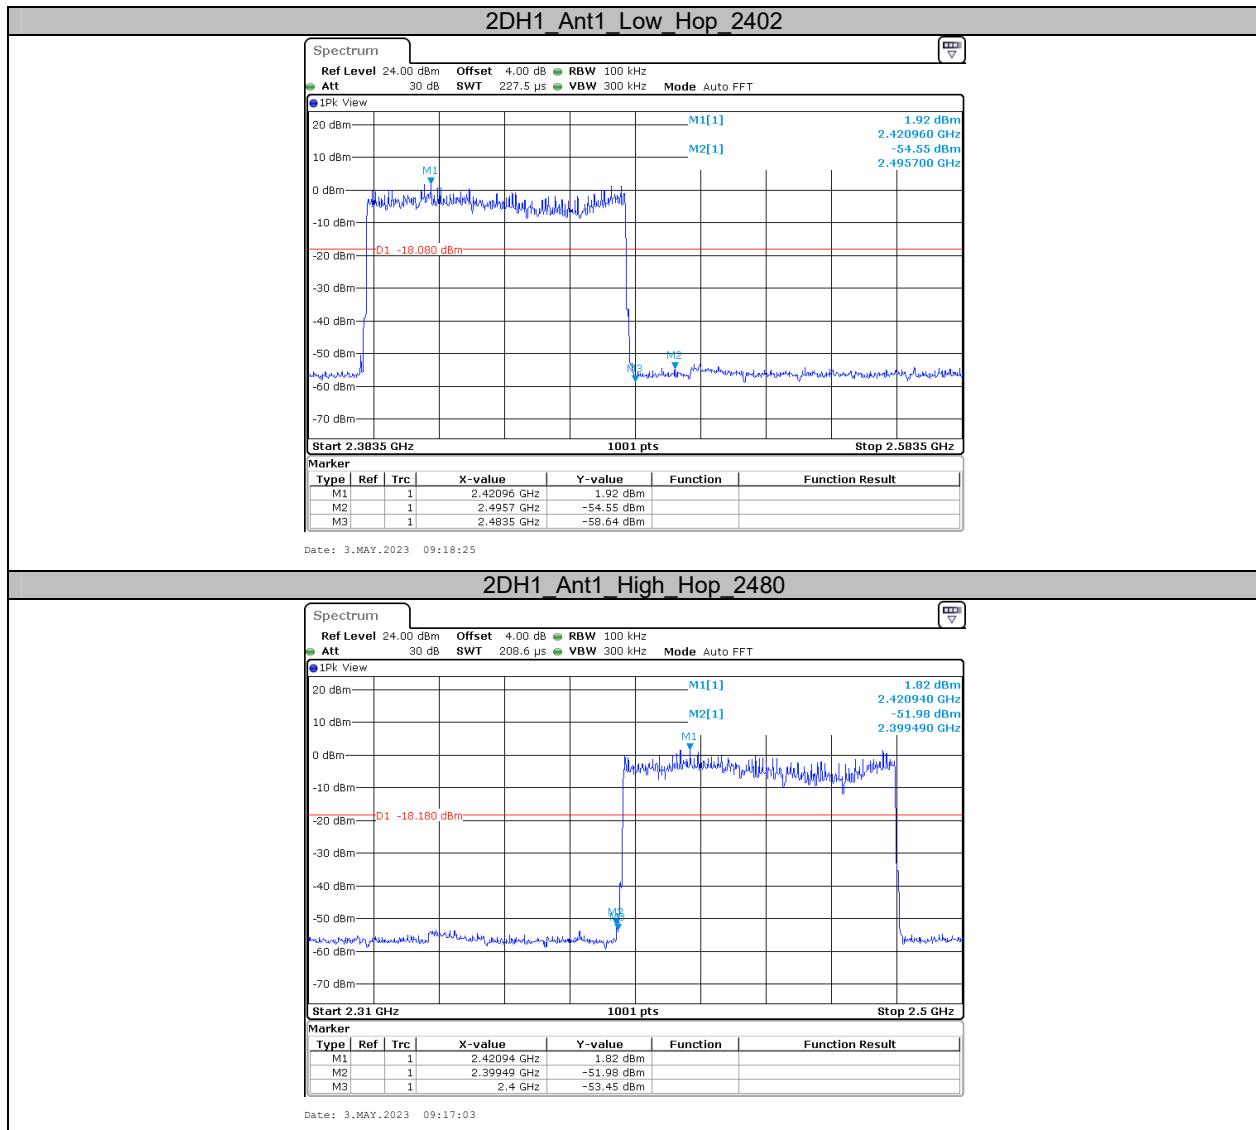

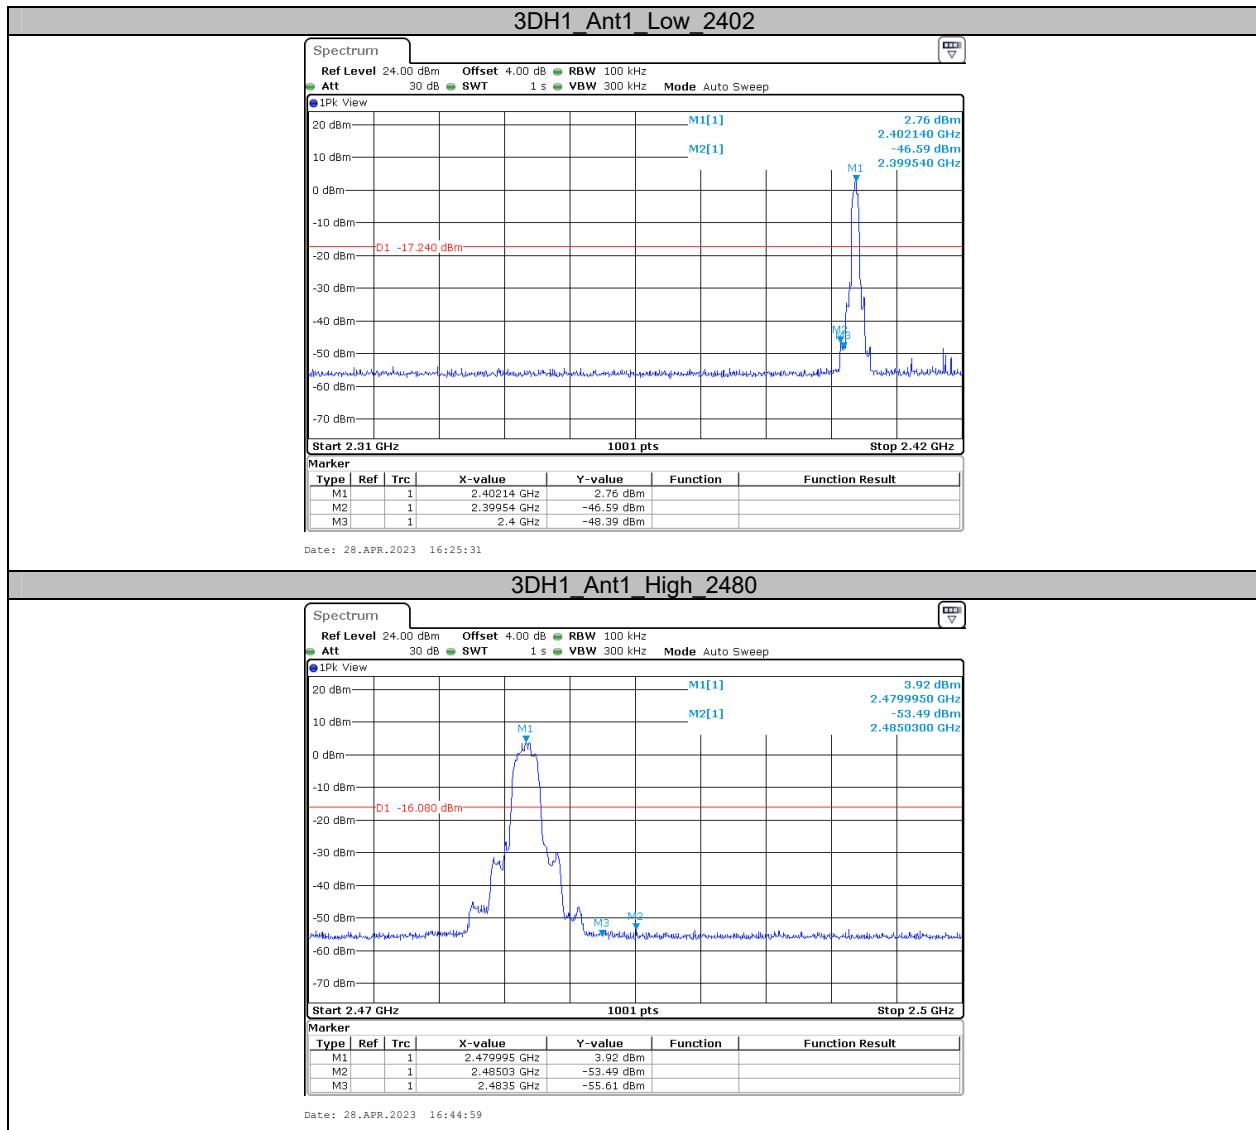

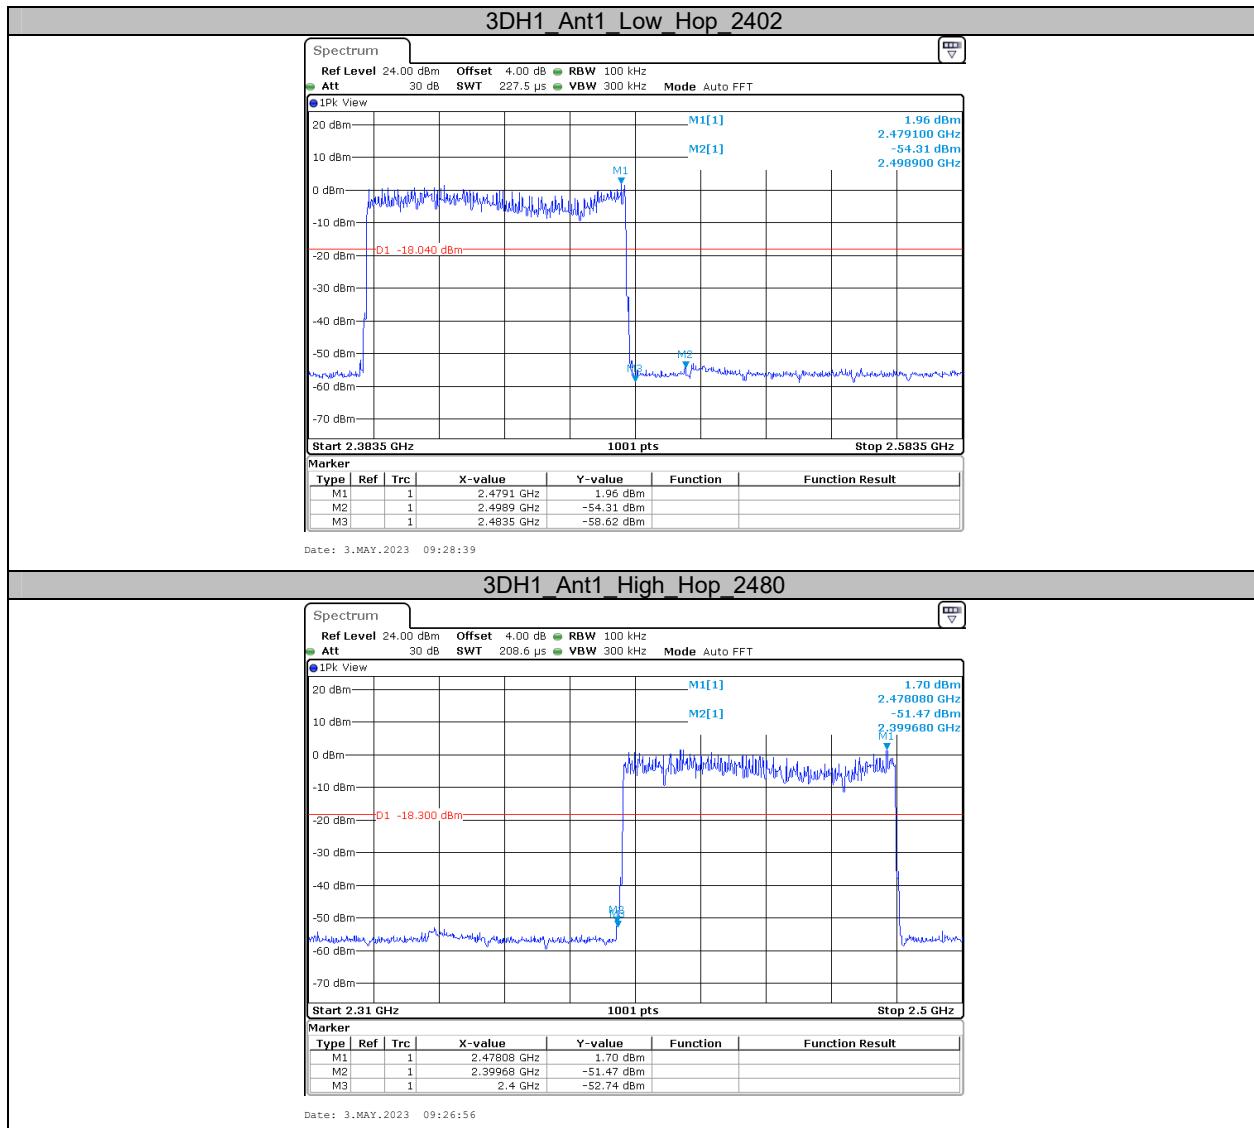

***** END OF REPORT *****