



# FCC PART 15C TEST REPORT No.I20Z61602-IOT10

for

**Wingtech Group (Hong Kong) Limited**

**4G Mobile Broadband Router**

**TMOHS1**

With

**FCC ID: 2APXW-TMOHS1**

**Hardware Version: 89527\_1\_11**

**Software Version: TMOHS1\_0.01.16**

**Issued Date: 2020-11-13**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

**Test Laboratory:**

**CTTL-Telecommunication Technology Labs, CAICT**

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: [ctl\\_terminals@caict.ac.cn](mailto:ctl_terminals@caict.ac.cn), website: [www.caict.ac.cn](http://www.caict.ac.cn)



## **REPORT HISTORY**

<b>Report Number</b>	<b>Revision</b>	<b>Description</b>	<b>Issue Date</b>
I20Z61602-IOT10	Rev.0	1st edition	2020-11-13

## **CONTENTS**

<b>CONTENTS .....</b>	<b>3</b>
<b>1. TEST LATORATORY.....</b>	<b>5</b>
1.1. INTRODUCTION & ACCREDITATION .....	5
1.2. TESTING LOCATION .....	5
1.3. TESTING ENVIRONMENT .....	5
1.4. PROJECT DATE .....	5
1.5. SIGNATURE .....	6
<b>2. CLIENT INFORMATION.....</b>	<b>7</b>
2.1. APPLICANT INFORMATION .....	7
2.2. MANUFACTURER INFORMATION .....	7
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT(AE) .....</b>	<b>8</b>
3.1. ABOUT EUT .....	8
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....	8
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST .....	8
3.4. GENERAL DESCRIPTION.....	9
<b>4. REFERENCE DOCUMENTS .....</b>	<b>9</b>
4.1. DOCUMENTS SUPPLIED BY APPLICANT .....	9
4.2. REFERENCE DOCUMENTS FOR TESTING.....	9
<b>5. LABORATORY ENVIRONMENT.....</b>	<b>9</b>
<b>6. SUMMARY OF TEST RESULTS .....</b>	<b>10</b>
6.1. SUMMARY OF TEST RESULTS .....	10
6.2. STATEMENTS.....	10
6.3. TEST CONDITIONS .....	10
<b>7. TEST EQUIPMENTS UTILIZED .....</b>	<b>11</b>
<b>8. MEASUREMENT UNCERTAINTY .....</b>	<b>12</b>
8.1. TRANSMITTER OUTPUT POWER .....	12
8.2. PEAK POWER SPECTRAL DENSITY.....	12
8.3. OCCUPIED 6DB BANDWIDTH.....	12
8.4. BAND EDGES COMPLIANCE.....	12
8.5. SPURIOUS EMISSIONS .....	12
8.6. AC POWER-LINE CONDUCTED EMISSION .....	12
<b>ANNEX A: EUT PARAMETERS.....</b>	<b>12</b>
B.1. MEASUREMENT METHOD .....	13
B.2. MAXIMUM AVERAGE OUTPUT POWER .....	14
B.2.1 ANTENNA GAIN.....	14
B.2.2. MAXIMUM AVERAGE OUTPUT POWER-CONDUCTED .....	14

B.3. PEAK POWER SPECTRAL DENSITY .....	16
B.4. OCCUPIED 6DB BANDWIDTH .....	17
B.5. TRANSMITTER SPURIOUS EMISSION.....	27
B.5.1 TRANSMITTER SPURIOUS EMISSION - RADIATED .....	27
B.6. BAND EDGES COMPLIANCE .....	42
B.6.1 BAND EDGES - RADIATED .....	42
FIG. 18 BAND EDGES (802.11A, 5745MHZ) .....	43
FIG. 19 BAND EDGES (802.11A, 5805MHZ) .....	43
FIG. 20 BAND EDGES (802.11A, 5825MHZ) .....	44
FIG. 21 BAND EDGES (802.11N-HT20, 5745MHZ).....	44
FIG. 22 BAND EDGES (802.11N-HT20, 5805MHZ).....	45
FIG. 23 BAND EDGES (802.11N-HT20, 5825MHZ).....	45
FIG. 24 BAND EDGES (802.11N-HT40, 5755MHZ).....	46
FIG. 25 BAND EDGES (802.11N-HT40, 5795MHZ).....	46
FIG. 26 BAND EDGES (802.11AC-HT20, 5745MHZ).....	47
FIG. 27 BAND EDGES (802.11AC-HT20, 5805MHZ).....	47
FIG. 28 BAND EDGES (802.11AC-HT20, 5825MHZ).....	48
FIG. 29 BAND EDGES (802.11AC-HT40, 5755MHZ).....	48
FIG. 30 BAND EDGES (802.11AC-HT40, 5795MHZ).....	49
FIG. 31 BAND EDGES (802.11AC-HT80, 5775MHZ).....	49
FIG. 32 BAND EDGES (802.11AC-HT80, 5775MHZ).....	50
B.7. AC POWERLINE CONDUCTED EMISSION .....	51
FIG. 33 AC POWER LINE CONDUCTED EMISSION-802.11A .....	52
FIG. 34 AC POWER LINE CONDUCTED EMISSION-IDLE.....	53
<b>ANNEX C: ACCREDITATION CERTIFICATE .....</b>	<b>54</b>

## **1. TEST LABORATORY**

### **1.1. Introduction & Accreditation**

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2005 accredited test laboratory under NATIONAL VOLUNTARY LABORATORY ACCREDITATION PROGRAM (NVLAP) with lab code 600118-0, and is also an FCC accredited test laboratory (CN5017), and ISED accredited test laboratory (CN0066). The detail accreditation scope can be found on NVLAP website.

### **1.2. Testing Location**

Conducted testing Location: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,  
P. R. China100191

Radiated testing Location: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,  
P. R. China100191

### **1.3. Testing Environment**

Normal Temperature: 15-35°C


Relative Humidity: 20-75%

### **1.4. Project date**

Testing Start Date: 2020-09-23

Testing End Date: 2020-11-13


## 1.5. Signature



---

Xie Xiuzhen

( Prepared this test report )



---

Zheng Wei

(Reviewed this test report)



---

Hu Xiaoyu

(Approved this test report)



## **2. CLIENT INFORMATION**

### **2.1. Applicant Information**

Company Name: Wingtech Group (Hong Kong) Limited  
Address: Flat/RM 1903, 19/F, Podium Plaza 5 Hanoi Road, Tsim Sha Tsui  
Kowloon, Hong Kong  
City: Hong Kong  
Postal Code: /  
Country: China  
Telephone: /  
Fax: /

### **2.2. Manufacturer Information**

Company Name: Wingtech Group (Hong Kong) Limited  
Address: Flat/RM 1903, 19/F, Podium Plaza 5 Hanoi Road, Tsim Sha Tsui  
Kowloon, Hong Kong  
City: Hong Kong  
Postal Code: /  
Country: China  
Telephone: /  
Fax: /

### **3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY**

#### **EQUIPMENT(AE)**

##### **3.1. About EUT**

Description	4G Mobile Broadband Router
Model name	TMOHS1
FCC ID	2APXW-TMOHS1
WLAN Frequency Band	ISM Band: 5725MHz~5850MHz
Type of modulation	OFDM
Voltage	3.85V

Note: Photographs of EUT are shown in ANNEX C of this test report. Components list, please refer to documents of the manufacturer; it is also included in the original test record of Telecommunication Metrology Center of MIIT of People's Republic of China.

##### **3.2. Internal Identification of EUT used during the test**

<b>EUT ID*</b>	<b>IMEI</b>	<b>HW Version</b>	<b>SW Version</b>
EUT1	862448013594153	89527_1_11	TMOHS1_0.01.16
EUT2	862448013593593	89527_1_11	TMOHS1_0.01.16
EUT3	862448013594724	89527_1_11	TMOHS1_0.01.16

\*EUT ID: is used to identify the test sample in the lab internally.

##### **3.3. Internal Identification of AE used during the test**

<b>AE ID*</b>	<b>Description</b>	<b>SN</b>	<b>Remarks</b>
AE1	Battery	/	/
AE2	charger	/	/
AE3	USB cable	/	/

###### **AE1**

Type	MF01
Manufacturer	Jiade Energy Technology (Zhuhai) Co.,Ltd
Capacity	/
Nominal Voltage	/

###### **AE2**

Model	PA-US5V2A-036
Manufacturer	Huizhou puan electronics co., ltd
Length of cable	/

###### **AE3**

Type	USB TYPE A to C 2.0 Cable (1.0m)
Manufacturer	Huizhou Washin Electronics Co.,Ltd
Length of cable	/

\*AE ID: is used to identify the test sample in the lab internally.



### 3.4. General Description

Equipment Under Test (EUT) is a model of 4G Mobile Broadband Router with integrated antenna. It consists of normal options: Battery and Charger. Manual and specifications of the EUT were provided to fulfil the test. Samples undergoing test were selected by the Client.

## 4. REFERENCE DOCUMENTS

### 4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

### 4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

FCC Part15	FCC CFR 47, Part 15, Subpart C and E: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.407 General technical requirements	2018
ANSI C63.10	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2013
UNII: KDB 789033 D02	General U-NII Test Procedures New Rules v02r01	2017-12

## 5. LABORATORY ENVIRONMENT

Conducted RF performance testing is performed in shielding room.

EMC performance testing is performed in Semi-anechoic chamber.

## 6. SUMMARY OF TEST RESULTS

### 6.1. Summary of Test Results

SUMMARY OF MEASUREMENT RESULTS	Sub-clause of Part15C	Sub-clause of IC	Verdict
Maximum Peak Output Power	15.407 (a)	/	P
Peak Power Spectral Density	15.407 (a)	/	P
Occupied 6dB Bandwidth	15.407 (e)	/	P
Band Edges Compliance - Radiated	15.407 (b)	/	P
Transmitter Spurious Emission - Radiated	15.407, 15.205, 15.209	/	P
AC Powerline Conducted Emission	15.107, 15.207	/	P

Please refer to **ANNEX A** for detail.

Terms used in Verdict column

P	Pass, The EUT complies with the essential requirements in the standard.
NM	Not measured, The test was not measured by CTTL
NA	Not Applicable, The test was not applicable
F	Fail, The EUT does not comply with the essential requirements in the standard

### 6.2. Statements

CTTL has evaluated the test cases requested by the client/manufacturer as listed in section 6.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.1.

This report only deals with the WLAN function among the features described in section 3.

### 6.3. Test Conditions

The Equipment Under Test (EUT) model TMOHS1 (FCC ID: 2APXW-TMOHS1) is a variant product of TMOHS1 (FCC ID: 2APXW-TMOHS1), according to the declaration of changes provided by the applicant and FCC KDB publication 178919 D01. All test results are derived from test report No.I20Z61602-IOT07, except the frequency of 5825MHz test results are from this report. Please refer Annex B for detail.

For this report, all the test cases are tested under normal temperature and normal voltage, and also under norm humidity, the specific condition is shown as follows:

Temperature	26°C
Voltage	3.85V
Humidity	44%

## 7. TEST EQUIPMENTS UTILIZED

### Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Vector Signal Analyzer	FSQ40	200089	Rohde & Schwarz	1 year	2021-05-06
2	LISN	ENV216	101200	R&S	1 year	2021-02-26
3	Test Receiver	ESCI	100344	R&S	1 year	2021-05-19
4	Shielding Room	S81	/	ETS-Lindgren	/	/

### Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Test Receiver	ESU26	100235	Rohde & Schwarz	1 year	2021-03-03
2	BiLog Antenna	VULB9163	9163-1223	Schwarzbeck	1 year	2021-03-18
3	Dual-Ridge Waveguide Horn Antenna	3115	6914	ETS-Lindgren	1 year	2021-01-14
4	Dual-Ridge Waveguide Horn Antenna	3116	2663	ETS-Lindgren	1 year	2021-08-05

## 8. Measurement Uncertainty

### 8.1. Transmitter Output Power

Measurement Uncertainty: 0.387dB,k=1.96

### 8.2. Peak Power Spectral Density

Measurement Uncertainty: 0.705dB,k=1.96

### 8.3. Occupied 6dB Bandwidth

Measurement Uncertainty: 60.80Hz,k=1.96

### 8.4. Band Edges Compliance

Measurement Uncertainty : 0.62dB,k=1.96

### 8.5. Spurious Emissions

#### Conducted (k=1.96)

Frequency Range	Uncertainty(dB)
$30\text{MHz} \leq f \leq 2\text{GHz}$	1.22
$2\text{GHz} \leq f \leq 3.6\text{GHz}$	1.22
$3.6\text{GHz} \leq f \leq 8\text{GHz}$	1.22
$8\text{GHz} \leq f \leq 12.75\text{GHz}$	1.51
$12.75\text{GHz} \leq f \leq 26\text{GHz}$	1.51
$26\text{GHz} \leq f \leq 40\text{GHz}$	1.59

#### Radiated (k=2)

Frequency Range	Uncertainty(dB)
9kHz-30MHz	/
$30\text{MHz} \leq f \leq 1\text{GHz}$	5.16
$1\text{GHz} \leq f \leq 18\text{GHz}$	5.44
$18\text{GHz} \leq f \leq 40\text{GHz}$	5.28

### 8.6. AC Power-line Conducted Emission

Measurement Uncertainty : 3.08dB,k=2

## ANNEX A: EUT parameters


Disclaimer: the worse case and antenna gain provided by the client may affect the validity of the measurement results in this report, and the client shall bear the impact and consequences arising therefrom.

## **ANNEX B: MEASUREMENT RESULTS**

### **B.1. Measurement Method**

#### **B.1.1. Conducted Measurements**

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode.
- 3). Set the EUT to the required channel.
- 4). Set the spectrum analyzer to start measurement.
- 5). Record the values. Vector Signal Analyzer

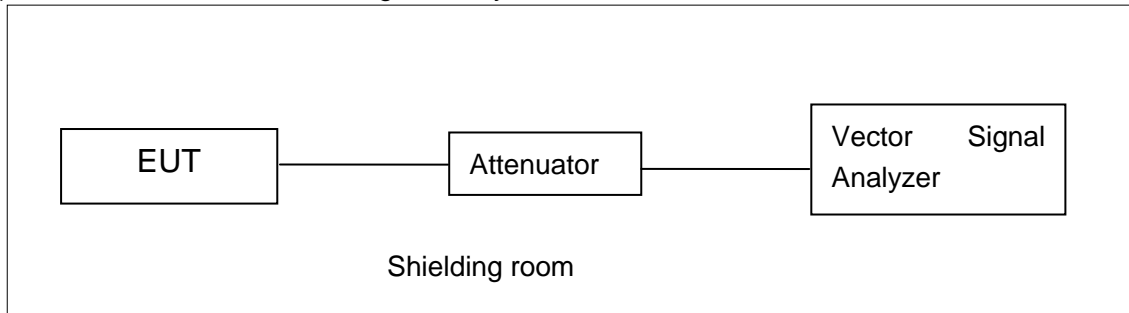


#### **B.1.2. Radiated Emission Measurements**

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 10Hz;

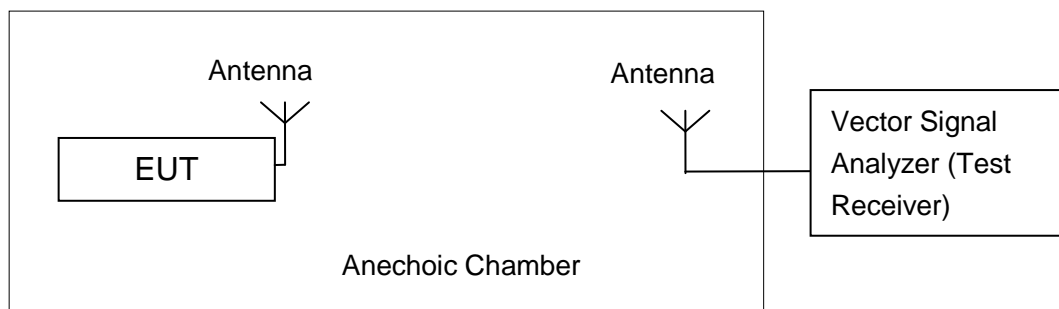

The measurement is made according to ANSI C63.10.

The radiated emission test is performed in semi-anechoic chamber. The distance from the EUT to the reference point of measurement antenna is 3m. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated 360° and the measurement antenna is moved from 1m to 4m to get the maximization result.

## B.2. Maximum Average Output Power

### Measurement Limit and Method:

Standard	Limit (dBm)
FCC CRF Part 15.407(a)	< 30

### B.2.1 Antenna Gain

Antenna gain is 2.31dBi and the value is supplied by the applicant or manufacturer.

### B.2.2. Maximum Average Output Power-Conducted

#### Measurement Results:

#### 802.11a mode

Mode	Data Rate (Mbps)	Test Result (dBm)			
		5745MHz (Ch149)	5785MHz (Ch157)	5825MHz (Ch161)	5825MHz (Ch165)
802.11a	6	19.47	19.85	19.89	19.69

The data rate 6Mbps is selected as worse condition, and the following cases are performed with this condition.

#### 802.11n-HT20 mode

Mode	Data Rate (Index)	Test Result (dBm)			
		5745MHz (Ch149)	5785MHz (Ch157)	5825MHz (Ch161)	5825MHz (Ch165)
802.11n(20MHz)	MCS0	18.34	18.66	18.76	18.65

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

**802.11ac-HT20 mode**

Mode	Data Rate (Index)	Test Result (dBm)			
		5745MHz (Ch149)	5785MHz (Ch157)	5825MHz (Ch161)	5825MHz (Ch165)
802.11ac(20MHz)	MCS0	18.41	18.72	18.87	18.63

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

**802.11n-HT40 mode**

Mode	Data Rate (Index)	Test Result (dBm)	
		5755MHz (Ch151)	5795MHz (Ch159)
802.11n(40MHz)	MCS0	19.00	19.20

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

**802.11ac-HT40 mode**

Mode	Data Rate (Index)	Test Result (dBm)	
		5755MHz (Ch151)	5795MHz (Ch159)
802.11ac(40MHz)	MCS0	19.06	19.16

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

**802.11ac-HT80 mode**

Mode	Data Rate (Index)	Test Result (dBm)
		5775MHz (Ch155)
802.11ac(80MHz)	MCS0	18.61

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

**Conclusion: PASS**

### B.3. Peak Power Spectral Density

#### Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.407(a)	< 30 dBm/500 kHz

The measurement is made according to ANSI C63.10 and KDB789033 D02

#### Measurement Uncertainty:

Measurement Uncertainty	0.75dB
-------------------------	--------

#### Measurement Results:

Mode	Channel	Power Spectral Density ( dBm/500kHz )	Conclusion
802.11a	149	4.58	P
	157	4.44	P
	161	4.66	P
	165	4.37	P
802.11n HT20	149	3.25	P
	157	3.06	P
	161	3.40	P
	165	3.02	P
802.11ac HT20	149	3.26	P
	157	3.01	P
	161	3.36	P
	165	3.06	P
802.11n HT40	151	0.50	P
	159	0.20	P
802.11ac HT40	151	0.53	P
	159	0.22	P
802.11ac HT80	155	-3.10	P

**Conclusion: PASS**



#### B.4. Occupied 6dB Bandwidth

##### Measurement Limit:

Standard	Limit (kHz)
FCC 47 CFR Part 15.407 (e)	≥ 500

The measurement is made according to KDB789033 D02 .

##### Measurement Uncertainty:


Measurement Uncertainty	60.80Hz
-------------------------	---------

##### Measurement Result:


Mode	Channel	Occupied 6dB Bandwidth ( KHz)		conclusion
		Fig.	Value	
802.11a	149	Fig.1	15.15	P
	157	Fig.2	15.15	P
	161	Fig.3	15.10	P
	165	Fig.4	15.15	P
802.11n HT20	149	Fig.5	15.15	P
	157	Fig.6	15.15	P
	161	Fig.7	15.10	P
	165	Fig.8	15.15	P
802.11ac HT20	149	Fig.9	15.15	P
	157	Fig.10	15.15	P
	161	Fig.11	15.10	P
	165	Fig.12	15.15	P
802.11n HT40	151	Fig.13	35.12	P
	159	Fig.14	35.12	P
802.11ac HT40	151	Fig.15	35.12	P
	159	Fig.16	35.12	P
802.11ac HT80	155	Fig.17	75.20	P

**Conclusion: PASS**


**Test graphs as below:**

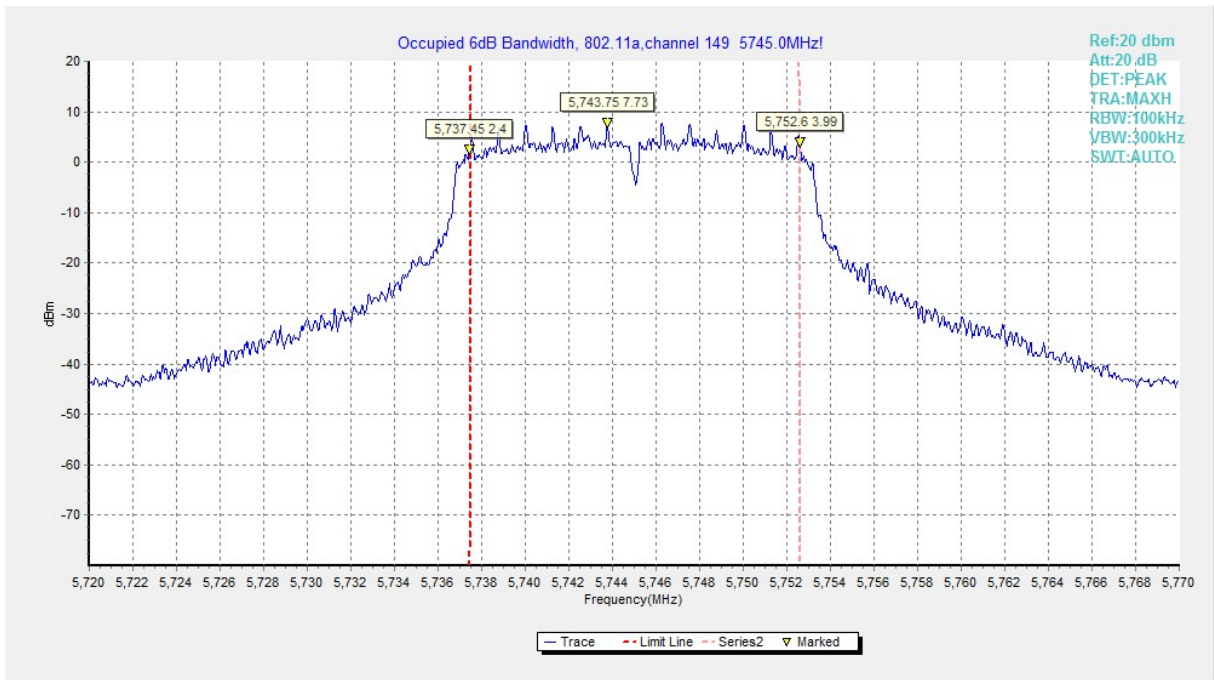


**Fig. 1 Occupied 6dB Bandwidth (802.11a, Ch 149)**

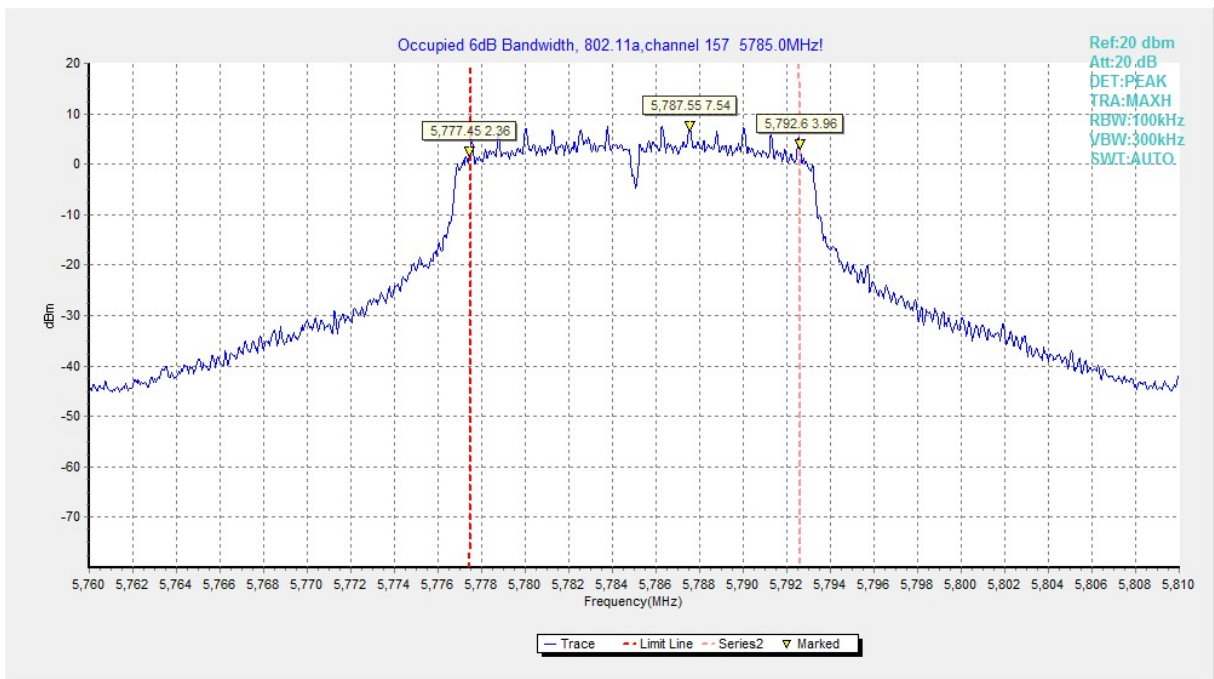


**Fig. 2 Occupied 6dB Bandwidth (802.11a, Ch 157)**

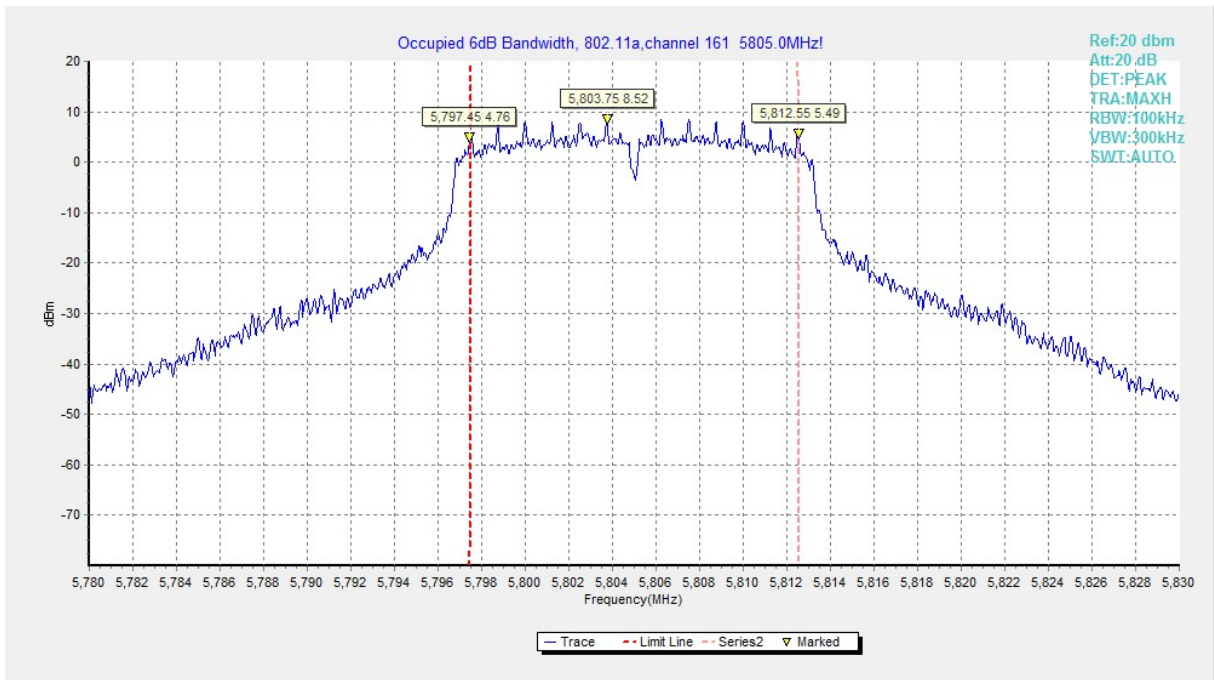


**Fig. 3 Occupied 6dB Bandwidth (802.11a, Ch 161)**

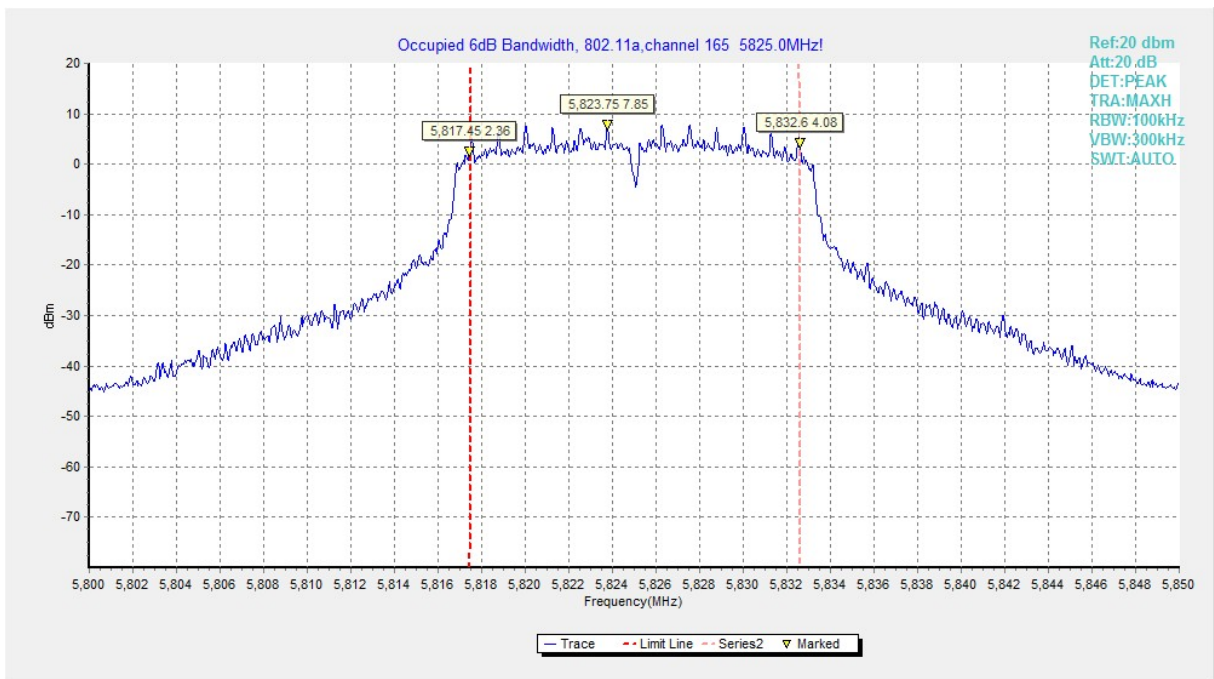

**Fig. 4 Occupied 6dB Bandwidth (802.11a, Ch 165)**

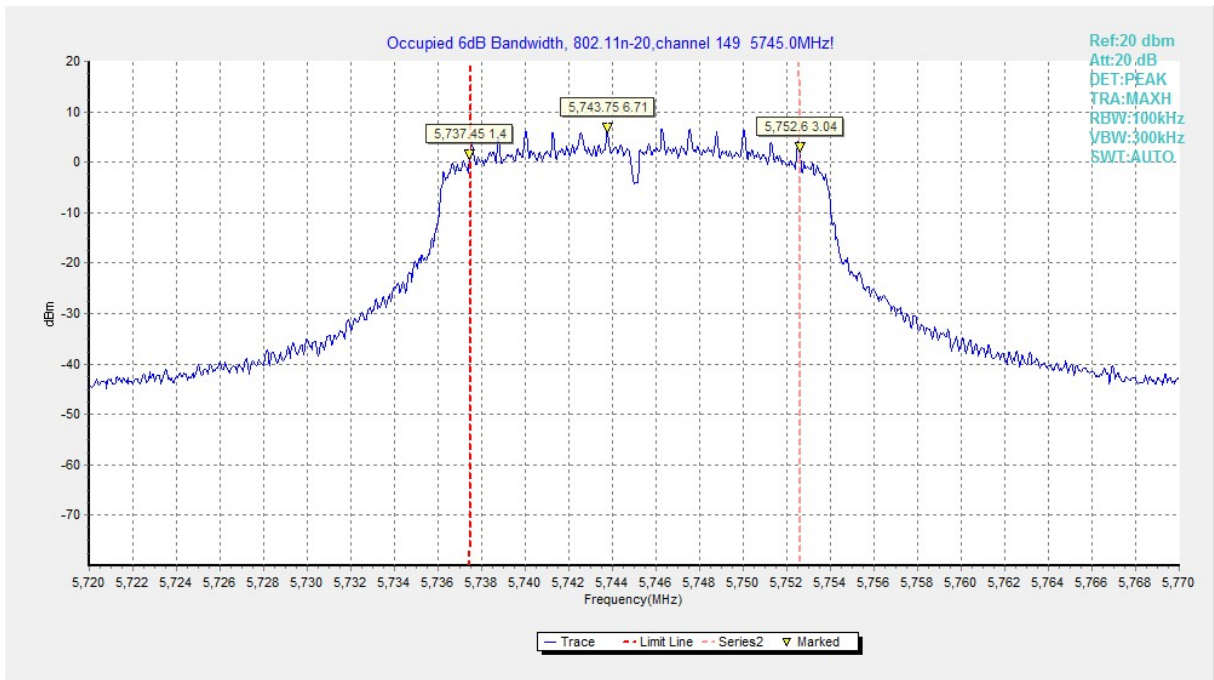


**Fig. 5 Occupied 6dB Bandwidth (802.11n-HT20, Ch 149)**

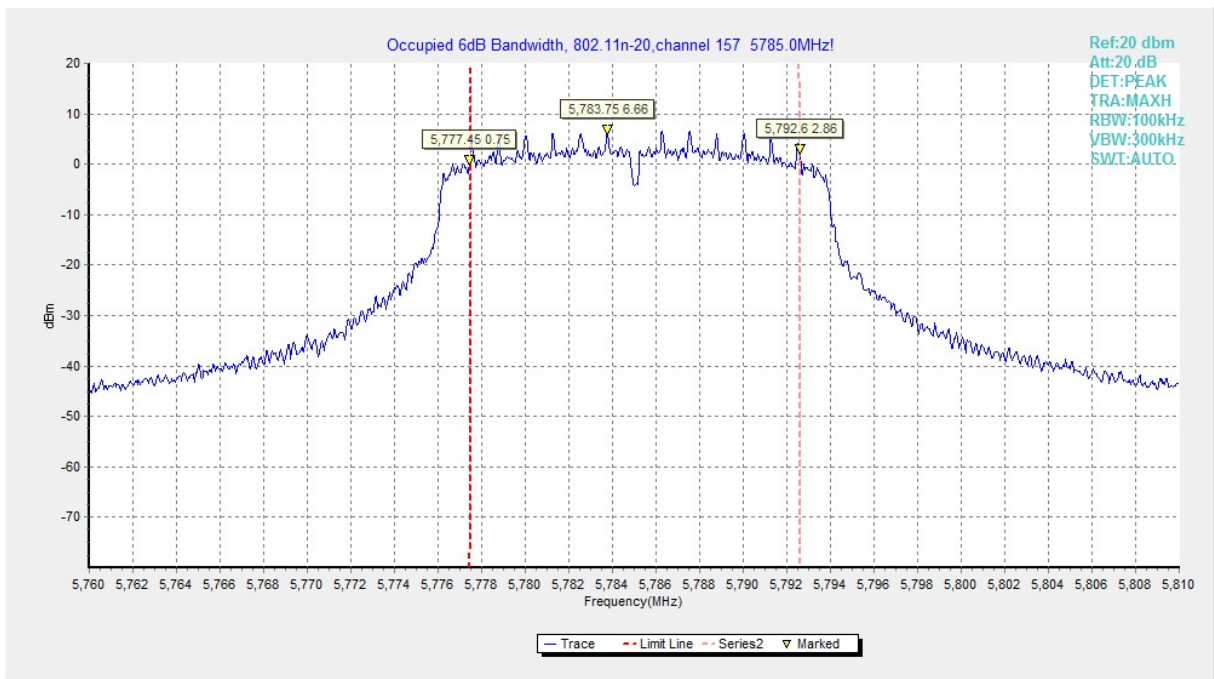


**Fig. 6 Occupied 6dB Bandwidth (802.11n-HT20, Ch 157)**




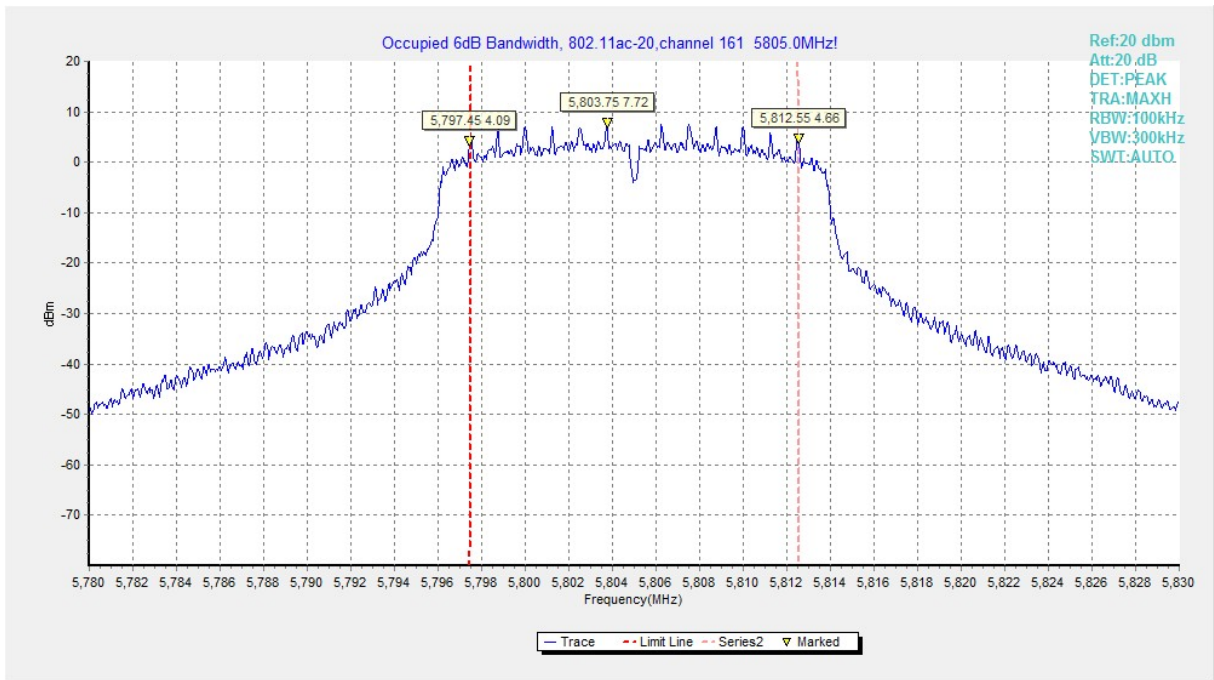


**Fig. 7 Occupied 6dB Bandwidth (802.11n-HT20, Ch 161)**

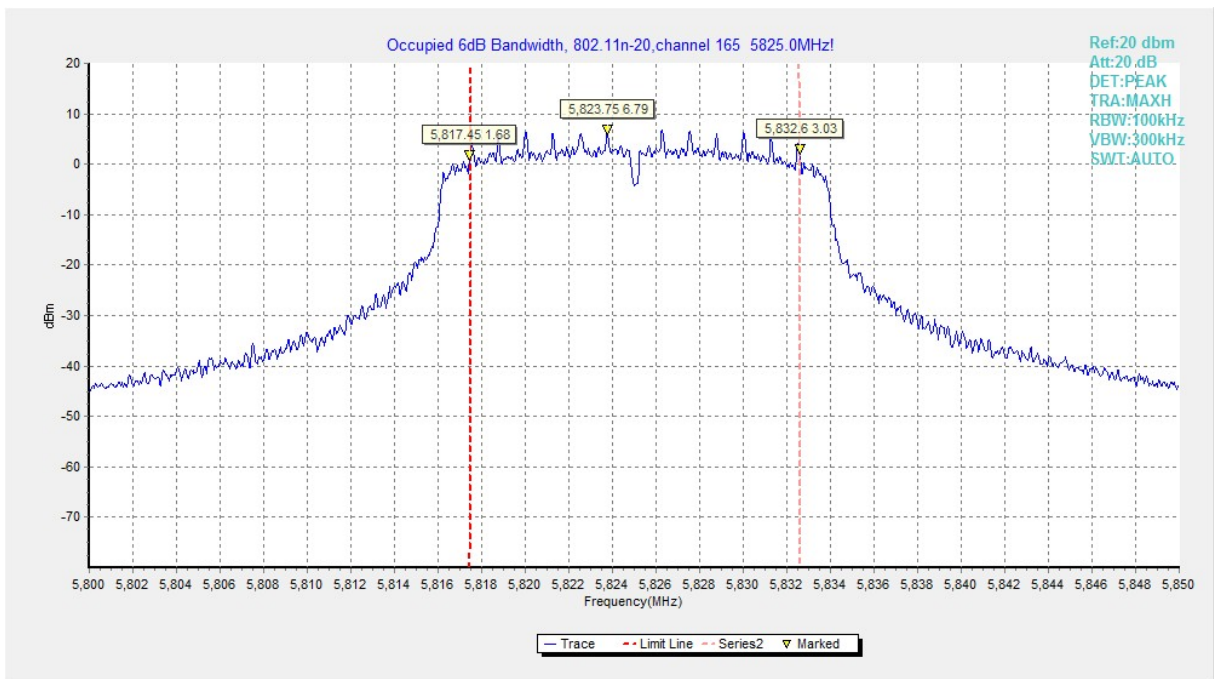


**Fig. 8 Occupied 6dB Bandwidth (802.11n-HT20, Ch 165)**

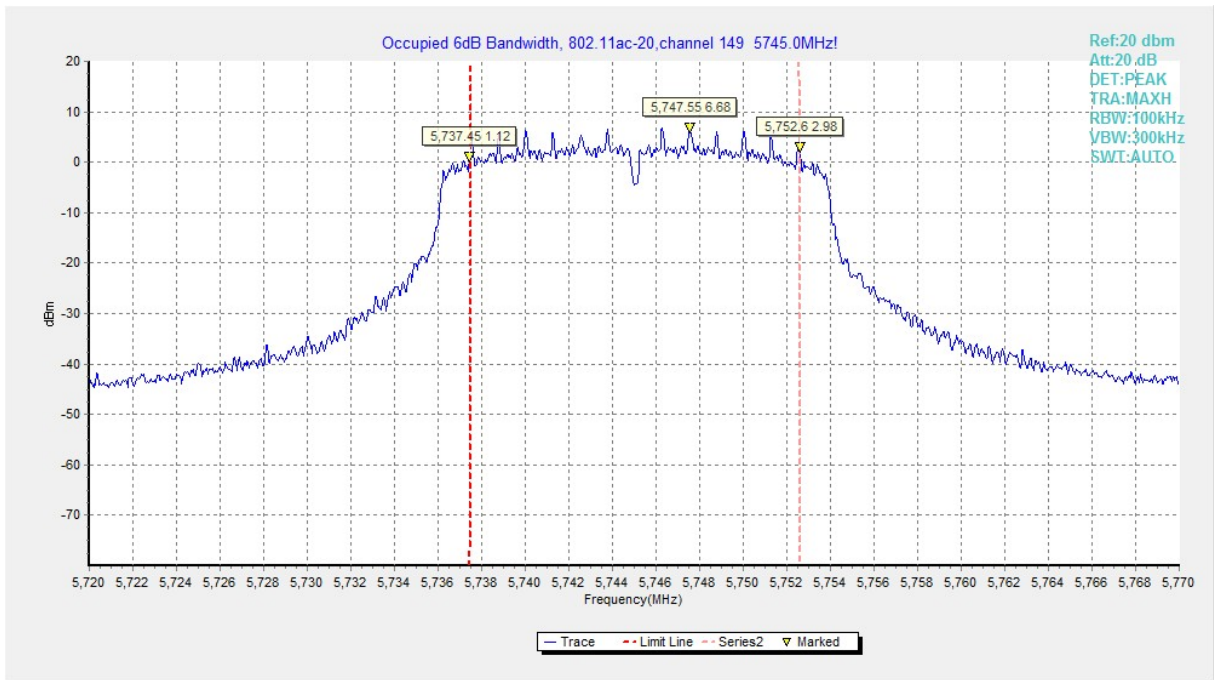


**Fig. 9 Occupied 6dB Bandwidth (802.11ac-HT20, Ch 149)**

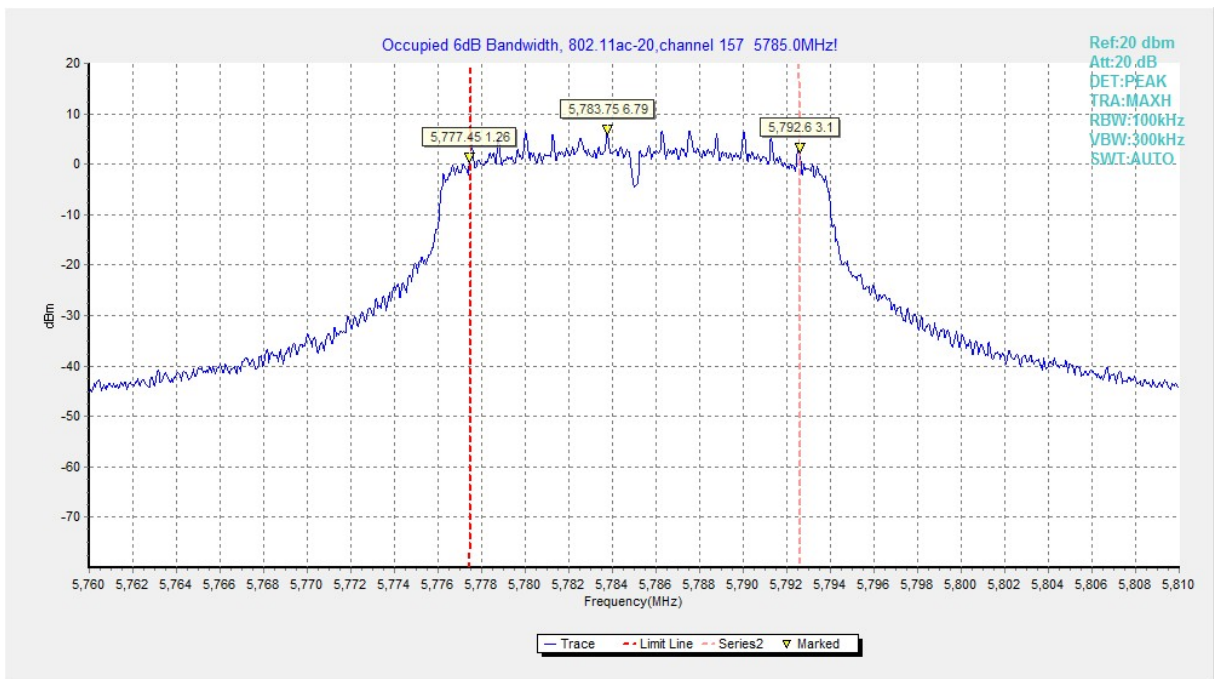


**Fig. 10 Occupied 6dB Bandwidth (802.11ac-HT20, Ch 157)**

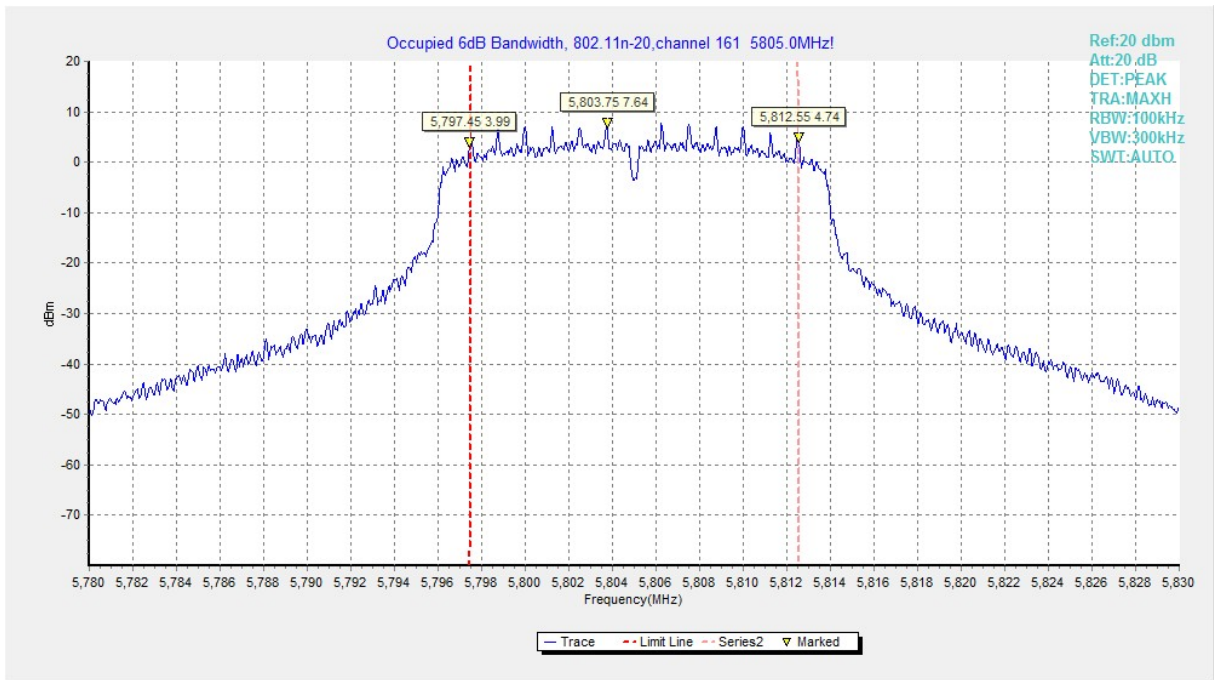


**Fig. 11 Occupied 6dB Bandwidth (802.11ac-HT20, Ch 161)**

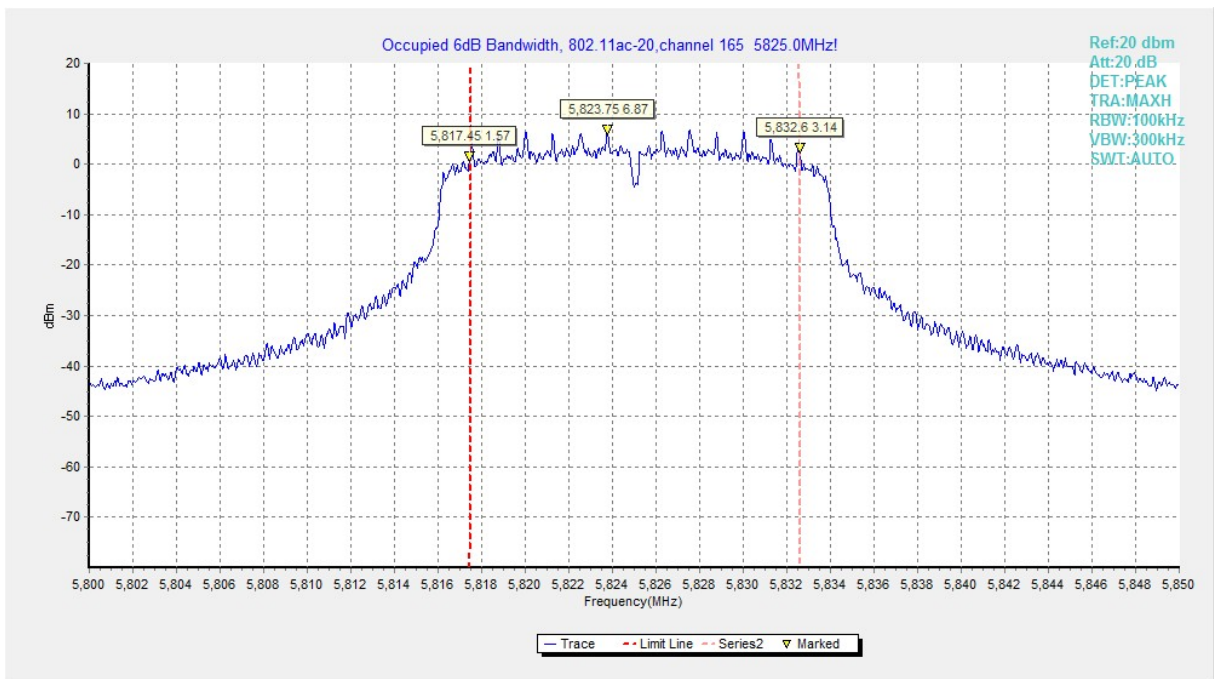

**Fig. 12 Occupied 6dB Bandwidth (802.11ac-HT20, Ch 165)**

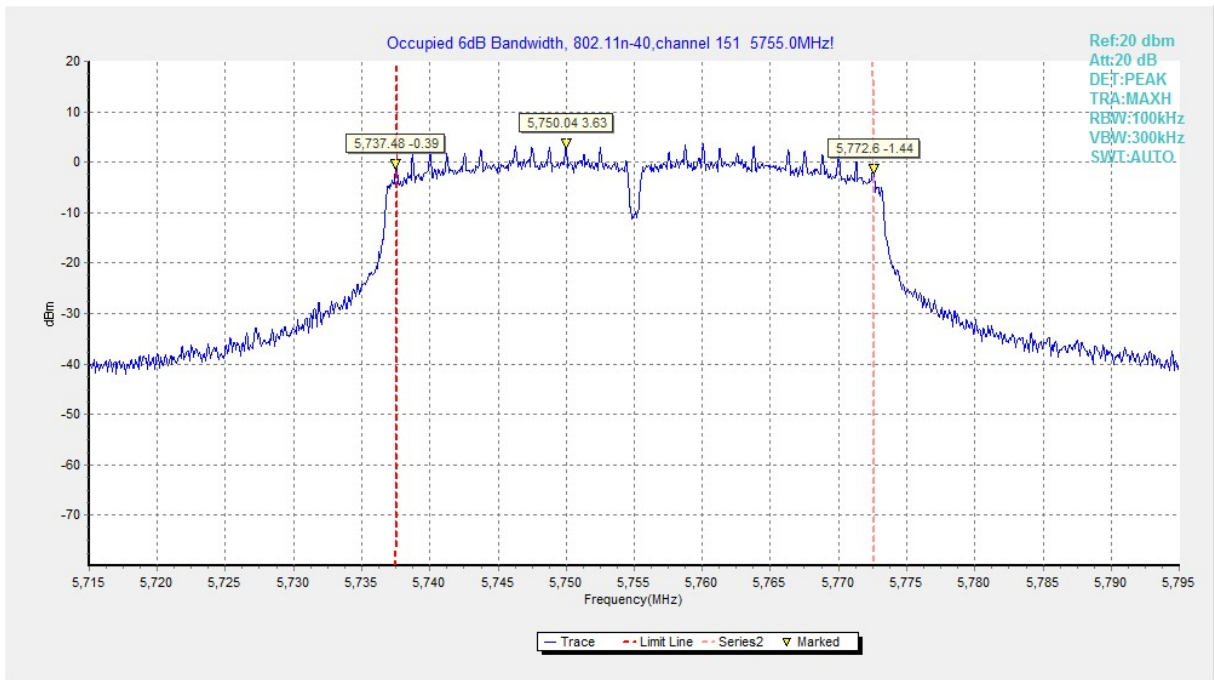


**Fig. 13 Occupied 6dB Bandwidth (802.11n-HT40, Ch 151)**

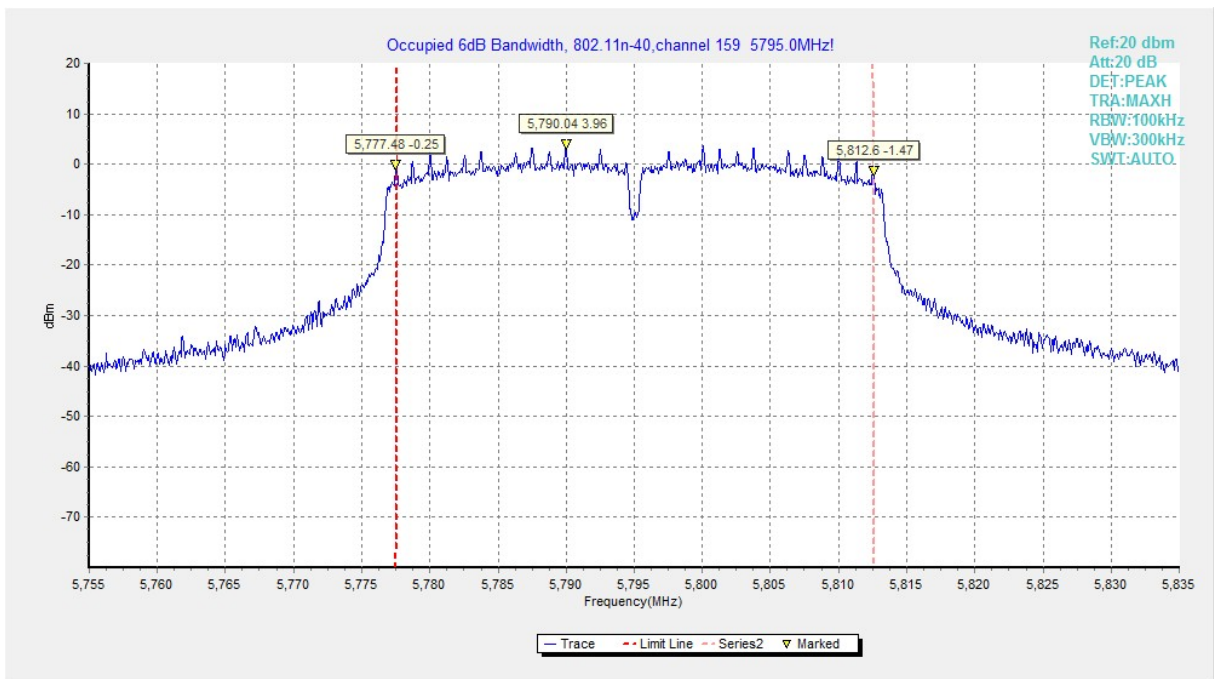


**Fig. 14 Occupied 6dB Bandwidth (802.11n-HT40, Ch 159)**



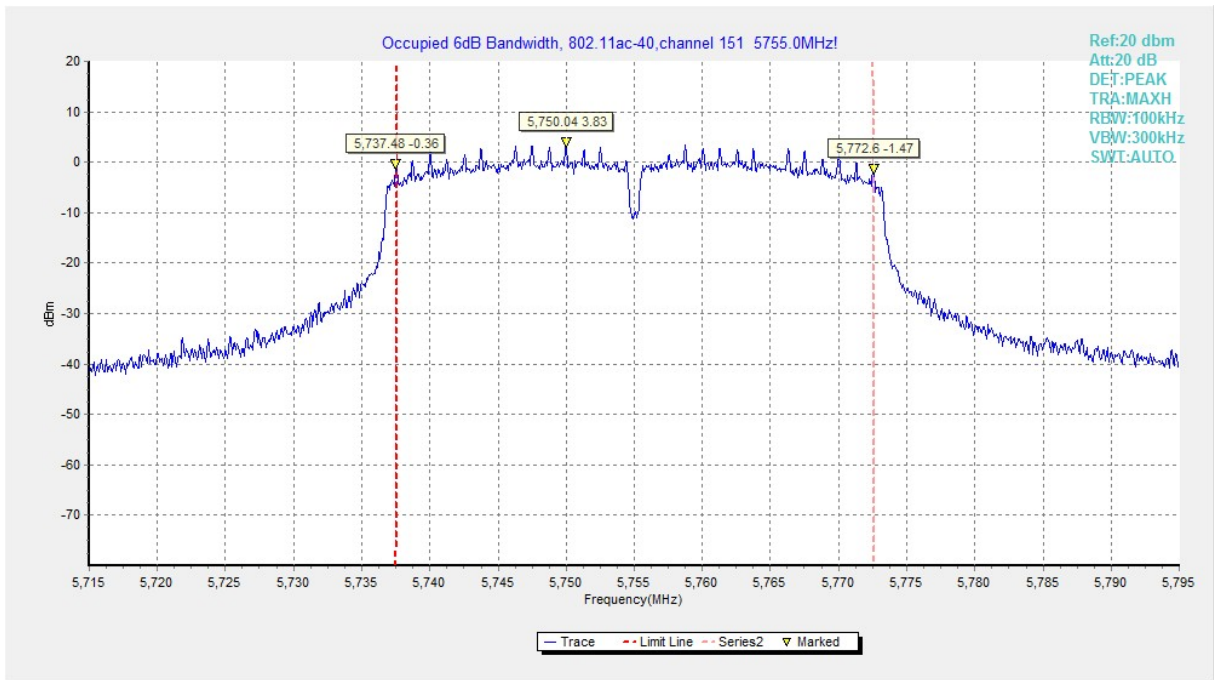

**Fig. 15 Occupied 6dB Bandwidth (802.11ac-HT40, Ch 151)**

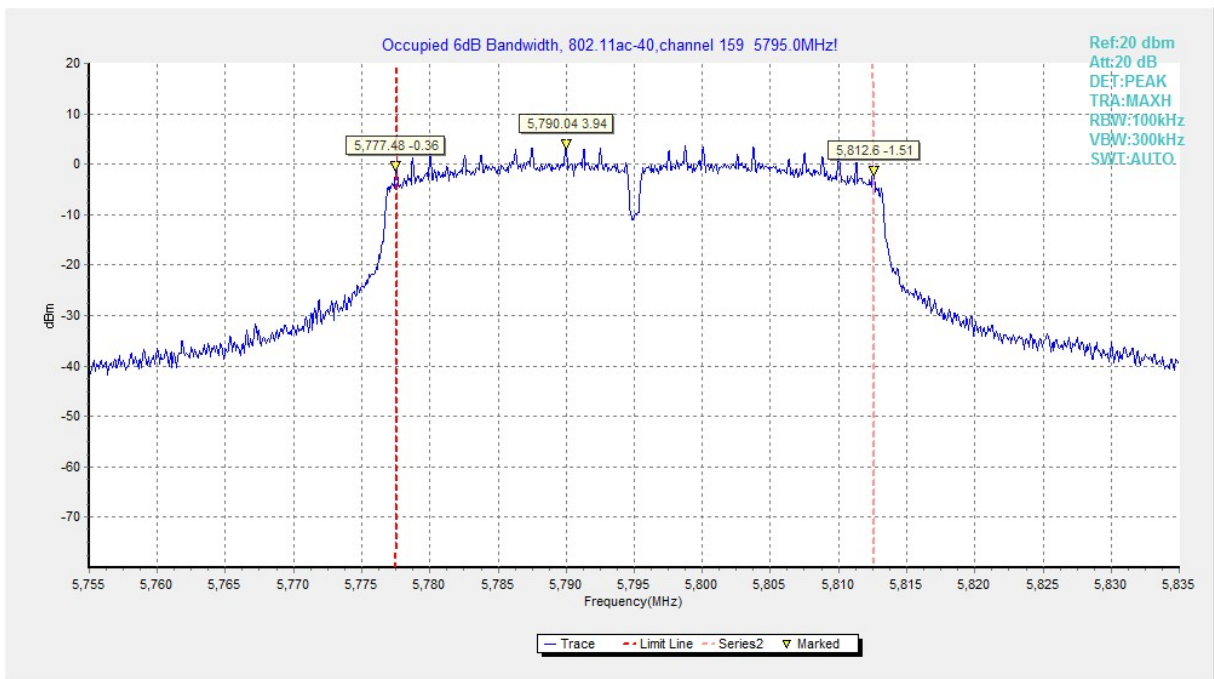

**Fig. 16 Occupied 6dB Bandwidth (802.11ac-HT40, Ch 159)**

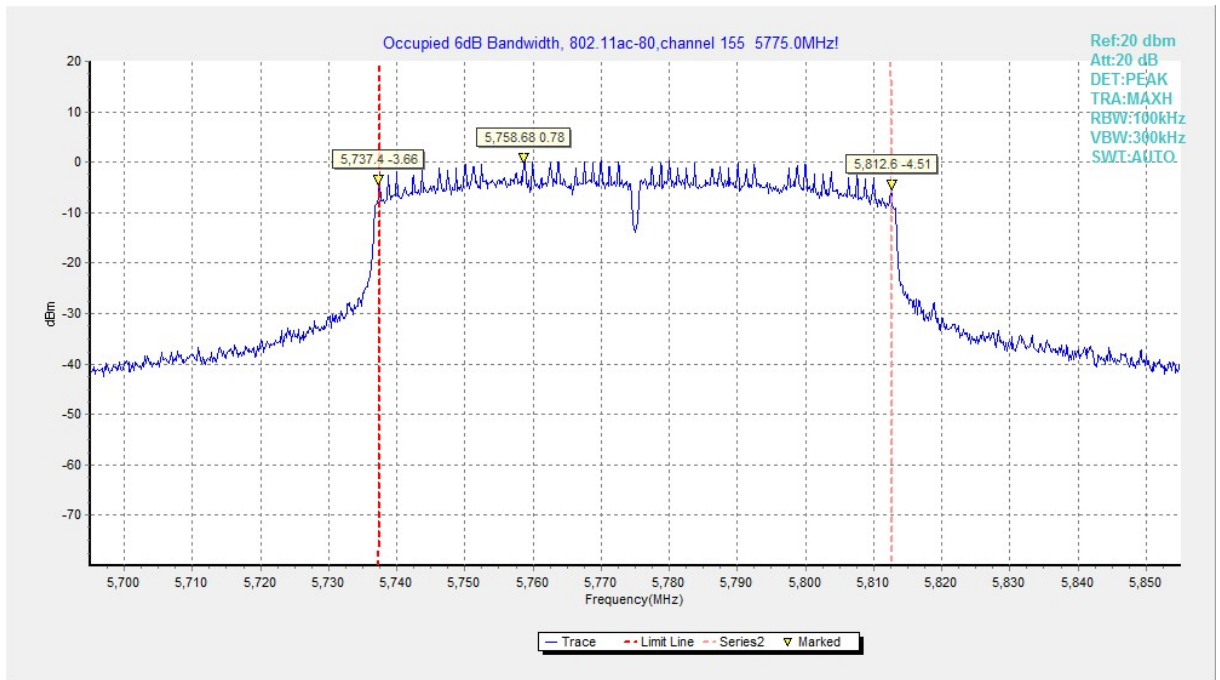


Fig. 17 Occupied 6dB Bandwidth (802.11ac-HT80, Ch 155)

## B.5. Transmitter Spurious Emission

### Measurement Limit:

Standard	Frequency (MHz)	Limit (dBm/MHz)
FCC 47 CFR Part 15.407	5725MHz~5850MHz	< -27

The measurement is made according to ANSI C63.10 .

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

### Measurement Uncertainty:

Frequency Range	Uncertainty(dB)
30MHz ≤ f ≤ 2GHz	0.63
2GHz ≤ f ≤ 3.6GHz	0.82
3.6GHz ≤ f ≤ 8GHz	1.55
8GHz ≤ f ≤ 20GHz	1.86
20GHz ≤ f ≤ 22GHz	1.90
22GHz ≤ f ≤ 26GHz	2.20

### B.5.1 Transmitter Spurious Emission - Radiated

#### Measurement Limit:

Standard	Limit (dBm/MHz)	
FCC 47 CFR Part 15.407	at the band edge	27
	at 5 MHz above or below the band edge	15.6
	at 25 MHz above or below the band edge	10
	at 75 MHz or more above or below the band edge	-27
	Note: increasing linearly from point to point.	

The measurement is made according to KDB 789033

Frequency Range	Uncertainty(dB)
30MHz ≤ f ≤ 1GHz	5.40
1GHz ≤ f ≤ 18GHz	4.32
18GHz ≤ f ≤ 40GHz	5.26

**Measurement Results:**
**802.11a mode**

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11a	149	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	157	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
	161	26.5 GHz~ 40 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
	165	7 GHz ~ 18 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
			7 GHz ~ 18 GHz	---

**802.11n-HT20 mode**

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n (HT20)	149	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	157	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
	161	26.5 GHz~ 40 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
	165	7 GHz ~ 18 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
			7 GHz ~ 18 GHz	---

**802.11n-HT40 mode**

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n (HT40)	151	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz~ 40 GHz	---	P
	159	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P

**802.11ac-HT20 mode**

Mode	Channel	Frequency Range	Test Results	Conclusion	
802.11ac (HT20)	149	1 GHz ~ 3 GHz	---	P	
		3 GHz ~ 7 GHz	---	P	
		7 GHz ~ 18 GHz	---	P	
	157	30 MHz ~1 GHz	---	P	
		1 GHz ~ 3 GHz	---	P	
		3 GHz ~ 7 GHz	---	P	
		7 GHz ~ 18 GHz	---	P	
		18 GHz ~ 26.5 GHz	---	P	
		26.5 GHz~ 40 GHz	---	P	
		161	1 GHz ~ 3 GHz	---	P
			3 GHz ~ 7 GHz	---	P
	7 GHz ~ 18 GHz		---	P	
	165	1 GHz ~ 3 GHz	---	P	
		3 GHz ~ 7 GHz	---	P	
		7 GHz ~ 18 GHz	---	P	

**802.11ac-HT40 mode**

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11ac (HT40)	151	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz~ 40 GHz	---	P
	159	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P

**802.11ac-HT80 mode**

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11ac (HT80)	155	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz~ 40 GHz	---	P

**Conclusion: PASS**

**Note:**

A "reference path loss" is established and the  $A_{Rpl}$  is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

$P_{Mea}$  is the field strength recorded from the instrument.

**Average Results:**

**802.11a**

Ch149

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17974.7	47.1	-25.5	46.7	25.9	54	6.9	H
17981.8	47.1	-25.5	46.7	25.9	54	6.9	V
17953.8	47	-25.5	46.7	25.8	54	7	H
17979.1	47	-25.5	46.7	25.8	54	7	H
17993.4	47	-25.5	46.7	25.8	54	7	V
17993.3	47.1	-25.5	46.7	25.7	54	6.9	V

Ch157

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17979.1	47.4	-25.5	46.7	26.2	54	6.6	V
17944.5	47	-25.5	46.7	25.8	54	7	H
17956.5	47	-25.5	46.7	25.8	54	7	H
17961.5	47	-25.5	46.7	25.8	54	7	V
17963.7	47	-25.5	46.7	25.8	54	7	V
17993.4	47	-25.5	46.7	25.8	54	7	H

## Ch161

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17969.8	47.4	-25.5	46.7	26.2	54	6.6	H
17992.3	47.3	-25.5	46.7	26.1	54	6.7	V
17971.4	47.2	-25.5	46.7	26	54	6.8	H
17953.8	47.1	-25.5	46.7	25.9	54	6.9	H
17983	47.1	-25.5	46.7	25.9	54	6.9	H
17953.8	47.1	-25.5	46.7	25.9	54	6.9	H

## Ch165

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17968.8	47.7	-25.5	46.7	26.2	54	6.3	H
17991.3	47.5	-25.5	46.7	26.1	54	6.5	V
17970.4	47.3	-25.5	46.7	26	54	6.7	H
17943.8	47.2	-25.5	46.7	25.9	54	6.8	H
17983.3	47.1	-25.5	46.7	25.9	54	6.9	H
17983.1	47.1	-25.5	46.7	25.9	54	6.9	H

**802.11n-HT20**

## Ch149

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17981.8	47.3	-25.5	46.7	26.1	54	6.7	V
17977.5	47.2	-25.5	46.7	26	54	6.8	H
17979.1	47.2	-25.5	46.7	26	54	6.8	H
17959.3	47.1	-25.5	46.7	25.9	54	6.9	H
17983	47.1	-25.5	46.7	25.9	54	6.9	V
17983.1	47.2	-25.5	46.7	26	54	6.8	V

## Ch157

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17983.5	47.2	-25.5	46.7	26	54	6.8	V
17997.8	47.2	-25.5	46.7	26	54	6.8	H
17980.8	47.1	-25.5	46.7	25.9	54	6.9	V
17981.3	47.1	-25.5	46.7	25.9	54	6.9	V
17950	47	-25.5	46.7	25.8	54	7	V
17967.5	47	-25.5	46.7	25.8	54	7	V

## Ch161

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17973	47	-25.5	46.7	25.8	54	7	V
17996.2	47	-25.5	46.7	25.8	54	7	H
17998.3	47	-25.5	46.7	25.8	54	7	V
17946.1	46.9	-25.5	46.7	25.7	54	6.9	V
17969.2	46.9	-25.5	46.7	25.7	54	6.9	H
17969.2	46.9	-25.5	46.7	25.7	54	6.9	H

## Ch165

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17967.8	47.7	-25.5	46.7	26.2	54	6.3	H
17982.3	47.6	-25.5	46.7	26.1	54	6.4	V
17972.4	47.5	-25.5	46.7	26	54	6.5	H
17963.8	47.3	-25.5	46.7	25.9	54	6.7	H
17979.2	47.2	-25.5	46.7	25.9	54	6.8	H
17979.1	47.2	-25.5	46.7	25.9	54	6.8	V



**802.11n-HT40**

## Ch151

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17985.2	47.4	-25.5	46.7	26.2	54	6.6	V
17989.5	47	-25.5	46.7	25.8	54	7	H
17994	47	-25.5	46.7	25.8	54	7	V
17995	47	-25.5	46.7	25.8	54	7	V
17997.8	47	-25.5	46.7	25.8	54	7	H
17997.9	47	-25.5	46.7	25.8	54	7	V

## Ch159

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17965.3	47.4	-25.5	46.7	26.2	54	6.6	H
17959.8	47.3	-25.5	46.7	26.1	54	6.7	H
17970.8	47.1	-25.5	46.7	25.9	54	6.9	V
17935.1	47	-25.5	46.7	25.8	54	7	H
17962.6	47	-25.5	46.7	25.8	54	7	H
17962.7	47	-25.5	46.7	25.8	54	7	V

**802.11ac-HT20**

## Ch149

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17974.2	47.3	-25.5	46.7	26.1	54	6.7	H
17956.5	47.1	-25.5	46.7	25.9	54	6.9	V
17977.5	47.1	-25.5	46.7	25.9	54	6.9	H
17957.1	47	-25.5	46.7	25.8	54	7	H
17979.1	47	-25.5	46.7	25.8	54	7	H
17979.2	47	-25.5	46.7	25.8	54	7	V

## Ch157

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17980.8	47.3	-25.5	46.7	26.1	54	6.7	V
17964.2	47.2	-25.5	46.7	26	54	6.8	H
17984.6	47.2	-25.5	46.7	26	54	6.8	V
17962	47.1	-25.5	46.7	25.9	54	6.9	H
17973	47.1	-25.5	46.7	25.9	54	6.9	H
17950	47	-25.5	46.7	25.8	54	7	V

## Ch161

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17981.8	47.2	-25.5	46.7	26	54	6.8	H
17982.4	47.1	-25.5	46.7	25.9	54	6.9	V
17998.3	47.1	-25.5	46.7	25.9	54	6.9	H
17975.8	47	-25.5	46.7	25.8	54	7	V
17986.8	47	-25.5	46.7	25.8	54	7	H
17986.9	47.1	-25.5	46.7	25.9	54	6.9	V

## Ch165

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17969.7	47.5	-25.5	46.7	26.2	54	6.5	H
17992.2	47.4	-25.5	46.7	26.1	54	6.6	V
17971.3	47.3	-25.5	46.7	26	54	6.7	H
17953.8	47.2	-25.5	46.7	25.9	54	6.8	H
17983.2	47.2	-25.5	46.7	25.9	54	6.8	H
17983.1	47.1	-25.5	46.7	25.9	54	6.9	V

**802.11ac-HT40**

## Ch151

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17966.5	47.3	-25.5	46.7	26.1	54	6.7	V
17970.8	47.1	-25.5	46.7	25.9	54	6.9	H
17972.5	47.1	-25.5	46.7	25.9	54	6.9	H
17990.1	47.1	-25.5	46.7	25.9	54	6.9	V
17952.2	47	-25.5	46.7	25.8	54	7	V
17952.3	47	-25.5	46.7	25.8	54	7	V

## Ch159

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17964.2	47.2	-25.5	46.7	26	54	6.8	V
17998.9	47.2	-25.5	46.7	26	54	6.8	V
17989.5	47.1	-25.5	46.7	25.9	54	6.9	H
17959.3	47	-25.5	46.7	25.8	54	7	H
17959.8	47	-25.5	46.7	25.8	54	7	H
5850.3	46.1	-16.2	34.4	28	54	7.9	V

**802.11ac-HT80**

## Ch155

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17971.4	47.2	-25.5	46.7	26	54	6.8	V
17964.8	47.1	-25.5	46.7	25.9	54	6.9	H
17969.8	47	-25.5	46.7	25.8	54	7	H
17979.7	47	-25.5	46.7	25.8	54	7	H
17990.7	47	-25.5	46.7	25.8	54	7	H
17997.2	47	-25.5	46.7	25.8	54	7	V

**Peak Results:**
**802.11a**

## Ch149

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17958.8	59.4	-25.5	46.7	38.2	74	14.6	H
17974.2	59	-25.5	46.7	37.8	74	15	H
17973	58.7	-25.5	46.7	37.5	74	15.3	H
17965.9	58	-25.5	46.7	36.8	74	16	V
17967	58	-25.5	46.7	36.8	74	16	V
5724.8	77.1	-16.3	34.3	59.1	121.7	44.6	V

## Ch157

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17936.2	58.5	-25.5	46.7	37.3	74	15.5	H
17965.9	58.4	-25.5	46.7	37.2	74	15.6	H
17958.2	58.3	-25.5	46.7	37.1	74	15.7	H
17904.8	58	-25.5	46.7	36.8	74	16	H
17909.2	58	-25.5	46.7	36.8	74	16	H
17943.9	58	-25.5	46.7	36.8	74	16	V

## Ch161

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17974.2	59.2	-25.5	46.7	38	74	14.8	H
17958.2	59	-25.5	46.7	37.8	74	15	V
17972	58.8	-25.5	46.7	37.6	74	15.2	H
17976.9	58.8	-25.5	46.7	37.6	74	15.2	H
17975.8	58.7	-25.5	46.7	37.5	74	15.3	V
5853.1	56.6	-16.2	34.4	38.5	107.8	51.2	V

## Ch165

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17974.3	59.1	-25.5	46.7	38	74	14.9	V
17957.2	59.2	-25.5	46.7	37.8	74	14.8	H
17972.1	58.7	-25.5	46.7	37.6	74	15.3	H
17976.7	58.7	-25.5	46.7	37.6	74	15.3	V
17975.7	58.6	-25.5	46.7	37.5	74	15.4	V
5853.3	56.6	-16.2	34.4	38.5	107.7	51.1	V

## 802.11n-HT20

## Ch149

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17984	59.3	-25.5	46.7	38.1	74	14.7	V
17899.3	58.5	-25.5	46.7	37.3	74	15.5	V
17957.1	58.5	-25.5	46.7	37.3	74	15.5	V
17989.5	58.4	-25.5	46.7	37.2	74	15.6	V
17578.2	58.1	-25.7	46	37.9	74	15.9	V
5725	70.6	-16.3	34.3	52.6	122.2	51.6	V

## Ch157

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17921.3	58.5	-25.5	46.7	37.3	74	15.5	V
17968.1	58.5	-25.5	46.7	37.3	74	15.5	V
17990.1	58.4	-25.5	46.7	37.2	74	15.6	H
17834.5	58.3	-25.5	46.7	37.1	74	15.7	H
17968.7	58.3	-25.5	46.7	37.1	74	15.7	V
17967.5	58.2	-25.5	46.7	37	74	15.8	V

## Ch161

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17964.2	59.2	-25.5	46.7	38	74	14.8	H
17968.7	59	-25.5	46.7	37.8	74	15	H
17946.7	58.7	-25.5	46.7	37.5	74	15.3	H
17970.8	58.5	-25.5	46.7	37.3	74	15.5	H
17976.3	58.4	-25.5	46.7	37.2	74	15.6	V
5853.1	55.7	-16.2	34.4	37.6	107.8	52.1	V

## Ch165

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17971.3	58.4	-25.5	46.7	37.3	74	15.6	V
17958.7	58.3	-25.5	46.7	37.2	74	15.7	H
17928.9	58.3	-25.5	46.7	37.1	74	15.7	H
17969.7	58.3	-25.5	46.7	37.1	74	15.7	V
17989.1	58.2	-25.5	46.7	37.1	74	15.8	V
5852.3	56.7	-16.2	34.4	38.7	107.5	50.8	V

**802.11n-HT40**

## Ch151

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17938.4	58.6	-25.5	46.7	37.4	74	15.4	H
17968.1	58.5	-25.5	46.7	37.3	74	15.5	H
17964.2	58.4	-25.5	46.7	37.2	74	15.6	V
17976.3	58.4	-25.5	46.7	37.2	74	15.6	V
17992.3	58.3	-25.5	46.7	37.1	74	15.7	H
5724.9	80.6	-16.3	34.3	62.6	121.9	41.3	V

## Ch159

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17946.7	58.8	-25.5	46.7	37.6	74	15.2	V
17967	58.5	-25.5	46.7	37.3	74	15.5	H
17875.2	58.4	-25.5	46.7	37.2	74	15.6	V
17929.6	58.4	-25.5	46.7	37.2	74	15.6	H
17962.6	58.4	-25.5	46.7	37.2	74	15.6	H
5857.9	63.2	-16.2	34.4	45.1	107.1	43.9	V

## 802.11ac-HT20

## Ch149

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17902.1	58.8	-25.5	46.7	37.6	74	15.2	H
17944.5	58.6	-25.5	46.7	37.4	74	15.4	V
17946.1	58.6	-25.5	46.7	37.4	74	15.4	V
17979.7	58.6	-25.5	46.7	37.4	74	15.4	V
17970.8	58.3	-25.5	46.7	37.1	74	15.7	V
5724.9	71.3	-16.3	34.3	53.3	121.9	50.6	V

## Ch157

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17946.7	59.5	-25.5	46.7	38.3	74	14.5	H
17985.7	58.6	-25.5	46.7	37.4	74	15.4	H
17992.3	58.5	-25.5	46.7	37.3	74	15.5	H
17956	58.3	-25.5	46.7	37.1	74	15.7	H
17967	58.1	-25.5	46.7	36.9	74	15.9	V
17979.1	58.1	-25.5	46.7	36.9	74	15.9	H

## Ch161

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17971.4	58.5	-25.5	46.7	37.3	74	15.5	V
17958.8	58.4	-25.5	46.7	37.2	74	15.6	H
17929	58.3	-25.5	46.7	37.1	74	15.7	H
17969.8	58.3	-25.5	46.7	37.1	74	15.7	V
17989	58.3	-25.5	46.7	37.1	74	15.7	V
5852.2	56.8	-16.2	34.4	38.7	107.7	50.9	V

## Ch165

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17971.3	58.4	-25.5	46.7	37.3	74	15.6	V
17958.7	58.3	-25.5	46.7	37.2	74	15.7	H
17929	58.3	-25.5	46.7	37.1	74	15.7	H
17969.8	58.3	-25.5	46.7	37.1	74	15.7	V
17989	58.2	-25.5	46.7	37.1	74	15.8	V
5853.2	56.8	-16.2	34.4	38.7	107.5	50.7	V

**802.11ac-HT40**

## Ch151

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17954.3	59.3	-25.5	46.7	38.1	74	14.7	H
17992.3	58.8	-25.5	46.7	37.6	74	15.2	H
17973	58.7	-25.5	46.7	37.5	74	15.3	H
17987.9	58.5	-25.5	46.7	37.3	74	15.5	V
17998.9	58.3	-25.5	46.7	37.1	74	15.7	V
5724.8	79.7	-16.3	34.3	61.7	121.7	42	V



## Ch159

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17980.8	58.7	-25.5	46.7	37.5	74	15.3	H
17985.2	58.4	-25.5	46.7	37.2	74	15.6	H
17940	58.2	-25.5	46.7	37	74	15.8	V
17977.5	58.1	-25.5	46.7	36.9	74	15.9	H
17902.7	58	-25.5	46.7	36.8	74	16	H
5854.8	63.6	-16.2	34.4	45.5	107.4	43.8	V

## 802.11ac-HT80

## Ch155

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17880.1	58.7	-25.5	46.7	37.5	74	15.3	V
17965.9	58.6	-25.5	46.7	37.4	74	15.4	H
17948.3	58.4	-25.5	46.7	37.2	74	15.6	V
17968.7	58.3	-25.5	46.7	37.1	74	15.7	V
17985.7	58.3	-25.5	46.7	37.1	74	15.7	V
17942.2	58.2	-25.5	46.7	37	74	15.8	H

## B.6. Band Edges Compliance

### B.6.1 Band Edges - Radiated

#### Measurement Limit:

Standard	Limit (dBm/MHz)	
FCC 47 CFR Part 15.407	at the band edge	27
	at 5 MHz above or below the band edge	15.6
	at 25 MHz above or below the band edge	10
	at 75 MHz or more above or below the band edge	-27
	Note: increasing linearly from point to point.	

#### Measurement Uncertainty:


Measurement Uncertainty	0.75dB
-------------------------	--------

#### Measurement Result:


Mode	Channel	Test Results	Conclusion
802.11a	5745 MHz	Fig.18	P
	5805 MHz	Fig.19	P
	5825 MHz	Fig.20	P
802.11n HT20	5745 MHz	Fig.21	P
	5805 MHz	Fig.22	P
	5825 MHz	Fig.23	P
802.11n HT40	5755 MHz	Fig.24	P
	5795 MHz	Fig.25	P
802.11ac HT20	5745 MHz	Fig.26	P
	5805 MHz	Fig.27	P
	5825 MHz	Fig.28	
802.11ac HT40	5755 MHz	Fig.29	P
	5795 MHz	Fig.30	P
802.11ac HT80	5775 MHz	Fig.31 Fig.32	P

**Conclusion: PASS**


**Test graphs as below:**

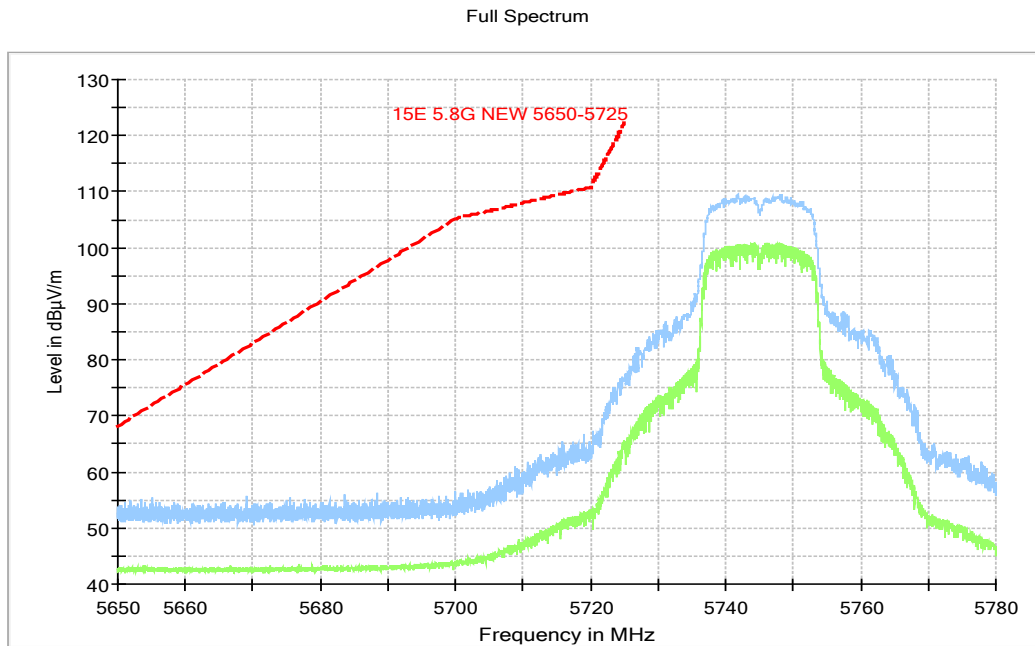


**Fig. 18 Band Edges (802.11a, 5745MHz)**

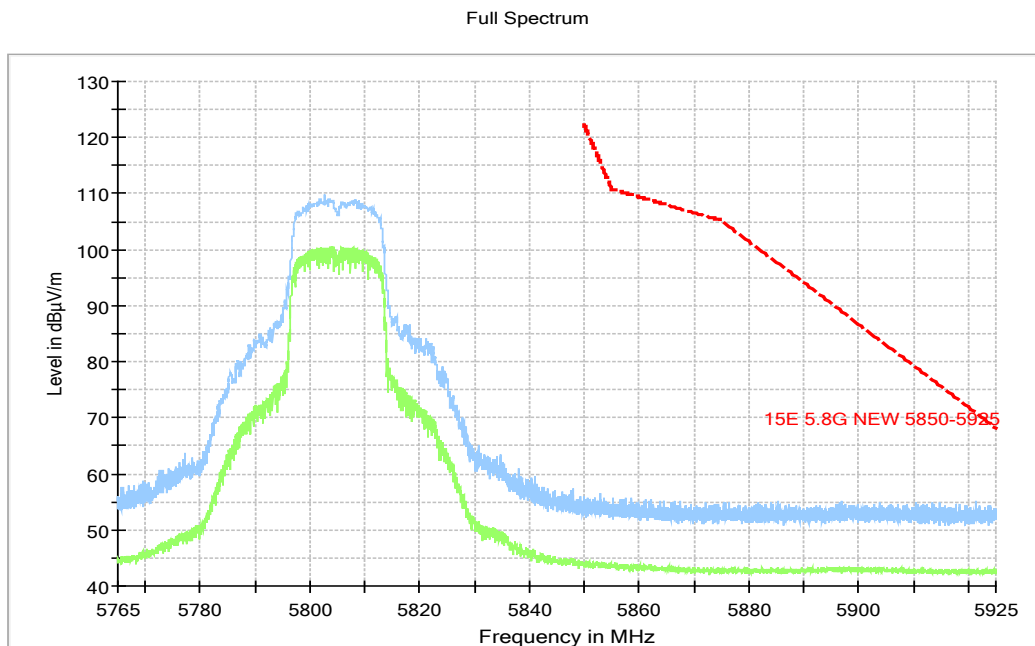


**Fig. 19 Band Edges (802.11a, 5805MHz)**

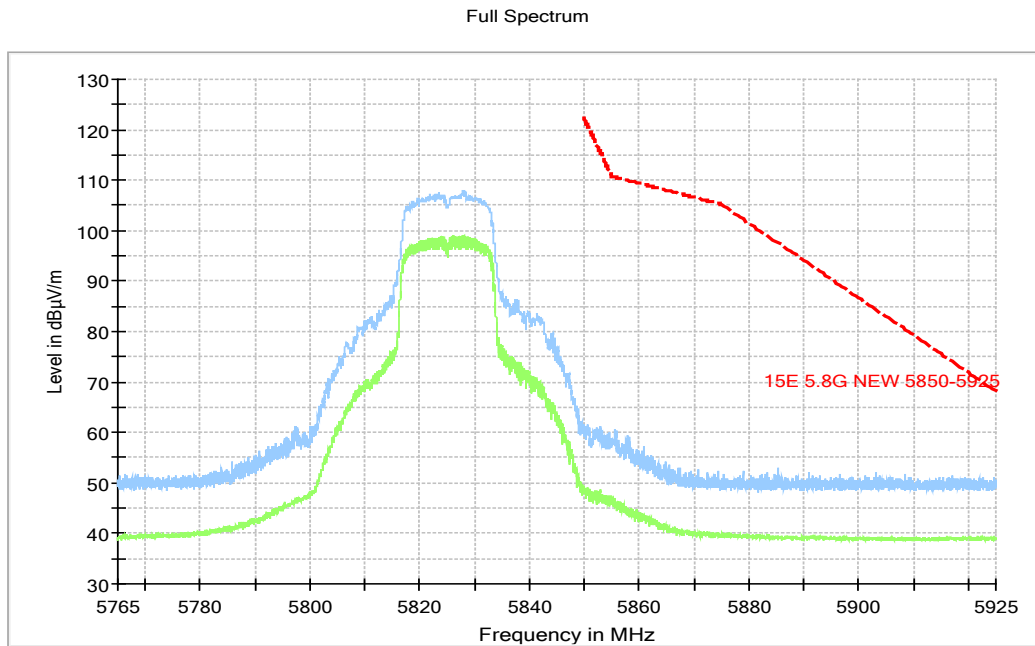


**Fig. 20 Band Edges (802.11a, 5825MHz)**

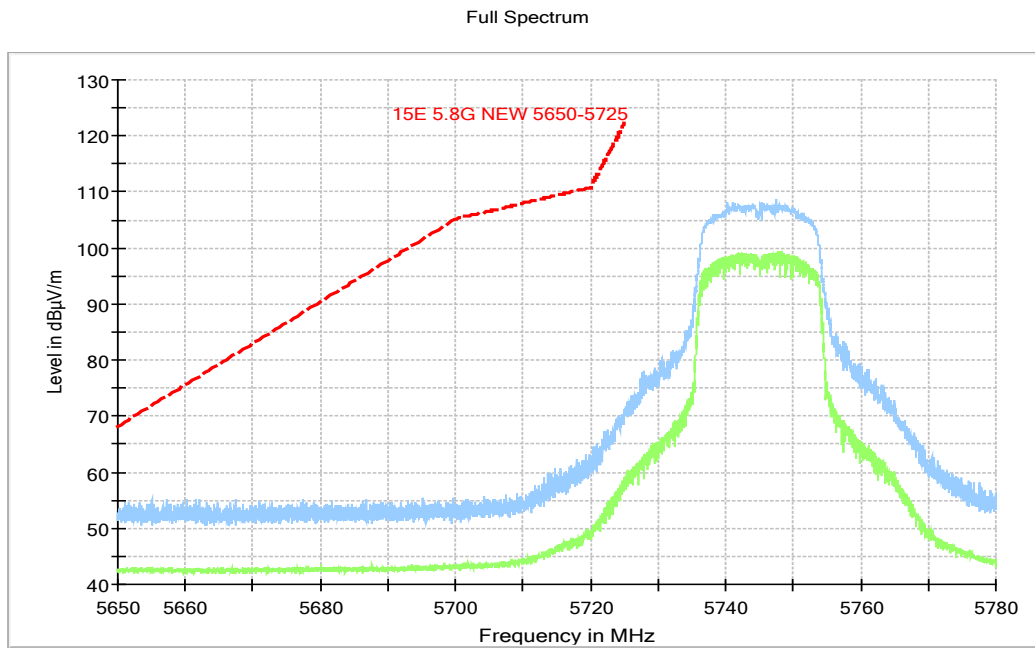


**Fig. 21 Band Edges (802.11n-HT20, 5745MHz)**

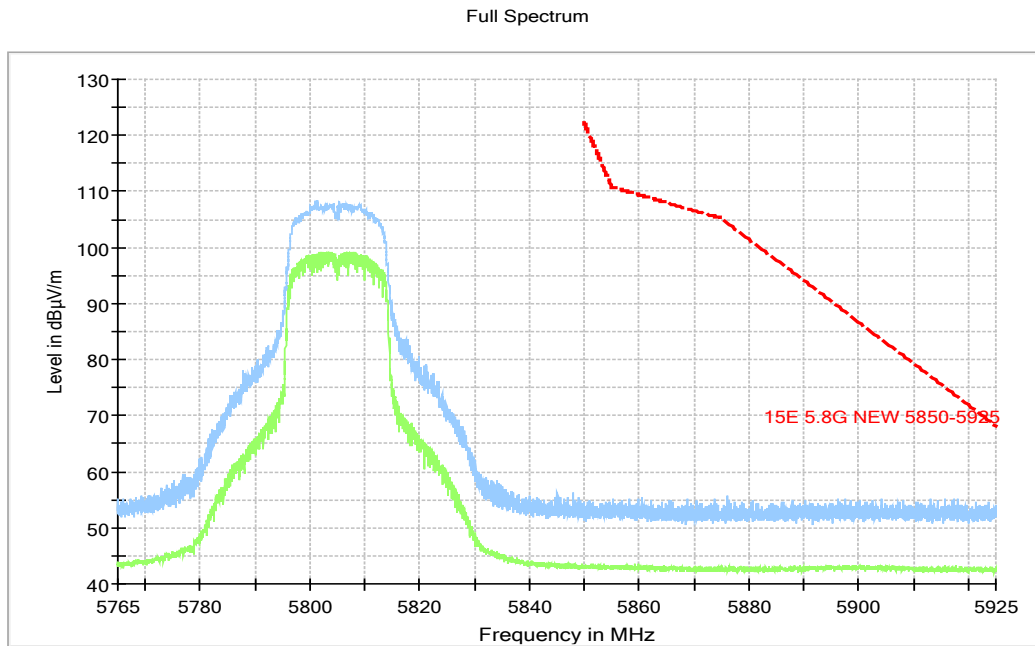


**Fig. 22 Band Edges (802.11n-HT20, 5805MHz)**

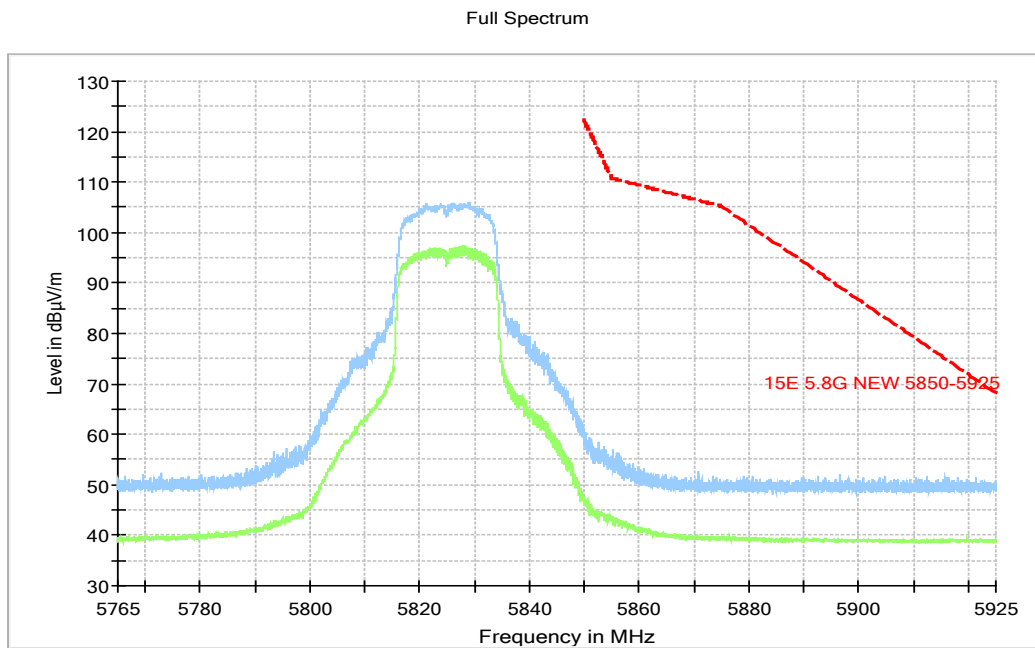


**Fig. 23 Band Edges (802.11n-HT20, 5825MHz)**

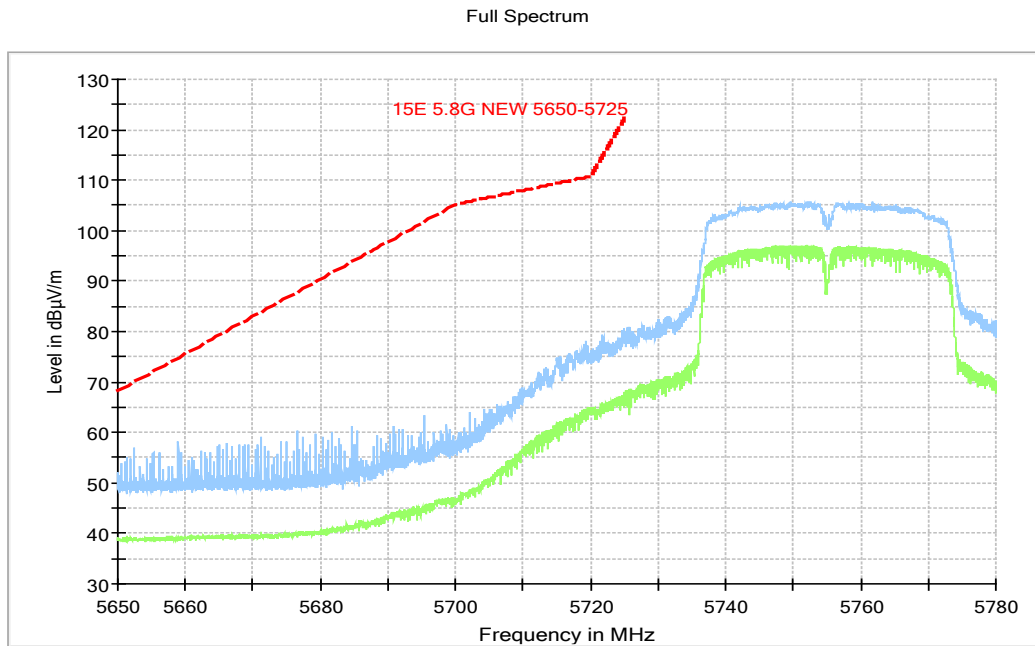


**Fig. 24 Band Edges (802.11n-HT40, 5755MHz)**

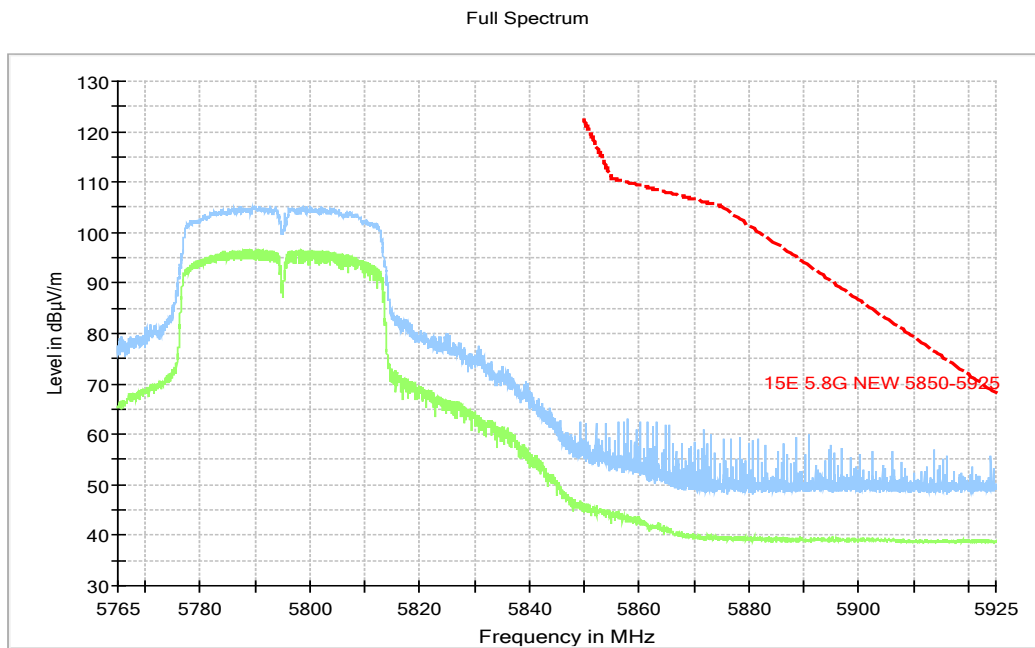


**Fig. 25 Band Edges (802.11n-HT40, 5795MHz)**

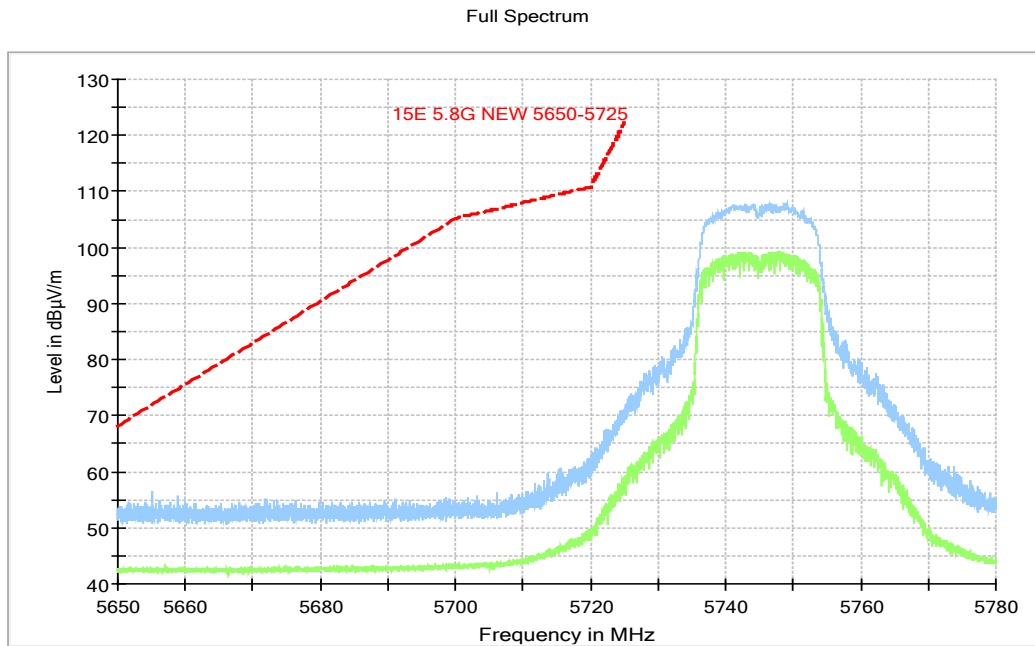


**Fig. 26 Band Edges (802.11ac-HT20, 5745MHz)**

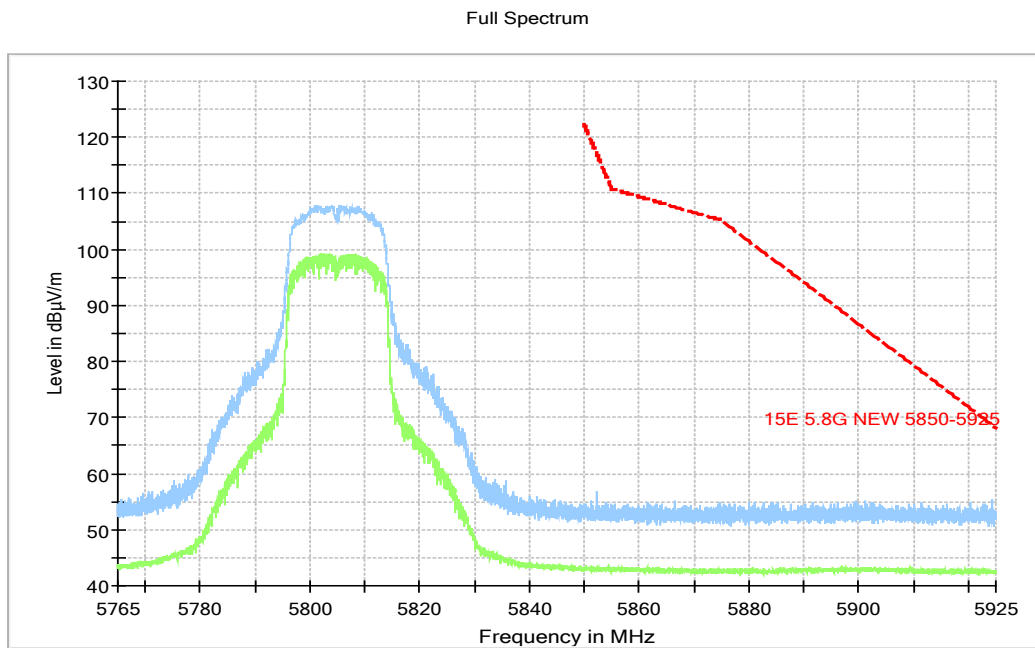

**Fig. 27 Band Edges (802.11ac-HT20, 5805MHz)**

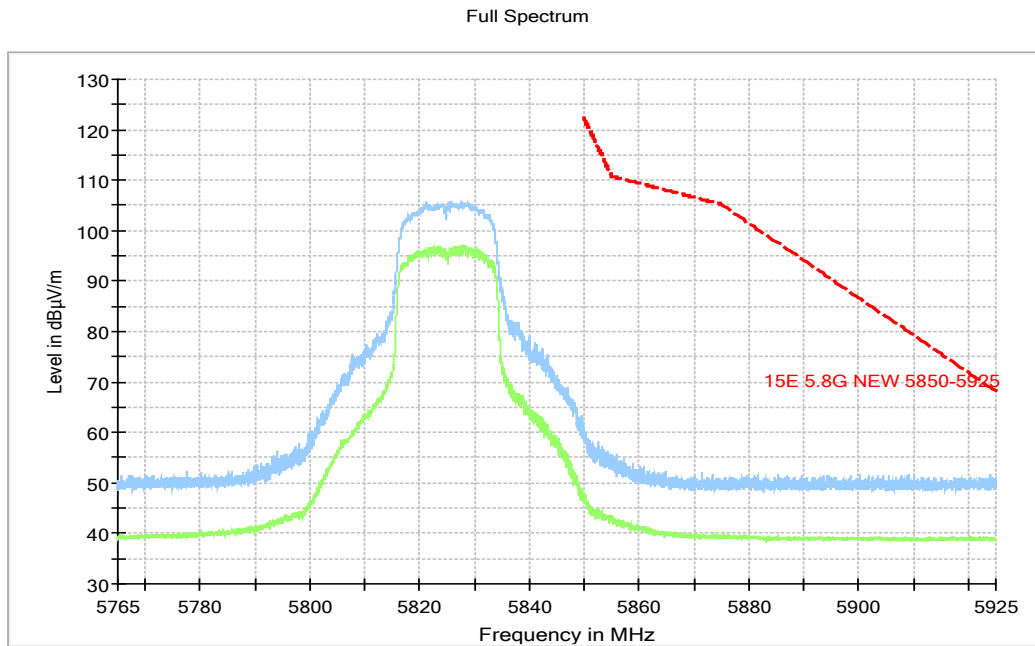


**Fig. 28 Band Edges (802.11ac-HT20, 5825MHz)**

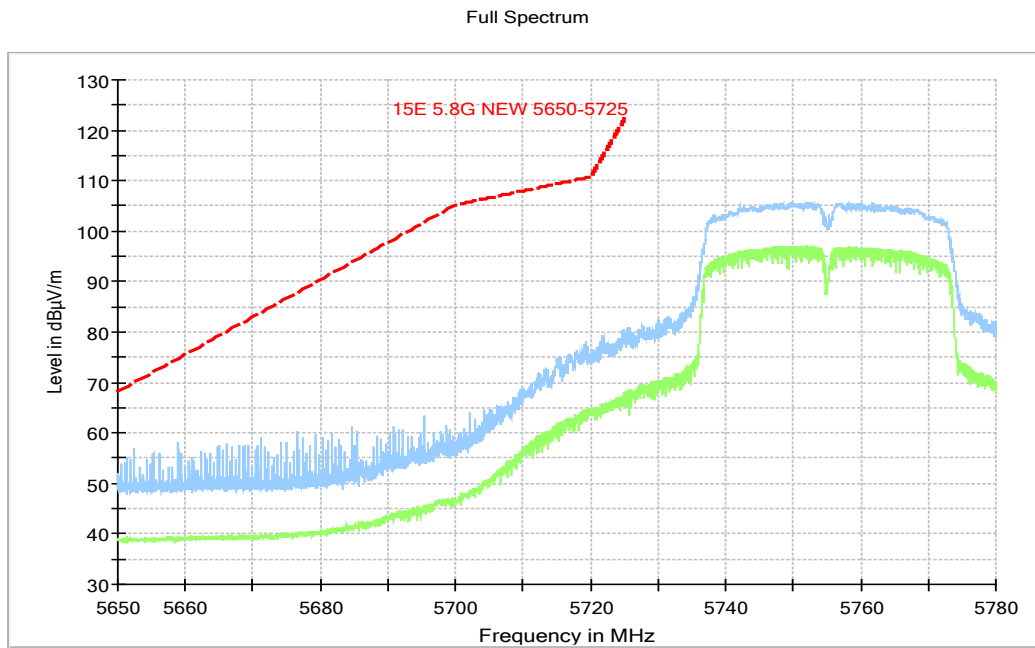


**Fig. 29 Band Edges (802.11ac-HT40, 5755MHz)**



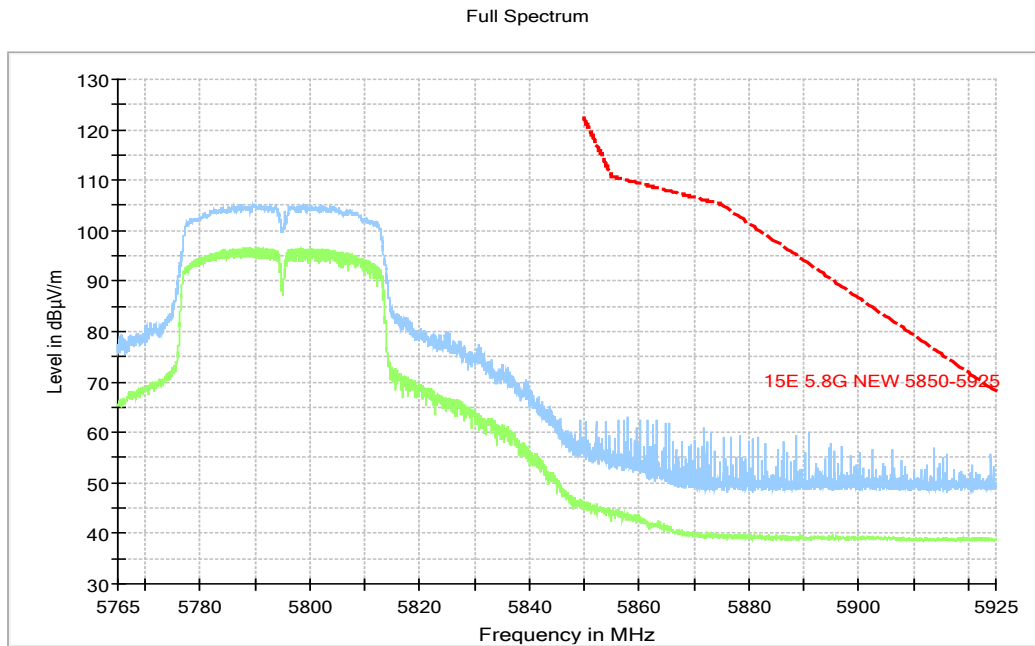


**Fig. 30 Band Edges (802.11ac-HT40, 5795MHz)**

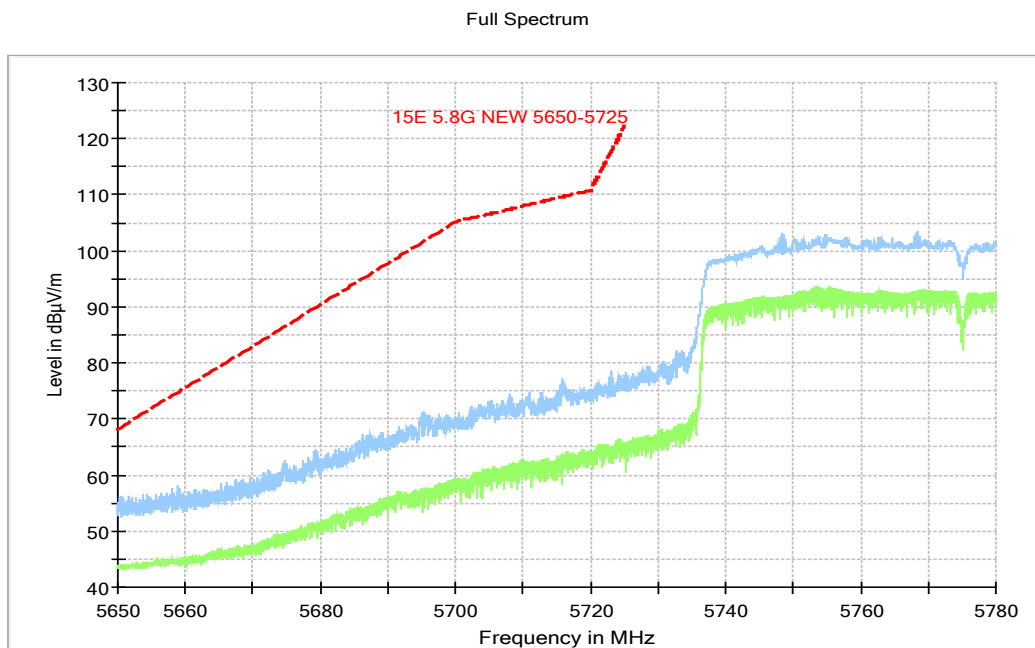

**Fig. 31 Band Edges (802.11ac-HT80, 5775MHz)**

Full Spectrum

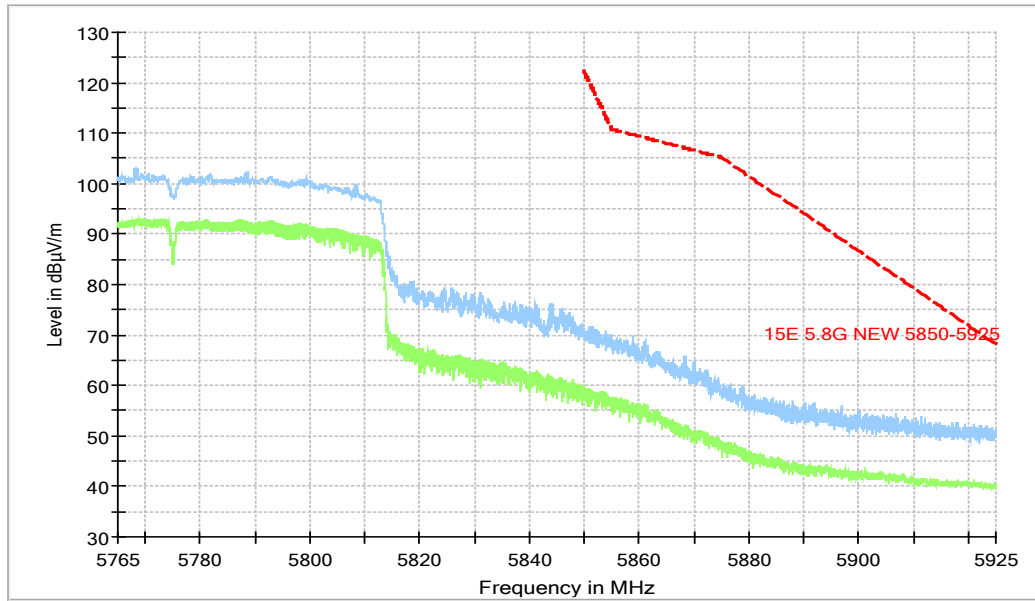

**Fig. 32 Band Edges (802.11ac-HT80, 5775MHz)**

## B.7. AC Powerline Conducted Emission

### Test Condition:

Voltage (V)	Frequency (Hz)
120	60

### Measurement uncertainty:

Expanded measurement uncertainty for this test item is  $U = 3.10\text{dB}$ ,  $k=2$ .

### Measurement Result and limit:

WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB $\mu$ V)	Result (dB $\mu$ V)		Conclusion
		With charger		
		802.11a	Idle	
0.15 to 0.5	66 to 56	Fig.33	Fig.34	P
0.5 to 5	56			
5 to 30	60			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)

Frequency range (MHz)	Average Limit (dB $\mu$ V)	Result (dB $\mu$ V)		Conclusion
		With charger		
		802.11a	Idle	
0.15 to 0.5	56 to 46	Fig.33	Fig.34	P
0.5 to 5	46			
5 to 30	50			


NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

The measurement is made according to ANSI C63.10 .

**Conclusion: PASS**

Test graphs as below:

Traffic:

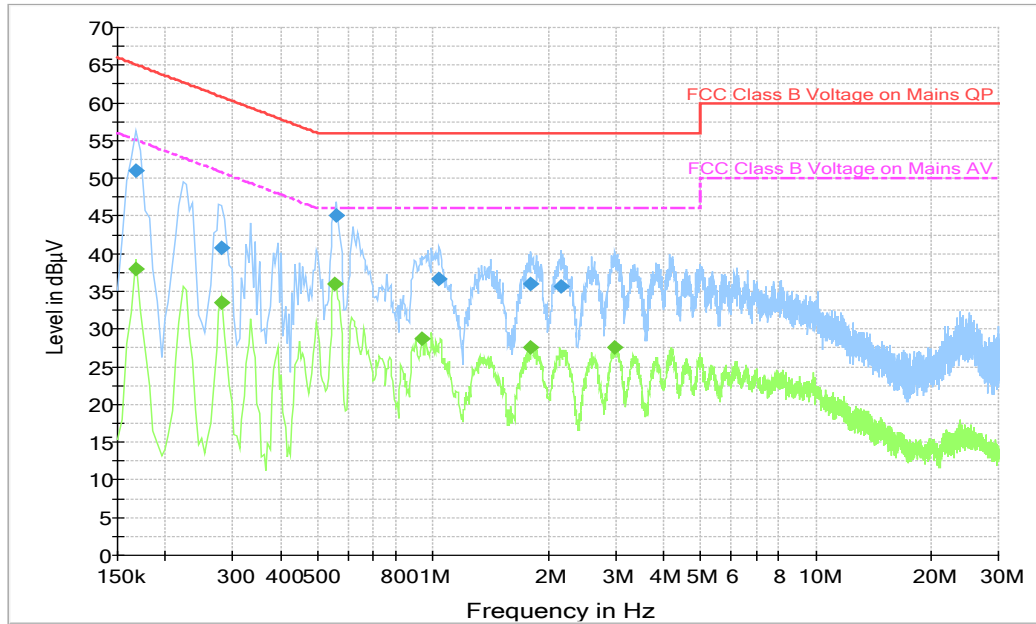

**Fig. 33 AC Power line Conducted Emission-802.11a**

Note1: The graphic result above is the maximum of the measurements for both phase line and neutral line.


**Final Result 1**

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.168000	51.0	1000.0	9.000	L1	19.7	14.0	65.1
0.280500	40.8	1000.0	9.000	L1	19.6	20.0	60.8
0.559500	45.0	1000.0	9.000	L1	19.6	11.0	56.0
1.036500	36.6	1000.0	9.000	L1	19.6	19.4	56.0
1.801500	35.9	1000.0	9.000	L1	19.5	20.1	56.0
2.170500	35.6	1000.0	9.000	L1	19.6	20.4	56.0

**Final Result 2**

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.168000	37.9	1000.0	9.000	L1	19.7	17.1	55.1
0.280500	33.5	1000.0	9.000	L1	19.6	17.3	50.8
0.555000	35.9	1000.0	9.000	L1	19.6	10.1	46.0
0.937500	28.7	1000.0	9.000	L1	19.6	17.3	46.0
1.801500	27.6	1000.0	9.000	L1	19.5	18.4	46.0
2.971500	27.5	1000.0	9.000	L1	19.6	18.5	46.0

Idle:

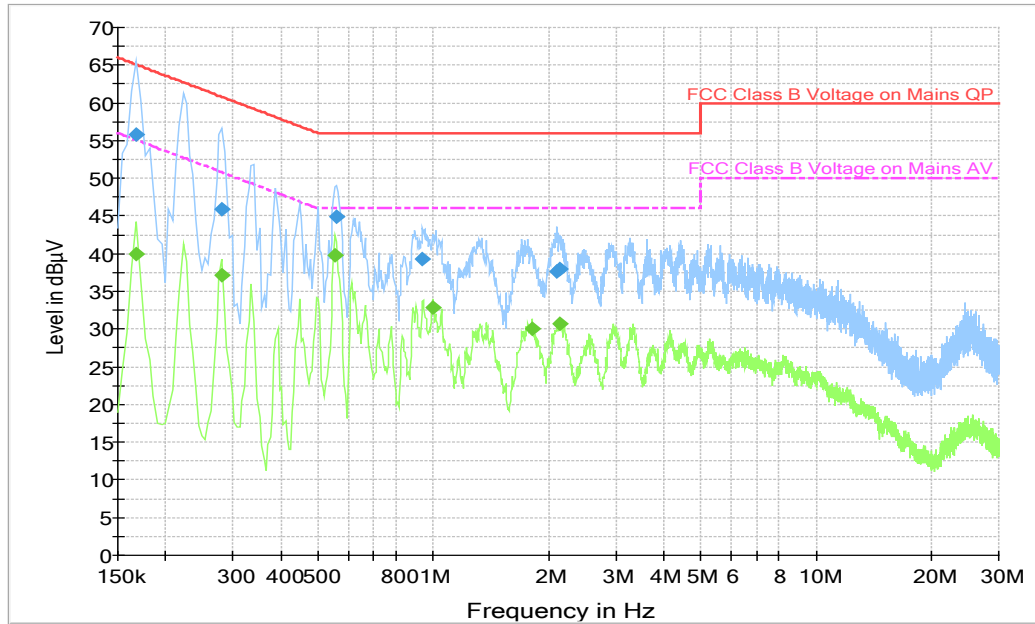

**Fig. 34 AC Power line Conducted Emission-Idle**

Note1: The graphic result above is the maximum of the measurements for both phase line and neutral line.








**Final Result 1**

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.168000	55.9	1000.0	9.000	L1	19.7	9.2	65.1
0.280500	46.0	1000.0	9.000	L1	19.6	14.8	60.8
0.559500	44.9	1000.0	9.000	L1	19.6	11.1	56.0
0.937500	39.3	1000.0	9.000	N	19.6	16.7	56.0
2.103000	37.6	1000.0	9.000	L1	19.5	18.4	56.0
2.148000	37.9	1000.0	9.000	N	19.5	18.1	56.0

**Final Result 2**

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.168000	39.9	1000.0	9.000	L1	19.7	15.1	55.1
0.280500	37.2	1000.0	9.000	N	19.6	13.6	50.8
0.555000	39.9	1000.0	9.000	N	19.5	6.1	46.0
0.996000	32.8	1000.0	9.000	N	19.6	13.2	46.0
1.810500	30.1	1000.0	9.000	N	19.5	15.9	46.0
2.148000	30.7	1000.0	9.000	N	19.5	15.3	46.0

## ANNEX C: Accreditation Certificate

<p>United States Department of Commerce National Institute of Standards and Technology</p> <p><b>NVLAP</b><sup>®</sup> </p> <hr/> <p><b>Certificate of Accreditation to ISO/IEC 17025:2017</b></p> <hr/> <p>NVLAP LAB CODE: 600118-0</p> <p><b>Telecommunication Technology Labs, CAICT</b> Beijing China</p> <p><i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:</i></p> <p><b>Electromagnetic Compatibility &amp; Telecommunications</b></p> <p><i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).</i></p> <hr/> <table border="0" style="width: 100%;"><tr><td style="width: 40%; text-align: center;"><p>2020-09-29 through 2021-09-30 <i>Effective Dates</i></p></td><td style="width: 20%; text-align: center;"></td><td style="width: 40%; text-align: center;"> <hr/><p><i>For the National Voluntary Laboratory Accreditation Program</i></p></td></tr></table>		<p>2020-09-29 through 2021-09-30 <i>Effective Dates</i></p>		 <hr/> <p><i>For the National Voluntary Laboratory Accreditation Program</i></p>
<p>2020-09-29 through 2021-09-30 <i>Effective Dates</i></p>		 <hr/> <p><i>For the National Voluntary Laboratory Accreditation Program</i></p>		

\*\*\* END OF REPORT BODY \*\*\*