



1. Peak-Average Ratio

1.1 GSM850


1.1.1 Test Result

Band: GSM850						
ENV	Mode		Frequency (MHz)	Peak-Average Ratio (dB)		Verdict
	Network	Subset		Result	Limit	
NTNV	GPRS	4 TX Slots	824.2	9.89	<=13	Pass
			836.6	4.67	<=13	Pass
			848.8	4.74	<=13	Pass
	EGPRS	4 TX Slots	824.2	10.84	<=13	Pass
			836.6	10.99	<=13	Pass
			848.8	11.15	<=13	Pass


1.1.2 Test Graph

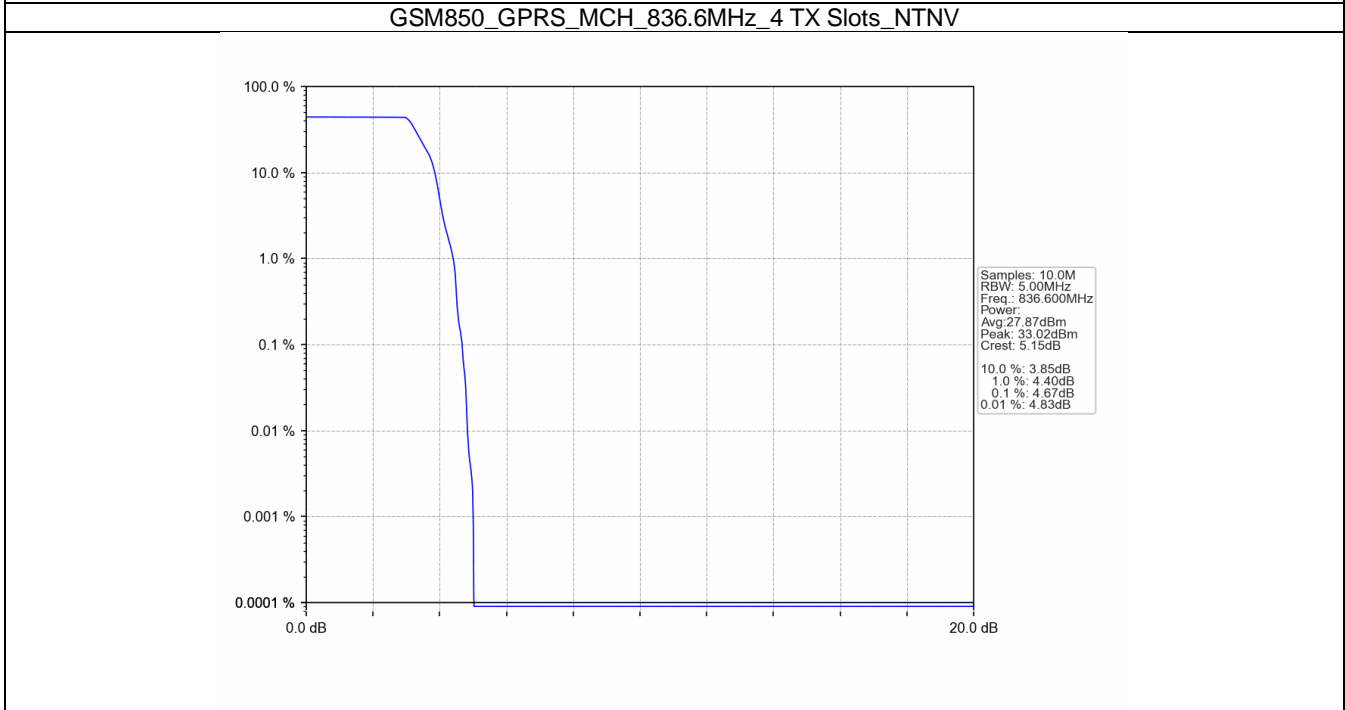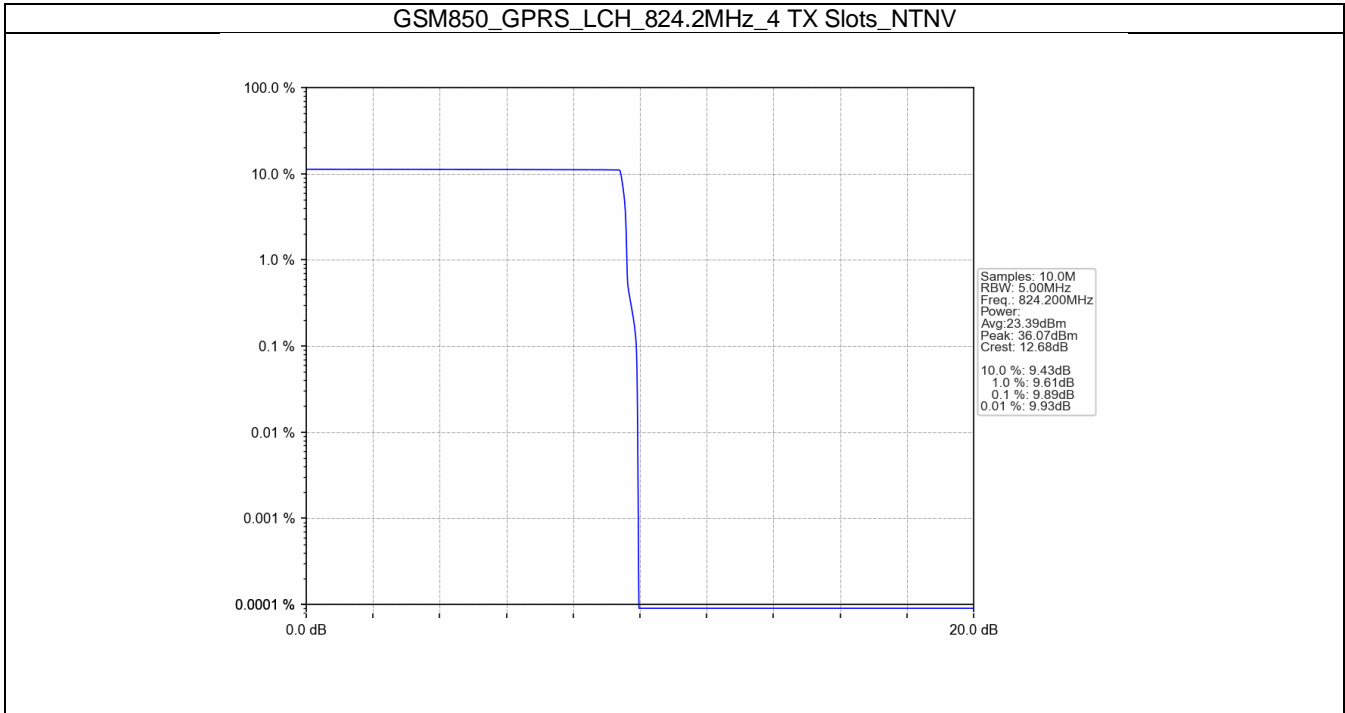


GSM850_GPRS_HCH_848.8MHz_4 TX Slots_NTNV

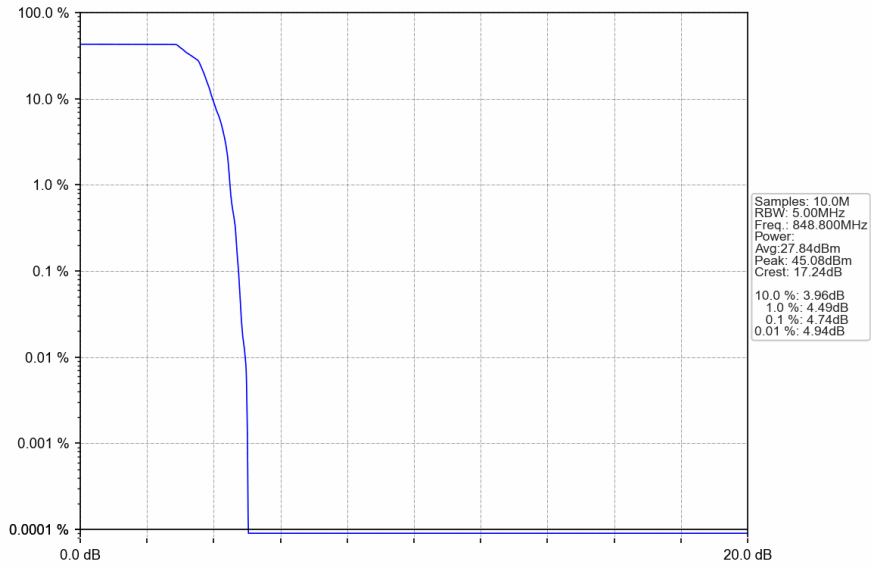


GSM850_EGPRS_LCH_824.2MHz_4 TX Slots_NTNV

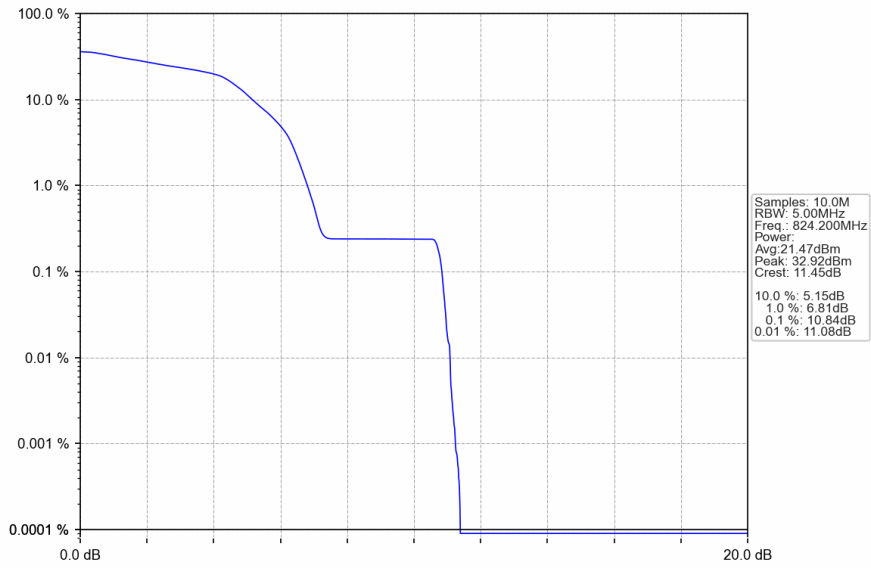

GSM850_EGPRS_MCH_836.6MHz_4 TX Slots_NTNV

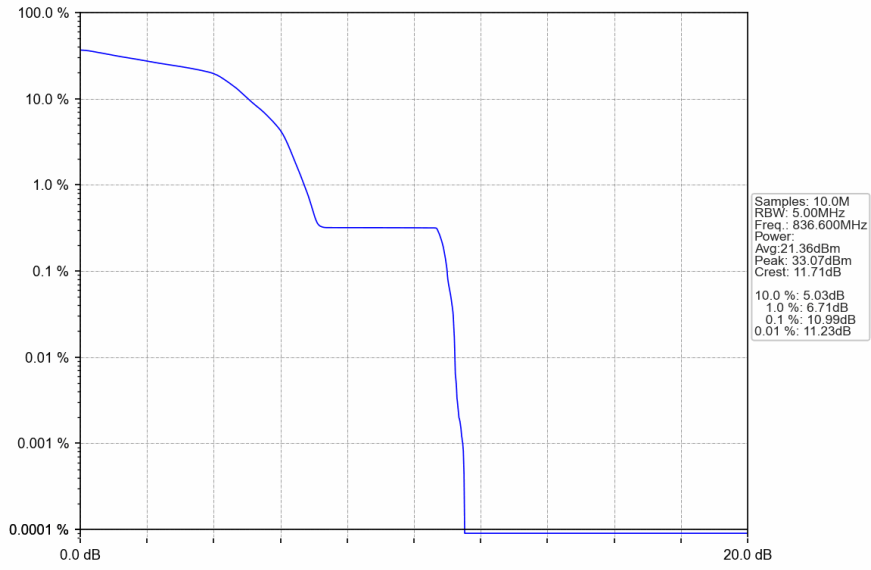

GSM850_EGPRS_HCH_848.8MHz_4 TX Slots_NTNV

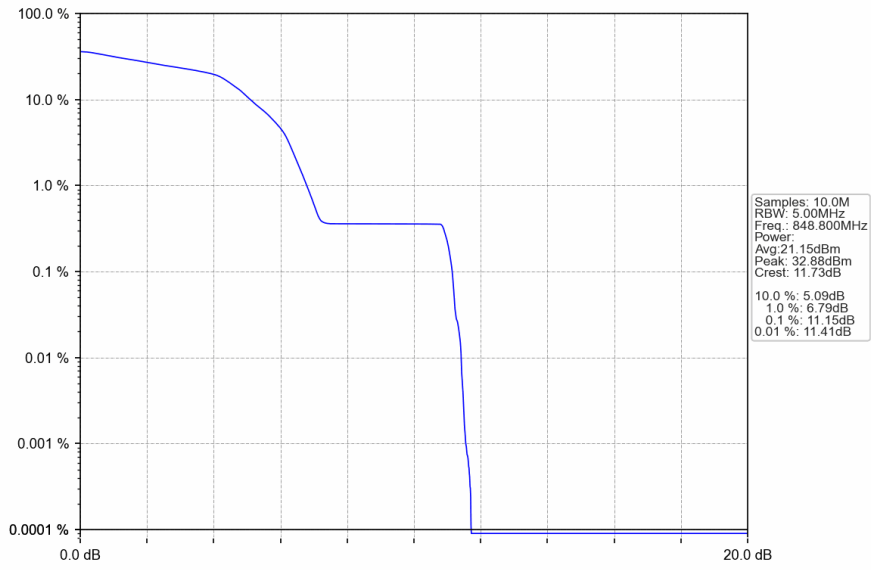


2. Peak-Average Ratio

2.1 PCS1900


2.1.1 Test Result

Band: PCS1900						
ENV	Mode		Frequency (MHz)	Peak-Average Ratio (dB)		Verdict
	Network	Subset		Result	Limit	
NTNV	GPRS	4 TX Slots	1850.2	9.65	<=13	Pass
			1880	4.30	<=13	Pass
			1909.8	3.98	<=13	Pass
	EGPRS	4 TX Slots	1850.2	8.48	<=13	Pass
			1880	8.19	<=13	Pass
			1909.8	8.48	<=13	Pass


2.1.2 Test Graph

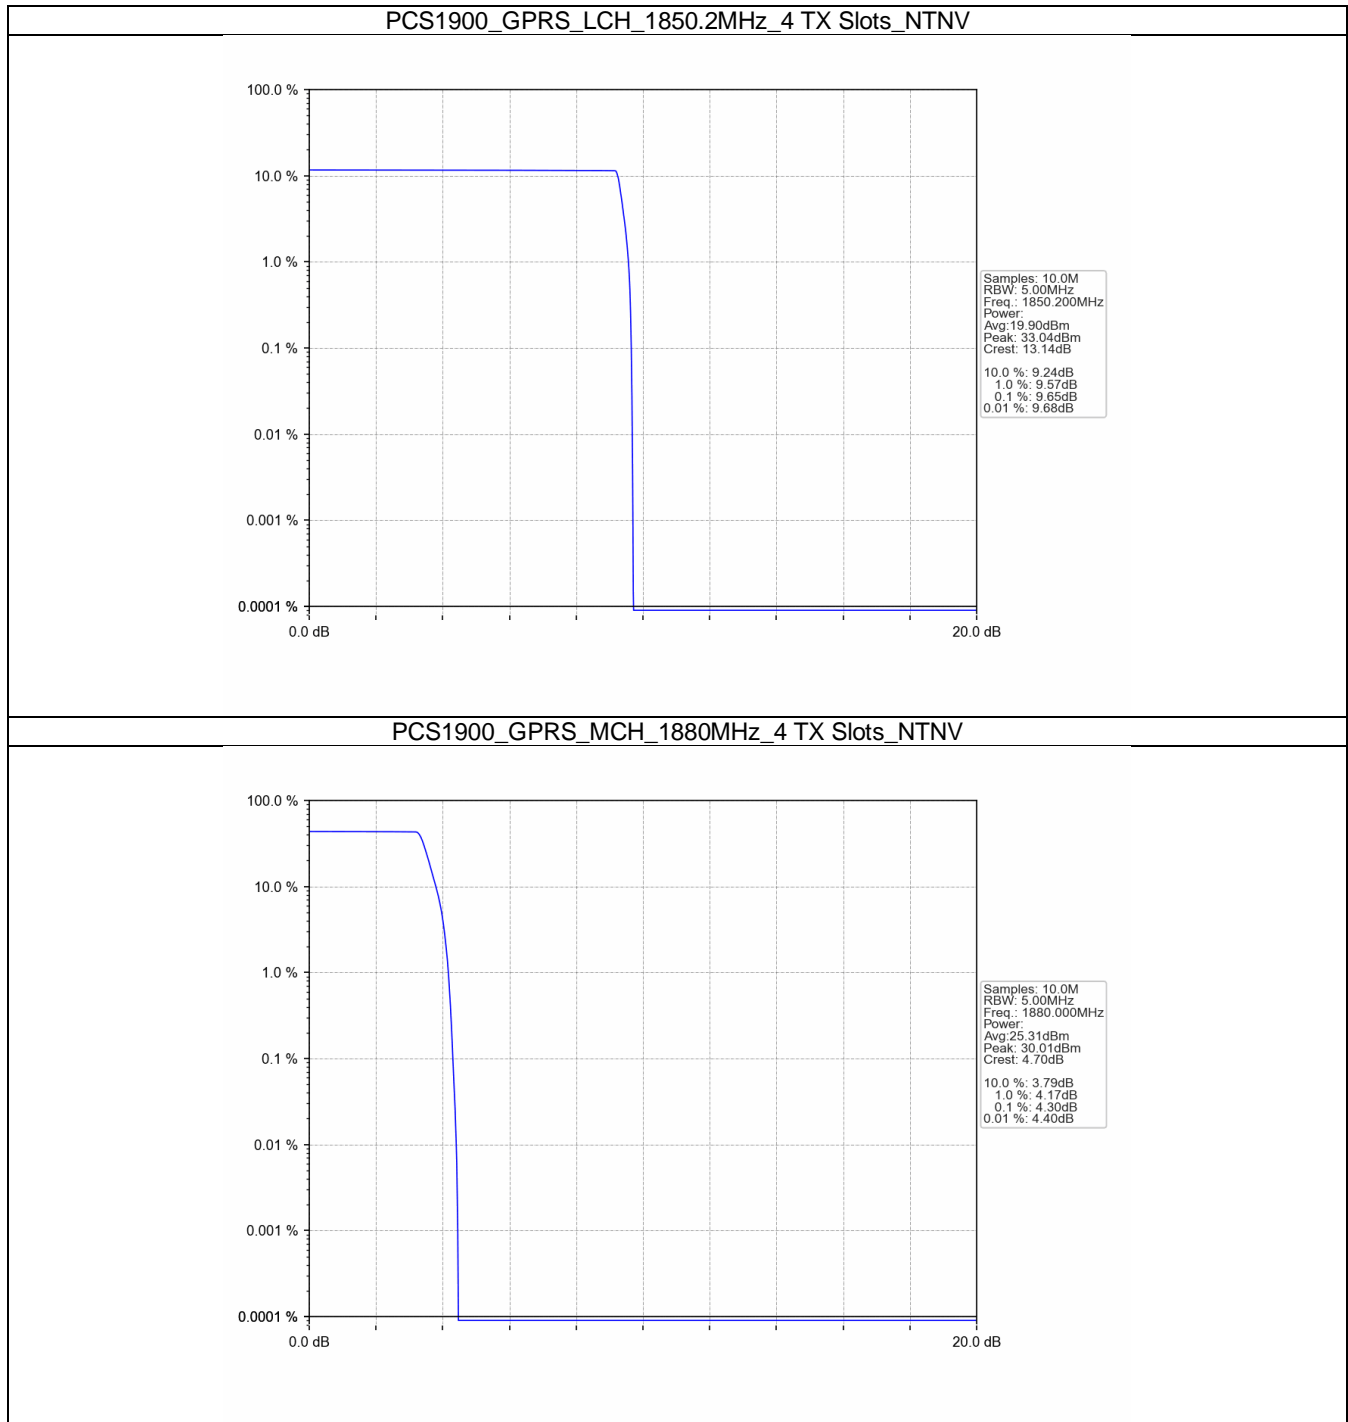


PCS1900_GPRS_HCH_1909.8MHz_4 TX Slots_NTNV

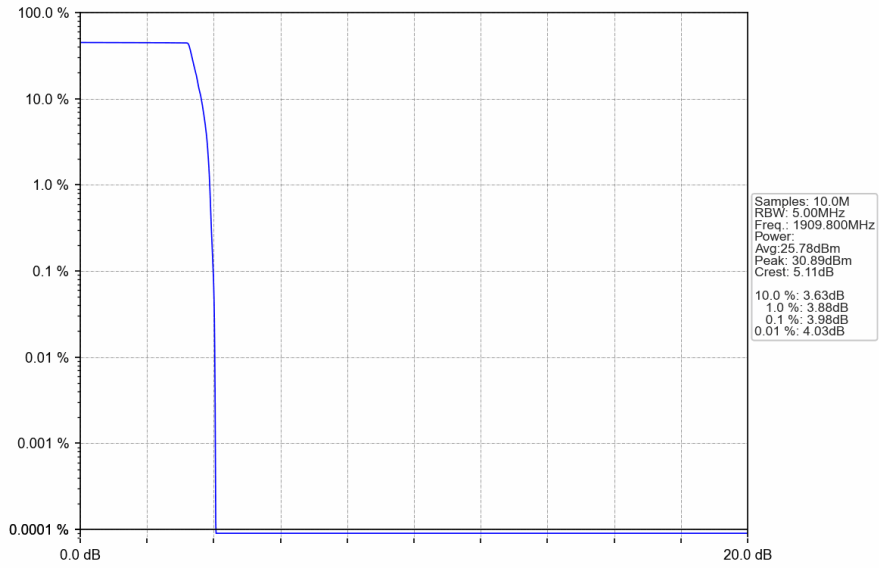

PCS1900_EGPRS_LCH_1850.2MHz_4 TX Slots_NTNV

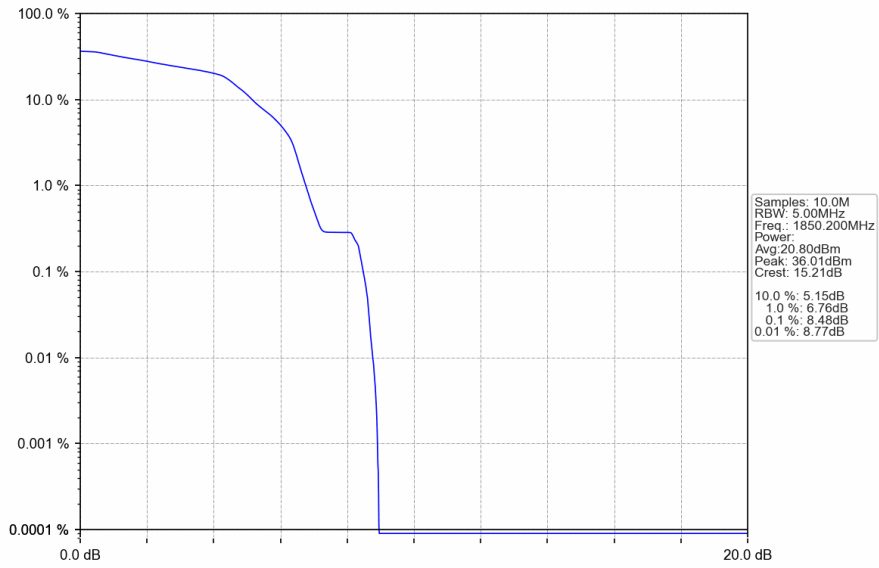

PCS1900_EGPRS_MCH_1880MHz_4 TX Slots_NTNV

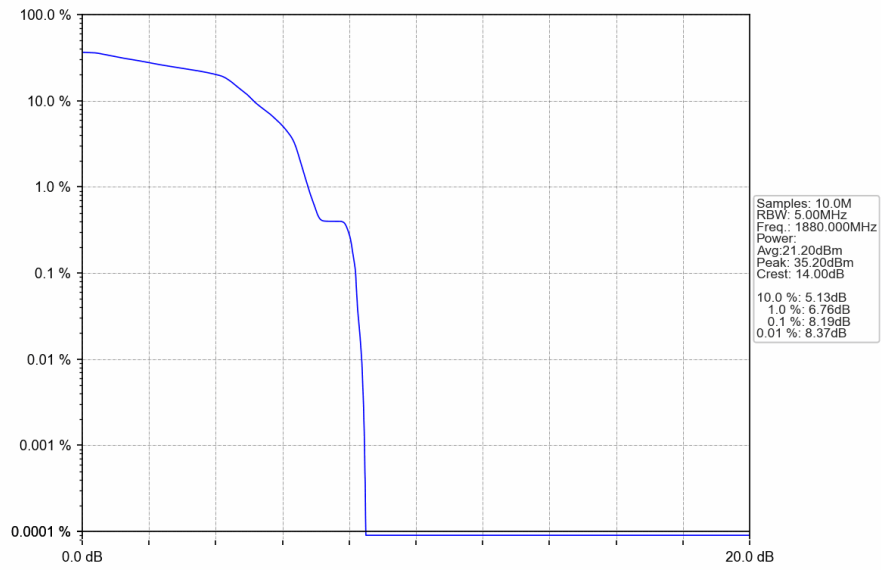

PCS1900_EGPRS_HCH_1909.8MHz_4 TX Slots_NTNV

