

FCC SAR EVALUATION REPORT

In accordance with the requirements of
FCC 47 CFR Part 2(2.1093), ANSI/IEEE C95.1-1992 and
IEEE Std 1528-2013

Product Name : Mobile Phone

Trademark : Easyfone

Model Name : Chaperon-T200

Family Model : N/A

Report No. : STR211116002004E

FCC ID : 2AQ8SCHAPERONT200

Prepared for

Shen Zhen Yixun Electronic Technology Co., Ltd.
14D, HuaqiaoXinyuan, WanzhongCity, Xinniu Community,
Minzhi St., Longhua Dist., Shenzhen, Guangdong, China

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.
1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street,
Bao'an District, Shenzhen 518126 P.R.China.
Tel.: 400-800-6106, 0755-2320 0050, 0755-2320 0090
Website: <http://www.ntek.org.cn>

TEST RESULT CERTIFICATION

Applicant's name.....: Shen Zhen Yixun Electronic Technology Co., Ltd.
 Address.....: 14D, HuaqiaoXinyuan, WanzhongCity, Xinniu Community, Minzhi St.,
 Longhua Dist., Shenzhen, Guangdong, China

Manufacturer's Name.....: Shen Zhen Yixun Electronic Technology Co., Ltd.
 Address.....: 14D, HuaqiaoXinyuan, WanzhongCity, Xinniu Community, Minzhi St.,
 Longhua Dist., Shenzhen, Guangdong, China

Product description

Product name.....: Mobile Phone
 Trademark: Easyfone
 Model Name: Chaperon-T200
 Family Model.....: N/A

FCC 47 CFR Part 2(2.1093)

Standards.....: ANSI/IEEE C95.1-1992;IEEE Std 1528-2013
 Published RF exposure KDB procedures

This device described above has been tested by Shenzhen NTEK. In accordance with the measurement methods and procedures specified in IEEE Std 1528-2013 and KDB 865664 D01. Testing has shown that this device is capable of compliance with localized specific absorption rate (SAR) specified in FCC 47 CFR Part 2(2.1093) and ANSI/IEEE C95.1-1992. The test results in this report apply only to the tested sample of the stated device/equipment. Other similar device/equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

This report shall not be reproduced except in full, without the written approval of Shenzhen NTEK, this document may be altered or revised by Shenzhen NTEK, personal only, and shall be noted in the revision of the document.

Date of Test

Date (s) of performance of tests..... : Nov. 17, 2021 ~ Nov. 26, 2021

Date of Issue : Nov. 30, 2021

Test Result : **Pass**

Prepared By : Jacob.chen
 (Test Engineer) : (Jacob Chen)

Approved By : Alex
 (Lab Manager) : (Alex Li)

※ ※ **Revision History** ※ ※

REV.	DESCRIPTION	ISSUED DATE	REMARK
Rev.1.0	Initial Test Report Release	Nov. 30, 2021	Jacob Chen

TABLE OF CONTENTS

1.	General Information	6
1.1.	RF exposure limits.....	6
1.2.	Statement of Compliance	7
1.3.	EUT Description	7
1.4.	Test specification(s)	9
1.5.	Ambient Condition.....	9
2.	SAR Measurement System	10
2.1.	SATIMO SAR Measurement Set-up Diagram	10
2.2.	Robot	11
2.3.	E-Field Probe.....	12
2.3.1.	E-Field Probe Calibration	12
2.4.	SAM phantoms	13
2.4.1.	Technical Data	14
2.5.	Device Holder	15
2.6.	Test Equipment List	16
3.	SAR Measurement Procedures	18
3.1.	Power Reference	18
3.2.	Area scan & Zoom scan.....	18
3.3.	Description of interpolation/extrapolation scheme	20
3.4.	Volumetric Scan	20
3.5.	Power Drift	20
4.	System Verification Procedure	21
4.1.	Tissue Verification	21
4.1.1.	Tissue Dielectric Parameter Check Results	22
4.2.	System Verification Procedure	23
4.2.1.	System Verification Results.....	24
5.	SAR Measurement variability and uncertainty	25
5.1.	SAR measurement variability.....	25
5.2.	SAR measurement uncertainty	25
6.	RF Exposure Positions	26
6.1.	Ear and handset reference point	26
6.2.	Definition of the cheek position	26
6.3.	Definition of the tilt position	28
6.4.	Body Worn Accessory	28
7.	RF Output Power	30
7.1.	GSM Conducted Power	30
7.2.	WCDMA Conducted Power	31
7.3.	LTE Conducted Power	31
7.4.	Bluetooth Output Power.....	37

8. Stand-alone SAR test exclusion.....	37
9. SAR Results	37
9.1. SAR measurement results	37
9.1.1. SAR measurement Result of GSM850.....	37
9.1.2. SAR measurement Result of GSM1900.....	38
9.1.3. SAR measurement Result of WCDMA Band 2.....	38
9.1.4. SAR measurement Result of WCDMA Band 5.....	39
9.1.5. SAR measurement Result of LTE Band 2	40
9.1.6. SAR measurement Result of LTE Band 4	41
9.1.7. SAR measurement Result of Bluetooth.....	43
9.2. SAR Summation Scenario.....	43
10. Appendix A. Photo documentation	44
11. Appendix B. System Check Plots.....	44
12. Appendix C. Plots of High SAR Measurement.....	53
13. Appendix D. Calibration Certificate	82

1. General Information

1.1. RF exposure limits

(A).Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

(B).Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

NOTE: **Whole-Body SAR** is averaged over the entire body, **partial-body SAR** is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. **SAR for hands, wrists, feet and ankles** is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

Occupational/Controlled Environments:

Are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

General Population/Uncontrolled Environments:

Are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

NOTE
HEAD AND TRUNK LIMIT
1.6 W/kg
APPLIED TO THIS EUT

1.2. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for Chaperon-T200 are as follows.

RF Exposure Conditions		Equipment Class -Highest Reported SAR (W/kg)			
		PCE	DTS	NII	DSS
1-g Head		0.975	N/A	N/A	0.310
1-g Body-Worn (Separation distance of 10mm)		1.185	N/A	N/A	0.259
Max Simultaneous Tx	Head	1.285	N/A	N/A	1.285
	Body-Worn	1.444	N/A	N/A	1.444

Note: The Max Simultaneous Tx is calculated based on the same configuration and test position. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR Part 2(2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2013 & KDB 865664 D01.

1.3. EUT Description

Device Information			
Product Name	Mobile Phone		
Trade Name	Easyfone		
Model Name	Chaperon-T200		
Family Model	N/A		
FCC ID	2AQ8SCHAPERONT200		
Device Phase	Identical Prototype		
Exposure Category	General population / Uncontrolled environment		
Antenna	BT: Bluetooth wire Antenna GSM/WCDMA/LTE:FPC Antenna		
Battery Information	DC 3.7V, 1050mAh, 3.885Wh		
Hard Ware Version	GS060 V1.0		
Soft Ware Version	GS060-Easyfone-T200F-4G-20211105-LC-V1.03		
Device Operating Configurations			
Supporting Mode(s)	GSM 850/1900, WCDMA Band 2/5, LTE Band 2/4, Bluetooth		
Test Modulation	GSM(GMSK/8PSK), WCDMA(QPSK), LTE(QPSK/16QAM), Bluetooth(GFSK, $\pi/4$ -DQPSK, 8DPSK)		
Device Class	B		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	GSM 850	824-849	869-894
	GSM 1900	1850-1910	1930-1990

	WCDMA Band 2	1850-1910	1930-1990
	WCDMA Band 5	824-849	869-894
	LTE Band 2	1850-1910	1930-1990
	LTE Band 4	1710-1755	2110-2155
	Bluetooth	2402-2480	
GPRS Multislot Class(12)	Max Number of Timeslots in Uplink		4
	Max Number of Timeslots in Downlink		4
	Max Total Timeslot		5
EDGE Multislot Class(12)	Max Number of Timeslots in Uplink		4
	Max Number of Timeslots in Downlink		4
	Max Total Timeslot		5
Power Class	4, tested with power level 5(GSM 850)		
	1, tested with power level 0(GSM 1900)		
	3, tested with power control "all 1"(WCDMA Band 2)		
	3, tested with power control "all 1"(WCDMA Band 5)		
	3, tested with power control all Max.(LTE Band 2)		
	3, tested with power control all Max.(LTE Band 4)		

1.4. Test specification(s)


FCC 47 CFR Part 2(2.1093)
ANSI/IEEE C95.1-1992
IEEE Std 1528-2013
KDB 865664 D01 SAR measurement 100 MHz to 6 GHz
KDB 865664 D02 RF Exposure Reporting
KDB 447498 D01 General RF Exposure Guidance
KDB 941225 D01 3G SAR Procedures
KDB 941225 D05 SAR for LTE Devices
KDB 648474 D04 Handset SAR

1.5. Ambient Condition

Ambient temperature	20°C – 24°C
Relative Humidity	30% – 70%

2. SAR Measurement System

2.1. SATIMO SAR Measurement Set-up Diagram

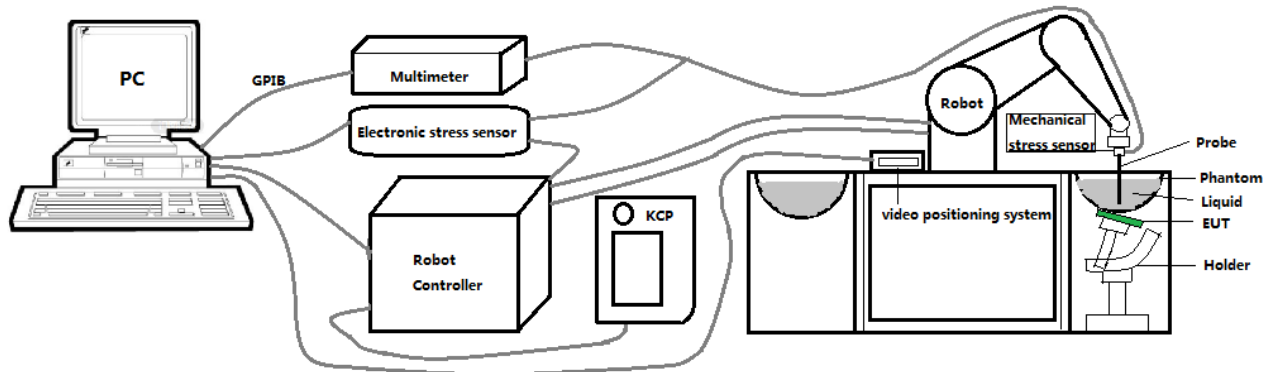

These measurements were performed with the automated near-field scanning system OPENSAR from SATIMO. The system is based on a high precision robot (working range: 901 mm), which positions the probes with a positional repeatability of better than ± 0.03 mm. The SAR measurements were conducted with dosimetric probe (manufactured by SATIMO), designed in the classical triangular configuration and optimized for dosimetric evaluation.

The first step of the field measurement is the evaluation of the voltages induced on the probe by the device under test. Probe diode detectors are nonlinear. Below the diode compression point, the output voltage is proportional to the square of the applied E-field; above the diode compression point, it is linear to the applied E-field. The compression point depends on the diode, and a calibration procedure is necessary for each sensor of the probe.

The Keithley multimeter reads the voltage of each sensor and send these three values to the PC. The corresponding E field value is calculated using the probe calibration factors, which are stored in the working directory. This evaluation includes linearization of the diode characteristics. The field calculation is done separately for each sensor. Each component of the E field is displayed on the "Dipole Area Scan Interface" and the total E field is displayed on the "3D Interface"

2.2. Robot

The SATIMO SAR system uses the high precision robots from KUKA. For the 6-axis controller system, the robot controller version (KUKA) from KUKA is used. The KUKA robot series have many features that are important for our application:



- High precision (repeatability ± 0.03 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)

2.3. E-Field Probe

This E-field detection probe is composed of three orthogonal dipoles linked to special Schottky diodes with low detection thresholds. The probe allows the measurement of electric fields in liquids such as the one defined in the IEEE and CENELEC standards.

For the measurements the Specific Dosimetric E-Field Probe SN 08/16 EPGO287 with following specifications is used



- Dynamic range: 0.01-100 W/kg
 - Tip Diameter : 2.5 mm
 - Distance between probe tip and sensor center: 1 mm
 - Distance between sensor center and the inner phantom surface: 2 mm (repeatability better than ± 1 mm).
 - Probe linearity: ± 0.08 dB
 - Axial isotropy: ± 0.01 dB
 - Hemispherical Isotropy: ± 0.01 dB
 - Calibration range: 650MHz to 5900MHz for head & body simulating liquid.
 - Lower detection limit: 8mW/kg
- Angle between probe axis (evaluation axis) and surface normal line: less than 30° .

2.3.1. E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy shall be evaluated and within ± 0.25 dB. The sensitivity parameters (Norm X, Norm Y, and Norm Z), the diode compression parameter (DCP) and the conversion factor (Conv F) of the probe are tested. The calibration data can be referred to appendix D of this report.

2.4. SAM phantoms


Photo of SAM phantom SN 16/15 SAM119



The SAM phantom is used to measure the SAR relative to people exposed to electro-magnetic field radiated by mobile phones.

2.4.1. Technical Data

Serial Number	Shell thickness	Filling volume	Dimensions	Positionner Material	Permittivity	Loss Tangent
SN 16/15 SAM119	2 mm ±0.2 mm	27 liters	Length:1000 mm Width:500 mm Height:200 mm	Gelcoat with fiberglass	3.4	0.02

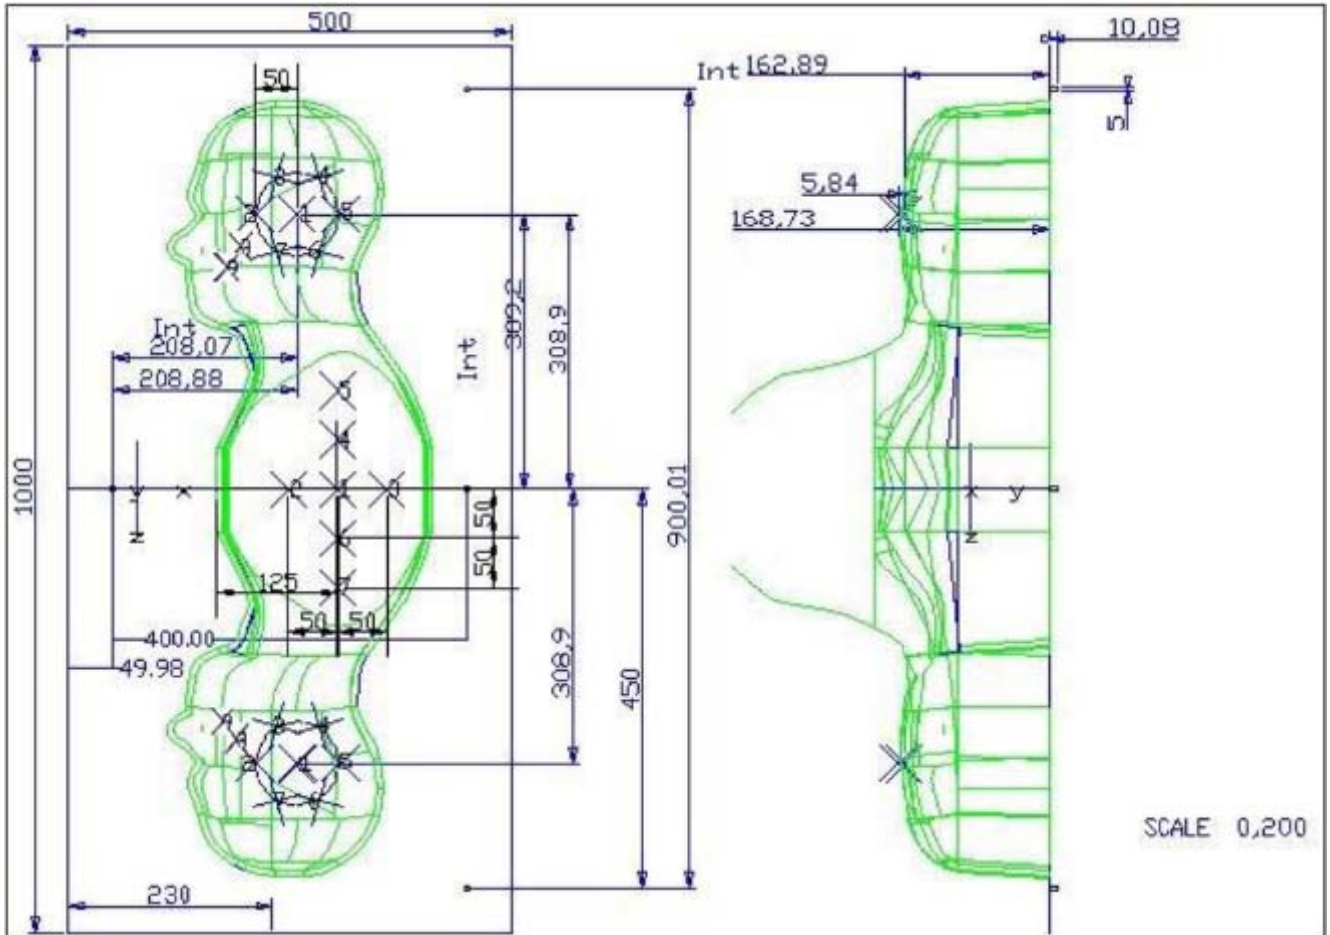


Serial Number	Left Head(mm)		Right Head(mm)		Flat Part(mm)	
	1	2	1	2	1	2
SN 16/15 SAM119	2	2.02	2	2.08	1	2.09
	3	2.05	3	2.06	2	2.06
	4	2.07	4	2.07	3	2.08
	5	2.08	5	2.08	4	2.10
	6	2.05	6	2.07	5	2.10
	7	2.05	7	2.05	6	2.07
	8	2.07	8	2.06	7	2.07
	9	2.08	9	2.06	-	-

The test, based on ultrasonic system, allows measuring the thickness with an accuracy of 10 µm.

2.5. Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1 degree.

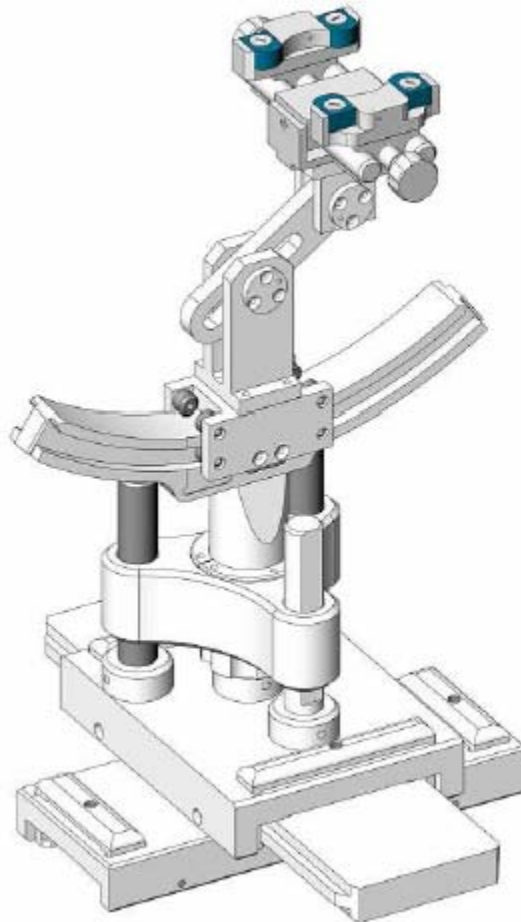

Serial Number	Holder Material	Permittivity	Loss Tangent
SN 16/15 MSH100	Delrin	3.7	0.005

2.6. Test Equipment List

This table gives a complete overview of the SAR measurement equipment.

Devices used during the test described are marked

	Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
					Last Cal.	Due Date
<input checked="" type="checkbox"/>	MVG	E FIELD PROBE	SSE2	SN 08/16 EPGO287	Mar. 01, 2021	Feb. 28, 2022
<input type="checkbox"/>	MVG	750 MHz Dipole	SID750	SN 03/15 DIP 0G750-355	Mar. 01, 2021	Feb. 28, 2024
<input checked="" type="checkbox"/>	MVG	835 MHz Dipole	SID835	SN 03/15 DIP 0G835-347	Mar. 01, 2021	Feb. 28, 2024
<input type="checkbox"/>	MVG	900 MHz Dipole	SID900	SN 03/15 DIP 0G900-348	Mar. 01, 2021	Feb. 28, 2024
<input checked="" type="checkbox"/>	MVG	1800 MHz Dipole	SID1800	SN 03/15 DIP 1G800-349	Mar. 01, 2021	Feb. 28, 2024
<input checked="" type="checkbox"/>	MVG	1900 MHz Dipole	SID1900	SN 03/15 DIP 1G900-350	Mar. 01, 2021	Feb. 28, 2024
<input type="checkbox"/>	MVG	2000 MHz Dipole	SID2000	SN 03/15 DIP 2G000-351	Mar. 01, 2021	Feb. 28, 2024
<input checked="" type="checkbox"/>	MVG	2450 MHz Dipole	SID2450	SN 03/15 DIP 2G450-352	Mar. 01, 2021	Feb. 28, 2024
<input type="checkbox"/>	MVG	2600 MHz Dipole	SID2600	SN 03/15 DIP 2G600-356	Mar. 01, 2021	Feb. 28, 2024
<input type="checkbox"/>	MVG	5000 MHz Dipole	SWG5500	SN 13/14 WGA 33	Mar. 01, 2021	Feb. 28, 2024
<input checked="" type="checkbox"/>	MVG	Liquid measurement Kit	SCLMP	SN 21/15 OCPG 72	NCR	NCR
<input checked="" type="checkbox"/>	MVG	Power Amplifier	N.A	AMPLISAR_28/14_003	NCR	NCR
<input checked="" type="checkbox"/>	KEITHLEY	Millivoltmeter	2000	4072790	NCR	NCR
<input checked="" type="checkbox"/>	R&S	Universal radio communication tester	CMU200	117858	Jul. 01, 2021	Jun. 30, 2022
<input checked="" type="checkbox"/>	R&S	Wideband radio communication tester	CMW500	103917	Jul. 01, 2021	Jun. 30, 2022
<input checked="" type="checkbox"/>	HP	Network Analyzer	8753D	3410J01136	Jul. 01, 2021	Jun. 30, 2022
<input checked="" type="checkbox"/>	Agilent	PSG Analog Signal Generator	E8257D	MY51110112	Jul. 01, 2021	Jun. 30, 2022

<input checked="" type="checkbox"/>	Agilent	Power meter	E4419B	MY45102538	Jul. 01, 2021	Jun. 30, 2022
<input checked="" type="checkbox"/>	Agilent	Power sensor	E9301A	MY41495644	Jul. 01, 2021	Jun. 30, 2022
<input checked="" type="checkbox"/>	Agilent	Power sensor	E9301A	US39212148	Jul. 01, 2021	Jun. 30, 2022
<input checked="" type="checkbox"/>	MCLI/USA	Directional Coupler	CB11-20	0D2L51502	Jul. 17, 2020	Jul. 16, 2023

3. SAR Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/Bluetooth power measurement, use engineering software to configure EUT WLAN/Bluetooth continuously transmission, at maximum RF power in each supported wireless interface and frequency band.
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/Bluetooth output power.

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/Bluetooth continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix A demonstrates.
- (c) Set scan area, grid size and other setting on the OPENSAR software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band.
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg.

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

3.1. Power Reference

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

3.2. Area scan & Zoom scan

The area scan is a 2D scan to find the hot spot location on the DUT. The zoom scan is a 3D scan above the hot spot to calculate the 1g and 10g SAR value.

Measurement of the SAR distribution with a grid of 8 to 16 mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme. Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8 * 4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

From the scanned SAR distribution, identify the position of the maximum SAR value, in addition identify the positions of any local maxima with SAR values within 2 dB of the maximum value that will not be within the zoom scan of other peaks; additional peaks shall be measured only when the primary peak is within 2 dB of the SAR compliance limit (e.g., 1 W/kg for 1,6 W/kg 1 g limit, or 1,26 W/kg for 2 W/kg, 10 g limit).

Area scan & Zoom scan scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz	
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		5 ± 1 mm	½·δ·ln(2) ± 0.5 mm	
Maximum probe angle from probe axis to phantom surface normal at the measurement location		30° ± 1°	20° ± 1°	
Maximum area scan spatial resolution: Δx _{Area} , Δy _{Area}		≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm	
		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.		
Maximum zoom scan spatial resolution: Δx _{Zoom} , Δy _{Zoom}		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: Δz _{Zoom} (n)	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	Δz _{Zoom} (1): between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		Δz _{Zoom} (n>1): between subsequent points	≤ 1.5·Δz _{Zoom} (n-1)	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	

Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.

* When zoom scan is required and the *reported* SAR from the *area scan based 1-g SAR estimation* procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

3.3. Description of interpolation/extrapolation scheme

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimise measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is used to determine these highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1 mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10 grams and 1 gram requires a very fine resolution in the three dimensional scanned data array.

3.4. Volumetric Scan

The volumetric scan consists of a full 3D scan over a specific area. This 3D scan is useful for multi Tx SAR measurement. Indeed, it is possible with OpenSAR to add, point by point, several volumetric scans to calculate the SAR value of the combined measurement as it is defined in the standard IEEE1528 and IEC62209.

3.5. Power Drift

All SAR testing is under the EUT installed with a full charged battery and transmit maximum output power. In OpenSAR measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in V/m. If the power drifts more than $\pm 5\%$, the SAR will be retested.


4. System Verification Procedure

4.1. Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Ingredients (% of weight)	Head Tissue									
	750	835	900	1800	1900	2000	2450	2600	5200	5800
Frequency Band (MHz)										
Water	34.40	34.40	34.40	55.36	55.36	57.87	57.87	57.87	65.53	65.53
NaCl	0.79	0.79	0.79	0.35	0.35	0.16	0.16	0.16	0.00	0.00
1,2-Propanediol	64.81	64.81	64.81	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Triton X-100	0.00	0.00	0.00	30.45	30.45	19.97	19.97	19.97	24.24	24.24
DGBE	0.00	0.00	0.00	13.84	13.84	22.00	22.00	22.00	10.23	10.23

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid depth from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm.

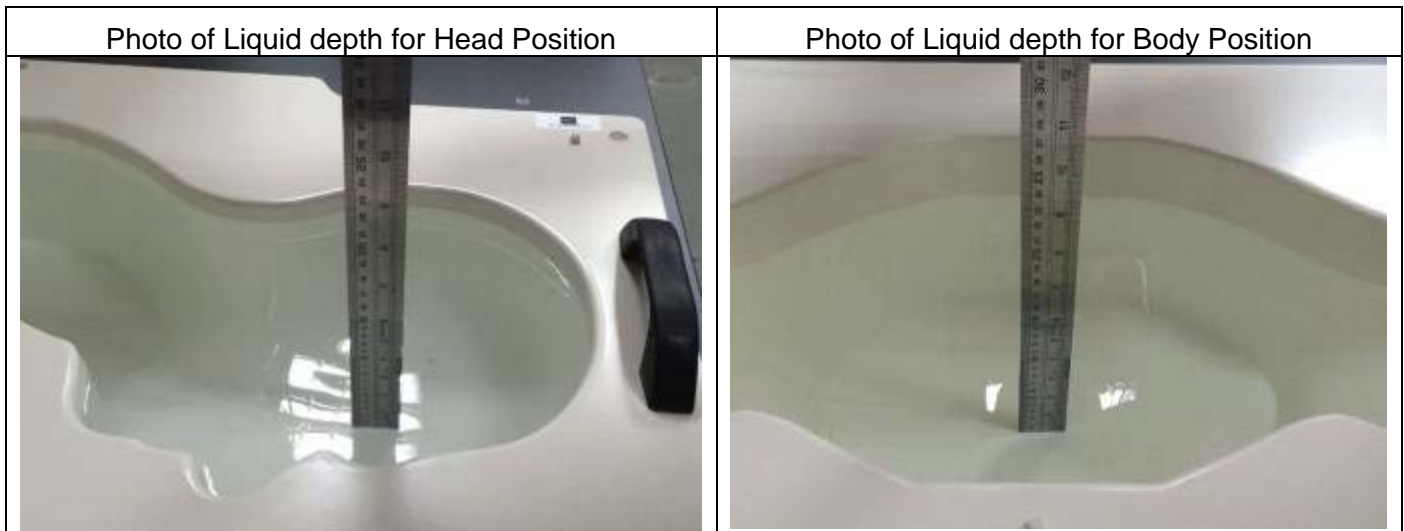

4.1.1. Tissue Dielectric Parameter Check Results

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within $\pm 5\%$ of the target values.


Tissue Type	Measured Frequency (MHz)	Target Tissue		Measured Tissue		Liquid Temp.	Test Date
		ϵ_r ($\pm 5\%$)	σ (S/m) ($\pm 5\%$)	ϵ_r	σ (S/m)		
Head 850	835	41.50 (39.43~43.58)	0.90 (0.86~0.95)	42.64	0.93	21.6 °C	Nov. 24, 2021
Head 1800	1800	40.00 (38.00~42.00)	1.40 (1.33~1.47)	39.14	1.40	21.4 °C	Nov. 26, 2021
Head 1900	1900	40.00 (38.00~42.00)	1.40 (1.33~1.47)	38.77	1.46	21.7 °C	Nov. 23, 2021
Head 2450	2450	39.20 (37.24~41.16)	1.80 (1.71~1.89)	40.69	1.78	21.5 °C	Nov. 17, 2021

NOTE: The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.

4.2. System Verification Procedure

The system verification is performed for verifying the accuracy of the complete measurement system and performance of the software. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 100mW (below 5GHz) or 100mW (above 5GHz). To adjust this power a power meter is used. The power sensor is connected to the cable before the system verification to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the system verification to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot).

The system verification is shown as below picture:

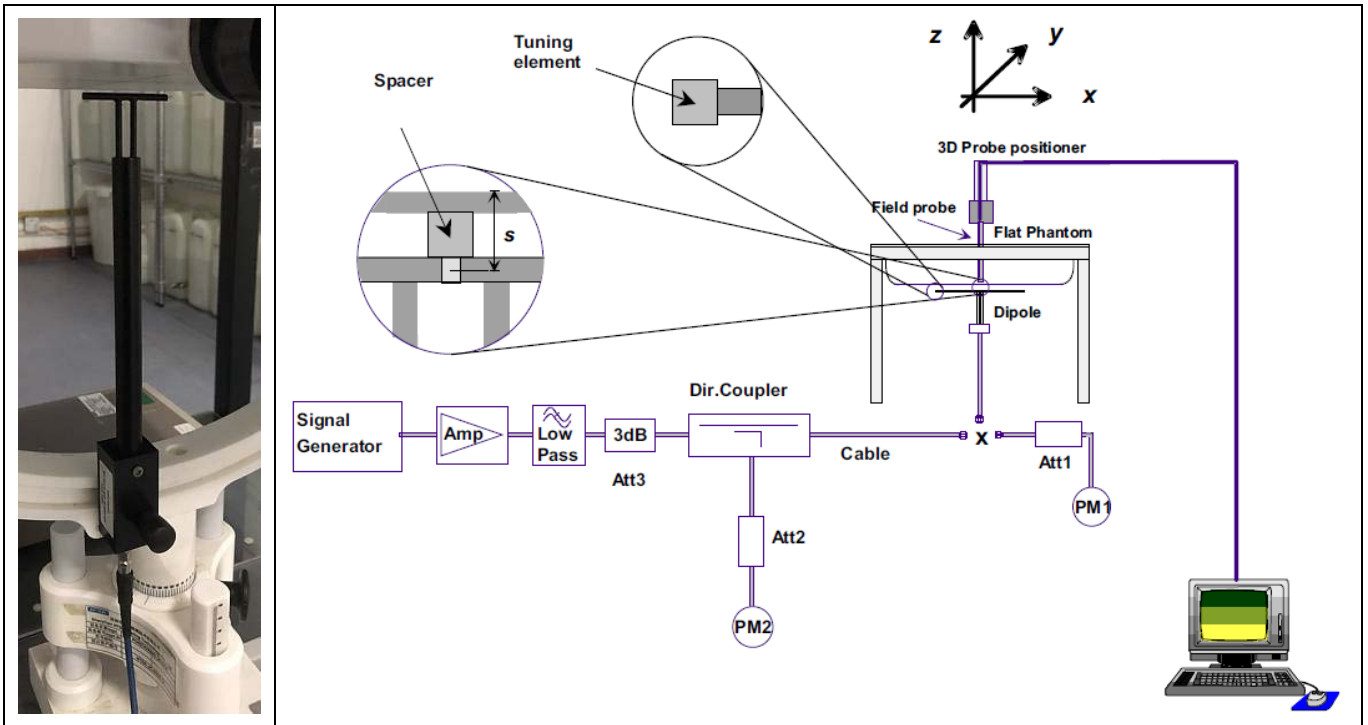

4.2.1. System Verification Results

Comparing to the original SAR value provided by SATIMO, the verification data should be within its specification of $\pm 10\%$. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance verification can meet the variation criterion and the plots can be referred to Appendix B of this report.

System Verification	Target SAR (1W) ($\pm 10\%$)		Measured SAR (Normalized to 1W)		Liquid Temp.	Test Date
	1-g (W/Kg)	10-g (W/Kg)	1-g (W/Kg)	10-g (W/Kg)		
835MHz	9.84 (8.86~10.82)	6.22 (5.60~6.84)	10.49	6.55	21.6 °C	Nov. 24, 2021
1800MHz	37.96 (34.17~41.75)	19.81 (17.83~21.79)	36.68	18.32	21.4 °C	Nov. 26, 2021
1900MHz	40.37 (36.34~44.40)	20.48 (18.44~22.52)	41.58	21.82	21.7 °C	Nov. 23, 2021
2450MHz	53.69 (48.33~59.05)	23.94 (21.55~26.33)	53.45	24.15	21.5 °C	Nov. 17, 2021

5. SAR Measurement variability and uncertainty

5.1. SAR measurement variability

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

5.2. SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

6. RF Exposure Positions

6.1. Ear and handset reference point

Figure 6.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M”, the left ear reference point (ERP) is marked “LE”, and the right ERP is marked “RE”.



Fig 6.1.1 Front, back, and side views of SAM phantom

6.2. Definition of the cheek position

1. Define two imaginary lines on the handset, the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset: the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 6.2.1 and Figure 6.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 6.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 6.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
2. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
3. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP
4. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
5. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.

6. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 6.2.3. The actual rotation angles should be documented in the test report.

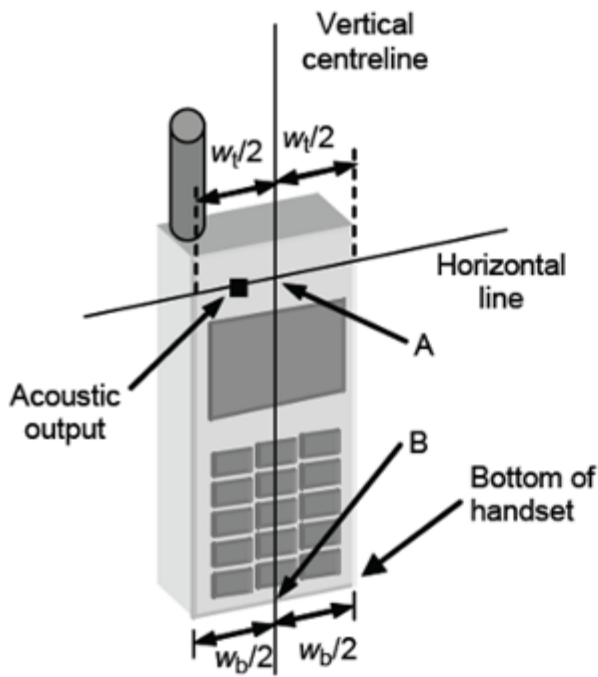


Fig 6.2.1 Handset vertical and horizontal reference lines—“fixed case”

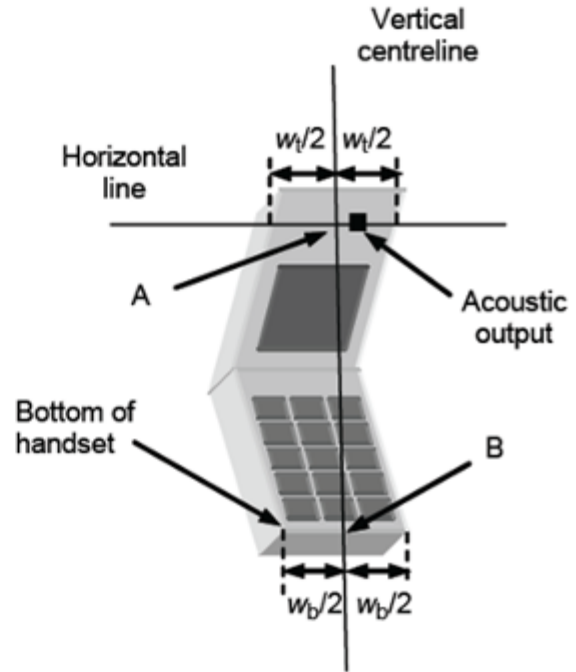


Fig 6.2.2 Handset vertical and horizontal reference lines—“clam-shell case”

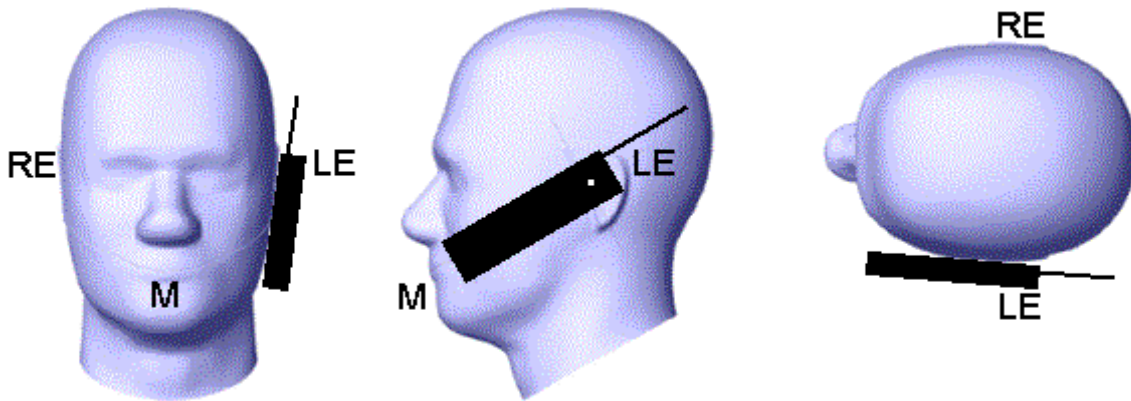


Fig 6.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

6.3. Definition of the tilt position

1. While maintaining the orientation of the handset, retract the handset parallel to the reference plane far enough away from the phantom to enable a rotation of the device by 15 degree.
2. Rotate the Handset around the horizontal line by 15 degree (see Figure 6.3.1).
3. While maintaining the orientation of the handset, move the handset towards the phantom on a line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact is on the pinna. If the contact is at any location other than the pinna, e.g., the antenna with the back of the phantom head, the angle of the handset shall be reduced. In this case, the tilt position is obtained if any part of the handset is in contact with the pinna as well as a second part of the handset is in contact with the phantom, e.g., the antenna with the back of the head.

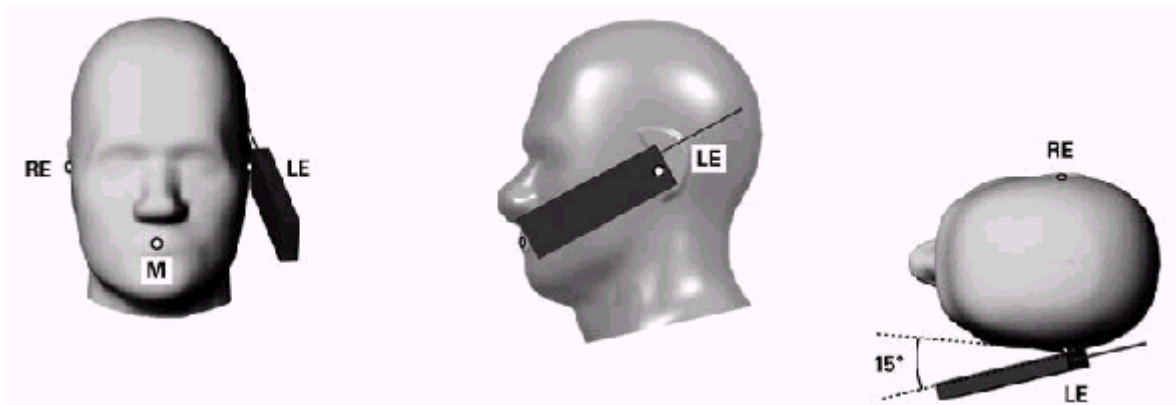


Figure 6.3.1 – Tilt position of the wireless device on the left side of SAM

6.4. Body Worn Accessory

1. Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 6.4.1). Per KDB 648474 D04, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is < 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.
2. Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest

spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-chip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

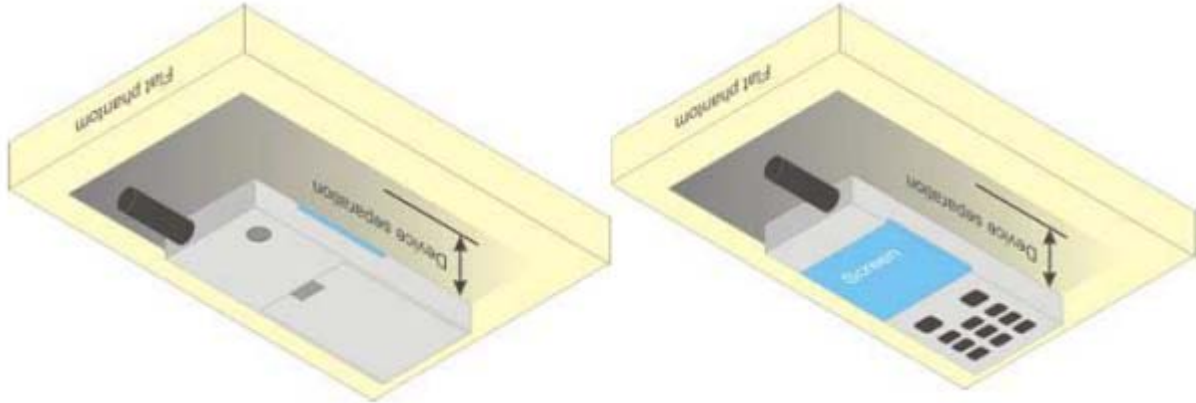


Figure 6.4.1 – Test positions for body-worn devices

7. RF Output Power

7.1. GSM Conducted Power

Band GSM850		Burst-Averaged output Power (dBm)			Frame-Averaged output Power (dBm)			
Tx Channel	Tune-up	128	189	251	Tune-up	128	189	251
Frequency (MHz)	(dBm)	824.2	836.4	848.8	(dBm)	824.2	836.4	848.8
GSM (GMSK)	33.00	32.38	32.62	32.47	23.97	23.35	23.59	23.44
GPRS(GMSK,1 Tx slot)	33.00	32.40	32.64	32.46	23.97	23.37	23.61	23.43
GPRS(GMSK,2 Tx slot)	31.00	30.48	30.57	30.41	24.98	24.46	24.55	24.39
GPRS(GMSK,3 Tx slot)	29.00	28.50	28.60	28.44	24.74	24.24	24.34	24.18
GPRS(GMSK,4 Tx slot)	26.50	26.30	26.37	26.22	23.49	23.29	23.36	23.21
EGPRS(8PSK,1 Tx slot)	27.50	26.98	27.16	27.18	18.47	17.95	18.13	18.15
EGPRS(8PSK,2 Tx slot)	27.00	26.19	26.55	25.92	20.98	20.17	20.53	19.90
EGPRS(8PSK,3 Tx slot)	24.00	22.91	23.88	23.04	19.74	18.65	19.62	18.78
EGPRS(8PSK,4 Tx slot)	22.50	21.02	22.13	21.39	19.49	18.01	19.12	18.38
Band GSM1900		Burst-Averaged output Power (dBm)			Frame-Averaged output Power (dBm)			
Tx Channel	Tune-up	512	661	810	Tune-up	512	661	810
Frequency (MHz)	(dBm)	1850.2	1880.0	1909.8	(dBm)	1850.2	1880.0	1909.8
GSM (GMSK)	30.00	29.51	29.52	29.44	20.97	20.48	20.49	20.41
GPRS(GMSK,1 Tx slot)	29.50	29.46	29.47	29.40	20.47	20.43	20.44	20.37
GPRS(GMSK,2 Tx slot)	28.00	27.51	27.25	27.20	21.98	21.49	21.23	21.18
GPRS(GMSK,3 Tx slot)	26.00	25.89	25.63	25.34	21.74	21.63	21.37	21.08
GPRS(GMSK,4 Tx slot)	24.00	23.88	23.56	23.31	20.99	20.87	20.55	20.30
EGPRS(8PSK,1 Tx slot)	27.50	26.67	27.38	26.16	18.47	17.64	18.35	17.13
EGPRS(8PSK,2 Tx slot)	26.50	26.02	25.71	25.07	20.48	20.00	19.69	19.05
EGPRS(8PSK,3 Tx slot)	25.00	24.48	24.95	23.94	20.74	20.22	20.69	19.68
EGPRS(8PSK,4 Tx slot)	22.00	21.07	21.71	20.84	18.99	18.06	18.70	17.83

Note: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 TS) - 9.03 dB

Frame-averaged power = Maximum burst averaged power (2 TS) - 6.02 dB

Frame-averaged power = Maximum burst averaged power (3 TS) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 TS) - 3.01 dB

7.2. WCDMA Conducted Power

Band	WCDMA Band 2			
Tx Channel	Tune-up	9262	9400	9538
Frequency (MHz)		1852.4	1880	1907.6
RMC 12.2Kbps	22.50	22.35	22.39	22.41
HSDPA Subtest-1	22.50	22.45	22.22	22.26
HSDPA Subtest-2	22.50	22.02	22.04	21.93
HSDPA Subtest-3	22.00	21.74	21.66	21.73
HSDPA Subtest-4	22.00	21.31	21.35	21.62
HSUPA Subtest-1	22.50	22.30	22.11	22.04
HSUPA Subtest-2	22.50	22.38	22.20	22.26
HSUPA Subtest-3	22.50	22.07	21.94	21.83
HSUPA Subtest-4	22.50	22.32	21.95	22.07
HSUPA Subtest-5	22.50	22.07	22.12	22.10
Band	WCDMA Band 5			
Tx Channel	Tune-up	4132	4182	4233
Frequency (MHz)		826.4	836.4	846.6
RMC12.2K	23.00	22.51	22.25	22.13
HSDPA Sub 1	23.00	22.83	22.22	21.97
HSDPA Sub 2	22.50	22.30	21.92	21.68
HSDPA Sub 3	22.00	21.78	21.82	21.59
HSDPA Sub 4	22.00	21.73	21.54	21.29
HSUPA Sub 1	23.00	22.54	21.98	21.86
HSUPA Sub 2	23.00	22.71	22.18	21.93
HSUPA Sub 3	22.00	21.97	21.98	21.68
HSUPA Sub 4	23.00	22.68	22.08	22.00
HSUPA Sub 5	22.50	22.16	22.07	21.84

7.3. LTE Conducted Power

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		18607/1850.7	18900/1880	19193/1909.3
LTE Band 2	1.4MHz	QPSK	1	0	23.50	22.94	23.15	23.20
			1	2	23.50	23.06	23.11	23.21
			1	5	23.50	22.95	23.06	23.18
			3	0	23.50	23.00	23.01	23.04
			3	1	23.50	23.06	23.05	23.05

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		18615/1851.5	18900/1880	19185/1908.5
		16QAM	3	2	23.50	23.01	22.95	23.05
			6	0	22.50	21.87	21.98	22.09
			1	0	23.00	22.96	22.10	22.27
			1	2	23.00	22.88	22.15	22.44
			1	5	23.00	22.97	22.05	22.31
			3	0	22.50	22.12	22.04	22.46
			3	1	22.50	22.09	22.05	22.47
			3	2	22.50	22.12	21.97	22.42
			6	0	21.50	20.97	21.10	21.28
LTE Band 2	3MHz	QPSK	1	0	23.50	22.99	23.15	23.02
			1	7	23.50	22.95	23.14	22.98
			1	14	23.50	22.93	23.05	23.01
			8	0	22.50	21.91	21.91	22.06
			8	4	22.50	21.95	21.90	21.95
			8	7	22.50	21.89	21.89	22.01
			15	0	22.00	21.90	21.96	21.99
		16QAM	1	0	23.50	23.06	22.12	22.68
			1	7	23.50	22.94	22.07	22.67
			1	14	23.50	23.06	22.10	22.69
			8	0	21.50	20.93	21.11	21.24
			8	4	21.50	20.93	21.09	21.26
			8	7	21.50	20.92	21.16	21.27
			15	0	21.50	21.07	21.05	21.16
					Modulation	RB Configuration		Tune-up
RB Size	RB Offset	18625/1852.5				18900/1880	19175/1907.5	
LTE Band 2	5MHz	QPSK	1	0	23.50	22.91	22.97	22.84
			1	12	23.50	22.83	23.00	22.84
			1	24	23.50	22.88	22.92	22.83
			12	0	22.00	21.91	21.95	21.87
			12	6	22.00	21.90	22.00	21.87
			12	11	22.00	21.87	21.88	21.96
			25	0	22.00	21.89	22.00	21.88
		16QAM	1	0	22.50	21.94	22.08	21.95
			1	12	22.50	21.88	22.05	21.97

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		18650/1855	18900/1880	19150/1905
			1	24	22.50	21.95	22.10	21.98
			12	0	21.50	21.01	20.94	20.99
			12	6	21.50	20.94	20.91	20.95
			12	11	21.50	20.98	20.92	21.01
			25	0	21.50	20.93	21.18	20.94
LTE Band 2	10MHz	QPSK	1	0	23.50	22.93	22.93	23.17
			1	24	23.50	22.97	22.99	23.18
			1	49	23.50	22.89	22.97	23.18
			25	0	22.50	21.96	21.98	21.94
			25	12	22.50	21.96	21.89	21.94
			25	24	22.50	21.92	22.00	22.02
			50	0	22.50	21.84	22.07	22.07
		16QAM	1	0	23.50	22.99	22.04	22.32
			1	24	23.50	23.03	22.07	22.38
			1	49	23.50	23.05	22.05	22.37
			25	0	21.50	20.91	20.97	21.14
			25	12	21.50	21.01	21.00	21.12
			25	24	21.50	20.92	21.03	21.05
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		18675/1857.5	18900/1880	19125/1902.5
LTE Band 2	15MHz	QPSK	1	0	23.50	22.92	22.94	22.86
			1	37	23.50	22.87	23.04	22.83
			1	74	23.50	22.90	22.95	22.81
			36	0	22.50	21.95	22.02	21.96
			36	18	22.50	21.94	22.01	21.96
			36	37	22.50	21.91	21.98	22.05
			75	0	22.50	21.89	21.89	22.09
		16QAM	1	0	23.50	23.11	22.68	22.85
			1	37	23.50	23.03	22.65	22.83
			1	74	23.50	23.04	22.64	22.82
			36	0	21.50	21.16	21.07	20.95
			36	18	21.50	21.02	21.15	20.96
			36	37	21.50	20.98	21.12	21.00
Band	Band	Modulation	RB		Tune-up	Channel/Frequency(MHz)		

	Width		Configuration					
			RB Size	RB Offset		18700/1860	18900/1880	19100/1900
LTE Band 2	20MHz	QPSK	1	0	23.50	23.24	22.97	22.95
			1	49	23.50	23.10	22.95	22.83
			1	99	23.50	23.14	22.95	22.96
			50	0	22.50	22.02	21.96	22.11
			50	24	22.50	21.85	21.95	21.99
			50	49	22.50	21.88	21.95	22.13
			100	0	22.50	21.93	22.13	22.10
		16QAM	1	0	22.50	22.31	21.59	22.22
			1	49	22.50	22.28	21.65	22.20
			1	99	22.50	22.32	21.66	22.25
			50	0	21.50	21.26	21.19	21.10
			50	24	21.50	21.08	21.20	21.09
			50	49	21.50	21.03	21.19	21.13

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		19957/1710.7	20175/1732.5	20393/1754.3
LTE Band 4	1.4MHz	QPSK	1	0	23.50	21.94	23.25	23.19
			1	2	23.50	23.00	23.31	23.13
			1	5	23.50	23.00	23.26	23.05
			3	0	23.50	23.15	23.12	23.13
			3	1	23.50	22.58	23.08	23.15
			3	2	23.50	22.84	23.17	23.11
			6	0	22.50	22.19	22.15	22.00
		16QAM	1	0	23.00	22.59	22.48	22.66
			1	2	23.00	22.29	22.32	22.70
			1	5	23.00	22.80	22.36	22.78
			3	0	23.00	22.22	22.52	22.04
			3	1	23.00	22.10	22.56	22.04
			3	2	23.00	22.17	22.52	22.01
			6	0	21.50	20.93	21.26	21.00
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		19965/1711.5	20175/1732.5	20385/1753.5
LTE	3MHz	QPSK	1	0	23.50	23.04	23.01	23.26

Band 4			1	7	23.50	22.99	23.02	23.22
			1	14	23.50	23.00	23.08	23.27
			8	0	22.50	21.97	22.03	21.94
			8	4	22.50	22.08	22.09	21.91
			8	7	22.50	22.11	22.07	22.03
			15	0	22.50	22.05	22.05	22.01
			15	0	22.50	22.05	22.05	22.01
		16QAM	1	0	23.50	23.22	22.79	21.67
			1	7	23.50	23.16	22.77	21.66
			1	14	23.50	23.17	22.82	21.65
			8	0	21.50	21.06	21.40	21.20
			8	4	21.50	21.11	21.37	21.26
			8	7	21.50	21.02	21.35	21.18
			15	0	21.50	21.28	21.16	21.06
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		19975/1712.5	20175/1732.5	20375/1752.5
LTE Band 4	5MHz	QPSK	1	0	23.50	22.98	23.19	22.88
			1	12	23.50	23.01	23.16	22.82
			1	24	23.50	22.99	23.16	22.95
			12	0	22.50	22.05	22.05	21.95
			12	6	22.50	22.03	22.07	21.96
			12	11	22.50	22.15	22.01	22.01
			25	0	22.50	22.11	22.09	22.06
		16QAM	1	0	22.50	22.22	21.71	22.17
			1	12	22.50	22.22	21.74	22.16
			1	24	22.50	22.17	21.80	22.16
			12	0	21.50	21.09	20.97	21.12
			12	6	21.50	21.07	21.06	21.12
			12	11	21.50	21.09	21.02	21.12
			25	0	21.50	21.25	21.25	21.10
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20000/1715	20175/1732.5	20350/1750
LTE Band 4	10MHz	QPSK	1	0	23.50	23.02	23.00	22.85
			1	24	23.50	22.94	23.44	23.05
			1	49	23.50	23.08	23.33	23.06
			25	0	22.50	22.06	21.99	22.02
			25	12	22.50	22.08	22.17	22.01

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20025/1717.5	20175/1732.5	20325/1747.5
		16QAM	25	24	22.50	22.17	22.08	21.99
			50	0	22.50	22.05	22.13	21.99
			1	0	23.50	22.43	23.25	21.98
			1	24	23.50	22.42	23.31	22.01
			1	49	23.50	22.40	23.31	21.99
			25	0	21.50	21.16	21.07	21.18
			25	12	21.50	21.19	21.05	21.19
			25	24	21.50	21.22	21.12	21.18
LTE Band 4	15MHz	QPSK	1	0	23.50	23.05	23.08	22.85
			1	37	23.50	23.04	23.10	22.87
			1	74	23.50	23.15	23.01	22.89
			36	0	22.50	21.99	22.01	22.01
			36	18	22.50	22.10	22.15	22.02
			36	37	22.50	22.15	22.08	21.98
		16QAM	75	0	22.50	22.03	22.14	22.00
			1	0	23.50	23.28	22.90	23.02
			1	37	23.50	23.24	22.87	22.97
			1	74	23.50	23.27	22.78	22.96
			36	0	21.50	21.10	21.32	21.05
			36	18	21.50	21.14	21.25	21.08
			36	37	21.50	21.18	21.28	21.06
						RB Configuration		Tune-up
RB Size	RB Offset	20050/1720				20175/1732.5	20300/1745	
LTE Band 4	20MHz	QPSK	1	0	23.50	23.20	23.13	23.29
			1	49	23.50	23.03	23.13	22.92
			1	99	23.50	23.17	23.11	22.98
			50	0	22.50	22.11	22.17	22.10
			50	24	22.50	22.00	22.08	22.02
			50	49	22.50	22.08	22.16	22.09
			100	0	22.50	22.09	22.00	22.11
		16QAM	1	0	22.50	22.03	22.19	22.38
			1	49	22.50	21.96	22.16	22.31
			1	99	22.50	22.06	22.17	22.24
			50	0	21.50	21.12	21.24	21.07

			50	24	21.50	21.17	21.21	21.07
			50	49	21.50	21.13	21.22	21.08

7.4 Bluetooth Output Power

BR+EDR	Output Power (dBm)				
	Data Rates	Tune-up	Channel		
			0CH	39CH	78CH
	1M	10.000	9.558	8.140	8.740
2M	10.000	8.424	9.172	8.995	
3M	10.000	8.430	9.281	9.173	

8. Stand-alone SAR test exclusion

Refer to FCC KDB 447498D01, the 1-g SAR and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f_{(\text{GHz})}}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where:

- $f_{(\text{GHz})}$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	Pmax (dBm)	Pmax (mW)	Distance (mm)	f (GHz)	Calculation Result	SAR Exclusion threshold	SAR test exclusion
Bluetooth	10.00	10.00	5	2.480	3.15	3.00	NO

NOTE: Standalone SAR test exclusion for Bluetooth.

9. SAR Results

9.1. SAR measurement results

9.1.1. SAR measurement Result of GSM850

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift ($\pm 5\%$)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Left Cheek	189/836.4	GPRS(GMSK 2TS)	0.468	0.319	-3.12	30.57	31.00	0.517	2021/11/24
Left Tilt 15 Degree	189/836.4	GPRS(GMSK 2TS)	0.254	0.164	-0.04	30.57	31.00	0.280	2021/11/24
Right Cheek	189/836.4	GPRS(GMSK 2TS)	0.428	0.292	1.97	30.57	31.00	0.473	2021/11/24
Right Tilt	189/836.4	GPRS(GMSK 2TS)	0.196	0.130	-3.34	30.57	31.00	0.216	2021/11/24

15 Degree		2TS)							
-----------	--	------	--	--	--	--	--	--	--

NOTE: Head SAR test results of GSM850.

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	189/836.4	GPRS(GMSK 2TS)	0.600	0.395	-1.52	30.57	31.00	0.662	2021/11/24
Back Side	189/836.4	GPRS(GMSK 2TS)	1.009	0.809	-0.95	30.57	31.00	1.114	2021/11/24
Back Side	128/824.2	GPRS(GMSK 2TS)	0.964	0.680	-1.59	30.48	31.00	1.087	2021/11/24
Back Side	251/848.8	GPRS(GMSK 2TS)	1.023	0.862	-0.48	30.41	31.00	1.172	2021/11/24
Back Side Repeated	251/848.8	GPRS(GMSK 2TS)	1.016	0.857	2.43	30.41	31.00	1.164	2021/11/24

NOTE: Body-Worn SAR test results of GSM850

9.1.2. SAR measurement Result of GSM1900

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Left Cheek	661/1880	GPRS(GMSK 2TS)	0.475	0.265	-0.43	27.25	28.00	0.565	2021/11/23
Left Tilt 15 Degree	661/1880	GPRS(GMSK 2TS)	0.279	0.149	1.10	27.25	28.00	0.332	2021/11/23
Right Cheek	661/1880	GPRS(GMSK 2TS)	0.430	0.233	0.47	27.25	28.00	0.511	2021/11/23
Right Tilt 15 Degree	661/1880	GPRS(GMSK 2TS)	0.226	0.122	-3.87	27.25	28.00	0.269	2021/11/23

NOTE: Head SAR test results of GSM1900

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	661/1880	GPRS(GMSK 2TS)	0.252	0.140	0.46	27.25	28.00	0.300	2021/11/23
Back Side	661/1880	GPRS(GMSK 2TS)	0.416	0.234	-3.51	27.25	28.00	0.494	2021/11/23

NOTE: Body-Worn SAR test results of GSM1900

9.1.3. SAR measurement Result of WCDMA Band 2

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Left Cheek	9400/1880	RMC12.2K	0.608	0.353	-2.46	22.39	22.50	0.624	2021/11/23
Left Tilt 15	9400/1880	RMC12.2K	0.333	0.186	2.63	22.39	22.50	0.342	2021/11/23

Degree									
Right Cheek	9400/1880	RMC12.2K	0.574	0.330	1.35	22.39	22.50	0.589	2021/11/23
Right Tilt 15 Degree	9400/1880	RMC12.2K	0.276	0.152	-0.75	22.39	22.50	0.283	2021/11/23

NOTE: Head SAR test results of WCDMA Band 2

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	9400/1880	RMC12.2K	0.462	0.238	-3.89	22.39	22.50	0.474	2021/11/23
Back Side	9400/1880	RMC12.2K	0.742	0.403	-2.70	22.39	22.50	0.761	2021/11/23

NOTE: Body-Worn SAR test results of WCDMA Band 2

9.1.4. SAR measurement Result of WCDMA Band 5

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Left Cheek	4182/836.4	RMC12.2K	0.549	0.383	-0.40	22.25	23.00	0.652	2021/11/24
Left Tilt 15 Degree	4182/836.4	RMC12.2K	0.296	0.202	-1.63	22.25	23.00	0.352	2021/11/24
Right Cheek	4182/836.4	RMC12.2K	0.502	0.336	-0.78	22.25	23.00	0.597	2021/11/24
Right Tilt 15 Degree	4182/836.4	RMC12.2K	0.257	0.176	-3.45	22.25	23.00	0.305	2021/11/24

NOTE: Head SAR test results of WCDMA Band 5

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	4182/836.4	RMC12.2K	0.624	0.428	-1.57	22.25	23.00	0.742	2021/11/24
Back Side	4182/836.4	RMC12.2K	0.995	0.690	-0.51	22.25	23.00	1.183	2021/11/24
Back Side	4132/826.4	RMC12.2K	1.059	0.753	-0.19	22.51	23.00	1.185	2021/11/24
Back Side Repeated	4132/826.4	RMC12.2K	1.049	0.744	1.35	22.51	23.00	1.174	2021/11/24
Back Side	4233/846.6	RMC12.2K	0.909	0.640	-0.21	22.13	23.00	1.111	2021/11/24

NOTE: Body-Worn SAR test results of WCDMA Band 5

9.1.5. SAR measurement Result of LTE Band 2

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Left Cheek	18900/1880	20M QPSK(1,0)	0.648	0.374	-4.76	22.97	23.50	0.732	2021/11/23
Left Tilt 15 Degree	18900/1880	20M QPSK(1,0)	0.345	0.199	-2.49	22.97	23.50	0.390	2021/11/23
Right Cheek	18900/1880	20M QPSK(1,0)	0.609	0.344	2.56	22.97	23.50	0.688	2021/11/23
Right Tilt 15 Degree	18900/1880	20M QPSK(1,0)	0.316	0.182	3.89	22.97	23.50	0.357	2021/11/23
50%RB									
Left Cheek	18900/1880	20M QPSK(50,49)	0.377	0.210	1.18	21.95	22.50	0.428	2021/11/23
Left Tilt 15 Degree	18900/1880	20M QPSK(50,49)	0.173	0.118	3.26	21.95	22.50	0.196	2021/11/23
Right Cheek	18900/1880	20M QPSK(50,49)	0.332	0.183	1.68	21.95	22.50	0.377	2021/11/23
Right Tilt 15 Degree	18900/1880	20M QPSK(50,49)	0.182	0.098	-0.90	21.95	22.50	0.207	2021/11/23

NOTE: Head SAR test results of LTE Band 2

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	18900/1880	20M QPSK(1,0)	0.552	0.290	2.48	22.97	23.50	0.624	2021/11/23
Back Side	18900/1880	20M QPSK(1,0)	0.884	0.489	-1.40	22.97	23.50	0.999	2021/11/23
Back Side	18700/1860	20M QPSK(1,0)	0.884	0.496	-2.00	23.24	23.50	0.939	2021/11/23

Back Side	19100/1900	20M QPSK(1,0)	0.891	0.493	-2.03	22.95	23.50	1.011	2021/11/23
Back Side Repeated	19100/1900	20M QPSK(1,0)	0.885	0.484	1.35	22.95	23.50	1.004	2021/11/23
50%RB									
Front Side	18900/1880	20M QPSK(50,49)	0.302	0.165	-0.23	21.95	22.50	0.343	2021/11/23
Back Side	18900/1880	20M QPSK(50,49)	0.454	0.249	-2.76	21.95	22.50	0.515	2021/11/23
100%RB									
Back Side	18900/1880	20M QPSK(100,0)	0.376	0.210	0.44	22.13	22.50	0.409	2021/11/23

NOTE: Body-Worn SAR test results of LTE Band 2

9.1.6. SAR measurement Result of LTE Band 4

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Left Cheek	20175/1732.5	20M QPSK(1,0)	0.895	0.539	-1.70	23.13	23.50	0.975	2021/11/26
Left Cheek Repeated	20175/1732.5	20M QPSK(1,0)	0.887	0.530	2.35	23.13	23.50	0.966	2021/11/26
Left Tilt 15 Degree	20175/1732.5	20M QPSK(1,0)	0.475	0.286	0.54	23.13	23.50	0.517	2021/11/26
Right Cheek	20175/1732.5	20M QPSK(1,0)	0.732	0.483	-1.92	23.13	23.50	0.797	2021/11/26
Right Tilt 15 Degree	20175/1732.5	20M QPSK(1,0)	0.392	0.227	2.76	23.13	23.50	0.427	2021/11/26
Left Cheek	20050/1720	20M QPSK(1,0)	0.878	0.534	-0.71	23.20	23.50	0.941	2021/11/26
Left Cheek	20300/1745	20M QPSK(1,0)	0.888	0.535	0.84	23.29	23.50	0.932	2021/11/26
50%RB									
Left Cheek	20175/1732.5	20M QPSK(50,0)	0.489	0.321	-0.29	22.17	22.50	0.528	2021/11/26

Left Tilt 15 Degree	20175/1732.5	20M QPSK(50,0)	0.255	0.155	3.22	22.17	22.50	0.275	2021/11/26
Right Cheek	20175/1732.5	20M QPSK(50,0)	0.453	0.268	1.85	22.17	22.50	0.489	2021/11/26
Right Tilt 15 Degree	20175/1732.5	20M QPSK(50,0)	0.213	0.129	-3.42	22.17	22.50	0.230	2021/11/26
100%RB									
Left Cheek	20175/1732.5	20M QPSK(100,0)	0.459	0.303	1.35	22.00	22.50	0.515	2021/11/26

NOTE: Head SAR test results of LTE Band 4

Test Position of Body-Wor n with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	20175/173 2.5	20M QPSK(1,0)	0.522	0.294	3.43	23.13	23.50	0.568	2021/11/26
Back Side	20175/173 2.5	20M QPSK(1,0)	0.853	0.490	1.15	23.13	23.50	0.929	2021/11/26
Back Side	20050/172 0	20M QPSK(1,0)	0.837	0.477	-0.78	23.20	23.50	0.897	2021/11/26
Back Side	20300/174 5	20M QPSK(1,0)	0.974	0.554	-1.01	23.29	23.50	1.022	2021/11/26
Back Side Repeated	20300/174 5	20M QPSK(1,0)	0.969	0.548	0.35	23.29	23.50	1.017	2021/11/26
50%RB									
Front Side	20175/173 2.5	20M QPSK(50,0)	0.279	0.158	-0.80	22.17	22.50	0.301	2021/11/26
Back Side	20175/173 2.5	20M QPSK(50,0)	0.484	0.276	-0.49	22.17	22.50	0.522	2021/11/26
100%RB									
Back Side	20175/173 2.5	20M QPSK(100, 0)	0.463	0.253	-0.49	22.00	22.50	0.519	2021/11/26

NOTE: Body-Worn SAR test results of LTE Band 4

9.1.7. SAR measurement Result of Bluetooth

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Left Cheek	39/2441	1DH5	0.202	0.104	3.44	8.140	10.000	0.310	2021/11/17
Left Tilt 15 Degree	39/2441	1DH5	0.113	0.057	1.04	8.140	10.000	0.173	2021/11/17
Right Cheek	39/2441	1DH5	0.177	0.088	-1.48	8.140	10.000	0.272	2021/11/17
Right Tilt 15 Degree	39/2441	1DH5	0.084	0.043	-0.72	8.140	10.000	0.129	2021/11/17

NOTE: Head SAR test results of Bluetooth

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	39/2441	1DH5	0.102	0.052	-1.44	8.140	10.000	0.157	2021/11/17
Back Side	39/2441	1DH5	0.169	0.089	-2.29	8.140	10.000	0.259	2021/11/17

NOTE: Body-Worn SAR test results of Bluetooth

9.2. SAR Summation Scenario

Per KDB 447498 D01, simultaneous transmission SAR is compliant if,

- 1) Scalar SAR summation < 1.6W/kg.
- 2) $SPLSR = (SAR_1 + SAR_2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$, where (x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates of the extrapolated peak SAR locations in the zoom scan. If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.

Test Position		Scaled SAR _{MAX}		Σ1-g SAR (W/Kg)	SPLSR	Remark
		WWAN	DSS			
Head	Left Cheek	0.975	0.310	1.285	N/A	N/A
	Left Tilt 15 Degree	0.517	0.173	0.690	N/A	N/A
	Right Cheek	0.797	0.272	1.069	N/A	N/A

	Right Tilt 15 Degree	0.427	0.129	0.556	N/A	N/A
Body-Worn	Front Side	0.742	0.157	0.899	N/A	N/A
	Back Side	1.185	0.259	1.444	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of WWAN and DSS

10. Appendix A. Photo documentation

Refer to appendix Test Setup photo---SAR

11. Appendix B. System Check Plots

Table of contents
MEASUREMENT 1 System Performance Check - 835MHz
MEASUREMENT 2 System Performance Check - 1800MHz
MEASUREMENT 3 System Performance Check - 1900MHz
MEASUREMENT 4 System Performance Check - 2450MHz

MEASUREMENT 1


Date of measurement: 24/11/2021

A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Dipole</u>
Band	<u>CW835</u>
Channels	<u>Middle</u>
Signal	<u>CW (Crest factor: 1.0)</u>

B. SAR Measurement Results



Frequency (MHz)	835.000000
Relative permittivity (real part)	42.642177
Relative permittivity (imaginary part)	20.101257
Conductivity (S/m)	0.932475
Variation (%)	1.000000

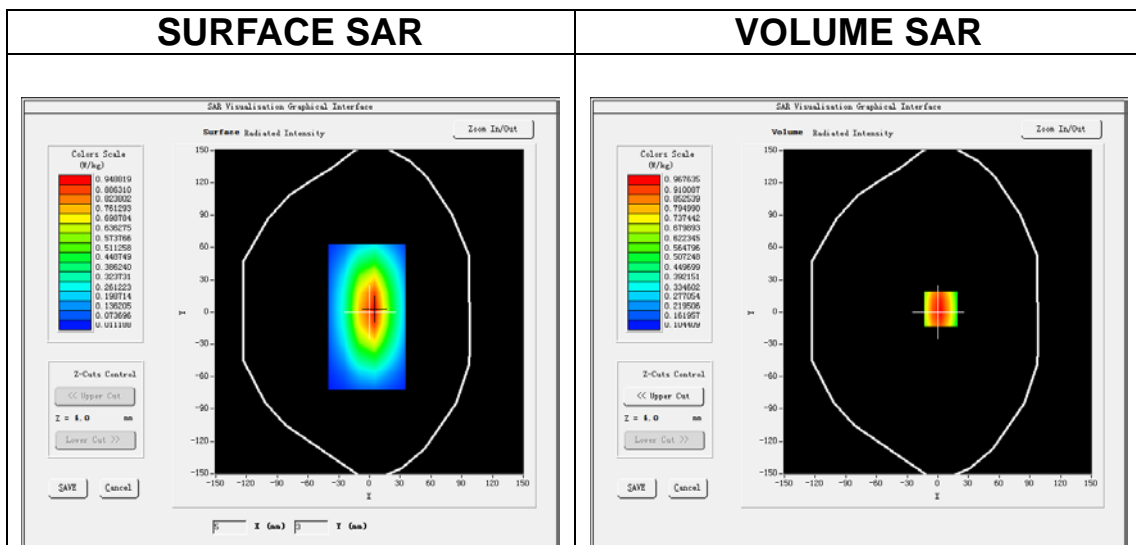

Maximum location: X=3.00, Y=3.00

SAR Peak: 1.30 W/kg

SAR 10g (W/Kg)	0.655079
SAR 1g (W/Kg)	1.049129

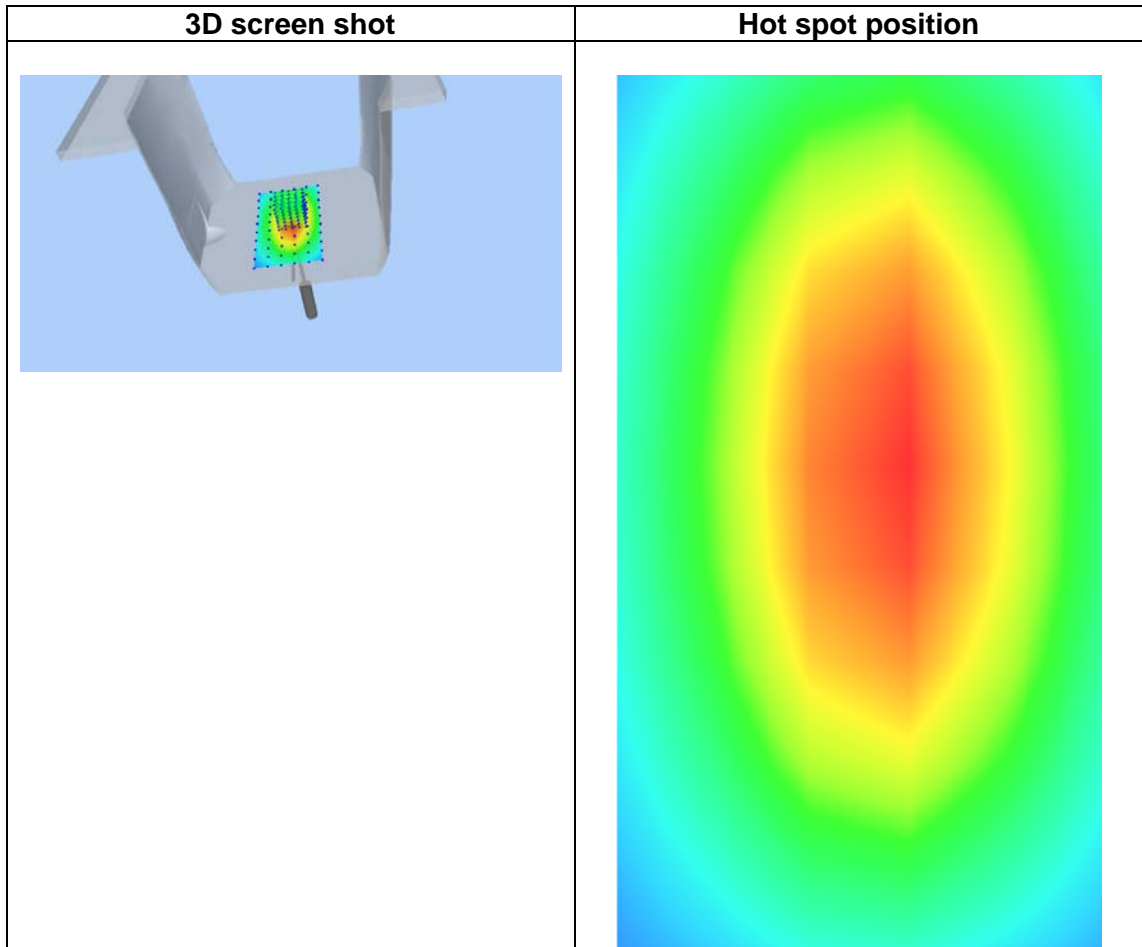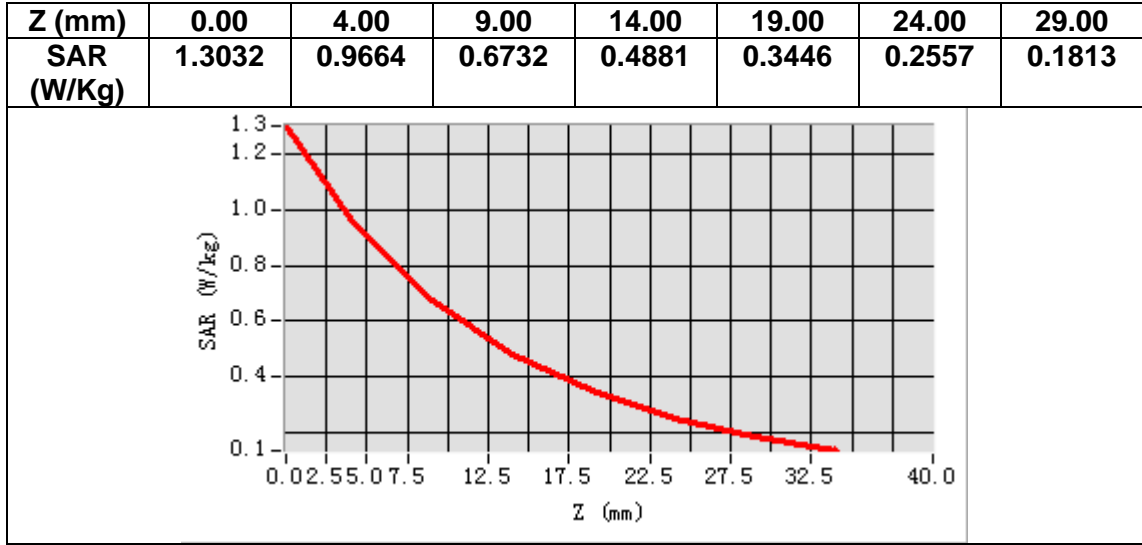

MEASUREMENT 2


Date of measurement: 26/11/2021

A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Dipole</u>
Band	<u>CW1800</u>
Channels	<u>Middle</u>
Signal	<u>CW (Crest factor: 1.0)</u>

B. SAR Measurement Results



Frequency (MHz)	1800.000000
Relative permittivity (real part)	39.140208
Relative permittivity (imaginary part)	14.028527
Conductivity (S/m)	1.402853
Variation (%)	-2.490000

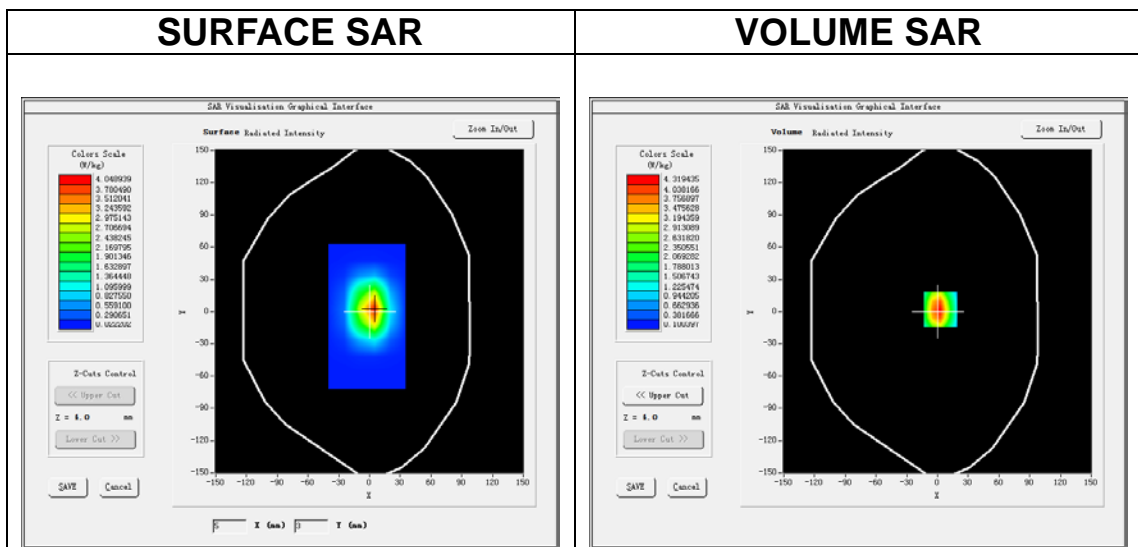

Maximum location: X=3.00, Y=2.00

SAR Peak: 6.82 W/kg

SAR 10g (W/Kg)	1.832232
SAR 1g (W/Kg)	3.668254

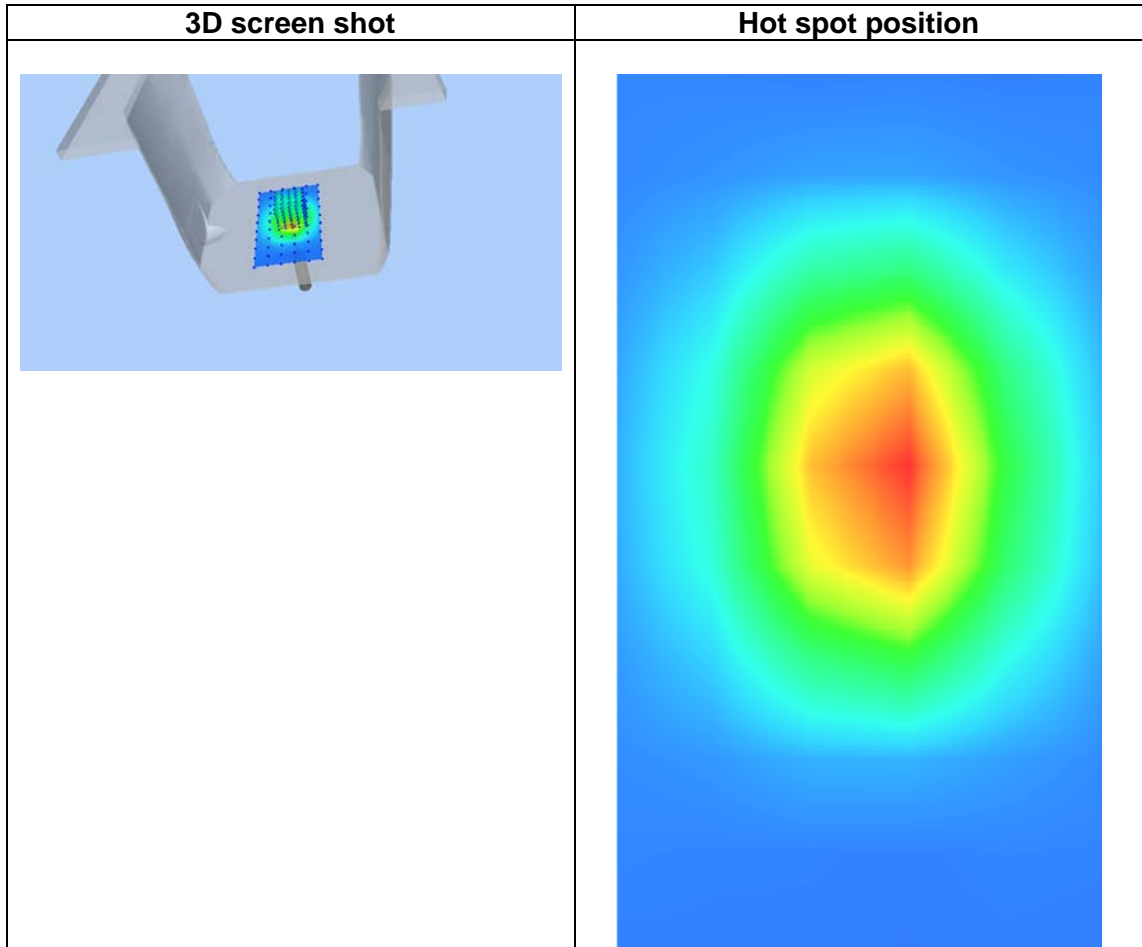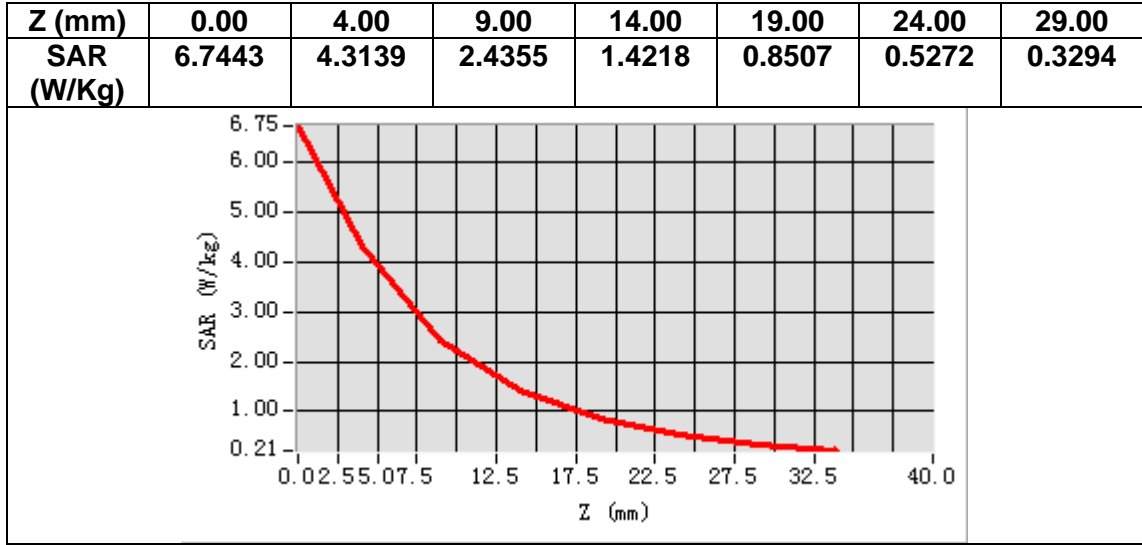

MEASUREMENT 3


Date of measurement: 23/11/2021

A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Dipole</u>
Band	<u>CW1900</u>
Channels	<u>Middle</u>
Signal	<u>CW (Crest factor: 1.0)</u>

B. SAR Measurement Results

Frequency (MHz)	1900.000000
Relative permittivity (real part)	38.767427
Relative permittivity (imaginary part)	13.859145
Conductivity (S/m)	1.462910
Variation (%)	1.190000

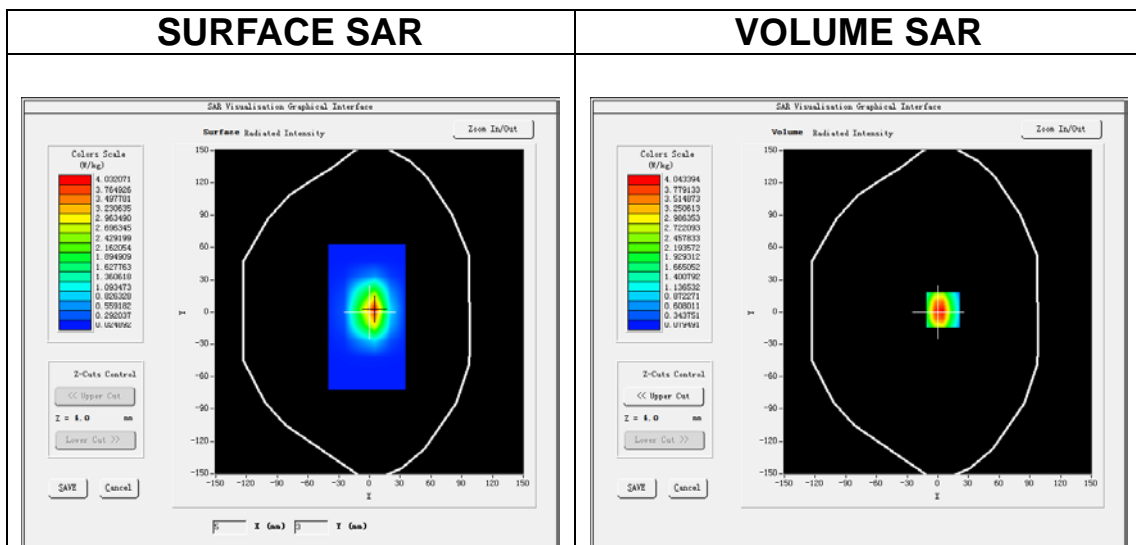


Maximum location: X=5.00, Y=2.00

SAR Peak: 6.70 W/kg

SAR 10g (W/Kg)	2.182098
SAR 1g (W/Kg)	4.158392

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	6.3270	4.0411	2.2605	1.3092	0.7638	0.4542	0.2780

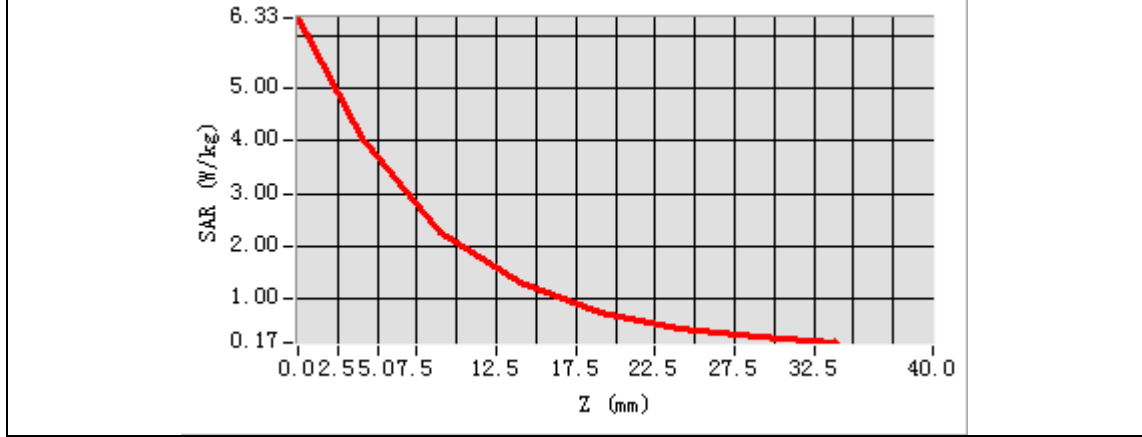

3D screen shot	Hot spot position

MEASUREMENT 4


Date of measurement: 17/11/2021

A. Experimental conditions.

Area Scan	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
ZoomScan	<u>7x7x7, dx=5mm dy=5mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Dipole</u>
Band	<u>CW2450</u>
Channels	<u>Middle</u>
Signal	<u>CW (Crest factor: 1.0)</u>

B. SAR Measurement Results



Frequency (MHz)	2450.000000
Relative permittivity (real part)	40.694711
Relative permittivity (imaginary part)	13.057074
Conductivity (S/m)	1.777213
Variation (%)	1.300000

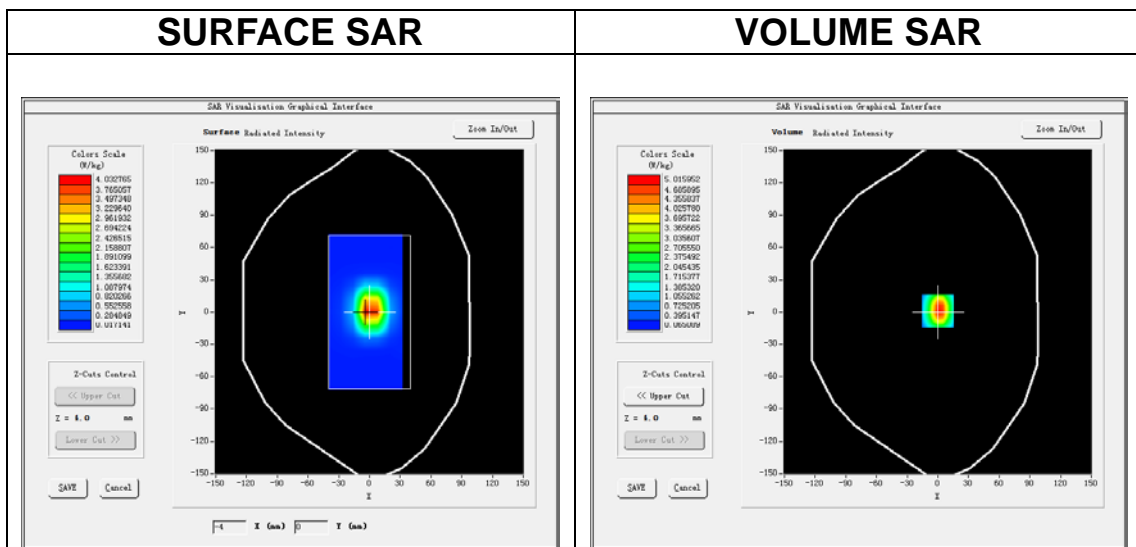

Maximum location: X=0.00, Y=1.00

SAR Peak: 8.14 W/kg

SAR 10g (W/Kg)	2.415175
SAR 1g (W/Kg)	5.345100

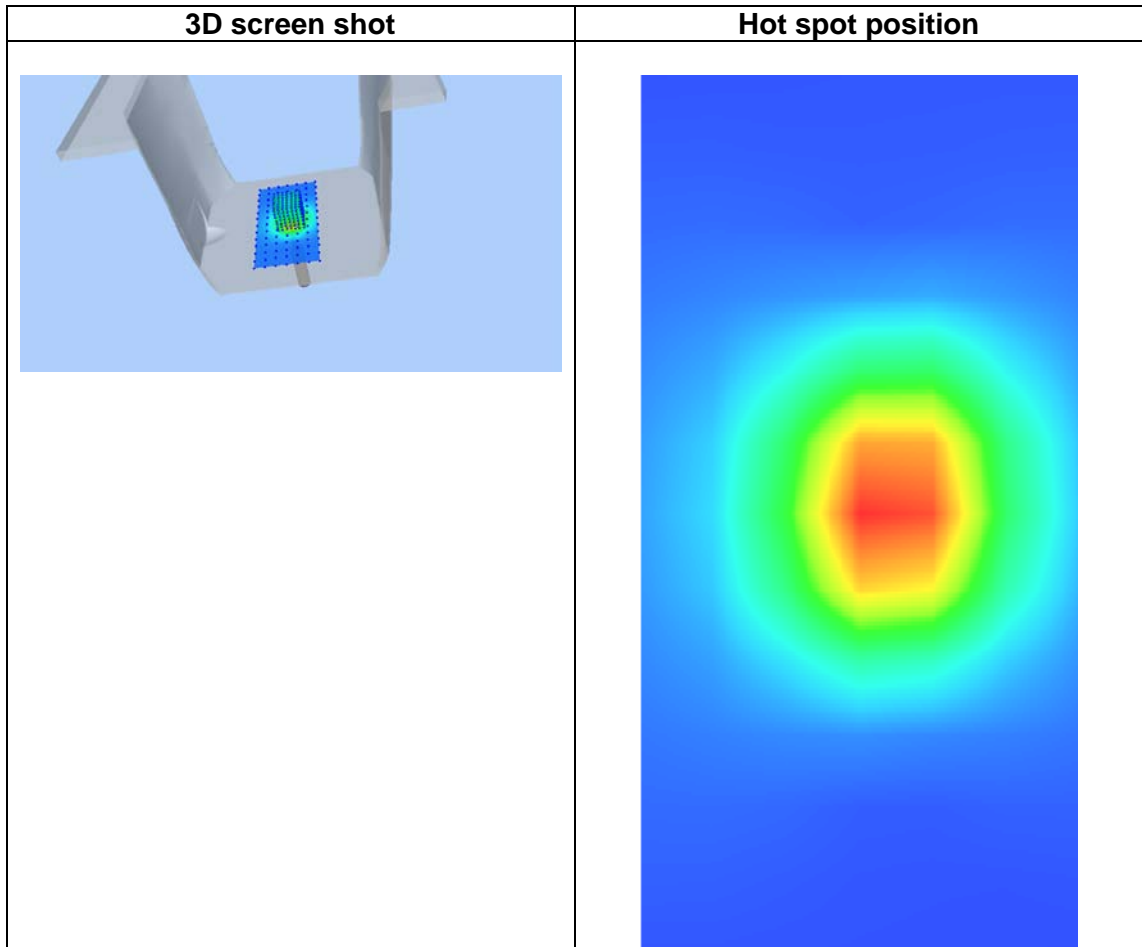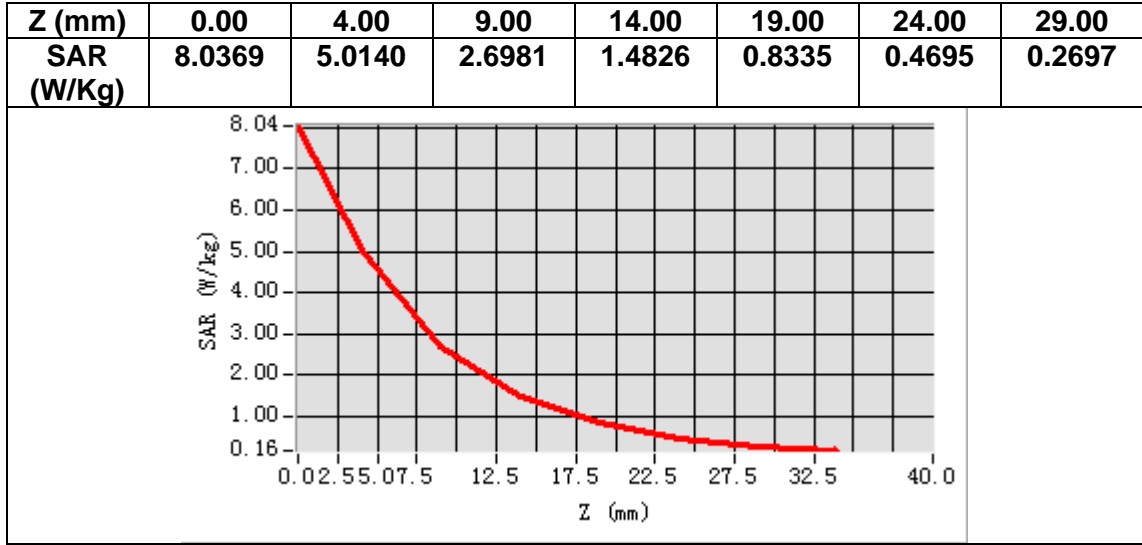

12. Appendix C. Plots of High SAR Measurement

Table of contents
MEASUREMENT 1 GSM 850 Head
MEASUREMENT 2 GSM 850 Body
MEASUREMENT 3 GSM 1900 Head
MEASUREMENT 4 GSM 1900 Body
MEASUREMENT 5 WCDMA Band 2 Head
MEASUREMENT 6 WCDMA Band 2 Body
MEASUREMENT 7 WCDMA Band 5 Head
MEASUREMENT 8 WCDMA Band 5 Body
MEASUREMENT 9 LTE Band 2 Head
MEASUREMENT 10 LTE Band 2 Body
MEASUREMENT 11 LTE Band 4 Head
MEASUREMENT 12 LTE Band 4 Body
MEASUREMENT 13 Bluetooth Head
MEASUREMENT 14 Bluetooth Body

MEASUREMENT 1


Date of measurement: 24/11/2021

A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Left head</u>
Device Position	<u>Cheek</u>
Band	<u>GSM850</u>
Channels	<u>Middle</u>
Signal	<u>TDMA (Crest factor: 4.0)</u>



B. SAR Measurement Results

Frequency (MHz)	836.400000
Relative permittivity (real part)	42.557838
Relative permittivity (imaginary part)	20.127096
Conductivity (S/m)	0.935239
Variation (%)	-3.120000

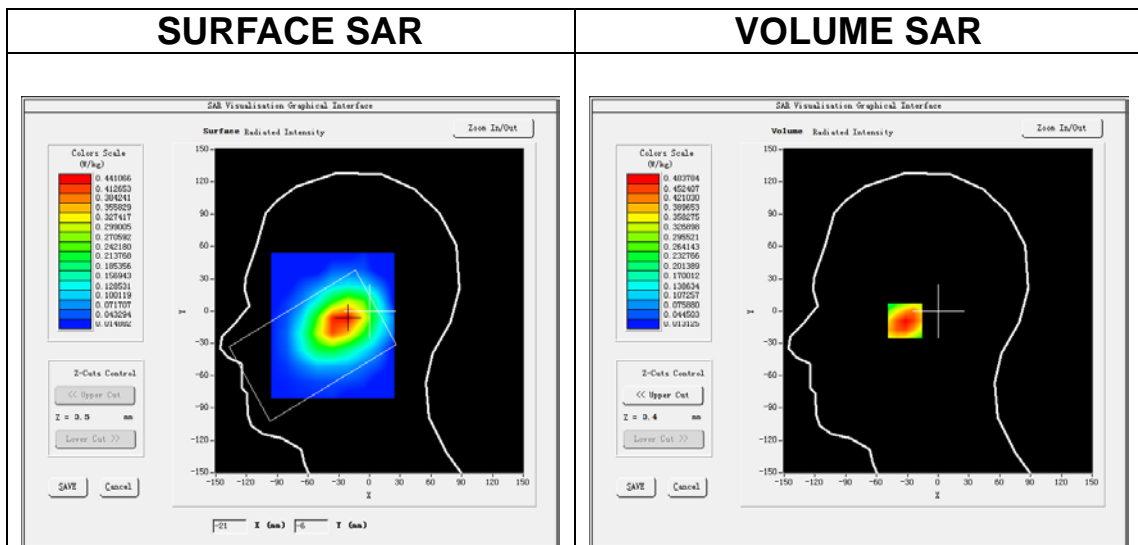

Maximum location: X=-28.00, Y=-9.00
SAR Peak: 0.64 W/kg

SAR 10g (W/Kg)	0.318956
SAR 1g (W/Kg)	0.467537

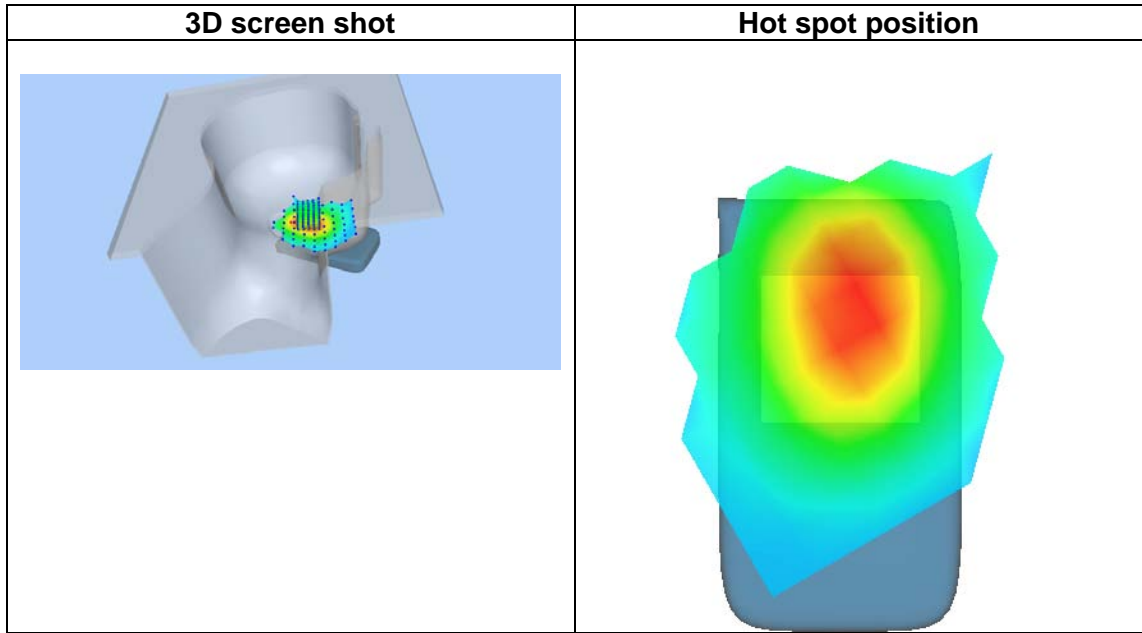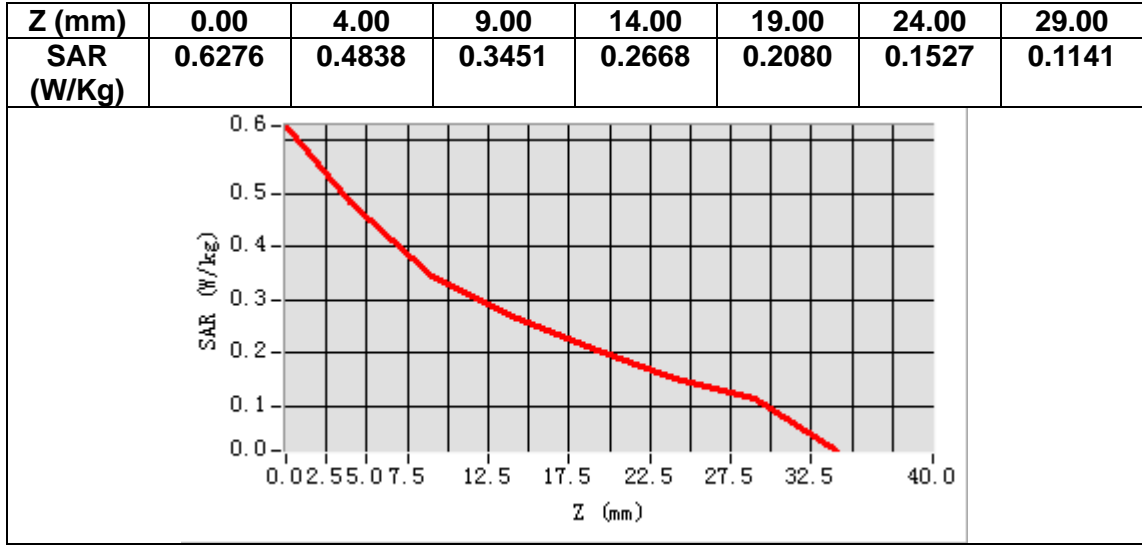

MEASUREMENT 2


Date of measurement: 24/11/2021

A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body</u>
Band	<u>GSM850</u>
Channels	<u>High</u>
Signal	<u>TDMA (Crest factor: 4.0)</u>

B. SAR Measurement Results



Frequency (MHz)	848.800000
Relative permittivity (real part)	42.401798
Relative permittivity (imaginary part)	20.173517
Conductivity (S/m)	0.951293
Variation (%)	-0.480000

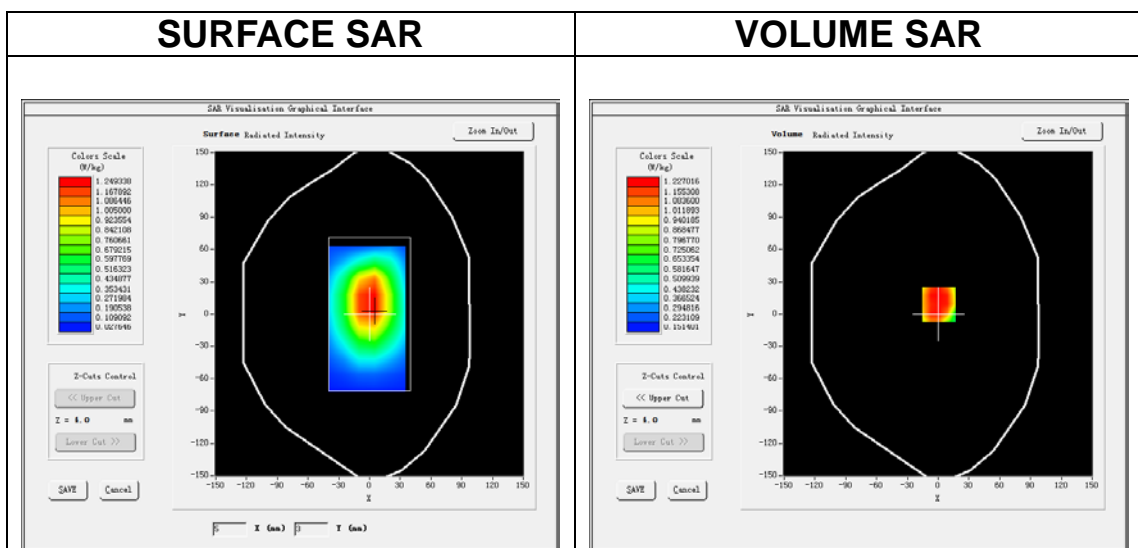

Maximum location: X=1.00, Y=9.00

SAR Peak: 1.63 W/kg

SAR 10g (W/Kg)	0.861852
SAR 1g (W/Kg)	1.022721

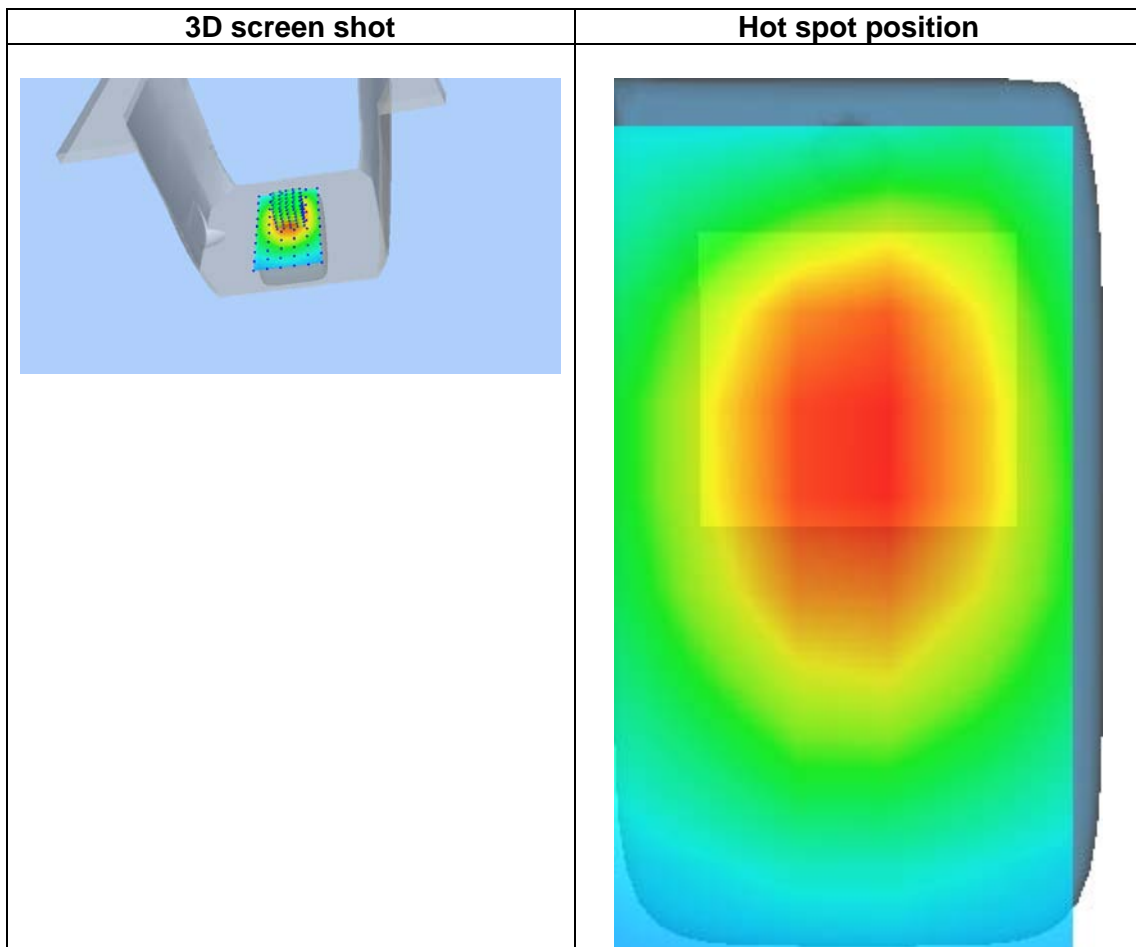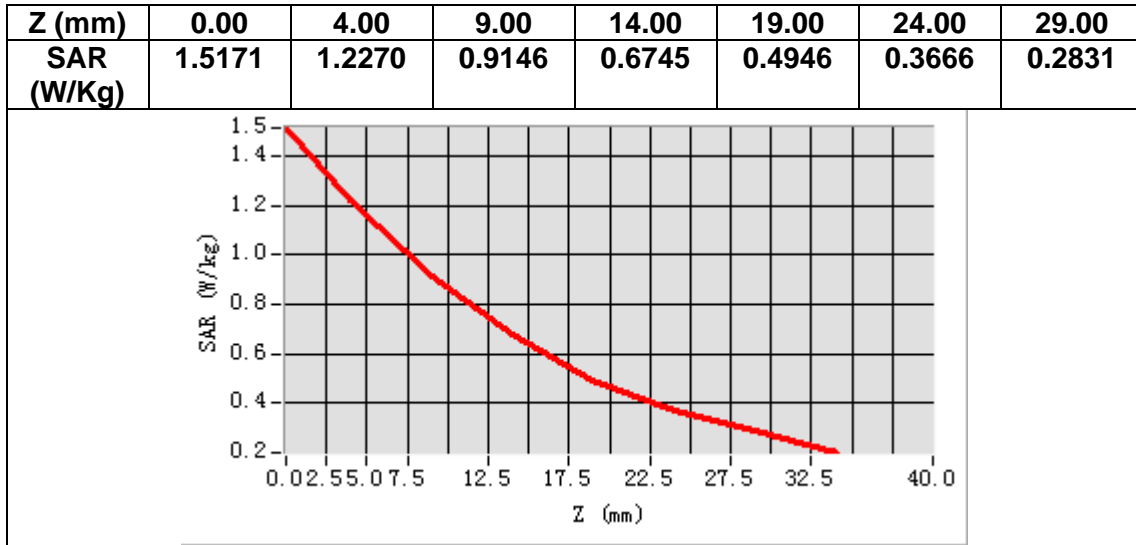

MEASUREMENT 3


Date of measurement: 23/11/2021

A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Left head</u>
Device Position	<u>Cheek</u>
Band	<u>GSM1900</u>
Channels	<u>Middle</u>
Signal	<u>TDMA (Crest factor: 4.0)</u>



B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	38.853828
Relative permittivity (imaginary part)	13.876945
Conductivity (S/m)	1.449370
Variation (%)	-0.430000

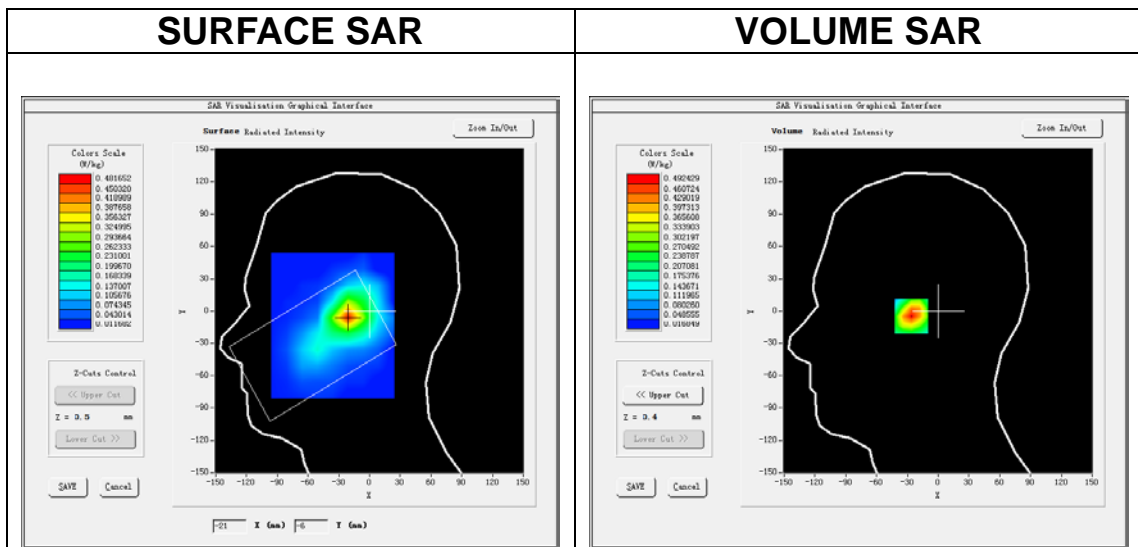

Maximum location: X=-21.00, Y=-5.00
SAR Peak: 0.71 W/kg

SAR 10g (W/Kg)	0.265193
SAR 1g (W/Kg)	0.475373

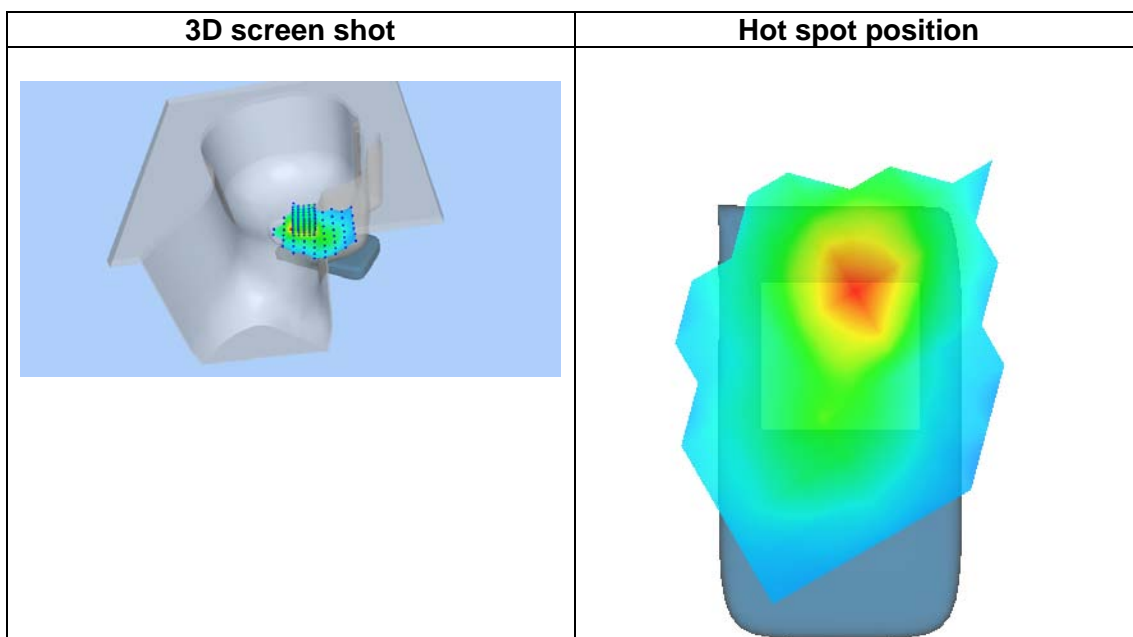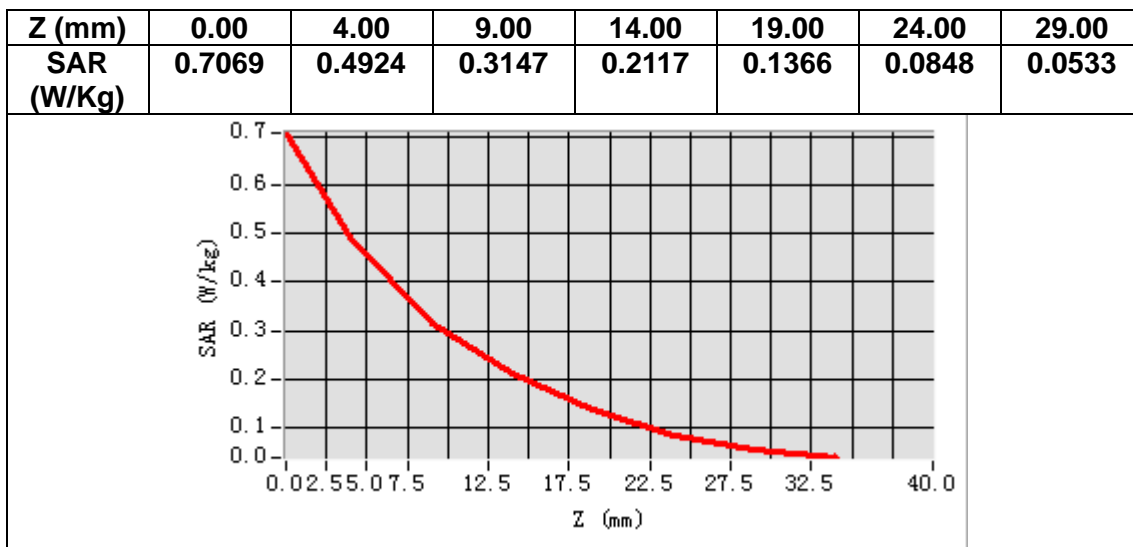

MEASUREMENT 4


Date of measurement: 23/11/2021

A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body</u>
Band	<u>GSM1900</u>
Channels	<u>Middle</u>
Signal	<u>TDMA (Crest factor: 4.0)</u>

B. SAR Measurement Results



Frequency (MHz)	1880.000000
Relative permittivity (real part)	38.853828
Relative permittivity (imaginary part)	13.876945
Conductivity (S/m)	1.449370
Variation (%)	-3.510000

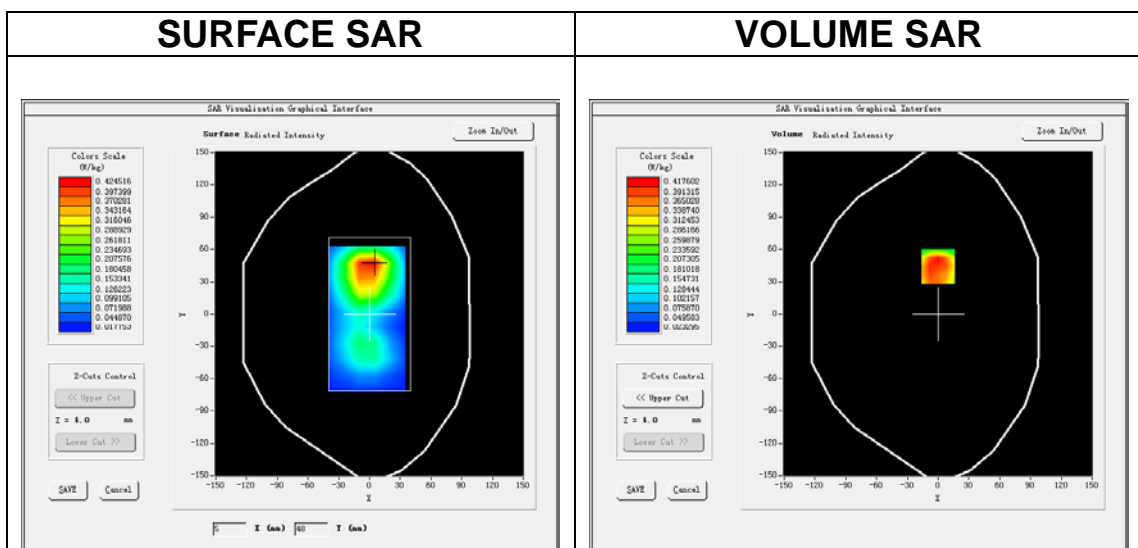

Maximum location: X=0.00, Y=44.00

SAR Peak: 0.68 W/kg

SAR 10g (W/Kg)	0.234005
SAR 1g (W/Kg)	0.415540

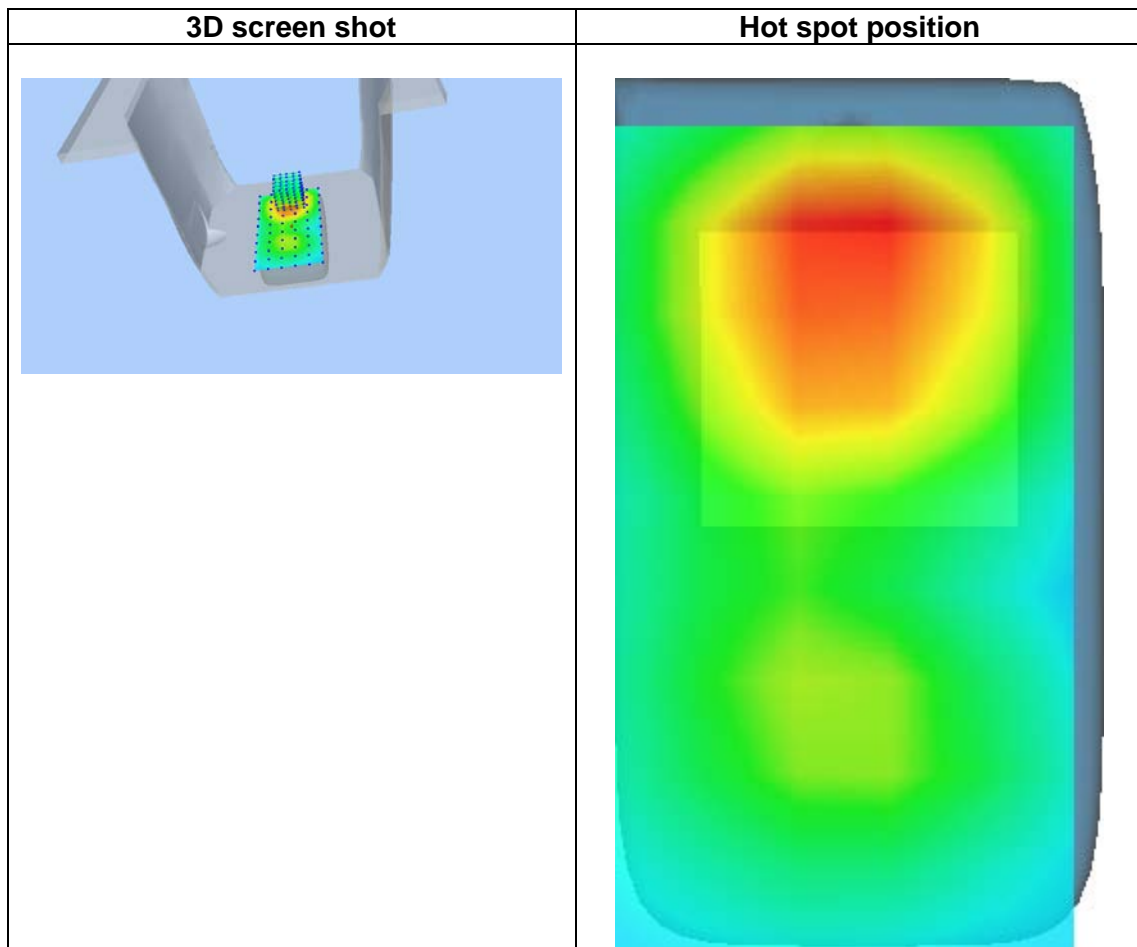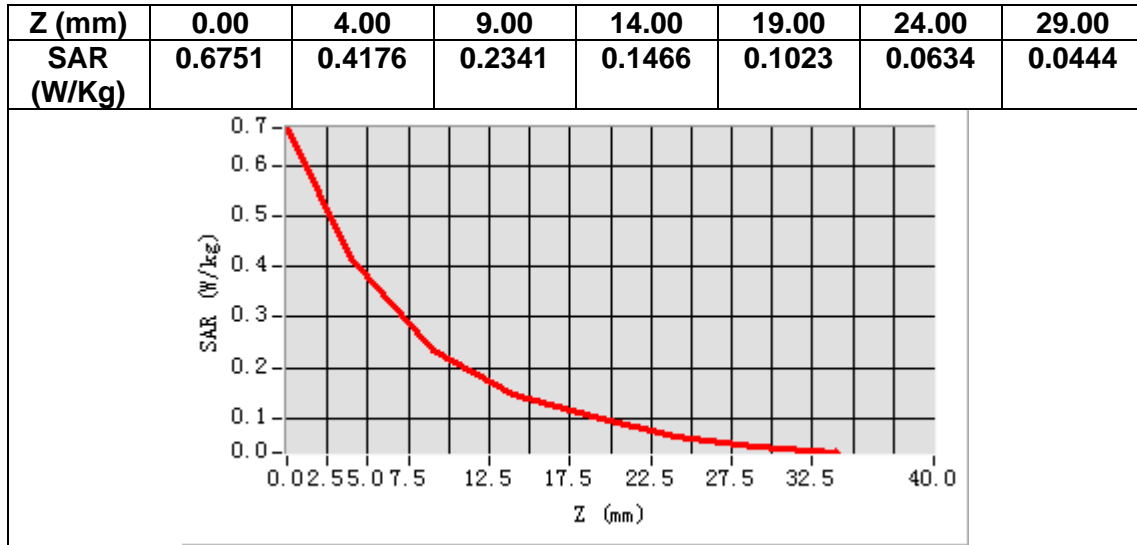

MEASUREMENT 5


Date of measurement: 23/11/2021

A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Left head</u>
Device Position	<u>Cheek</u>
Band	<u>Band2 WCDMA1900</u>
Channels	<u>Middle</u>
Signal	<u>WCDMA (Crest factor: 1.0)</u>



B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	38.853828
Relative permittivity (imaginary part)	13.876945
Conductivity (S/m)	1.449370
Variation (%)	-2.460000

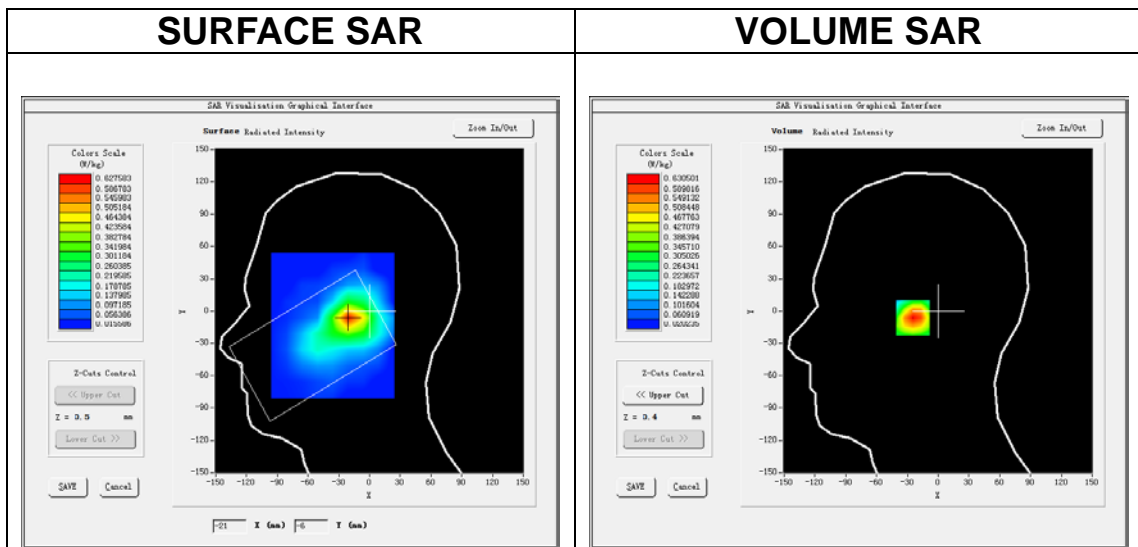

Maximum location: X=-20.00, Y=-6.00
SAR Peak: 0.89 W/kg

SAR 10g (W/Kg)	0.352587
SAR 1g (W/Kg)	0.608058

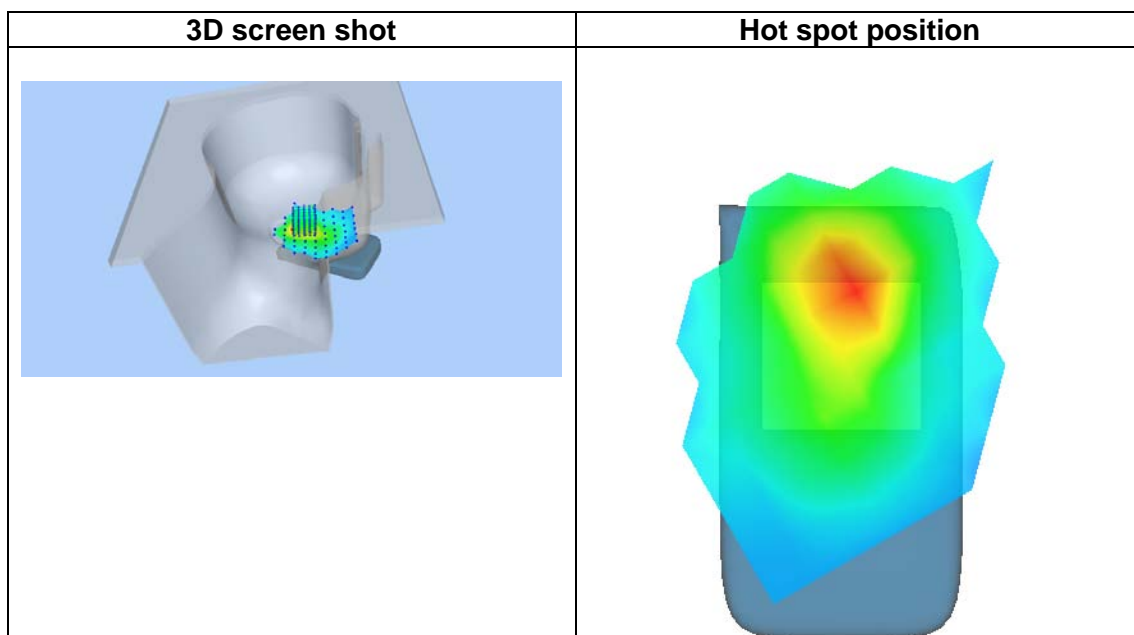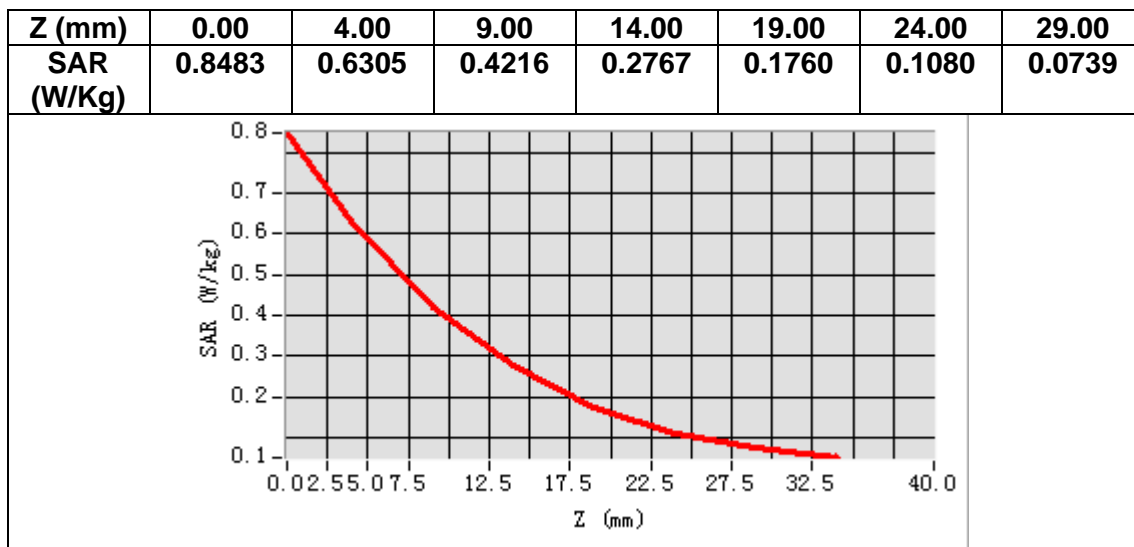

MEASUREMENT 6


Date of measurement: 23/11/2021

A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body</u>
Band	<u>Band2 WCDMA1900</u>
Channels	<u>Middle</u>
Signal	<u>WCDMA (Crest factor: 1.0)</u>

B. SAR Measurement Results



Frequency (MHz)	1880.000000
Relative permittivity (real part)	38.853828
Relative permittivity (imaginary part)	13.876945
Conductivity (S/m)	1.449370
Variation (%)	-2.700000

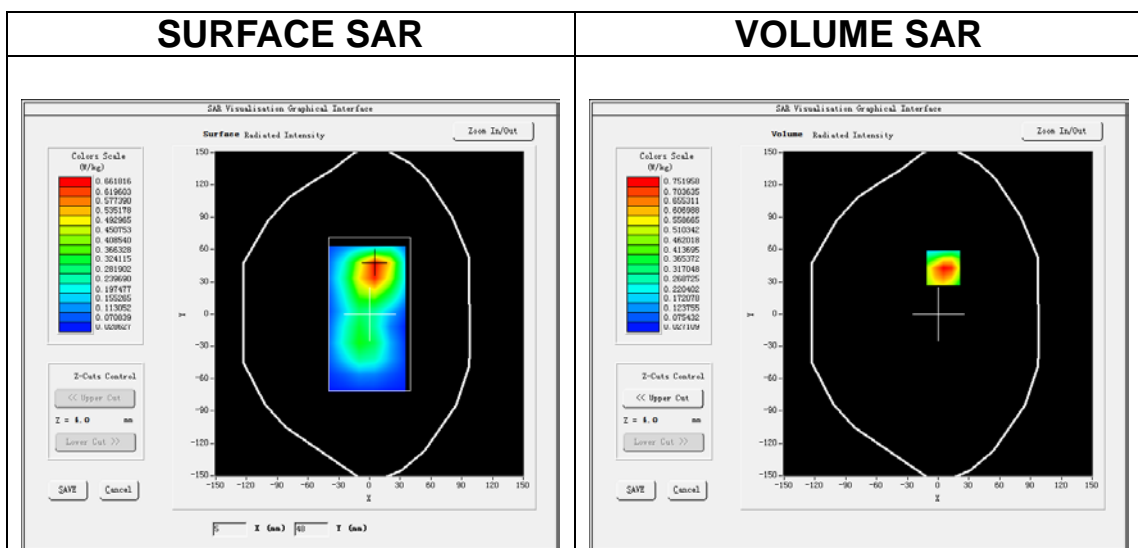

Maximum location: X=5.00, Y=43.00

SAR Peak: 1.20 W/kg

SAR 10g (W/Kg)	0.403471
SAR 1g (W/Kg)	0.741928

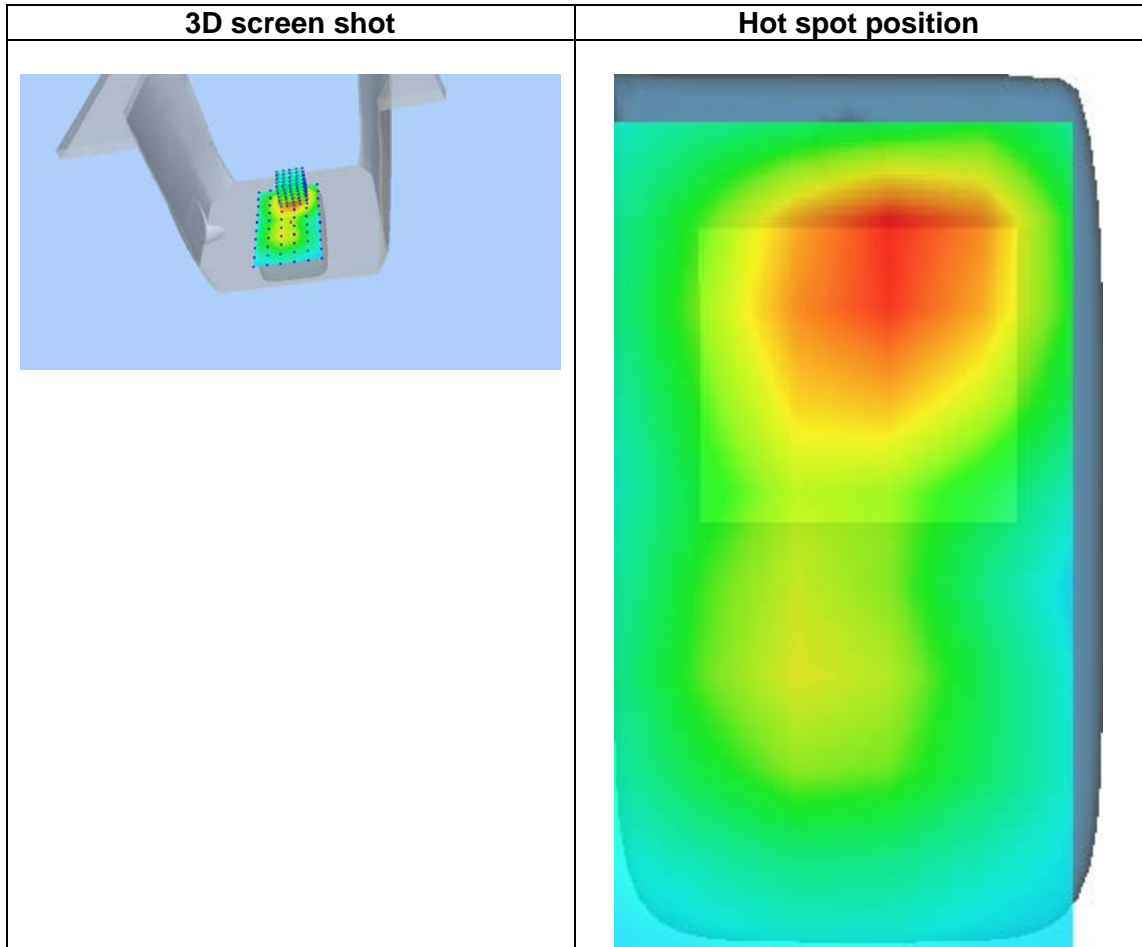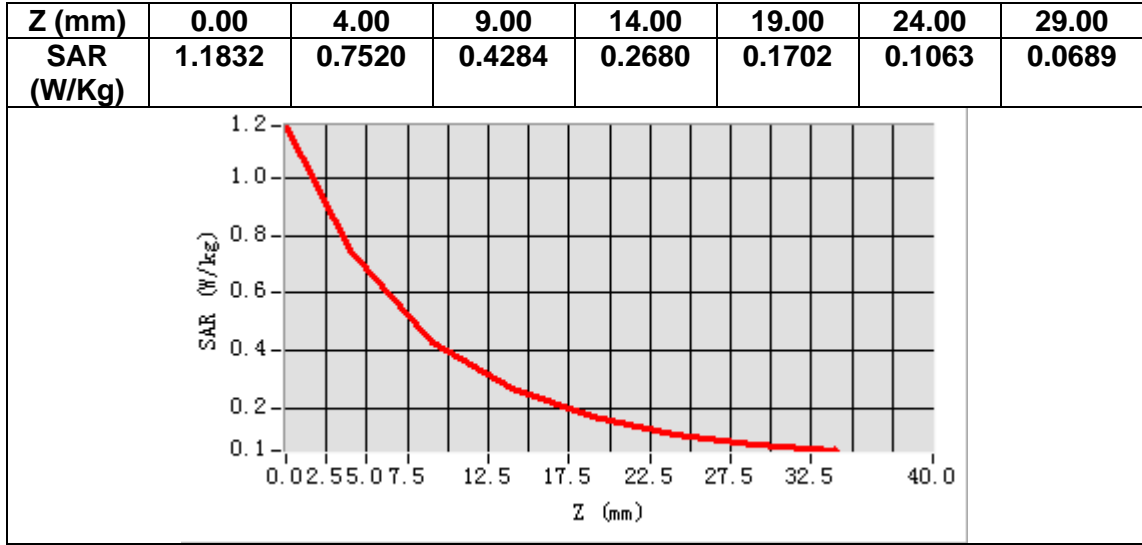

MEASUREMENT 7


Date of measurement: 24/11/2021

A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Left head</u>
Device Position	<u>Cheek</u>
Band	<u>Band5_WCDMA850</u>
Channels	<u>Middle</u>
Signal	<u>WCDMA (Crest factor: 1.0)</u>



B. SAR Measurement Results

Frequency (MHz)	836.400000
Relative permittivity (real part)	42.557838
Relative permittivity (imaginary part)	20.127096
Conductivity (S/m)	0.935239
Variation (%)	-0.400000

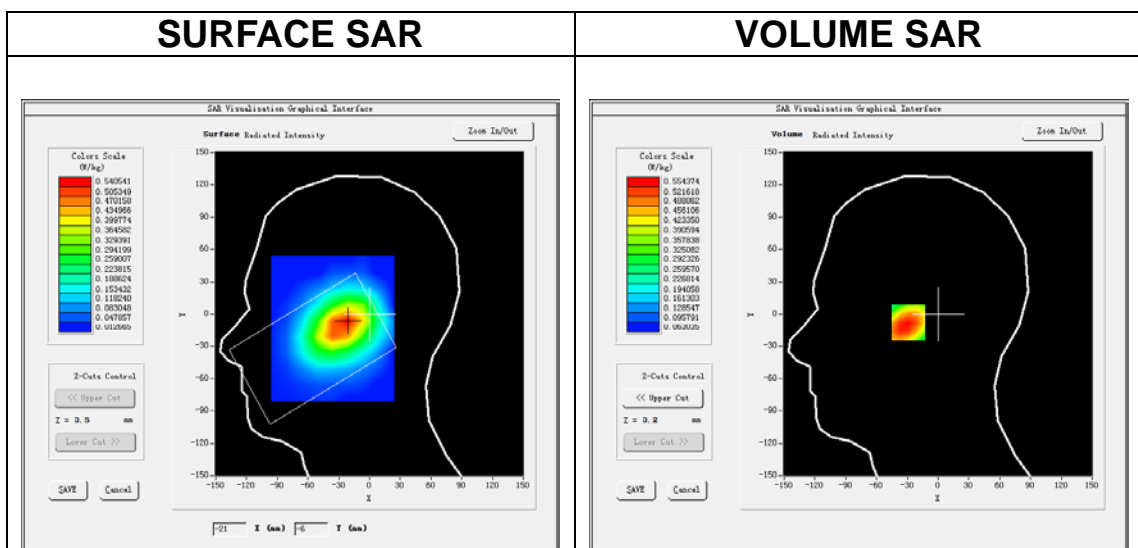

Maximum location: X=-24.00, Y=-8.00
SAR Peak: 0.70 W/kg

SAR 10g (W/Kg)	0.382567
SAR 1g (W/Kg)	0.549292

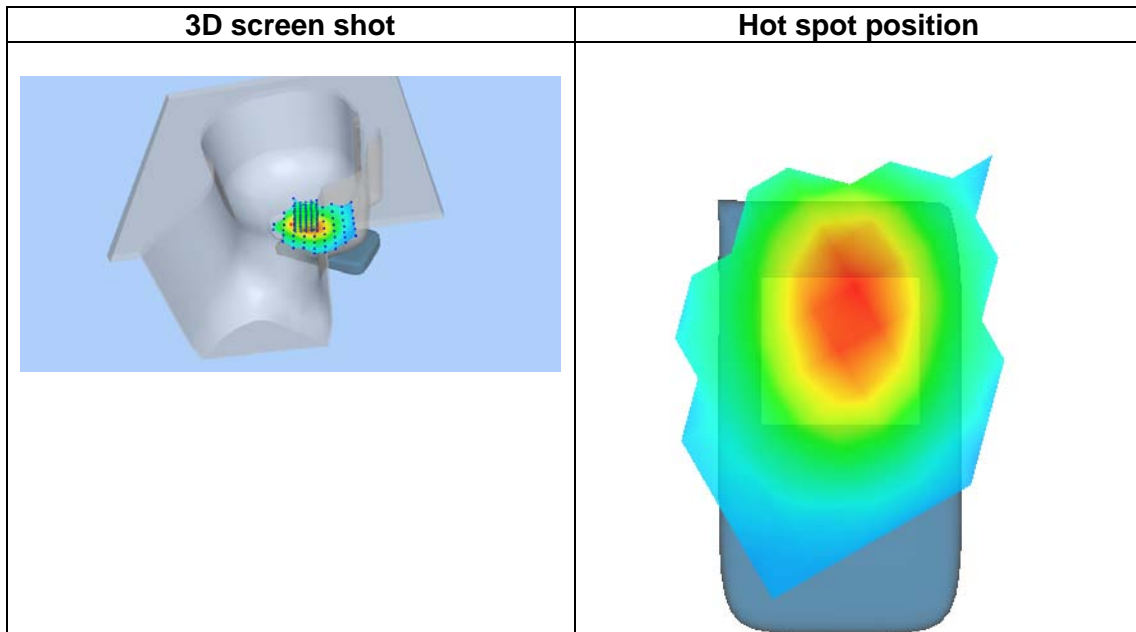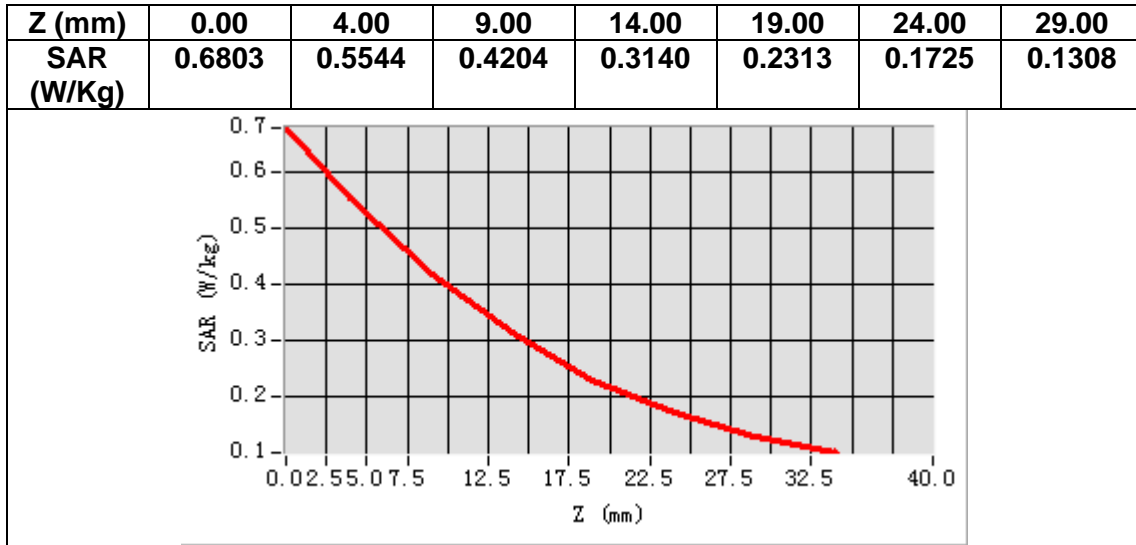

MEASUREMENT 8


Date of measurement: 24/11/2021

A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body</u>
Band	<u>Band5_WCDMA850</u>
Channels	<u>Low</u>
Signal	<u>WCDMA (Crest factor: 1.0)</u>

B. SAR Measurement Results



Frequency (MHz)	826.400000
Relative permittivity (real part)	42.735798
Relative permittivity (imaginary part)	20.124376
Conductivity (S/m)	0.923933
Variation (%)	-0.190000

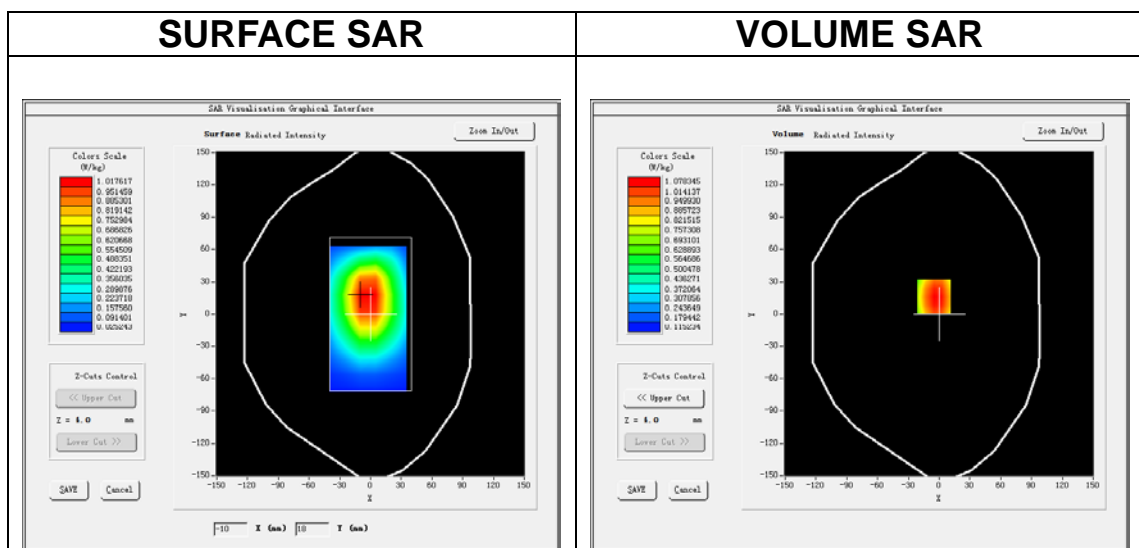

Maximum location: X=-5.00, Y=16.00

SAR Peak: 1.36 W/kg

SAR 10g (W/Kg)	0.753226
SAR 1g (W/Kg)	1.058753

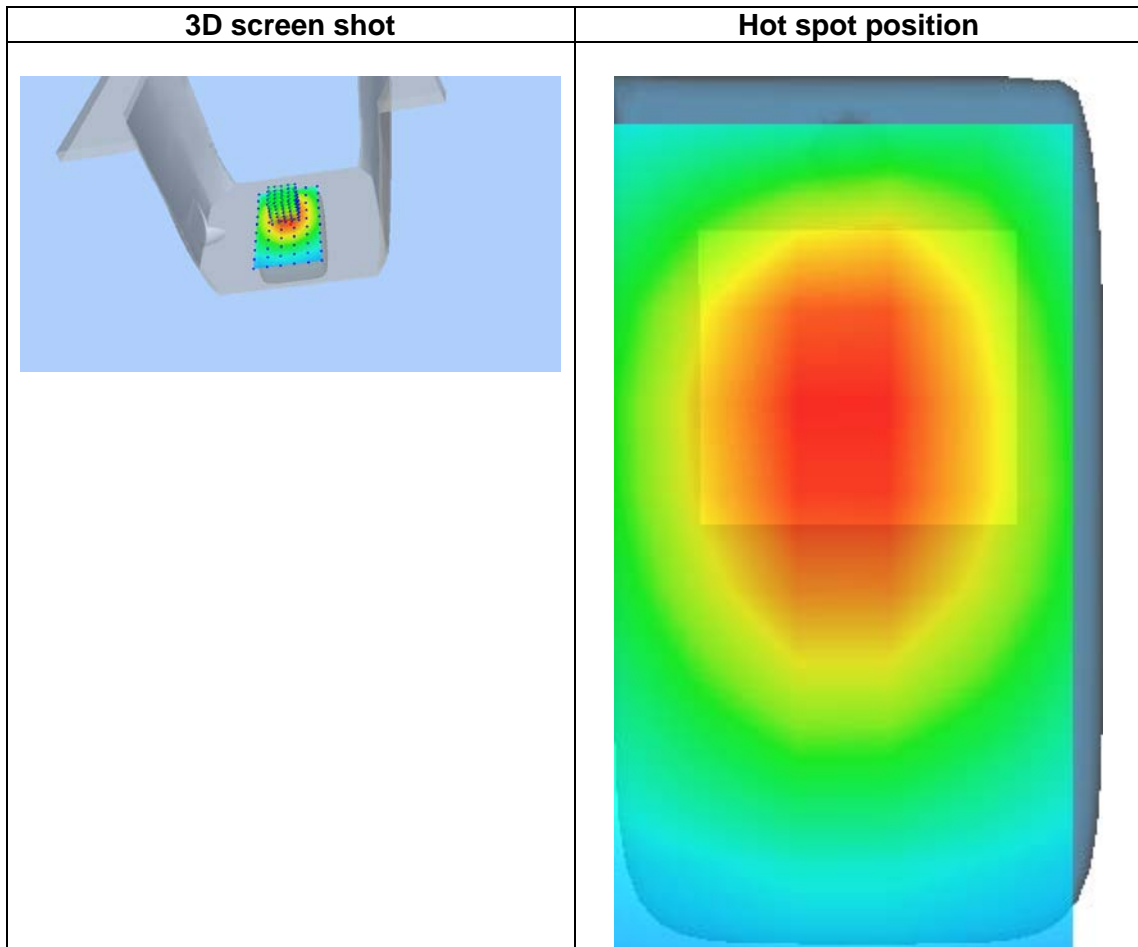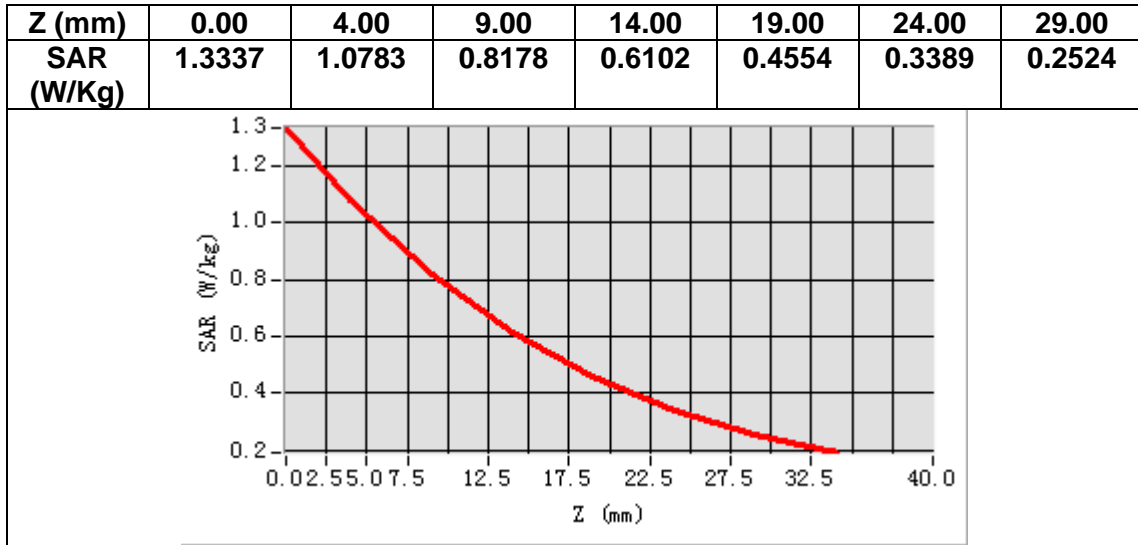

MEASUREMENT 9


Date of measurement: 23/11/2021

A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Left head</u>
Device Position	<u>Cheek</u>
Band	<u>LTE band 2</u>
Channels	<u>Middle</u>
Signal	<u>LTE (Crest factor: 1.0)</u>



B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	38.853828
Relative permittivity (imaginary part)	13.876945
Conductivity (S/m)	1.449370
Variation (%)	-4.760000

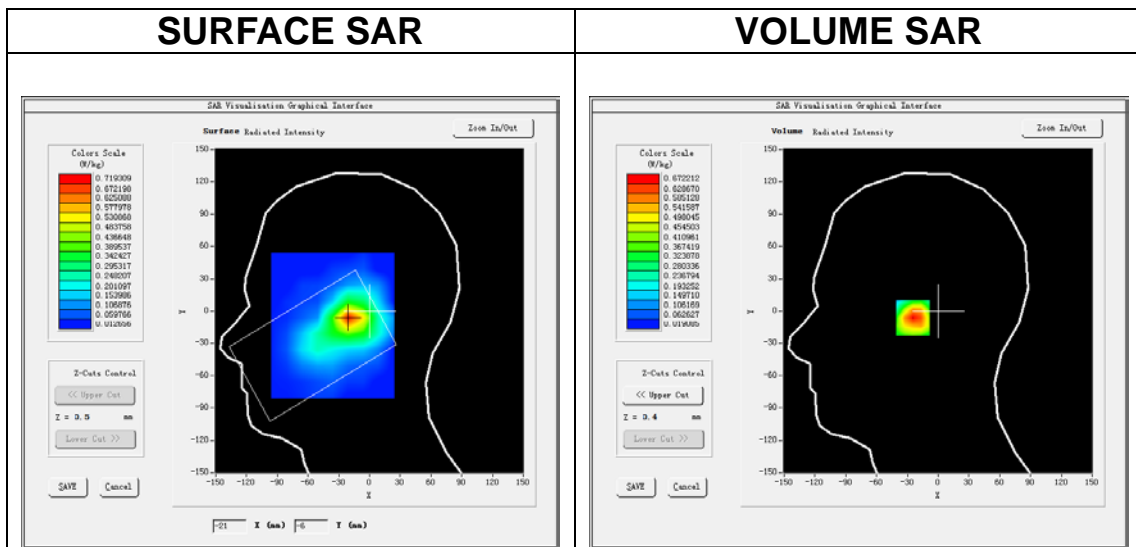

Maximum location: X=-20.00, Y=-6.00
SAR Peak: 0.95 W/kg

SAR 10g (W/Kg)	0.374284
SAR 1g (W/Kg)	0.648457

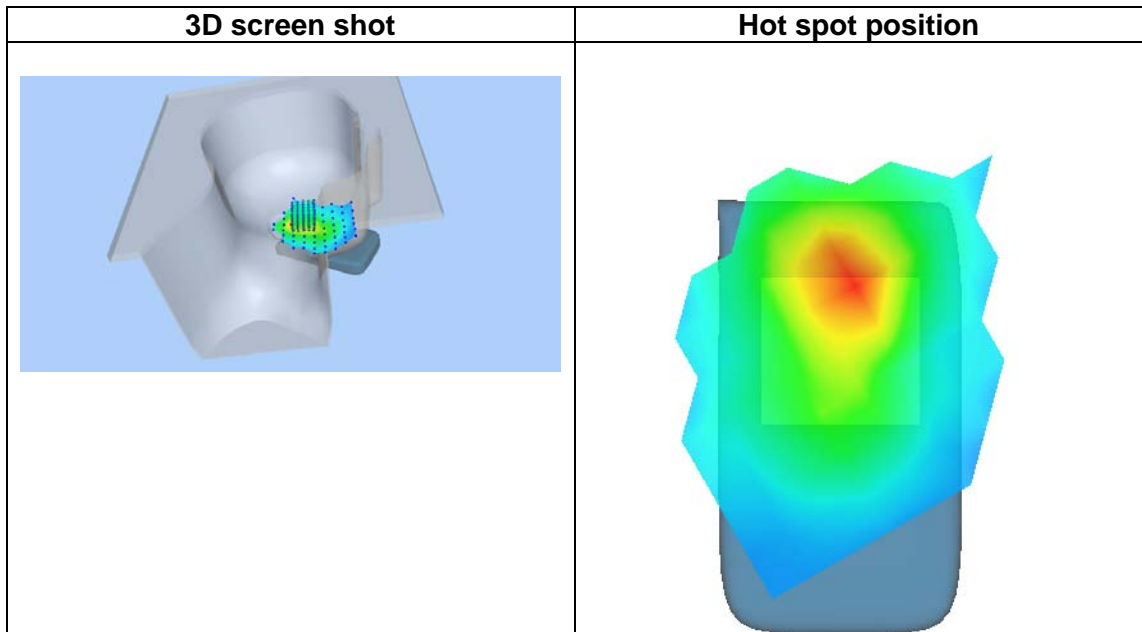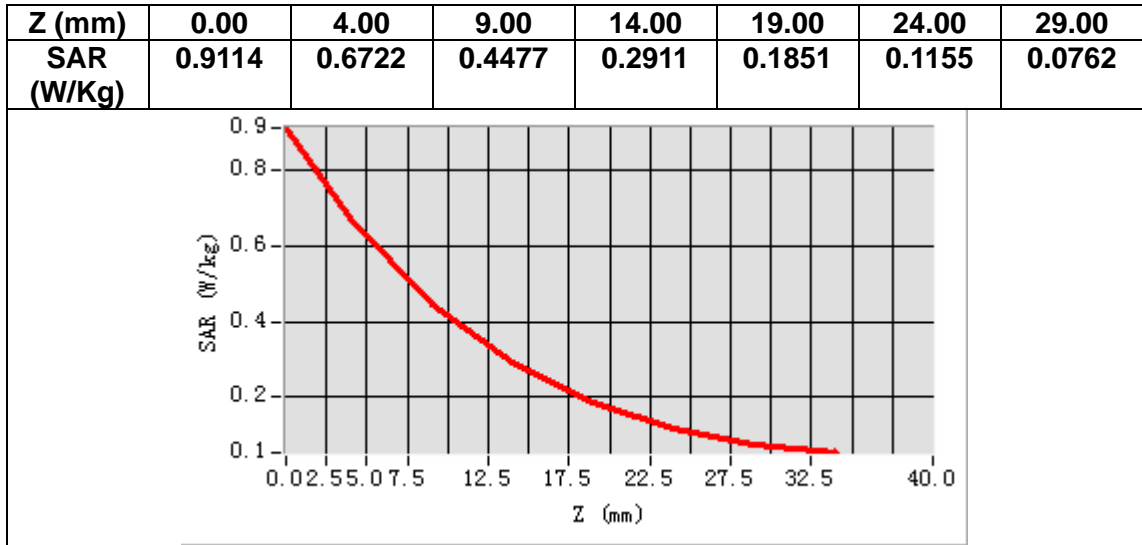

MEASUREMENT 10


Date of measurement: 23/11/2021

A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body</u>
Band	<u>LTE band 2</u>
Channels	<u>High</u>
Signal	<u>LTE (Crest factor: 1.0)</u>

B. SAR Measurement Results



Frequency (MHz)	1900.000000
Relative permittivity (real part)	38.767427
Relative permittivity (imaginary part)	13.859145
Conductivity (S/m)	1.462910
Variation (%)	-2.030000

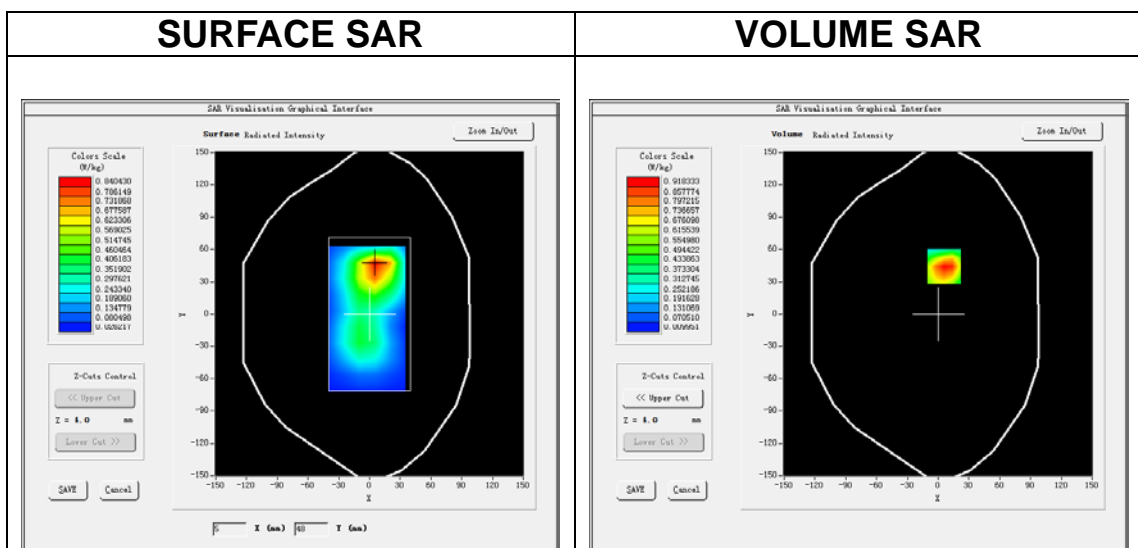

Maximum location: X=6.00, Y=44.00

SAR Peak: 1.39 W/kg

SAR 10g (W/Kg)	0.492871
SAR 1g (W/Kg)	0.891238

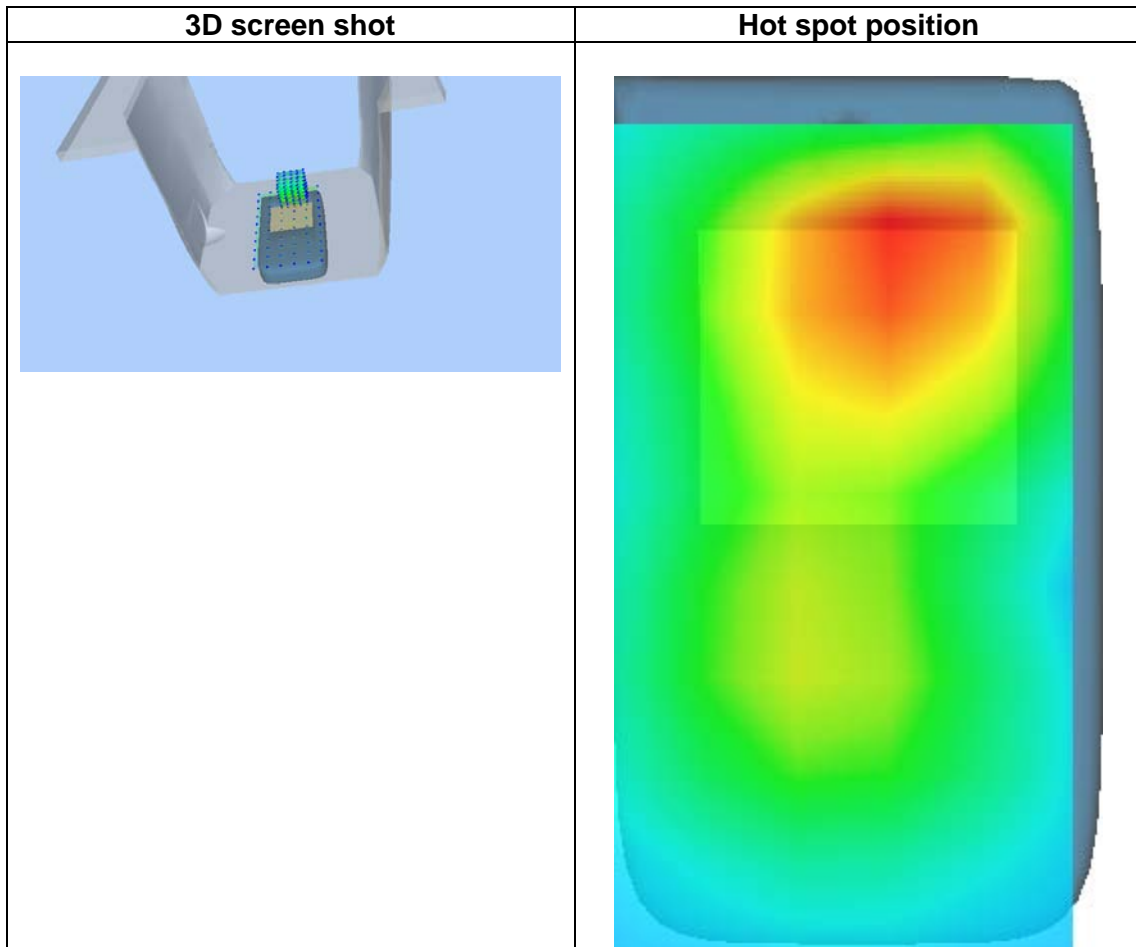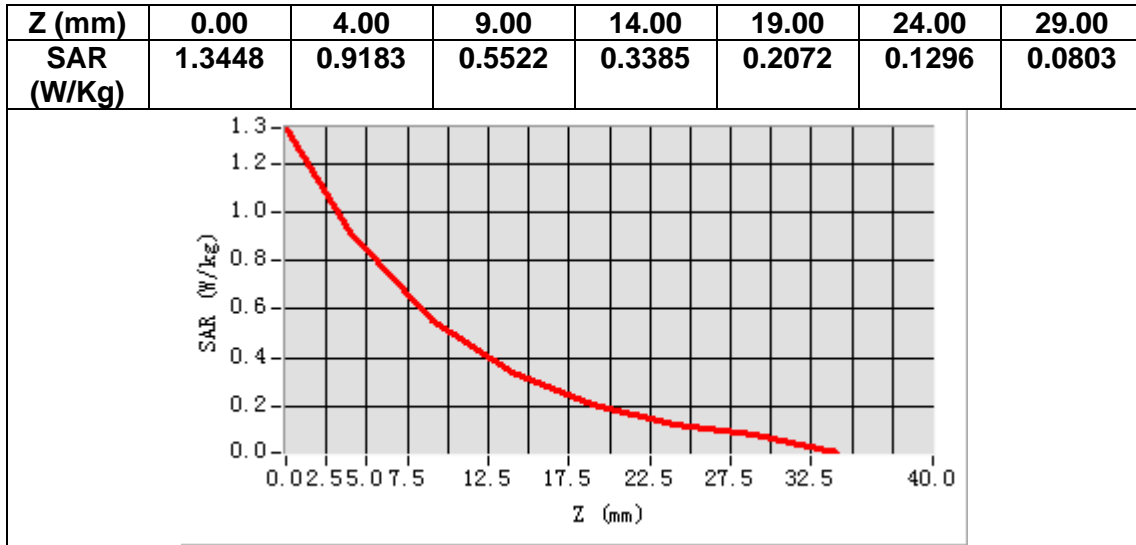

MEASUREMENT 11


Date of measurement: 26/11/2021

A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Left head</u>
Device Position	<u>Cheek</u>
Band	<u>LTE band 4</u>
Channels	<u>Middle</u>
Signal	<u>LTE (Crest factor: 1.0)</u>



B. SAR Measurement Results

Frequency (MHz)	1732.500000
Relative permittivity (real part)	39.607807
Relative permittivity (imaginary part)	13.965677
Conductivity (S/m)	1.344196
Variation (%)	-1.700000

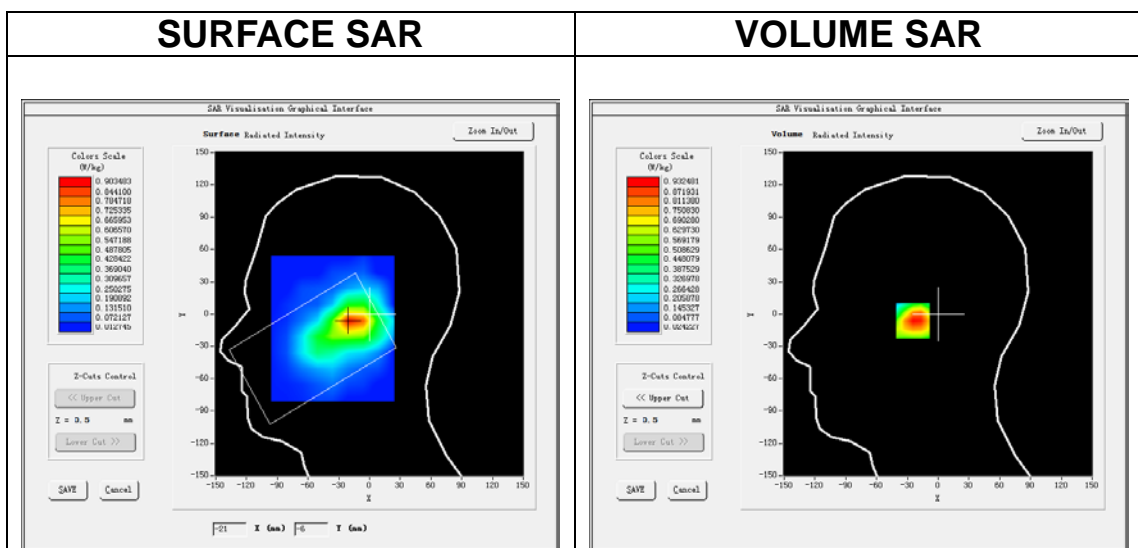

Maximum location: X=-19.00, Y=-6.00
SAR Peak: 1.34 W/kg

SAR 10g (W/Kg)	0.538621
SAR 1g (W/Kg)	0.895085

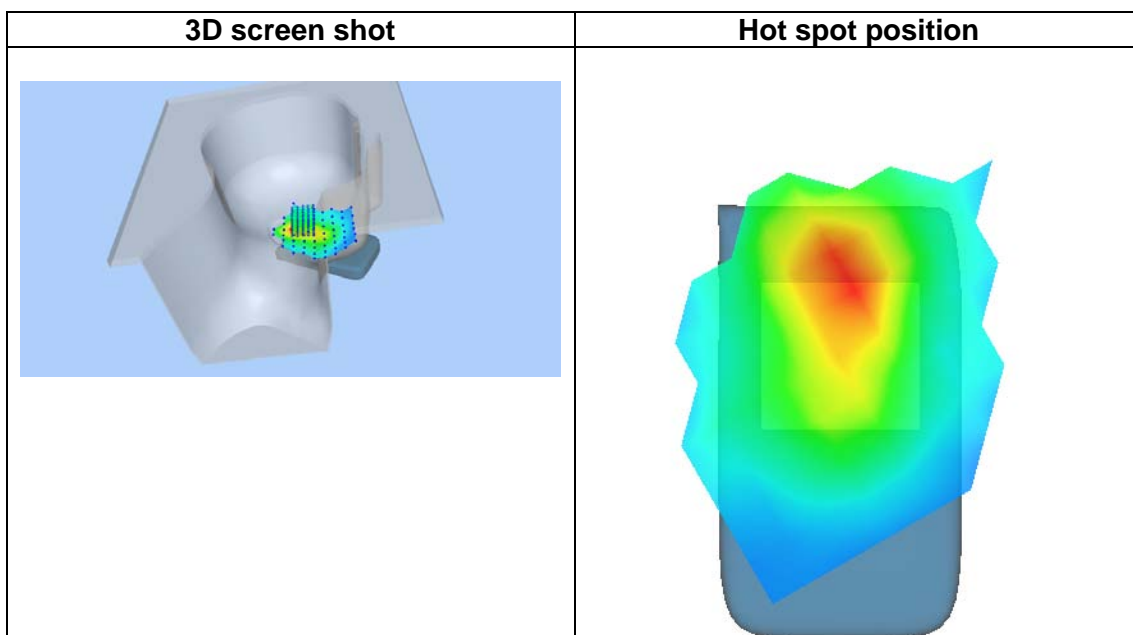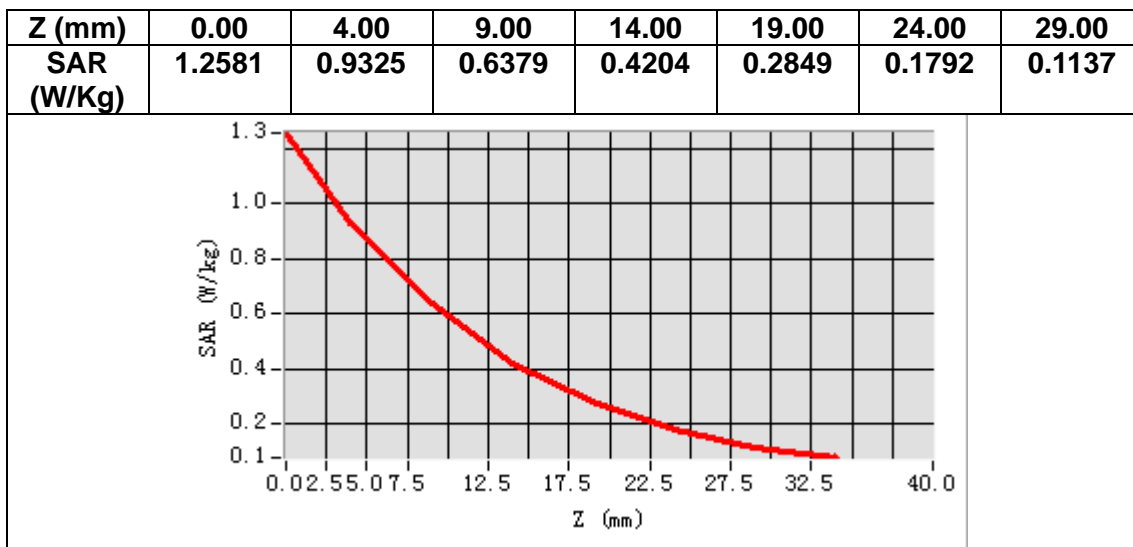

MEASUREMENT 12


Date of measurement: 26/11/2021

A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body</u>
Band	<u>LTE band 4</u>
Channels	<u>High</u>
Signal	<u>LTE (Crest factor: 1.0)</u>

B. SAR Measurement Results



Frequency (MHz)	1745.000000
Relative permittivity (real part)	39.535557
Relative permittivity (imaginary part)	13.974077
Conductivity (S/m)	1.354321
Variation (%)	-1.010000

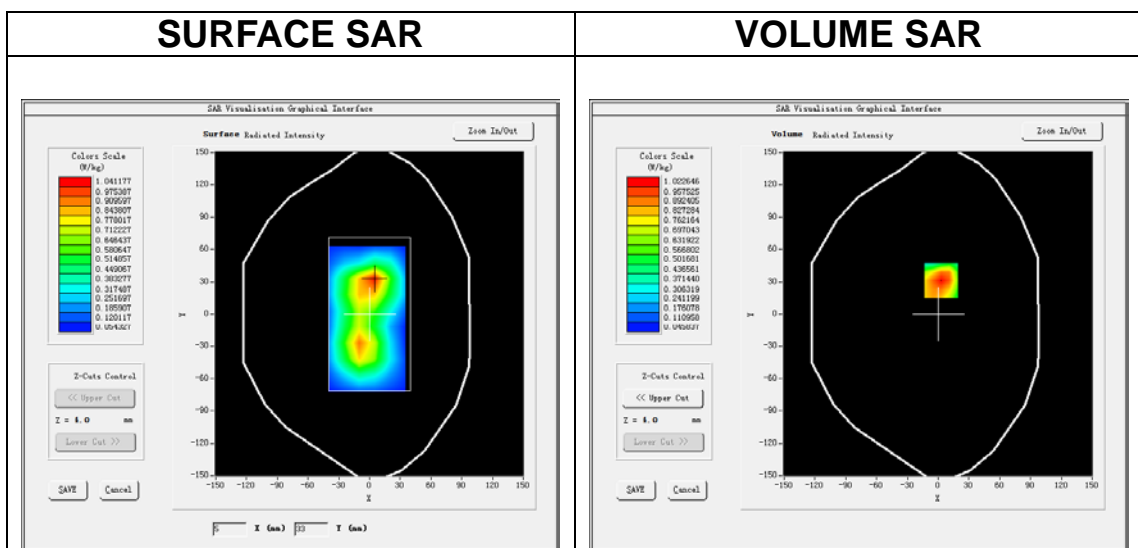

Maximum location: X=3.00, Y=31.00

SAR Peak: 1.56 W/kg

SAR 10g (W/Kg)	0.554494
SAR 1g (W/Kg)	0.973978

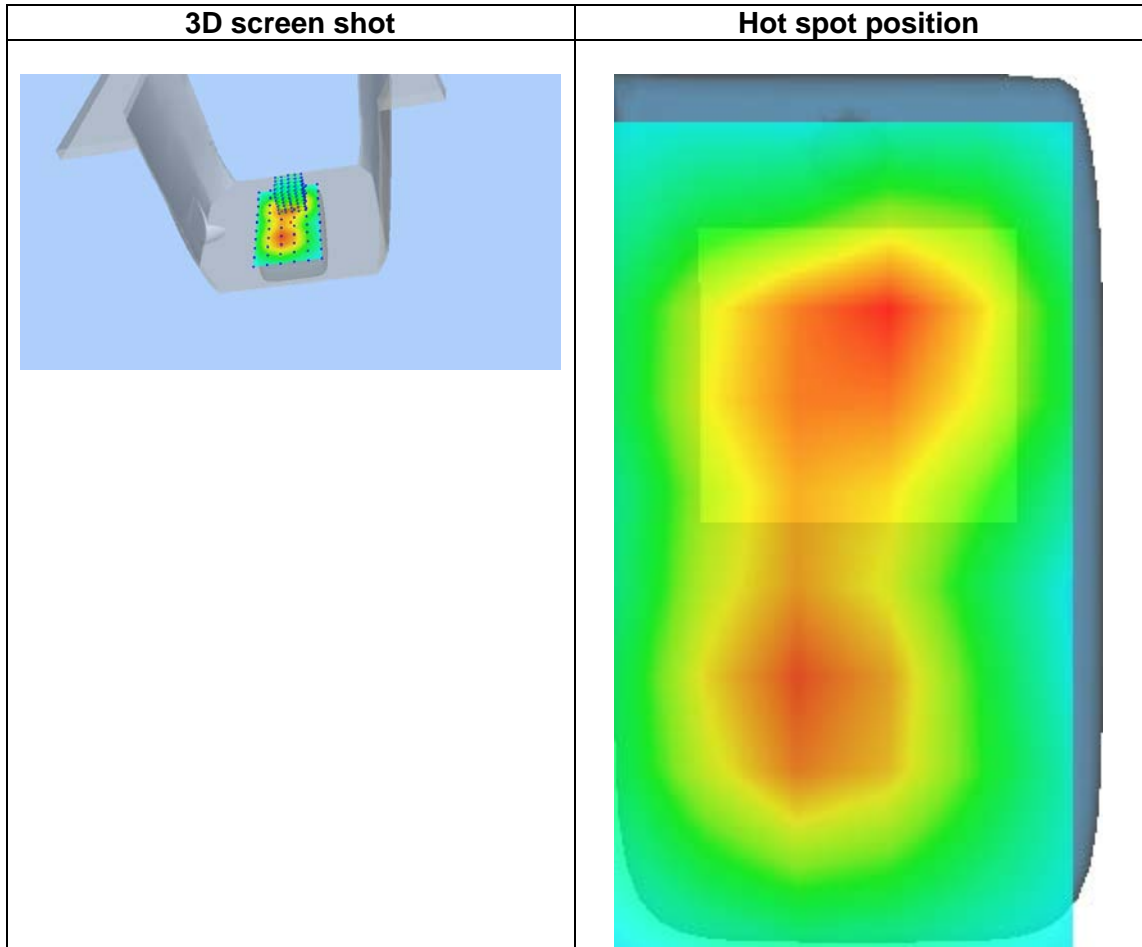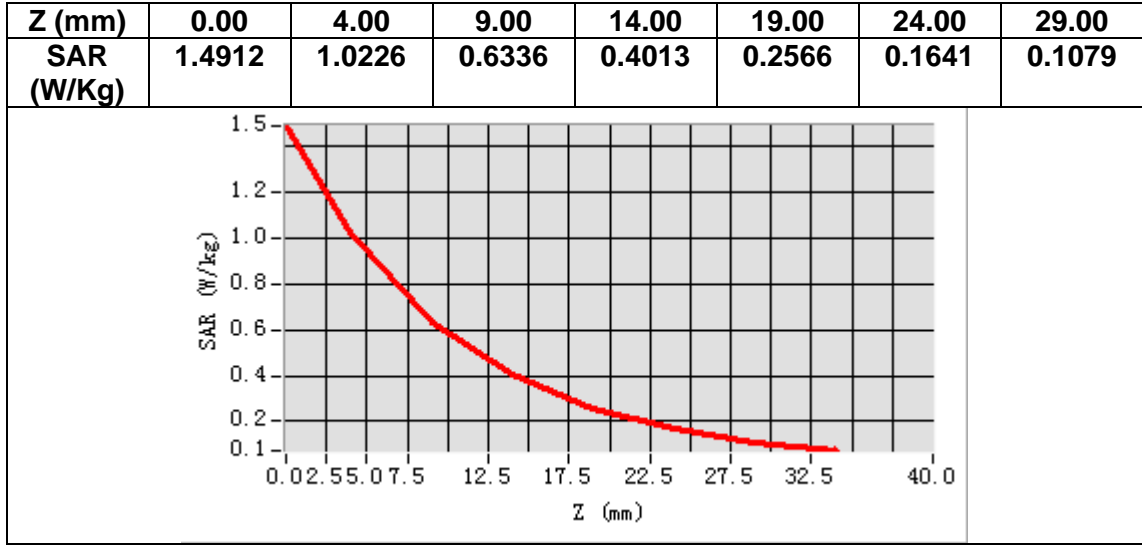

MEASUREMENT 13


Date of measurement: 17/11/2021

A. Experimental conditions.

Area Scan	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
ZoomScan	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
Phantom	<u>Left head</u>
Device Position	<u>Cheek</u>
Band	<u>Bluetooth</u>
Channels	<u>Middle</u>
Signal	<u>(Crest factor: 0.77)</u>

B. SAR Measurement Results

Frequency (MHz)	2441.000000
Relative permittivity (real part)	40.722711
Relative permittivity (imaginary part)	12.986674
Conductivity (S/m)	1.761137
Variation (%)	3.440000

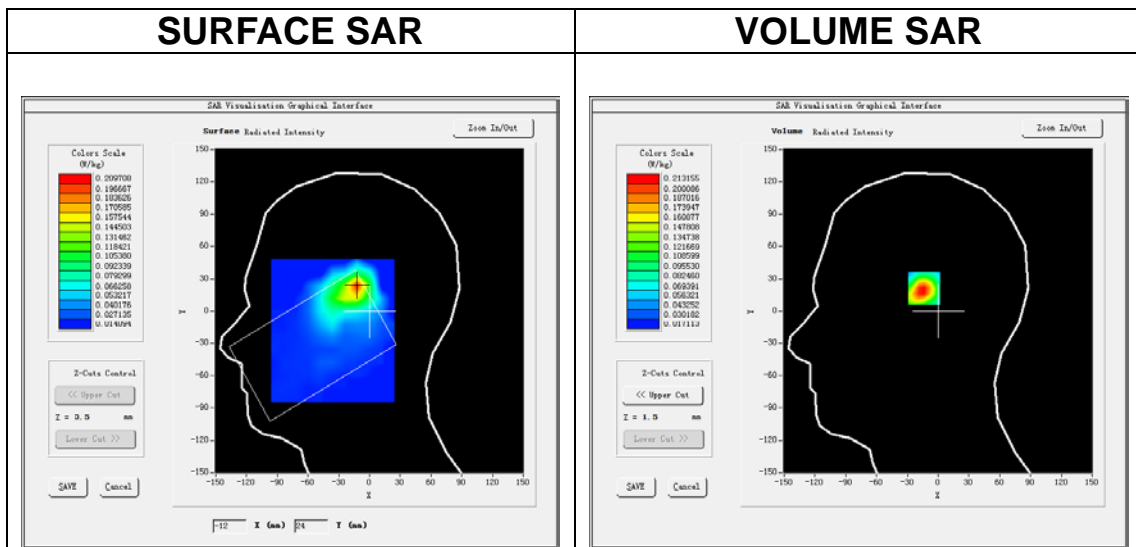




Maximum location: X=-12.00, Y=23.00

SAR Peak: 0.36 W/kg

SAR 10g (W/Kg)	0.103719
SAR 1g (W/Kg)	0.202089

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.3510	0.2132	0.1139	0.0658	0.0440	0.0331	0.0246

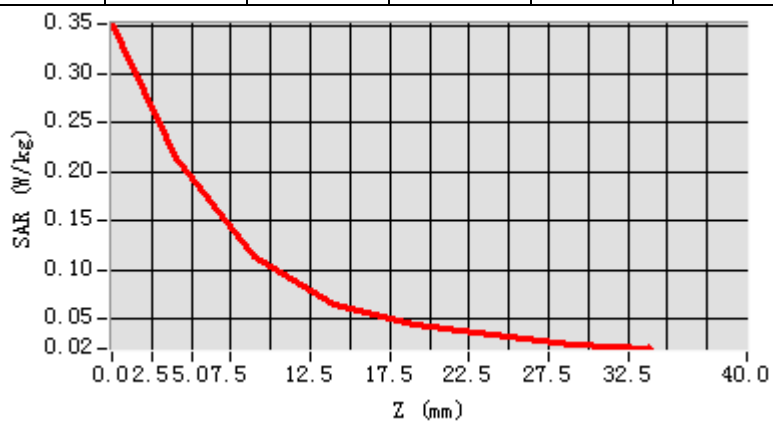

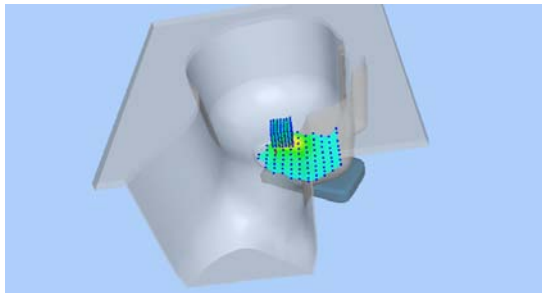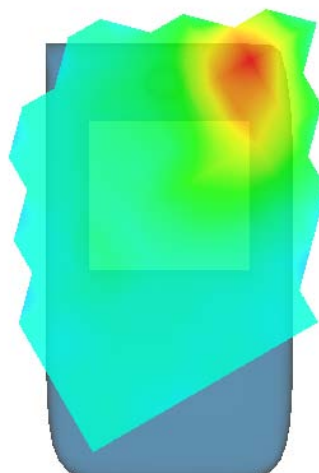3D screen shot	Hot spot position
	

MEASUREMENT 14


Date of measurement: 17/11/2021

A. Experimental conditions.

Area Scan	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
ZoomScan	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body</u>
Band	<u>Bluetooth</u>
Channels	<u>Middle</u>
Signal	<u>(Crest factor: 0.77)</u>

B. SAR Measurement Results



Frequency (MHz)	2441.000000
Relative permittivity (real part)	40.722711
Relative permittivity (imaginary part)	12.986674
Conductivity (S/m)	1.761137
Variation (%)	-2.290000

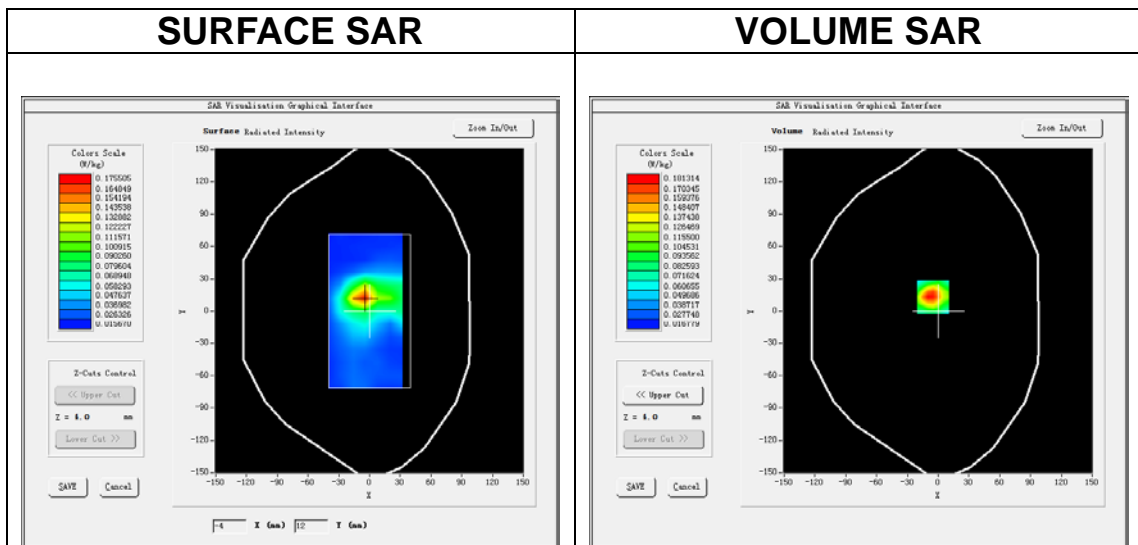

Maximum location: X=-5.00, Y=13.00

SAR Peak: 0.29 W/kg

SAR 10g (W/Kg)	0.088512
SAR 1g (W/Kg)	0.168682

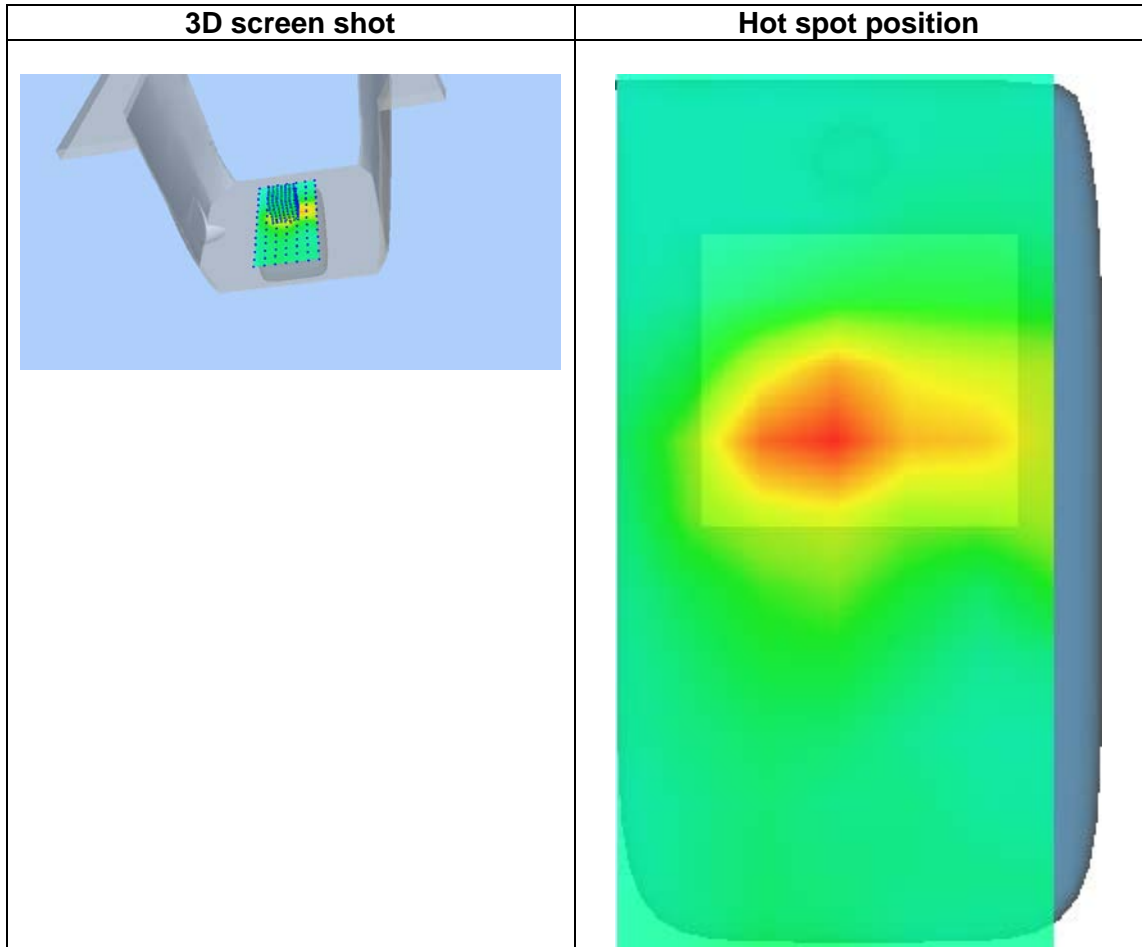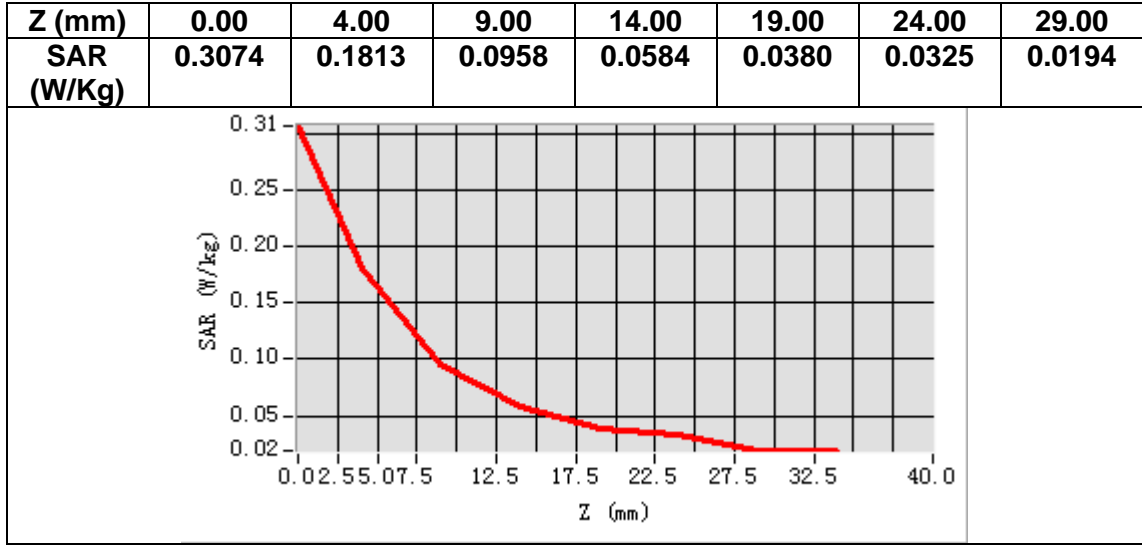

13. Appendix D. Calibration Certificate

Table of contents
E Field Probe - SN 08/16 EPGO287
835 MHz Dipole - SN 03/15 DIP 0G835-347
1800 MHz Dipole - SN 03/15 DIP 1G800-349
1900 MHz Dipole - SN 03/15 DIP 1G900-350
2450 MHz Dipole - SN 03/15 DIP 2G450-352



COMOSAR E-Field Probe Calibration Report

Ref : ACR.60.1.21.MVGB.A

SHENZHEN NTEK TESTING TECHNOLOGY CO., LTD.

BUILDING E, FENDA SCIENCE PARK, SANWEI
COMMUNITY, XIXIANG STREET,
BAO'AN DISTRICT, SHENZHEN GUANGDONG, CHINA
MVG COMOSAR DOSIMETRIC E-FIELD PROBE
SERIAL NO.: SN 08/16 EPGO287

Calibrated at MVG

Z.I. de la pointe du diable

Technopôle Brest Iroise – 295 avenue Alexis de Rochon
29280 PLOUZANE - FRANCE

Calibration date: 03/01/2021



Accreditations #2-6789 and #2-6814
Scope available on www.cofrac.fr

Summary:

This document presents the method and results from an accredited COMOSAR E-Field Probe calibration performed at MVG, using the CALIPROBE test bench, for use with a MVG COMOSAR system only. The test results covered by accreditation are traceable to the International System of Units (SI).



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.60.1.21.MVGB.A

	Name	Function	Date	Signature
Prepared by :	Jérôme Luc	Technical Manager	3/1/2021	<i>JL</i>
Checked by :	Jérôme Luc	Technical Manager	3/1/2021	<i>JL</i>
Approved by :	Yann Toutain	Laboratory Director	3/1/2021	<i>Yann Toutain</i>

Mode d'emploi 2021.03.0
1 13:07:12
+01'00'

PHILIPS

	Customer Name
Distribution :	SHENZHEN NTEK TESTING TECHNOLOGY CO., LTD.

Issue	Name	Date	Modifications
A	Jérôme Luc	3/1/2021	Initial release



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.60.1.21.MVGB.A

TABLE OF CONTENTS

1	Device Under Test	4
2	Product Description	4
2.1	General Information	4
3	Measurement Method	4
3.1	Linearity	4
3.2	Sensitivity	5
3.3	Lower Detection Limit	5
3.4	Isotropy	5
3.1	Boundary Effect	5
4	Measurement Uncertainty	6
5	Calibration Measurement Results	6
5.1	Sensitivity in air	6
5.2	Linearity	7
5.3	Sensitivity in liquid	8
5.4	Isotropy	9
6	List of Equipment	10



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.60.1.21.MVGB.A

1 DEVICE UNDER TEST

Device Under Test	
Device Type	COMOSAR DOSIMETRIC E FIELD PROBE
Manufacturer	MVG
Model	SSE2
Serial Number	SN 08/16 EPGO287
Product Condition (new / used)	Used
Frequency Range of Probe	0.15 GHz-6GHz
Resistance of Three Dipoles at Connector	Dipole 1: R1=0.211 MΩ Dipole 2: R2=0.199 MΩ Dipole 3: R3=0.199 MΩ

2 PRODUCT DESCRIPTION

2.1 GENERAL INFORMATION

MVG’s COMOSAR E field Probes are built in accordance to the IEEE 1528, FCC KDB865664 D01, CENELEC EN62209 and CEI/IEC 62209 standards.



Figure 1 – MVG COMOSAR Dosimetric E field Dipole

Probe Length	330 mm
Length of Individual Dipoles	2 mm
Maximum external diameter	8 mm
Probe Tip External Diameter	2.5 mm
Distance between dipoles / probe extremity	1 mm

3 MEASUREMENT METHOD

The IEEE 1528, FCC KDB865664 D01, CENELEC EN62209 and CEI/IEC 62209 standards provide recommended practices for the probe calibrations, including the performance characteristics of interest and methods by which to assess their affect. All calibrations / measurements performed meet the fore mentioned standards.

3.1 LINEARITY

The evaluation of the linearity was done in free space using the waveguide, performing a power sweep to cover the SAR range 0.01W/kg to 100W/kg.



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.60.1.21.MVGB.A

3.2 SENSITIVITY

The sensitivity factors of the three dipoles were determined using a two step calibration method (air and tissue simulating liquid) using waveguides as outlined in the standards.

3.3 LOWER DETECTION LIMIT

The lower detection limit was assessed using the same measurement set up as used for the linearity measurement. The required lower detection limit is 10 mW/kg.

3.4 ISOTROPY

The axial isotropy was evaluated by exposing the probe to a reference wave from a standard dipole with the dipole mounted under the flat phantom in the test configuration suggested for system validations and checks. The probe was rotated along its main axis from 0 to 360 degrees in 15-degree steps. The hemispherical isotropy is determined by inserting the probe in a thin plastic box filled with tissue-equivalent liquid, with the plastic box illuminated with the fields from a half wave dipole. The dipole is rotated about its axis (0°–180°) in 15° increments. At each step the probe is rotated about its axis (0°–360°).

3.1 BOUNDARY EFFECT

The boundary effect is defined as the deviation between the SAR measured data and the expected exponential decay in the liquid when the probe is oriented normal to the interface. To evaluate this effect, the liquid filled flat phantom is exposed to fields from either a reference dipole or waveguide. With the probe normal to the phantom surface, the peak spatial average SAR is measured and compared to the analytical value at the surface.

The boundary effect uncertainty can be estimated according to the following uncertainty approximation formula based on linear and exponential extrapolations between the surface and $d_{be} + d_{step}$ along lines that are approximately normal to the surface:

$$SAR_{uncertainty} [\%] = \delta SAR_{be} \frac{(d_{be} + d_{step})^2}{2d_{step}} \frac{(e^{-d_{be}/\delta})}{\delta/2} \text{ for } (d_{be} + d_{step}) < 10 \text{ mm}$$

where

- SAR_{uncertainty} is the uncertainty in percent of the probe boundary effect
- d_{be} is the distance between the surface and the closest *zoom-scan* measurement point, in millimetre
- Δ_{step} is the separation distance between the first and second measurement points that are closest to the phantom surface, in millimetre, assuming the boundary effect at the second location is negligible
- δ is the minimum penetration depth in millimetres of the head tissue-equivalent liquids defined in this standard, i.e., $\delta \approx 14$ mm at 3 GHz;
- ΔSAR_{be} in percent of SAR is the deviation between the measured SAR value, at the distance d_{be} from the boundary, and the analytical SAR value.



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.60.1.21.MVGB.A

The measured worst case boundary effect SAR uncertainty [%] for scanning distances larger than 4mm is 1.0% Limit (2%).

4 MEASUREMENT UNCERTAINTY

The guidelines outlined in the IEEE 1528, OET 65 Bulletin C, CENELEC EN50361 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty associated with an E-field probe calibration using the waveguide technique. All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

Uncertainty analysis of the probe calibration in waveguide					
ERROR SOURCES	Uncertainty value (%)	Probability Distribution	Divisor	ci	Standard Uncertainty (%)
Expanded uncertainty 95 % confidence level k = 2					14 %

5 CALIBRATION MEASUREMENT RESULTS

Calibration Parameters	
Liquid Temperature	20 +/- 1 °C
Lab Temperature	20 +/- 1 °C
Lab Humidity	30-70 %

5.1 SENSITIVITY IN AIR

Normx dipole 1 (µV/(V/m) ²)	Normy dipole 2 (µV/(V/m) ²)	Normz dipole 3 (µV/(V/m) ²)
0.72	0.66	0.77

DCP dipole 1 (mV)	DCP dipole 2 (mV)	DCP dipole 3 (mV)
107	110	110

Calibration curves $e_i=f(V)$ (i=1,2,3) allow to obtain E-field value using the formula:


$$E = \sqrt{E_1^2 + E_2^2 + E_3^2}$$



COMOSAR E-FIELD PROBE CALIBRATION REPORT


Ref: ACR.60.1.21.MVGB.A

Calibration curves

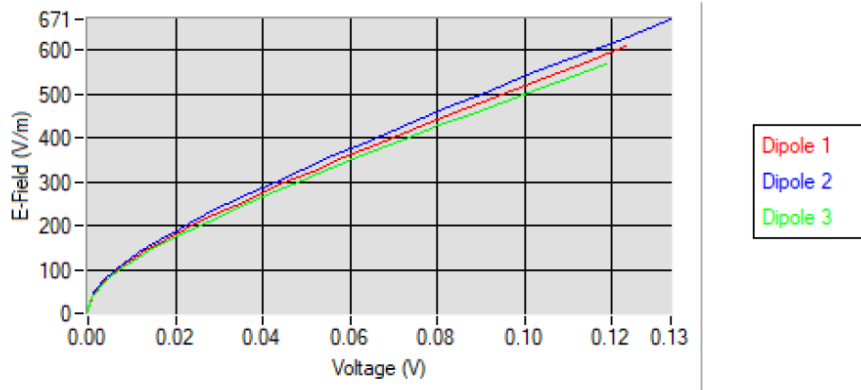

5.2 LINEARITY

Linearity

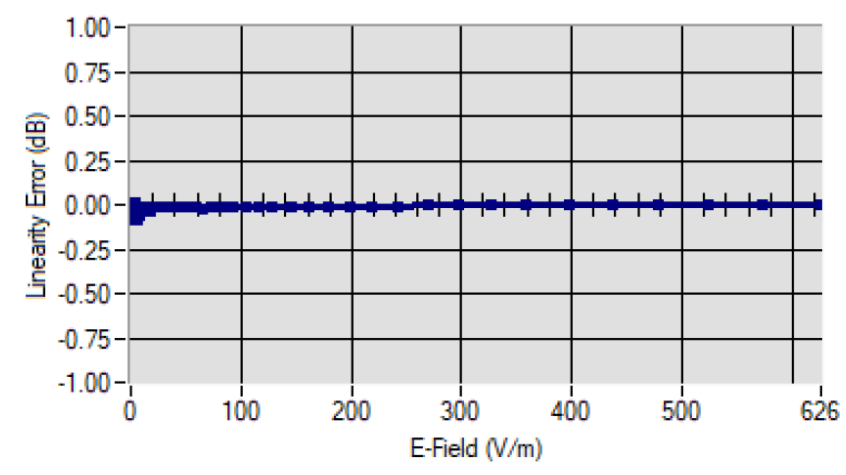

Linearity: +/-1.90% (+/-0.08dB)



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.60.1.21.MVGB.A

5.3 SENSITIVITY IN LIQUID

Liquid	Frequency (MHz +/- 100MHz)	ConvF
HL750	750	1.49
HL850	835	1.50
HL900	900	1.61
HL1800	1800	1.73
HL1900	1900	1.91
HL2000	2000	1.97
HL2300	2300	1.92
HL2450	2450	1.98
HL2600	2600	1.87
HL3300	3300	1.79
HL3500	3500	1.85
HL3700	3700	1.79
HL3900	3900	2.07
HL4200	4200	2.21
HL4600	4600	2.25
HL4900	4900	2.05
HL5200	5200	1.80
HL5400	5400	2.05
HL5600	5600	2.16
HL5800	5800	2.07

LOWER DETECTION LIMIT: 8mW/kg