



# TEST REPORT

|  |  |   |
|--|--|---|
| <p><b>KCTL Inc.</b><br/>                 65, Sinwon-ro, Yeongtong-gu,<br/>                 Suwon-si, Gyeonggi-do, 16677, Korea<br/>                 TEL: 82-31-285-0894 FAX: 82-505-299-8311<br/> <a href="http://www.kctl.co.kr">www.kctl.co.kr</a></p> | <p>Report No.:<br/>                 KR18-SRF0086<br/>                 Page (1) of (20)</p> |  |
|--|--|---|

**1. Client**

- Name : SMARTeLock CO., LTD.
- Address : B-402, Geumgang Penterium IT Tower, 215, Galmachi-ro, Jungwon-gu, Seongnam-si, Gyeonggi-do, 13217, Rep. of KOREA
- Date of Receipt : 2018-06-01

**2. Use of Report** : -

**3. Name of Product and Model** : IN-Furniture Safe / ES100

**4. Manufacturer and Country of Origin** : SMARTeLock CO., LTD. / Korea

**5. FCC ID** : 2AQAVES100

**6. Date of Test** : 2018-06-21 to 2018-06-22

**7. Test Standards** : FCC Part 15 Subpart C 15.225

**8. Test Results** : Refer to the test result in the test report

|             |                                |                                |
|-------------|--------------------------------|--------------------------------|
| Affirmation | Tested by                      | Technical Manager              |
|             | Name : Seonjun Yun (Signature) | Name : Jongha Choi (Signature) |

2018-06-26

**KCTL Inc.**

As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by KCTL Inc.

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0086

Page (2) of (20)

**REPORT REVISION HISTORY**

| Date       | Revision          | Page No |
|------------|-------------------|---------|
| 2018-06-26 | Originally issued | -       |
|            |                   |         |
|            |                   |         |
|            |                   |         |
|            |                   |         |
|            |                   |         |
|            |                   |         |
|            |                   |         |
|            |                   |         |
|            |                   |         |

*This report shall not be reproduced except in full, without the written approval of KCTL Inc. This document may be altered or revised by KCTL Inc. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KCTL Inc. will constitute fraud and shall nullify the document.*



**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0086  
Page (3) of (20)



**[ Contents ]**

**1. Client information ..... 4**

**2. Laboratory information ..... 5**

**3. Description of E.U.T..... 6**

    3.1 Basic description ..... 6

    3.2 General description ..... 6

    3.3 Test frequency ..... 6

**4. Summary of test results ..... 7**

    4.1 Standards & results ..... 7

    4.2 Measurement Uncertainty ..... 7

**5. Test results ..... 8**

    5.1 Antenna Requirement ..... 8

    5.2 In-band Fundamental Emission ..... 9

    5.3 In-band Spurious Emission ..... 11

    5.4 Out-of-band Spurious Emission ..... 12

    5.5 Frequency tolerance ..... 14

    5.6 Conducted Emission ..... 15

    5.7 Occupied Bandwidth ..... 17

**6. Test equipment used for test..... 20**

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0086


Page (4) of (20)



## 1. Client information

**Applicant:** SMARTeLock CO., LTD.  
**Address:** B-402, Geumgang Penterium IT Tower, 215, Galmachi-ro,  
Jungwon-gu, Seongnam-si, Gyeonggi-do, 13217 Rep. of  
KOREA  
**Telephone number:** +82 31 743 7277  
**Facsimile number:** +82 31 743 7276  
**Contact person:** Jaemin Lee / jmlee@esmartlock.com

**Manufacturer:** SMARTeLock CO., LTD.  
**Address:** B-402, Geumgang Penterium IT Tower, 215, Galmachi-ro,  
Jungwon-gu, Seongnam-si, Gyeonggi-do, 13217 Rep. of  
KOREA

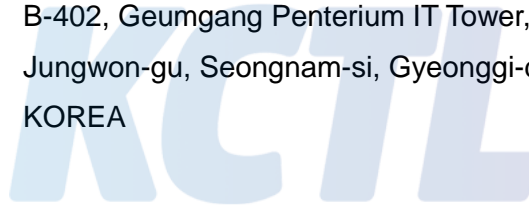

## KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0086

Page (5) of (20)

# KCTL

## 2. Laboratory information

### Address

#### **KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea

Telephone Number: 82 31 285 0894

Facsimile Number: 82 505 299 8311


FCC Site Designation No: KR0040, FCC Site Registration No: 687132

VCCI Registration No. : R-3327, G-198, C-3706, T-1849

Industry Canada Registration No. : 8035A-2

KOLAS NO.: KT231

### SITE MAP

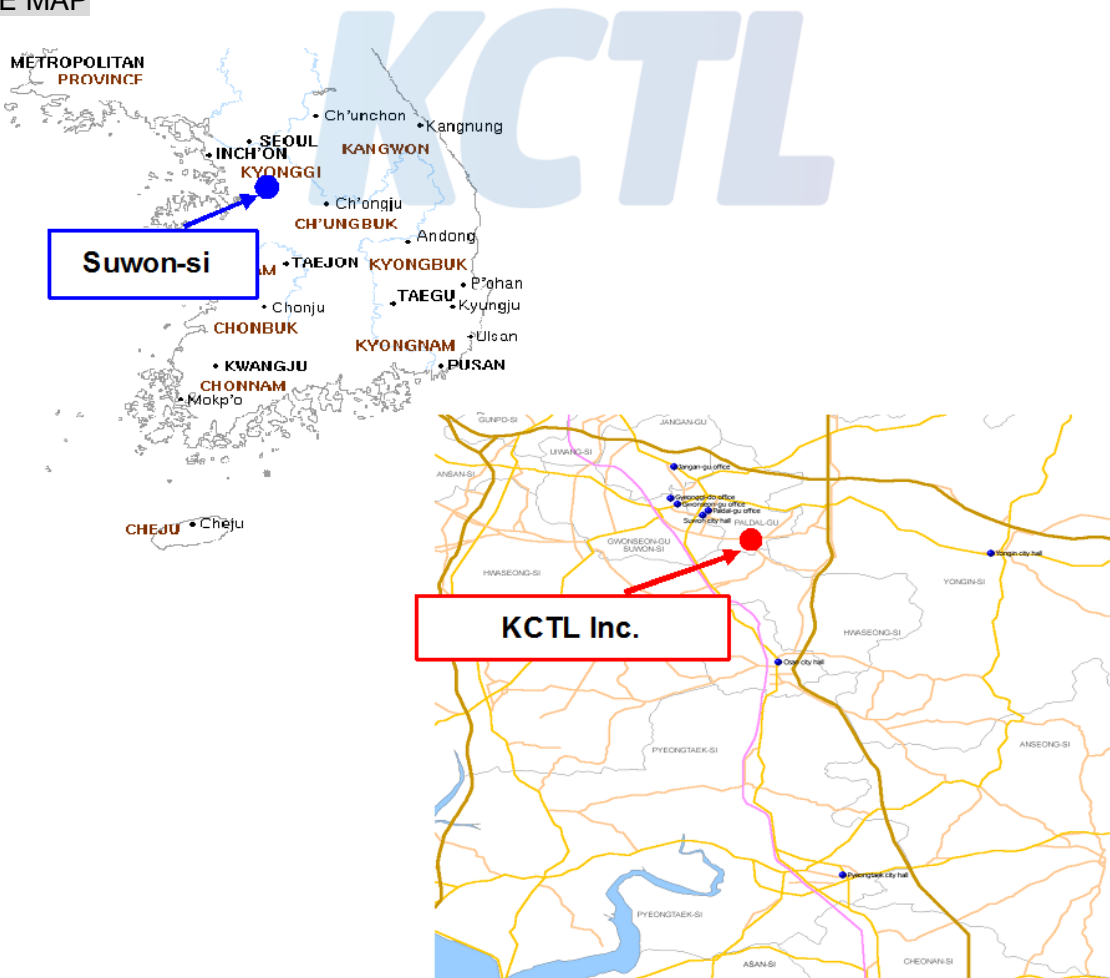

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0086

Page (6) of (20)



### 3. Description of E.U.T.

#### 3.1 Basic description

|                         |   |
|-------------------------|---|
| Applicant               | SMARTeLock CO., LTD.  |
| Address of Applicant    | B-402, Geumgang Penterium IT Tower, 215, Galmachi-ro, Jungwon-gu, Seongnam-si, Gyeonggi-do, 13217 Rep. of KOREA |
| Manufacturer            | SMARTeLock CO., LTD.  |
| Address of Manufacturer | B-402, Geumgang Penterium IT Tower, 215, Galmachi-ro, Jungwon-gu, Seongnam-si, Gyeonggi-do, 13217 Rep. of KOREA |
| Type of equipment       | IN-Furniture Safe   |
| Basic Model             | ES100   |
| Serial number           | N/A   |

#### 3.2 General description

|                             |   |
|-----------------------------|---|
| Frequency Range             | 2 402 MHz ~ 2 480 MHz (Bluetooth Low Energy), 13.56 MHz (NFC) |
| Type of Modulation          | GFSK MHz (Bluetooth Low Energy), ASK (NFC)                    |
| The number of channels      | 40 ch (Bluetooth Low Energy), 1 ch (NFC)                      |
| Type of Antenna             | Chip Antenna (Bluetooth Low Energy), Loop Antenna (NFC)       |
| Power supply                | DC 6 V  |
| Product SW/HW version       | nRF51_ES100_HW11_V1.0.0 / V1.1                                |
| Radio SW/HW version         | nRF51_ES100_HW11_V1.0.0 / V1.1                                |
| Test SW Version             | Toggle button ON/OFF  |
| RF power setting in TEST SW | default   |

Note : The above EUT information was declared by the manufacturer.

#### 3.3 Test frequency

|           |           |
|-----------|-----------|
| Frequency | 13.56 MHz |
|-----------|-----------|

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0086

Page (7) of (20)



## 4. Summary of test results

### 4.1 Standards & results

| Rule Reference  | Parameter                     | Status                     |
|---|-------------------------------|----------------------------|
| 15.203  | Antenna Requirement           | C                          |
| 15.225 (a)  | In-band Fundamental Emission  | C                          |
| 15.225 (b)  | In-band Spurious Emission     | C                          |
| 15.225 (c)  | In-band Spurious Emission     | C                          |
| 15.225 (d)<br>15.209  | Out-of-band Spurious Emission | C                          |
| 15.225 (e)  | Frequency Stability Tolerance | C                          |
| 15.207  | Conducted Emissions           | NA<br>(Note <sub>2</sub> ) |
| Note <sub>1</sub> ): C = Complies, NC = Not Complies, NT = Not Tested, NA = Not Applicable<br>Note <sub>2</sub> ): Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power line or contain provisions for operation while connected to the AC power lines. |                               |                            |

### 4.2 Measurement Uncertainty

| Measurement Item     | Expanded Uncertainty<br>$U = kU_c (k = 2)$ |                    |
|----------------------|--|--------------------|
|                      | Radiated Spurious Emissions                | 30 MHz ~ 300 MHz:  |
| +4.93 dB, -5.05 dB   |  |                    |
| 300 MHz ~ 1 000 MHz: |  | +4.97 dB, -5.08 dB |
|                      |  | +4.84 dB, -4.96 dB |
| Conducted Emissions  | 9 kHz ~ 150 kHz:                           | 3.75 dB            |
|                      | 150 kHz ~ 30 MHz:                          | 3.36 dB            |

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0086

Page (8) of (20)

**KCTL**

## 5. Test results

### 5.1 Antenna Requirement

#### 5.1.1 Regulation

According to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

#### 5.1.2 Result

-Complied

The Loop antenna is permanantly attached on board.

**KCTL**



**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0086

Page (9) of (20)



## 5.2 In-band Fundamental Emission

### 5.2.1 Regulation

15.225 (a) The field strength of any emission within the band 13.553-13.567 MHz shall not exceed 15, 848 microvolts/meter at 30 meters.

### 5.2.2 Measurement Procedure

Test Procedure The Radiated Electric Field Strength intensity has been measured on semi anechoic chamber with a ground plane and at a distance of 3m.

Frequency : From 9 kHz to 30 MHz at distance 3m The EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

Frequency : From 30 MHz to 1 GHz at distance 3m The measuring antenna height varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for both vertical and horizontal antenna polarization.

Measurements were performed with a QP, PK, and AV detector. The radiated emission measurements were made with the following detector function of the test receiver (below 1 GHz).

| Frequency     | 9 - 90 kHz | 90 - 110 kHz | 110 - 490 kHz | 490 kHz - 30 MHz | 30 MHz - 1 GHz |
|---------------|------------|--------------|---------------|------------------|----------------|
| Detector type | PK/AV      | QP           | PK/AV         | QP               | QP             |
| IF bandwidth  | 200 Hz     | 200 Hz       | 9 kHz         | 9 kHz            | 120 kHz        |

- Part 15 Section 15.31 (f)(2) (9 kHz - 30 MHz)

[Limit at 3m]=[Limit at 300m]-40 x log(3[m]/300[m])

[Limit at 3m]=[Limit at 30m]-40 x log (3[m]/30[m])

Note : Axis among X, Y and Z plans (Please refer to the "Test setup photos" to check X, Y, Z configuration).

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0086

Page (10) of (20)



### 5.2.3 Test Result

- Complied

| Voltage [V]     | Frequency [MHz] | Reading [dB $\mu$ V] | Cable Loss [dB] | Amp Gain [dB] | Antenna Factor [dB] | Factor [dB] | Result [dB $\mu$ V/m at 3 m] | Limit [dB $\mu$ V/m at 3 m] | Margin [dB] |
|-----------------|-----------------|----------------------|-----------------|---------------|---------------------|-------------|------------------------------|-----------------------------|-------------|
| <b>QP DATA.</b> |                 |                      |                 |               |                     |             |                              |                             |             |
| 6.0             | 13.56           | 48.50                | 1.43            | -32.67        | 18.64               | -12.60      | 35.90                        | 124.00                      | 88.10       |

**[Result = Reading + Amp Gain + AF + CL]**

1. H = Horizontal, V = Vertical Polarization
2. AF/CL = Antenna Factor and Cable Loss
3. Factor = CL+AF+AG



**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0086

Page (11) of (20)



## 5.3 In-band Spurious Emission

### 5.3.1 Regulation

15.225 (b) With in the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

15.225 (c) With in the bands 13.110-13.410 MHz and 13.710-14.010 MHz, the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

### 5.3.2 Test Result

- Complied

Measurement Distance: 3 m

| Frequency [MHz]   | Receiver Bandwidth [kHz] | Reading [dB( $\mu$ V)] | Pol. [V/H] | Cable Loss [dB] | Amp Gain [dB] | Antenna Factor [dB] | Factor [dB] | Result [dB( $\mu$ V/m)] | Limit [dB( $\mu$ V/m)] | Margin [dB] |
|-------------------|--------------------------|------------------------|------------|-----------------|---------------|---------------------|-------------|-------------------------|------------------------|-------------|
| <b>PEAK DATA.</b> |                          |                        |            |                 |               |                     |             |                         |                        |             |
| 13.13             | 9                        | 41.00                  | V          | 1.43            | -32.67        | 18.64               | -12.60      | 28.40                   | 80.50                  | 52.10       |
| 13.43             | 9                        | 40.50                  | V          | 1.43            | -32.67        | 18.64               | -12.60      | 27.90                   | 90.47                  | 62.57       |
| 13.57             | 9                        | 44.20                  | H          | 1.43            | -32.67        | 18.64               | -12.60      | 31.60                   | 90.47                  | 58.87       |
| 13.83             | 9                        | 40.80                  | H          | 1.43            | -32.67        | 18.64               | -12.60      | 28.20                   | 80.50                  | 52.30       |

Note : This test was performed by using peak

**[Result = Reading + Amp Gain + AF + CL]**

1. H = Horizontal, V = Vertical Polarization
2. AF/CL = Antenna Factor and Cable Loss
3. Factor = CL+AF+AG
4. The distance factor was calculated and included in limit.

## 5.4 Out-of-band Spurious Emission

### 5.4.1 Regulation

15.225 (d) The Field Strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in 15.209

| Frequency (MHz) | Field Strength ( $\mu\text{V/m}$ ) | Measurement distance (meters) |
|-----------------|------------------------------------|-------------------------------|
| 0.009-0.490     | 2400/F(kHz)                        | 300                           |
| 0.490-1.705     | 24000/F(kHz)                       | 30                            |
| 1.705-30.0      | 30(29.54 dB $\mu\text{V/m}$ )      | 30                            |
| 30.0-88.0       | 100(40 dB $\mu\text{V/m}$ )        | 3                             |
| 88-216          | 150(43.5 dB $\mu\text{V/m}$ )      | 3                             |
| 216-960         | 200 (46 dB $\mu\text{V/m}$ )       | 3                             |
| Above 960       | 500 (53.98 dB $\mu\text{V/m}$ )    | 3                             |

### 5.4.2 Measurement Procedure

The spurious emissions from the EUT will be measured on an 10 m Anechoic chamber in the frequency range of 9 kHz to 30 MHz using a tuned receiver and a shielded loop antenna.

The antenna was positioned 3, 10 or 30 meters horizontally from the EUT.

Measurements have been made in all three orthogonal axes and the shielded loop antenna was rotated to locate the maximum of the emissions.

In the case where larger measuring distances are required the results will be extrapolated based on the values measured on the closer distances according to Section 15.31 (f) (2) [2].

The final measurement will be performed with an EMI Receiver set to Quasi Peak detector except for the frequency bands 9 kHz to 90 kHz and 110 to 490 kHz where an average detector will be used according to Section 15.209 (d) [2].

The final level, expressed in dB $\mu\text{V/m}$ , is arrived at by taking the reading from the EMI receiver (Level dB $\mu\text{V}$ ) and adding the antenna correction factor and cable loss factor (Factor dB) to it. This result then has to be compared with the relevant FCC limit. The resolution bandwidth during the measurement is as follows:

9 kHz – 150 kHz: ResBW: 200 Hz

150 kHz – 30 MHz: ResBW: 9 kHz

The preliminary radiated measurements were performed to determine the frequency producing the maximum emissions in an anechoic chamber at a distance of 3 meters.

The EUT was placed on the top of the 0.8 meter height, 1 x 1.5 meter non-metallic table. To find the maximum emission levels, the height of a measuring antenna was changed and the turntable was rotated 360°.

The antenna polarization was also changed from vertical to horizontal. The spectrum was scanned from 30 to 1 000 MHz using the BILOG antenna. To obtain the final measurement data, the EUT was arranged on a turntable situated on a 10 m chamber. The EUT was tested at a distance 3 meters.

Each frequency found during preliminary measurements was re-examined and investigated. The test-receiver system was set up to average, peak, and quasi-peak detector function with specified bandwidth.

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0086

Page (13) of (20)



### 5.4.3 Test Result

- Complied

Measurement Distance: 3 m

-Below 30 MHz

| Frequency [MHz]   | Receiver Bandwidth [kHz] | Reading [dB( $\mu$ V)] | Pol. [V/H] | Cable Loss [dB] | Amp Gain [dB] | Antenna Factor [dB] | Factor [dB] | Result [dB( $\mu$ V/m)] | Limit [dB( $\mu$ V/m)] | Margin [dB] |
|-------------------|--------------------------|------------------------|------------|-----------------|---------------|---------------------|-------------|-------------------------|------------------------|-------------|
| <b>PEAK DATA.</b> |                          |                        |            |                 |               |                     |             |                         |                        |             |
| 0.18              | 9                        | 46.00                  | V          | 0.48            | -32.75        | 19.87               | -12.40      | 33.60                   | 102.50                 | 68.90       |
| 22.09             | 9                        | 43.10                  | V          | 1.87            | -32.68        | 18.21               | -12.60      | 30.50                   | 69.54                  | 39.04       |

Note : The distance factor was calculated and included in limit.

-Above 30 MHz

| Frequency [MHz]         | Receiver Bandwidth [kHz] | Reading [dB( $\mu$ V)] | Pol. [V/H] | Cable Loss [dB] | Amp Gain [dB] | Antenna Factor [dB] | Factor [dB] | Result [dB( $\mu$ V/m)] | Limit [dB( $\mu$ V/m)] | Margin [dB] |
|-------------------------|--------------------------|------------------------|------------|-----------------|---------------|---------------------|-------------|-------------------------|------------------------|-------------|
| <b>QUASI PEAK DATA.</b> |                          |                        |            |                 |               |                     |             |                         |                        |             |
| 35.21                   | 120                      | 35.80                  | H          | 1.18            | -29.60        | 12.52               | -15.90      | 19.90                   | 40.00                  | 20.10       |
| 189.81                  | 120                      | 36.00                  | H          | 3.03            | -29.60        | 10.77               | -15.80      | 20.20                   | 43.50                  | 23.30       |
| 216.97                  | 120                      | 36.70                  | H          | 3.25            | -29.59        | 10.54               | -15.80      | 20.90                   | 46.00                  | 25.10       |
| 244.13                  | 120                      | 37.50                  | H          | 3.46            | -29.54        | 11.58               | -14.50      | 23.00                   | 46.00                  | 23.00       |
| 271.17                  | 120                      | 38.80                  | H          | 3.67            | -29.19        | 12.52               | -13.00      | 25.80                   | 46.00                  | 20.20       |
| 705.24                  | 120                      | 29.10                  | V          | 6.22            | -28.70        | 21.18               | -1.30       | 27.80                   | 46.00                  | 18.20       |

Note : This test was performed by using peak detector mode. If peak result meets the limit, QP measurement is skipped.

**[Result = Reading + Amp Gain + AF + CL]**

1. H = Horizontal, V = Vertical Polarization
2. AF/CL = Antenna Factor and Cable Loss
3. Factor = CL+AF+AG

## 5.5 Frequency tolerance

### 5.5.1 Regulation

15.225 (e) The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01$  % of the operating frequency over a temperature variation of  $-20$  degrees to  $+50$  degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85 % to 115 % of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

### 5.5.2 Test Result

- Complied

| VOLTAGE [%] | POWER [V] | TEMP [°C] | FREQ [Hz]  | FREQ.DEV [Hz] | Deviation [%] |
|-------------|-----------|-----------|------------|---------------|---------------|
| 100         | 6.0       | -20       | 13 561 343 | 1 343.00      | 0.009 90      |
|             |           | -10       | 13 561 313 | 1 313.00      | 0.009 68      |
|             |           | 0         | 13 561 349 | 1 348.70      | 0.009 95      |
|             |           | 10        | 13 561 337 | 1 337.00      | 0.009 86      |
|             |           | 20        | 13 561 334 | 1 333.70      | 0.009 83      |
|             |           | 25        | 13 561 355 | 1 355.00      | 0.009 99      |
|             |           | 30        | 13 561 351 | 1 351.00      | 0.009 96      |
|             |           | 40        | 13 561 340 | 1 340.00      | 0.009 88      |
|             |           | 50        | 13 561 349 | 1 349.00      | 0.009 95      |
| 85          | 5.1       | 20        | 13 561 307 | 1 307.00      | 0.009 64      |
| 115         | 6.9       | 20        | 13 561 349 | 1 348.70      | 0.009 95      |

## 5.6 Conducted Emission

### 5.6.1 Regulation

According to §15.207(a), for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 µH/50 Ω line impedance stabilization network (LISN).

Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

| Frequency of emission (MHz) | Conducted limit (dBµV) |            |
|-----------------------------|------------------------|------------|
|                             | Quasi-peak             | Average    |
| 0.15 – 0.5                  | 66 to 56 *             | 56 to 46 * |
| 0.5 – 5                     | 56                     | 46         |
| 5 – 30                      | 60                     | 50         |

\* Decreases with the logarithm of the frequency.

According to §15.107(a), for unintentional device, except for Class A digital devices, line conducted emission limits are the same as the above table.

### 5.6.2 Measurement Procedure

- 1) The EUT was placed on a wooden table of size, 1 m by 1.5 m, raised 80 cm in which is located 40 cm away from the vertical wall and 1.5m away from the side wall of the shielded room.
- 2) Each current-carrying conductor of the EUT power cord was individually connected through a 50Ω/50µH LISN, which is an input transducer to a Spectrum Analyzer or an EMI/Field Intensity Meter, to the input power source.
- 3) Exploratory measurements were made to identify the frequency of the emission that had the highest amplitude relative to the limit by operating the EUT in a range of typical modes of operation, cable position, and with a typical system equipment configuration and arrangement. Based on the exploratory tests of the EUT, the one EUT cable configuration and arrangement and mode of operation that had produced the emission with the highest amplitude relative to the limit was selected for the final measurement.
- 4) The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment is the system) was then performed over the frequency range of 0.15 MHz to 30 MHz.
- 5) The measurements were made with the detector set to PEAK amplitude within a bandwidth of 10 kHz or to QUASI-PEAK and AVERAGE within a bandwidth of 9 kHz. The EUT was in transmitting mode during the measurements.

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0086

Page (16) of (20)

**KCTL**

### 5.6.3 Test Result

**Result: NA : Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.**

**KCTL**



## 5.7 Occupied Bandwidth

### 5.7.1 Regulation

The emission bandwidth (x dB) is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated x dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth.

When the occupied bandwidth limit is not stated in the applicable RSS or reference measurement method, the transmitted signal bandwidth shall be reported as the 99% emission bandwidth, as calculated or measured.

### 5.7.2 Measurement procedure

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately 3x RBW.

A peak, or peak hold, may be used in place of the sampling detector as this may produce a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold may be necessary to determine the occupied bandwidth if the device is not transmitting continuously.

The trace data points are recovered and are directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded.

The difference between the two recorded frequencies is the 99% occupied bandwidth.

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0086

Page (18) of (20)



### 5.7.3 Test Result

- Complied

| Voltage [V] | Frequency [MHz] | Occupied Bandwidth<br>(99 % BW) [kHz] |
|-------------|-----------------|---------------------------------------|
| DC 6        | 13.56           | 0.21                                  |


NOTE: We took the insertion loss of the cable loss into consideration within the measuring instrument.



### 5.7.4 Test Plot

Figure 2. Plot of the Occupied Bandwidth (Conducted)

#### - Occupied Bandwidth

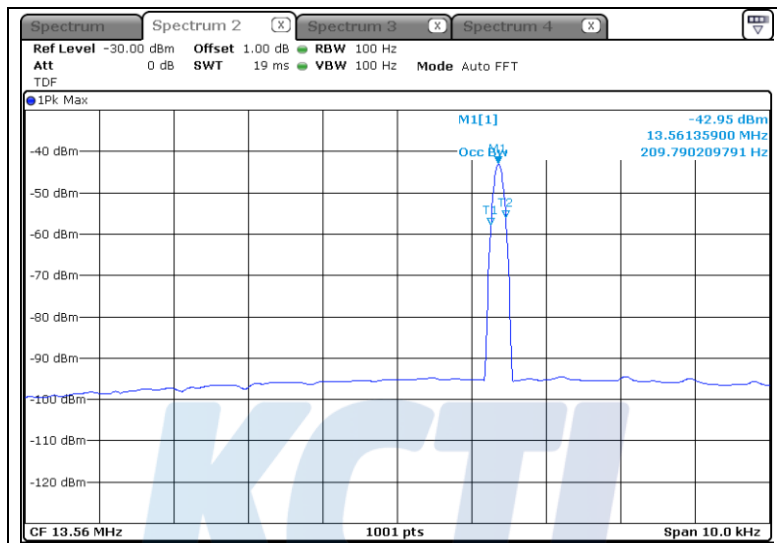

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0086

Page (20) of (20)



## 6. Test equipment used for test

|   | Equipment Name          | Manufacturer    | Model No.    | Serial No. | Next Cal. Date |
|---|-------------------------|-----------------|--------------|------------|----------------|
| ■ | SPECTRUM ANALYZER       | R&S             | FSV40        | 100988     | 19.01.05       |
| ■ | DC Power Supply         | AGILENT         | E3632A       | KR75304571 | 19.05.14       |
| ■ | Temp & Humid Chamber    | Myeongseong R&P | CTHC-50P-DT  | 20150824-1 | 18.08.01       |
| ■ | Signal Generator        | R & S           | SMR40        | 100007     | 19.05.15       |
| ■ | Vector Signal Generator | R&S             | SMBV100A     | 257566     | 19.01.05       |
| ■ | Loop Antenna            | R&S             | HFH2-Z2      | 892665/035 | 19.01.25       |
| ■ | Bilog Antenna           | SCHWARZBECK     | VULB9163     | 440        | 19.10.23       |
| ■ | Attenuator              | HP              | 8491A        | MY52461848 | 19.10.23       |
| ■ | Amplifier               | SONOMA          | 310N         | 284608     | 18.08.24       |
| ■ | EMI Test Receiver       | R&S             | ESCI7        | 100732     | 18.08.24       |
| ■ | Turn Table              | Innco Systems   | DT2000       | 79         | -              |
| ■ | Antenna Mast            | Innco Systems   | MA4640-XP-ET | -          | -              |
| ■ | Turn Table              | Innco Systems   | DT2000       | 79         | -              |
| ■ | Cable Assembly          | Radiall         | 2301762000PJ | 1724.66    | -              |
| ■ | Cable Assembly          | Gigalane        | RF-400       | -          | -              |