

FCC TEST REPORT

Client Name : Ugreen Group Limited
Address : UGREEN Building, Longcheng Industrial Park,
Longguanxi Road, Longhua, ShenZhen China 518000
Product Name : Wireless Charger
Date : Aug. 31, 2021



Shenzhen Anbotek Compliance Laboratory Limited

Contents

- 1. General Information.....4
 - 1.1. Client Information.....4
 - 1.2. Description of Device (EUT).....4
 - 1.3. Auxiliary Equipment Used During Test.....5
 - 1.4. Description of Test Modes.....5
 - 1.5. Description Of Test Setup.....6
 - 1.6. Test Equipment List.....7
 - 1.7. Measurement Uncertainty.....8
 - 1.8. Description of Test Facility.....8
- 2. Summary of Test Results.....9
- 3. Conducted Emission Test.....10
 - 3.1. Test Standard and Limit.....10
 - 3.2. Test Setup.....10
 - 3.3. Test Procedure.....10
 - 3.4. Test Data.....10
- 4. Radiation Spurious Emission.....15
 - 4.1. Test Standard and Limit.....15
 - 4.2. Test Setup.....15
 - 4.3. Test Procedure.....16
 - 4.4. Test Data.....16
- 5. Antenna Requirement.....21
 - 5.1. Test Standard and Requirement.....21
 - 5.2. Antenna Connected Construction.....21
- APPENDIX I -- TEST SETUP PHOTOGRAPH.....22
- APPENDIX II -- EXTERNAL PHOTOGRAPH.....24
- APPENDIX III -- INTERNAL PHOTOGRAPH.....28

TEST REPORT

Applicant : Ugreen Group Limited
Manufacturer : Ugreen Group Limited
Product Name : Wireless Charger
Model No. : CD186, 80537
Trade Mark : **UGREEN**
Rating(s) : Input: 5V \equiv 2A, 9V \equiv 2A, 12V \equiv 2A
Output: 15W Max, compatible with 10W, 7.5W and 5W
Test Standard(s) : **FCC Part15 Subpart C, Paragraph 15.209**
Test Method(s) : **ANSI C63.10: 2020**

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt

Jun. 09, 2021

Date of Test

Jun. 10~ Aug. 13, 2021

Prepared By



(Ella Liang)

Approved & Authorized Signer



(Kingkong Jin)

1. General Information

1.1. Client Information

Applicant	:	Ugreen Group Limited
Address	:	UGREEN Building, Longcheng Industrial Park, Longguanxi Road, Longhua, ShenZhen China 518000
Manufacturer	:	Ugreen Group Limited
Address	:	UGREEN Building, Longcheng Industrial Park, Longguanxi Road, Longhua, ShenZhen China 518000

1.2. Description of Device (EUT)

Product Name	:	Wireless Charger	
Model No.	:	CD186, 80537 (Note: All samples are the same except the model number, so we prepare "CD186" for test only.)	
Trade Mark	:	UGREEN	
Test Power Supply	:	AC 120V, 60Hz for adapter/AC 240V, 60Hz for adapter	
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)	
Product Description	:	Operation Frequency:	111.1-205KHz
	:	Modulation Type:	FSK
	:	Antenna Type:	Inductive loop coil Antenna
	:	Antenna Gain(Peak):	0 dBi
Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.			

1.3. Auxiliary Equipment Used During Test

Adapter	:	M/N: A2013 Input: AC 100-240V, 0.7A, 50-60Hz Output: 3.6-5.5V=3A/ 6.5-9V=2A/ 9-12V=1.5A
Wireless charging load	:	Manufacturer: Shenzhen Ouju Technology Co., Ltd. M/N: CD2874 Power: 5W/7.5W/10W/15W Last Cal.: Oct. 26, 2020 Cal. Interval: 1 Year

1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Charging & Wireless Charging Mode



For Conducted Emission	
Final Test Mode	Description
Mode 1	Charging & Wireless Charging Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	Charging & Wireless Charging Mode

Note: (1)Test channel is 0.1275MHz.

(2) All the situation(full load, half load and empty load) has been tested,only the worst situation (full load 15W) was recorded in the report.

1.5. Description Of Test Setup

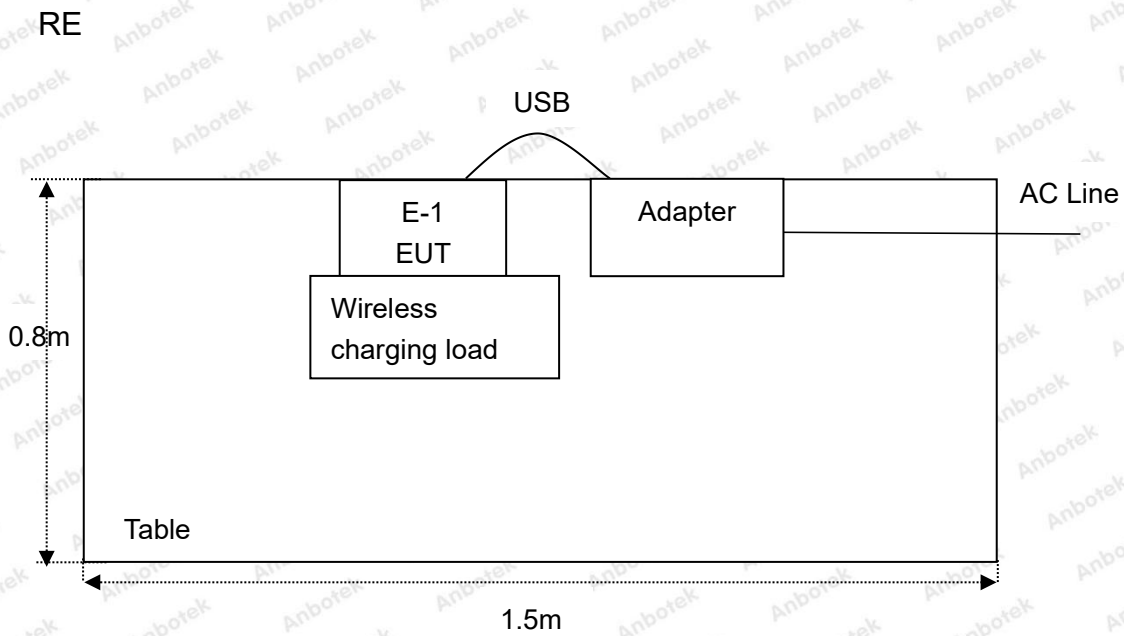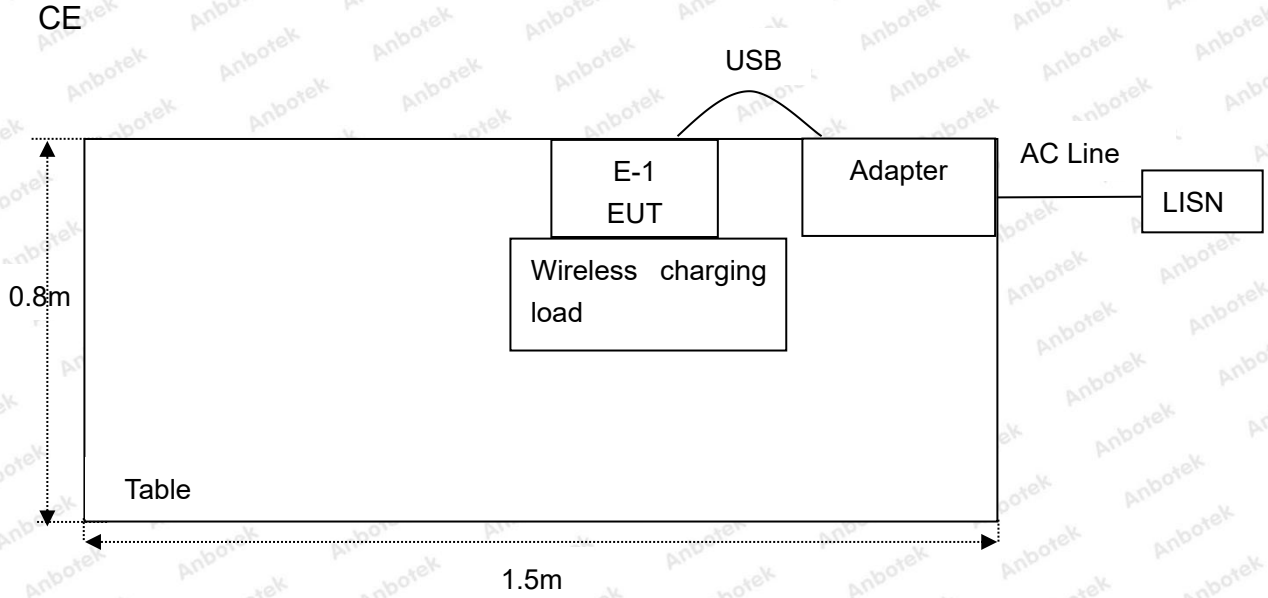

1.6. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Oct. 26, 2020	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Oct. 26, 2020	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESR26	101481	Oct. 26, 2020	1 Year
4.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Oct. 26, 2020	1 Year
5.	MAX Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 26, 2020	1 Year
6.	Preamplifier	SKET Electronic	BK1G18G30 D	KD17503	Oct. 26, 2020	1 Year
7.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Nov. 02, 2020	2 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Nov. 02, 2020	2 Year
9.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Nov. 02, 2020	2 Year
10.	Horn Antenna	A-INFO	LB-180400-K F	J211060628	Nov. 02, 2020	2 Year
11.	Pre-amplifier	SONOMA	310N	186860	Oct. 26, 2020	1 Year
12.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
13.	RF Test Control System	YIHENG	YH3000	2017430	Oct. 26, 2020	1 Year
14.	Power Sensor	DAER	RPR3006W	15I00041SN045	Oct. 26, 2020	1 Year
15.	Power Sensor	DAER	RPR3006W	15I00041SN046	Oct. 26, 2020	1 Year
16.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 26, 2020	1 Year
17.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Oct. 26, 2020	1 Year
18.	Signal Generator	Agilent	E4421B	MY41000743	Oct. 26, 2020	1 Year
19.	DC Power Supply	IVYTECH	IV3605	1804D360510	Oct. 26, 2020	1 Year
20.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80 B	N/A	Oct. 26, 2020	1 Year

1.7. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 3.9 dB (Horizontal)
		Ur = 3.8 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4 dB

1.8. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, September 30, 2020.

ISED-Registration No.: 8058A

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A, September 30, 2020.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102

2. Summary of Test Results


Standard Section	Test Item	Result
FCC Part 15, Paragraph 15.207	Conducted Emission Test	PASS
FCC Part 15, Paragraph 15.209(a)(f)	Spurious Emission	PASS
Part 15.203	Antenna Requirement	PASS

3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50
Remark: (1) *Decreasing linearly with logarithm of the frequency. (2) The lower limit shall apply at the transition frequency.			

3.2. Test Setup

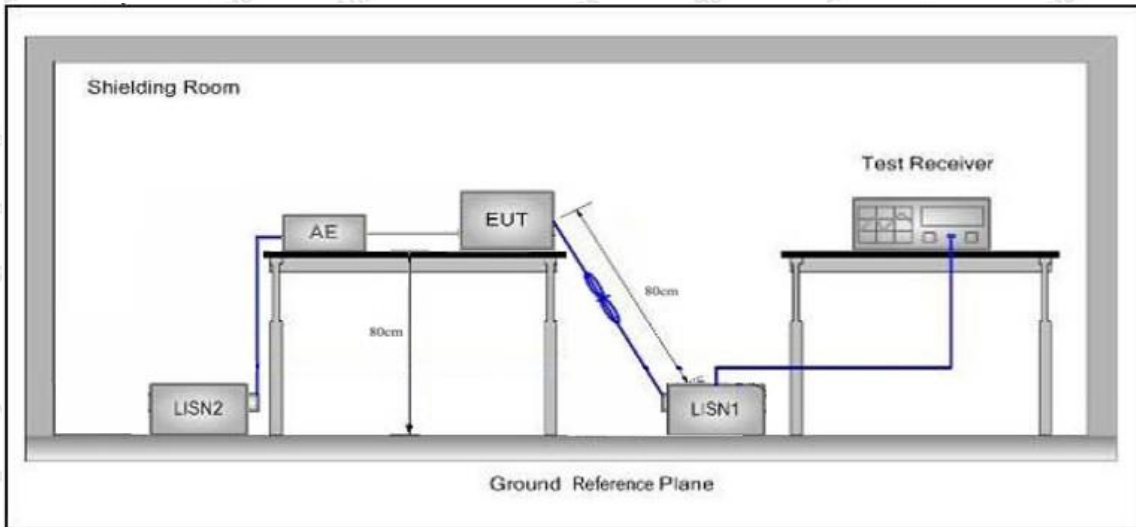

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2020 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.


The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

Please to see the following pages

Conducted Emission Test Data


Test Site: 1# Shielded Room
 Operating Condition: Mode 1
 Test Specification: AC 240V, 60Hz for adapter
 Comment: Live Line
 Tem.: 24.1°C Hum.: 48%

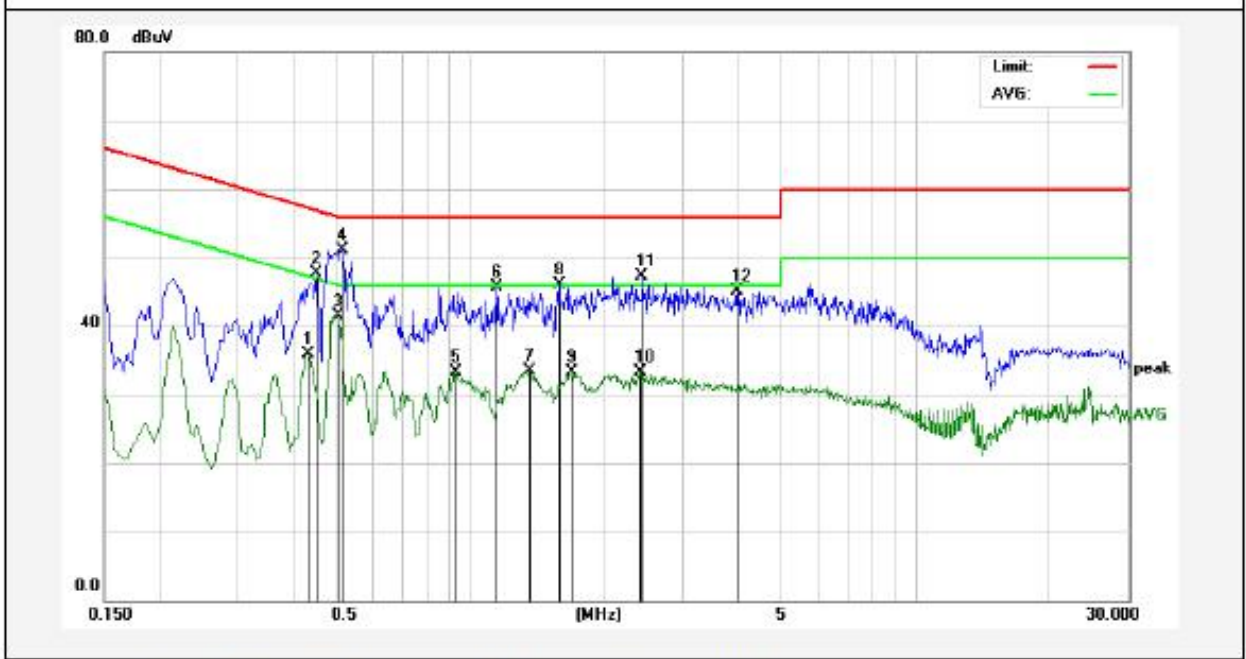

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.4300	15.98	19.95	35.93	47.25	-11.32	AVG	
2	0.4500	27.66	19.96	47.62	56.87	-9.25	QP	
3	0.5020	21.58	19.98	41.56	46.00	-4.44	AVG	
4	0.5140	31.11	19.98	51.09	56.00	-4.91	QP	
5	0.9260	13.24	20.10	33.34	46.00	-12.66	AVG	
6	1.1460	25.54	20.12	45.66	56.00	-10.34	QP	
7	1.3540	13.47	20.13	33.60	46.00	-12.40	AVG	
8	1.5780	25.88	20.13	46.01	56.00	-9.99	QP	
9	1.6940	13.27	20.13	33.40	46.00	-12.60	AVG	
10	2.4020	13.14	20.15	33.29	46.00	-12.71	AVG	
11	2.4340	27.22	20.15	47.37	56.00	-8.63	QP	
12	3.9780	24.96	20.18	45.14	56.00	-10.86	QP	

Conducted Emission Test Data


Test Site: 1# Shielded Room
 Operating Condition: Mode 1
 Test Specification: AC 240V, 60Hz for adapter
 Comment: Neutral Line
 Tem.: 24.1°C Hum.: 48%

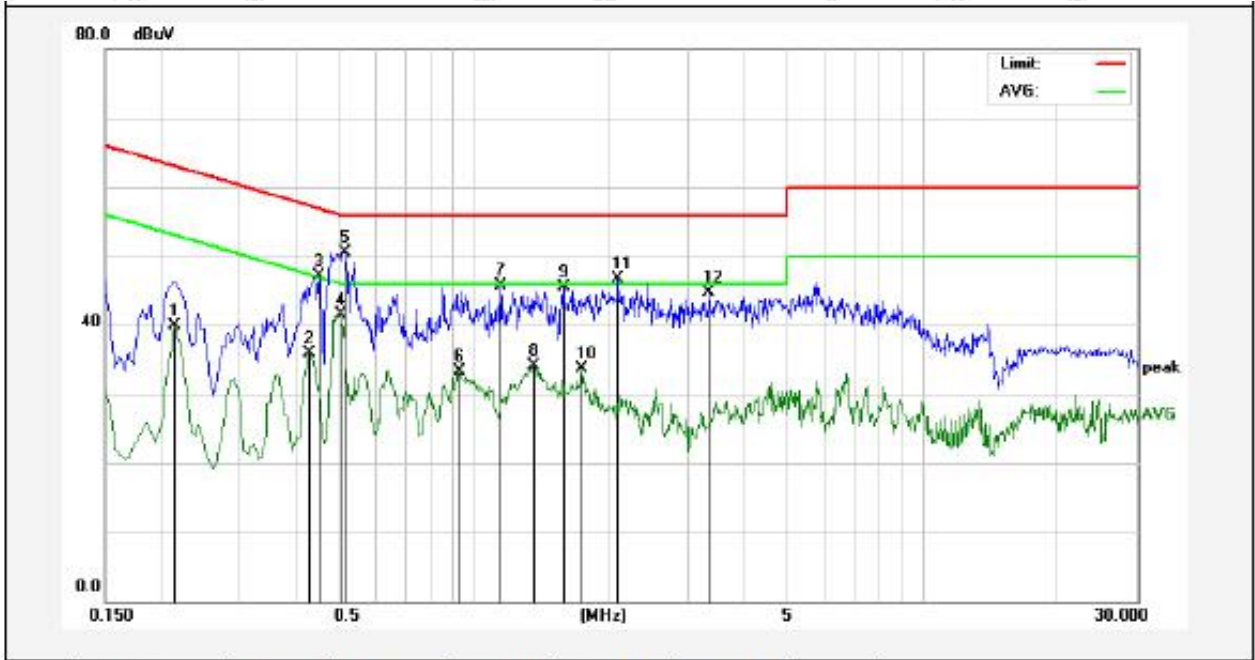

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.2139	20.01	19.90	39.91	53.05	-13.14	AVG	
2	0.4299	15.98	19.95	35.93	47.25	-11.32	AVG	
3	0.4500	27.16	19.96	47.12	56.87	-9.75	QP	
4	0.5020	21.58	19.98	41.56	46.00	-4.44	AVG	
5	0.5140	30.61	19.98	50.59	56.00	-5.41	QP	
6	0.9260	13.24	20.10	33.34	46.00	-12.66	AVG	
7	1.1459	25.54	20.12	45.66	56.00	-10.34	QP	
8	1.3540	13.97	20.13	34.10	46.00	-11.90	AVG	
9	1.5780	25.38	20.13	45.51	56.00	-10.49	QP	
10	1.7419	13.57	20.13	33.70	46.00	-12.30	AVG	
11	2.0979	26.55	20.14	46.69	56.00	-9.31	QP	
12	3.3340	24.46	20.17	44.63	56.00	-11.37	QP	

Conducted Emission Test Data


Test Site: 1# Shielded Room
 Operating Condition: Mode 1
 Test Specification: AC 120V, 60Hz for adapter
 Comment: Live Line
 Tem.: 24.1°C Hum.: 48%

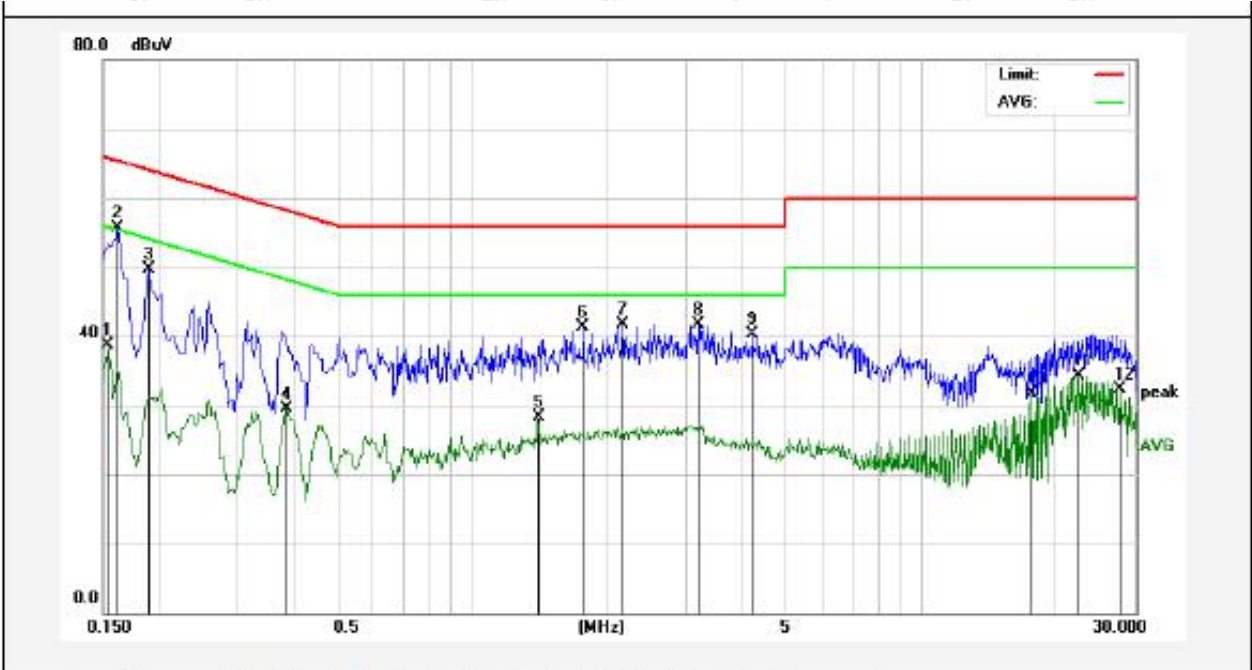

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1539	18.87	19.90	38.77	55.78	-17.01	AVG	
2	0.1620	35.76	19.90	55.66	65.36	-9.70	QP	
3	0.1900	29.78	19.90	49.68	64.03	-14.35	QP	
4	0.3860	9.65	19.93	29.58	48.15	-18.57	AVG	
5	1.4019	8.25	20.13	28.38	46.00	-17.62	AVG	
6	1.7660	21.21	20.14	41.35	56.00	-14.65	QP	
7	2.1659	21.56	20.14	41.70	56.00	-14.30	QP	
8	3.1779	21.57	20.16	41.73	56.00	-14.27	QP	
9	4.2019	20.15	20.19	40.34	56.00	-15.66	QP	
10	17.6098	11.32	20.30	31.62	50.00	-18.38	AVG	
11	22.4619	14.04	20.31	34.35	50.00	-15.65	AVG	
12	27.8260	11.98	20.27	32.25	50.00	-17.75	AVG	

Conducted Emission Test Data

Test Site: 1# Shielded Room
 Operating Condition: Mode 1
 Test Specification: AC 120V, 60Hz for adapter
 Comment: Neutral Line
 Tem.: 24.1°C Hum.: 48%

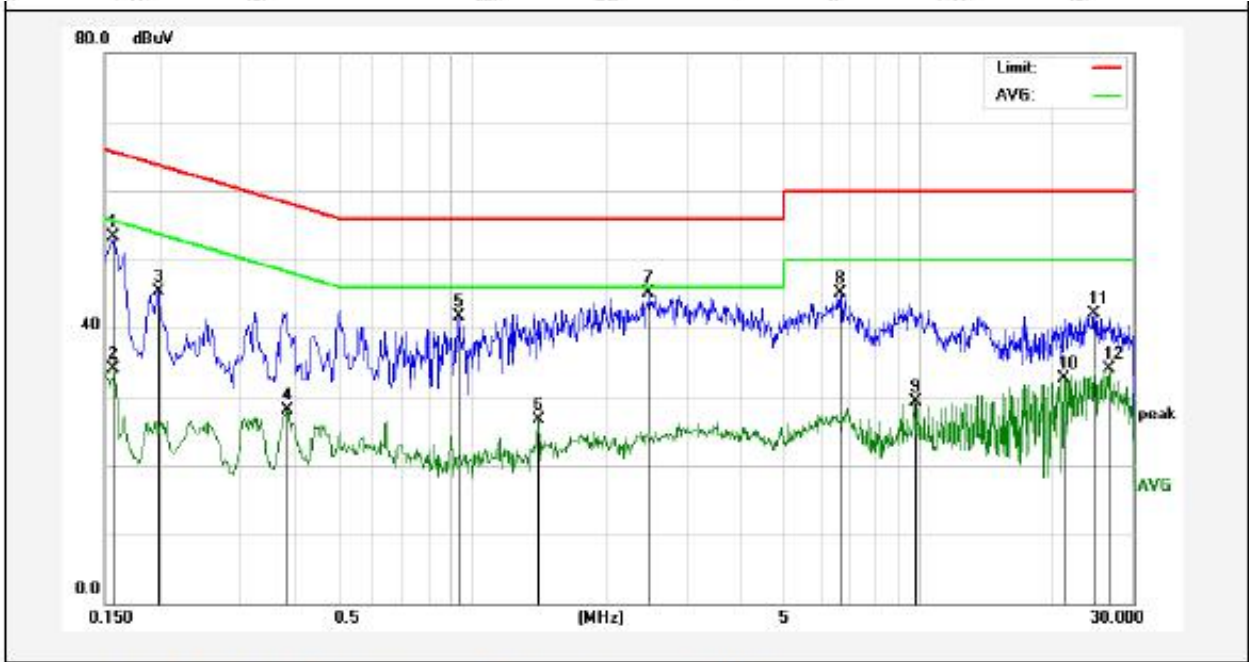

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1580	33.49	19.90	53.39	65.56	-12.17	QP	
2	0.1580	14.12	19.90	34.02	55.56	-21.54	AVG	
3	0.1980	25.42	19.90	45.32	63.69	-18.37	QP	
4	0.3860	8.20	19.93	28.13	48.15	-20.02	AVG	
5	0.9340	21.51	20.10	41.61	56.00	-14.39	QP	
6	1.4058	6.54	20.13	26.67	46.00	-19.33	AVG	
7	2.4860	24.97	20.15	45.12	56.00	-10.88	QP	
8	6.6619	24.85	20.25	45.10	60.00	-14.90	QP	
9	9.7058	9.07	20.33	29.40	50.00	-20.60	AVG	
10	20.9499	12.37	20.33	32.70	50.00	-17.30	AVG	
11	24.5300	21.76	20.29	42.05	60.00	-17.95	QP	
12	26.5620	13.78	20.28	34.06	50.00	-15.94	AVG	

4. Radiation Spurious Emission

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
-		-	74.0	Peak	3

Remark:

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

4.2. Test Setup

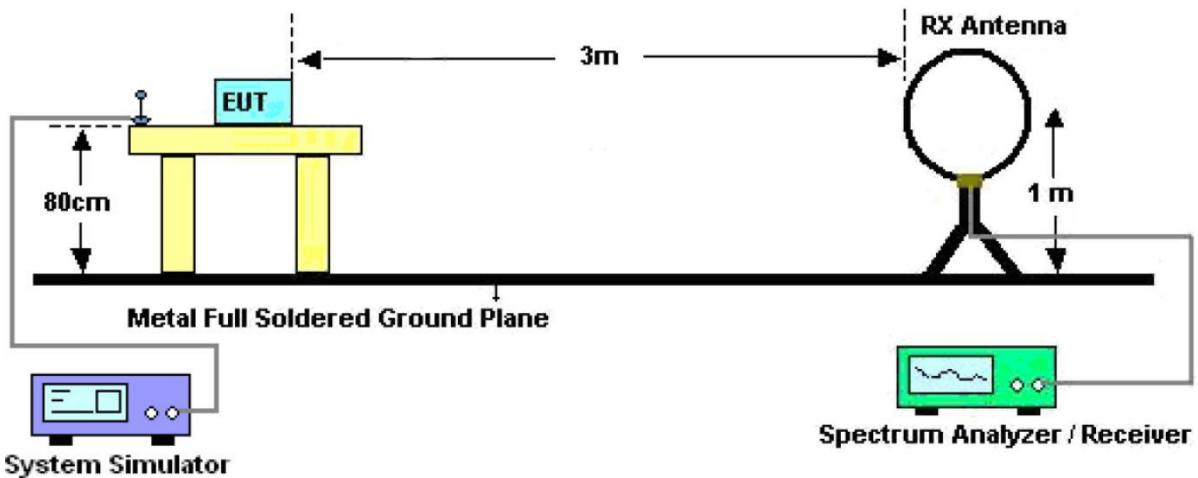


Figure 1. Below 30MHz

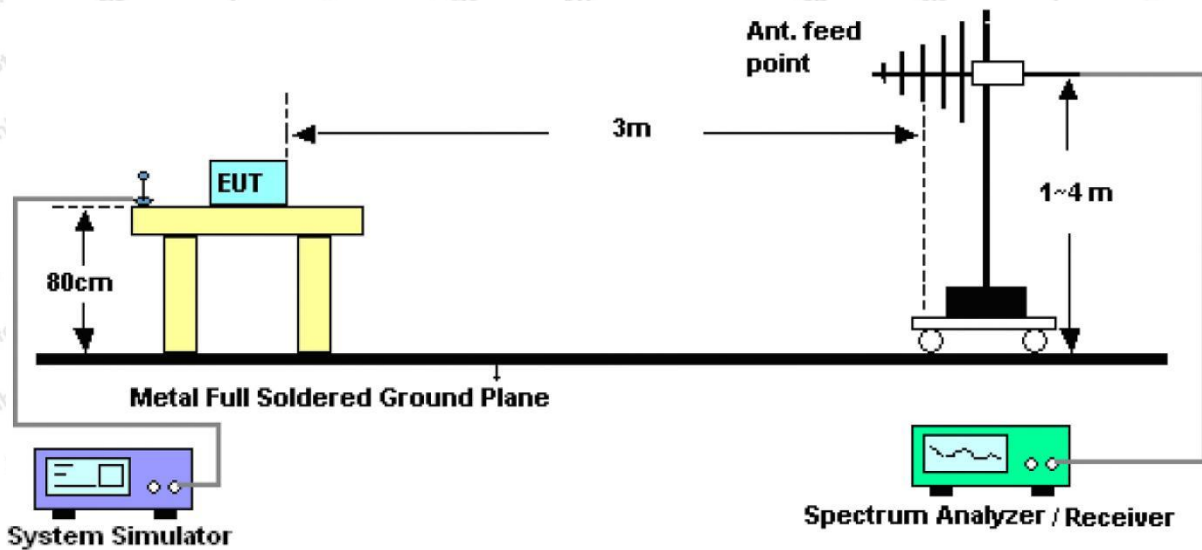


Figure 2. 30MHz to 1GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9kHz, VBW = 30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

4.4. Test Data


PASS

Note: The data is in TX mode, and this is the worst mode.


Test Results

(Between 9KHz – 30MHz)

Standard: FCC PART15 C _3m **Power Source:** AC 120V, 60Hz for adapter
Test item: Radiation Test **Temp.(C)/Hum.(%RH):** 22.4°C/49%RH
Test Mode: Mode 1 **Distance:** 3m

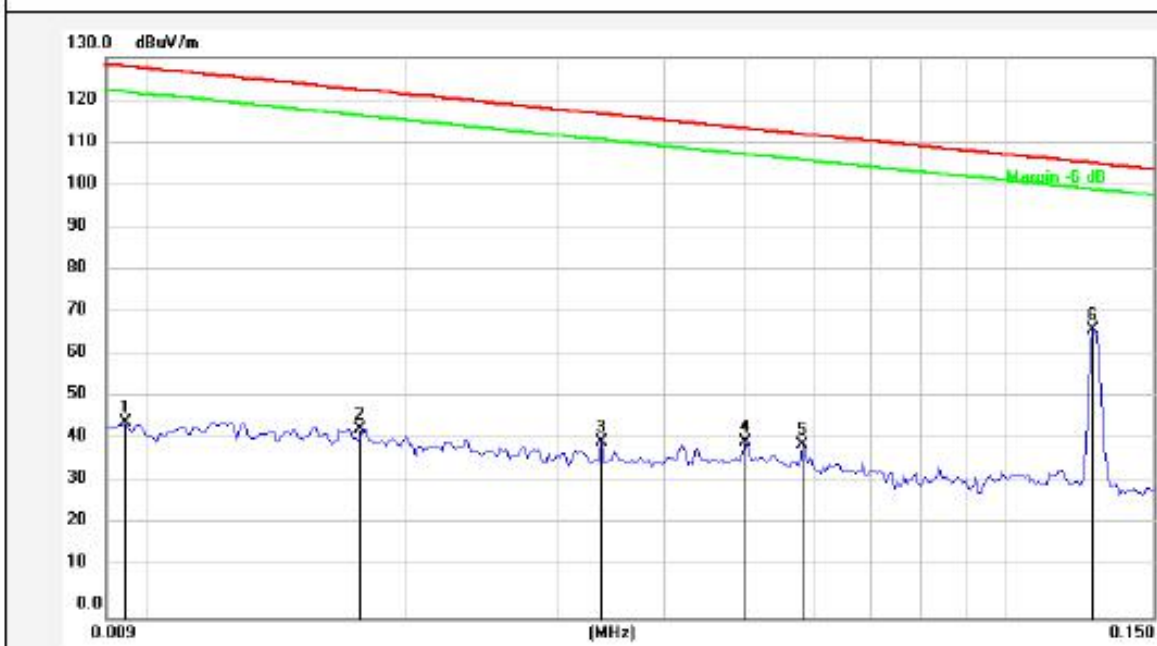

No.	Freq. (MHz)	Reading (dBuV)	Factor ()	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	0.0094	25.07	20.11	45.18	128.03	-82.85	AV			
2	0.0177	23.52	20.15	43.67	122.55	-78.88	AV			
3	0.0340	20.08	20.55	40.63	116.90	-76.27	AV			
4	0.0500	20.45	20.42	40.87	113.56	-72.69	AV			
5	0.0584	19.91	20.36	40.27	112.21	-71.94	AV			
6	0.1275	46.43	20.34	66.77	105.45	-38.68	AV			

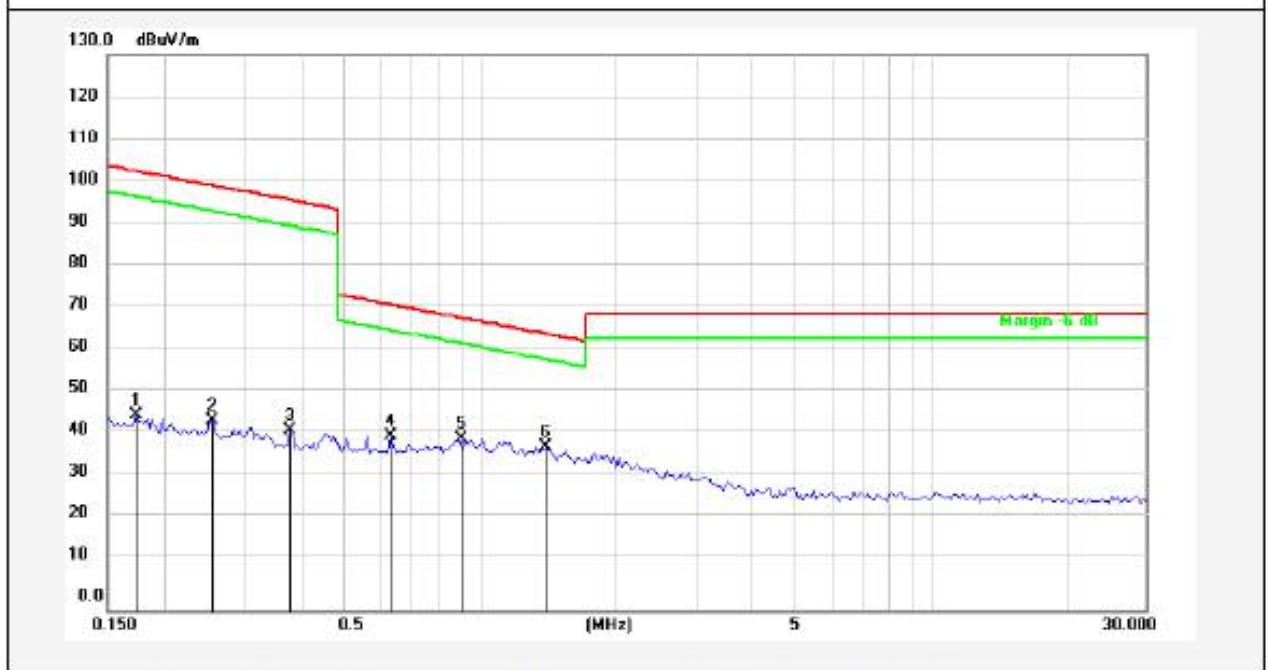

No.	Freq. (MHz)	Reading (dBuV)	Factor ()	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	0.1733	25.32	20.32	45.64	102.80	-57.16	AV			
2	0.2548	24.05	20.30	44.35	99.46	-55.11	AV			
3	0.3790	21.72	20.28	42.00	96.02	-54.02	AV			
4	0.6351	20.66	20.27	40.93	71.55	-30.62	QP			
5	0.8968	20.00	20.26	40.26	68.56	-28.30	QP			
6	1.4069	17.97	20.27	38.24	64.66	-26.42	QP			

Remark: According to FCC PART 15.209 (d), the emission limits for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, Radiated emission limits in these three bands are based on measurements employing an average detector.

(Between 30MHz –1000 MHz)

Standard:	FCC PART15 C _3m	Polarization:	Horizontal
Test item:	Radiation Test	Power Source:	AC 120V, 60Hz for adapter
Test Mode:	Mode 1	Temp.(C)/Hum.(%RH):	24.3°C/46%RH
Distance:	3m		



No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	41.1320	30.81	-14.87	15.94	40.00	-24.06	QP	100	360	
2	58.8185	37.01	-16.28	20.73	40.00	-19.27	QP	100	0	
3	94.0979	37.80	-20.01	17.79	43.50	-25.71	QP	100	360	
4	180.0165	47.74	-20.83	26.91	43.50	-16.59	QP	100	0	
5	307.8313	50.86	-14.09	36.77	46.00	-9.23	QP	100	360	
6	709.1823	28.98	-5.86	23.12	46.00	-22.88	QP	100	0	

Standard: FCC PART15 C_3m **Polarization:** Vertical
Test item: Radiation Test **Power Source:** AC 120V, 60Hz for adapter
Test Mode: Mode 1 **Temp.(C)/Hum.(%RH):** 24.3°C/46%RH
Distance: 3m



No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	32.1794	39.68	-16.81	22.87	40.00	-17.13	QP	100	360	
2	40.9881	36.92	-13.68	23.24	40.00	-16.76	QP	100	0	
3	59.2325	40.79	-16.26	24.53	40.00	-15.47	QP	100	360	
4	89.9047	36.16	-15.78	20.38	43.50	-23.12	QP	100	0	
5	179.3863	44.69	-18.29	26.40	43.50	-17.10	QP	100	360	
6	293.0842	44.09	-13.66	30.43	46.00	-15.57	QP	100	0	


5. Antenna Requirement

5.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203
Requirement	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

5.2. Antenna Connected Construction

The antenna is a Inductive loop coil Antenna which permanently attached, and the best case gain of the antenna is 0 dBi. It complies with the standard requirement.

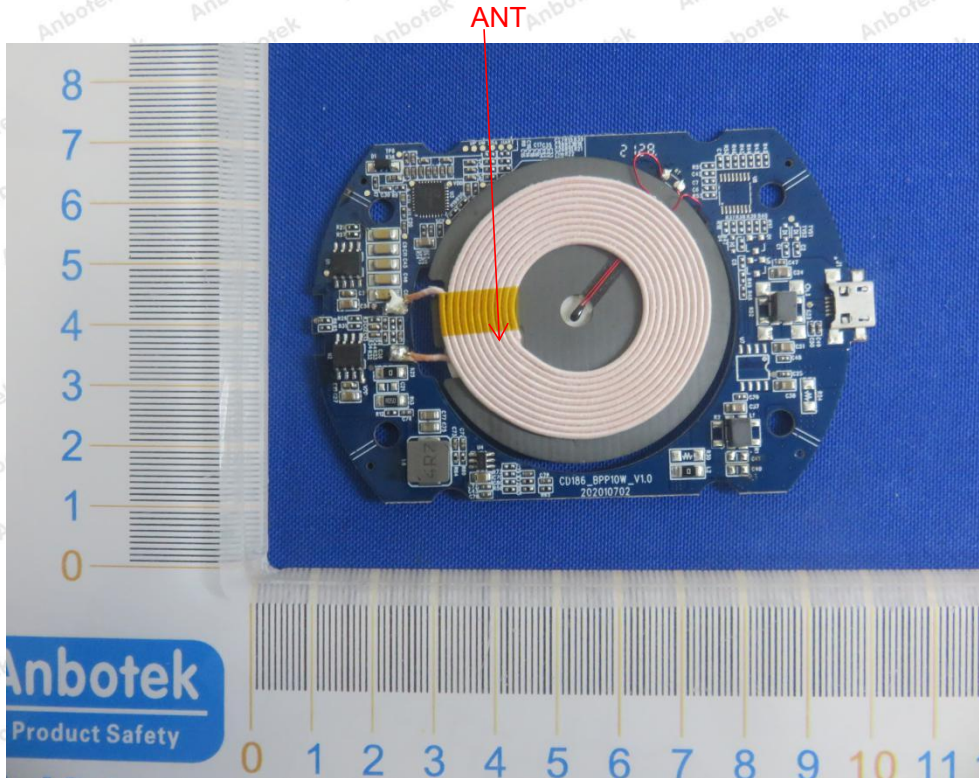


APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Conducted Emission Measurement






Photo of Radiation Emission Test




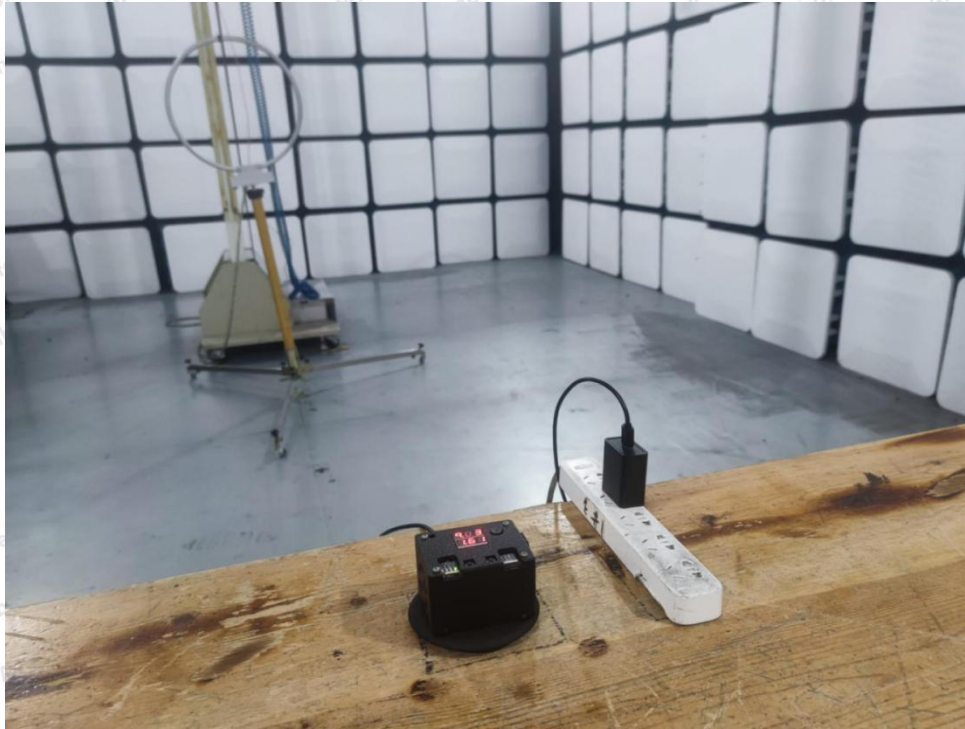


APPENDIX II -- EXTERNAL PHOTOGRAPH


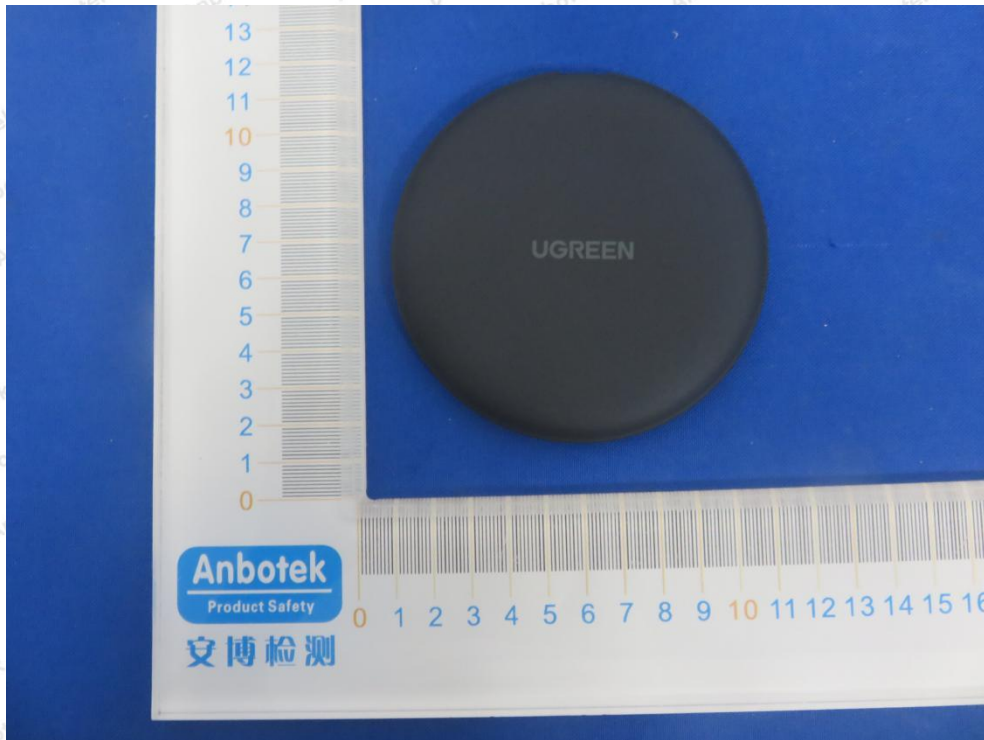


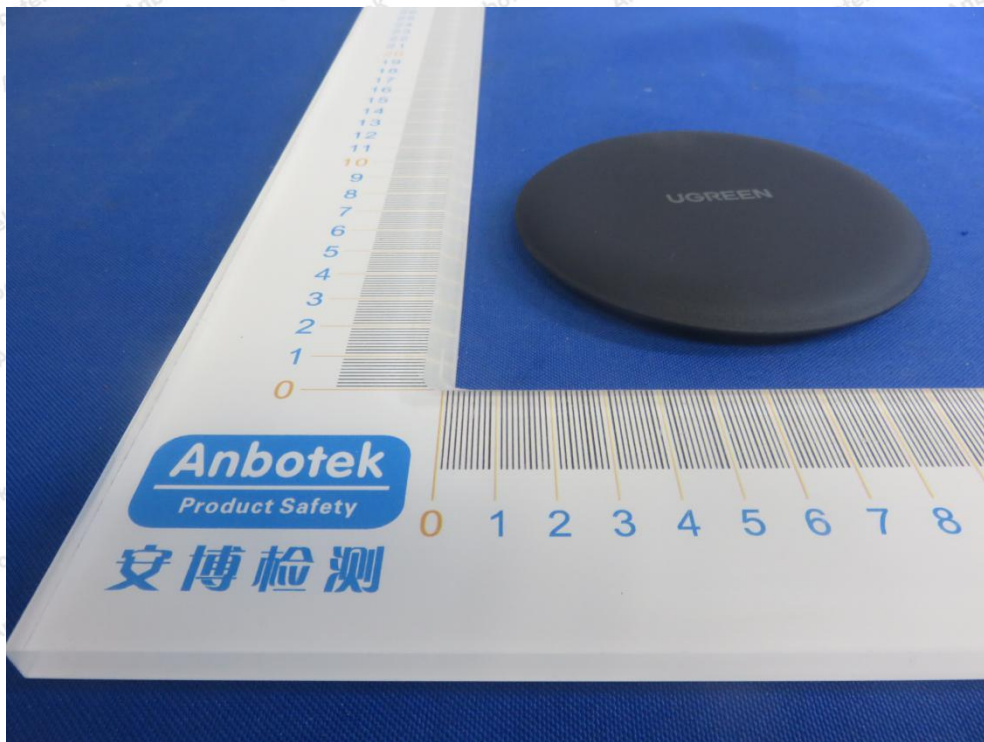
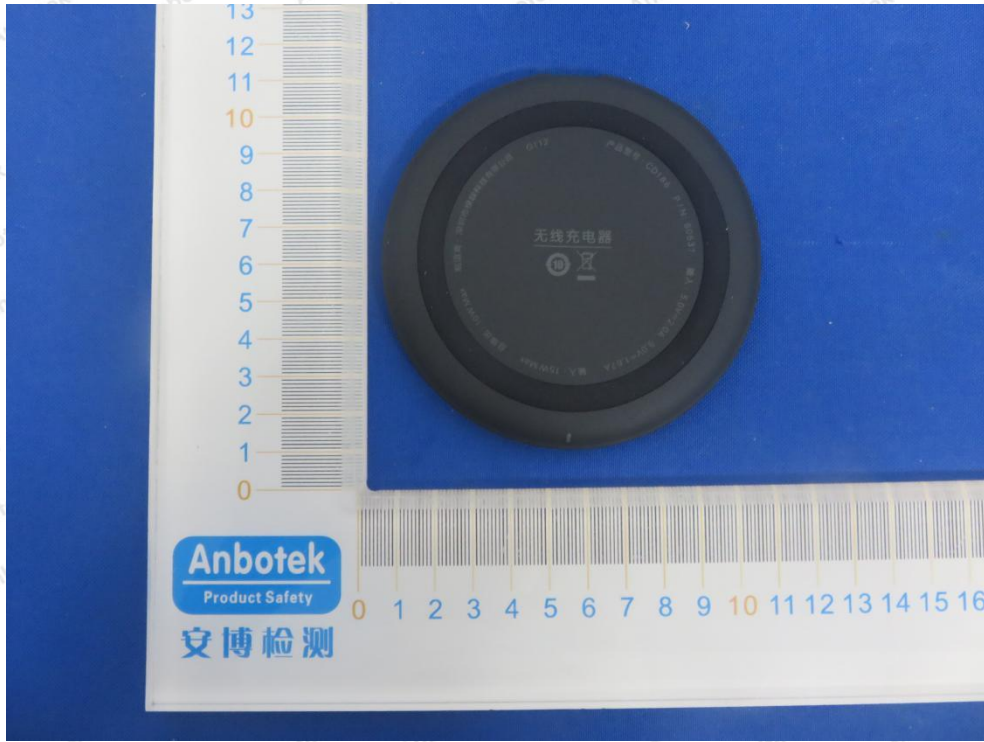


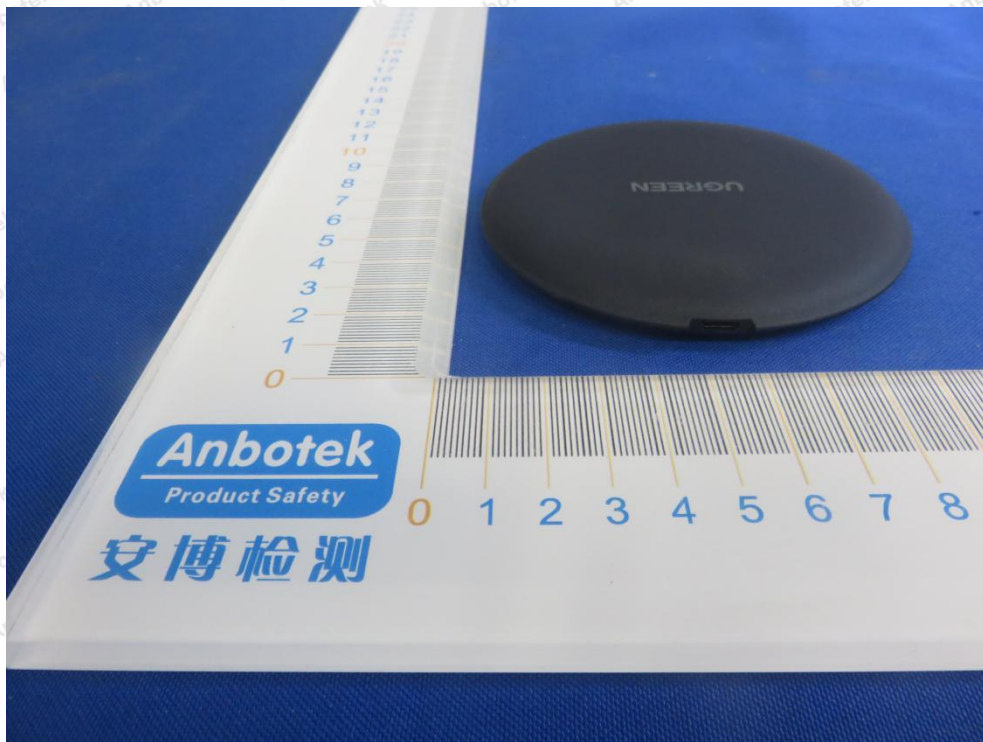


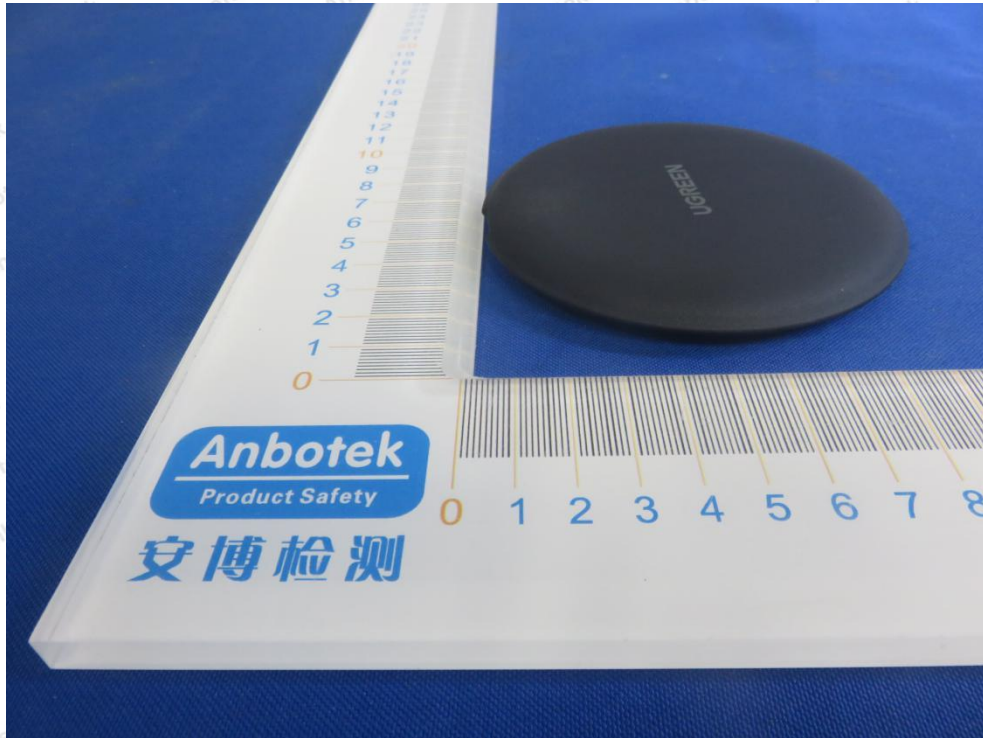

APPENDIX III -- INTERNAL PHOTOGRAPH

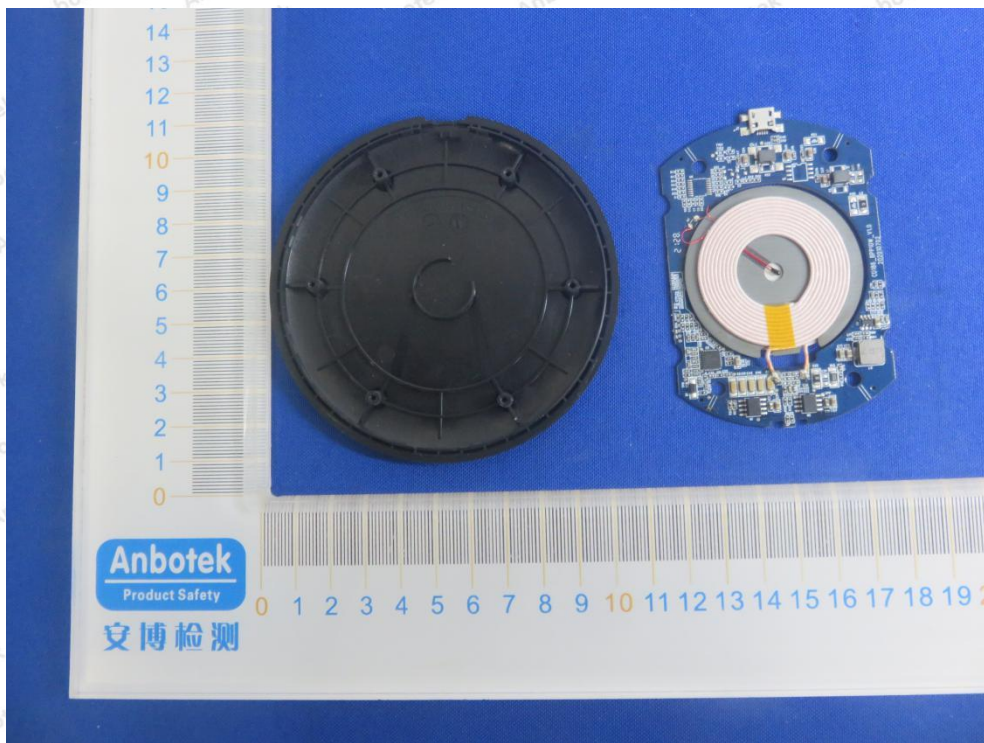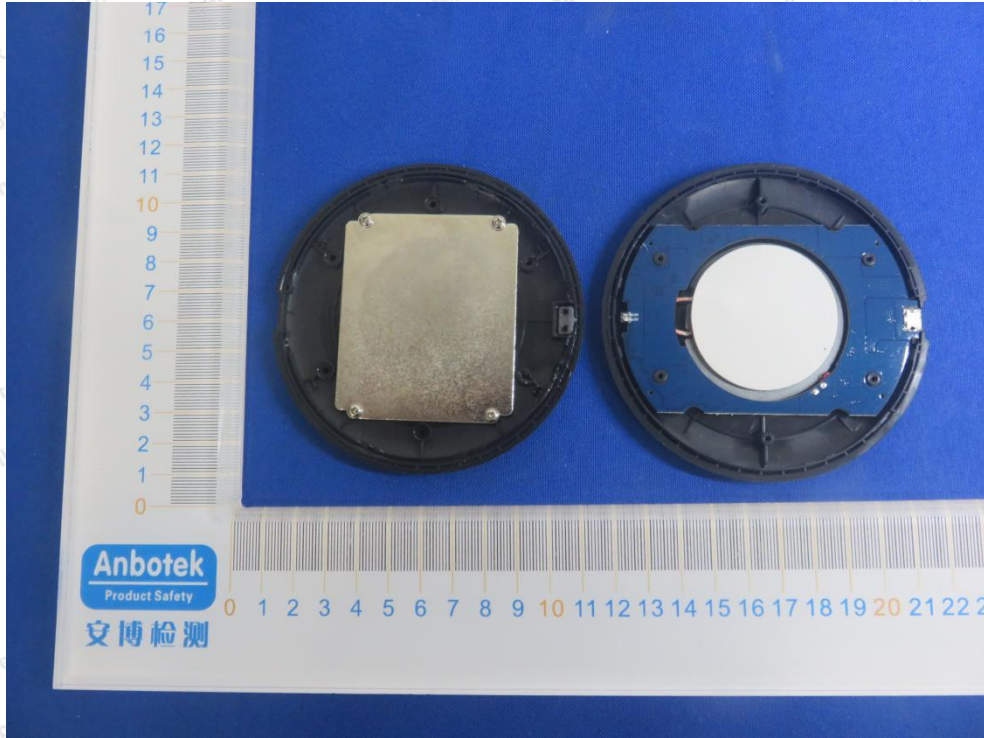

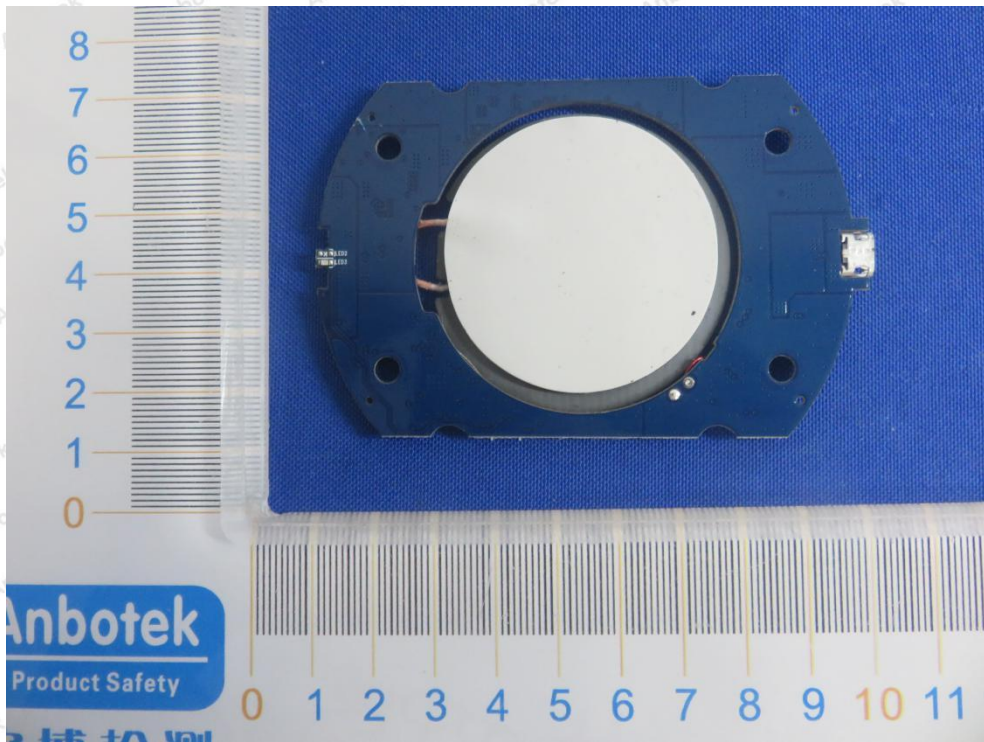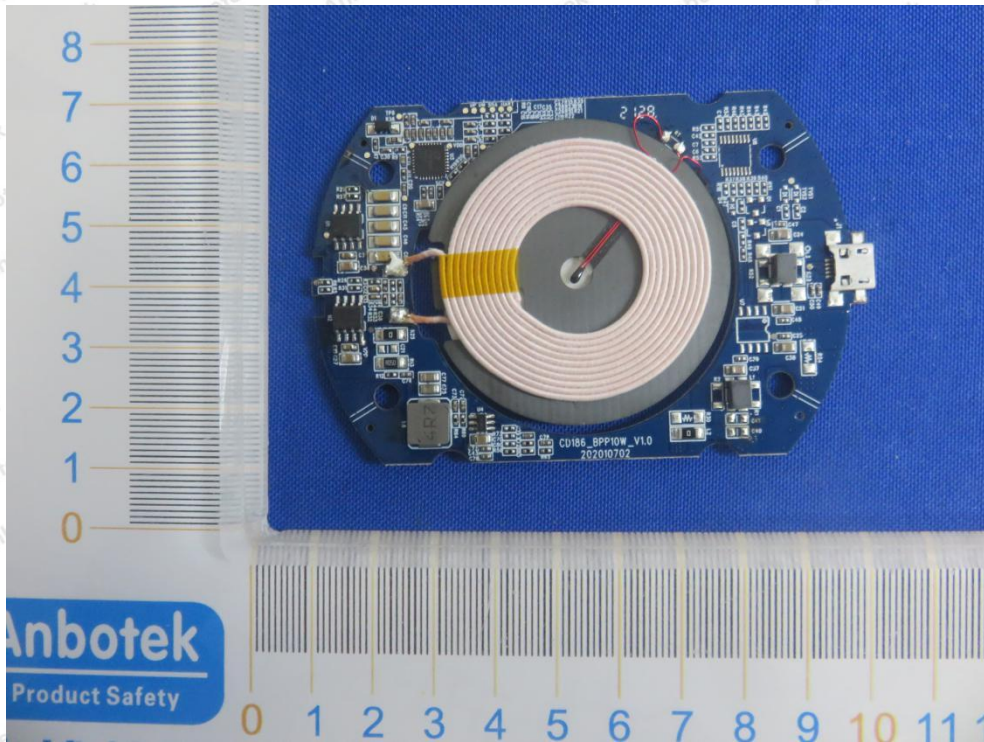

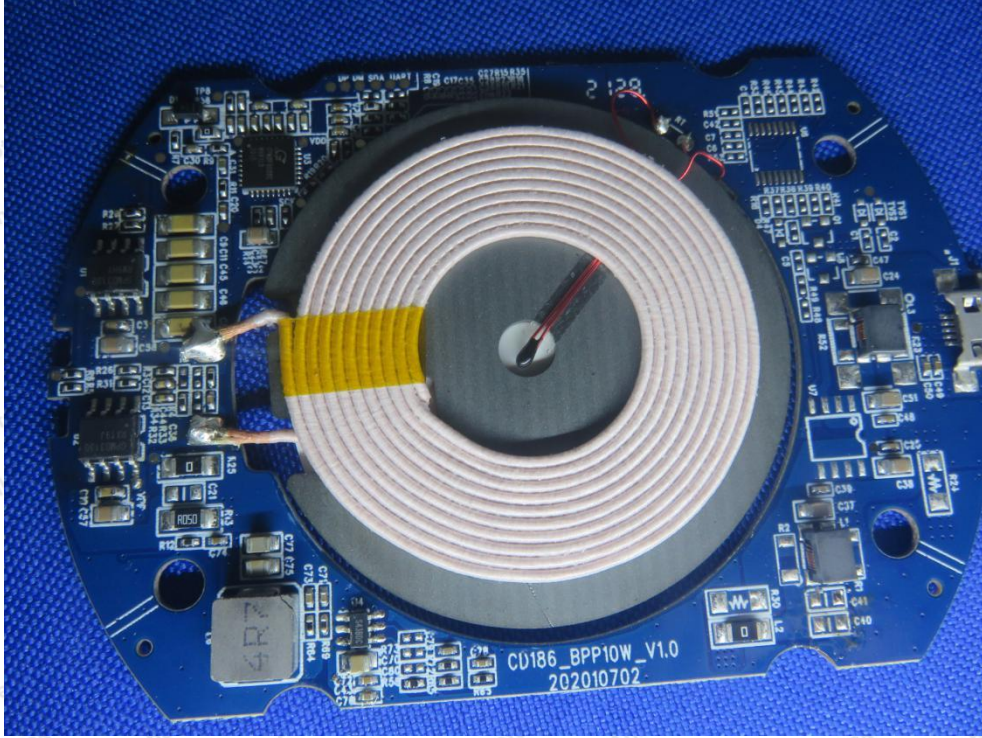

----- End of Report -----