

FCC Part 15C Measurement and Test Report

For

GUANGDONG UNIS TECHNOLOGY CO., LTD

No.1 Zheng An Road, West District, Zhongshan, Guangdong, China

FCC ID: 2AQKM-JSSXT

FCC Rule(s):	<u>FCC Part 15.231</u>
Product Description:	<u>Remote controller</u>
Tested Model:	<u>JS-SXT</u>
Report No.:	<u>SEM19018007</u>
Sample Receipt Date:	<u>2018-12-19</u>
Tested Date:	<u>2018-12-21 to 20190-01-10</u>
Issued Date:	<u>2019-01-10</u>
Tested By:	<u>Iven Guo / Engineer</u>
Reviewed By:	<u>Silin Chen / EMC Manager</u>
Approved & Authorized By:	<u>Jandy So / PSQ Manager</u>
Prepared By:	

Iven Guo

Silin Chen

Jandy So

Shenzhen SEM Test Technology Co., Ltd.

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM.Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	4
1.3 TEST METHODOLOGY.....	4
1.4 TEST FACILITY.....	4
1.5 EUT SETUP AND TEST MODE.....	5
1.6 MEASUREMENT UNCERTAINTY.....	5
1.7 TEST EQUIPMENT LIST AND DETAILS.....	6
2. SUMMARY OF TEST RESULTS.....	7
3. ANTENNA REQUIREMENT.....	8
3.1 STANDARD APPLICABLE.....	8
3.2 TEST RESULT.....	8
4. CONDUCTED EMISSIONS.....	9
4.1 TEST PROCEDURE.....	9
4.2 BASIC TEST SETUP BLOCK DIAGRAM.....	9
4.3 TEST RECEIVER SETUP.....	9
4.4 SUMMARY OF TEST RESULTS/PLOTS.....	9
5. RADIATED EMISSIONS.....	10
5.1 STANDARD APPLICABLE.....	10
5.2 TEST PROCEDURE.....	11
5.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	12
5.4 SUMMARY OF TEST RESULTS/PLOTS.....	12
6. 20DB BANDWIDTH.....	15
6.1 STANDARD APPLICABLE.....	15
6.1 TEST PROCEDURE.....	15
6.2 SUMMARY OF TEST RESULTS/PLOTS.....	15
7. TRANSMISSION TIME.....	16
7.1 STANDARD APPLICABLE.....	16
7.2 TEST PROCEDURE.....	16
7.3 SUMMARY OF TEST RESULTS/PLOTS.....	16
8. DUTY CYCLE.....	17
8.1 STANDARD APPLICABLE.....	17
8.2 TEST PROCEDURE.....	17
8.3 SUMMARY OF TEST RESULTS/PLOTS.....	17


1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: GUANGDONG UNIS TECHNOLOGY CO., LTD
Address of applicant: No.1 Zheng An Road, West District, Zhongshan, Guangdong, China

Manufacturer: Satellite Electronic(Zhong Shan)Ltd.
Address of manufacturer: No.8, Chuang Ye Road, Torch Development Zone, Zhongshan, Guangdong, China

General Description of EUT	
Product Name:	Remote controller
Trade Name:	
Model No.:	JS-SXT
Adding Model(s):	/
Rated Voltage:	DC 3V
Software Version:	N/A
Hardware Version:	N/A
<i>Note: The test data is gathered from a production sample provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Frequency Range:	433.9MHz
Max. Field Strength:	77.86dBuV/m(3m)
Data Rate:	/
Modulation:	ASK
Antenna Type:	PCB Antenna
Antenna Gain:	0dBi
Lowest Internal frequency of EUT:	433MHz

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.231: Periodic operation in the band 40.66-40.70 MHz and above 70 MHz.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission/immunity, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013,

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

FCC – Registration No.: 125990

Shenzhen SEM Test Technology Co., Ltd. Laboratory has been recognized to perform compliance testing on equipment subject to the Commissions Declaration Of Conformity (DOC). The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Test Mode

The EUT was operated at continuous transmitting mode that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	Transmitting	433.9MHz
/	/	/

Test Conditions	
Temperature:	22~25 °C
Relative humidity	50~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Transmission Time	Conducted	$\pm 5\%$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2018-05-22	2019-05-21
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2018-05-22	2019-05-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2018-05-22	2019-05-21
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2018-05-22	2019-05-21
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2018-05-22	2019-05-21
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2017-06-08	2020-06-07
SEMT-1042	Horn Antenna	ETS	3117	00086197	2017-06-08	2020-06-07
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2017-06-08	2020-06-07
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2018-05-22	2019-05-21
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2018-05-22	2019-05-21
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2018-05-22	2019-05-21
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2018-05-22	2019-05-21
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2018-05-22	2019-05-21
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2018-03-19	2019-03-18
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2018-03-19	2019-03-18
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2018-03-19	2019-03-18
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2018-03-19	2019-03-18
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2018-03-19	2019-03-18
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2018-03-19	2019-03-18

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 15.203	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§ 15.207(a)	Conducted Emission	N/A
§ 15.209	Radiated Spurious Emissions	Compliant
§15.231(a)	Deactivation Testing	Compliant
§15.231(b)	Radiated Emissions	Compliant
§15.231(c)	20dB Bandwidth Testing	Compliant

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Test Result

This product has a permanent antenna, fulfill the requirement of this section.


4. Conducted Emissions

4.1 Test Procedure

The setup of EUT is according with per ANSI C63.10:2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

4.2 Basic Test Setup Block Diagram

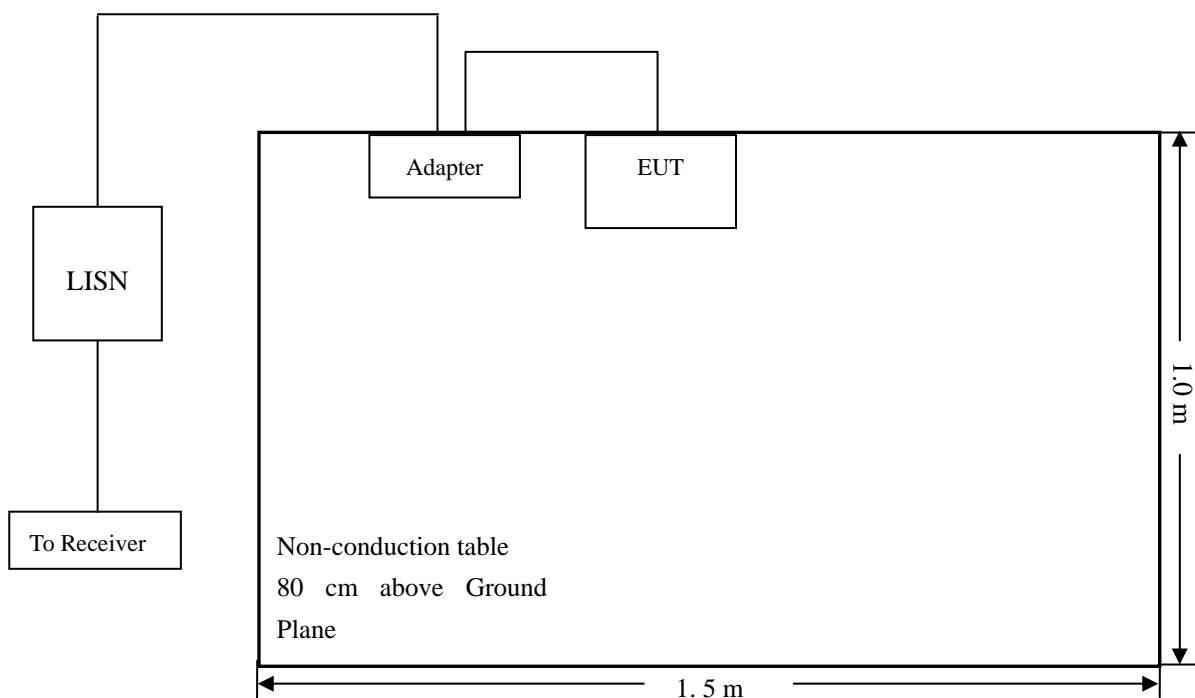

4.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency 150 kHz
 Stop Frequency 30 MHz
 Sweep Speed Auto
 IF Bandwidth..... 10 kHz
 Quasi-Peak Adapter Bandwidth 9 kHz
 Quasi-Peak Adapter Mode Normal

4.4 Summary of Test Results/Plots

Not Applicable, battery powered.

5. Radiated Emissions

5.1 Standard Applicable

According to §15.231(b), the field strength of emissions from intentional radiators operated under this section shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (microvolts/meter)	Field Strength of Spurious Emissions (microvolts/meter)
40.66 - 40.70	2,250	225
70 - 130	1,250	125
130 - 174	1,250 to 3,750 **	125 to 375 **
174 - 260	3,750	375
260 - 470	3,750 to 12,500 **	375 to 1,250 **
Above 470	12,500	1,250

** linear interpolations



The limits on the field strength of the spurious emissions in the above table are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in §15.209, whichever limit permits a higher field strength.

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

Compliance with the provisions of §15.205 shall be demonstrated using the measurement instrumentation specified in that section.

5.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.231(b) and FCC Part 15.209 Limit.

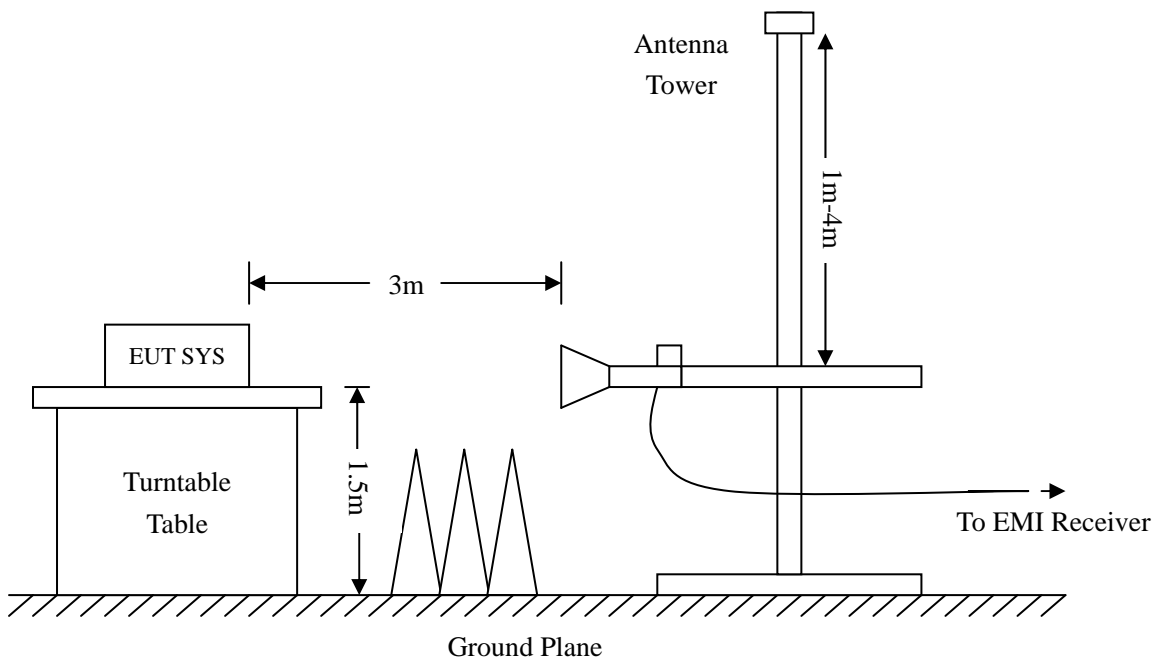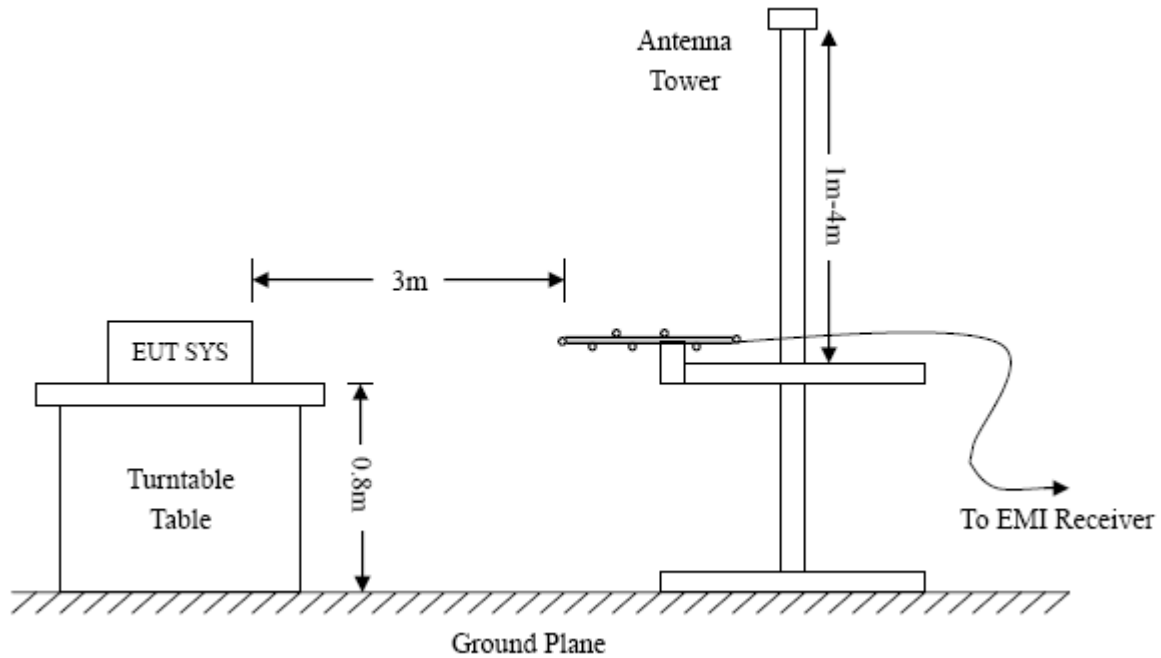

5.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Loss} + \text{Cab. Loss} - \text{Ampl. Gain}$$


The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15C Limit}$$

5.4 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

Test Mode	TM1	Polarity:	Horizontal
-----------	-----	-----------	------------

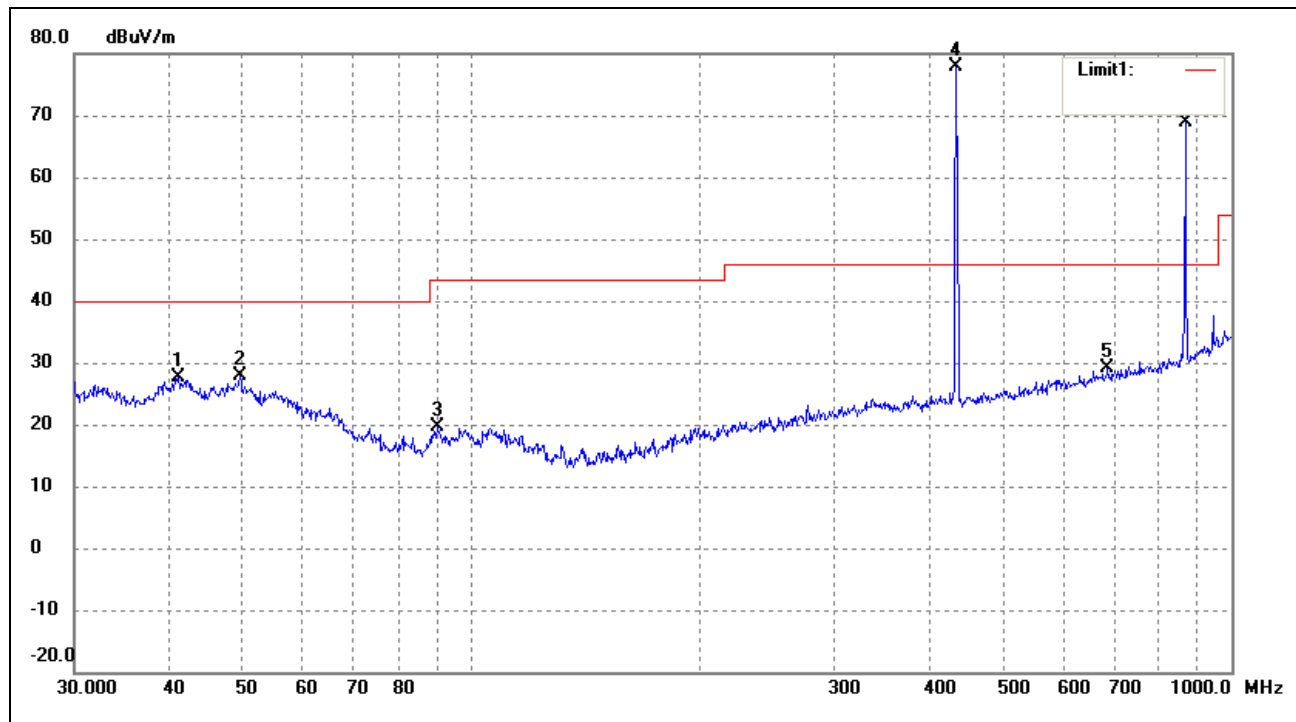


No.	Frequency MHz	Reading dBuV/m	Corr. Factor(dB)	Dutycycle Factor (dB)	Result dBuV/m	Limit dBuV/m	Margin (dB)	Remark
1	41.1320	35.94	-8.25	N/A	27.69	40.00	-12.31	peak
2	49.5328	36.25	-8.45	N/A	27.80	40.00	-12.20	peak
3	90.2205	35.41	-15.75	N/A	19.66	43.50	-23.84	peak
4	434.0651	84.85	-6.99	N/A	77.86	100.83	-22.97	peak
	434.0651	/	/	-8.90	68.96	80.83	-11.87	Ave
5	687.1507	31.90	-2.79	N/A	29.11	46.00	-16.89	peak
6	869.1302	68.38	0.42	N/A	68.8	80.83	-12.03	peak
	869.1302	/	/	-8.90	59.9	60.83	-0.93	Ave

Above 1GHz

No.	Frequency MHz	Reading dBuV/m	Corr. Factor (dB)	Dutycycle Factor (dB)	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	1302.20	28.06	27.05	N/A	55.11	74	-18.89	peak
	1302.20	/	/	-8.90	46.21	54	-7.79	Ave

Test Mode	TM1	Polarity:	Vertical
-----------	-----	-----------	----------

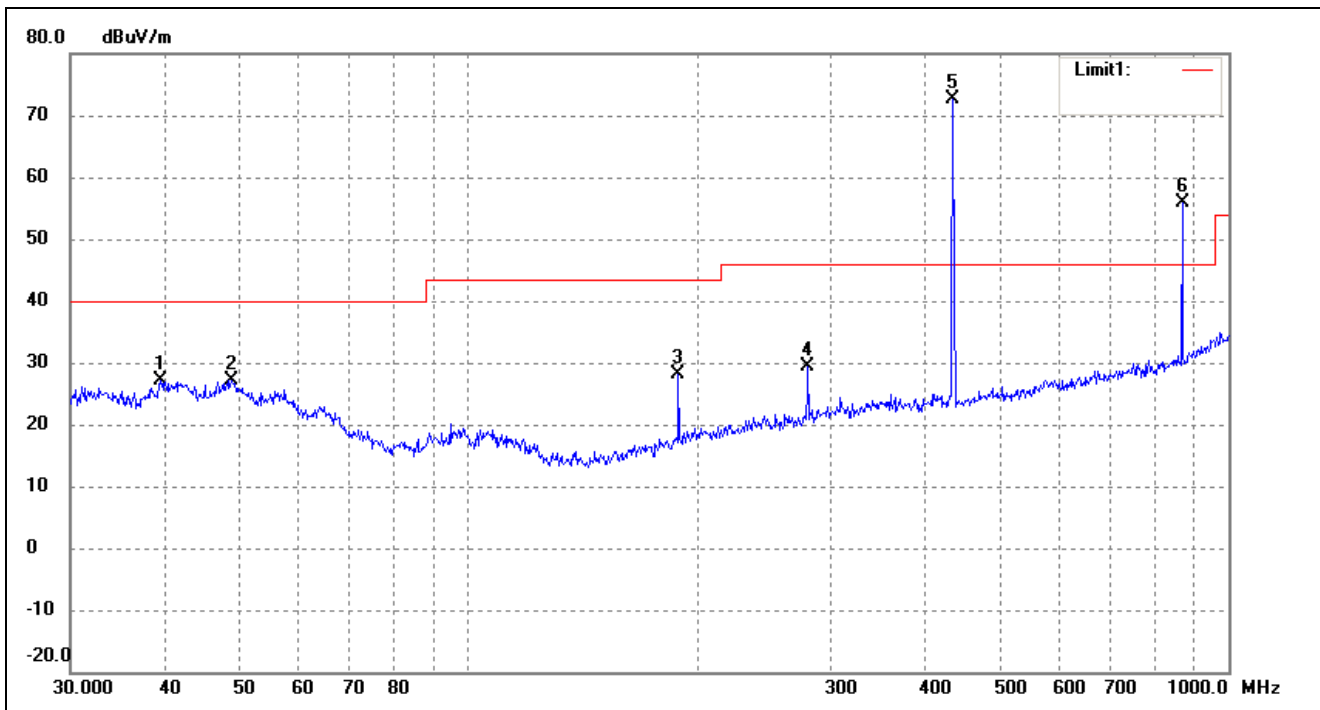

No.	Frequency MHz	Reading dBuV/m	Corr. Factor(dB)	Dutycycle Factor (dB)	Result dBuV/m	Limit dBuV/m	Margin (dB)	Remark
1	39.4371	35.83	-8.61	N/A	27.22	40.00	-12.78	peak
2	48.8429	35.54	-8.32	N/A	27.22	40.00	-12.78	peak
3	189.0743	42.40	-14.26	N/A	28.14	43.50	-15.36	peak
4	280.0237	39.47	-10.08	N/A	29.39	46.00	-16.61	peak
5	434.0651	79.62	-6.99	N/A	72.63	100.83	-28.2	peak
	434.0651	/	/	-8.90	63.73	80.83	-17.1	Ave
6	869.1302	55.43	0.42	N/A	55.85	80.83	-24.98	peak
	869.1302	/	/	-8.90	46.95	60.83	-13.88	Ave

Above 1GHz

No.	Frequency MHz	Reading dBuV/m	Corr. Factor (dB)	Dutycycle Factor (dB)	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	1302.20	27.31	26.95	N/A	54.26	74	-19.74	peak
	1302.20	/	/	-8.90	45.36	54	-8.64	Ave

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, which above 5th Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

The fundamental frequency is 433.9MHz, so the fundamental and spurious emissions radiated limit base on the the operating frequency 433.9MHz.

6. 20dB Bandwidth

6.1 Standard Applicable

According to FCC Part 15.231(c), The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

6.1 Test Procedure


With the EUT's antenna attached, the EUT's 20dB Bandwidth power was received by the test antenna, which was connected to the spectrum analyzer with the START, and STOP frequencies set to the EUT's operation band.

6.2 Summary of Test Results/Plots

Test Frequency MHz	20dB Bandwidth kHz	Limit kHz	Result
433.9	459.924	1085	Pass

Limit = Fundamental Frequency X 0.25% = 433.9 MHz X 0.25% = 1085 kHz

Please refer to the attached plots.

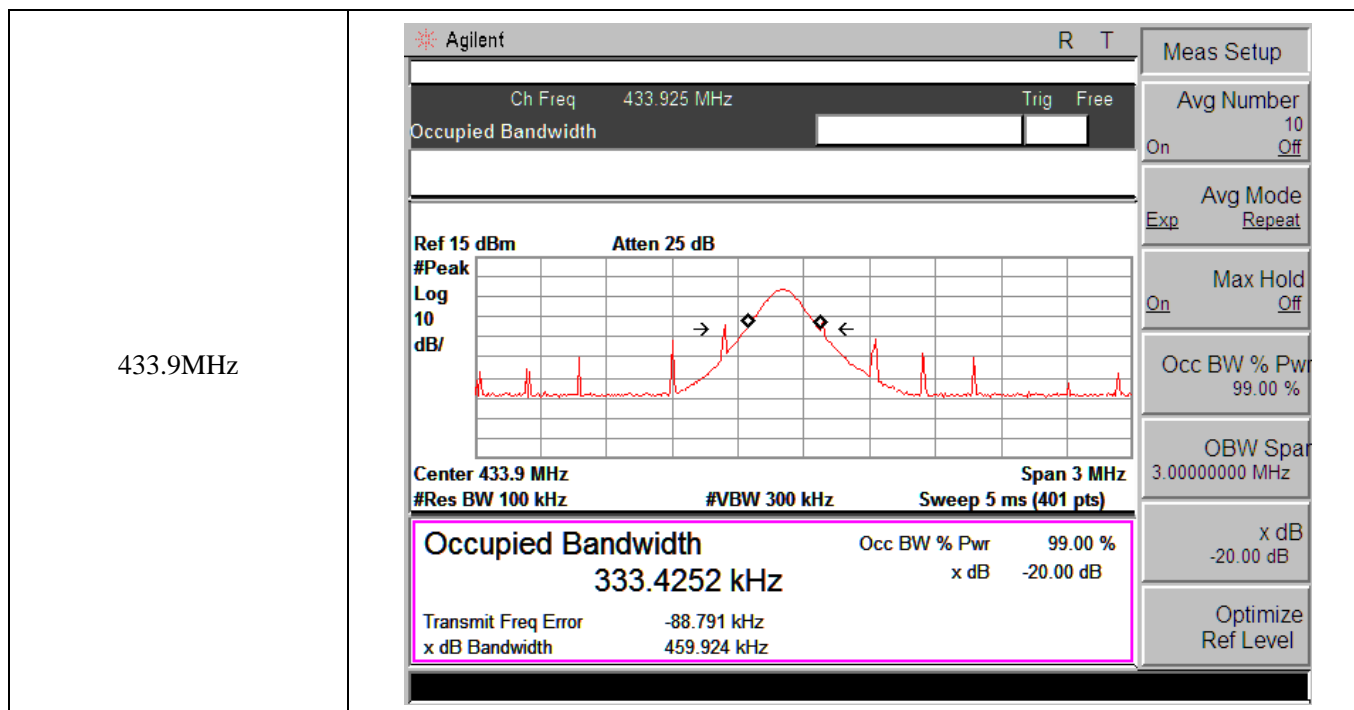

7. Transmission Time

7.1 Standard Applicable

According to FCC Part 15.231 (a), the transmitter shall be complied the following requirements:

- 1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.
- (2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.
- (3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.


7.2 Test Procedure

With the EUT's antenna attached, the EUT's output signal was received by the test antenna, which was connected to the spectrum analyzer. Set the center frequency to 433.9MHz, than set the spectrum analyzer to Zero Span for the release time reading. During the testing, the switch was released then the EUT automatically deactivated.

7.3 Summary of Test Results/Plots

Transmission Type	Test Frequency(MHz)	Transmission Time(s)	Limit(s)	Result
Manually	433.9	0.138	5	Pass

Please refer to the attached plots.

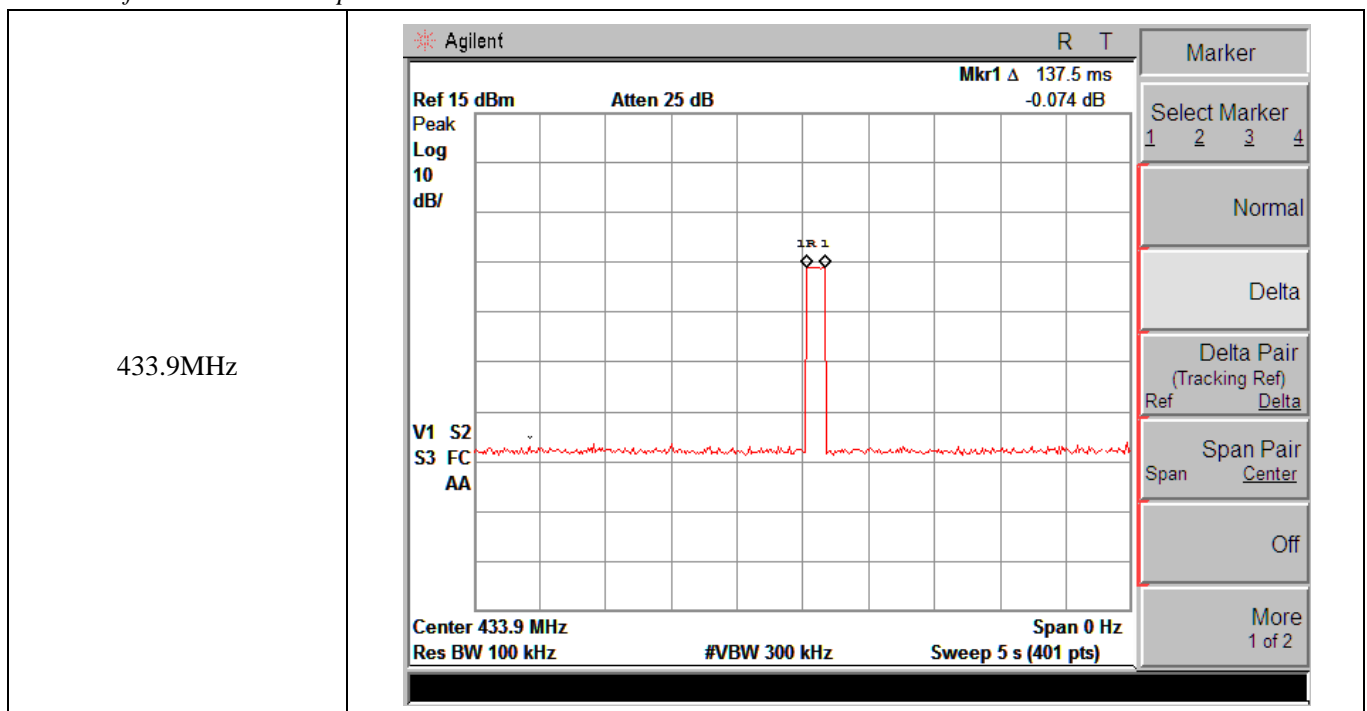

8. Duty Cycle

8.1 Standard Applicable

According to FCC Part 15.231 (b)(2) and 15.35 (c), For pulse operation transmitter, the averaging pulsed emissions are calculated by peak value of measured emission plus duty cycle factor.

8.2 Test Procedure

With the EUT's antenna attached, the EUT's output signal was received by the test antenna, which was connected to the spectrum analyzer. Set the center frequency to 433.9MHz, than set the spectrum analyzer to Zero Span for the release time reading. During the testing, the switch was released then the EUT automatically deactivated.

8.3 Summary of Test Results/Plots




433.93MHz:

Type of Pulse	Width of Pulse (ms)	Quantity of Pulse	Transmission Time (ms)	Total Time (T _{on}) (ms)
Pulse 1 (Wide)	1.137	11	12.51	17.23
Pulse 2 (Narrow)	0.363	13	4.72	

Test Period (T _p)	Total Time (T _{on})	Duty Cycle	Duty Cycle Factor
ms	ms	%	dB
48	17.23	35.90	-8.90

Remark: Duty Cycle Factor=20*log(Duty Cycle)

Please refer to the attached test plots

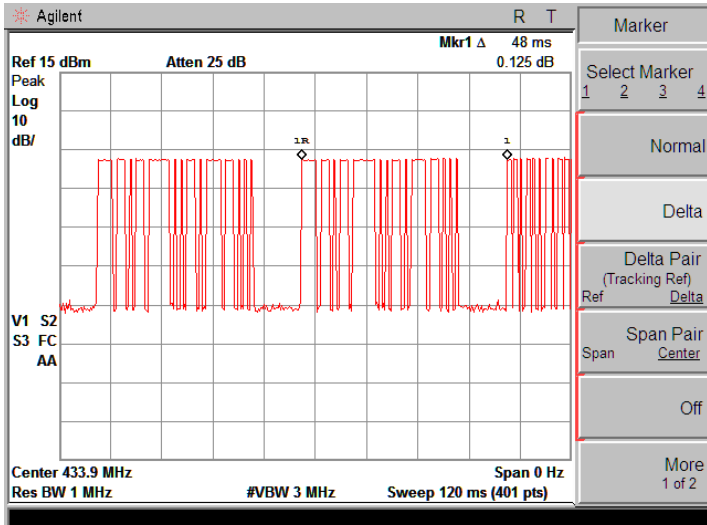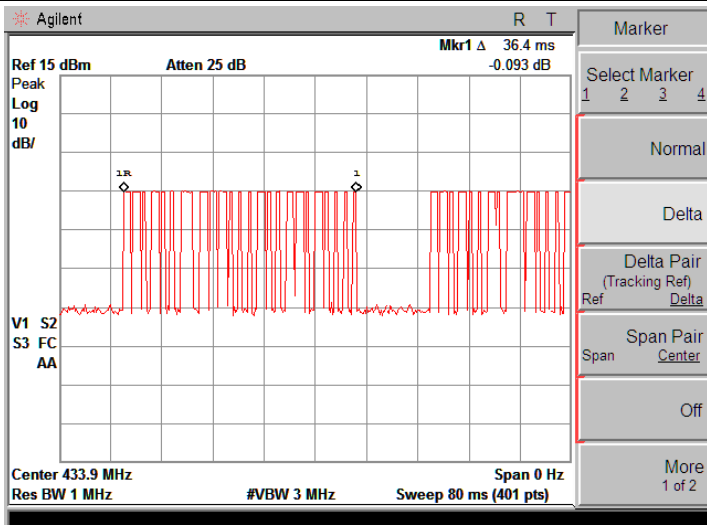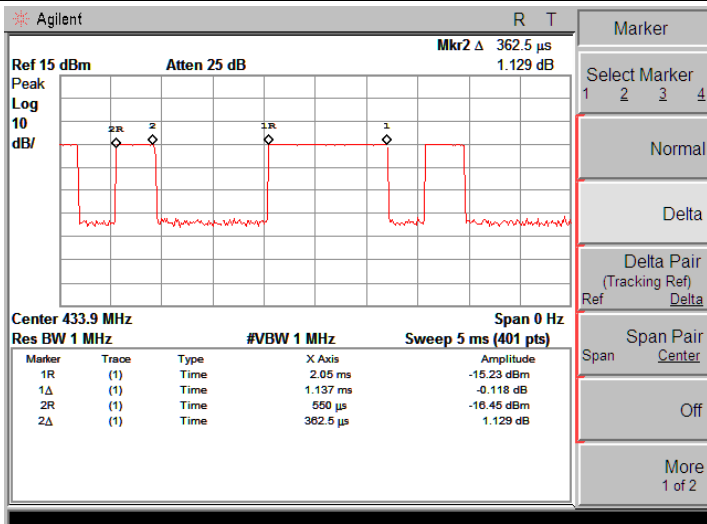433.9MHz																										
Test Period																										
Pulse Number																										
Pulse 1 and Pulse 2	 <table><tr><th>Marker</th><th>Trace</th><th>Type</th><th>X Axis</th><th>Amplitude</th></tr><tr><td>1R</td><td>(1)</td><td>Time</td><td>2.05 ms</td><td>-15.23 dBm</td></tr><tr><td>1A</td><td>(1)</td><td>Time</td><td>1.137 ms</td><td>-0.118 dB</td></tr><tr><td>2R</td><td>(1)</td><td>Time</td><td>550 μs</td><td>-16.45 dBm</td></tr><tr><td>2A</td><td>(1)</td><td>Time</td><td>362.5 μs</td><td>1.129 dB</td></tr></table>	Marker	Trace	Type	X Axis	Amplitude	1R	(1)	Time	2.05 ms	-15.23 dBm	1A	(1)	Time	1.137 ms	-0.118 dB	2R	(1)	Time	550 μs	-16.45 dBm	2A	(1)	Time	362.5 μs	1.129 dB
Marker	Trace	Type	X Axis	Amplitude																						
1R	(1)	Time	2.05 ms	-15.23 dBm																						
1A	(1)	Time	1.137 ms	-0.118 dB																						
2R	(1)	Time	550 μs	-16.45 dBm																						
2A	(1)	Time	362.5 μs	1.129 dB																						

***** END OF REPORT *****