

FCC Test Report

Report No.: AGC00793220802FE04

FCC ID : 2AQN2-T12PRO

APPLICATION PURPOSE: Original Equipment

PRODUCT DESIGNATION: MOTORCYCLE BLUETOOTH INTERCOM

BRAND NAME : N/A

MODEL NAME : T12PRO

APPLICANT: Shenzhen winnerelec Industrial CO., LTD

DATE OF ISSUE : Sep. 20, 2022

STANDARD(S)

TEST PROCEDURE(S) : FCC Part 15 Rules

REPORT VERSION : V1.0

Attestation of Global Carnaliance (Shenzhen) Co., Ltd





Page 2 of 32


REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Sep. 20, 2022	Valid	Initial Release




TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	5
2. GENERAL INFORMATION	6
2.1. PRODUCT DESCRIPTION	6
2.2. TABLE OF CARRIER FREQUENCY	7
3. MEASUREMENT UNCERTAINTY	8
4. DESCRIPTION OF TEST MODES	9
5. SYSTEM TEST CONFIGURATION	10
5.1. CONFIGURATION OF EUT SYSTEM	10
5.2 EQUIPMENT USED IN TESTED SYSTEM	10
5.3. SUMMARY OF TEST RESULTS	10
6. TEST FACILITY	11
7. RADIATED EMISSION	12
7.1TEST LIMIT	12
7.2. MEASUREMENT PROCEDURE	13
7.3. TEST SETUP	
7.4. TEST RESULT	16
8. BAND EDGE EMISSION	22
8.1TEST LIMIT	22
8.2. MEASUREMENT PROCEDURE	22
8.3 TEST SETUP	22
8.4 TEST RESULT	22
9. 20DB BANDWIDTH	27
9.1. MEASUREMENT PROCEDURE	27
9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	27
9.3. MEASUREMENT RESULTS	28
10. FCC LINE CONDUCTED EMISSION TEST	30
10.1. LIMITS OF LINE CONDUCTED EMISSION TEST	30





APPENDIX B: PHOTOGRAPHS OF THE EUT	32
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	32
10.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	31
10.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	31
10.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	31
10.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	30





1. VERIFICATION OF CONFORMITY

Applicant	Shenzhen winnerelec Industrial CO., LTD
Address 411-416 Room Social security building, Honghua Bei, Road Gongming Str Guangming New District, Shenzhen, China	
Manufacturer	Shenzhen winnerelec Industrial CO., LTD
Address 411-416 Room Social security building, Honghua Bei, Road Gongming Stree Guangming New District, Shenzhen, China	
Factory	Shenzhen winnerelec Industrial CO., LTD
Address 411-416 Room Social security building, Honghua Bei, Road Gongming Stre Guangming New District, Shenzhen, China	
Product Designation MOTORCYCLE BLUETOOTH INTERCOM	
Brand Name	N/A
Test Model	T12PRO
Date of test	Aug. 03, 2022 to Sep. 20, 2022
Deviation	No any deviation from the test method
Condition of Test Sample Normal	
Test Result	Pass
Report Template	AGCRT-US-BR/RF

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.249.

Prepared By	Bibo zhay		
	Bibo Zhang (Project Engineer)	Sep. 20, 2022	
Reviewed By	Calvin Lin		
	Calvin Liu (Reviewer)	Sep. 20, 2022	
Approved By	Max Zhang		
	Max Zhang (Authorized Officer)	Sep. 20, 2022	

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/




Page 6 of 32

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

Operation Frequency 2401 MHz to 2441 MHz	
Maximum field strength 93.47dBuV/m(average)@3m	
Modulation	GFSK
Number of channels	41
Antenna Gain	0dBi
Antenna Designation	Ceramic antenna (Met 15.203 Antenna requirement)
Hardware Version	T12_PRO_V1
Software Version	T12_PRO_REV:02
Power Supply	DC 3.7V by battery





2.2. TABLE OF CARRIER FREQUENCY

Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)
1	2401	22	2422
2	2402	23	2423
3	2403	24	2424
4	2404	25	2425
5	2405	26	2426
6	2406	27	2427
7	2407	28	2428
8	2408	29	2429
9	2409	30	2430
10	2410	31	2431
11	2411	32	2432
12	2412	33	2433
13	2413	34	2434
14	2414	35	2435
15	2415	36	2436
16	2416	37	2437
17	2417	38	2438
18	2418	39	2439
19	2419	40	2440
20	2420	41	2441
21	2421		



Page 8 of 32

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

- Uncertainty of Conducted Emission, Uc = ±3.2 dB
- Uncertainty of Radiated Emission below 1GHz, Uc = ±3.9 dB
- Uncertainty of Radiated Emission above 1GHz, Uc = ±4.8 dB
- Uncertainty of Occupied Channel Bandwidth: Uc = ±2 %



Page 9 of 32

4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK

Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. The EUT adjusts the frequency through the button.



Page 10 of 32

5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Radiated Emission Configure:

EUT	


5.2 EQUIPMENT USED IN TESTED SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	MOTORCYCLE BLUETOOTH INTERCOM	T12PRO	2AQN2-T12PRO	EUT

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.249&15.209	Radiated Emission	Compliant
§15.249	Band Edges	Compliant
§15.215	20dB bandwidth	Compliant
§15.207	Conducted Emission	Not applicable

Note: The EUT is battery operated without AC mains.





6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd	
Location 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Commur Fuhai Street, Bao'an District, Shenzhen, Guangdong, China		
Designation Number	CN1259	
FCC Test Firm Registration Number	975832	
A2LA Cert. No.	5054.02	
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA	

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Mar. 28, 2022	Mar. 27, 2023
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Nov. 17, 2021	Nov. 16, 2022
2.4GHz Fliter	EM Electronics	2400-2500MHz	N/A	Mar. 22, 2022	Mar. 21, 2024
Attenuator	ZHINAN	E-002	N/A	Aug. 03, 2022	Aug. 02, 2024
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Oct. 31, 2021	Oct. 30, 2023
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	Mar. 12, 2022	Mar. 11, 2024
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	Apr. 23, 2021	Apr. 22, 2023
Broadband Preamplifier	ETS LINDGREN	3117PA	00225134	Aug. 03, 2022	Aug. 02, 2024
ANTENNA	SCHWARZBECK	VULB9168	494	Jan. 08, 2020	Jan. 07, 2023



Page 12 of 32

7. RADIATED EMISSION

7.1TEST LIMIT

Standard FCC15.249

Fundamental Frequency	Field Strength of Fundamental	Field Strength of Harmonics
	(millivolts/meter)	(microvolts/meter)
900-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

Standard FCC 15.209

Frequency	Distance	Field Strengths Limit		
(MHz)	Meters	μ V/m	dB(μV)/m	
0.009 ~ 0.490	300	2400/F(kHz)		
0.490 ~ 1.705	30	24000/F(kHz)		
1.705 ~ 30	30	30		
30 ~ 88	3	100	40.0	
88 ~ 216	3	150	43.5	
216 ~ 960	3	200	46.0	
960 ~ 1000	3	500	54.0	
Above 1000	3	Other:74.0 dB(µV)/m (Peal	k) 54.0 dB(μV)/m (Average)	

Remark:

- (1) Emission level dB μ V = 20 log Emission level μ V/m
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.



Page 13 of 32

7.2. MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use minimum resolution bandwidth of 1 MHz. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.



Page 14 of 32

The following table is the setting of spectrum analyzer and receiver.


Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
	1GHz~26.5GHz
Start ~Stop Frequency	RBW 2.4MHz/ VBW 8MHz for Peak,
	RBW 2.4MHz/10Hz for Average

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP




7.3. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

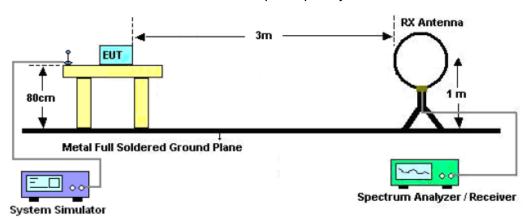

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

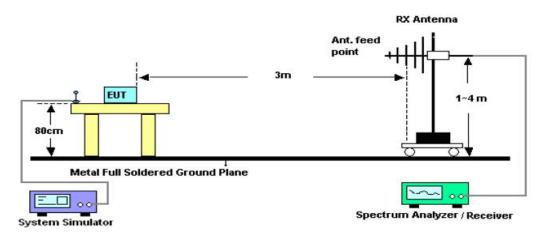

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

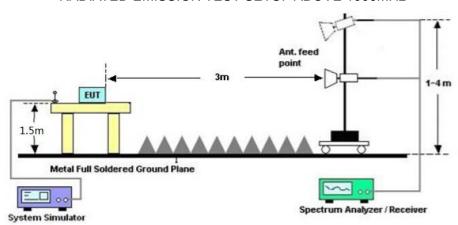




7.4. TEST RESULT

RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION 30MHz-1GHZ

 -	MOTORCYCLE BLUETOOTH INTERCOM	Model Name. :	T12PRO
Temperature:	23.1 ℃	Relative Humidity:	66%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	Mode 1	Polarization :	Horizontal

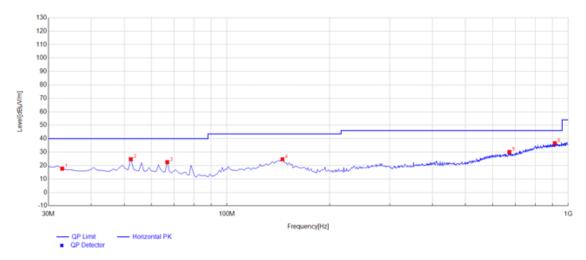


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	32.91	17.71	11.62	40.00	22.29	100	2	Horizontal
2	52.31	24.72	11.49	40.00	15.28	100	0	Horizontal
3	66.86	22.56	9.76	40.00	17.44	100	0	Horizontal
4	145.43	24.64	17.07	43.50	18.86	100	83	Horizontal
5	672.14	30.12	23.69	46.00	15.88	100	157	Horizontal
6	913.67	36.59	30.78	46.00	9.41	100	0	Horizontal

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



 -	MOTORCYCLE BLUETOOTH INTERCOM	Model Name. :	T12PRO
Temperature:	23.1 ℃	Relative Humidity:	66%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	Mode 1	Polarization :	Vertical

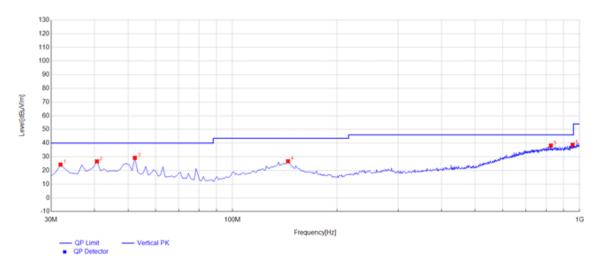

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	31.94	24.33	10.19	40.00	15.67	100	358	Vertical
2	40.67	26.64	10.79	40.00	13.36	100	213	Vertical
3	52.31	29.27	11.49	40.00	10.73	100	108	Vertical
4	144.46	26.75	18.77	43.50	16.75	100	108	Vertical
5	826.37	38.22	31.50	46.00	7.78	100	334	Vertical
6	954.41	38.82	32.97	46.00	7.18	100	176	Vertical

RESULT: PASS

Note:

Factor=Antenna Factor + Cable loss, Margin=Limit-Level.

The "Factor" value can be calculated automatically by software of measurement system.





Page 18 of 32


FIELD STRENGTH OF FUNDAMENTAL

HUI :	MOTORCYCLE BLUETOOTH INTERCOM	Model Name. :	T12PRO
Temperature:	23.1 ℃	Relative Humidity:	66%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Modulation :	GFSK	Polarization :	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
2401	103.36	-9.61	93.75	114.00	-20.25	peak
2401	103.06	-9.61	93.45	94.00	-0.55	AVG
2421	99.28	-9.61	89.67	114.00	-24.33	peak
2421	98.46	-9.61	88.85	94.00	-5.15	AVG
2441	101.56	-9.61	91.95	114.00	-22.05	peak
2441	101.25	-9.61	91.64	94.00	-2.36	AVG
Remark:						
Factor = Ante	nna Factor + C	able Loss – Pi	re-amplifier.	_		

	MOTORCYCLE BLUETOOTH INTERCOM	Model Name. :	T12PRO
Temperature:	23.1℃	Relative Humidity:	66%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V
Test Modulation :	GFSK	Polarization :	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
2401	103.40	-9.61	93.79	114.00	-20.21	peak	
2401	103.08	-9.61	93.47	94.00	-0.53	AVG	
2421	98.57	-9.61	88.96	114.00	-25.04	peak	
2421	98.37	-9.61	88.76	94.00	-5.24	AVG	
2441	101.49	-9.61	91.88	114.00	-22.12	peak	
2441 101.17 -9.61 91.56 94.00 -2.44 AVG							
Remark:							
Factor = Ante	Factor = Antenna Factor + Cable Loss – Pre-amplifier.						






RADIATED EMISSION ABOVE 1GHZ

H-111 :	MOTORCYCLE BLUETOOTH INTERCOM	Model Name. :	T12PRO
Temperature:	23.1 ℃	Relative Humidity:	66%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	Mode 1	Polarization :	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4802	48.73	3.76	52.49	74.00	-21.51	peak
4802	43.48	3.76	47.24	54.00	-6.76	AVG
7203	42.56	8.17	50.73	74.00	-23.27	peak
7203 38.64 8.17 46.81 54.00 -7.19 AVG						
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

HUI :	MOTORCYCLE BLUETOOTH INTERCOM	Model Name. :	T12PRO
Temperature:	23.1 ℃	Relative Humidity:	66%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	Mode 1	Polarization :	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4802	47.95	3.76	51.71	74.00	-22.29	peak
4802	43.86	3.76	47.62	54.00	-6.38	AVG
7203	42.13	8.17	50.30	74.00	-23.70	peak
7203 37.57 8.17 45.74 54.00 -8.26 AVG						
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						






HUI :	MOTORCYCLE BLUETOOTH INTERCOM	Model Name. :	T12PRO
Temperature:	23.1 ℃	Relative Humidity:	66%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	Mode 2	Polarization :	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4842	47.24	3.78	51.02	74.00	-22.98	peak
4842	43.55	3.78	47.33	54.00	-6.67	AVG
7263	43.86	8.23	52.09	74.00	-21.91	peak
7263 39.58 8.23 47.81 54.00 -6.19 AVG						
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

FUI:	MOTORCYCLE BLUETOOTH INTERCOM	Model Name. :	T12PRO
Temperature:	23.1 ℃	Relative Humidity:	66%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	Mode 2	Polarization:	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4842	48.99	3.78	52.77	74.00	-21.23	peak
4842	42.64	3.78	46.42	54.00	-7.58	AVG
7263	44.13	8.23	52.36	74.00	-21.64	peak
7263 39.98 8.23 48.21 54.00 -5.79 AVG						
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						





EUI.	MOTORCYCLE BLUETOOTH INTERCOM	Model Name. :	T12PRO
Temperature:	23.1 ℃	Relative Humidity:	66%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	Mode 3	Polarization:	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4882	47.86	3.81	51.67	74.00	-22.33	peak
4882	44.25	3.81	48.06	54.00	-5.94	AVG
7323	42.17	8.27	50.44	74.00	-23.56	peak
7323 38.64 8.27 46.91 54.00 -7.09 AVG						
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

IFUI .	MOTORCYCLE BLUETOOTH INTERCOM	Model Name. :	T12PRO
Temperature:	23.1 ℃	Relative Humidity:	66%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	Mode 3	Polarization:	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4882	48.65	3.81	52.46	74.00	-21.54	peak
4882	43.12	3.81	46.93	54.00	-7.07	AVG
7323	44.51	8.27	52.78	74.00	-21.22	peak
7323	40.29	8.27	48.56	54.00	-5.44	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Note: Other emissions from 8G to 25 GHz are considered as ambient noise. No recording in the test report. Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Level-Limit.

The "Factor" value can be calculated automatically by software of measurement system.



8. BAND EDGE EMISSION

8.1TEST LIMIT


	Limit of the Field Strength (dBµV/m)		
Frequency Band	Peak	Average	
f≤2390MHz	74	54	
f≥2483.5MHz	74	54	

8.2. MEASUREMENT PROCEDURE

- 1. The EUT operates at transmitting mode. The operate channel is tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.
- 2. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission: (a) PEAK: RBW=1MHz, VBW=3MHz / Sweep=AUTO
- (b) AVERAGE: RBW=1MHz; VBW=1/on time(1KHz) / Sweep=AUTO
- 3. Other procedures refer to clause 7.2.

8.3 TEST SETUP


RADIATED EMISSION TEST SETUP

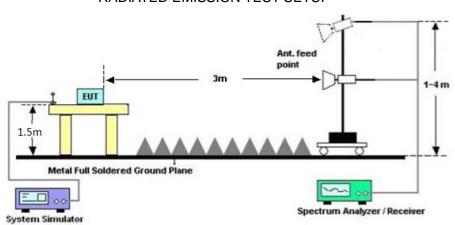

8.4 TEST RESULT


Note:

- 1. Factor=Antenna Factor + Cable loss Amplifier gain. Field Strength=Factor + Reading level
- 2. The factor had been edited in the "Input Correction" of the Spectrum Analyzer. So the Amplitude of test plots is equal to Reading level plus the Factor in dB. Use the A dB(μ V) to represent the Amplitude. Use the F dB(μ V/m) to represent the Field Strength. So A=F.







IEUI .	MOTORCYCLE BLUETOOTH INTERCOM	Model Name. :	T12PRO
Temperature:	23.1 ℃	Relative Humidity:	66%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	Mode 1	Polarization :	Horizontal

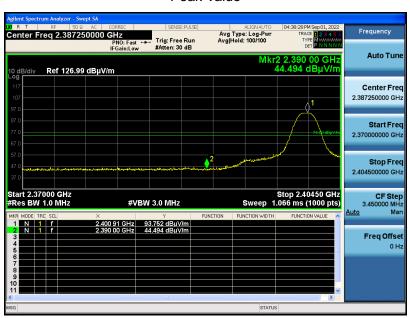

Average Value

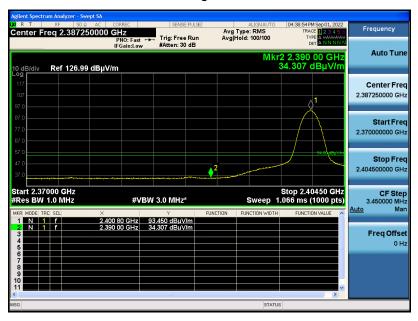





HUI :	MOTORCYCLE BLUETOOTH INTERCOM	Model Name. :	T12PRO
Temperature:	23.1 ℃	Relative Humidity:	66%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	Mode 1	Polarization :	Vertical




Average Value



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/






IFUI .	MOTORCYCLE BLUETOOTH INTERCOM	Model Name. :	T12PRO
Temperature:	23.1 ℃	Relative Humidity:	66%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	Mode 3	Polarization :	Horizontal



Average Value







HUI .	MOTORCYCLE BLUETOOTH INTERCOM	Model Name. :	T12PRO
Temperature:	23.1 ℃	Relative Humidity:	66%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	Mode 3	Polarization :	Vertical




Average Value



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/







9. 20DB BANDWIDTH

9.1. MEASUREMENT PROCEDURE

- 1. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 2. Set SPA Centre Frequency = Operation Frequency, RBW= 30 KHz, VBW ≥1 × RBW.
- 3. Set SPA Trace 1 Max hold, then View.

9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

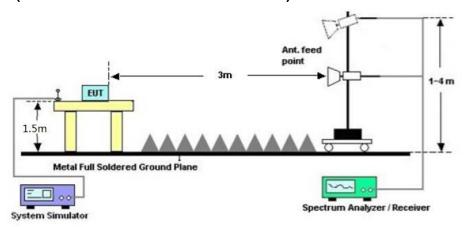






9.3. MEASUREMENT RESULTS

TEST ITEM	20DB BANDWIDTH
TEST MODULATION	GFSK


Test Data (MHz)	Criteria	
Low Channel	1.346	PASS
Middle Channel	1.350	PASS
High Channel	1.371	PASS

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

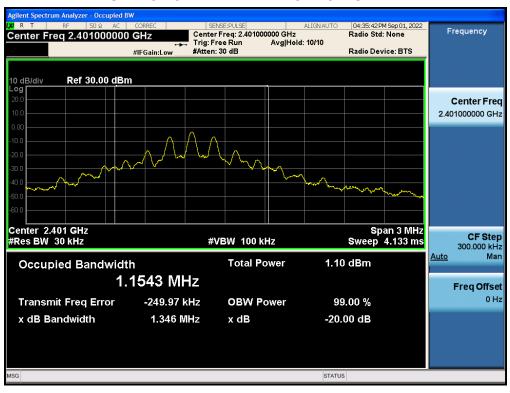




TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

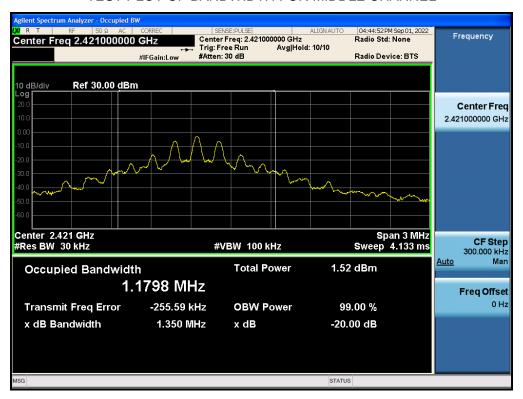

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

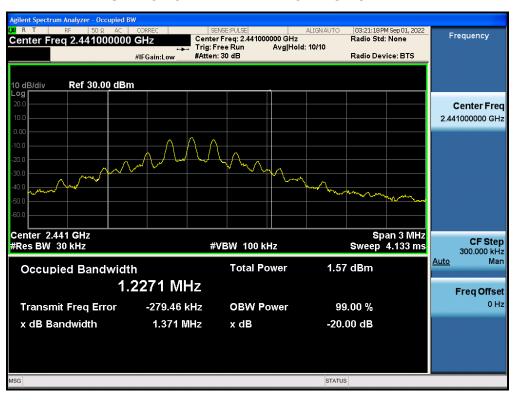

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



10. FCC LINE CONDUCTED EMISSION TEST


10.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Francisco	Maximum RF Line Voltage		
Frequency	Q.P.(dBuV)	Average(dBuV)	
150kHz~500kHz	66-56	56-46	
500kHz~5MHz	56	46	
5MHz~30MHz	60	50	

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50MHz.

10.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

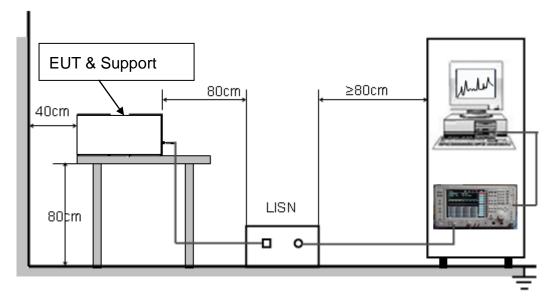



Page 31 of 32

10.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipments received AC120VV/60Hz power from a LISN, if any.
- 5. The EUT received charging voltage by adapter which received 120V/60Hzpower by a LISN..
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.


10.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

10.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

N/A

Note: The EUT is battery operated without AC mains.





APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Refer to the Report No.: AGC00793220802AP02

APPENDIX B: PHOTOGRAPHS OF THE EUT

Refer to the Report No.: AGC00793220802AP03

----END OF REPORT----



Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd. (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.