



TESTING LABORATORY  
CERTIFICATE#4323.01



# FCC PART 15.249 TEST REPORT

For

## Zhejiang Libiao Robotics Co., Ltd.

Room 603, South Building No. 2, Chaofeng East Road, Yuhang Economic Development District,  
Hangzhou, Zhejiang, China

**FCC ID: 2AQQMJTROBOTIIB**

<b>Report Type:</b> Original Report	<b>Product Type:</b> Sorting Robot
<b>Project Engineer:</b> Chao Gao	Chao Gao
<b>Report Number:</b> RSHA201013001-00C	
<b>Report Date:</b> 2020-12-02	
<b>Reviewed By:</b> Oscar Ye EMC Manager	Oscar Ye
<b>Test Laboratory:</b>	Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu province, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>

## TABLE OF CONTENTS

<b>GENERAL INFORMATION.....</b>	<b>3</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	3
OBJECTIVE .....	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY .....	3
MEASUREMENT UNCERTAINTY .....	4
TEST FACILITY .....	4
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>5</b>
JUSTIFICATION .....	5
EUT EXERCISE SOFTWARE .....	6
SUPPORT EQUIPMENT LIST AND DETAILS .....	6
EXTERNAL I/O CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP .....	7
<b>SUMMARY OF TEST RESULTS .....</b>	<b>8</b>
<b>TEST EQUIPMENT LIST .....</b>	<b>9</b>
<b>FCC§15.203 - ANTENNA REQUIREMENT.....</b>	<b>10</b>
APPLICABLE STANDARD .....	10
ANTENNA CONNECTOR CONSTRUCTION .....	10
<b>FCC §15.207 (A) – AC LINE CONDUCTED EMISSIONS .....</b>	<b>11</b>
APPLICABLE STANDARD .....	11
EUT SETUP.....	11
EMI TEST RECEIVER SETUP.....	11
TEST PROCEDURE .....	11
FACTOR & OVER LIMIT CALCULATION .....	12
TEST RESULTS SUMMARY.....	12
TEST DATA .....	12
<b>FCC§15.205, §15.209&amp;§15.249- RADIATED EMISSIONS &amp; OUT OF BAND EMISSION.....</b>	<b>15</b>
APPLICABLE STANDARD .....	15
EUT SETUP.....	15
TEST EQUIPMENT SETUP.....	16
TEST PROCEDURE .....	16
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	17
TEST RESULTS SUMMARY.....	17
TEST DATA .....	17
<b>FCC §15.215(C) – 20 DB BANDWIDTH TESTING.....</b>	<b>23</b>
APPLICABLE STANDARD .....	23
TEST PROCEDURE .....	23
TEST DATA .....	23

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

Applicant:	Zhejiang Libiao Robotics Co., Ltd.
Tested Model:	JTRobotIIB
Product Type:	Sorting Robot
Power Supply:	DC 4.6V from lithium batteries and DC 5.4V charged by charging pile
RF Function:	SRD
Operating Band/Frequency:	904.25~926.25 MHz
Channel Number:	89
Channel Separation:	250 kHz
Antenna Type:	Spring Antenna
*Maximum Antenna Gain	-5.02 dBi

#### *Charging pile Information:*

*Model: LBPower5330A*

*Input: AC100-240V 50/60Hz 10A*

*Output: 5.4V, 0~90A 486W*

*Note: The maximum antenna gain was provided by the applicant.*

*\*All measurement and test data in this report was gathered from production sample serial number: 20201013001. (Assigned by the BACL. The EUT supplied by the applicant was received on 2020-10-13)*

### Objective

This type approval report is prepared on behalf of *Zhejiang Libiao Robotics Co., Ltd.* in accordance with Part 2-Subpart J, and Part 15-Subparts A and C of the Federal Communication Commission rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209, 15.249 and 15.215 rules.

### Related Submittal(s)/Grant(s)

Part of system is to be submitted with the FCC ID: 2AQQMLBAP-102LU-900.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Lab Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

### Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19 dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth		0.5kHz
Temperature		1.0°C
Humidity		6%

### Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 974614 D01 and CAB identifier CN0004 under the ISED requirement. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

## SYSTEM TEST CONFIGURATION

### Justification

Channel list:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
9	904.25	41	912.25	73	920.25
10	904.50	42	912.50	74	920.50
11	904.75	43	912.75	75	920.75
12	905.00	44	913.00	76	921.00
13	905.25	45	913.25	77	921.25
14	905.50	46	913.50	78	921.50
15	905.75	47	913.75	79	921.75
16	906.00	48	914.00	80	922.00
17	906.25	49	914.25	81	922.25
18	906.50	50	914.50	82	922.50
19	906.75	51	914.75	83	922.75
20	907.00	52	915.00	84	923.00
21	907.25	53	915.25	85	923.25
22	907.50	54	915.50	86	923.50
23	907.75	55	915.75	87	923.75
24	908.00	56	916.00	88	924.00
25	908.25	57	916.25	89	924.25
26	908.50	58	916.50	90	924.50
27	908.75	59	916.75	91	924.75
28	909.00	60	917.00	92	925.00
29	909.25	61	917.25	93	925.25
30	909.50	62	917.50	94	925.50
31	909.75	63	917.75	95	925.75
32	910.00	64	918.00	96	926.00
33	910.25	65	918.25	97	926.25
34	910.50	66	918.50	/	/
35	910.75	67	918.75	/	/
36	911.00	68	919.00	/	/
37	911.25	69	919.25	/	/
38	911.50	70	919.50	/	/
39	911.75	71	919.75	/	/
40	912.00	72	920.00	/	/

EUT was tested with channel 9, 53, 97.

**EUT Exercise Software**

RF test tool: Test RF

\*Pre-scan with all the data rates, and the worst case was performed as below:

Frequency(MHz)	Power Level Setting
904.25	50
915.25	48
926.25	45

Note: The power level setting was declared by the applicant.

**Support Equipment List and Details**


Manufacturer	Description	Model	Serial Number
/	/	/	/

**External I/O Cable**


Cable Description	Length (m)	From Port	To
Power cable	0.8	Charger	LISN

### Block Diagram of Test Setup

For Conducted Emissions:

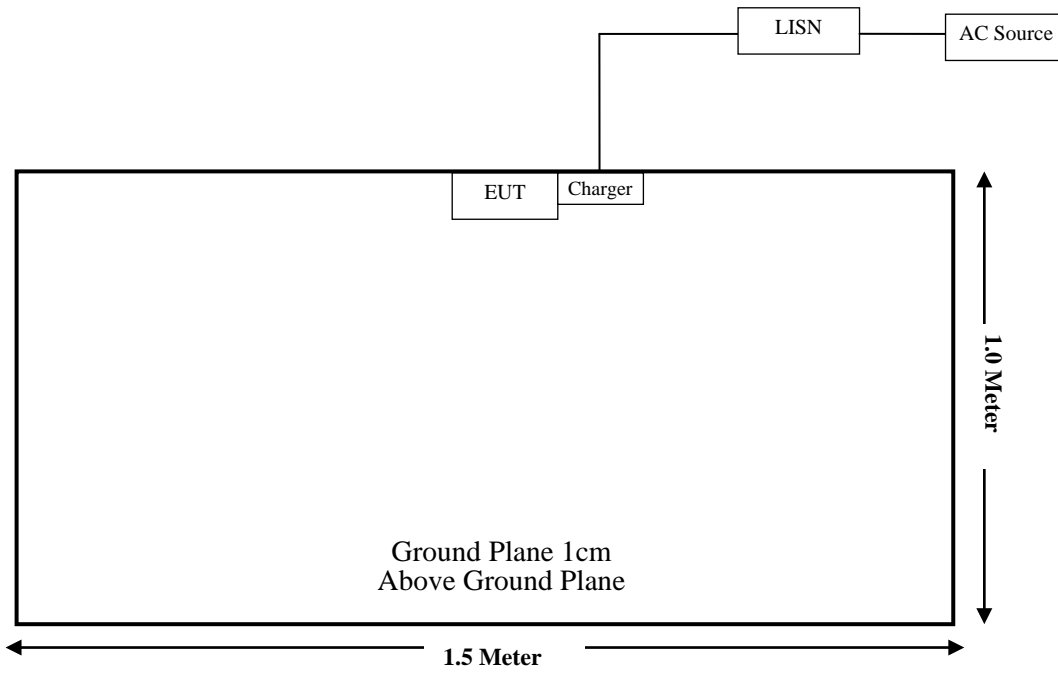

For Radiated Emissions(Below 1GHz & Above 1GHz):

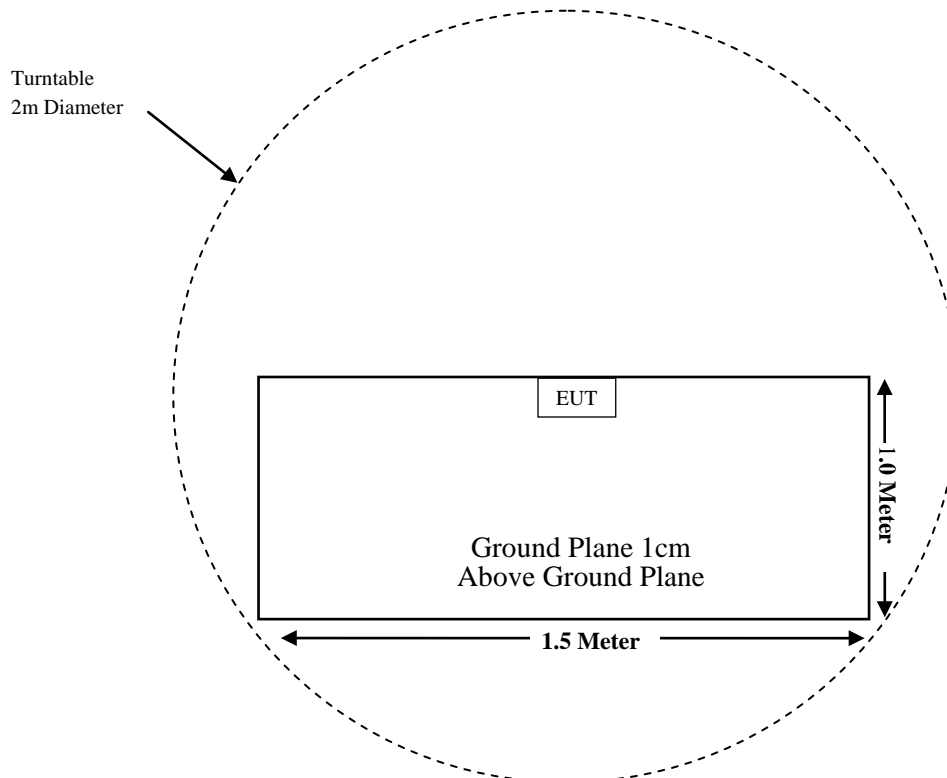

**SUMMARY OF TEST RESULTS**

<b>FCC Rules</b>	<b>Description of Test</b>	<b>Result</b>
§15.203	Antenna Requirement	Compliant
§15.207(a)	AC Line Conducted Emissions	Compliant
15.205, §15.209, §15.249	Radiated Emissions& Out of Band Emission	Compliant
§15.215 (c)	20 dB Bandwidth	Compliant



## TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
<b>Radiated Emission Test (Chamber 1#)</b>					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2019-12-14	2020-12-13
Sunol Sciences	Hybrid Antenna	JB3	A090314-1	2020-08-05	2023-08-04
Sonoma Instrument	Pre-amplifier	310N	171205	2020-08-14	2021-08-13
MICRO-TRONICS	Band Reject Filter	BRC50722	G013	2020-08-05	2021-08-04
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-8	008	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2020-08-15	2021-08-14
<b>Radiated Emission Test (Chamber 2#)</b>					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207	2020-04-01	2021-03-31
ETS-LINDGREN	Horn Antenna	3115	9207-3900	2019-07-15	2023-07-14
A.H.Systems,inc	Amplifier	PAM-0118P	512	2020-02-20	2021-02-19
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-6	006	2019-12-12	2020-12-11
MICRO-COAX	Coaxial Cable	Cable-11	011	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-12	012	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-13	013	2020-08-15	2021-08-14
<b>RF Conducted Test</b>					
Rohde & Schwarz	Signal Analyzer	ESIB26	100146	2019-12-14	2020-12-13
Narda	Attenuator	10dB	010	2020-08-15	2021-08-14
Zhejiang Libiao	RF Cable	Zhejiang Libiao C01	C01	Each Time	/
<b>Conducted Emission Test</b>					
Rohde & Schwarz	EMI Test Receiver	ESR	102454	2019-12-14	2020-12-13
Rohde & Schwarz	LISN	ENV216	101115	2019-12-14	2020-12-13
Audix	Test Software	e3	V9	/	/
Rohde & Schwarz	Pulse limiter	ESH3-Z2	100552	2020-03-01	2021-02-28
MICRO-COAX	Coaxial Cable	Cable-15	015	2020-08-15	2021-08-14

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## **FCC§15.203 - ANTENNA REQUIREMENT**

---

### **Applicable Standard**

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used.

### **Antenna Connector Construction**

The EUT has a spring antenna and antenna gain is -5.02 dBi, the antenna was permanently attached to the EUT, fulfill the requirement of this section, please refer to the EUT photos.


**Result:** Compliant.

## FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

### Applicable Standard

FCC§15.207

### EUT Setup

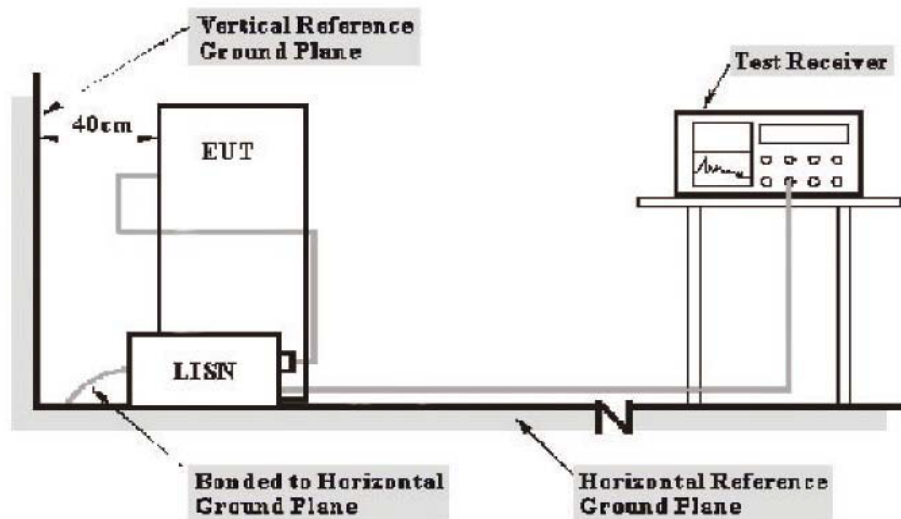

- Note:** 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

### Test Procedure

During the conducted emission test, the charger was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

## Factor & Over Limit Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Factor (dB)} = \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit of 7dB means the emission is 7 dB above the limit. The equation for Over Limit calculation is as follows:

$$\text{Over Limit (dB)} = \text{Read level (dB}\mu\text{V)} + \text{Factor (dB)} - \text{Limit (dB}\mu\text{V)}$$

## Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

### Test Data

#### Environmental Conditions


<b>Temperature:</b>	24.0 °C
<b>Relative Humidity:</b>	54 %
<b>ATM Pressure:</b>	101.1 kPa

*The testing was performed by Chao Gao on 2020-12-02.*

**Test Result:** Compliant.


*EUT operation mode: Charging*

AC 120V/60 Hz, Line

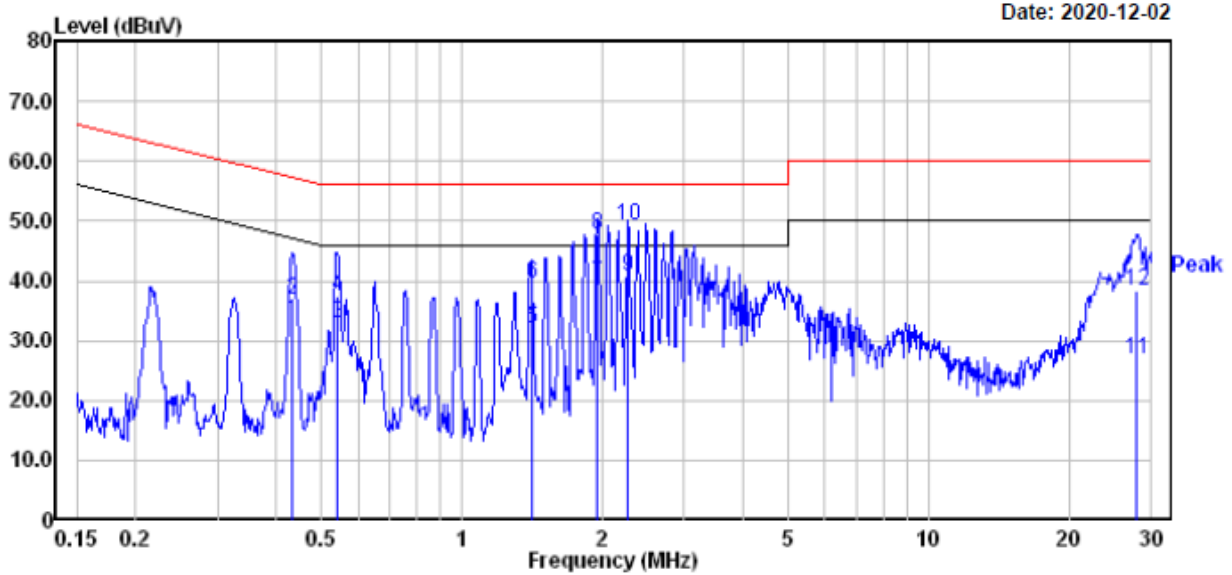

	Read Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.433	13.50	19.75	33.25	47.20	-13.95	Average
2	0.433	17.20	19.75	36.95	57.20	-20.25	QP
3	0.541	13.11	19.75	32.86	46.00	-13.14	Average
4	0.541	17.71	19.75	37.46	56.00	-18.54	QP
5	1.411	12.11	19.83	31.94	46.00	-14.06	Average
6	1.411	19.61	19.83	39.44	56.00	-16.56	QP
7	1.949	19.70	19.83	39.53	46.00	-6.47	Average
8	1.949	28.00	19.83	47.83	56.00	-8.17	QP
9	2.273	21.21	19.62	40.83	46.00	-5.17	Average
10	2.273	29.61	19.62	49.23	56.00	-6.77	QP
11	28.003	7.21	19.74	26.95	50.00	-23.05	Average
12	28.003	18.61	19.74	38.35	60.00	-21.65	QP

AC 120V/60 Hz, Neutral

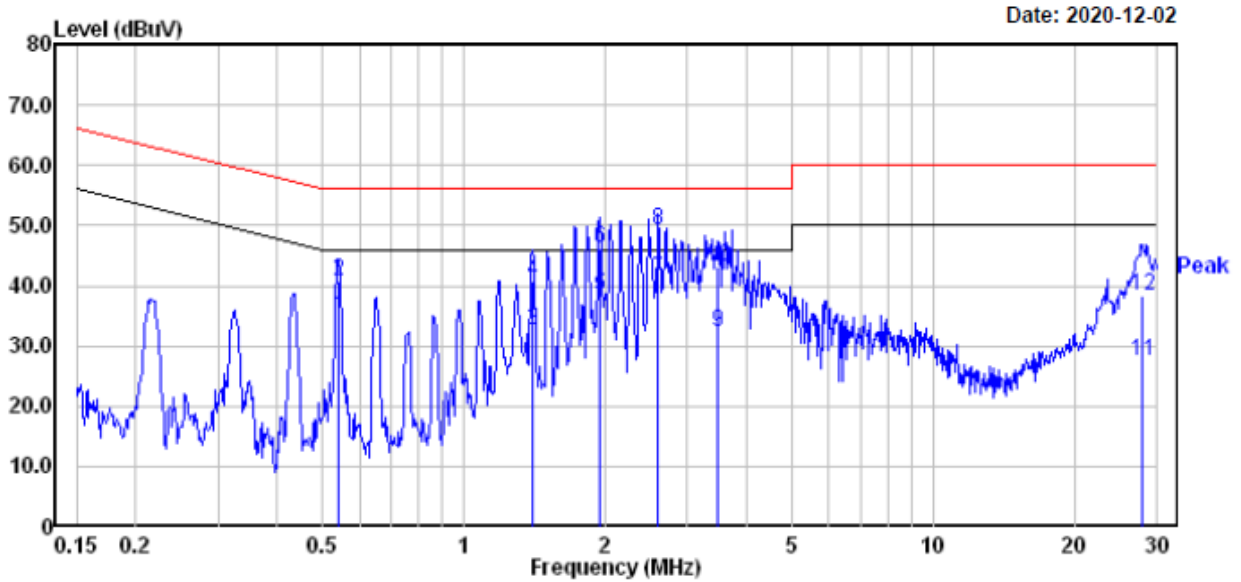

	Read Freq	Read Level	Factor	Limit Level	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB
1	0.541	15.11	19.75	34.86	46.00	-11.14 Average
2	0.541	20.91	19.75	40.66	56.00	-15.34 QP
3	1.403	12.91	19.83	32.74	46.00	-13.26 Average
4	1.403	20.81	19.83	40.64	56.00	-15.36 QP
5	1.949	18.40	19.83	38.23	46.00	-7.77 Average
6	1.949	26.50	19.83	46.33	56.00	-9.67 QP
7	2.594	21.49	19.48	40.97	46.00	-5.03 Average
8	2.594	29.79	19.48	49.27	56.00	-6.73 QP
9	3.491	12.90	19.46	32.36	46.00	-13.64 Average
10	3.491	23.80	19.46	43.26	56.00	-12.74 QP
11	27.855	7.80	19.74	27.54	50.00	-22.46 Average
12	27.855	18.70	19.74	38.44	60.00	-21.56 QP

Note:

- 1) Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)
- 2) Over Limit (dB) = Read level (dBUV) + Factor (dB) - Limit (dBUV)

## FCC§15.205, §15.209&§15.249- RADIATED EMISSIONS & OUT OF BAND EMISSION

### Applicable Standard

As per FCC§15.249 (a), except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:


Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902–928 MHz	50	500
2400–2483.5 MHz	50	500
5725–5875 MHz	50	500
24GHz-24.25GHz	250	2500

As per FCC§15.249 (c), Field strength limits are specified at a distance of 3 meters.


(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

### EUT Setup

Below 1 GHz:

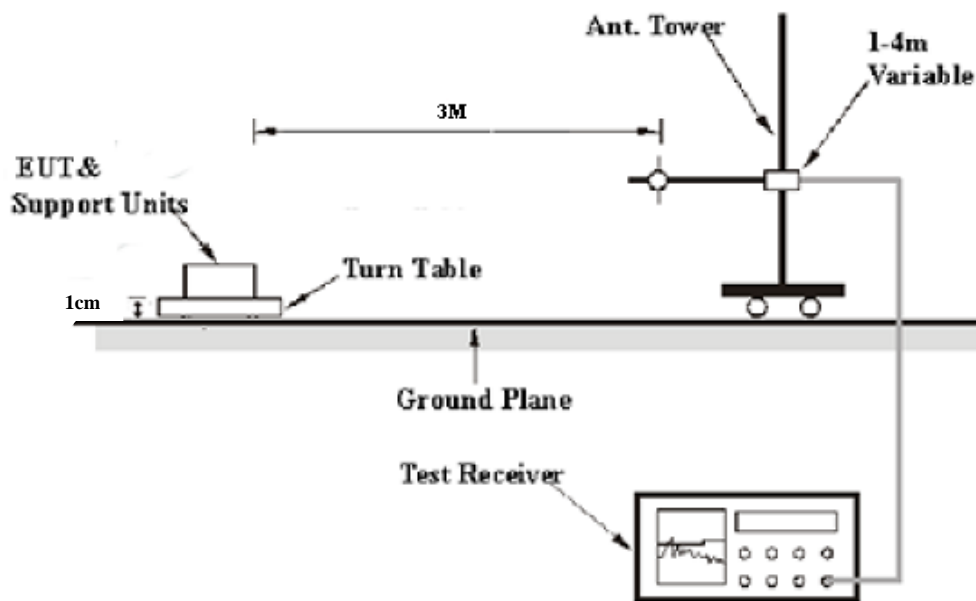

Above 1 GHz:

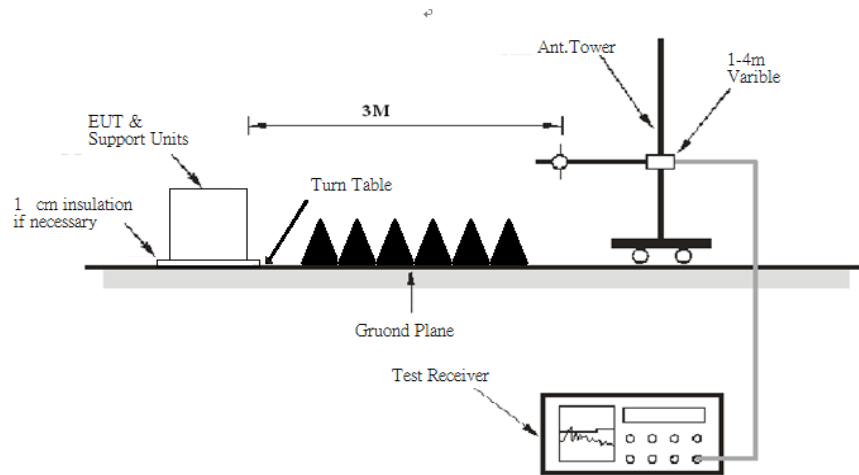

The radiated emission and out of band emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209/15.205 and FCC 15.249 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

**Test Equipment Setup**

The system was investigated from 30 MHz to 10GHz.

During the radiated emission test, the EMI test receiver Setup was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1GHz	1MHz	3 MHz	/	PK
	1MHz	3 MHz	/	Ave

**Test Procedure**

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.



## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Corrected Amplitude (dB $\mu$ V/m) = Meter Reading (dB $\mu$ V) + Antenna Factor (dB/m) + Cable Loss (dB) - Amplifier Gain (dB)

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin (dB) = Limit (dB $\mu$ V/m) - Corrected Amplitude (dB $\mu$ V/m)

## Test Results Summary

According to the data in the following table, the EUT complied with the FCC Part 15.209 &15.205 & 15.249.

### Test Data

#### Environmental Conditions

<b>Temperature:</b>	23.3°C
<b>Relative Humidity:</b>	54%
<b>ATM Pressure:</b>	101.5 kPa


*The testing was performed by Chao Gao on 2020-11-18.*

*Test Mode: Transmitting*

**Spurious Emission Test:**

**30 MHz - 1 GHz**

(Pre-scan in the X,Y and Z axes of orientation, the worst case **in Z-axis of orientation** was recorded.)

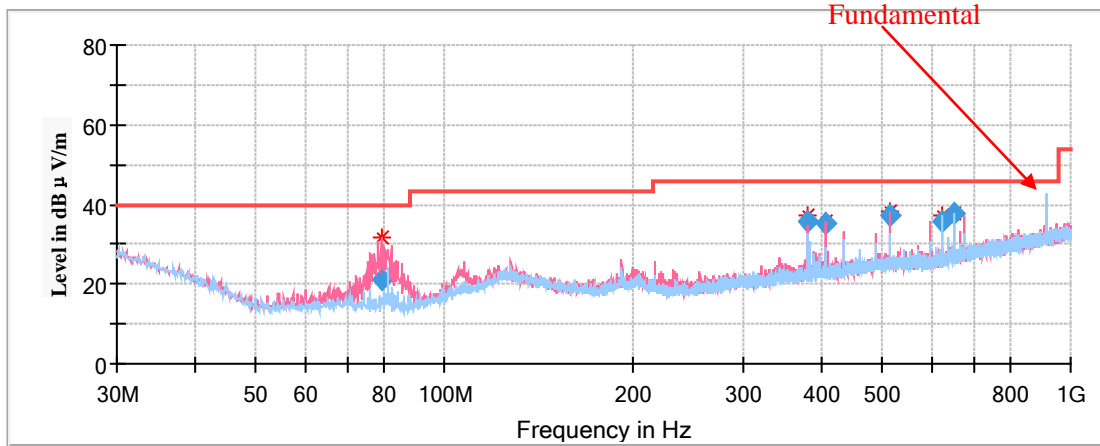

Frequency (MHz)	Corrected Amplitude QuasiPeak (dBμV/m)	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
		Height (cm)	Polar (H/V)				
79.532300	20.99	200.0	V	358.0	-18.1	40.00	19.01
379.693700	35.92	100.0	V	217.0	-9.1	46.00	10.08
406.871700	35.32	100.0	V	181.0	-8.4	46.00	10.68
515.360150	37.00	100.0	V	55.0	-5.9	46.00	9.00
623.846500	35.89	200.0	H	144.0	-4.9	46.00	10.11
650.978600	37.51	200.0	H	84.0	-4.3	46.00	8.49

**Note:**

Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)

Corrected Amplitude (dBμV/m) = Corrected Factor (dB/m) + Reading (dBμV)

Margin (dB) = Limit (dBμV/m) – Corrected Amplitude (dBμV/m)

**1GHz-10GHz**


(Pre-scan in the X,Y and Z axes of orientation, the worst case **Z-axis of orientation** was recorded.)

Note:

- 1. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) - Amplifier Factor (dB)
- Corrected Amplitude (dBµV/m) = Corrected Factor (dB/m) + Reading (dBµV)
- Margin (dB) = Limit (dBµV/m) - Corrected Amplitude (dBµV/m)

**Low Channel: 904.25 MHz**


Full Spectrum

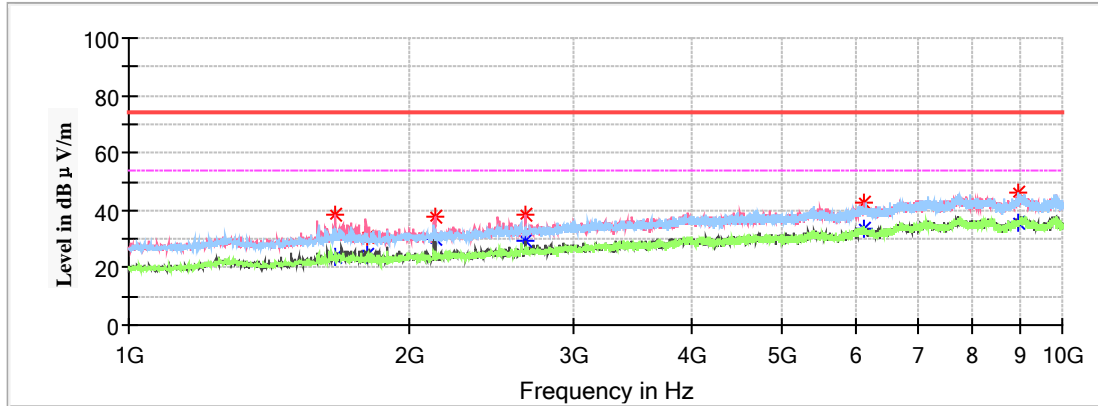

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1660.600000	38.43	---	250.0	V	2.0	-15.8	74.00	35.57
1660.600000	---	23.82	250.0	V	2.0	-15.8	54.00	30.18
1808.500000	---	24.74	250.0	V	2.0	-15.2	54.00	29.26
1808.500000	30.93	---	250.0	V	2.0	-15.2	74.00	43.07
2126.800000	---	30.19	250.0	V	280.0	-14.0	54.00	23.81
2126.800000	37.81	---	250.0	V	280.0	-14.0	74.00	36.19
2712.750000	---	29.14	200.0	V	246.0	-11.7	54.00	24.86
2712.750000	38.42	---	200.0	V	246.0	-11.7	74.00	35.58
6136.300000	42.68	---	200.0	V	220.0	-2.5	74.00	31.32
6136.300000	---	33.27	200.0	V	220.0	-2.5	54.00	20.73
8983.900000	45.97	---	250.0	H	151.0	1.9	74.00	28.03
8983.900000	---	35.45	250.0	H	151.0	1.9	54.00	18.55

**Middle Channel: 915.25 MHz**


Full Spectrum

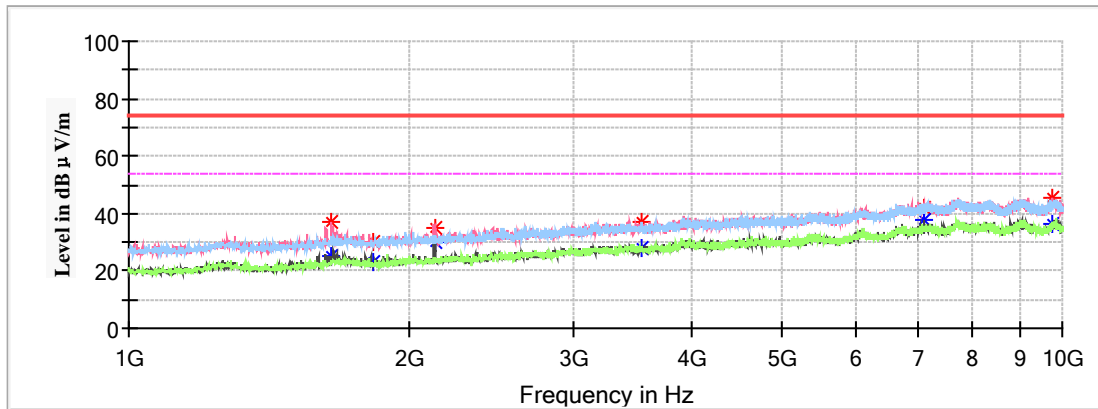

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1648.000000	36.98	---	250.0	V	28.0	-15.8	74.00	37.02
1648.000000	---	25.28	250.0	V	28.0	-15.8	54.00	28.72
1830.500000	---	23.07	200.0	V	215.0	-15.1	54.00	30.93
1830.500000	30.40	---	200.0	V	215.0	-15.1	74.00	43.60
2127.700000	---	29.77	250.0	V	285.0	-13.9	54.00	24.23
2127.700000	35.11	---	250.0	V	285.0	-13.9	74.00	38.89
3539.800000	---	27.65	250.0	H	258.0	-8.7	54.00	26.35
3539.800000	37.41	---	250.0	H	258.0	-8.7	74.00	36.59
7111.000000	42.14	---	200.0	V	114.0	0.2	74.00	31.86
7111.000000	---	37.64	200.0	V	114.0	0.2	54.00	16.36
9747.100000	45.56	---	200.0	V	36.0	2.0	74.00	28.44
9747.100000	---	36.38	200.0	V	36.0	2.0	54.00	17.62

**High Channel: 926.25 MHz**

Full Spectrum

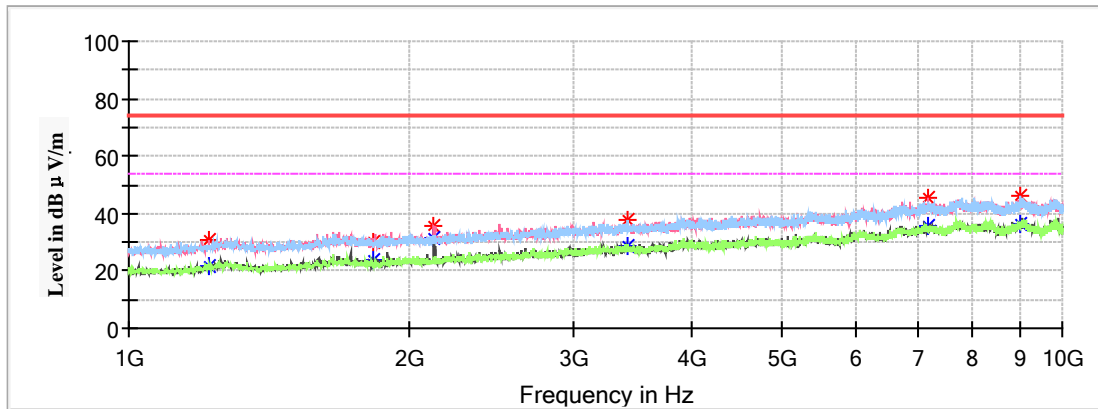

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1218.700000	30.99	---	200.0	V	8.0	-17.9	74.00	43.01
1218.700000	---	21.37	200.0	V	8.0	-17.9	54.00	32.63
1852.500000	---	23.62	250.0	V	229.0	-15.1	54.00	30.38
1852.500000	30.34	---	250.0	V	229.0	-15.1	74.00	43.66
2124.100000	---	31.77	250.0	V	280.0	-14.0	54.00	22.23
2124.100000	36.01	---	250.0	V	280.0	-14.0	74.00	37.99
3421.900000	---	28.64	250.0	H	101.0	-9.0	54.00	25.36
3421.900000	37.97	---	250.0	H	101.0	-9.0	74.00	36.03
7170.400000	---	35.54	250.0	V	165.0	0.3	54.00	18.46
7170.400000	45.29	---	250.0	V	165.0	0.3	74.00	28.71
9034.300000	---	36.48	200.0	V	319.0	1.9	54.00	17.52
9034.300000	45.84	---	200.0	V	319.0	1.9	74.00	28.16

**Fundamental Test & Restricted Bands Emissions Test:***(Pre-scan in the X, Y and Z axes of orientation, the worst case Z-axis of orientation was recorded.)*

Note:

1. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)

Corrected Amplitude (dB $\mu$ V/m) = Corrected Factor (dB/m) + Reading (dB $\mu$ V)Margin (dB) = Limit (dB $\mu$ V/m) – Corrected Amplitude (dB $\mu$ V/m)

Frequency (MHz)	Corrected Amplitude	Detector (PK/QP/Ave.)	Rx Antenna		Turntable	Corrected Factor (dB/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	(dB $\mu$ V/m)		Height (cm)	Polar (H/V)	Degree			
<b>Channel Frequency: 904.25 MHz</b>								
904.25	93.57	QP	150	H	90.0	0.2	94	0.43
904.25	92.81	QP	150	V	340.0	0.3	94	1.19
902.00	34.65	QP	100	H	75.0	1.3	46	11.35
902.00	34.02	QP	100	V	38.0	1.3	46	11.98
<b>Channel Frequency: 915.25MHz</b>								
915.25	92.59	QP	150	H	182.0	0.4	94	1.41
915.25	92.30	QP	150	V	344.0	0.4	94	1.70
<b>Channel Frequency: 926.25 MHz</b>								
926.25	93.45	QP	100	H	242.0	0.7	94	0.55
926.25	92.93	QP	100	V	102.0	0.7	94	1.07
928.00	34.24	QP	200	H	55.0	1.2	46	11.76
928.00	33.49	QP	200	V	274.0	1.2	46	12.51

## FCC §15.215(c) – 20 dB BANDWIDTH TESTING

### Applicable Standard

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

### Test Data

#### Environmental Conditions

<b>Temperature:</b>	23.3 °C
<b>Relative Humidity:</b>	54 %
<b>ATM Pressure:</b>	101.5 kPa


*The testing was performed by Chao Gao on 2020-11-19.*

**Test Result:** Compliant.


*Test Mode: Transmitting*

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
Low	904.25	0.207
Middle	915.25	0.207
High	926.25	0.206

### Low Channel

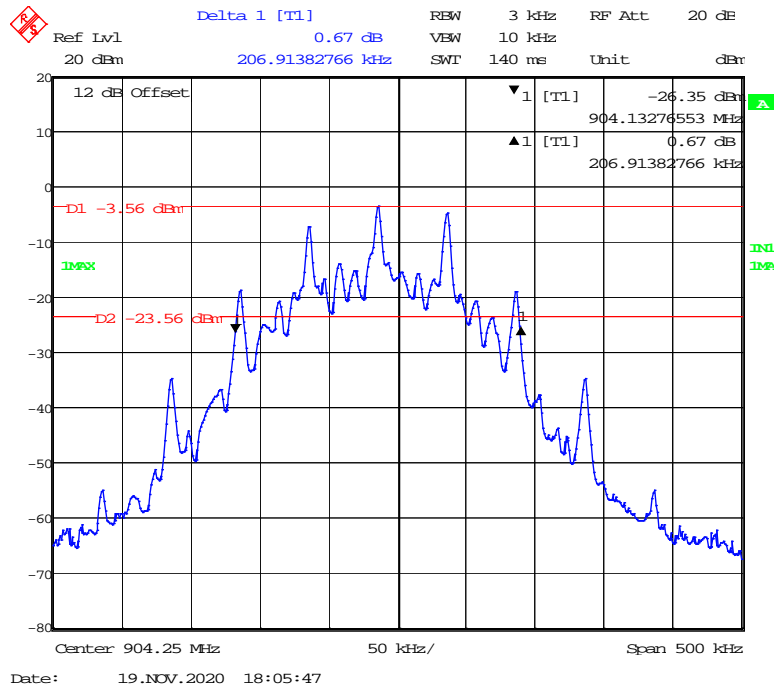


### Middle Channel

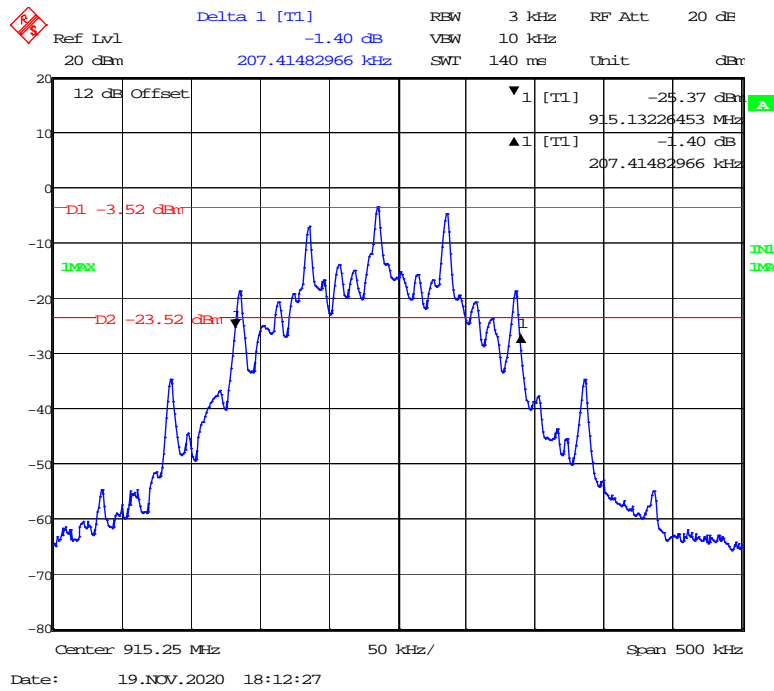



### High Channel

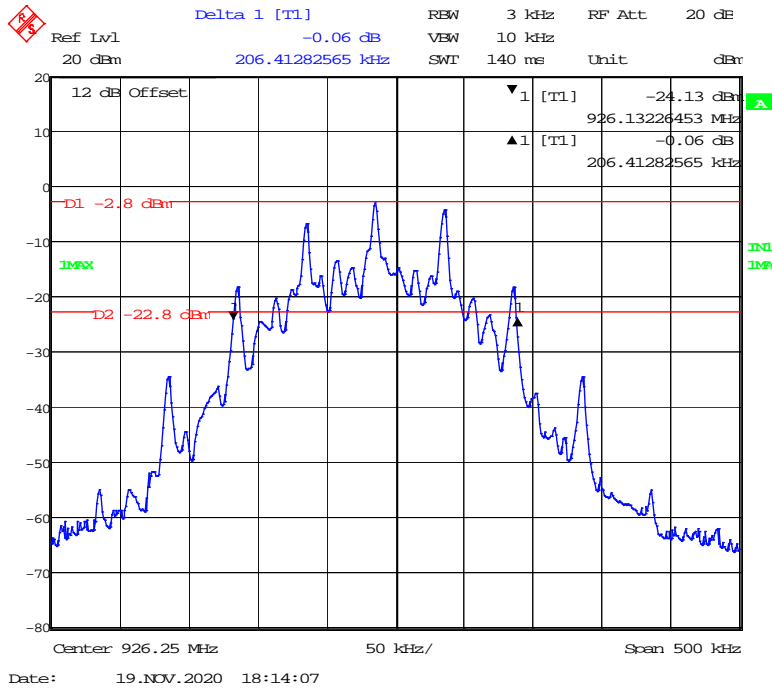

## Declarations

1: BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '\*'. Customer model name, addresses, names, trademarks etc. are not considered data.

2: Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

3: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

4: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor  $K$  with the 95% confidence interval.

5: This report cannot be reproduced except in full, without prior written approval of the Company.

6: This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

**\*\*\*\*\* END OF REPORT \*\*\*\*\***