



# FCC TEST REPORT

**Test report  
On Behalf of  
Shenzhen Liyin Electroacoustic Technology Co.,Ltd.  
For  
ACTIVE NOISE CANCELLATION BLUETOOTH  
HEADPHONE  
Model No.: ANC-CLF01**

**FCC ID: 2AQQP-F01**

**Prepared for :** Shenzhen Liyin Electroacoustic Technology Co.,Ltd.  
Room 303, 3rd Floor, Building A, 11-101 (Wenyou Color Printing), No. 1, Liuhe Road, Henggang Town, Longgang District, Shenzhen City, Guangdong, China

**Prepared By :** Shenzhen HUAKE Testing Technology Co., Ltd.  
1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street, Bao'an District, Shenzhen City, China

**Date of Test:** Jul. 25, 2018 ~ Aug. 06, 2018

**Date of Report:** Aug. 07, 2018

**Report Number:** HUAKE180803687E



### TEST RESULT CERTIFICATION

**Applicant's name** ..... : Shenzhen Liyin Electroacoustic Technology Co.,Ltd.  
 Room 303, 3rd Floor, Building A, 11-101 (Wenyou Color Printing),  
**Address** ..... : No. 1, Liuhe Road, Henggang Town, Longgang District, Shenzhen  
 City, Guangdong, China  
**Manufacture's Name**..... : Shenzhen Meichenke Technology Co.,Ltd.  
 54A, Liuyue Pu Xia Road, Henggang Town, Longgang District,  
**Address** ..... : Shenzhen City, Guangdong, China


**Product description**


Trade Mark: ..... : LY  
 Product Name ..... : ACTIVE NOISE CANCELLATION BLUETOOTH HEADPHONE  
 Model and/or type reference ...: ANC-CLF01  
 Series Model ..... : F01, C1, P328.141 Swisspeak ANC headphone, DG320  
 Difference Description ..... : All the same except for the model name


**Standards**..... : FCC Rules and Regulations Part 15 Subpart C Section 15.249  
 ANSI C63.10: 2013

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Date of Test** ..... :  
 Date (s) of performance of tests..... : Jul. 25, 2018 ~ Aug. 06, 2018  
 Date of Issue..... : Aug. 07, 2018  
 Test Result..... : **Pass**

Testing Engineer :   
 \_\_\_\_\_  
 (Gary Qian)

Technical Manager :   
 \_\_\_\_\_  
 (Eden Hu)

Authorized Signatory :   
 \_\_\_\_\_  
 (Jason Zhou)



<b>Table of Contents</b>	<b>Page</b>
1 . TEST SUMMARY	4
2 . GENERAL INFORMATION	5
2.1 GENERAL DESCRIPTION OF EUT	5
2.2 CARRIER FREQUENCY OF CHANNELS	6
2.3 OPERATION OF EUT DURING TESTING	6
2.4 DESCRIPTION OF TEST SETUP	7
2.5 MEASUREMENT INSTRUMENTS LIST	8
3 . CONDUCTED EMISSIONS TEST	9
3.1. LIMITS OF LINE CONDUCTED EMISSION TEST	9
3.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	9
3.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	10
3.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	10
3.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	11
4. RADIATED EMISSION TEST	13
4.1 TEST LIMIT	13
4.2. MEASUREMENT PROCEDURE	14
4.3. TEST SETUP	16
4.4. TEST RESULT	18
5. BAND EDGE	39
5.1. MEASUREMENT PROCEDURE	39
5.2 TEST SETUP	39
5.3 RADIATED TEST RESULT	40
6. OCCUPIED BANDWIDTH MEASUREMENT	44
6.1. MEASUREMENT PROCEDURE	44
6.2. TEST SET-UP	44
6.3. LIMITS AND MEASUREMENT RESULTS	44
7. ANTENNA REQUIREMENT	51
8. PHOTOGRAPH OF TEST	52
9. PHOTOGRAPHS OF EUT	55



## 1. TEST SUMMARY

### 1.1 TEST PROCEDURES AND RESULTS

DESCRIPTION OF TEST	RESULT
CONDUCTED EMISSIONS TEST	COMPLIANT
RADIATED EMISSION TEST	COMPLIANT
BAND EDGE	COMPLIANT
OCCUPIED BANDWIDTH MEASUREMENT	COMPLIANT
ANTENNA REQUIREMENT	COMPLIANT

### 1.2 TEST FACILITY

Test Firm : Shenzhen HUAK Testing Technology Co., Ltd.

Address : 1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park,  
Fuhai Street, Bao'an District, Shenzhen City, China

Designation Number: : CN1229

Test Firm Registration Number : 616276

### 1.3 MEASUREMENT UNCERTAINTY

Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.23dB, k=2

Radiated emission expanded uncertainty(9kHz-30MHz) = 3.08dB, k=2

Radiated emission expanded uncertainty(30MHz-1000MHz) = 4.42dB, k=2

Radiated emission expanded uncertainty(Above 1GHz) = 4.06dB, k=2



## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

<b>Operation Frequency</b>	2.402 GHz to 2.480GHz
<b>Bluetooth Version</b>	V4.1
<b>Modulation</b>	BR <input checked="" type="checkbox"/> GFSK, EDR <input checked="" type="checkbox"/> $\pi$ /4-DQPSK, <input checked="" type="checkbox"/> 8DPSK BLE <input type="checkbox"/> GFSK
<b>Number of channels</b>	79 for BR/EDR
<b>Hardware Version</b>	ANC-CLF01_REV-V0.1
<b>Software Version</b>	F01_V0.1
<b>Antenna Designation</b>	PCB Antenna
<b>Antenna Gain</b>	2dBi
<b>Power Supply</b>	DC 3.7V by battery
Note: The USB port only used for charging and can't be used to transfer data with PC.	



## 2.2 CARRIER FREQUENCY OF CHANNELS

### BR/EDR Channel List

Frequency Band	Channel Number	Frequency
2400~2483.5MHz	0	2402MHz
	1	2403MHz
	:	:
	38	2440 MHz
	39	2441 MHz
	40	2442 MHz
	:	:
	77	2479 MHz
	78	2480 MHz

## 2.3 OPERATION OF EUT DURING TESTING


NO.	TEST MODE DESCRIPTION
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK
4	Low channel $\pi/4$ -DQPSK
5	Middle channel $\pi/4$ -DQPSK
6	High channel $\pi/4$ -DQPSK
7	Low channel 8DPSK
8	Middle channel 8DPSK
9	High channel 8DPSK
10	BT Link with charging
11	BT Link(Hopping mode)

**Note:**

1. All the test modes can be supply by battery, only the result of the worst case was recorded in the report, if no other cases.
2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
3. The EUT used fully-charged battery when tested.


## 2.4 DESCRIPTION OF TEST SETUP

Configure 1: (Normal hopping)

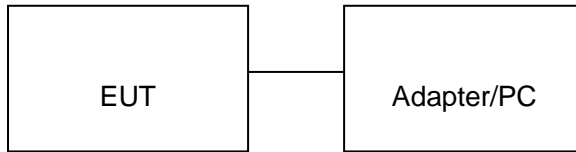

**Note:** Owing to the EUT has own battery, and testing may be performed while adapter or PC removed.

Configure 2: (Control continuous TX)

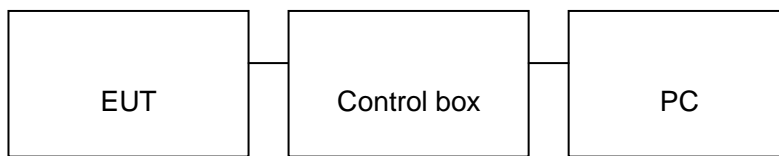

## 2.5 EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Mfr/Brand	Model/Type No.	Remark
1	ACTIVE NOISE CANCELLATION BLUETOOTH HEADPHONE	LY	ANC-CLF01	EUT
2	Battery	CTX	081340	Accessory
3	PC	APPLE	A1465	A.E
4	Control box	CSR	USB_SPI_TOOLS	A.E
5	Adapter	HUAWEI	HW-059200CHQ	A.E
6	USB Cable	N/A	1m unshielded	A.E
7	AUX Cable	N/A	1m unshielded	A.E
8	Mobile phone	HUAWEI	V9	A.E

**2.6 MEASUREMENT INSTRUMENTS LIST****TEST EQUIPMENT OF CONDUCTED EMISSION TEST**

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	R&S	ENV216	HKE-002	Dec. 28, 2017	1 Year
2.	Receiver	R&S	ESCI 7	HKE-010	Dec. 28, 2017	1 Year

**TEST EQUIPMENT OF RADIATED EMISSION TEST**

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 28, 2017	1 Year
2.	Preamplifier	Schwarzbeck	BBV 9743	HKE-006	Dec. 28, 2017	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESCI 7	HKE-010	Dec. 28, 2017	1 Year
4.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	HKE-012	Dec. 28, 2017	1 Year
5.	Loop Antenna	Schwarzbeck	FMZB 1519 B	HKE-014	Dec. 28, 2017	1 Year
6.	Horn Antenna	Schwarzbeck	9120D	HKE-013	Dec. 28, 2017	1 Year
7.	Pre-amplifier	EMCI	EMC051845S E	HKE-015	Dec. 28, 2017	1 Year
8.	Pre-amplifier	Agilent	83051A	HKE-016	Dec. 28, 2017	1 Year
9.	Filter (2.4-2.483GHz)	Micro-tronics	087	--	N/A	N/A
10.	Radiation Cable 1	MXT	HK1	R05	N/A	N/A
11.	Radiation Cable 2	MXT	HK1	R06	N/A	N/A



### 3. CONDUCTED EMISSIONS TEST


#### 3.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P.( dBuV)	Average( dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

#### 3.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

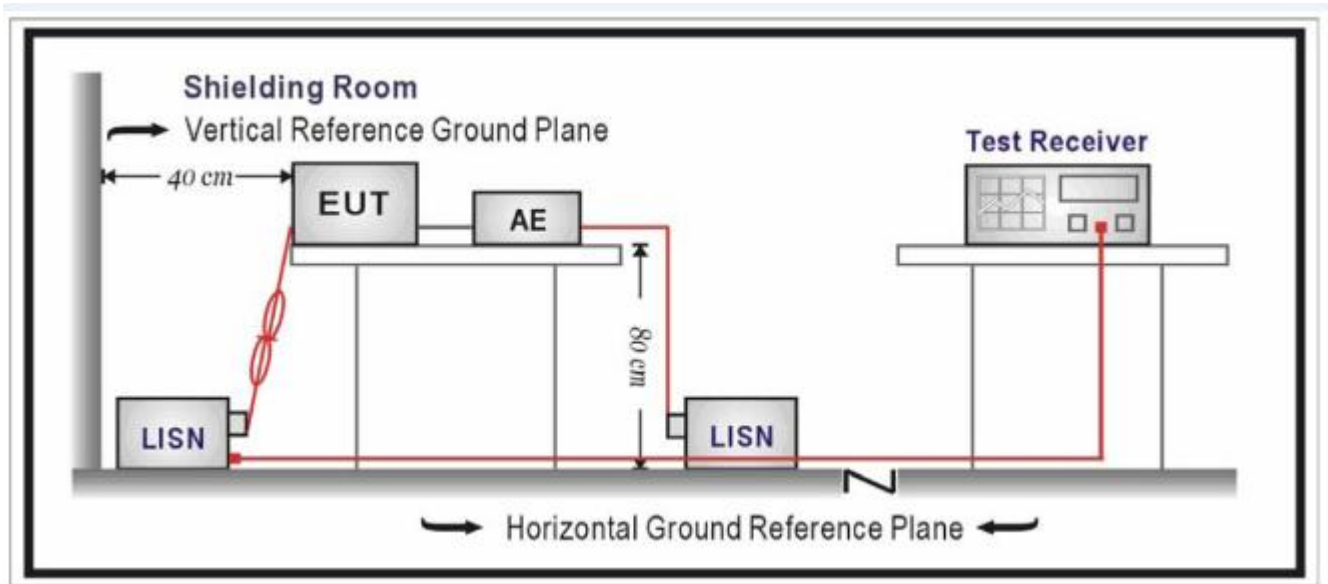



### 3.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2. Support equipment, if needed, was placed as per ANSI C63.10-2013.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013.
4. All support equipments received AC120V/60Hz power from a LISN, if any.
5. The EUT received DC charging voltage by adapter or PC which received 120V/60Hz power by a LISN.
6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.
9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

### 3.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST


1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
3. The test data of the worst case condition(s) was reported on the Summary Data page.



### 3.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

By adapter(worst case)

Line Conducted Emission Test Line 1-L

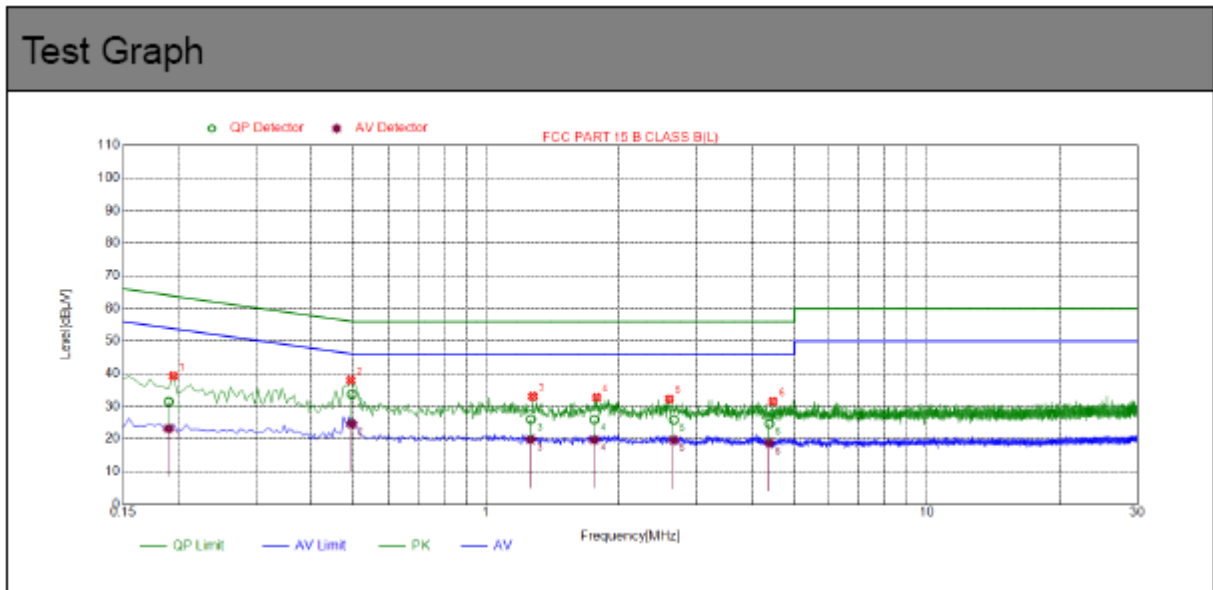


NO.	Freq. [MHz]	Factor [dB]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]
1	0.1901	10.04	31.50	64.03	32.53	23.20	54.03	30.83
2	0.4950	10.04	33.71	56.08	22.37	24.67	46.08	21.41
3	1.2624	10.09	26.08	56.00	29.92	19.86	46.00	26.14

4	1.7567	10.14	25.98	56.00	30.02	19.75	46.00	26.25
5	2.6616	10.21	25.88	56.00	30.12	19.85	46.00	26.35
6	4.3836	10.25	24.68	56.00	31.32	18.75	46.00	27.25



Line Conducted Emission Test Line 2-N

Test Graph

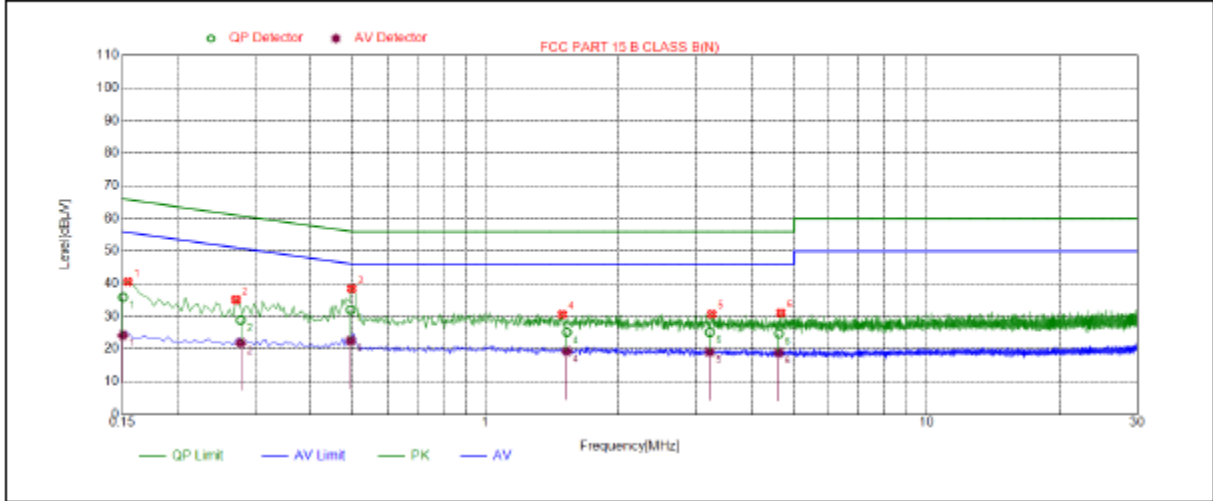

NO.	Freq. [MHz]	Factor [dB]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]
1	0.1506	10.03	35.79	65.96	30.17	24.23	55.96	31.73
2	0.2782	10.04	28.89	60.87	31.98	21.89	50.87	28.98
3	0.4938	10.04	32.07	56.10	24.03	22.57	46.10	23.53

4	1.5261	10.11	25.14	56.00	30.86	19.31	46.00	26.69
5	3.2178	10.23	25.11	56.00	30.89	19.07	46.00	26.93
6	4.6184	10.26	24.71	56.00	31.29	18.85	46.00	27.15



## 4. RADIATED EMISSION TEST

### 4.1 TEST LIMIT

#### Standard FCC15.249

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
900-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

#### Standard FCC 15.209

Frequency (MHz)	Distance Meters	Field Strengths Limit	
		$\mu$ V/m	dB( $\mu$ V)/m
0.009 ~ 0.490	300	2400/F(kHz)	---
0.490 ~ 1.705	30	24000/F(kHz)	---
1.705 ~ 30	30	30	---
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	Other:74.0 dB( $\mu$ V)/m (Peak) 54.0 dB( $\mu$ V)/m (Average)	

Remark: (1) Emission level  $\text{dB}\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$   
 (2) The smaller limit shall apply at the cross point between two frequency bands.  
 (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.



## 4.2. MEASUREMENT PROCEDURE

1. The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Below 1GHz)
2. The measuring distance of 3m shall used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Above 1GHz)
3. The height of the test antenna shall vary between 1m to 4m.Both horizontal and vertical polarization Of the antenna are set to make the measurement.
4. The initial step in collecting radiated emission data is a receive peak detector mode. Pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
5. All readings are peak unless otherwise stated QP in column of Note. Peak denoted that the Peak reading compliance with the QP limits and then QP Mode measurement didn't perform(Below 1GHz)
6. All readings are Peak mode value unless otherwise stated AVG in column of Note. If the Peak mode measured value compliance with the Peak limits and lower than AVG Limits, the EUT shall be deemed to meet Peak & AVG limits and then only Peak mode was measured, but AVG mode didn't perform.(Above 1GHz)




The following table is the setting of spectrum analyzer and receiver.


<b>Spectrum Parameter</b>	<b>Setting</b>
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	Fundamental: 2.4~2.483GHz RBW 2MHz/ VBW 6MHz for Peak, RBW 2MHz/ VBW 10Hz for Average Harmonics: 1GHz~25GHz RBW 1MHz/ VBW 3MHz for Peak, RBW 1MHz/ VBW 10Hz for Average
<b>Receiver Parameter</b>	<b>Setting</b>
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

### 4.3. TEST SETUP

#### Radiated Emission Test-Setup Frequency Below 30MHz

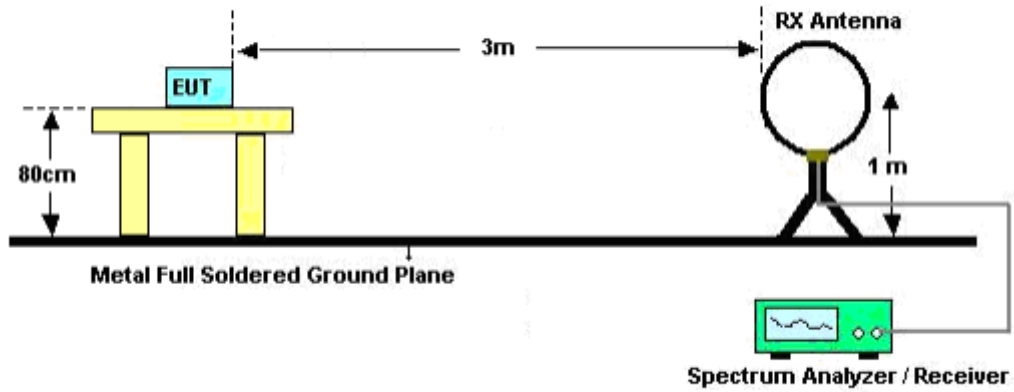


#### RADIATED EMISSION TEST SETUP 30MHz-1000MHz

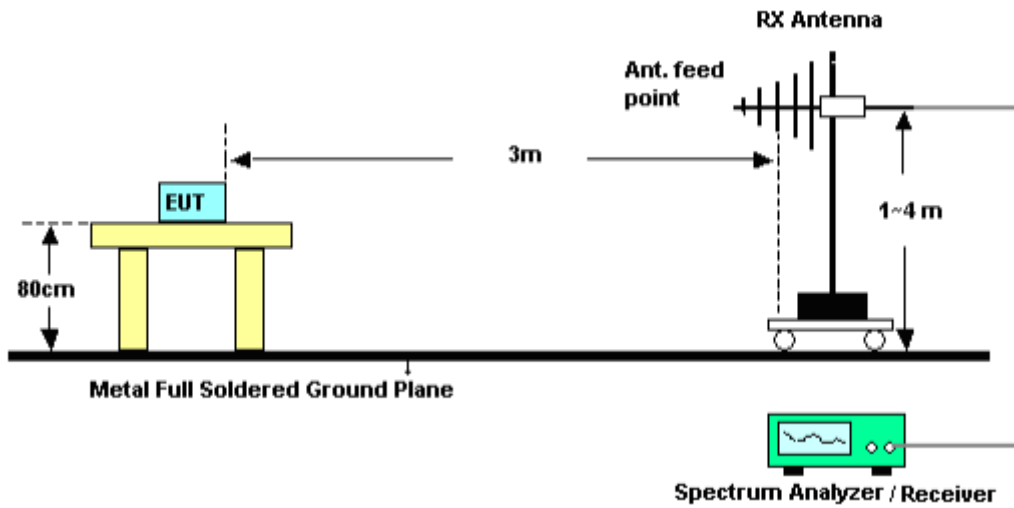



### RADIATED EMISSION TEST SETUP ABOVE 1000MHz

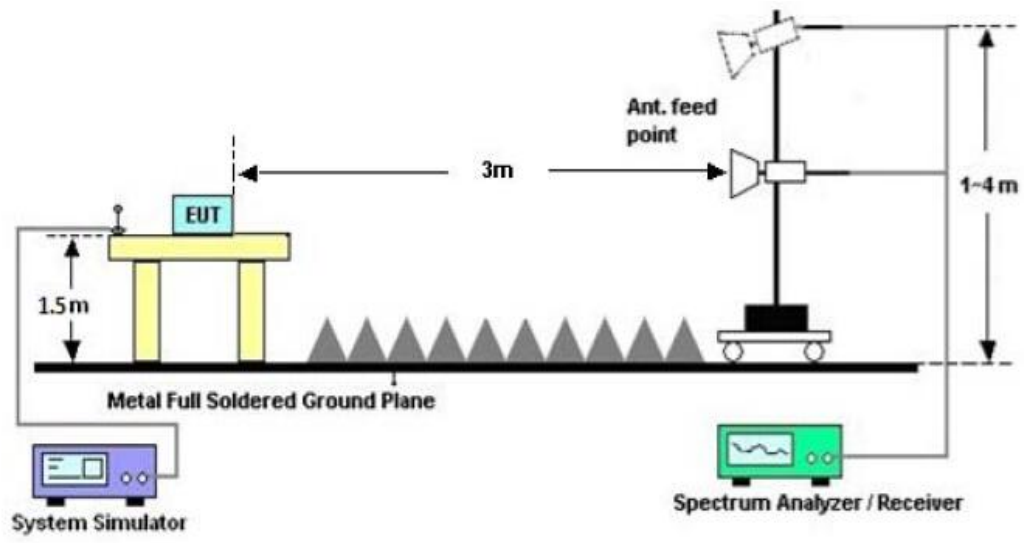



**4.4. TEST RESULT**

**FOR BR/EDR**


**(Worst modulation: GFSK)**

**RADIATED EMISSION BELOW 30MHz**

No emission found below lowest internal used/generated frequencies to 30MHz.

**RADIATED EMISSION BELOW 1GHz**

**RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL-HORIZONTAL**

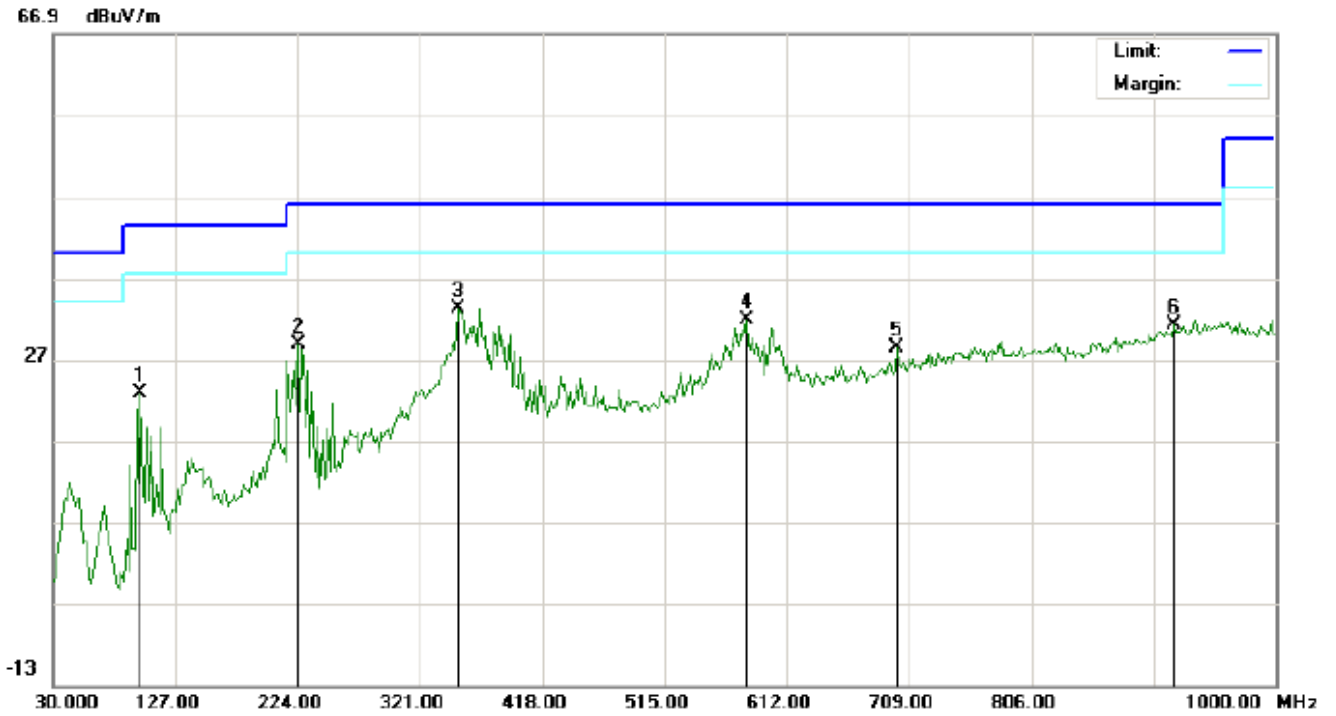


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
									cm	degree	
1		99.5167	12.84	10.00	22.84	43.50	-20.66	peak			
2		224.0000	19.35	9.55	28.90	46.00	-17.10	peak			
3	*	351.7167	14.49	18.75	33.24	46.00	-12.76	peak			
4		579.6667	8.66	23.22	31.88	46.00	-14.12	peak			
5		699.3000	3.29	25.20	28.49	46.00	-17.51	peak			
6		919.1667	2.08	29.14	31.22	46.00	-14.78	peak			

**RESULT: PASS**



RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL -VERTICAL

66.9 dBuV/m

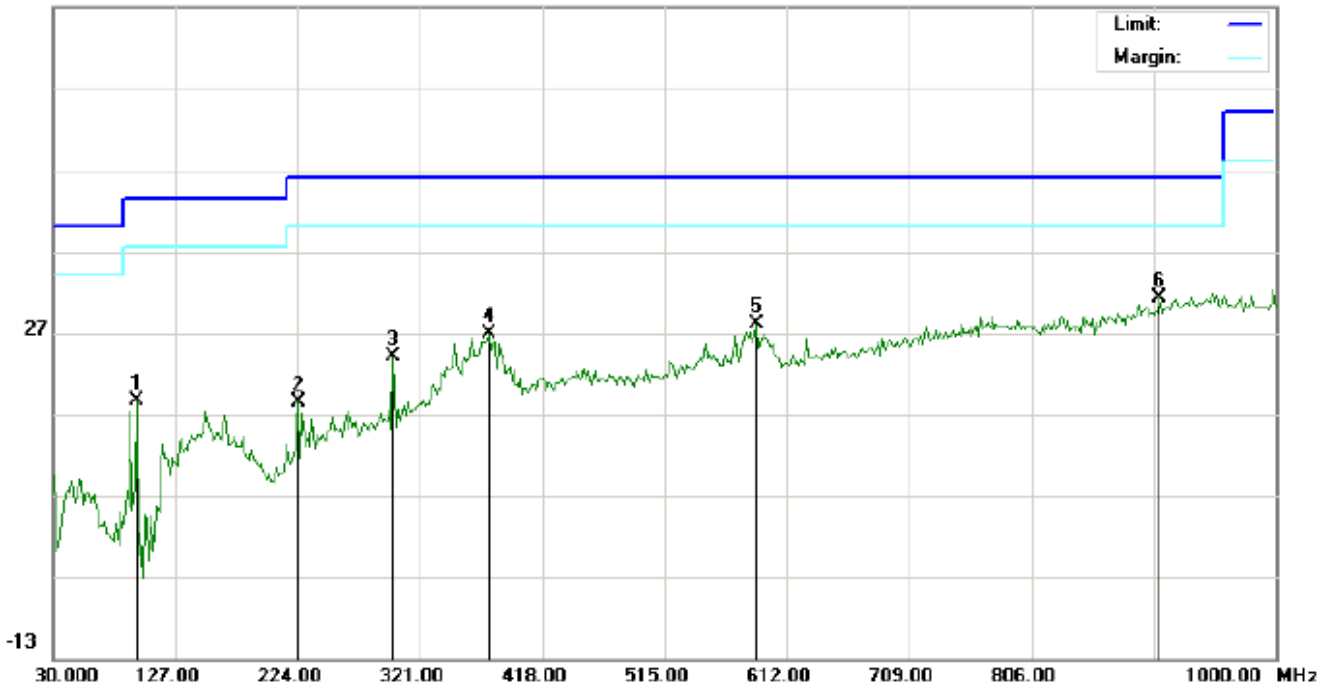

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		96.2833	18.52	0.05	18.57	43.50	-24.93	peak			
2		224.0000	7.10	11.35	18.45	46.00	-27.55	peak			
3		299.9833	8.57	15.41	23.98	46.00	-22.02	peak			
4		375.9667	7.93	18.91	26.84	46.00	-19.16	peak			
5		587.7500	5.29	22.67	27.96	46.00	-18.04	peak			
6	*	907.8500	2.47	28.83	31.30	46.00	-14.70	peak			

**RESULT: PASS**


**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.



RADIATED EMISSION TEST- (30MHz-1GHz)-MIDDLE CHANNEL-HORIZONTAL

66.9 dBuV/m

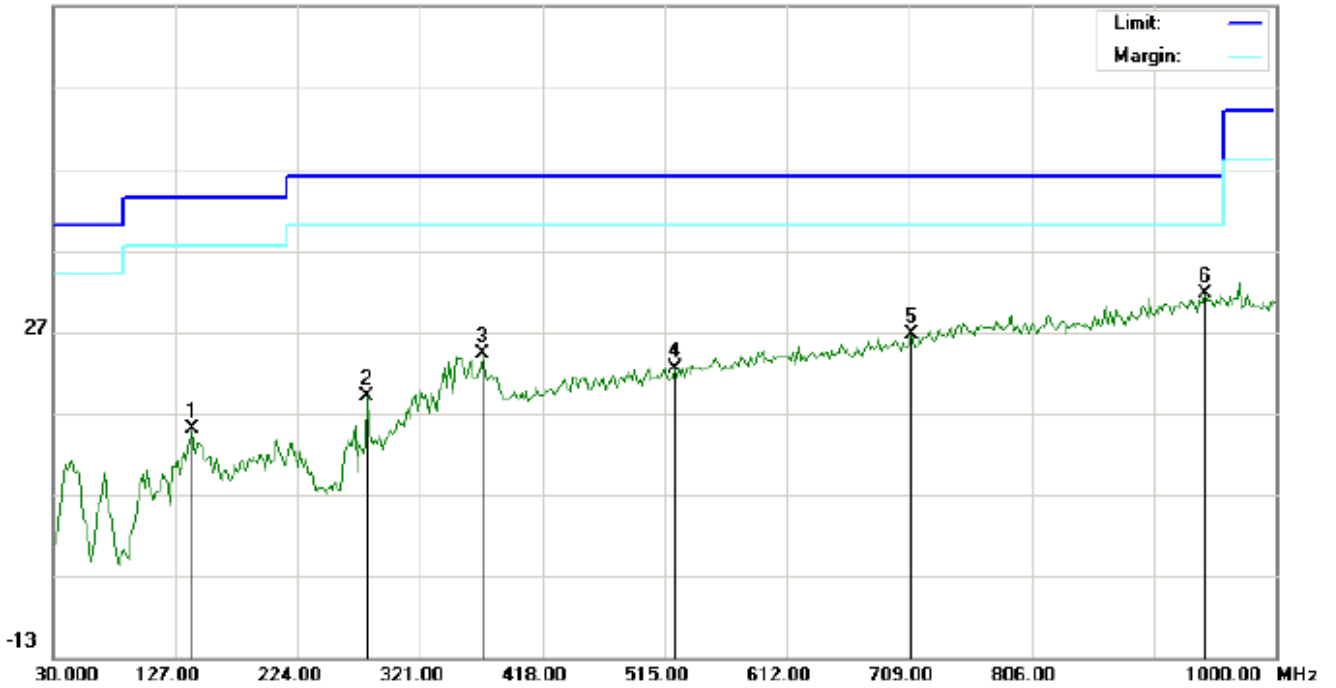


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		139.9333	-0.09	15.17	15.08	43.50	-28.42	peak			
2		278.9667	7.13	11.83	18.96	46.00	-27.04	peak			
3		371.1167	5.25	18.88	24.13	46.00	-21.87	peak			
4		523.0833	0.73	21.75	22.48	46.00	-23.52	peak			
5		710.6167	1.05	25.52	26.57	46.00	-19.43	peak			
6	*	943.4167	1.70	29.82	31.52	46.00	-14.48	peak			

RESULT: PASS



RADIATED EMISSION TEST- (30MHz-1GHz)- MIDDLE CHANNEL -VERTICAL

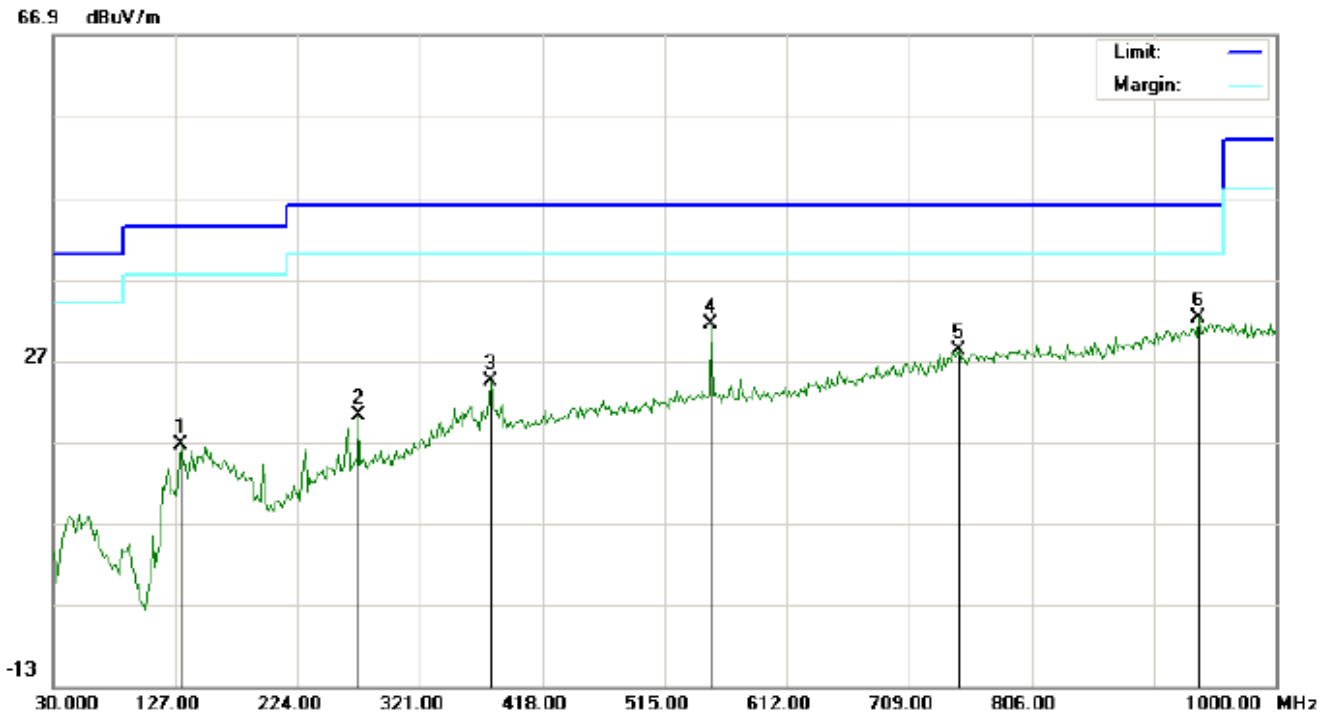

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		131.8500	4.73	11.80	16.53	43.50	-26.97	peak			
2		272.5000	5.67	14.58	20.25	46.00	-25.75	peak			
3		377.5833	5.42	18.92	24.34	46.00	-21.66	peak			
4		552.1833	8.84	22.49	31.33	46.00	-14.67	peak			
5		747.8000	1.55	26.57	28.12	46.00	-17.88	peak			
6	*	938.5667	2.49	29.68	32.17	46.00	-13.83	peak			


**RESULT: PASS**

**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.



RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL-HORIZONTAL

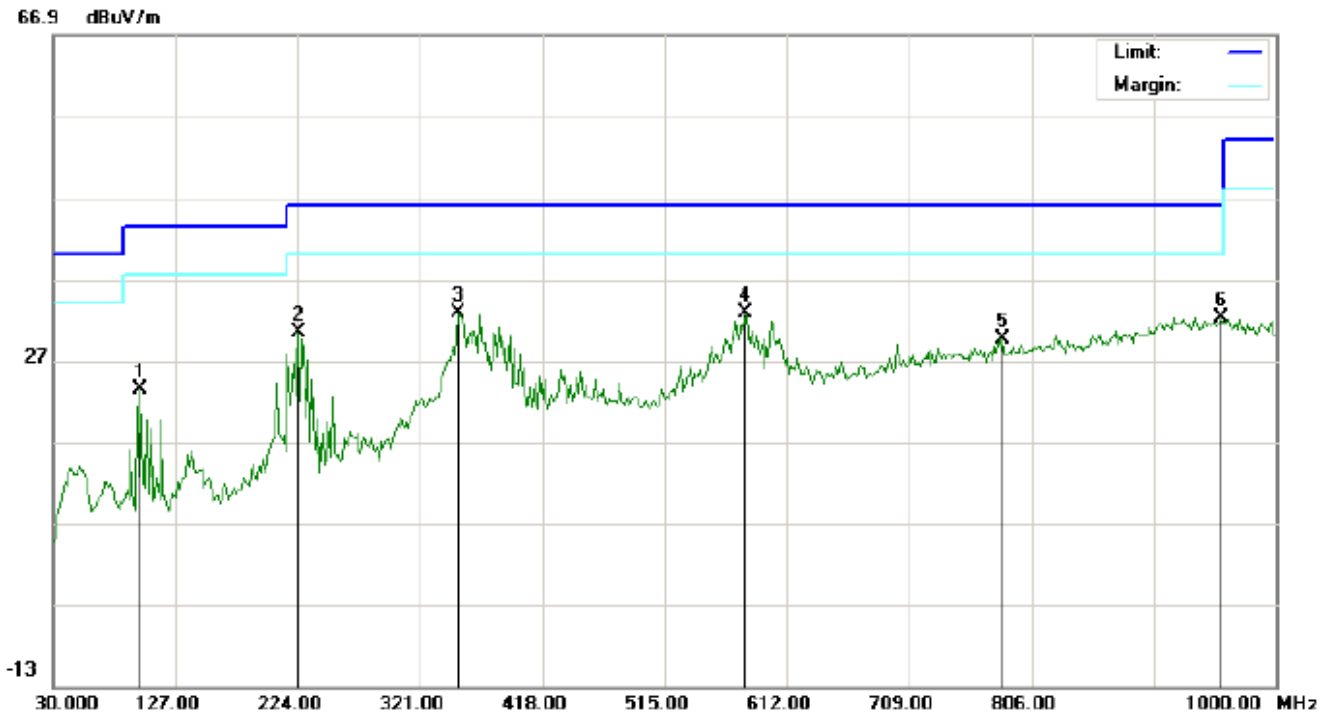


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		99.5167	13.34	10.00	23.34	43.50	-20.16	peak			
2		224.0000	20.85	9.55	30.40	46.00	-15.60	peak			
3		351.7167	13.99	18.75	32.74	46.00	-13.26	peak			
4	*	579.6666	9.66	23.22	32.88	46.00	-13.12	peak			
5		783.3667	2.54	27.09	29.63	46.00	-16.37	peak			
6		956.3500	2.20	29.94	32.14	46.00	-13.86	peak			

RESULT: PASS



RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL -VERTICAL

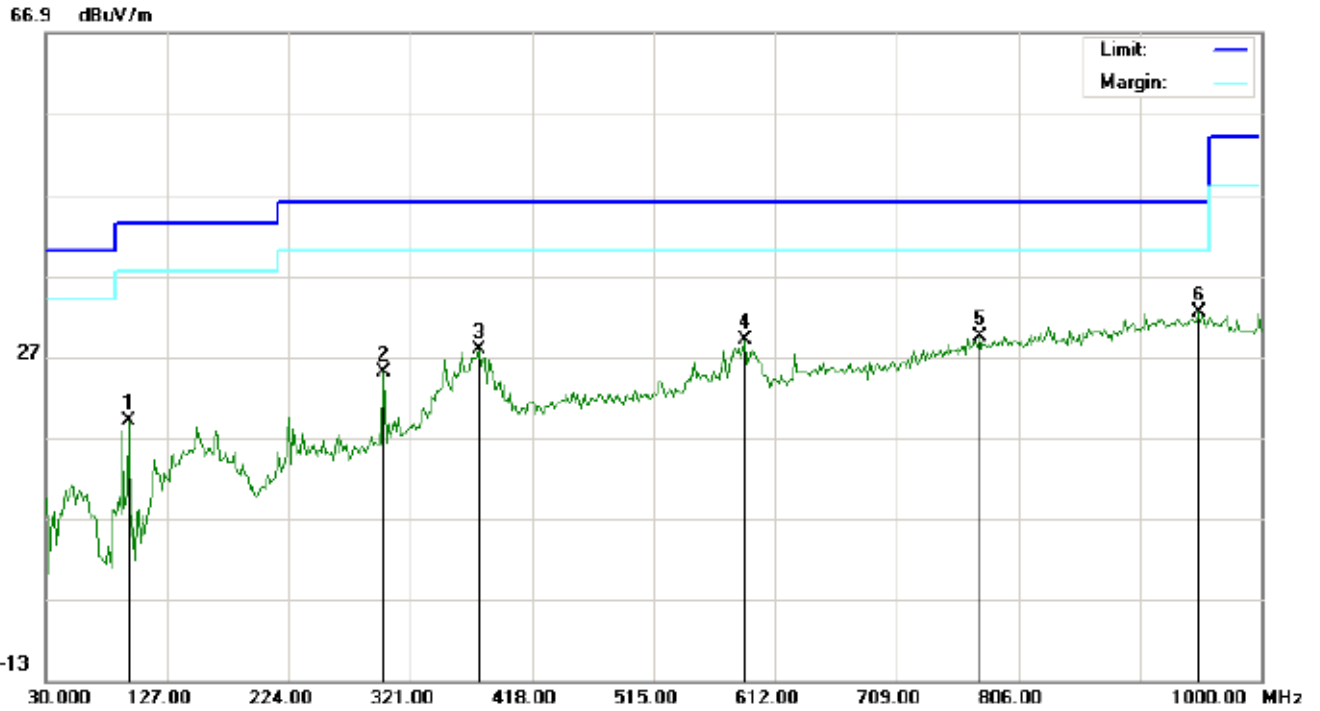

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
									cm	degree	
1		96.2832	19.02	0.05	19.07	43.50	-24.43	peak			
2		299.9832	9.57	15.41	24.98	46.00	-21.02	peak			
3		375.9667	8.93	18.91	27.84	46.00	-18.16	peak			
4		587.7500	6.29	22.67	28.96	46.00	-17.04	peak			
5		775.2833	2.46	26.98	29.44	46.00	-16.56	peak			
6	*	949.8832	2.36	30.00	32.36	46.00	-13.64	peak			

**RESULT: PASS**

**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.


2. The "Factor" value can be calculated automatically by software of measurement system.



**RADIATED EMISSION ABOVE 1GHz  
FOR BR/EDR  
(Worst modulation: GFSK)**

**For Fundamental**

**RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL-HORIZONTAL**

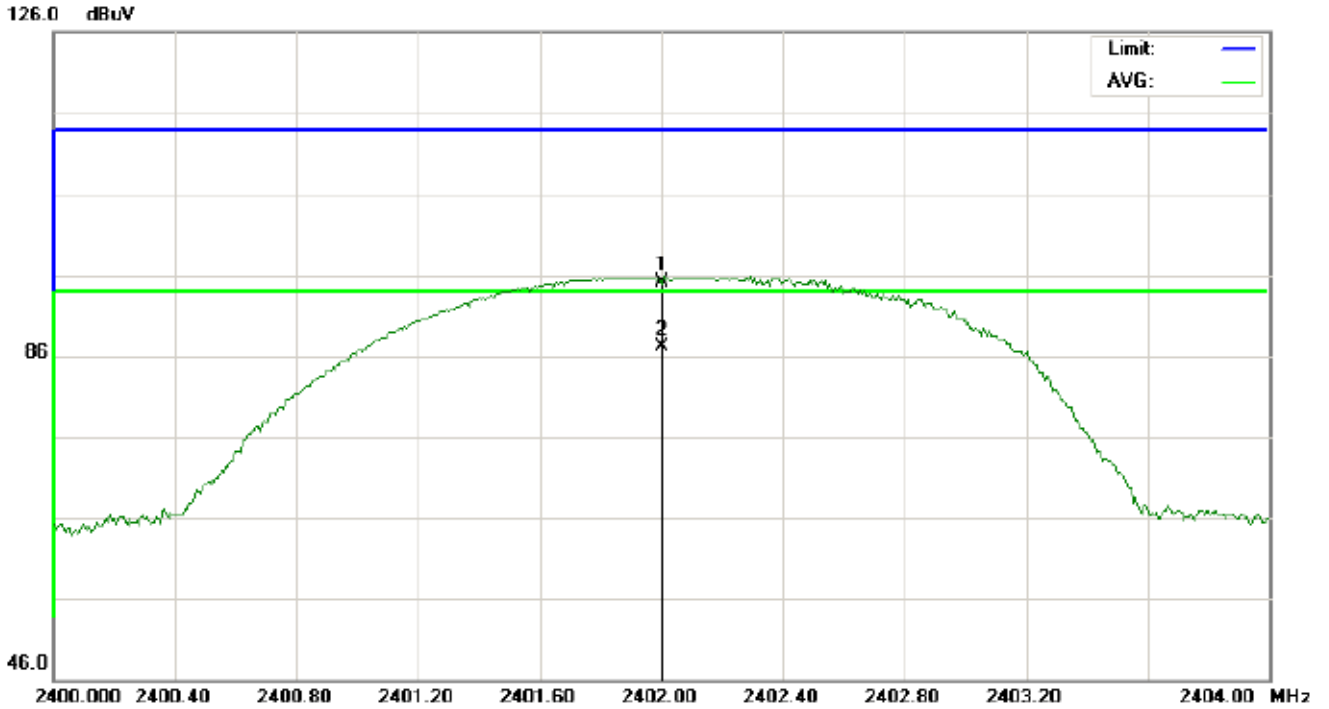


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		cm	degree	
1		2402.000	81.55	13.46	95.01	114.00	-18.99	peak			
2	*	2402.000	73.58	13.46	87.04	94.00	-6.96	AVG	100	123	

**RESULT: PASS**





RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL- VERTICAL

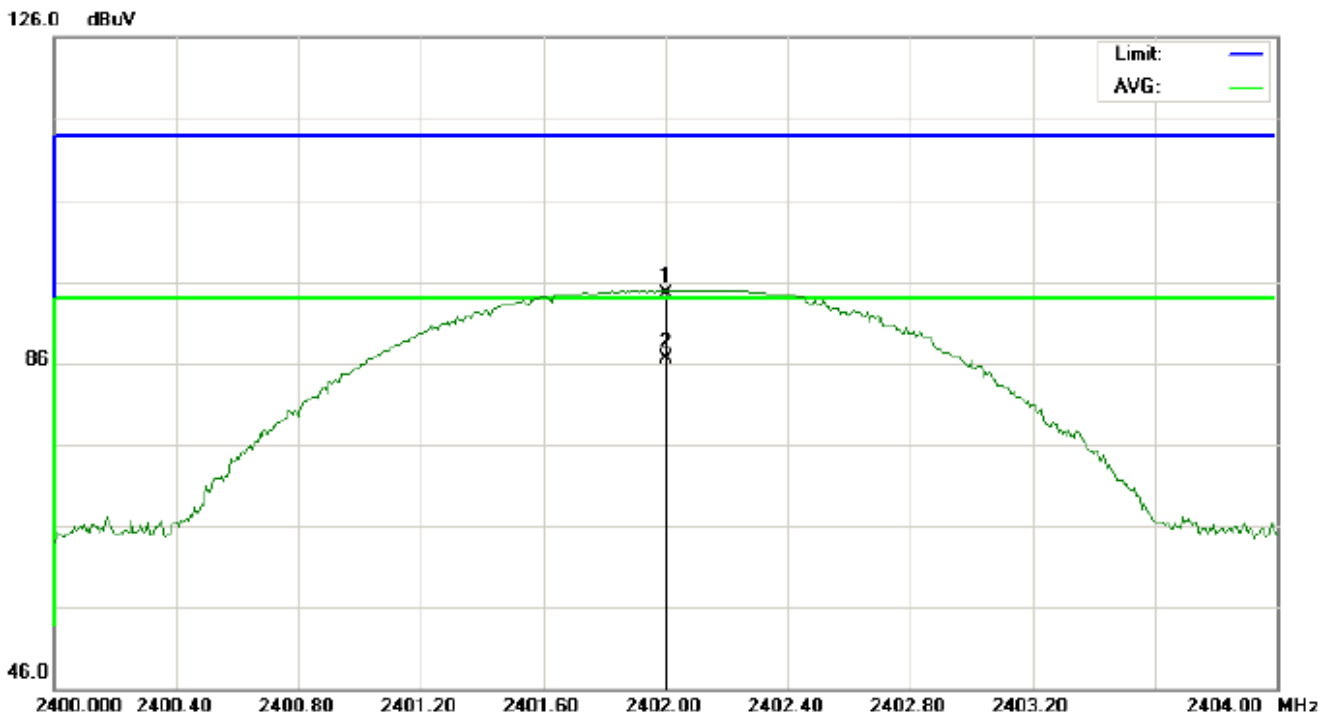


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		cm	degree	
1	-	2402.000	81.14	13.46	94.60	114.00	-19.40	peak			
2	*	2402.000	73.10	13.46	86.56	94.00	-7.44	AVG	100	316	

**RESULT: PASS**



RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL-HORIZONTAL

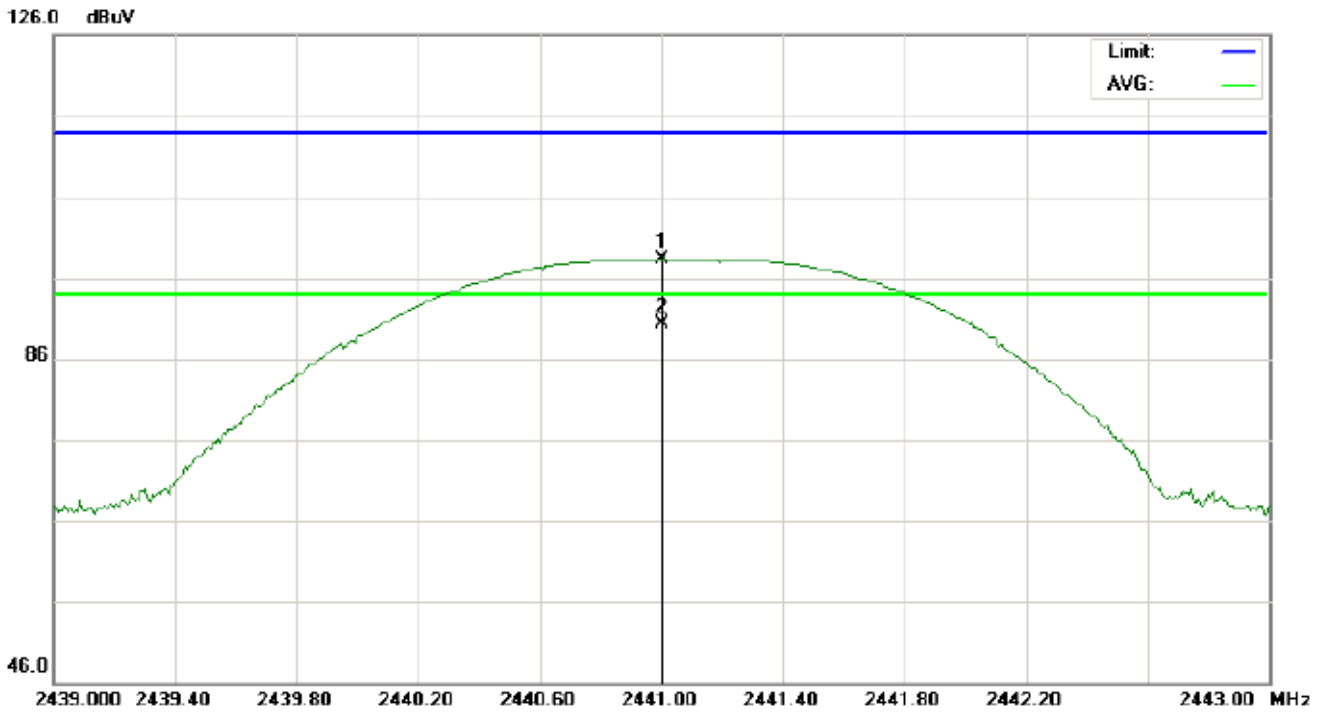


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		Height	Degree	
1		2441.000	84.33	13.88	98.21	114.00	-15.79	peak			
2	*	2441.000	76.36	13.88	90.24	94.00	-3.76	AVG	100	118	

RESULT: PASS



RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL- VERTICAL

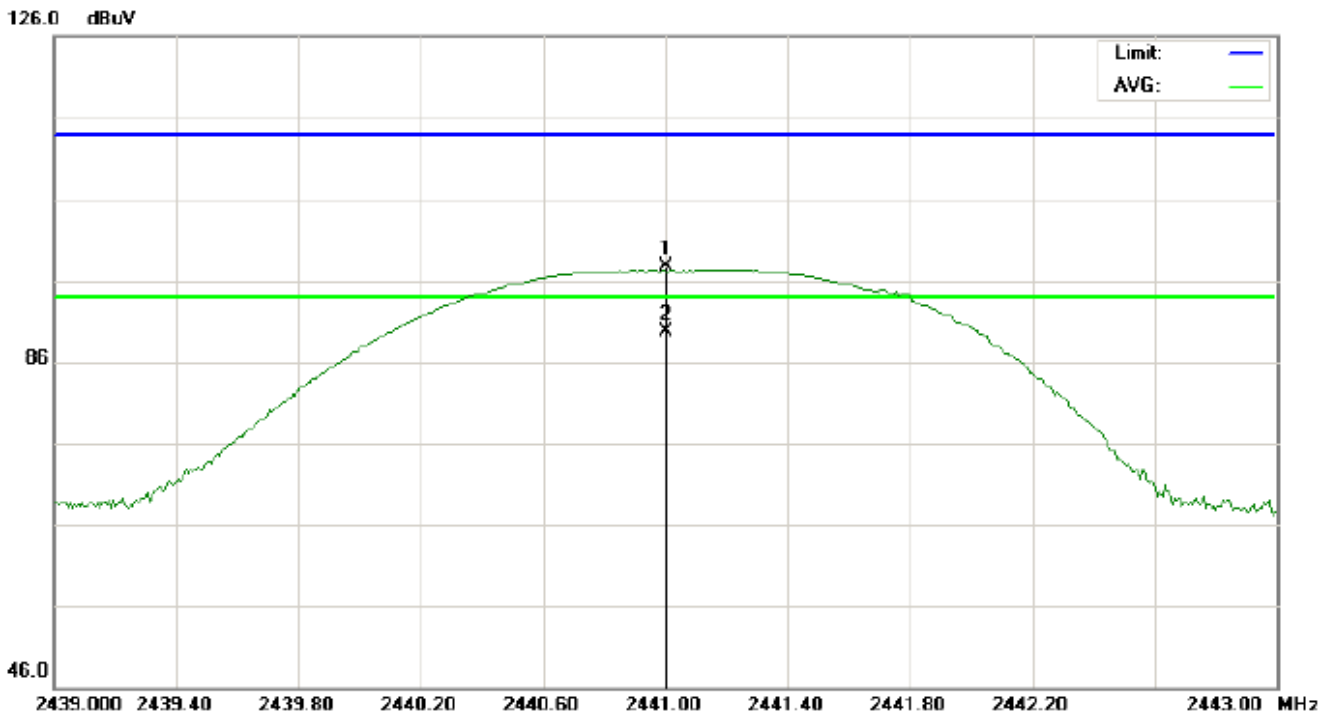


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		cm	degree	
1		2441.000	83.87	13.88	97.75	114.00	-16.25	peak			
2	*	2441.000	75.90	13.88	89.78	94.00	-4.22	AVG	100	308	

RESULT: PASS



RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL-HORIZONTAL

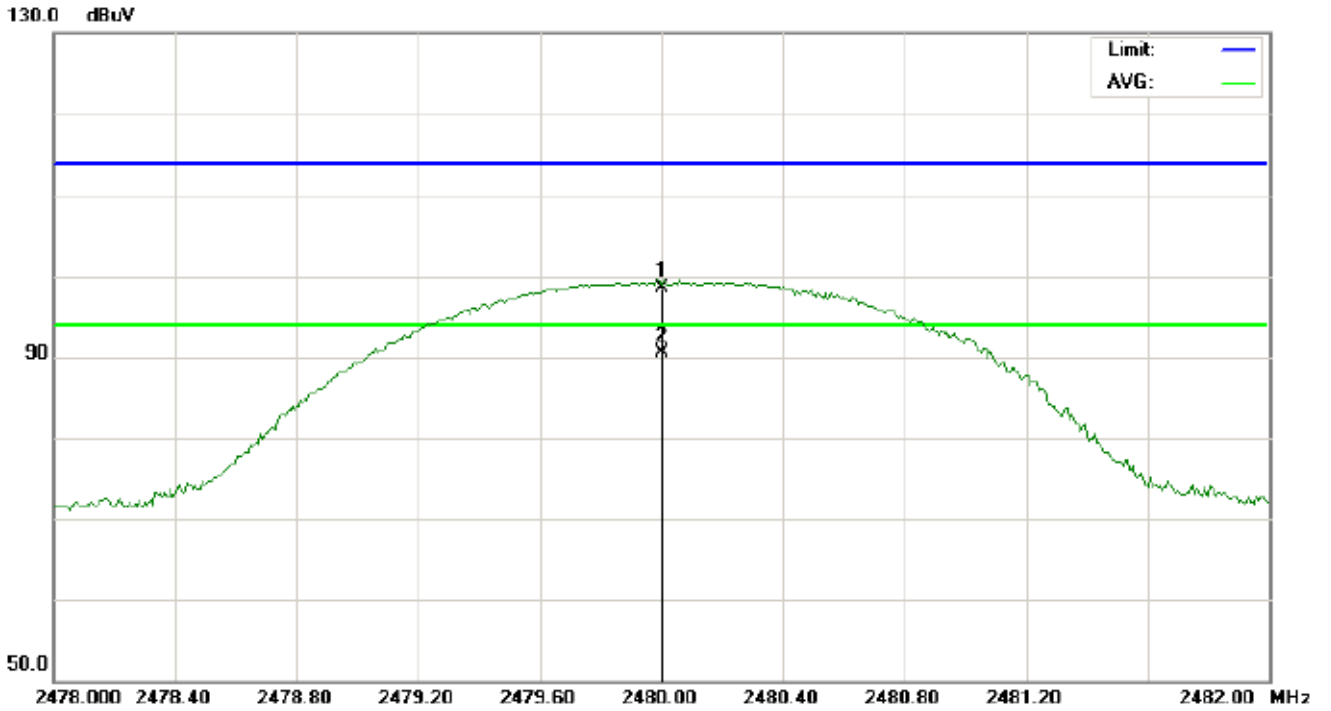


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		Height	Degree	
1		2480.000	84.41	14.11	98.52	114.00	-15.48	peak			
2	*	2480.000	76.47	14.11	90.58	94.00	-3.42	AVG	100	124	

**RESULT: PASS**



RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL- VERTICAL

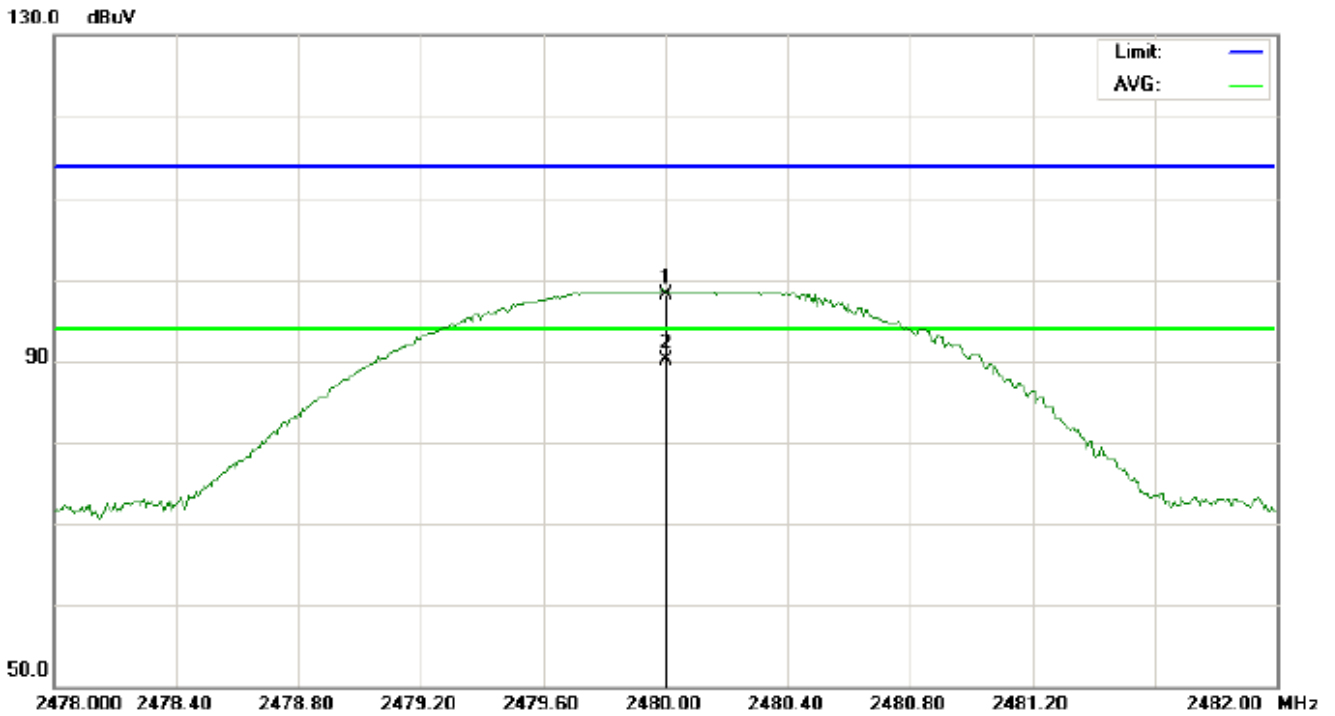

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		Height	Degree	
1	-	2480.000	83.94	14.11	98.05	114.00	-15.95	peak			
2	*	2480.000	75.92	14.11	90.03	94.00	-3.97	AVG	100	313	

**RESULT: PASS**

**Note:** Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

**Field strength of the fundamental signal****1Mbps Result:****Peak value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	81.55	13.46	95.01	114	-18.99	Horizontal
2402	81.14	13.46	94.60	114	-19.40	Vertical
2441	84.33	13.88	98.21	114	-15.79	Horizontal
2441	83.87	13.88	97.75	114	-16.25	Vertical
2480	84.41	14.11	98.52	114	-15.48	Horizontal
2480	83.94	14.11	98.05	114	-15.95	Vertical

**Average value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	73.58	13.46	87.04	94	-6.96	Horizontal
2402	73.10	13.46	86.56	94	-7.44	Vertical
2441	76.36	13.88	90.24	94	-3.76	Horizontal
2441	75.90	13.88	89.78	94	-4.22	Vertical
2480	76.47	14.11	90.58	94	-3.42	Horizontal
2480	75.92	14.11	90.03	94	-3.97	Vertical

**2Mbps Result:****Peak value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	84.20	10.32	94.52	114	-19.48	Horizontal
2402	83.88	10.32	94.20	114	-19.80	Vertical
2441	87.45	10.36	97.81	114	-16.19	Horizontal
2441	86.91	10.36	97.27	114	-16.73	Vertical
2480	87.64	10.41	98.05	114	-15.95	Horizontal
2480	87.23	10.41	97.64	114	-16.36	Vertical

**Average value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	76.24	10.32	86.56	94	-7.44	Horizontal
2402	75.81	10.32	86.13	94	-7.87	Vertical
2441	79.45	10.36	89.81	94	-4.19	Horizontal
2441	78.97	10.36	89.33	94	-4.67	Vertical
2480	79.71	10.41	90.12	94	-3.88	Horizontal
2480	79.19	10.41	89.60	94	-4.40	Vertical

**3Mbps Result:****Peak value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	83.75	10.32	94.07	114	-19.93	Horizontal
2402	83.45	10.32	93.77	114	-20.23	Vertical
2441	86.98	10.36	97.34	114	-16.66	Horizontal
2441	86.51	10.36	96.87	114	-17.13	Vertical
2480	87.17	10.41	97.58	114	-16.42	Horizontal
2480	86.76	10.41	97.17	114	-16.83	Vertical

**Average value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	75.79	10.32	86.11	94	-7.89	Horizontal
2402	75.40	10.32	85.72	94	-8.28	Vertical
2441	79.00	10.36	89.36	94	-4.64	Horizontal
2441	78.50	10.36	88.86	94	-5.14	Vertical
2480	79.27	10.41	89.68	94	-4.32	Horizontal
2480	78.72	10.41	89.13	94	-4.87	Vertical






**FOR BR/EDR**  
**(Worst modulation: GFSK)**

**For Harmonics**

**RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL-HORIZONTAL**

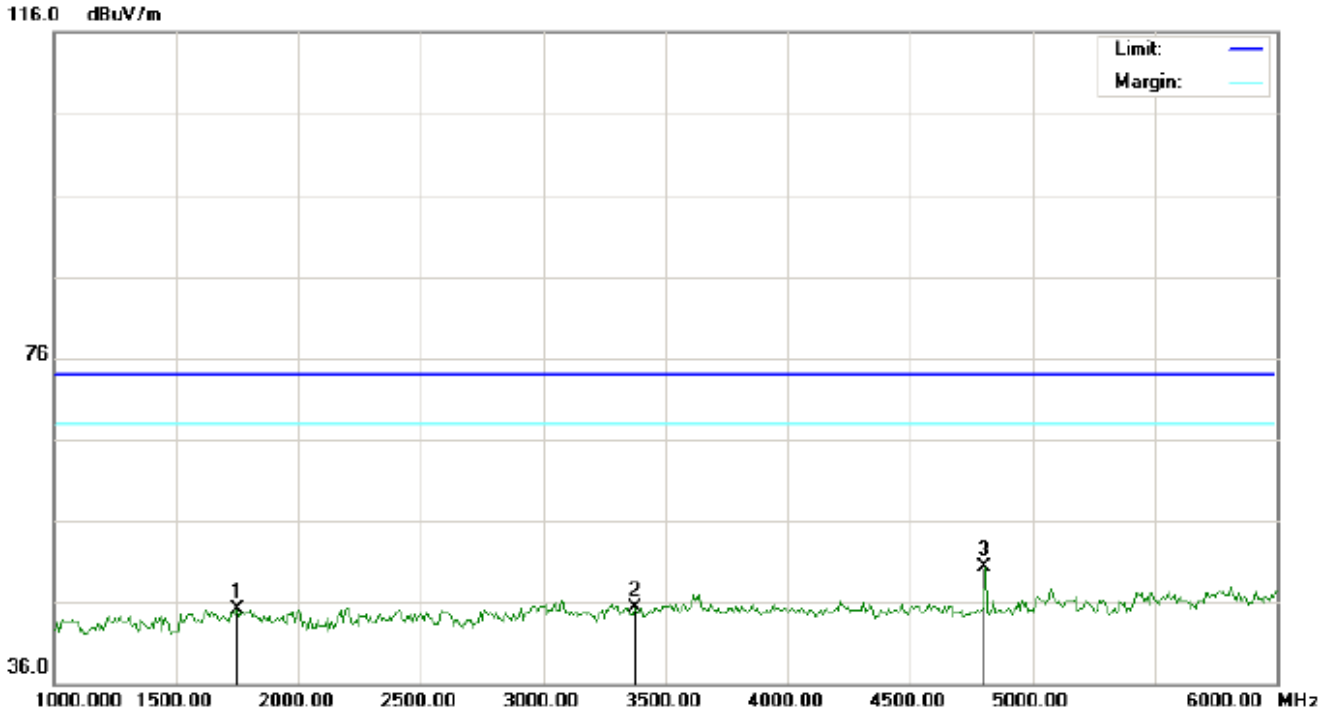


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		1750.000	37.85	7.25	45.10	74.00	-28.90	peak			
2		3375.000	33.32	11.99	45.31	74.00	-28.69	peak			
3	*	4804.000	42.71	7.69	50.40	74.00	-23.60	peak			

**RESULT: PASS**



RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL- VERTICAL

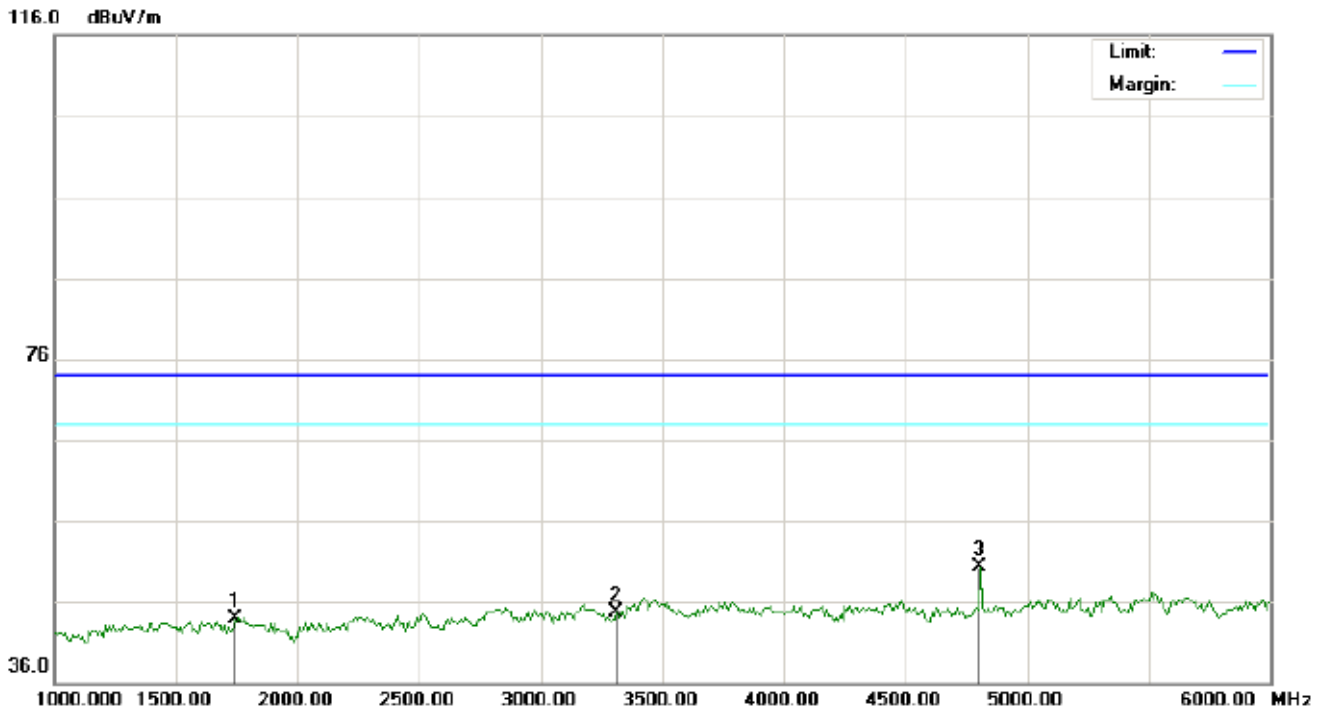


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
									cm	degree	
1		1741.667	36.66	7.16	43.82	74.00	-30.18	peak			
2		3308.333	32.80	11.93	44.73	74.00	-29.27	peak			
3	*	4804.000	42.55	7.69	50.24	74.00	-23.76	peak			

RESULT: PASS



RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL-HORIZONTAL

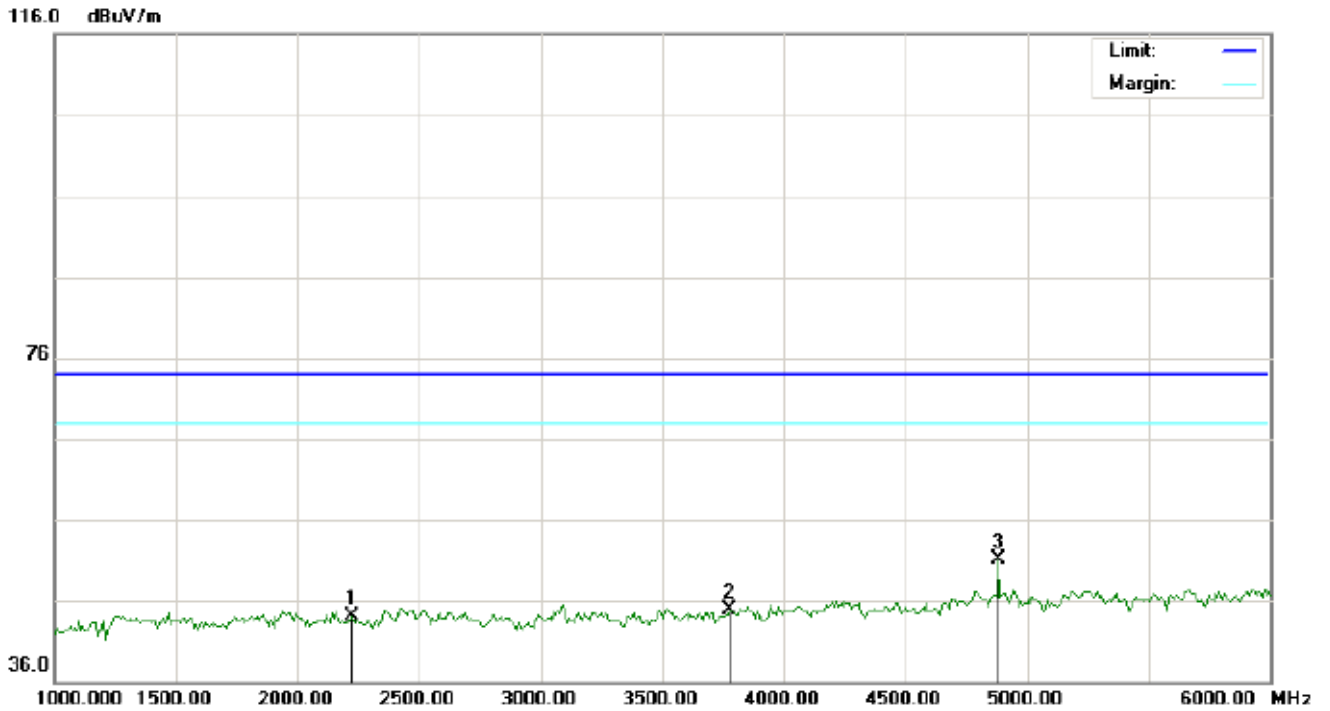

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
									cm	degree	
1		2225.000	33.99	10.13	44.12	74.00	-29.88	peak			
2		3775.000	31.15	13.80	44.95	74.00	-29.05	peak			
3	*	4882.000	43.16	7.89	51.05	74.00	-22.95	peak			

RESULT: PASS



RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL- VERTICAL

116.0 dBuV/m




No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
									cm	degree	
1		2216.667	32.66	10.12	42.78	74.00	-31.22	peak			
2		3750.000	31.42	13.65	45.07	74.00	-28.93	peak			
3	*	4882.000	42.89	7.89	50.78	74.00	-23.22	peak			

RESULT: PASS



RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL-HORIZONTAL

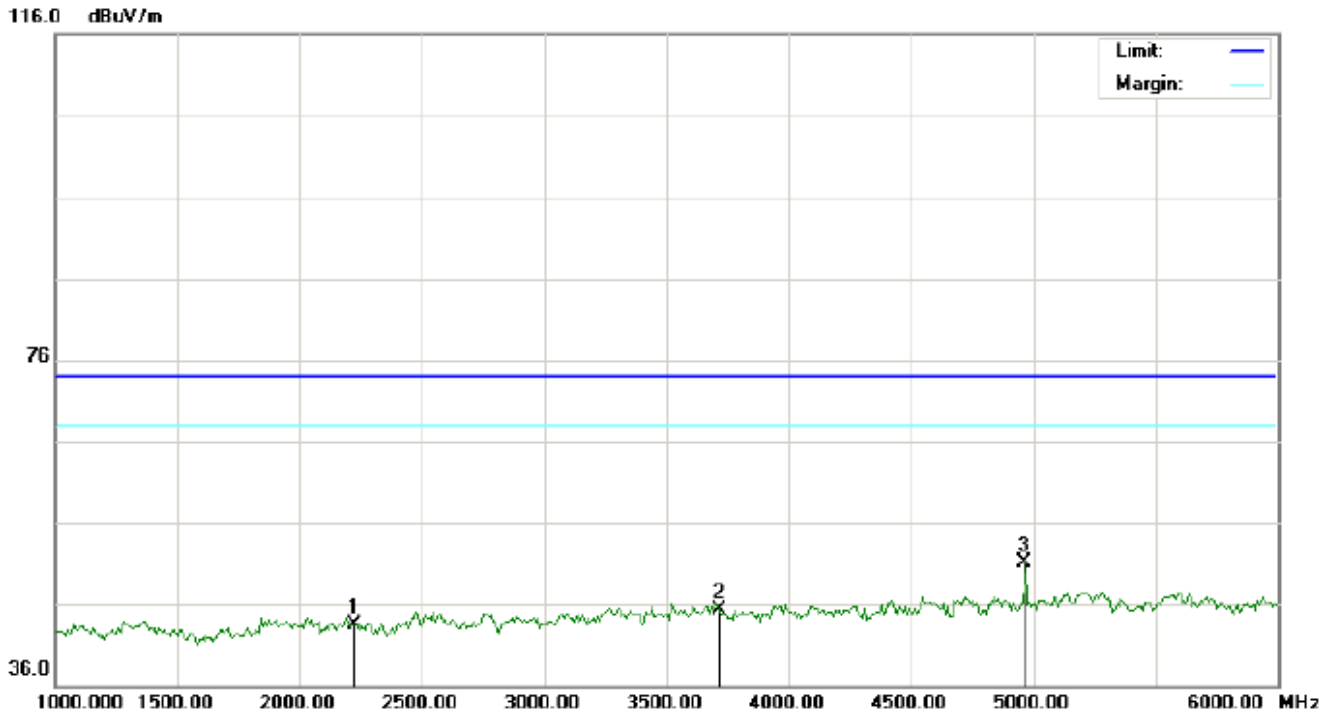

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
									cm	degree	
1		2225.000	33.36	10.13	43.49	74.00	-30.51	peak			
2		3716.667	31.85	13.44	45.29	74.00	-28.71	peak			
3	*	4960.000	43.10	8.09	51.19	74.00	-22.81	peak			

RESULT: PASS



RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL- VERTICAL



No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
1		2250.000	32.99	10.15	43.14	74.00	-30.86	peak			
2		3791.667	29.78	13.91	43.69	74.00	-30.31	peak			
3	*	4960.000	41.91	8.09	50.00	74.00	-24.00	peak			

**RESULT: PASS**

**Note:** 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

## 5. BAND EDGE


### 5.1. MEASUREMENT PROCEDURE

1. The EUT operates at hopping-off test mode. The lowest or highest channels are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.
2. Max hold the trace of the setup 1, and the EUT operates at hopping-on test mode to verify the largest spurious emissions power.
3. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission.

Start frequency(MHz)	Stop frequency(MHz)
2200	2405
2478	2500

### 5.2 TEST SETUP


RADIATED EMISSION TEST SETUP

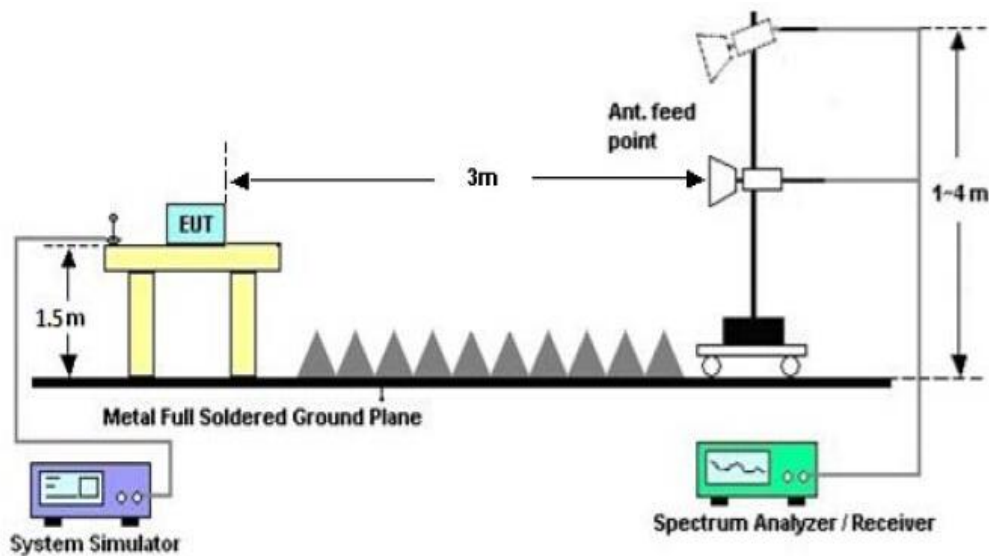



**5.3 RADIATED TEST RESULT  
FOR BR/EDR  
(Worst modulation: GFSK)**

TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

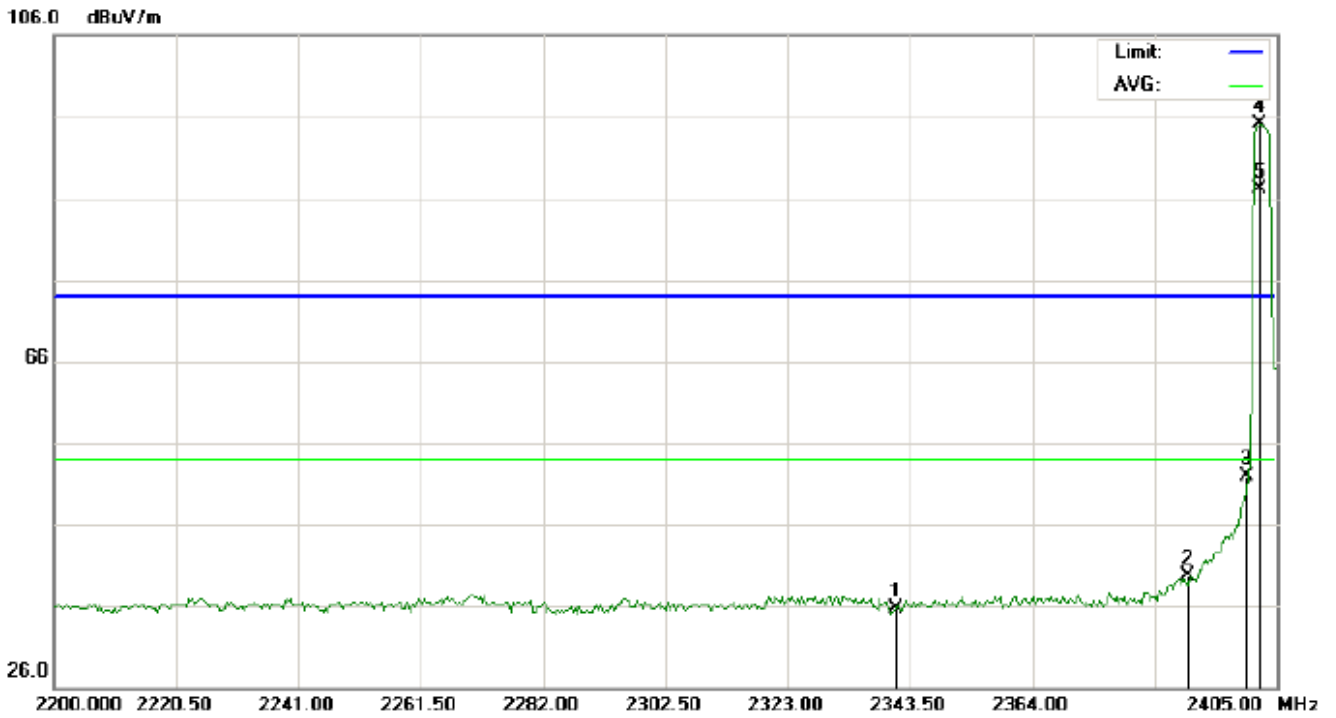


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
									cm	degree	
1		2341.108	22.37	13.42	35.79	74.00	-38.21	peak			
2		2390.000	26.18	13.45	39.63	74.00	-34.37	peak			
3		2400.000	38.44	13.46	51.90	74.00	-22.10	peak			
4	X	2402.000	81.59	13.46	95.05	74.00	21.05	peak			
5	*	2402.000	73.62	13.46	87.08	54.00	33.08	AVG	100	122	






TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical

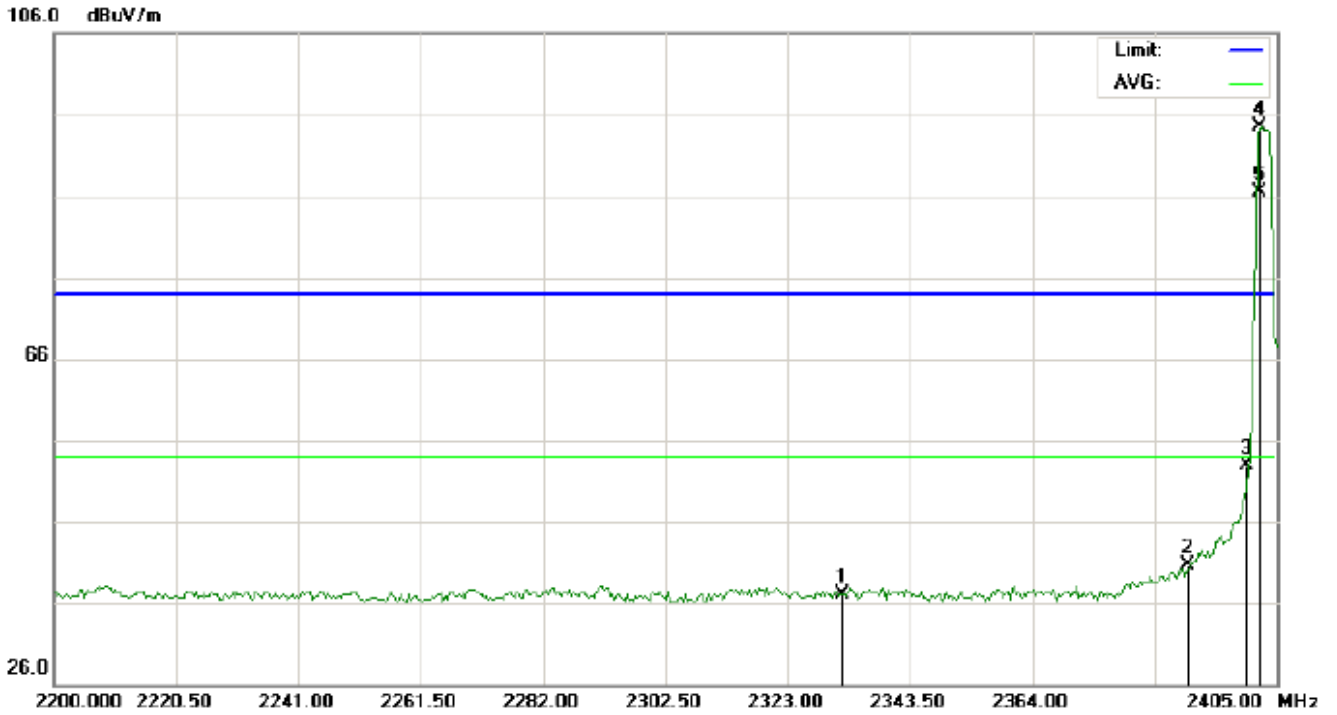

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
									cm	degree	
1		2332.225	23.64	13.41	37.05	74.00	-36.95	peak			
2		2390.000	27.18	13.45	40.63	74.00	-33.37	peak			
3		2400.000	39.44	13.46	52.90	74.00	-21.10	peak			
4	X	2402.000	81.09	13.46	94.55	74.00	20.55	peak			
5	*	2402.000	73.04	13.46	86.50	54.00	32.50	AVG	100	315	




TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

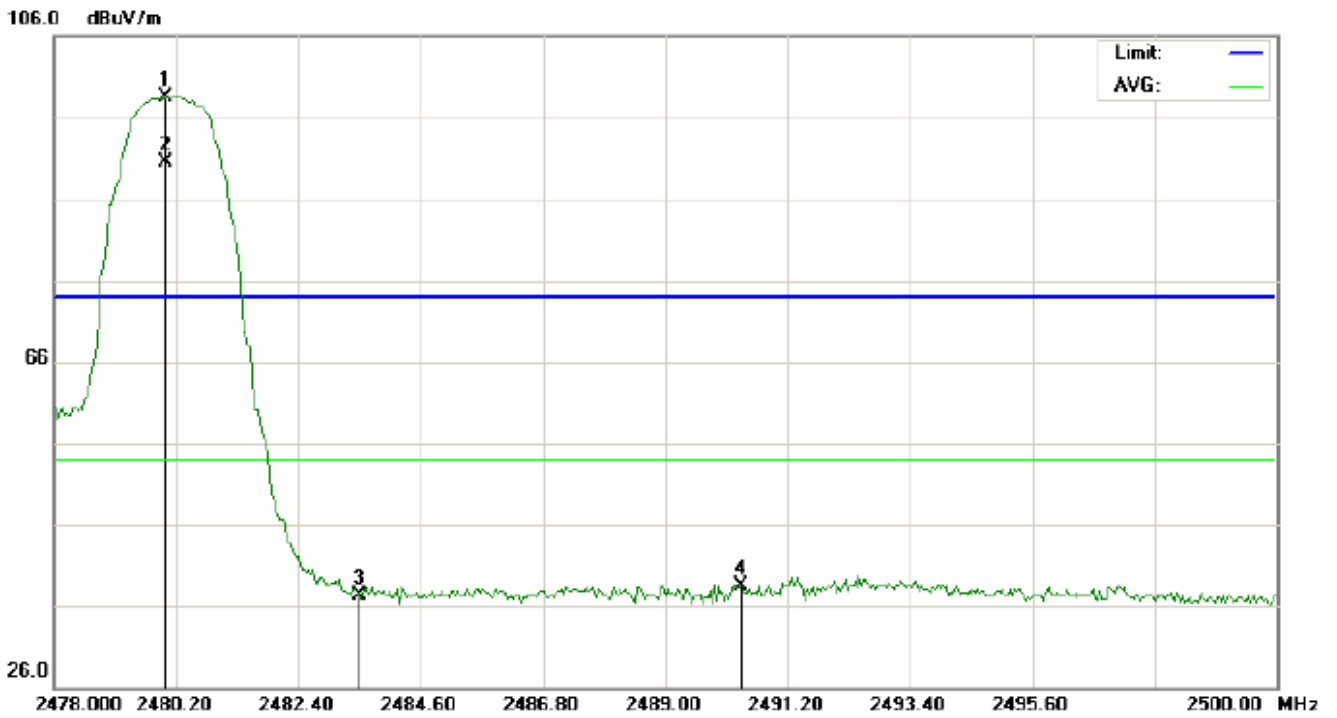

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
1	X	2480.000	84.36	14.11	98.47	74.00	24.47	peak			
2	*	2480.000	76.40	14.11	90.51	54.00	36.51	AVG	100	128	
3		2483.500	23.16	14.13	37.29	74.00	-36.71	peak			
4		2490.357	24.40	14.17	38.57	74.00	-35.43	peak			



TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

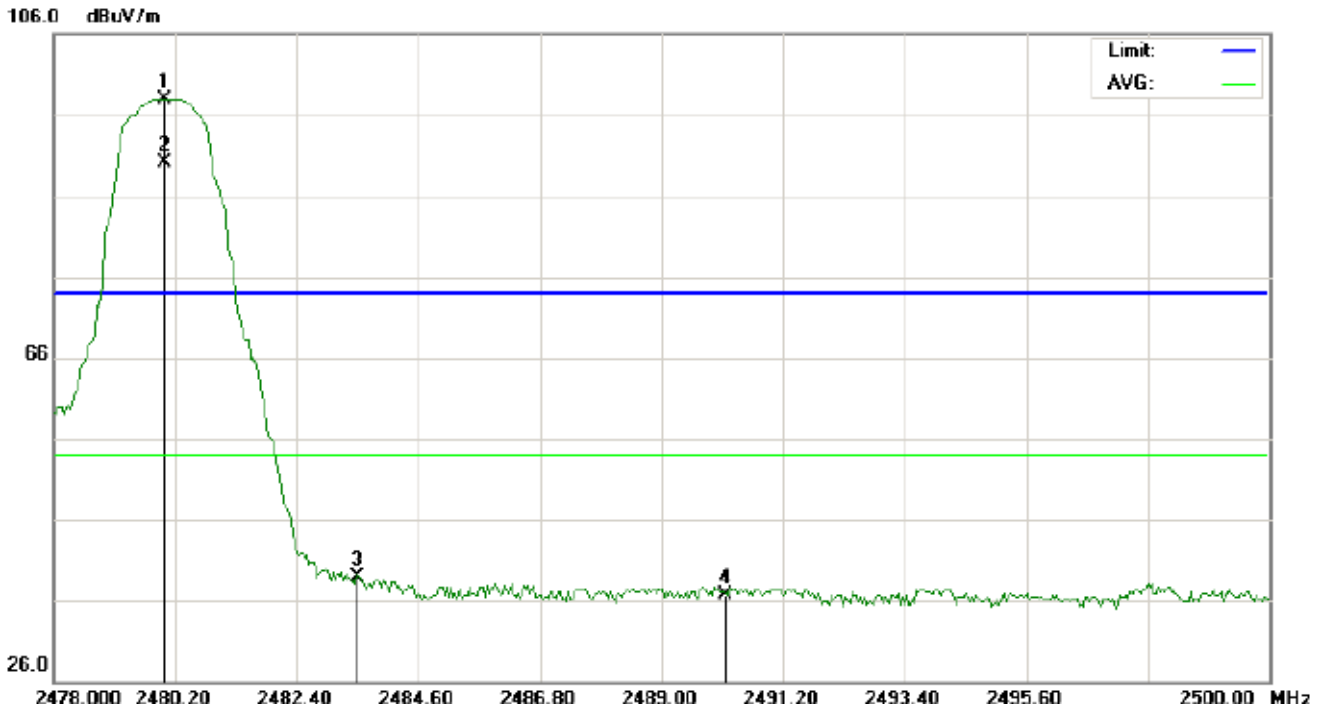

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	X	2480.000	83.89	14.11	98.00	74.00	24.00	peak			
2	*	2480.000	75.95	14.11	90.06	54.00	36.06	AVG	100	311	
3		2483.500	24.72	14.13	38.85	74.00	-35.15	peak			
4		2490.173	22.57	14.17	36.74	74.00	-37.26	peak			

**RESULT: PASS**

**Note:** Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.


Hopping on mode and Hopping off mode have been tested, but only worst case reported.

## 6. OCCUPIED BANDWIDTH MEASUREMENT

### 6.1. MEASUREMENT PROCEDURE

1. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
2. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel  
 RBW  $\geq$  1% of the 20 dB bandwidth, VBW  $\geq$  3RBW; Sweep = auto; Detector function = peak
3. Set SPA Trace 1 Max hold, then View.

### 6.2. TEST SET-UP

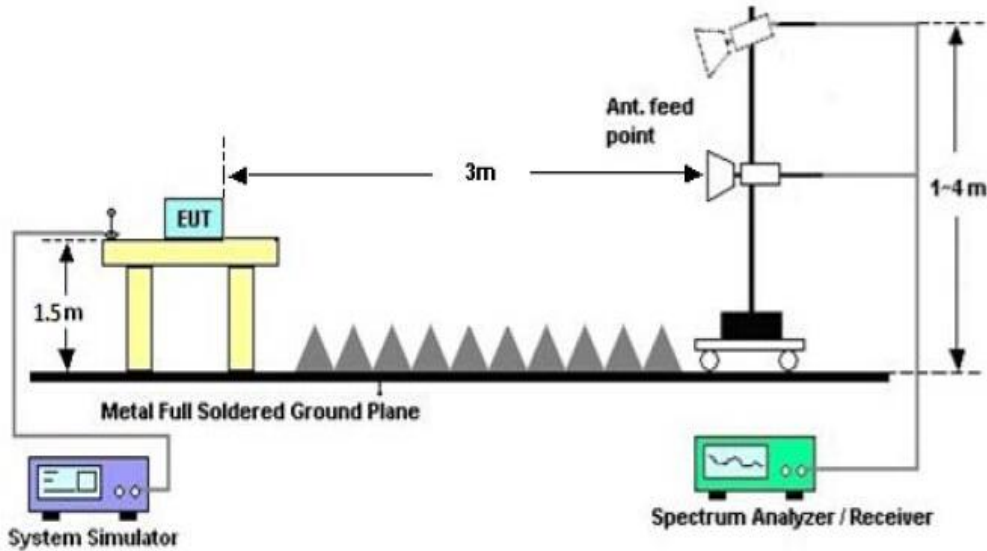


### 6.3. LIMITS AND MEASUREMENT RESULTS FOR BR/EDR


BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULT				
Applicable Limits	Measurement Result			
	Test Data (MHz)			Result
		99%OBW (MHz)	-20dB BW(MHz)	
N/A	Low Channel	0.924	1.103	PASS
	Middle Channel	0.925	1.104	PASS
	High Channel	0.937	1.099	PASS



TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

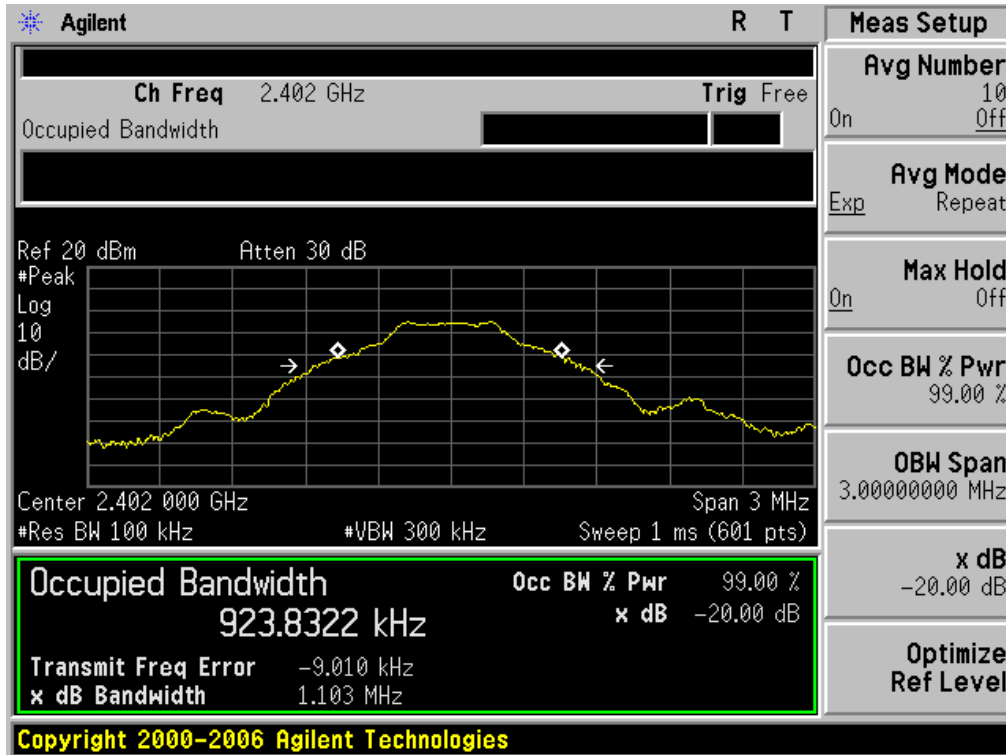


TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

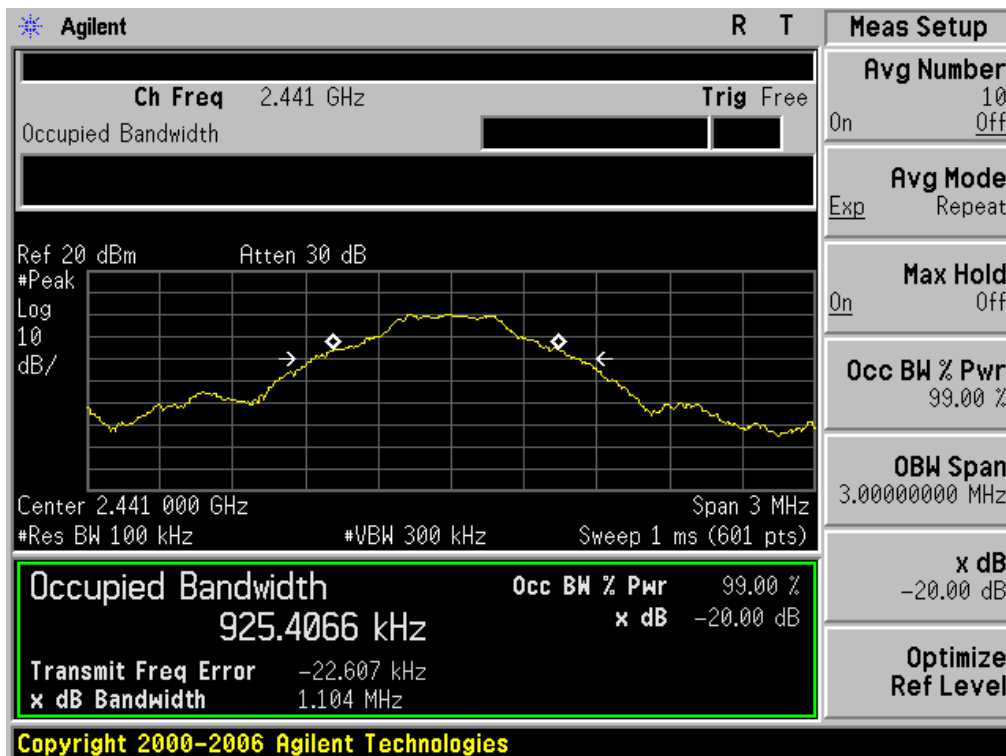




### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

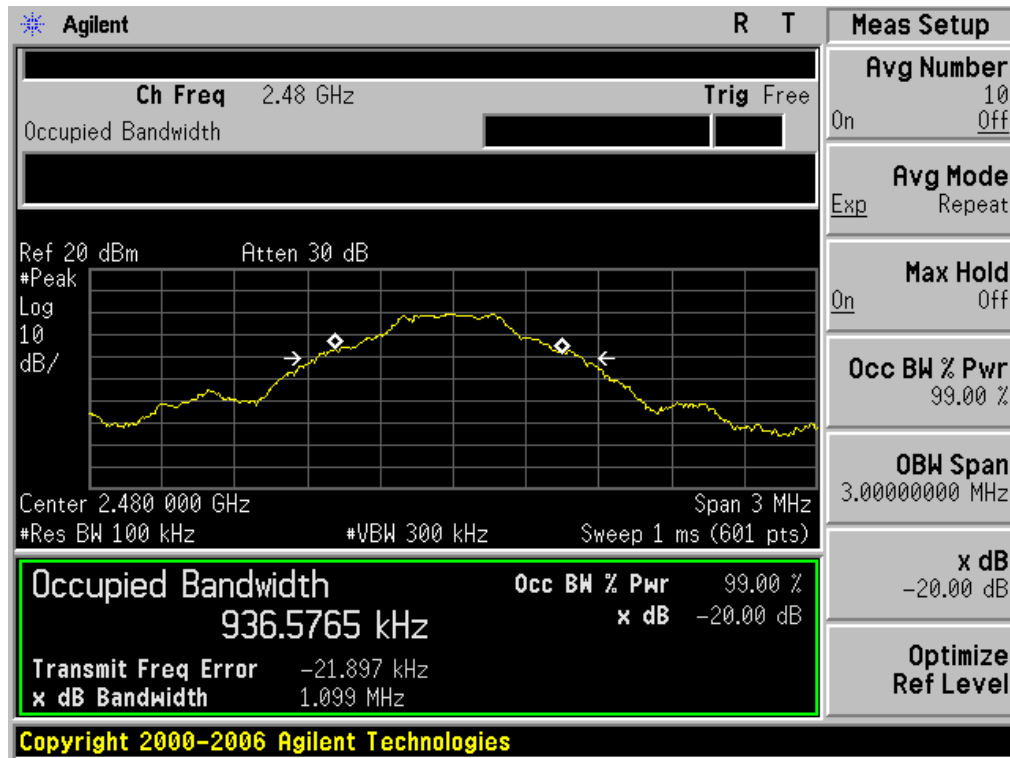




BLUETOOTH 2MBPS LIMITS AND MEASUREMENT RESULT				
Applicable Limits	Measurement Result			
	Test Data (MHz)			Result
		99%OBW (MHz)	-20dB BW(MHz)	
N/A	Low Channel	1.220	1.365	PASS
	Middle Channel	1.208	1.362	PASS
	High Channel	1.203	1.377	PASS

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

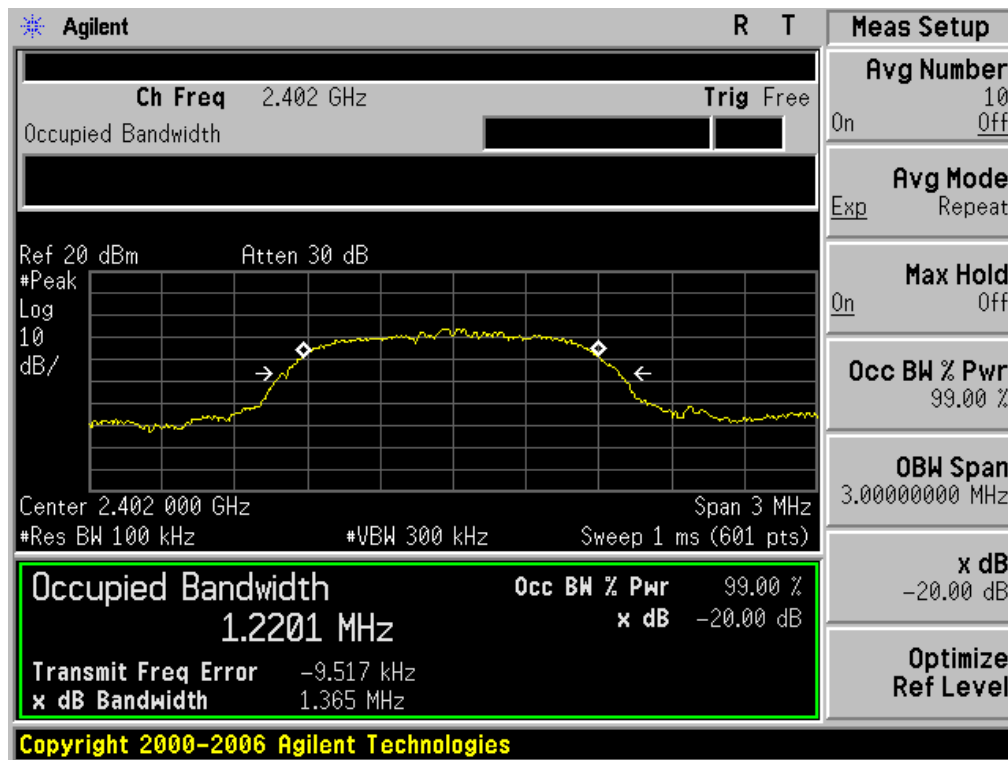




### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

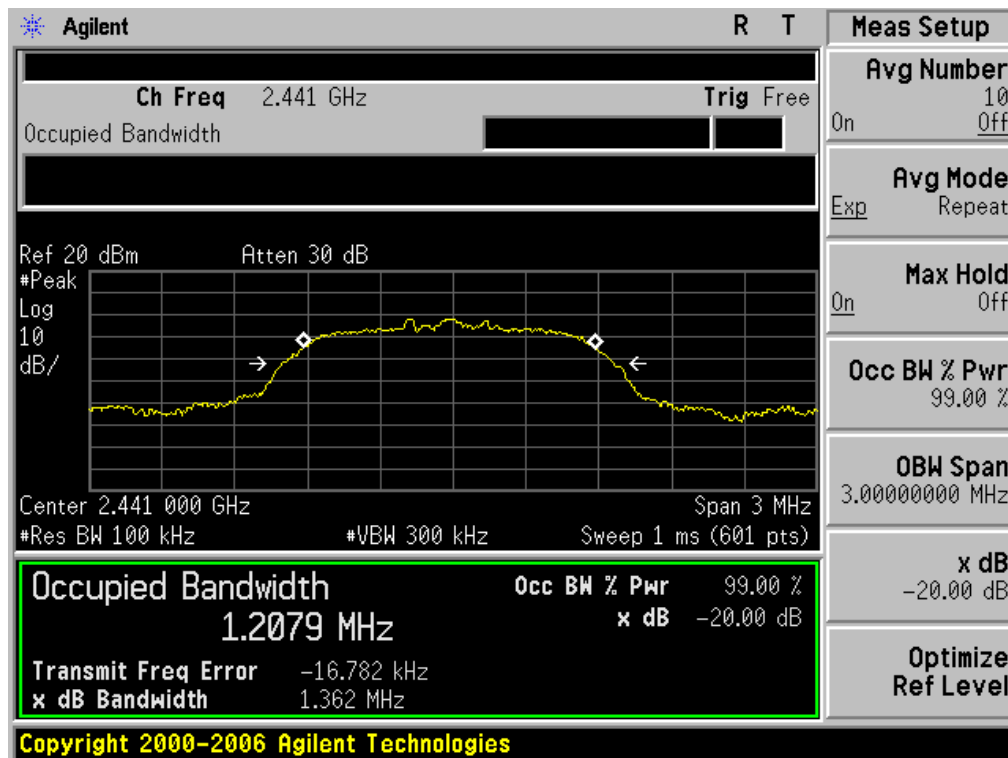

### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

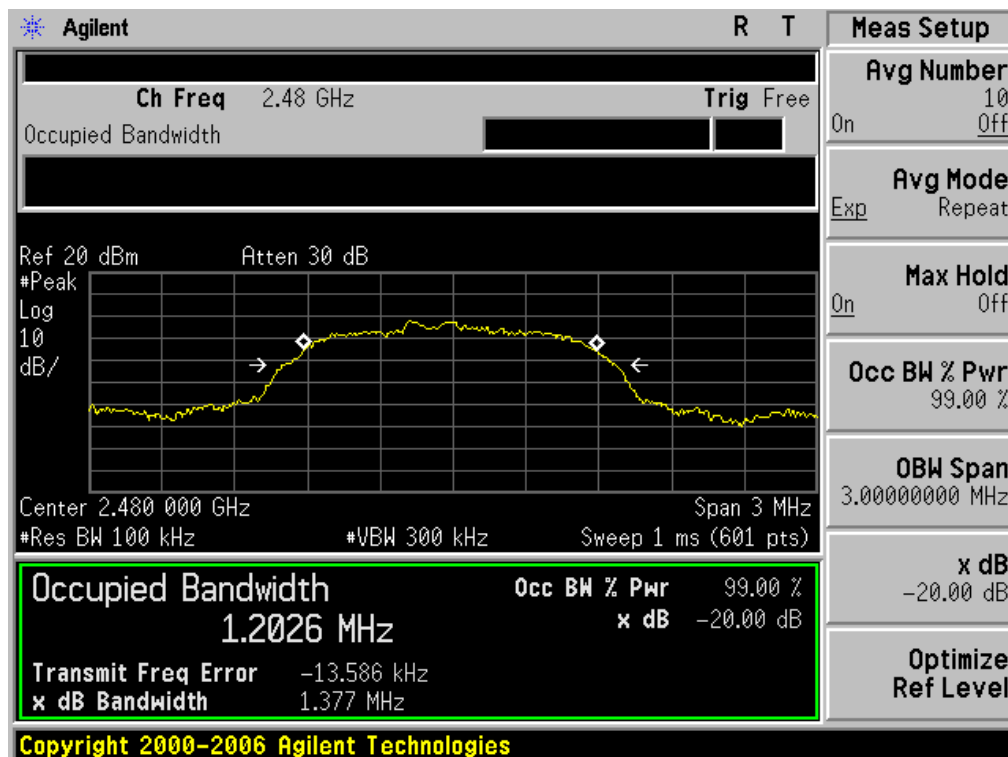







BLUETOOTH 3MBPS LIMITS AND MEASUREMENT RESULT				
Applicable Limits	Measurement Result			
	Test Data (MHz)			Result
		99%OBW (MHz)	-20dB BW(MHz)	
N/A	Low Channel	1.205	1.373	PASS
	Middle Channel	1.209	1.353	PASS
	High Channel	1.202	1.375	PASS

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

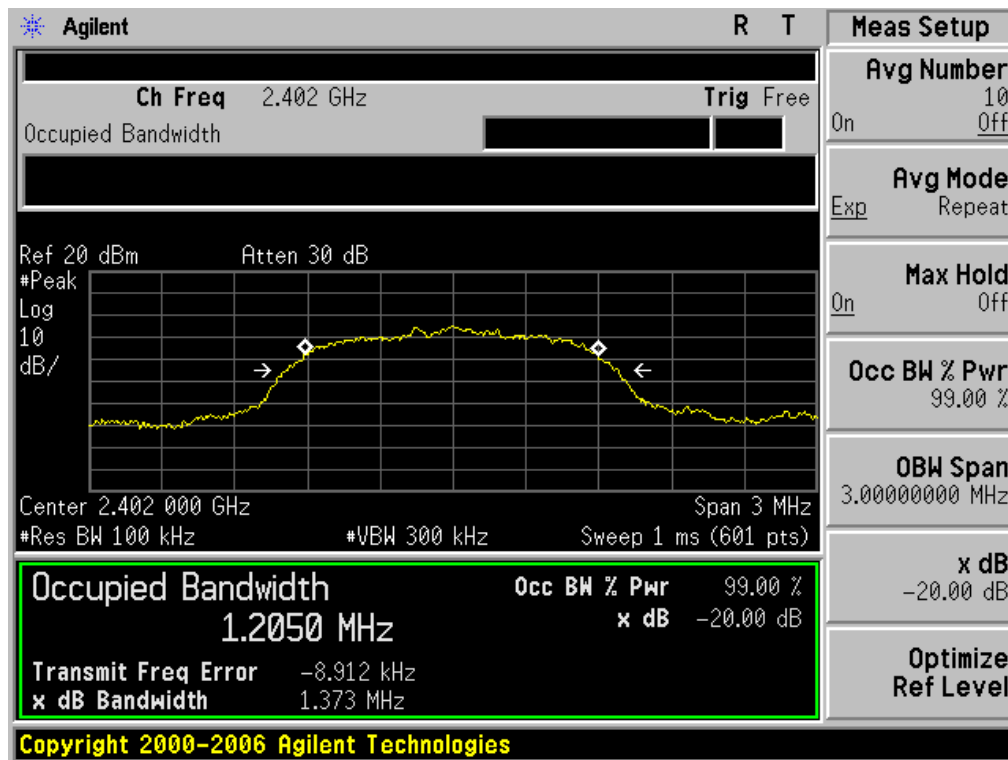




### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

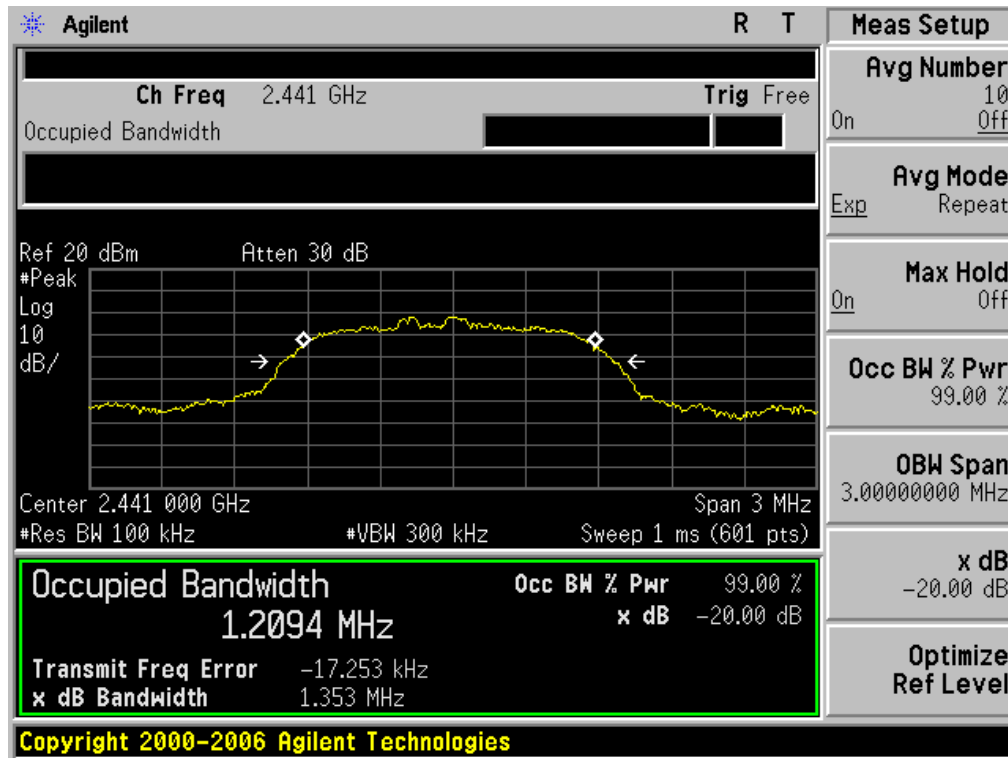

### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

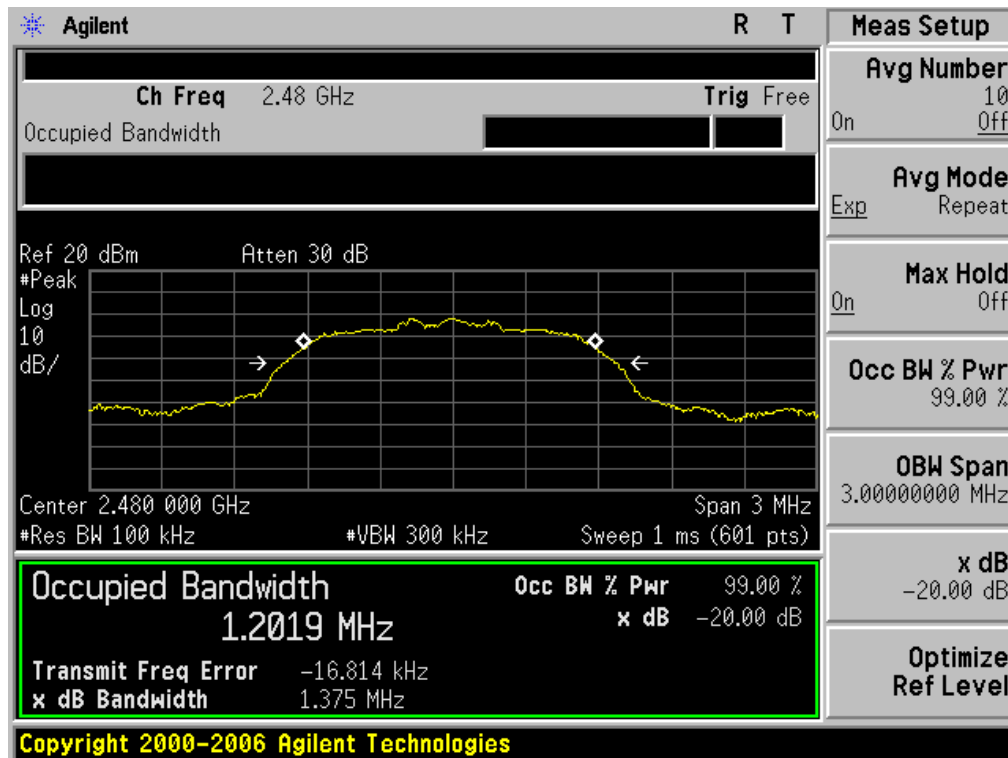

## 7. ANTENNA REQUIREMENT


### Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### ANTENNA

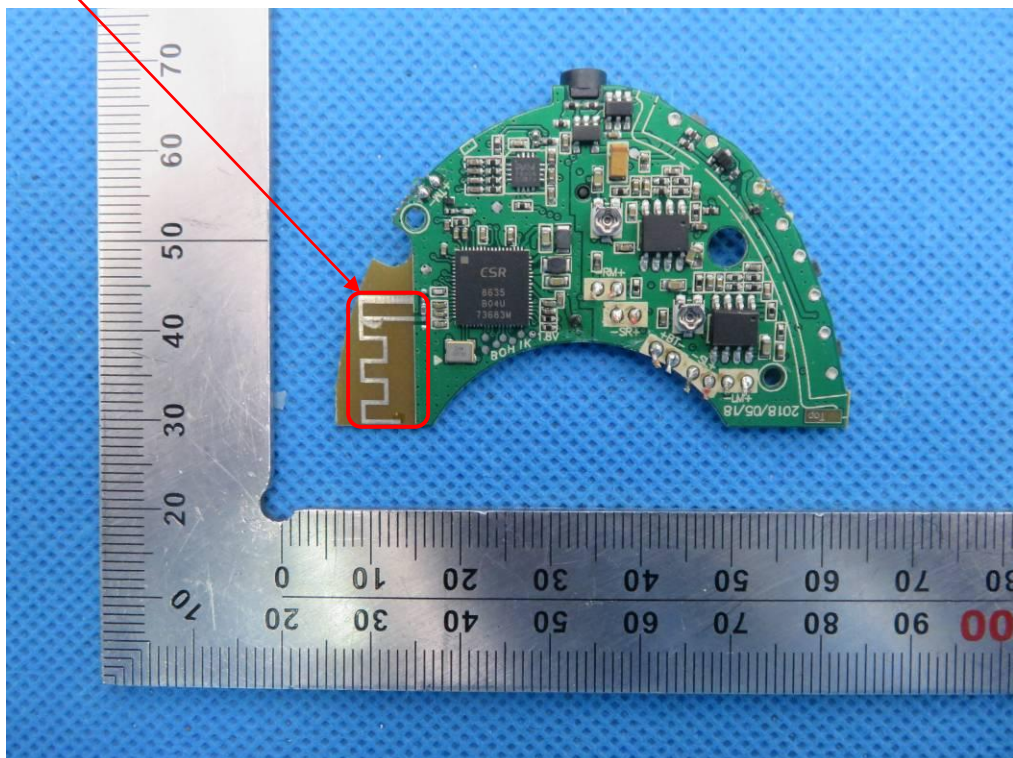



## 8. PHOTOGRAPH OF TEST

FCC LINE CONDUCTED EMISSION TEST SETUP



FCC RADIATED EMISSION TEST SETUP

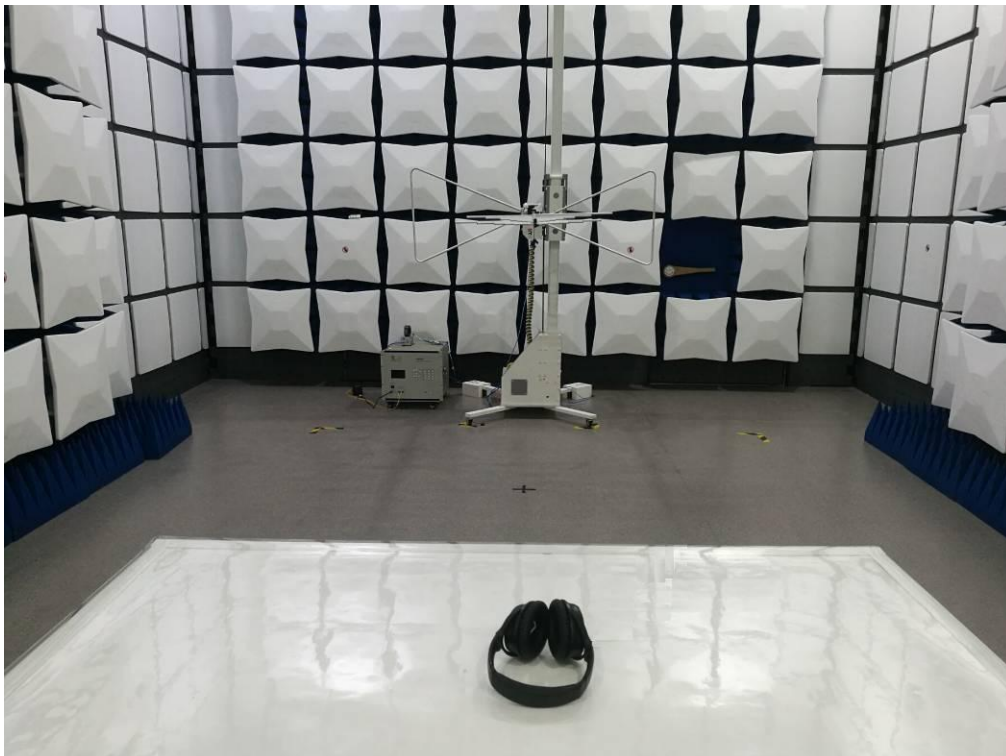

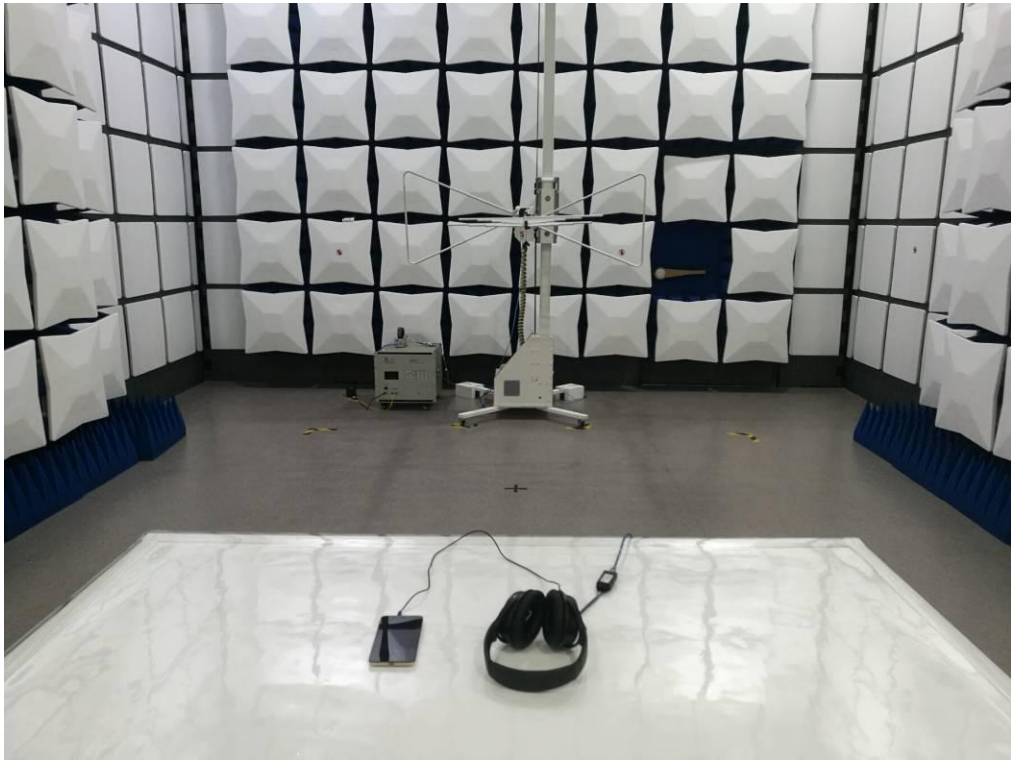



## 9. PHOTOGRAPHS OF EUT

TOP VIEW OF EUT



BOTTOM VIEW OF EUT



FRONT VIEW OF EUT



BACK VIEW OF EUT





LEFT VIEW OF EUT



RIGHT VIEW OF EUT





VIEW OF EUT (PORT)-1



VIEW OF EUT (PORT)-2




OPEN VIEW OF EUT




VIEW OF BATTERY




INTERNAL VIEW OF EUT-1

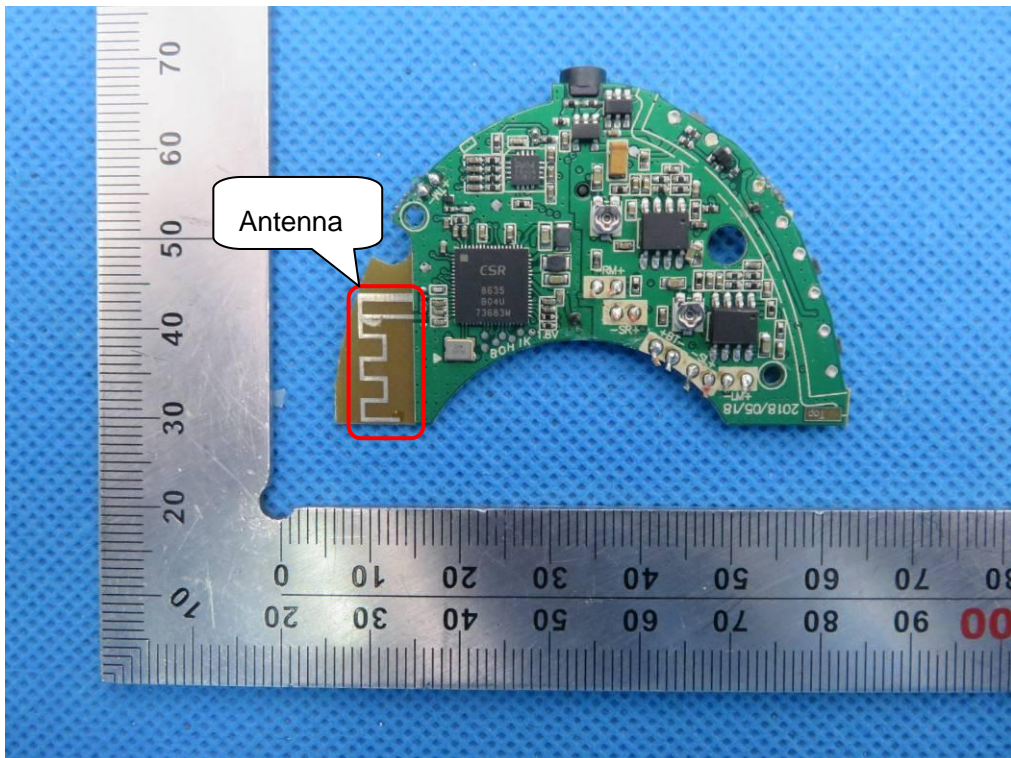


INTERNAL VIEW OF EUT-2

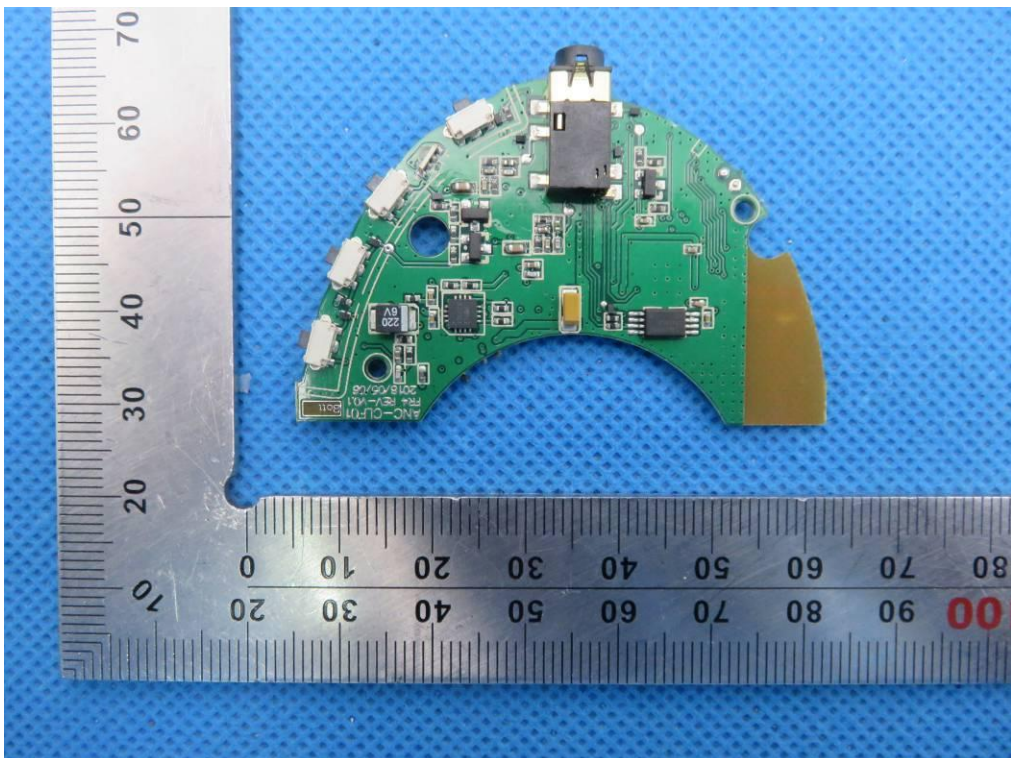

INTERNAL VIEW OF EUT-3

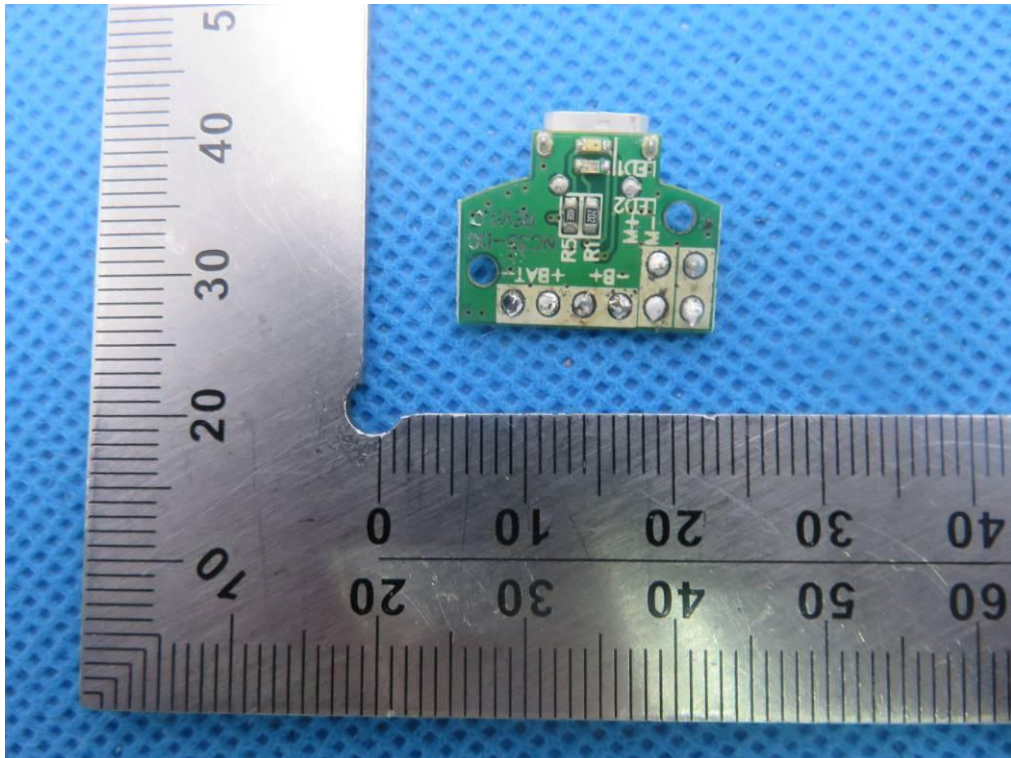

INTERNAL VIEW OF EUT-4

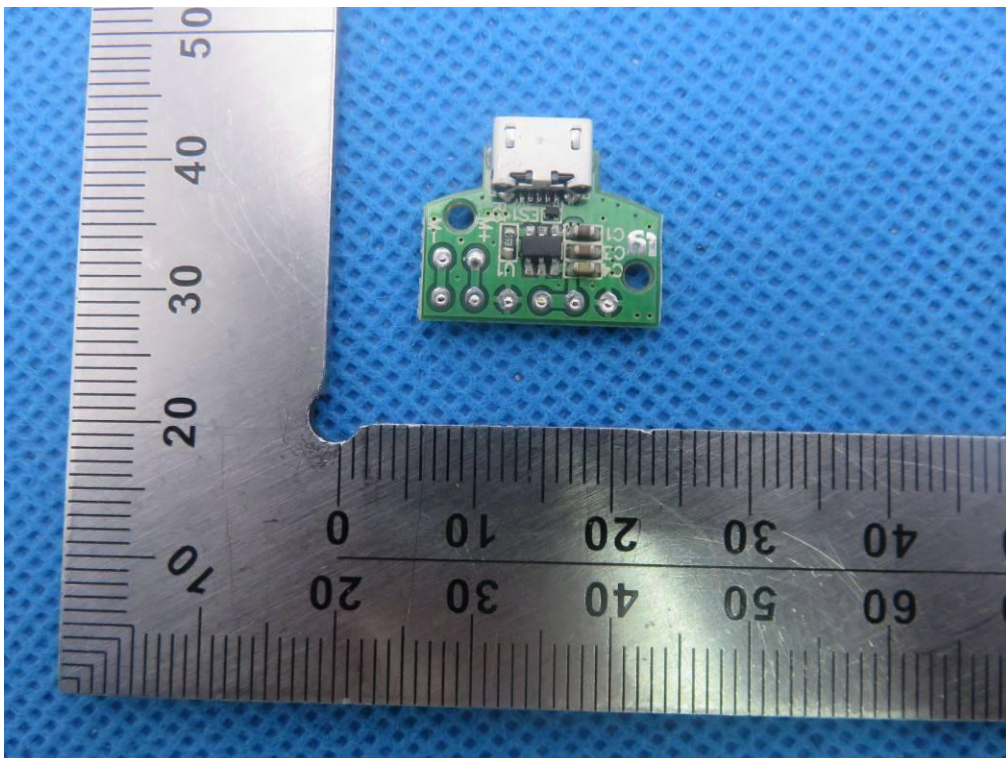

INTERNAL VIEW OF EUT-5



VIEW OF ADAPTER (AE)



The adapter was supplied by HUAKE

----END OF REPORT----