

# FCC TEST REPORT

For

Shenzhen Feihe Electronics Co., Ltd

led table lamp

Model No.: U12Q

Prepared For : Shenzhen Feihe Electronics Co., Ltd  
Address : 3/F, Bldg 3, HongFa Innovative Park HuangMaBu Community, Baoan District, Shenzhen, China

Prepared By : Shenzhen Anbotek Compliance Laboratory Limited  
Address : 1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102  
Tel: (86) 755-26066440 Fax: (86) 755-26014772

Report Number : SZAWW181012001-01  
Date of Receipt : Oct. 12, 2018  
Date of Test : Oct. 12~25, 2018  
Date of Report : Oct. 25, 2018

# Contents

1. General Information.....	4
1.1. Client Information.....	4
1.2. Description of Device (EUT).....	4
1.3. Auxiliary Equipment Used During Test.....	5
1.4. Description of Test Modes.....	5
1.5. Description Of Test Setup.....	6
1.6. Test Equipment List.....	7
1.7. Description of Test Facility.....	8
2. Summary of Test Results.....	9
3. Conducted Emission Test.....	10
3.1. Test Standard and Limit.....	10
3.2. Test Setup.....	10
3.3. Test Procedure.....	10
3.4. Test Data.....	10
4. Radiation Spurious Emission and Band Edge.....	15
4.1. Test Standard and Limit.....	15
4.2. Test Setup.....	15
4.3. Test Procedure.....	16
4.4. Test Data.....	17
5. Antenna Requirement.....	23
5.1. Test Standard and Requirement.....	23
5.2. Antenna Connected Construction.....	23
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	24
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	26
APPENDIX III -- INTERNAL PHOTOGRAPH.....	32

# TEST REPORT

Applicant : Shenzhen Feihe Electronics Co., Ltd  
Manufacturer : Shenzhen Feihe Electronics Co., Ltd  
Product Name : led table lamp  
Model No. : U12Q  
Trade Mark : N.A.  
Rating(s) : Input: DC 12V, 1.5A (Via adapter input: AC 100~240V, 50/60Hz, Max: 0.8A)  
Wireless output: 5W

**Test Standard(s) : FCC Part15 Subpart C 2018, Paragraph 15.209**

**Test Method(s) : ANSI C63.10: 2013**

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.


Date of Test Oct. 12~25, 2018

Prepared by



(Engineer / Tangcy Tang)

Reviewer

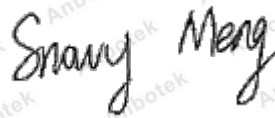

(Supervisor / Snowy Meng)

Approved & Authorized Signer



(Manager / Sally Zhang)





# 1. General Information

## 1.1. Client Information

Applicant	:	Shenzhen Feihe Electronics Co., Ltd
Address	:	3/F, Bldg 3, HongFa Innovative Park HuangMaBu Community, Baoan District, Shenzhen, China
Manufacturer	:	Shenzhen Feihe Electronics Co., Ltd
Address	:	3/F, Bldg 3, HongFa Innovative Park HuangMaBu Community, Baoan District, Shenzhen, China
Factory	:	Shenzhen Feihe Electronics Co., Ltd
Address	:	3/F, Bldg 3, HongFa Innovative Park HuangMaBu Community, Baoan District, Shenzhen, China

## 1.2. Description of Device (EUT)

Product Name	:	led table lamp
Model No.	:	U12Q
Trade Mark	:	N.A.
Test Power Supply	:	AC 240V, 60Hz for adapter/ AC 120V, 60Hz for adapter/
Test Sample No.	:	S1(Normal Sample), S2(Engineering Sample)
Product Description	Operation Frequency:	111~205KHz
	Modulation Type:	MSK
	Antenna Type:	Inductive loop coil Antenna
	Antenna Gain(Peak):	0 dBi
Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.		

### 1.3. Auxiliary Equipment Used During Test

Adapter	:	Model: TY1200150A1mn Input: 100-240V~ 50/60Hz, 0.8A Output: DC 12V, 1500mA
---------	---	--

### 1.4. Description of Test Modes



To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX Mode

For Conducted Emission	
Final Test Mode	Description
Mode 1	TX Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	TX Mode

### 1.5. Description Of Test Setup

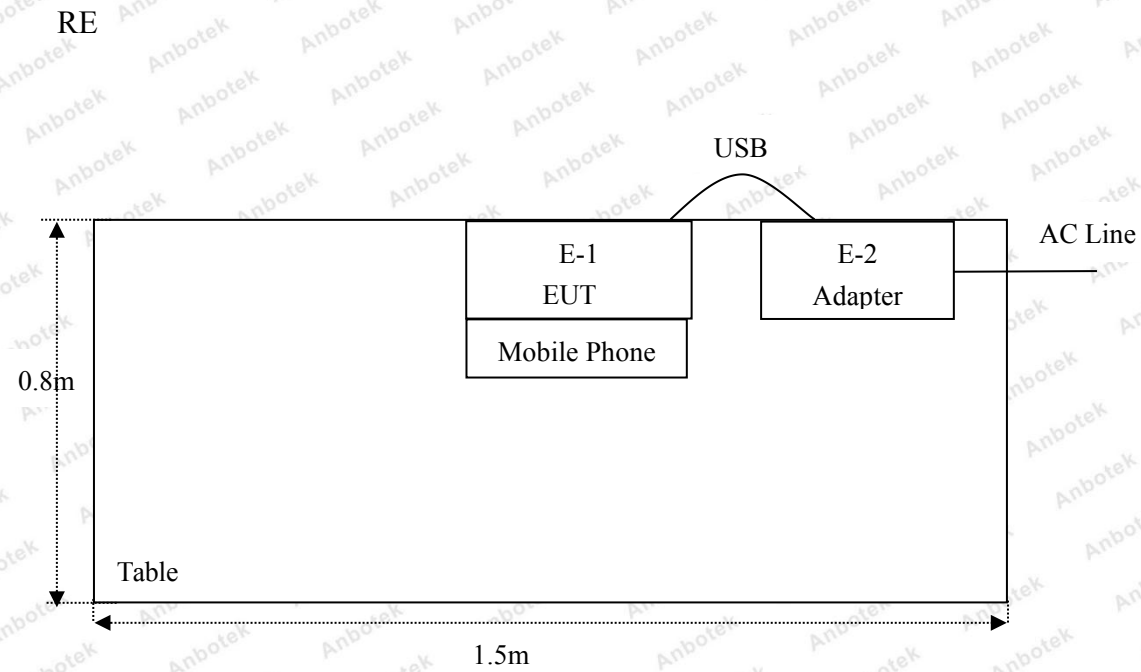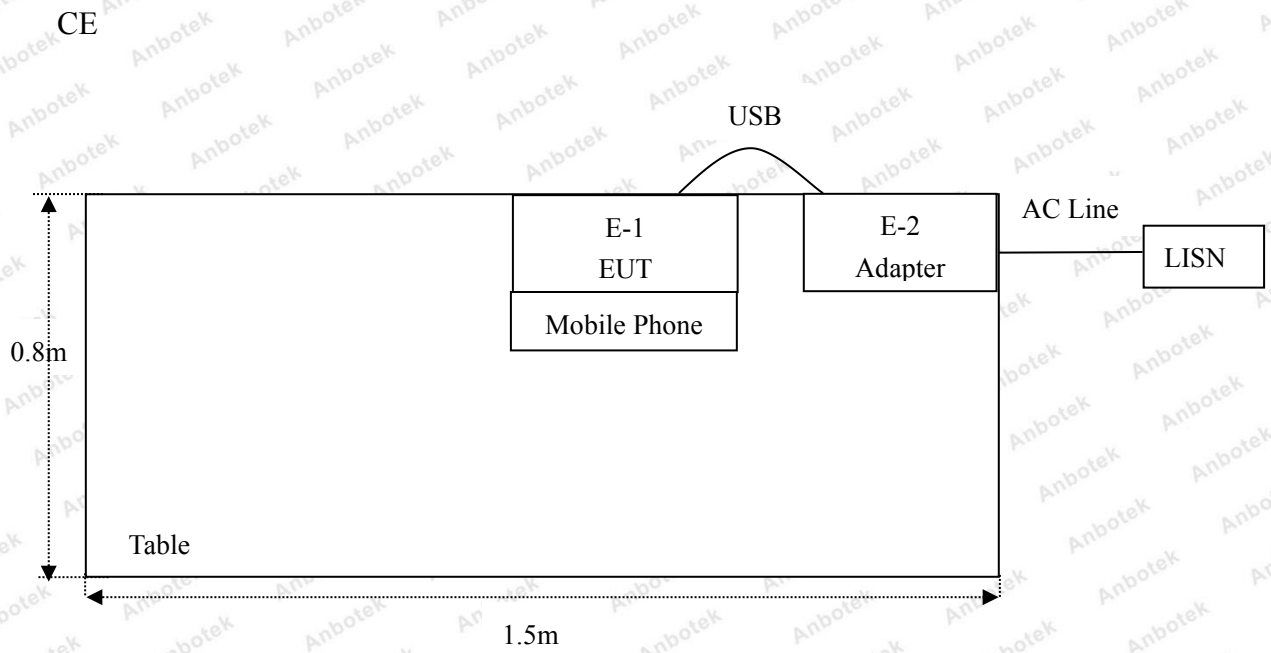



### 1.6. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Nov. 17, 2017	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Nov. 17, 2017	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Nov. 17, 2017	1 Year
4.	Spectrum Analysis	Agilent	E4407B	US39390582	Nov. 17, 2017	1 Year
5.	MAX Spectrum Analysis	Agilent	N9020A	MY51170037	Nov. 18, 2017	1 Year
6.	Preamplifier	SKET Electronic	BK1G18G30D	KD17503	Nov. 17, 2017	1 Year
7.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Nov. 20, 2017	1 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Nov. 20, 2017	1 Year
9.	Loop Antenna	Schwarzbeck	HFH2-Z2	100047	Nov. 17, 2017	1 Year
10.	Horn Antenna	Schwarzbeck	BBHA9170	9170-375	Nov. 17, 2017	1 Year
11.	Pre-amplifier	SONOMA	310N	186860	Nov. 17, 2017	1 Year
12.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
13.	RF Test Control System	YIHENG	YH3000	2017430	Nov. 18, 2017	1 Year
14.	Power Sensor	DAER	RPR3006W	15I00041SN045	Nov. 17, 2017	1 Year
15.	Power Sensor	DAER	RPR3006W	15I00041SN046	Nov. 17, 2017	1 Year
16.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Nov. 18, 2017	1 Year
17.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Nov. 18, 2017	1 Year
18.	Signal Generator	Agilent	E4421B	MY41000743	Nov. 18, 2017	1 Year
19.	DC Power Supply	LW	TPR-6410D	349315	Nov. 01, 2017	1 Year
20.	Constant Temperature Humidity Chamber	Sertep	ZJ-HWHS80B	ZJ-17042804	Nov. 01, 2017	1 Year

## 1.7. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

### **FCC-Registration No.: 184111**

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, July 31, 2017.

### **ISED-Registration No.: 8058A-1**

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A-1, June 13, 2016.

### **Test Location**

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102



## 2. Summary of Test Results

Standard Section	Test Item	Result
FCC Part 15, Paragraph 15.207	Conducted Emission Test	PASS
FCC Part 15, Paragraph 15.209(a)(f)	Spurious Emission	PASS
Part 15.203	Antenna Requirement	PASS


### 3. Conducted Emission Test

#### 3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
Test Limit	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50

**Remark:** (1) \*Decreasing linearly with logarithm of the frequency.  
(2) The lower limit shall apply at the transition frequency.

#### 3.2. Test Setup

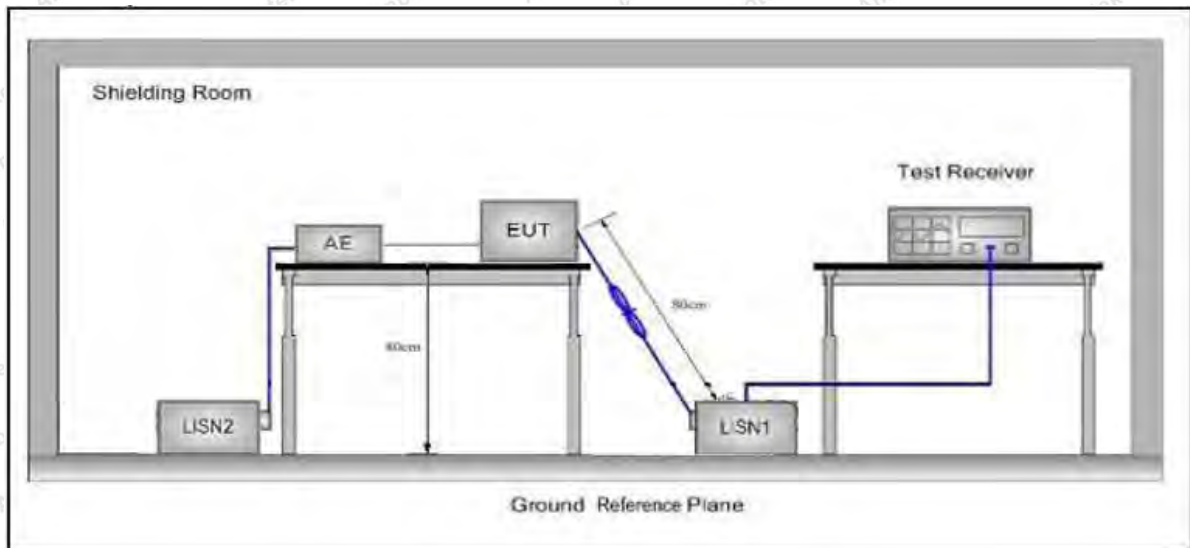

#### 3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.


The frequency range from 150kHz to 30MHz is checked.

#### 3.4. Test Data

Please to see the following pages

**Conducted Emission Test Data**

Test Site: 1# Shielded Room  
 Operating Condition: TX Mode  
 Test Specification: AC 240V, 60Hz for adapter  
 Comment: Live Line  
 Tem.: 24.0°C Hum.: 53%

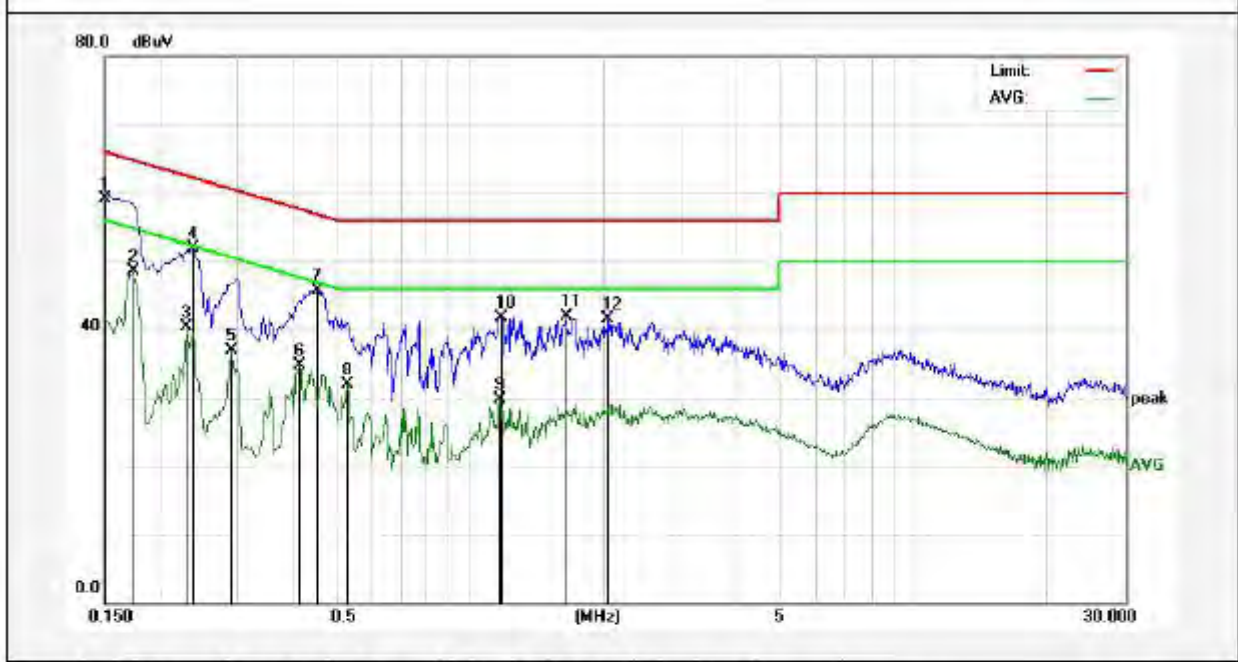


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1500	39.23	19.90	59.13	65.99	-6.86	QP	
2	0.1740	28.62	19.90	48.52	54.76	-6.24	AVG	
3	0.2300	20.32	19.89	40.21	52.45	-12.24	AVG	
4	0.2380	31.97	19.89	51.86	62.16	-10.30	QP	
5	0.2900	17.00	19.89	36.89	50.52	-13.63	AVG	
6	0.4140	14.83	19.94	34.77	47.57	-12.80	AVG	
7	0.4540	25.72	19.96	45.68	56.80	-11.12	QP	
8	0.5299	11.83	19.99	31.82	46.00	-14.18	AVG	
9	1.1700	9.64	20.12	29.76	46.00	-16.24	AVG	
10	1.1740	21.67	20.12	41.79	56.00	-14.21	QP	
11	1.6500	21.68	20.13	41.81	56.00	-14.19	QP	
12	2.0500	21.43	20.14	41.57	56.00	-14.43	QP	



**Conducted Emission Test Data**


Test Site: 1# Shielded Room  
 Operating Condition: TX Mode  
 Test Specification: AC 240V, 60Hz for adapter  
 Comment: Neutral Line  
 Tem.: 24.0°C Hum.: 53%

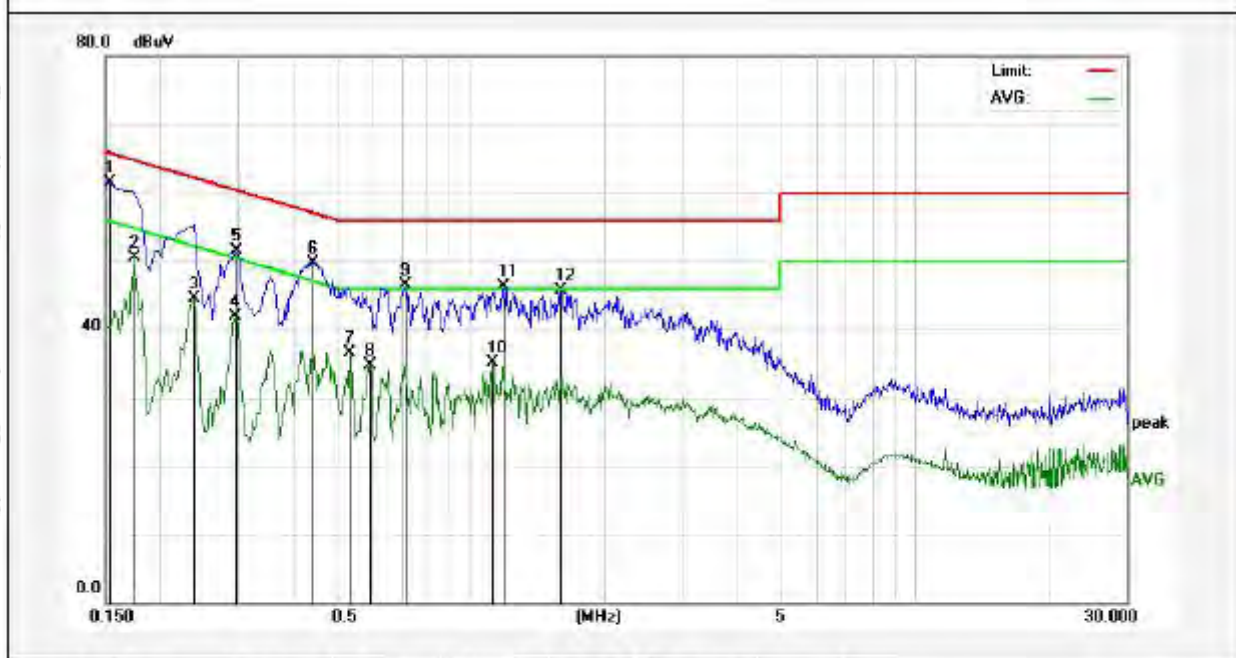

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1539	41.66	19.90	61.56	65.78	-4.22	QP	
2	0.1740	30.69	19.90	50.59	54.76	-4.17	AVG	
3	0.2380	24.67	19.89	44.56	52.16	-7.60	AVG	
4	0.2940	22.11	19.89	42.00	50.41	-8.41	AVG	
5	0.2980	31.57	19.89	51.46	60.30	-8.84	QP	
6	0.4420	29.84	19.95	49.79	57.02	-7.23	QP	
7	0.5340	16.53	19.99	36.52	46.00	-9.48	AVG	
8	0.5940	14.65	20.01	34.66	46.00	-11.34	AVG	
9	0.7140	26.41	20.04	46.45	56.00	-9.55	QP	
10	1.1220	15.02	20.12	35.14	46.00	-10.86	AVG	
11	1.1860	26.12	20.12	46.24	56.00	-9.76	QP	
12	1.5940	25.53	20.13	45.66	56.00	-10.34	QP	

**Conducted Emission Test Data**

Test Site: 1# Shielded Room  
 Operating Condition: TX Mode  
 Test Specification: AC 120V, 60Hz for adapter  
 Comment: Live Line  
 Tem.: 24.0°C Hum.: 53%

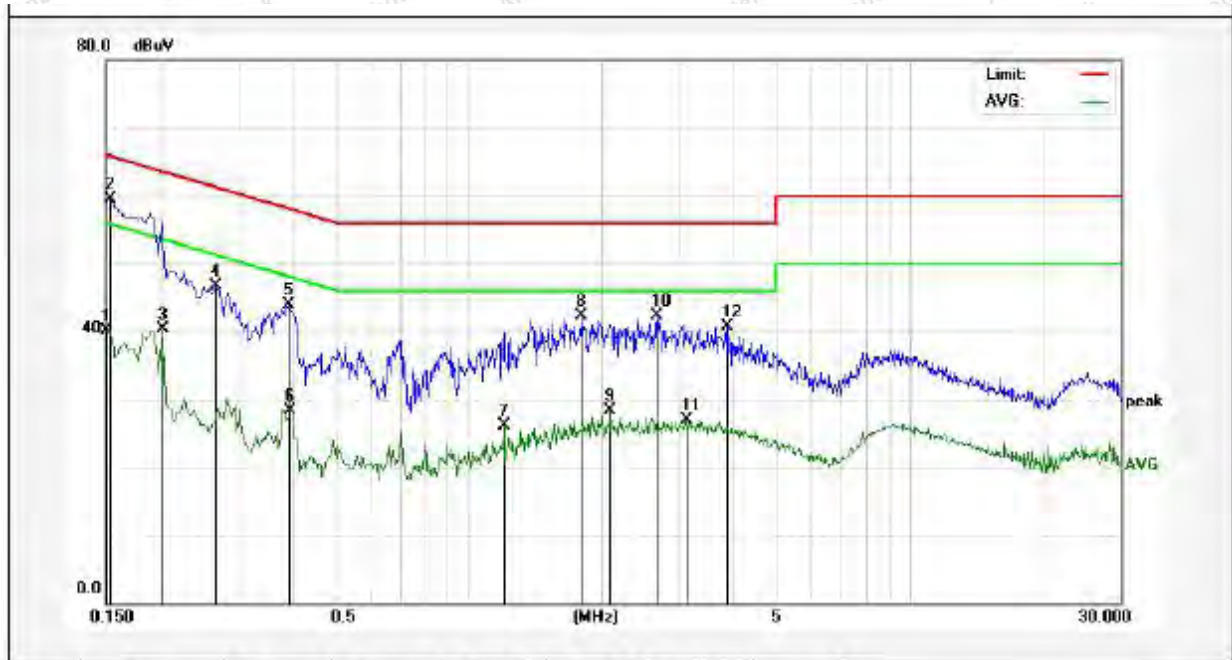


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1500	20.22	19.90	40.12	55.99	-15.87	AVG	
2	0.1539	39.62	19.90	59.52	65.78	-6.26	QP	
3	0.2020	20.44	19.90	40.34	53.52	-13.18	AVG	
4	0.2660	26.80	19.89	46.69	61.24	-14.55	QP	
5	0.3899	23.98	19.93	43.91	58.06	-14.15	QP	
6	0.3940	8.47	19.93	28.40	47.98	-19.58	AVG	
7	1.1980	5.96	20.12	26.08	46.00	-19.92	AVG	
8	1.8020	22.19	20.14	42.33	56.00	-13.67	QP	
9	2.0900	8.22	20.14	28.36	46.00	-17.64	AVG	
10	2.6740	22.23	20.15	42.38	56.00	-13.62	QP	
11	3.1300	6.74	20.16	26.90	46.00	-19.10	AVG	
12	3.8660	20.54	20.18	40.72	56.00	-15.28	QP	



**Conducted Emission Test Data**

Test Site: 1# Shielded Room  
 Operating Condition: TX Mode  
 Test Specification: AC 120V, 60Hz for adapter  
 Comment: Neutral Line  
 Tem.: 24.0°C Hum.: 53%

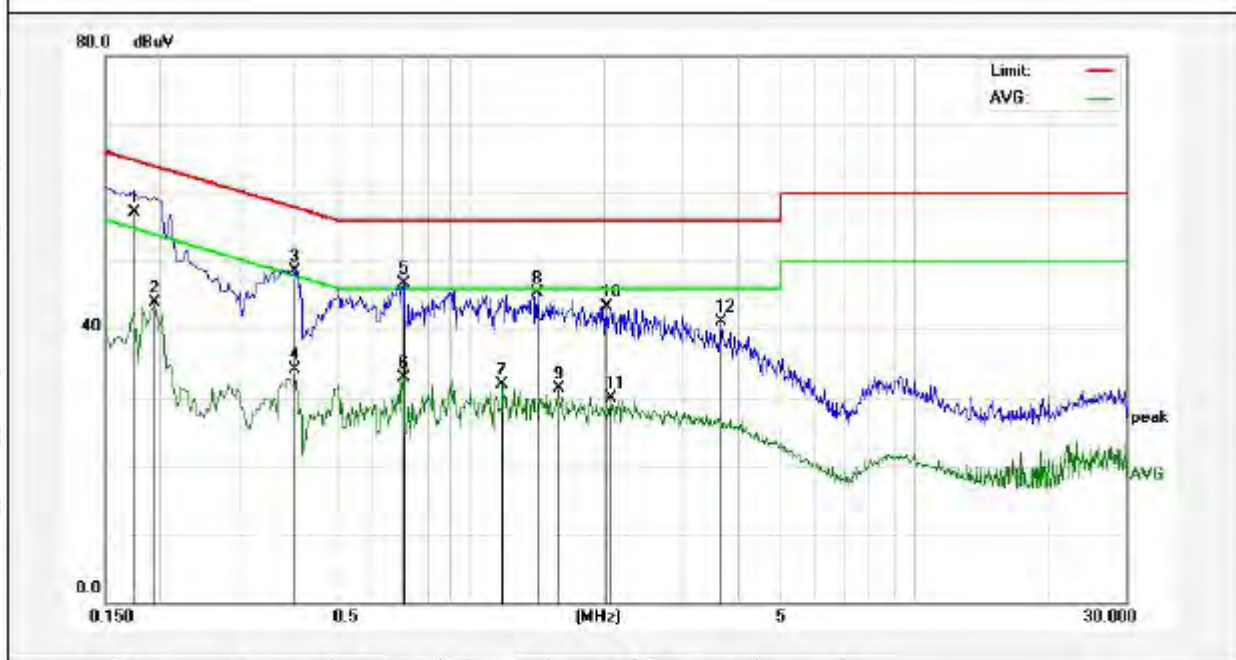

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1740	37.11	19.90	57.01	64.76	-7.75	QP	
2	0.1940	24.05	19.90	43.95	53.86	-9.91	AVG	
3	0.4020	28.52	19.94	48.46	57.81	-9.35	QP	
4	0.4020	14.13	19.94	34.07	47.81	-13.74	AVG	
5	0.7060	26.58	20.04	46.62	56.00	-9.38	QP	
6	0.7060	12.79	20.04	32.83	46.00	-13.17	AVG	
7	1.1820	11.87	20.12	31.99	46.00	-14.01	AVG	
8	1.4180	25.08	20.13	45.21	56.00	-10.79	QP	
9	1.5780	11.15	20.13	31.28	46.00	-14.72	AVG	
10	2.0300	23.15	20.14	43.29	56.00	-12.71	QP	
11	2.0660	9.73	20.14	29.87	46.00	-16.13	AVG	
12	3.6620	20.89	20.17	41.06	56.00	-14.94	QP	



## 4. Radiation Spurious Emission and Band Edge

### 4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	-	74.0	Peak

**Remark:**

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

### 4.2. Test Setup

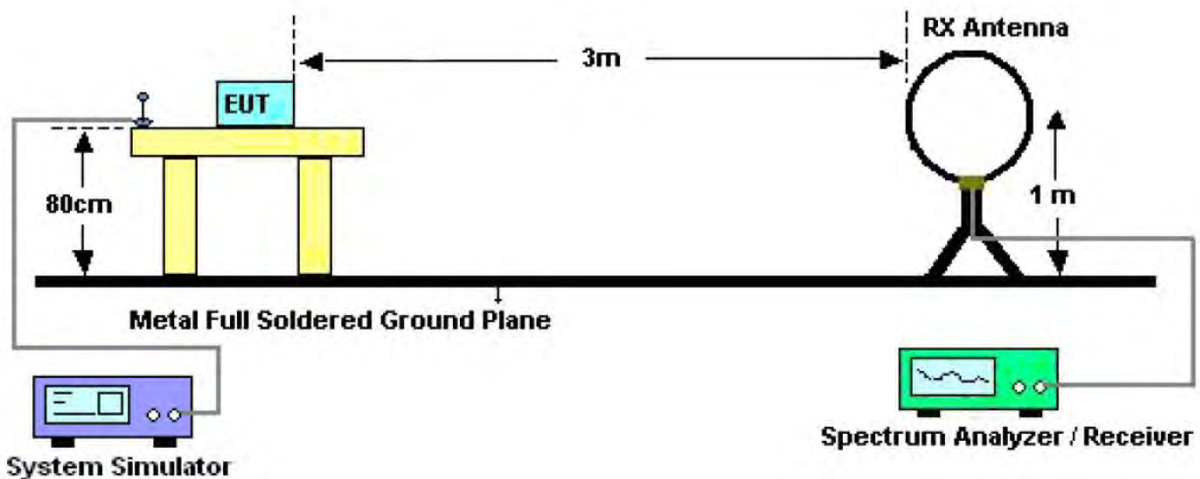


Figure 1. Below 30MHz

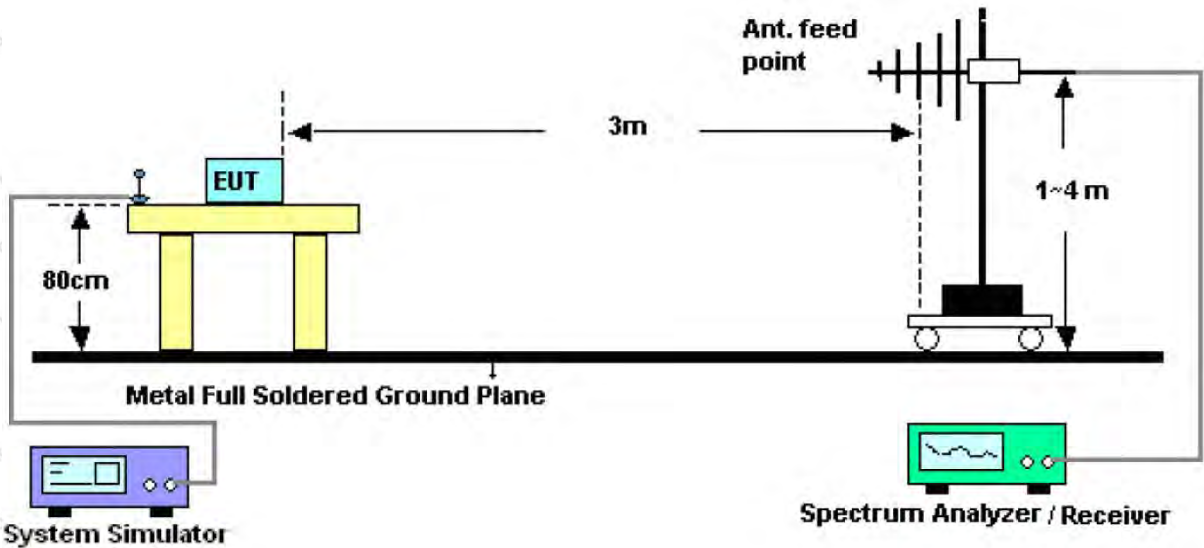


Figure 2. 30MHz to 1GHz

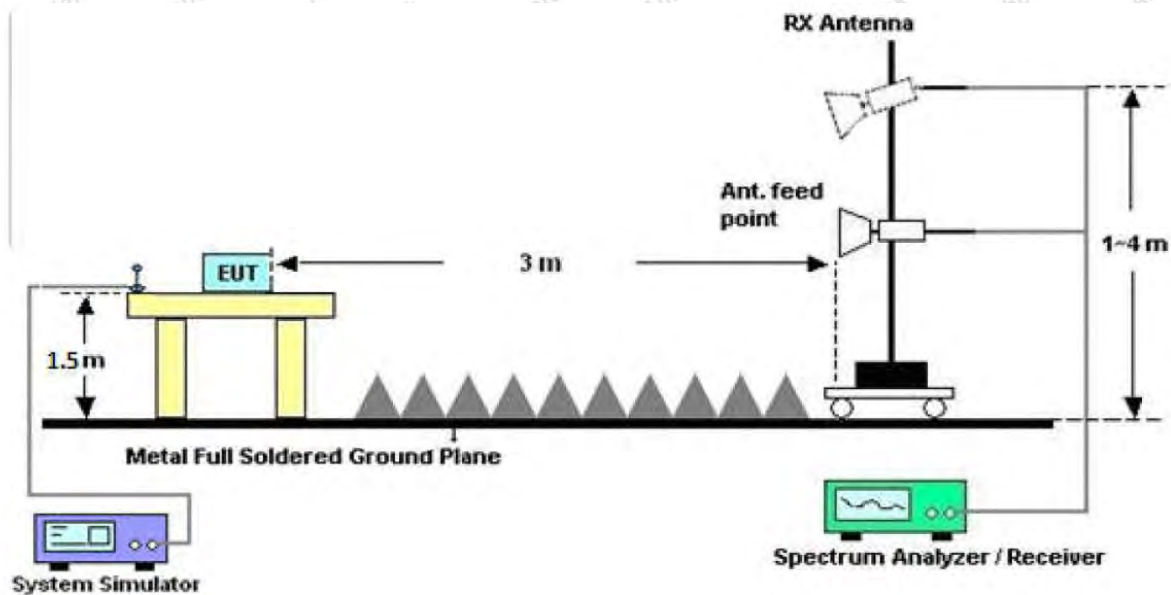


Figure 3. Above 1 GHz

### 4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9\*6\*6 Chamber. The device is evaluated in xyz orientation.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW =1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW =30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW =300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

#### 4.4. Test Data


**PASS**



**Test Results**

(Between 9KHz – 30MHz)

<b>Job No.:</b>	<b>SZAWW181012001-01</b>	<b>Power Source:</b>	<b>AC 120V, 60Hz for adapter</b>
<b>Standard:</b>	<b>FCC PART15 C_3m</b>	<b>Temp.(C)/Hum.(%RH):</b>	<b>24.2°C/55%RH</b>
<b>Test item:</b>	<b>Radiation Test</b>	<b>Distance:</b>	<b>3m</b>
<b>Test Mode:</b>	<b>Mode 1</b>		

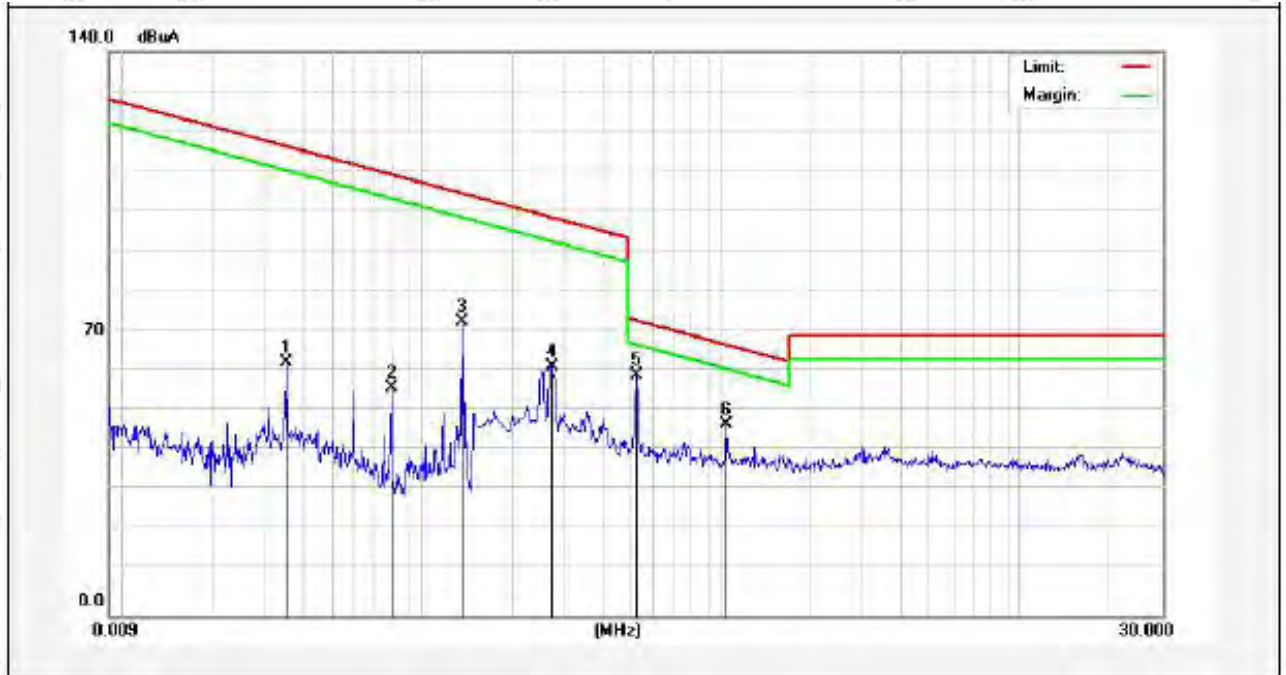


Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	degree
									(dgc)
0.0352	51.48	19.28	2.53	0	73.29	136.55	-63.26	Peak	29
0.0352	41.03	19.28	2.53	0	62.84	116.55	-53.71	AV	29
0.0792	42.90	19.30	2.54	0	64.74	129.54	-64.80	Peak	137
0.0792	34.68	19.30	2.54	0	56.52	109.54	-53.02	AV	137
0.1372	60.36	19.53	2.59	0	82.48	124.79	-42.31	Peak	348
0.1372	50.99	19.53	2.59	0	73.11	104.79	-31.68	AV	348
0.2716	48.40	19.53	2.59	0	70.52	118.90	-48.38	Peak	229
0.2716	39.79	19.53	2.59	0	61.91	98.90	-36.99	AV	229
0.5260	36.06	20.34	2.59	0	58.99	73.18	-14.19	QP	85
1.0500	24.70	20.87	2.70	0	48.27	67.18	-18.91	QP	184

**Remark:** According to FCC PART 15.209 (d), the emission limits for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, Radiated emission limits in these three bands are based on measurements employing an average detector.

(Between 30MHz –1000 MHz)

<b>Job No.:</b>	<b>SZAWW181012001-01</b>	<b>Polarization:</b>	<b>Horizontal</b>
<b>Standard:</b>	<b>FCC PART15 C_3m</b>	<b>Power Source:</b>	<b>AC 120V, 60Hz for adapter</b>
<b>Test item:</b>	<b>Radiation Test</b>	<b>Temp.(C)/Hum.(%RH):</b>	<b>24.2°C/56%RH</b>
<b>Test Mode:</b>	<b>Mode 1</b>	<b>Distance:</b>	<b>3m</b>

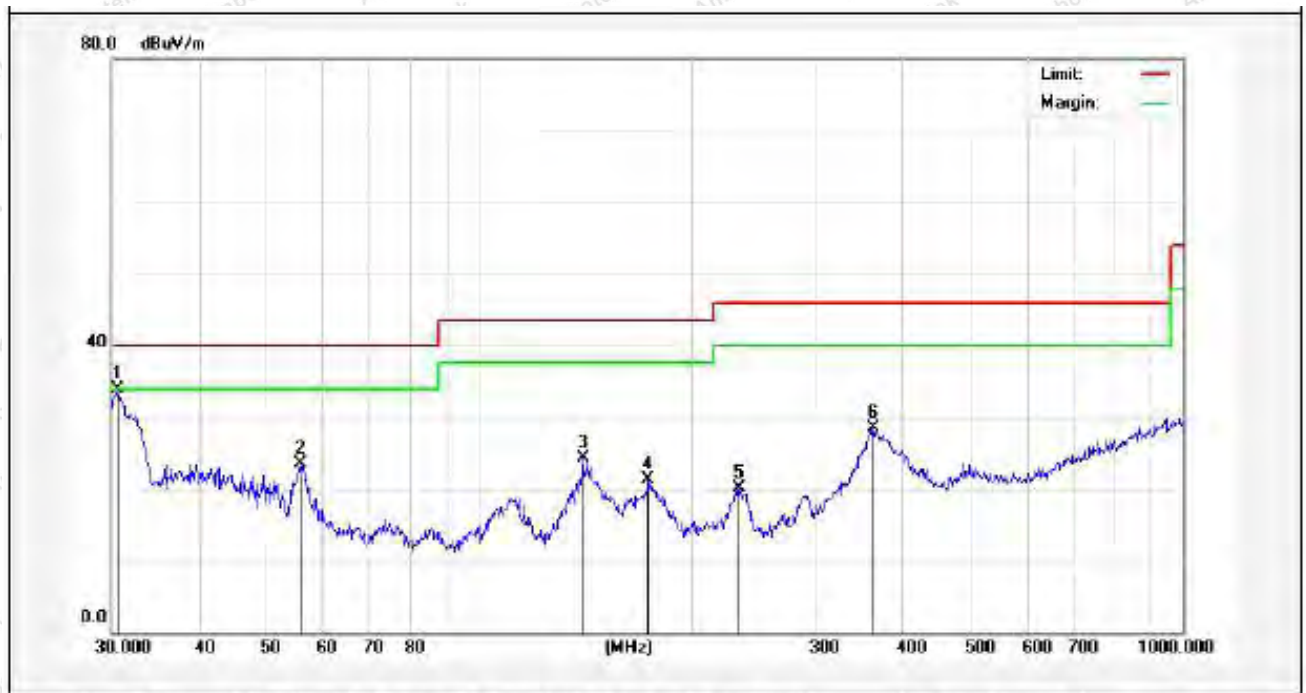

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	30.6379	52.33	-18.36	33.97	40.00	-6.03	QP	300	0	
2	55.6094	41.18	-17.76	23.42	40.00	-16.58	QP	300	74	
3	140.3421	46.75	-22.48	24.27	43.50	-19.23	QP	300	159	
4	173.8135	41.96	-20.67	21.29	43.50	-22.21	QP	300	205	
5	234.1684	39.09	-19.02	20.07	46.00	-25.93	QP	300	296	
6	362.9844	42.39	-13.98	28.41	46.00	-17.59	QP	300	360	




<b>Job No.:</b>	<b>SZAWW181012001-01</b>	<b>Polarization:</b>	<b>Vertical</b>
<b>Standard:</b>	<b>FCC PART15 C _3m</b>	<b>Power Source:</b>	<b>AC 120V, 60Hz for adapter</b>
<b>Test item:</b>	<b>Radiation Test</b>	<b>Temp.(C)/Hum.(%RH):</b>	<b>24.2°C/56%RH</b>
<b>Test Mode:</b>	<b>Mode 1</b>	<b>Distance:</b>	<b>3m</b>



No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	37.5479	47.85	-14.71	33.14	40.00	-6.86	QP	300	0	
2	39.5757	47.35	-13.60	33.75	40.00	-6.25	QP	300	85	
3	43.0505	46.44	-14.27	32.17	40.00	-7.83	QP	300	165	
4	49.7068	50.36	-16.46	33.90	40.00	-6.10	QP	300	207	
5	146.8677	50.12	-18.38	31.74	43.50	-11.76	QP	300	269	
6	175.0368	45.88	-17.20	28.68	43.50	-14.82	QP	300	360	



<b>Job No.:</b>	<b>SZAWW181012001-01</b>	<b>Polarization:</b>	<b>Horizontal</b>
<b>Standard:</b>	<b>FCC PART15 C_3m</b>	<b>Power Source:</b>	<b>AC 240V, 60Hz for adapter</b>
<b>Test item:</b>	<b>Radiation Test</b>	<b>Temp.(C)/Hum.(%RH):</b>	<b>24.2°C/56%RH</b>
<b>Test Mode:</b>	<b>Mode 1</b>	<b>Distance:</b>	<b>3m</b>

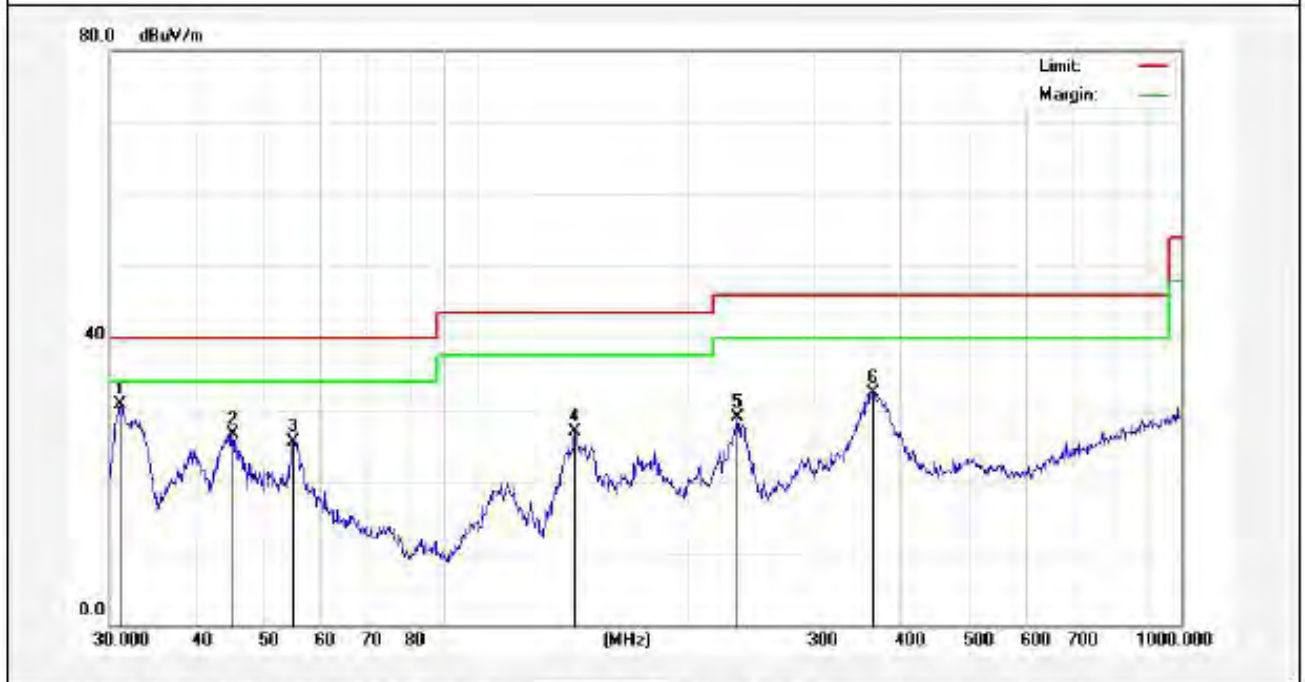

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	31.0706	48.90	-18.24	30.66	40.00	-9.34	QP	300	0	
2	44.9006	42.32	-15.80	26.52	40.00	-13.48	QP	300	64	
3	54.6429	43.31	-17.71	25.60	40.00	-14.40	QP	300	152	
4	137.4202	49.50	-22.54	26.96	43.50	-16.54	QP	300	196	
5	234.1684	48.00	-19.02	28.98	46.00	-17.02	QP	300	235	
6	364.2595	46.23	-13.94	32.29	46.00	-13.71	QP	300	360	

**Job No.:** SZAWW181012001-01      **Polarization:** Vertical  
**Standard:** FCC PART15 C \_3m      **Power Source:** AC 240V, 60Hz for adapter  
**Test item:** Radiation Test      **Temp.(C)/Hum.(%RH):** 24.2°C/56%RH  
**Test Mode:** Mode 1      **Distance:** 3m



No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	31.7313	50.70	-17.05	33.65	40.00	-6.35	QP	300	0	
2	37.2855	48.75	-14.84	33.91	40.00	-6.09	QP	300	67	
3	43.7558	50.93	-14.47	36.46	40.00	-3.54	QP	300	162	
4	51.4807	50.91	-16.62	34.29	40.00	-5.71	QP	300	196	
5	111.3468	51.12	-15.72	35.40	43.50	-8.10	QP	300	264	
6	146.5677	53.87	-18.39	35.48	43.50	-8.02	QP	300	360	




## 5. Antenna Requirement

### 5.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203
Requirement	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard

### 5.2. Antenna Connected Construction

The Wireless Charging antenna is a Inductive loop coil Antenna which permanently attached, and the best case gain of the antenna is 0 dBi. It complies with the standard requirement.

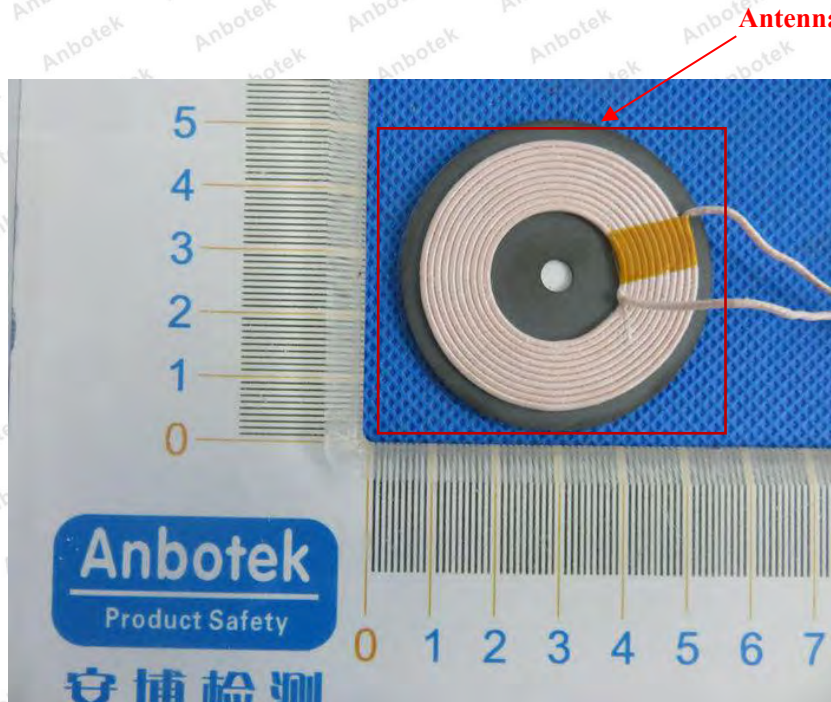




## APPENDIX I-- TEST SETUP PHOTOGRAPH

Photo of Conducted Emission Measurement



Photo of Radiation Emission Test

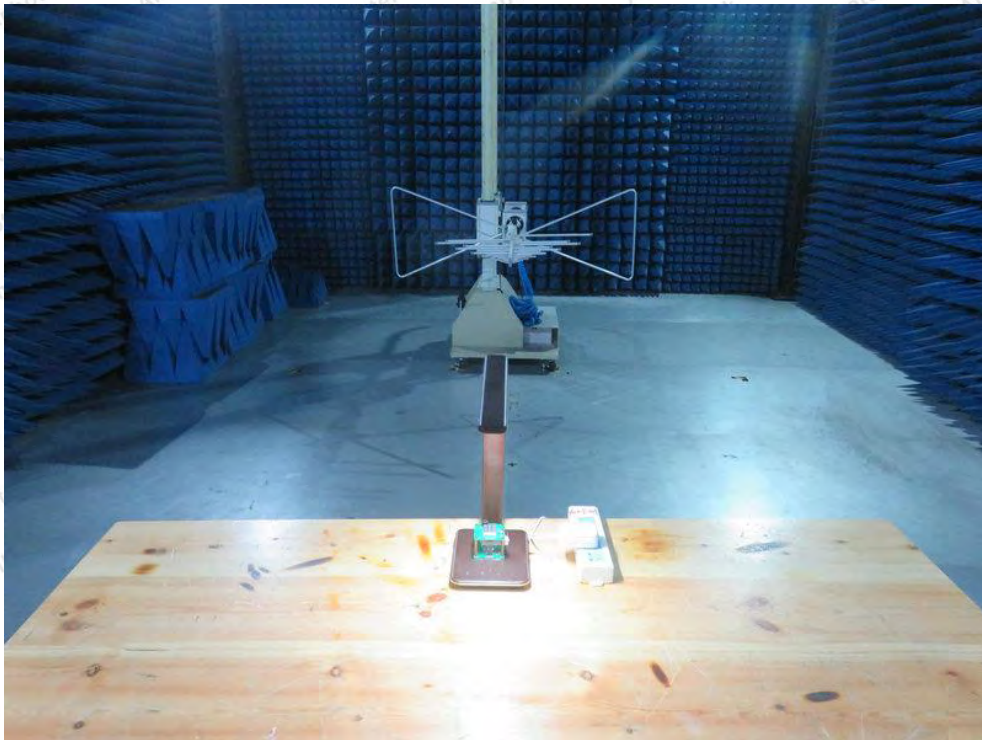







## APPENDIX II -- EXTERNAL PHOTOGRAPH






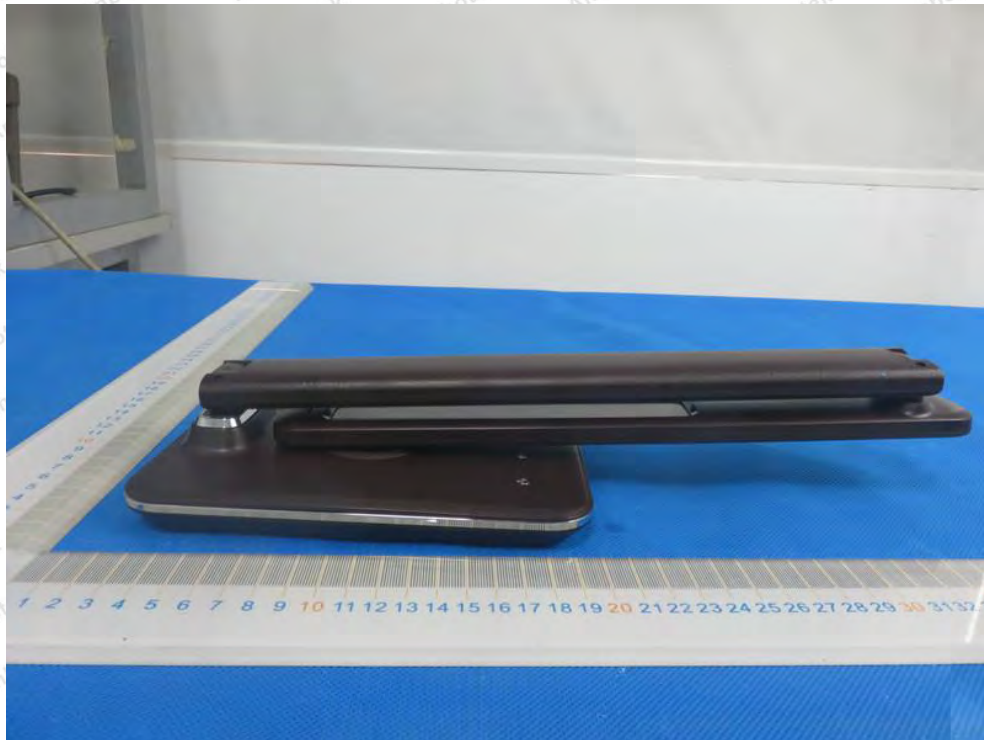

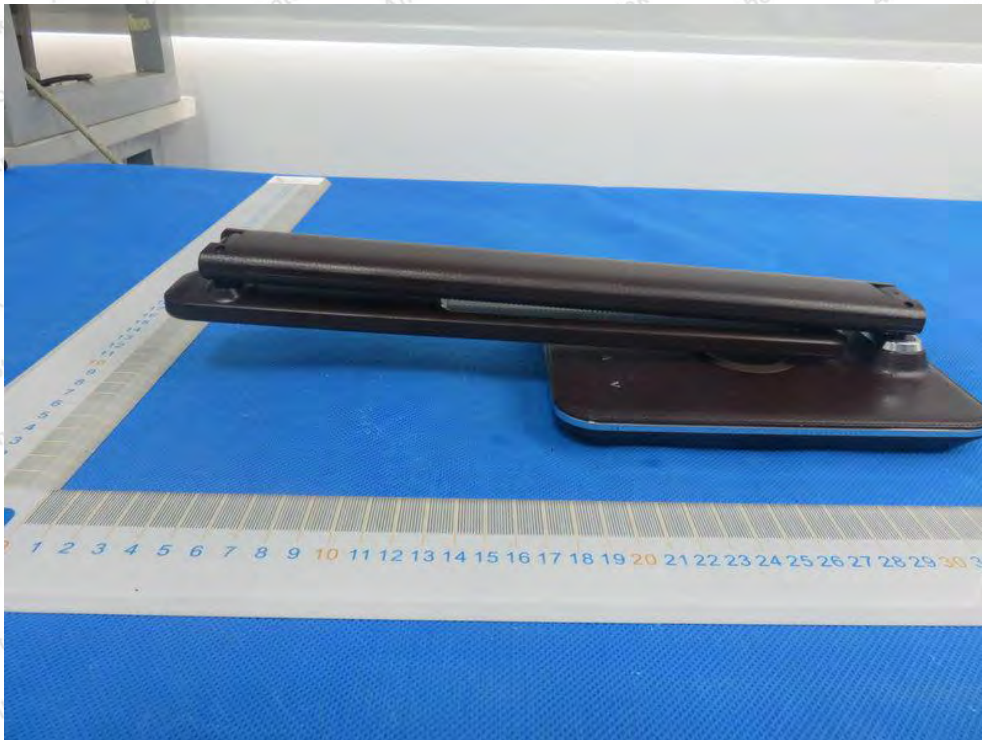



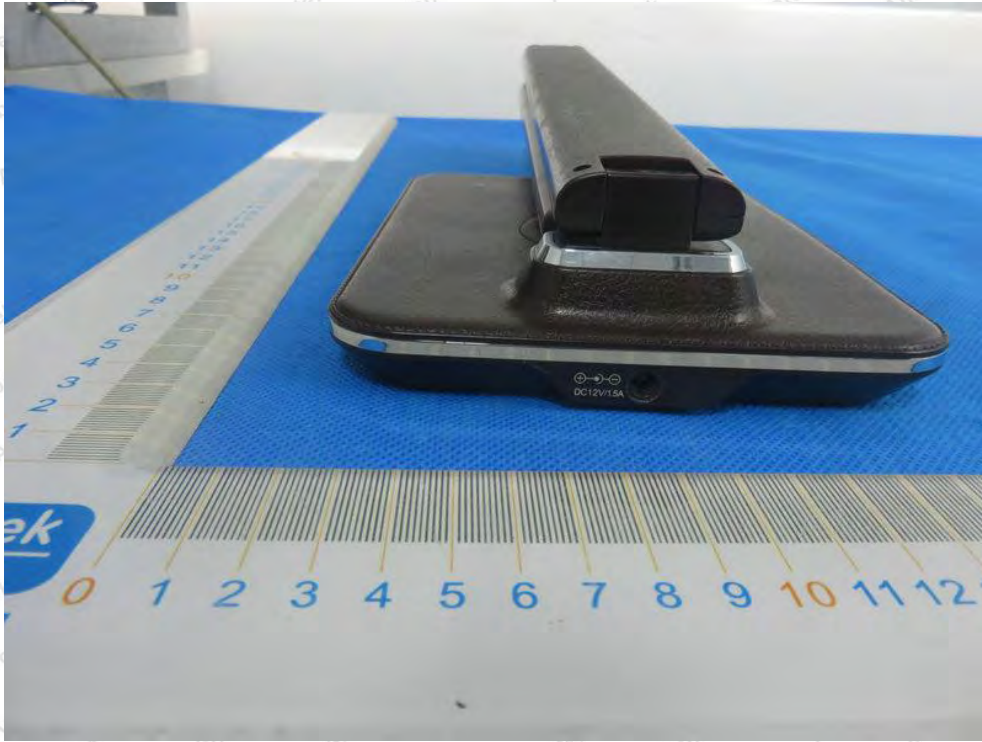















### APPENDIX III -- INTERNAL PHOTOGRAPH

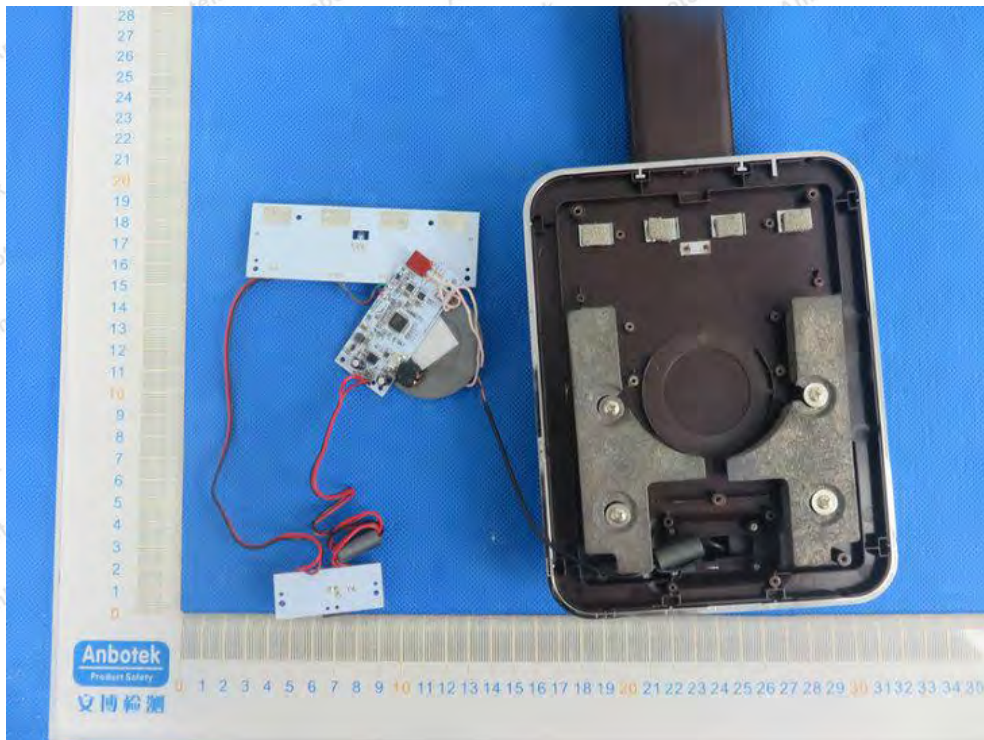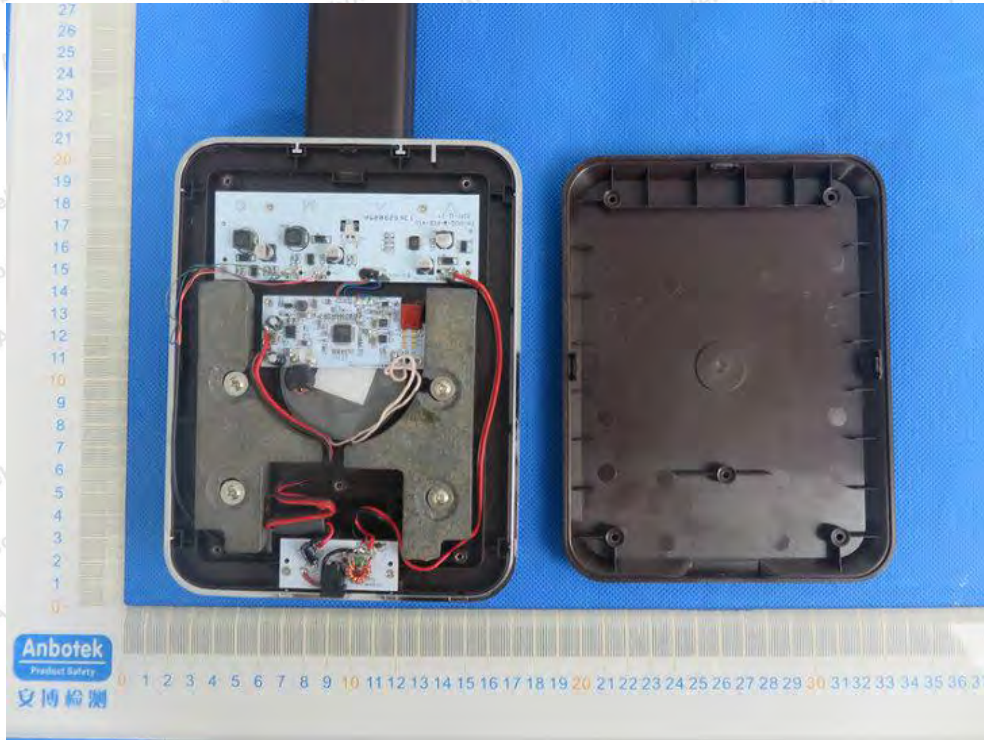





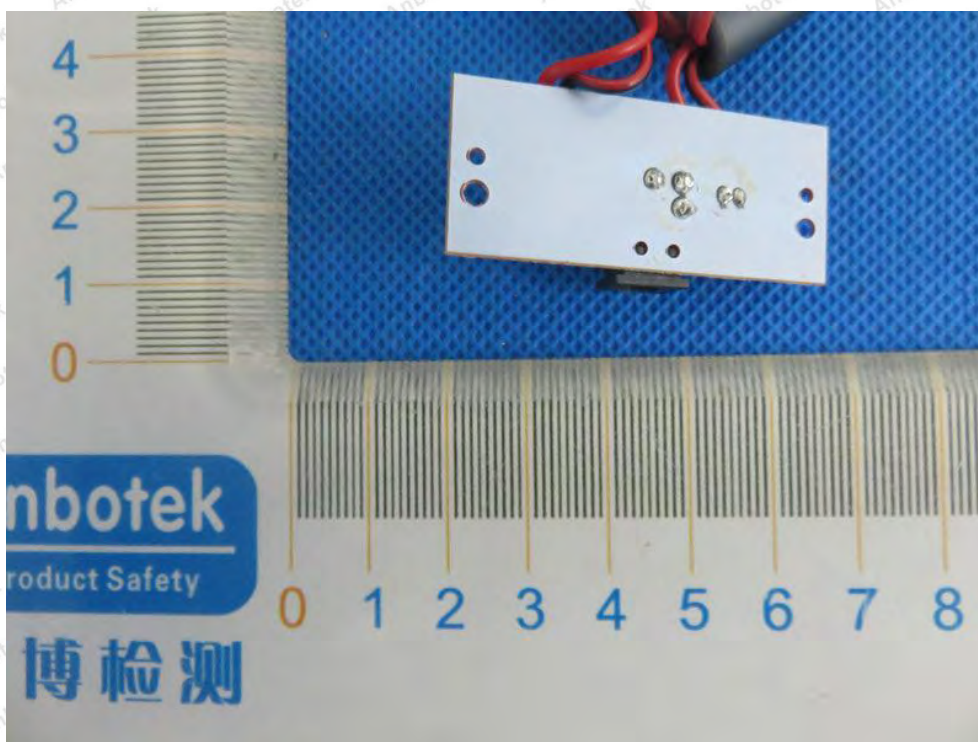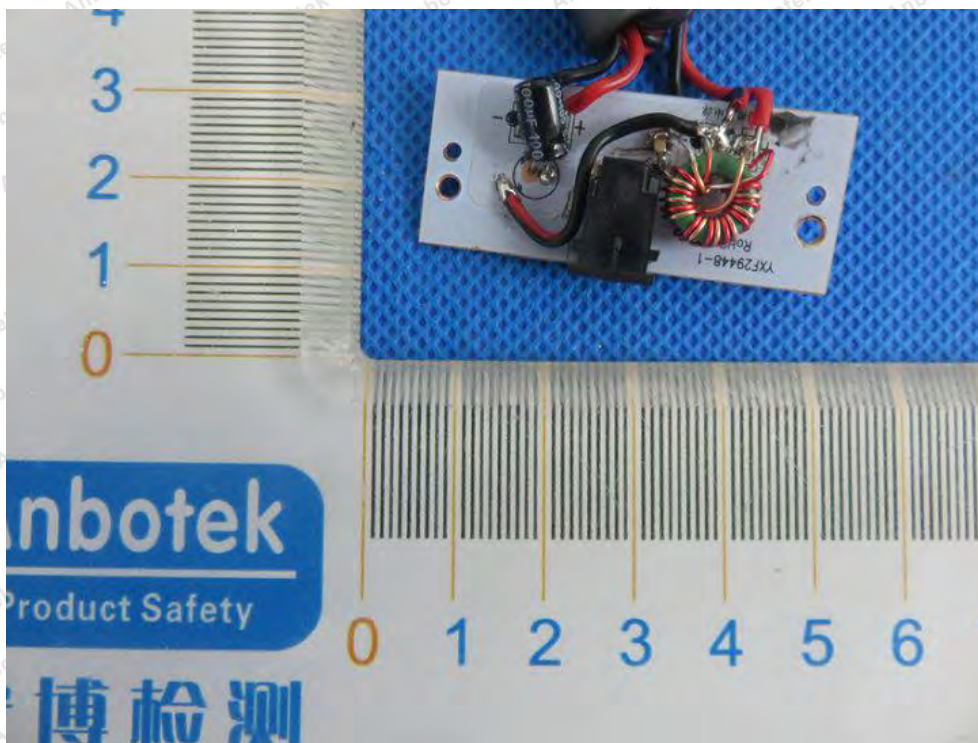




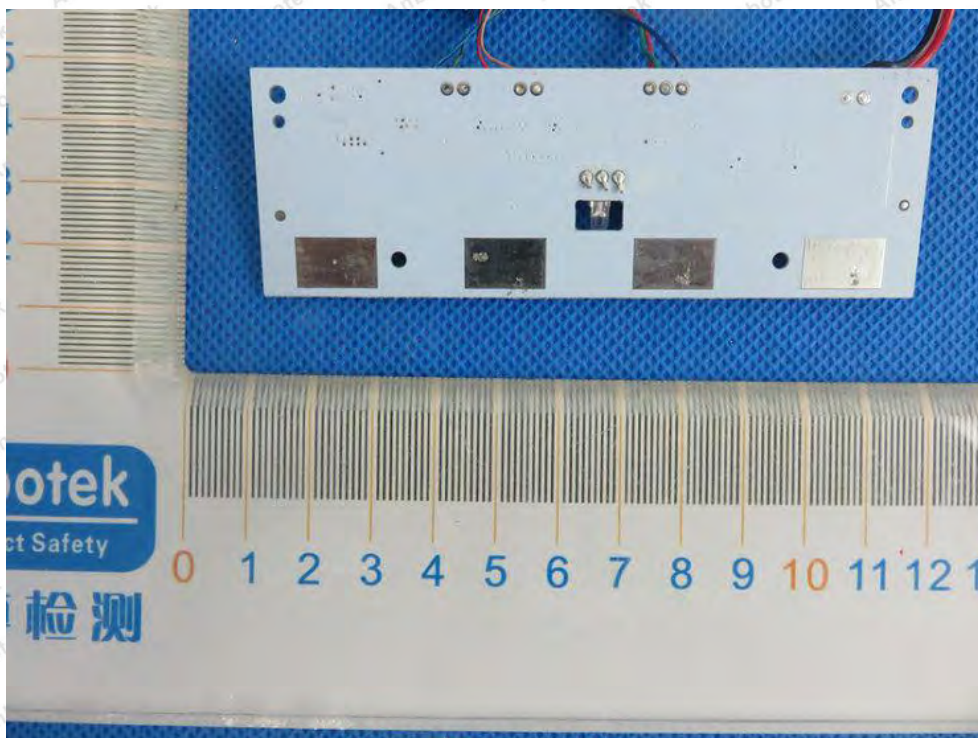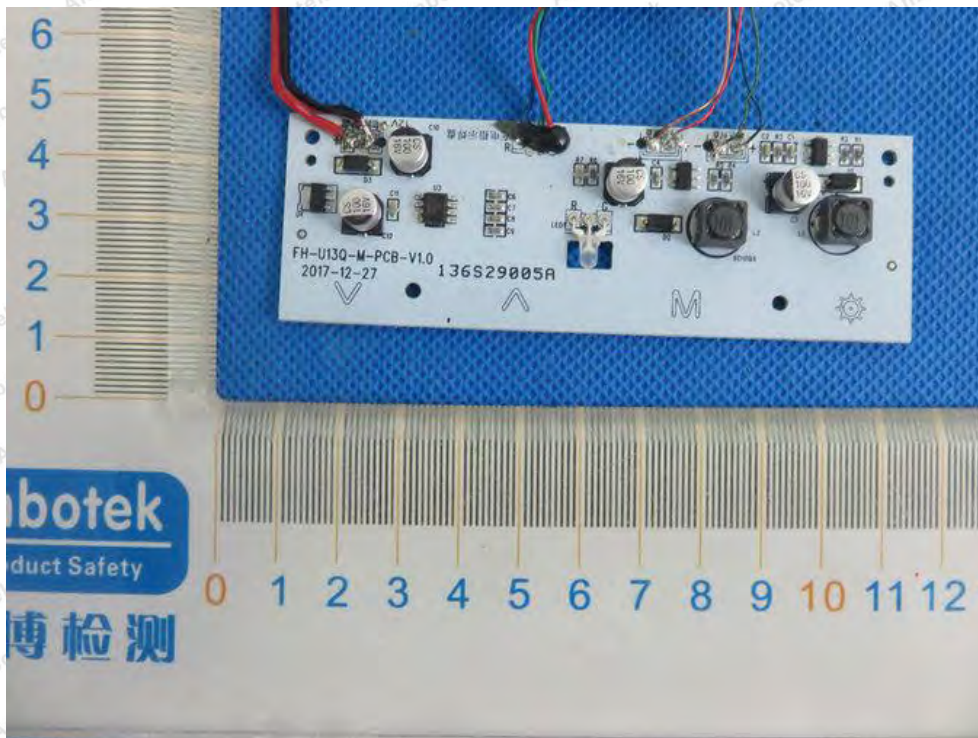




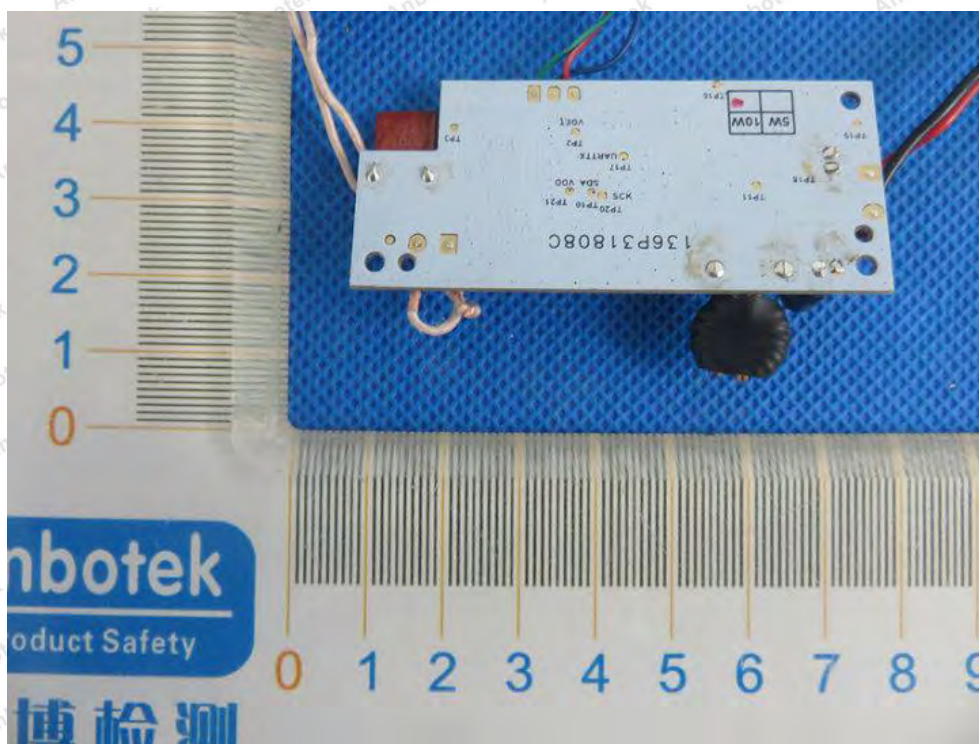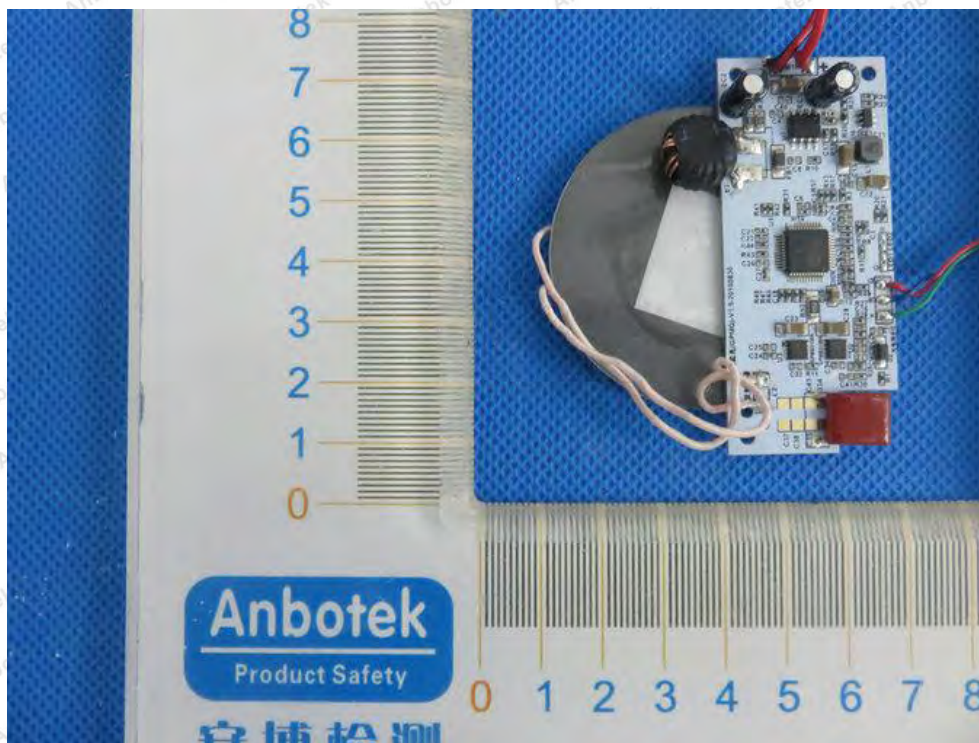



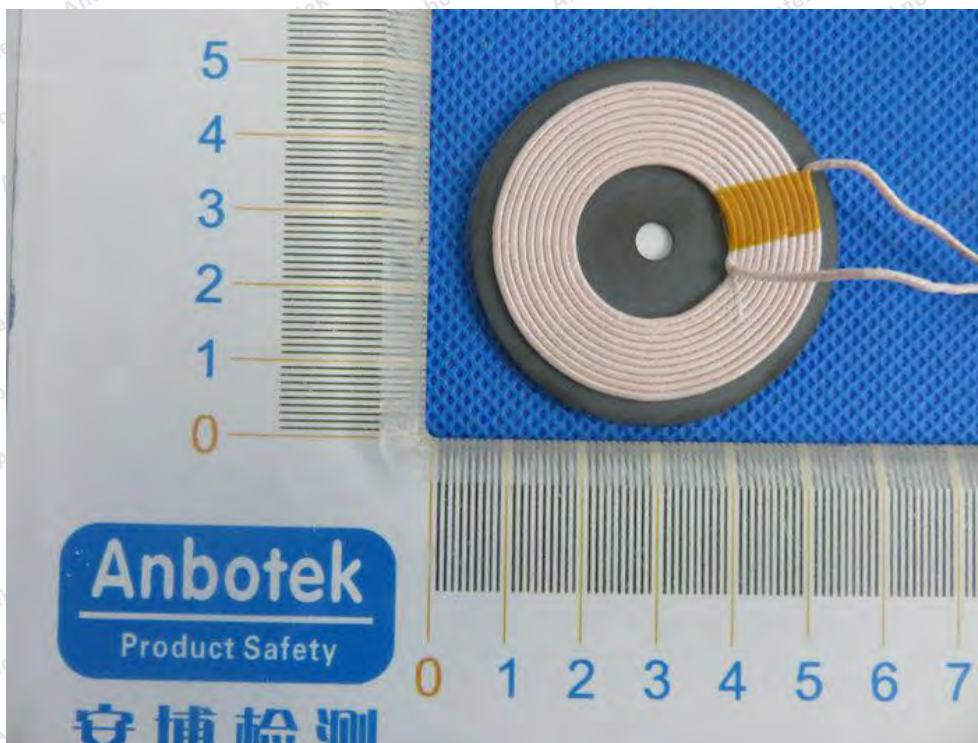

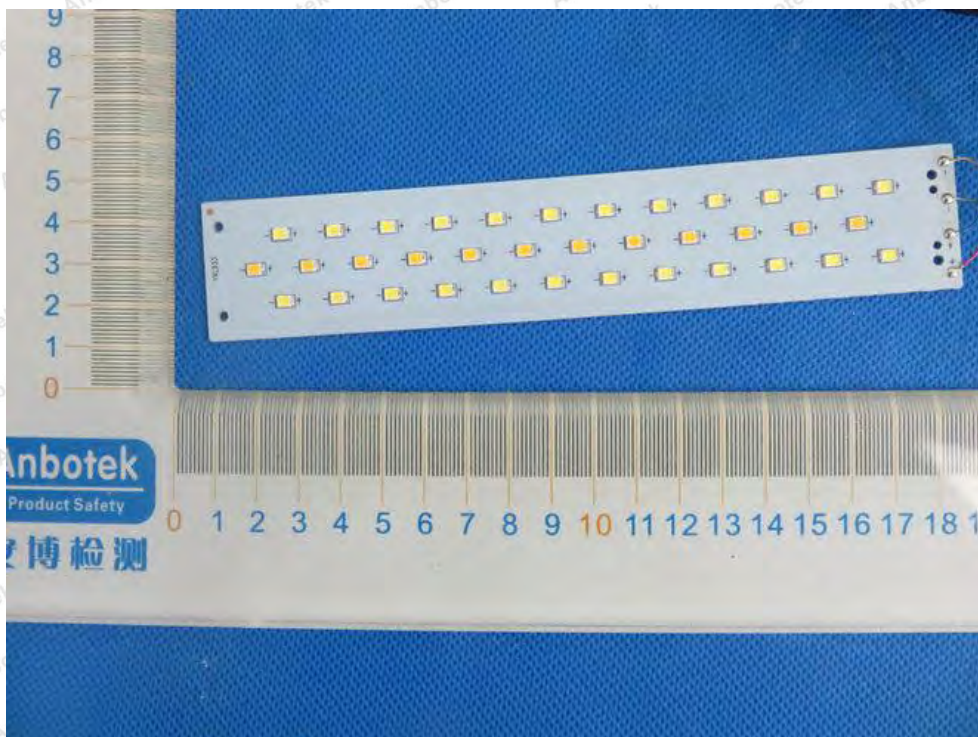

----- End of Report -----