

1. Effective (Isotropic) Radiated Power Output Data

1.1 Test Result

1.1.1 GSM850_ERP

Band: GSM850								
ENV	Mode		Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	ERP (dBm)		Verdict
	Network	Subset				Result	Limit	
NTNV	GSM	GSM	824.2	32.56	-1.15	29.26	<=38.45	Pass
			836.6	32.50	-1.15	29.20	<=38.45	Pass
			848.8	32.51	-1.15	29.21	<=38.45	Pass
	GPRS	1 TX Slot	824.2	32.57	-1.15	29.27	<=38.45	Pass
			824.2	31.57	-1.15	28.27	<=38.45	Pass
			824.2	29.52	-1.15	26.22	<=38.45	Pass
			824.2	28.44	-1.15	25.14	<=38.45	Pass
			836.6	32.50	-1.15	29.20	<=38.45	Pass
			836.6	31.50	-1.15	28.20	<=38.45	Pass
			836.6	29.44	-1.15	26.14	<=38.45	Pass
			836.6	28.35	-1.15	25.05	<=38.45	Pass
			848.8	32.49	-1.15	29.19	<=38.45	Pass
			848.8	31.50	-1.15	28.20	<=38.45	Pass
			848.8	29.43	-1.15	26.13	<=38.45	Pass
			848.8	28.34	-1.15	25.04	<=38.45	Pass
	EGPRS	1 TX Slot	824.2	26.24	-1.15	22.94	<=38.45	Pass
			824.2	24.91	-1.15	21.61	<=38.45	Pass
			824.2	22.89	-1.15	19.59	<=38.45	Pass
			824.2	21.85	-1.15	18.55	<=38.45	Pass
			836.6	26.06	-1.15	22.76	<=38.45	Pass
			836.6	24.98	-1.15	21.68	<=38.45	Pass
			836.6	22.92	-1.15	19.62	<=38.45	Pass
			836.6	21.80	-1.15	18.50	<=38.45	Pass
			848.8	26.12	-1.15	22.82	<=38.45	Pass
			848.8	25.03	-1.15	21.73	<=38.45	Pass
			848.8	23.07	-1.15	19.77	<=38.45	Pass
			848.8	21.84	-1.15	18.54	<=38.45	Pass

Note1: ERP=Conducted Power+Antenna Gain-2.15

2. Frequency Stability

2.1 Test Result

2.1.1 GSM850

Band: GSM850							
Network	Frequency (MHz)	Temp. (°C)	Voltage (VDC)	Freq. Error (Hz)	Freq. vs. Rated (ppm)		Verdict
					Result	Limit	
GSM	824.2	20	3.27	6.877	0.0083	-2.5 to 2.5	Pass
			3.85	7.297	0.0089	-2.5 to 2.5	Pass
			4.43	6.909	0.0084	-2.5 to 2.5	Pass
		-30	3.85	5.715	0.0069	-2.5 to 2.5	Pass
		-20	3.85	6.554	0.0080	-2.5 to 2.5	Pass
		-10	3.85	2.938	0.0036	-2.5 to 2.5	Pass
		0	3.85	-2.680	-0.0033	-2.5 to 2.5	Pass
		10	3.85	1.840	0.0022	-2.5 to 2.5	Pass

	836.6	30	3.85	4.133	0.0050	-2.5 to 2.5	Pass
		40	3.85	1.582	0.0019	-2.5 to 2.5	Pass
		50	3.85	1.485	0.0018	-2.5 to 2.5	Pass
		20	3.27	8.039	0.0096	-2.5 to 2.5	Pass
			3.85	7.555	0.0090	-2.5 to 2.5	Pass
			4.43	11.591	0.0139	-2.5 to 2.5	Pass
		-30	3.85	11.655	0.0139	-2.5 to 2.5	Pass
		-20	3.85	10.364	0.0124	-2.5 to 2.5	Pass
		-10	3.85	10.687	0.0128	-2.5 to 2.5	Pass
	0	3.85	11.332	0.0135	-2.5 to 2.5	Pass	
	10	3.85	5.585	0.0067	-2.5 to 2.5	Pass	
	30	3.85	3.648	0.0044	-2.5 to 2.5	Pass	
	40	3.85	6.102	0.0073	-2.5 to 2.5	Pass	
	50	3.85	6.102	0.0073	-2.5 to 2.5	Pass	
	848.8	20	3.27	9.621	0.0113	-2.5 to 2.5	Pass
			3.85	11.591	0.0137	-2.5 to 2.5	Pass
			4.43	8.330	0.0098	-2.5 to 2.5	Pass
		-30	3.85	8.330	0.0098	-2.5 to 2.5	Pass
		-20	3.85	8.330	0.0098	-2.5 to 2.5	Pass
		-10	3.85	10.041	0.0118	-2.5 to 2.5	Pass
		0	3.85	11.139	0.0131	-2.5 to 2.5	Pass
10		3.85	7.749	0.0091	-2.5 to 2.5	Pass	
30		3.85	2.583	0.0030	-2.5 to 2.5	Pass	
40		3.85	5.715	0.0067	-2.5 to 2.5	Pass	
50		3.85	5.392	0.0064	-2.5 to 2.5	Pass	
GPRS		824.2	20	3.27	7.490	0.0091	-2.5 to 2.5
	3.85			7.232	0.0088	-2.5 to 2.5	Pass
	4.43			6.522	0.0079	-2.5 to 2.5	Pass
	-30		3.85	6.134	0.0074	-2.5 to 2.5	Pass
	-20		3.85	5.682	0.0069	-2.5 to 2.5	Pass
	-10		3.85	5.456	0.0066	-2.5 to 2.5	Pass
	0		3.85	6.263	0.0076	-2.5 to 2.5	Pass
	10		3.85	9.137	0.0111	-2.5 to 2.5	Pass
	30		3.85	8.846	0.0107	-2.5 to 2.5	Pass
	40	3.85	11.591	0.0141	-2.5 to 2.5	Pass	
	50	3.85	5.844	0.0071	-2.5 to 2.5	Pass	
	836.6	20	3.27	7.458	0.0089	-2.5 to 2.5	Pass
			3.85	5.198	0.0062	-2.5 to 2.5	Pass
			4.43	5.941	0.0071	-2.5 to 2.5	Pass
		-30	3.85	5.715	0.0068	-2.5 to 2.5	Pass
		-20	3.85	4.907	0.0059	-2.5 to 2.5	Pass
		-10	3.85	4.681	0.0056	-2.5 to 2.5	Pass
		0	3.85	4.617	0.0055	-2.5 to 2.5	Pass
		10	3.85	5.908	0.0071	-2.5 to 2.5	Pass
		30	3.85	9.589	0.0115	-2.5 to 2.5	Pass
	40	3.85	9.750	0.0117	-2.5 to 2.5	Pass	
50	3.85	7.813	0.0093	-2.5 to 2.5	Pass		
848.8	20	3.27	7.781	0.0092	-2.5 to 2.5	Pass	
		3.85	6.522	0.0077	-2.5 to 2.5	Pass	
		4.43	7.555	0.0089	-2.5 to 2.5	Pass	
	-30	3.85	6.845	0.0081	-2.5 to 2.5	Pass	
	-20	3.85	7.103	0.0084	-2.5 to 2.5	Pass	
	-10	3.85	4.681	0.0055	-2.5 to 2.5	Pass	
	0	3.85	10.105	0.0119	-2.5 to 2.5	Pass	
	10	3.85	6.812	0.0080	-2.5 to 2.5	Pass	
	30	3.85	12.269	0.0145	-2.5 to 2.5	Pass	
40	3.85	13.173	0.0155	-2.5 to 2.5	Pass		
50	3.85	15.885	0.0187	-2.5 to 2.5	Pass		
EGPRS	824.2	20	3.27	7.329	0.0089	-2.5 to 2.5	Pass

			3.85	5.521	0.0067	-2.5 to 2.5	Pass	
			4.43	6.102	0.0074	-2.5 to 2.5	Pass	
		-30	3.85	5.101	0.0062	-2.5 to 2.5	Pass	
		-20	3.85	6.263	0.0076	-2.5 to 2.5	Pass	
		-10	3.85	7.878	0.0096	-2.5 to 2.5	Pass	
		0	3.85	4.681	0.0057	-2.5 to 2.5	Pass	
		10	3.85	-0.484	-0.0006	-2.5 to 2.5	Pass	
		30	3.85	-0.032	0.0000	-2.5 to 2.5	Pass	
		40	3.85	3.132	0.0038	-2.5 to 2.5	Pass	
		50	3.85	0.646	0.0008	-2.5 to 2.5	Pass	
	836.6	20		3.27	3.907	0.0047	-2.5 to 2.5	Pass
				3.85	2.777	0.0033	-2.5 to 2.5	Pass
				4.43	6.263	0.0075	-2.5 to 2.5	Pass
		-30	3.85	6.328	0.0076	-2.5 to 2.5	Pass	
		-20	3.85	6.296	0.0075	-2.5 to 2.5	Pass	
		-10	3.85	5.198	0.0062	-2.5 to 2.5	Pass	
		0	3.85	3.067	0.0037	-2.5 to 2.5	Pass	
		10	3.85	2.131	0.0025	-2.5 to 2.5	Pass	
		30	3.85	-0.710	-0.0008	-2.5 to 2.5	Pass	
		40	3.85	3.551	0.0042	-2.5 to 2.5	Pass	
	50	3.85	3.971	0.0047	-2.5 to 2.5	Pass		
	848.8	20		3.27	2.454	0.0029	-2.5 to 2.5	Pass
				3.85	2.744	0.0032	-2.5 to 2.5	Pass
				4.43	6.812	0.0080	-2.5 to 2.5	Pass
		-30	3.85	5.424	0.0064	-2.5 to 2.5	Pass	
		-20	3.85	3.745	0.0044	-2.5 to 2.5	Pass	
		-10	3.85	2.325	0.0027	-2.5 to 2.5	Pass	
		0	3.85	1.905	0.0022	-2.5 to 2.5	Pass	
		10	3.85	5.069	0.0060	-2.5 to 2.5	Pass	
		30	3.85	7.329	0.0086	-2.5 to 2.5	Pass	
40		3.85	8.749	0.0103	-2.5 to 2.5	Pass		
50	3.85	4.907	0.0058	-2.5 to 2.5	Pass			

3. Modulation Characteristics



3.1 Test Result

3.1.1 GSM850

Band: GSM850						
ENV	Mode		Frequency (MHz)	Modulation Characteristics		Verdict
	Network	Subset		Result	Limit	
NTNV	GSM	GSM	836.6	Refer To Test Graph		Pass
	GPRS	1 TX Slot	836.6	Refer To Test Graph		Pass
	EGPRS	1 TX Slot	836.6	Refer To Test Graph		Pass

3.2 Test Graph

3.2.1 GSM850

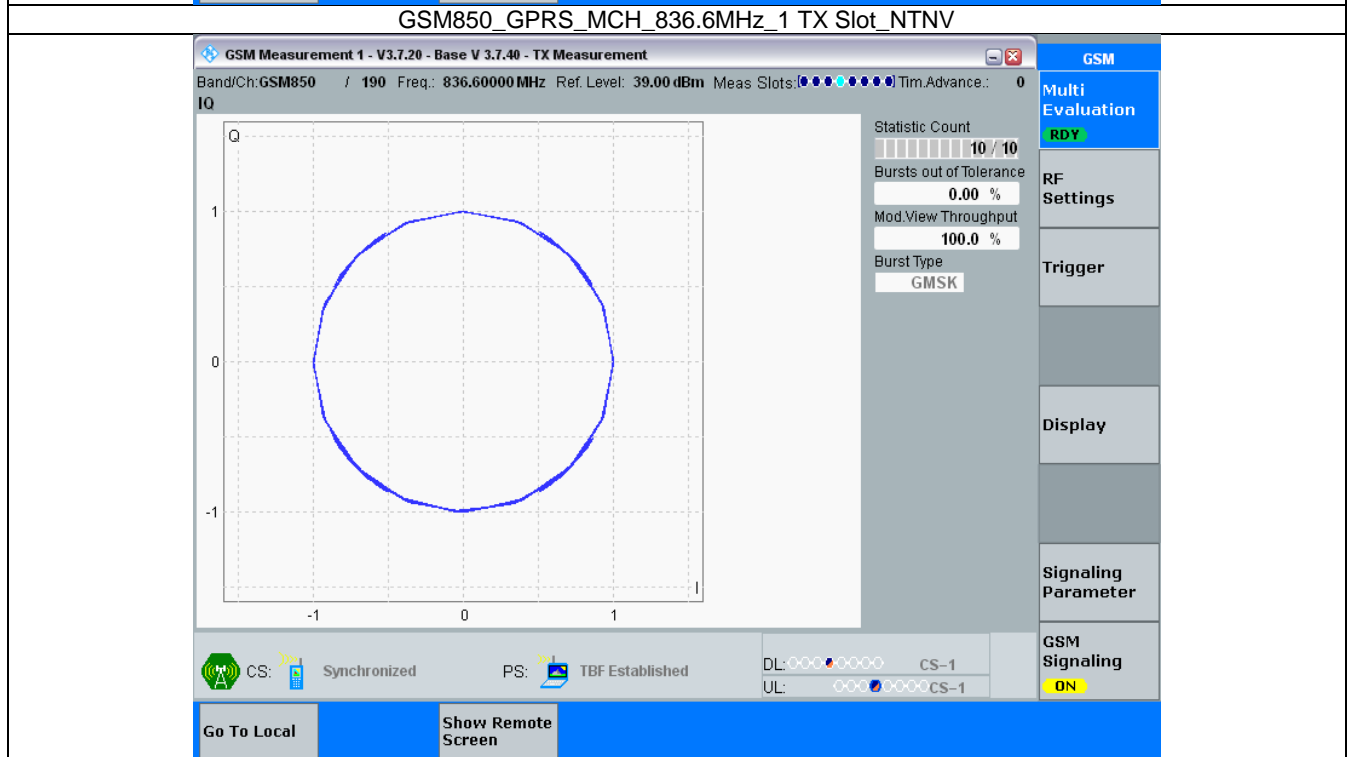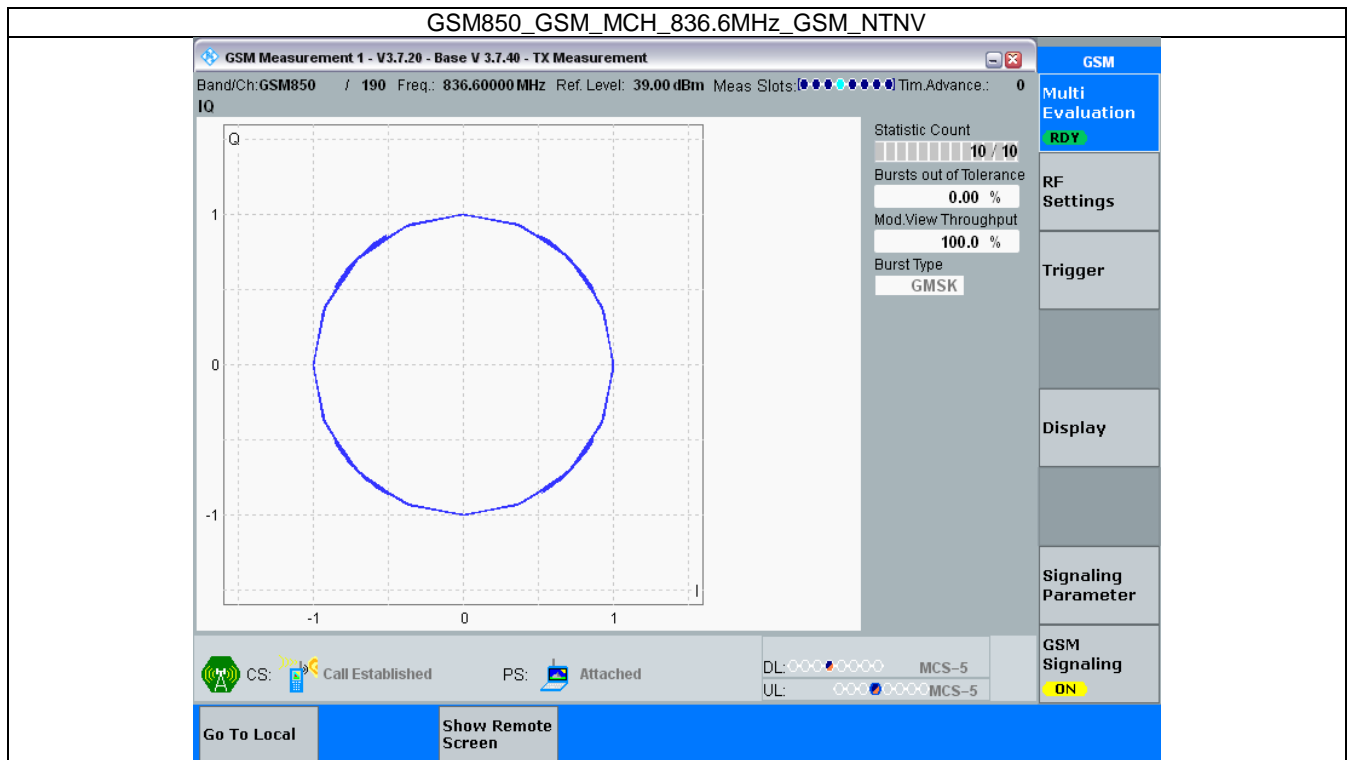

GSM850_EGPRS_MCH_836.6MHz_1 TX Slot_NTNV

GSM Measurement 1 - V3.7.20 - Base V 3.7.40 - TX Measurement

Band/Ch: GSM850 / 190 Freq.: 836.60000 MHz Ref. Level: 42.23 dBm Meas Slots: ●●●●●● Tim. Advance.: 0

IQ

Statistic Count: 10 / 10
Bursts out of Tolerance: 0.00 %
Mod. View Throughput: 100.0 %
Burst Type: 8PSK

CS: Synchronized **PS:** TBF Established

DL: ●●●●● MCS-5
UL: ●●●●● MCS-5

Go To Local **Show Remote Screen**

GSM
Multi Evaluation RDY
RF Settings
Trigger
Display
Signaling Parameter
GSM Signaling ON

4. 99% & 26dB Bandwidth

4.1 Test Result

4.1.1 GSM850_OBW



Band: GSM850						
ENV	Mode		Frequency (MHz)	99% Occupied Bandwidth (MHz)		Verdict
	Network	Subset		Result	Limit	
NTNV	GSM	GSM	824.2	0.244	/	Pass
			836.6	0.245	/	Pass
			848.8	0.246	/	Pass
	GPRS	1 TX Slot	824.2	0.245	/	Pass
			836.6	0.246	/	Pass
			848.8	0.249	/	Pass
	EGPRS	1 TX Slot	824.2	0.231	/	Pass
			836.6	0.237	/	Pass
			848.8	0.241	/	Pass

4.1.2 GSM850_XDB


Band: GSM850						
ENV	Mode		Frequency (MHz)	26dB Bandwidth (MHz)		Verdict
	Network	Subset		Result	Limit	
NTNV	GSM	GSM	824.2	0.318	/	Pass
			836.6	0.312	/	Pass
			848.8	0.319	/	Pass
	GPRS	1 TX Slot	824.2	0.314	/	Pass
			836.6	0.321	/	Pass
			848.8	0.313	/	Pass
	EGPRS	1 TX Slot	824.2	0.280	/	Pass
			836.6	0.310	/	Pass
			848.8	0.291	/	Pass

4.2 Test Graph


4.2.1 GSM850_OBW

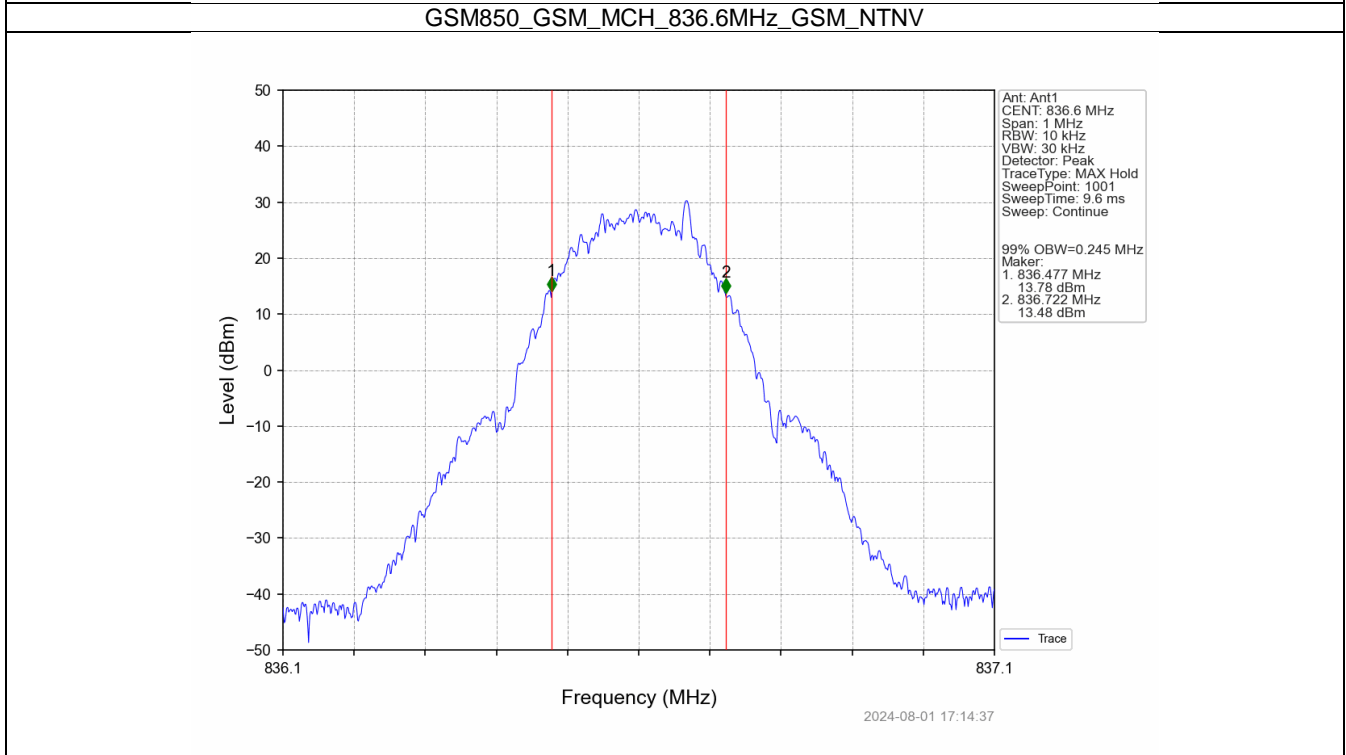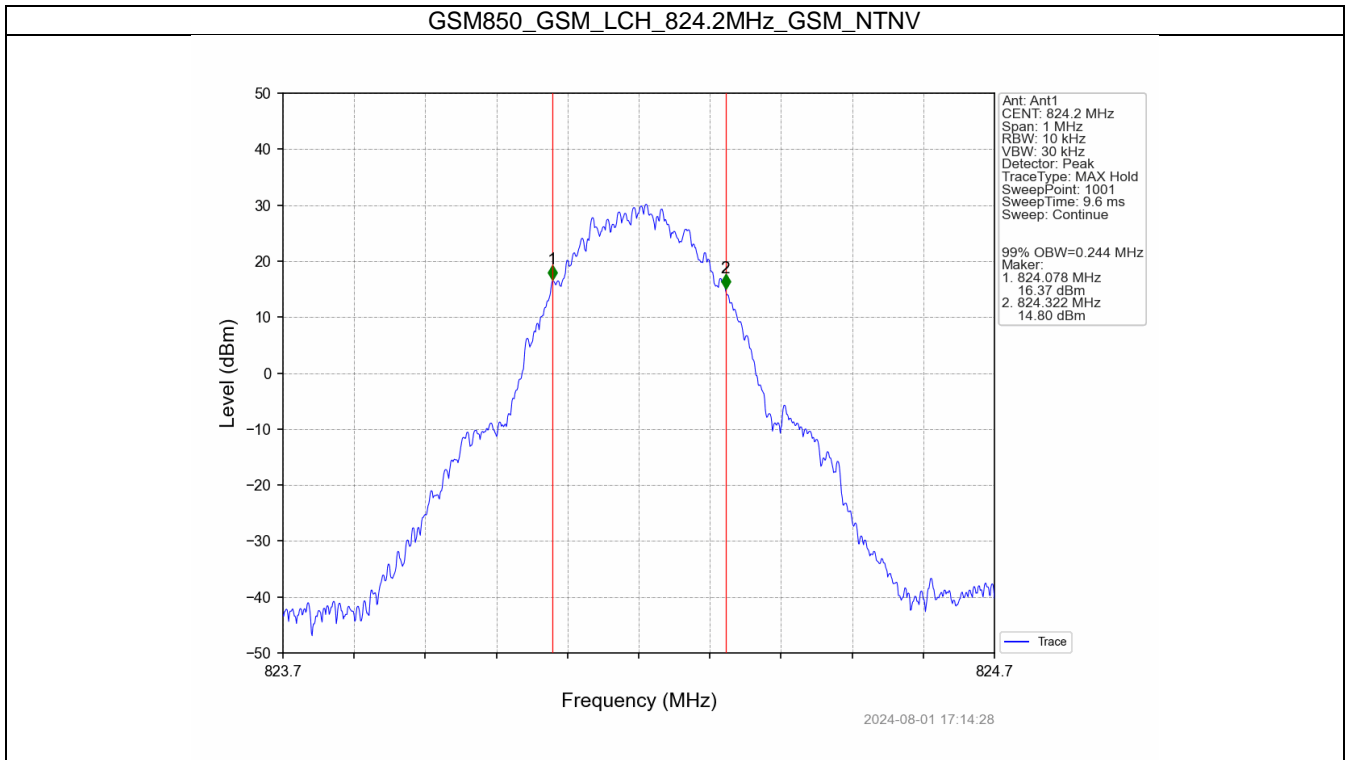


GSM850_GSM_HCH_848.8MHz_GSM_NTNV

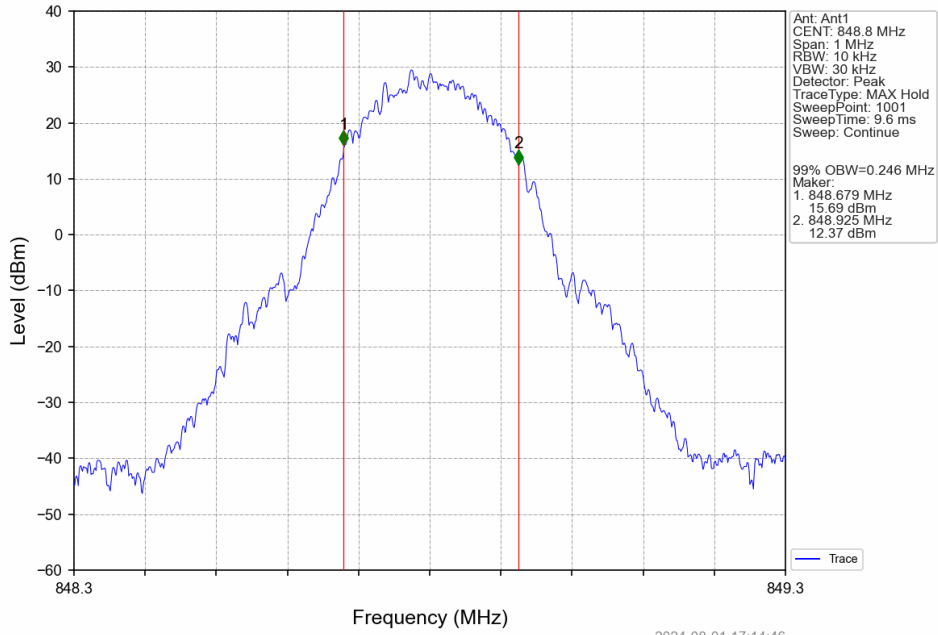

GSM850_GPRS_LCH_824.2MHz_1 TX Slot_NTNV

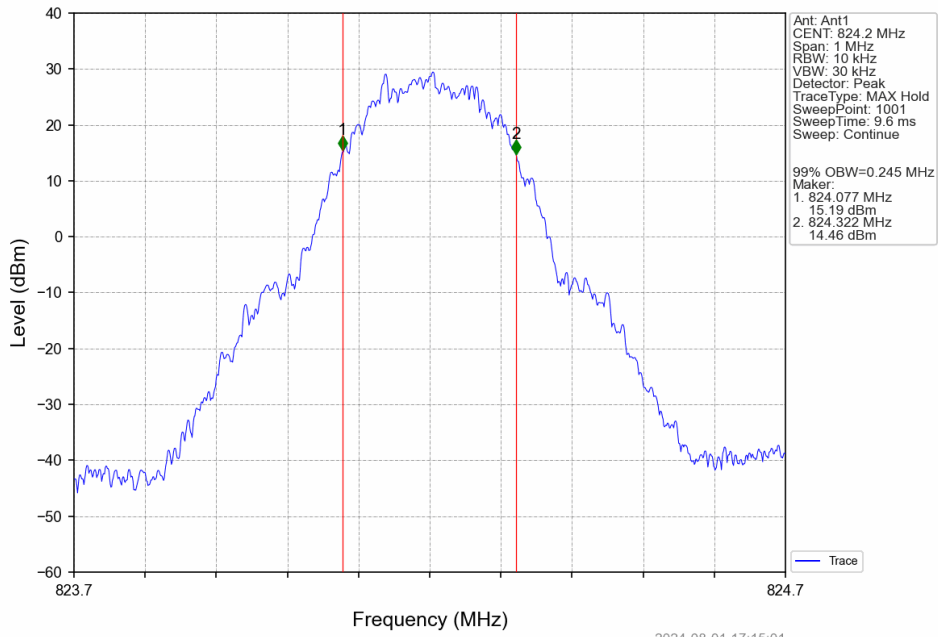


GSM850_GPRS_MCH_836.6MHz_1 TX Slot_NTNV

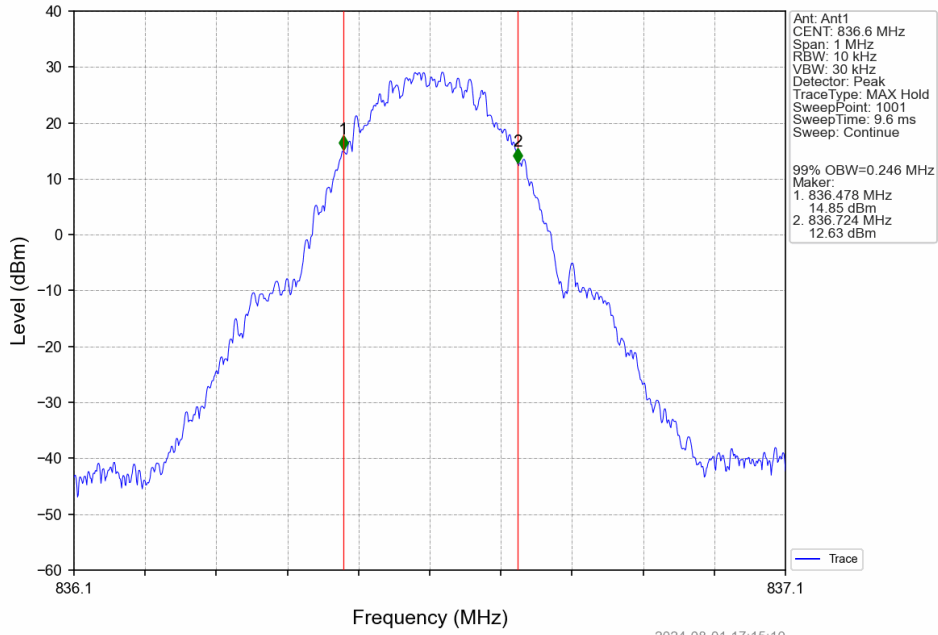


2024-08-01 17:15:10

GSM850_GPRS_HCH_848.8MHz_1 TX Slot_NTNV

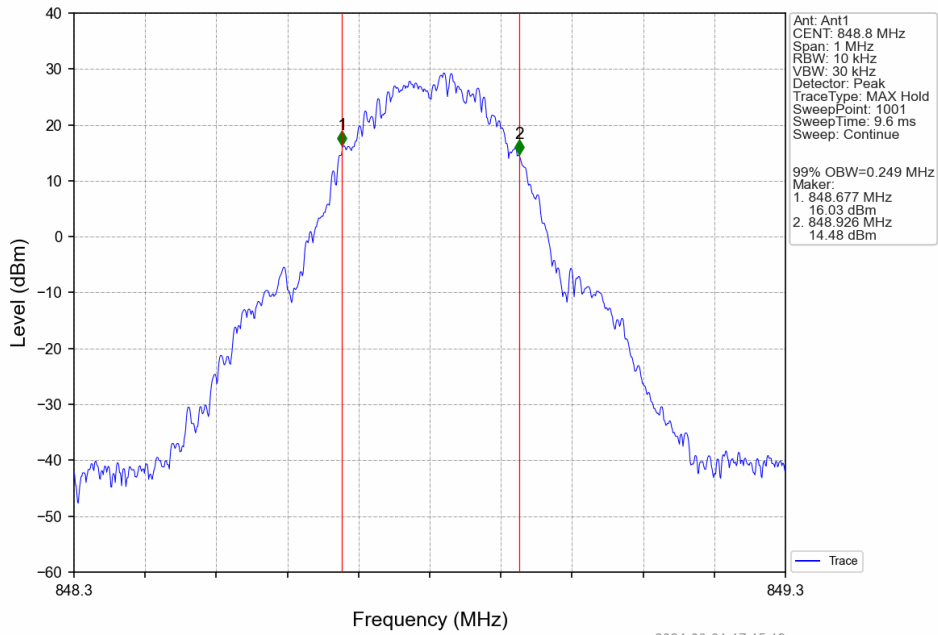


2024-08-01 17:15:19


GSM850_EGPRS_LCH_824.2MHz_1 TX Slot_NTNV

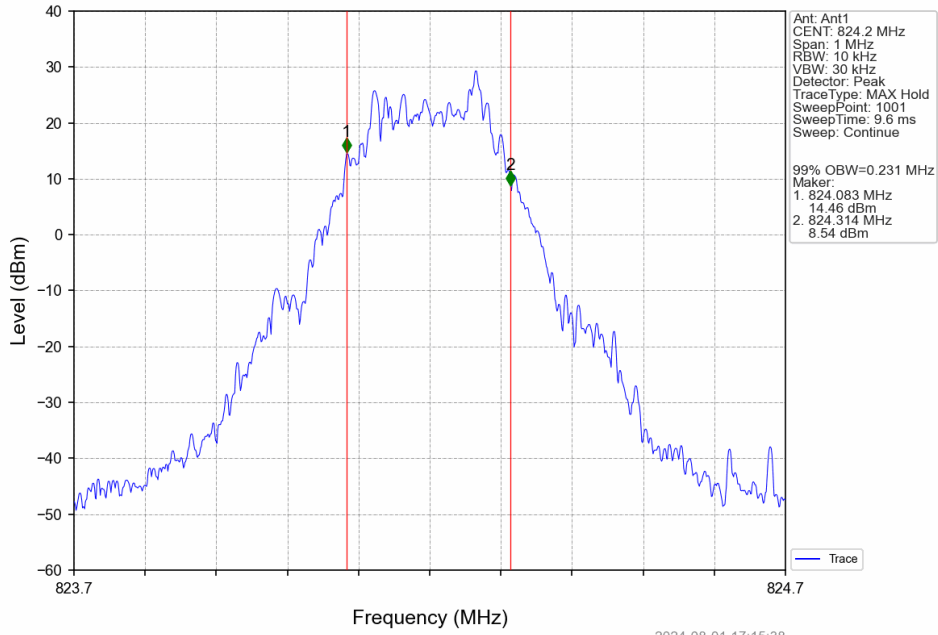

GSM850_EGPRS_MCH_836.6MHz_1 TX Slot_NTNV

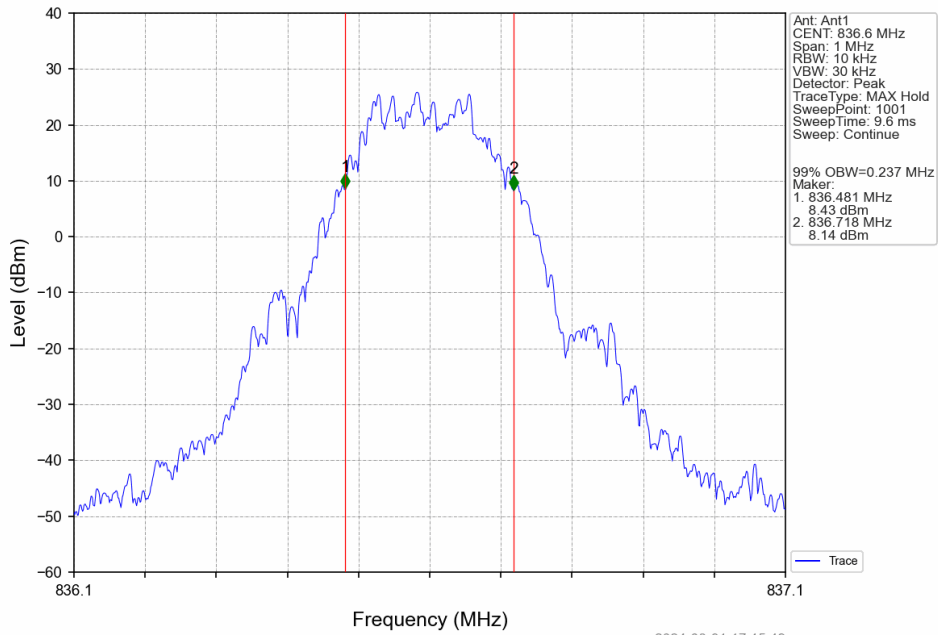


GSM850_EGPRS_HCH_848.8MHz_1 TX Slot_NTNV

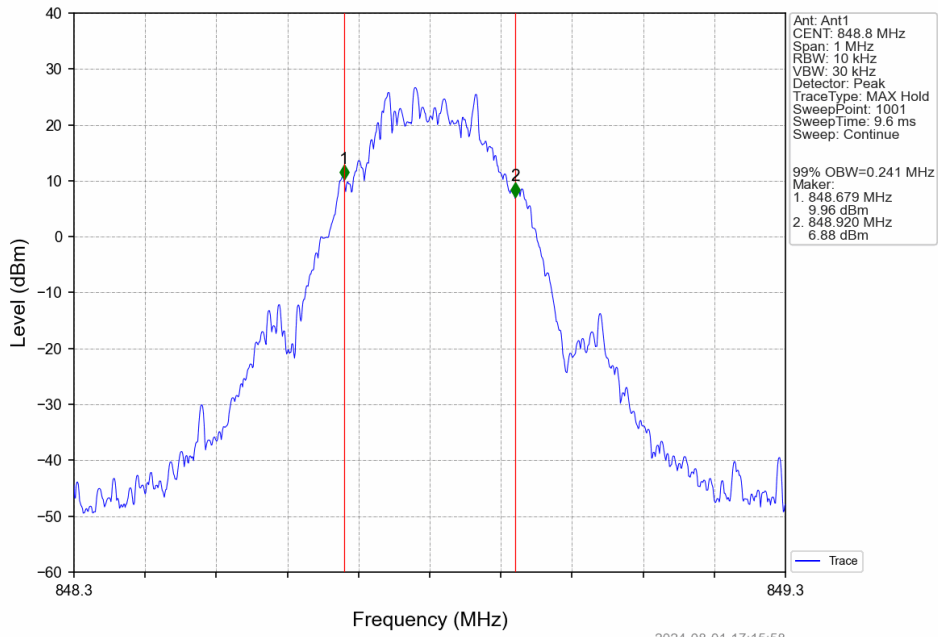


2024-08-01 17:15:58


4.2.2 GSM850_XDB

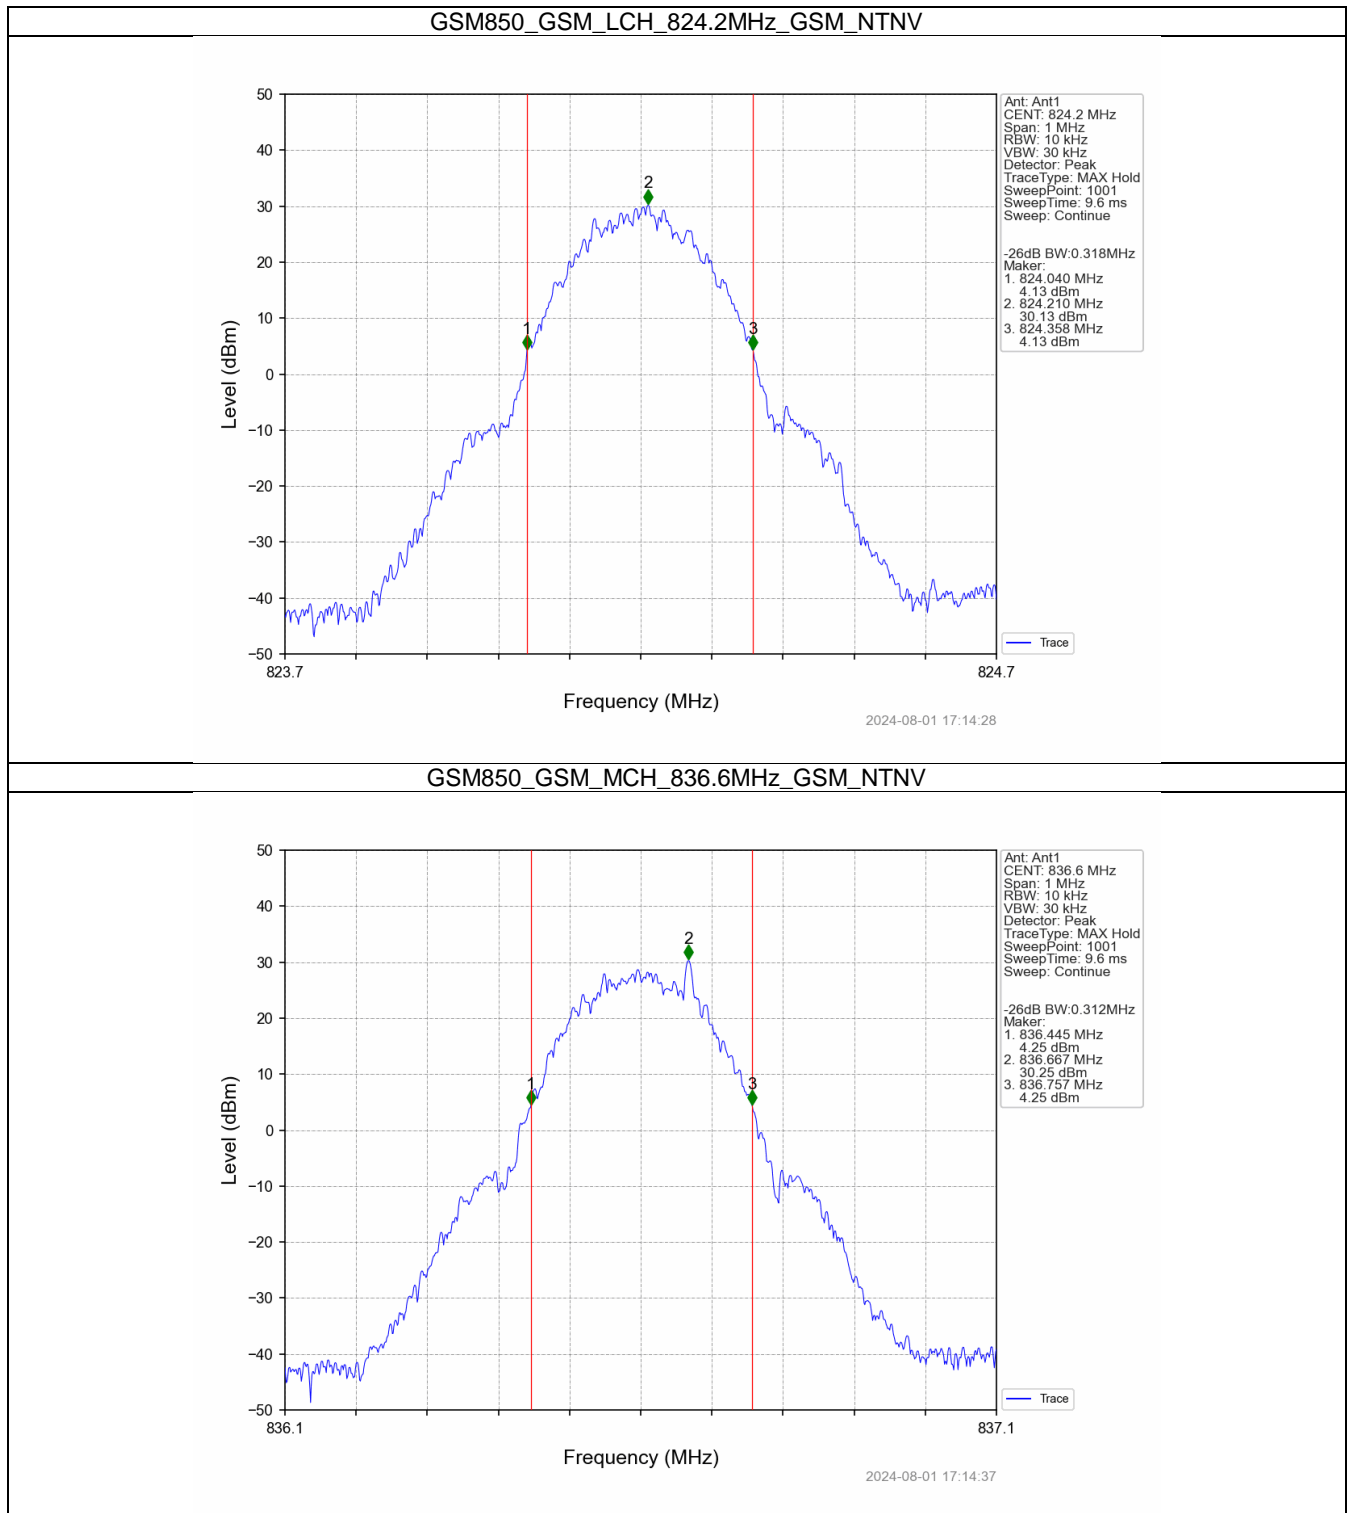


GSM850_GSM_HCH_848.8MHz_GSM_NTNV

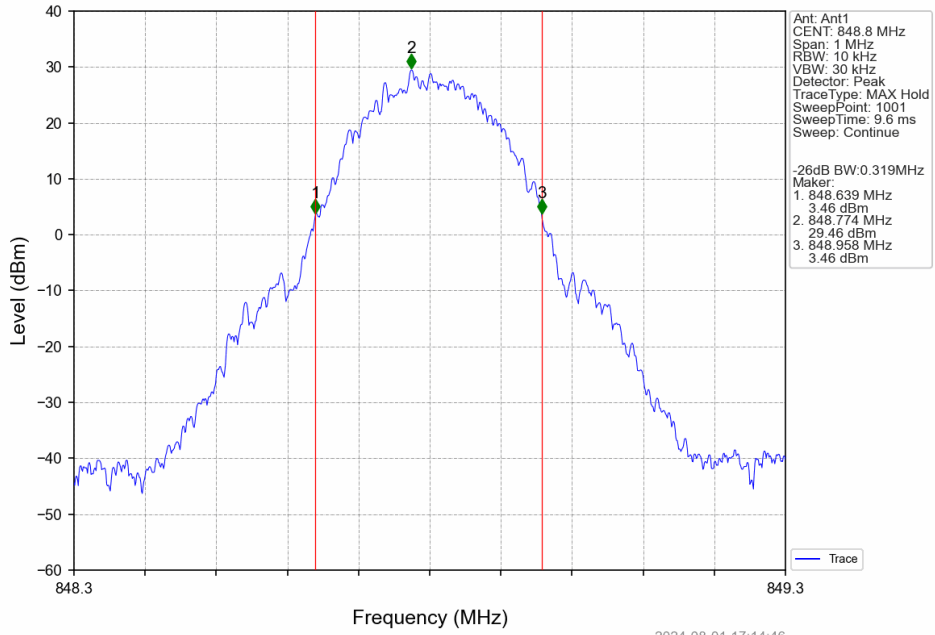


GSM850_GPRS_LCH_824.2MHz_1 TX Slot_NTNV

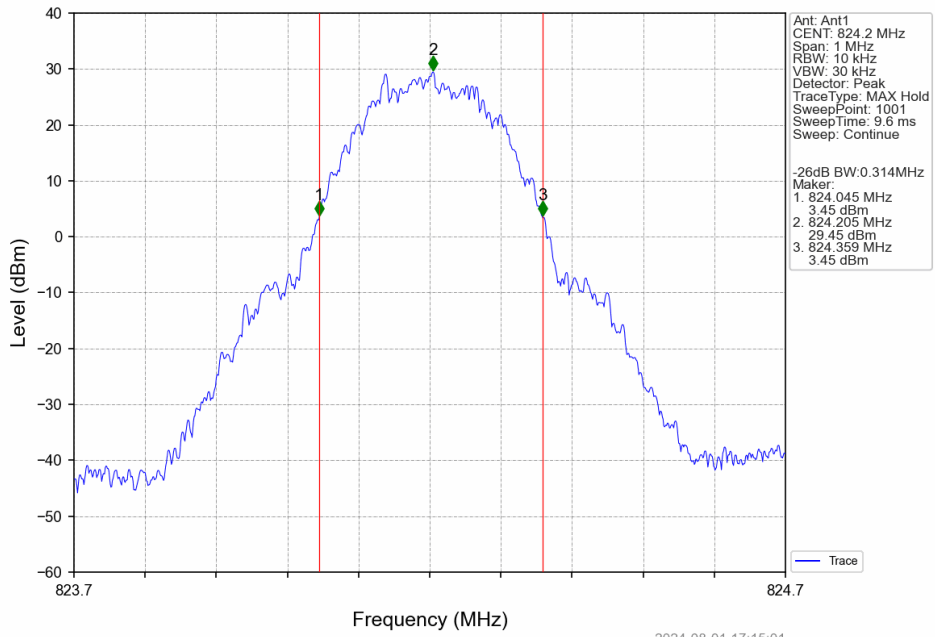


GSM850_GPRS_MCH_836.6MHz_1 TX Slot_NTNV

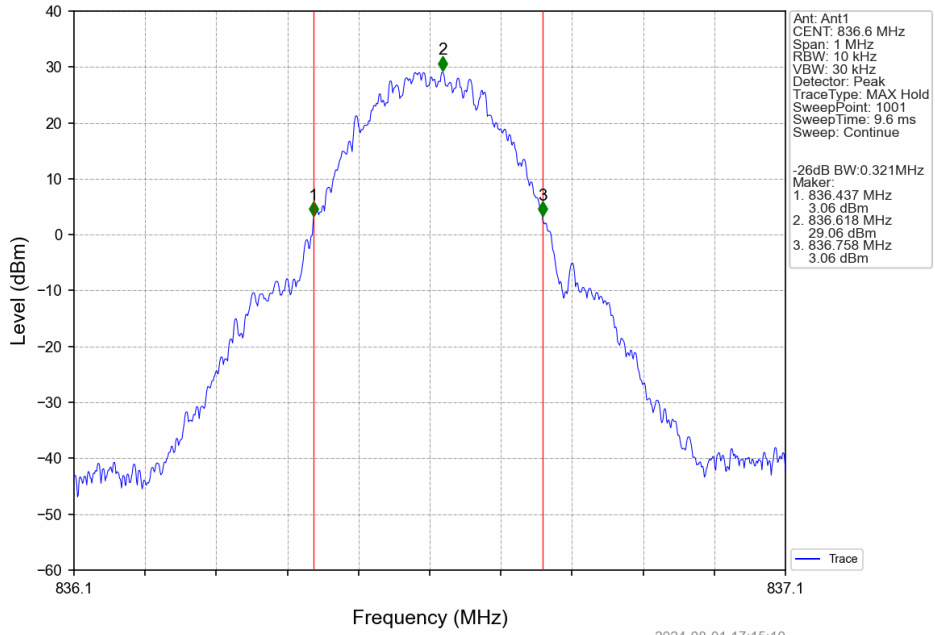


GSM850_GPRS_HCH_848.8MHz_1 TX Slot_NTNV

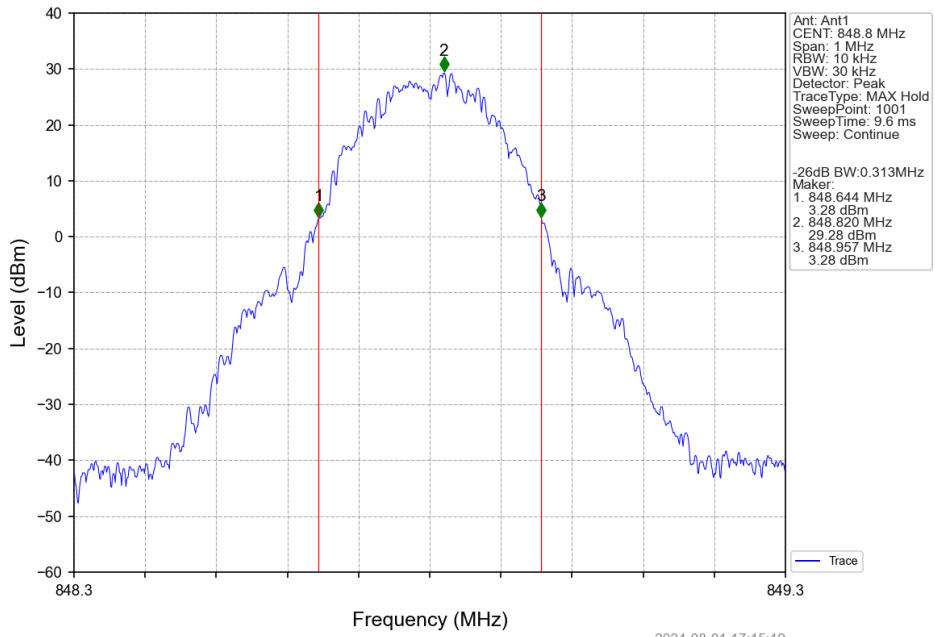


GSM850_EGPRS_LCH_824.2MHz_1 TX Slot_NTNV

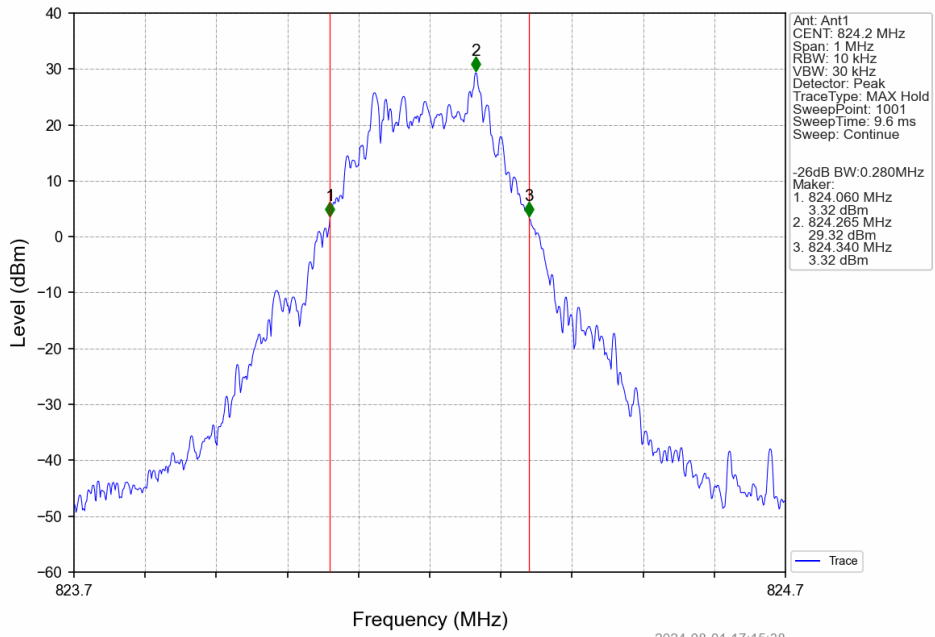

GSM850_EGPRS_MCH_836.6MHz_1 TX Slot_NTNV

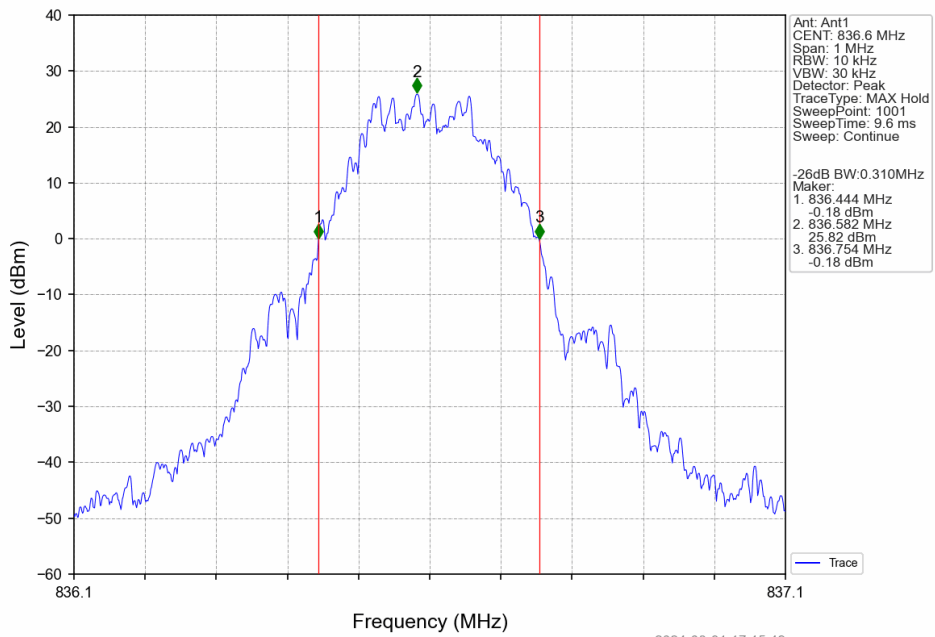

GSM850_EGPRS_HCH_848.8MHz_1 TX Slot_NTNV

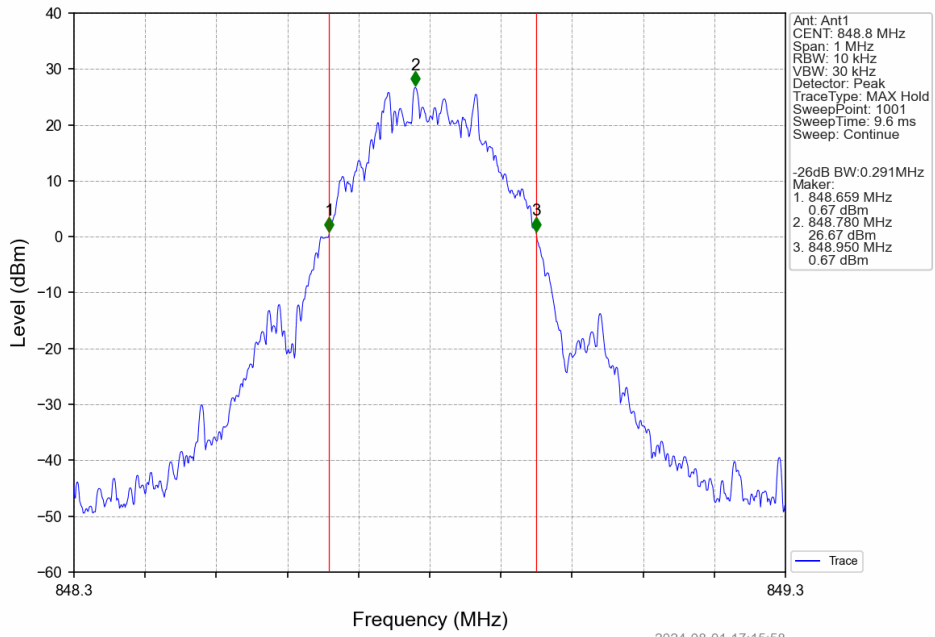

2024-08-01 17:15:58

5. Peak-Average Ratio



5.1 Test Result

5.1.1 GSM850


Band: GSM850						
ENV	Mode		Frequency (MHz)	Peak-Average Ratio (dB)		Verdict
	Network	Subset		Result	Limit	
NTNV	GSM	GSM	824.2	9.50	<=13	Pass
			836.6	9.63	<=13	Pass
			848.8	9.69	<=13	Pass
	GPRS	4 TX Slots	824.2	3.66	<=13	Pass
			836.6	3.65	<=13	Pass
			848.8	3.63	<=13	Pass
	EGPRS	4 TX Slots	824.2	10.69	<=13	Pass
			836.6	10.70	<=13	Pass
			848.8	7.39	<=13	Pass

5.2 Test Graph

5.2.1 GSM850

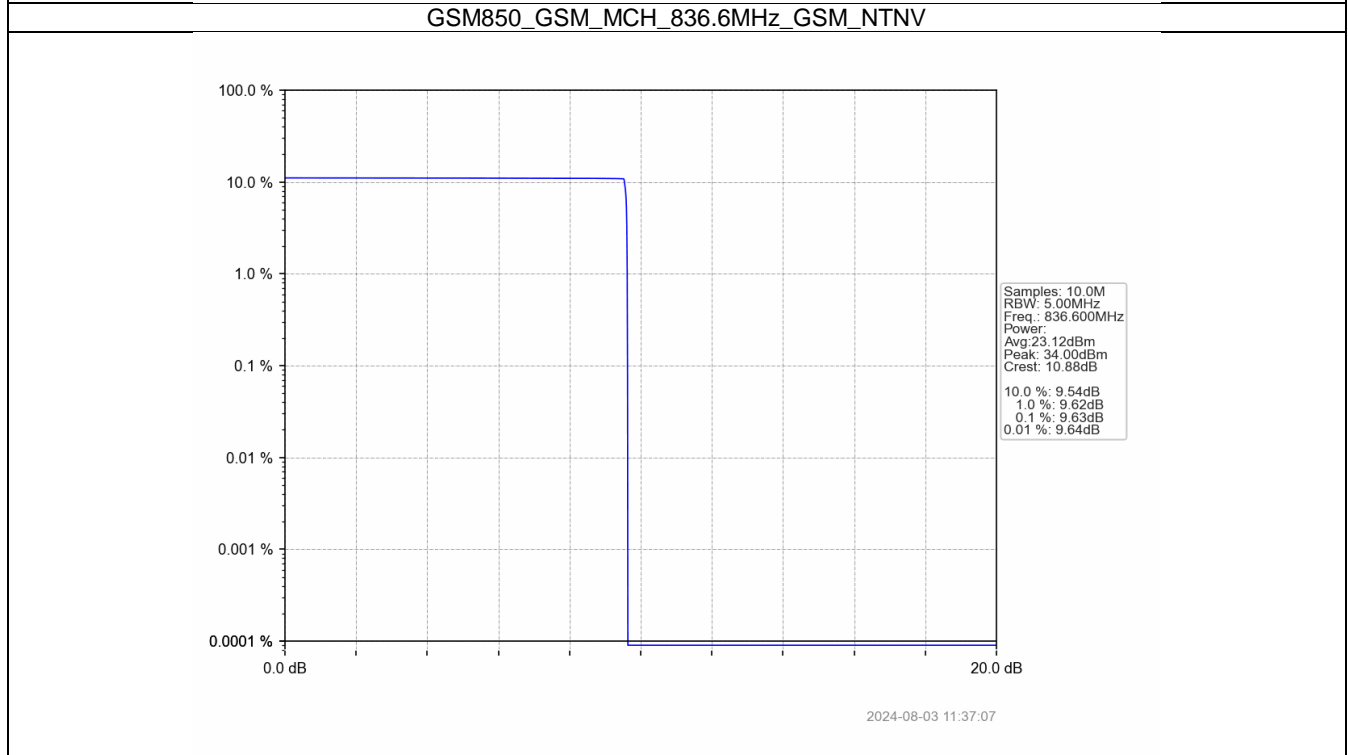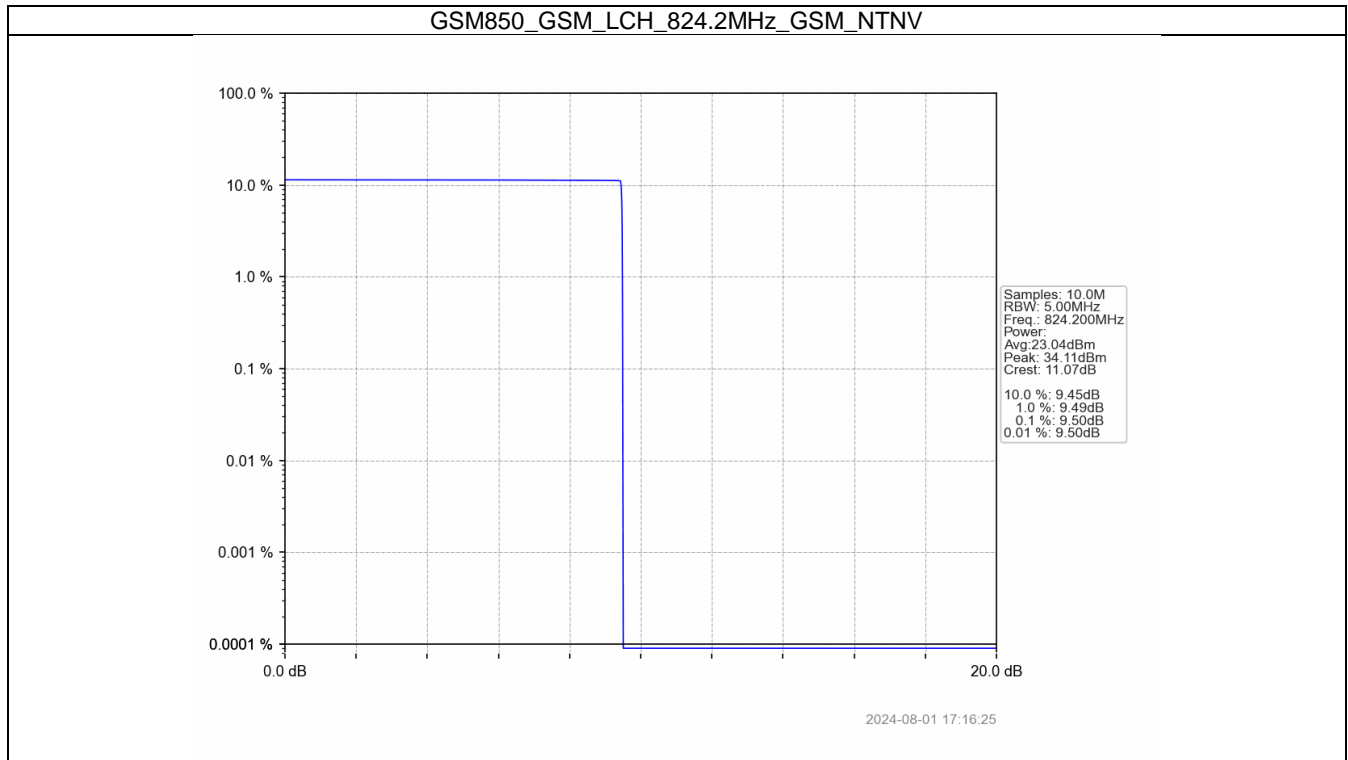


GSM850_GSM_HCH_848.8MHz_GSM_NTNV

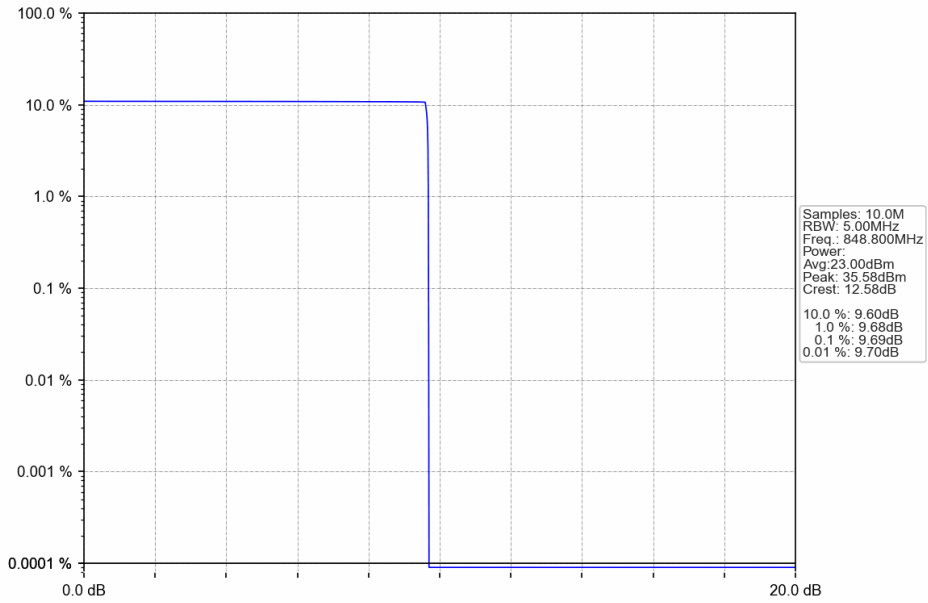


2024-08-03 11:37:21

GSM850_GPRS_LCH_824.2MHz_4 TX Slots_NTNV

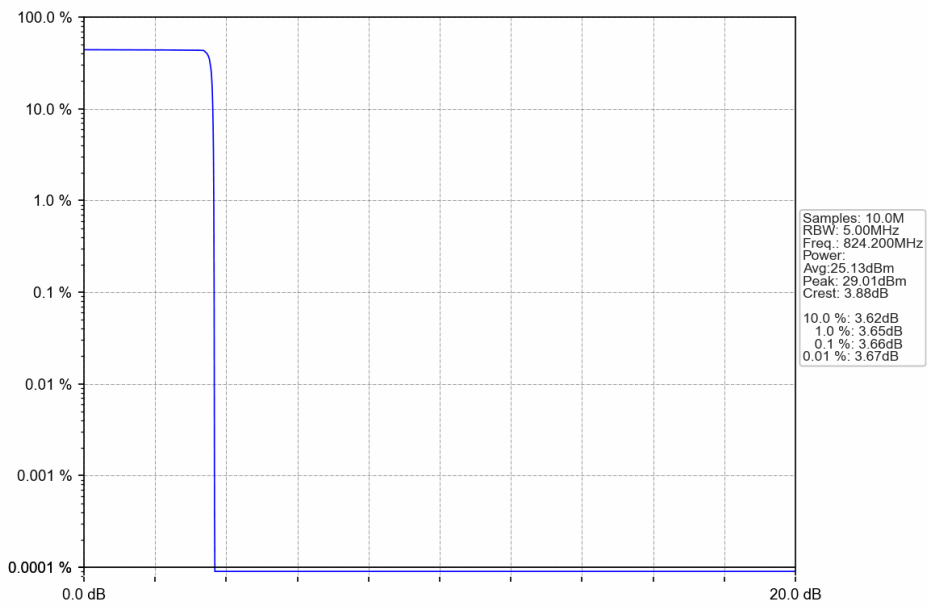


2024-08-03 11:37:37

GSM850_GPRS_MCH_836.6MHz_4 TX Slots_NTNV

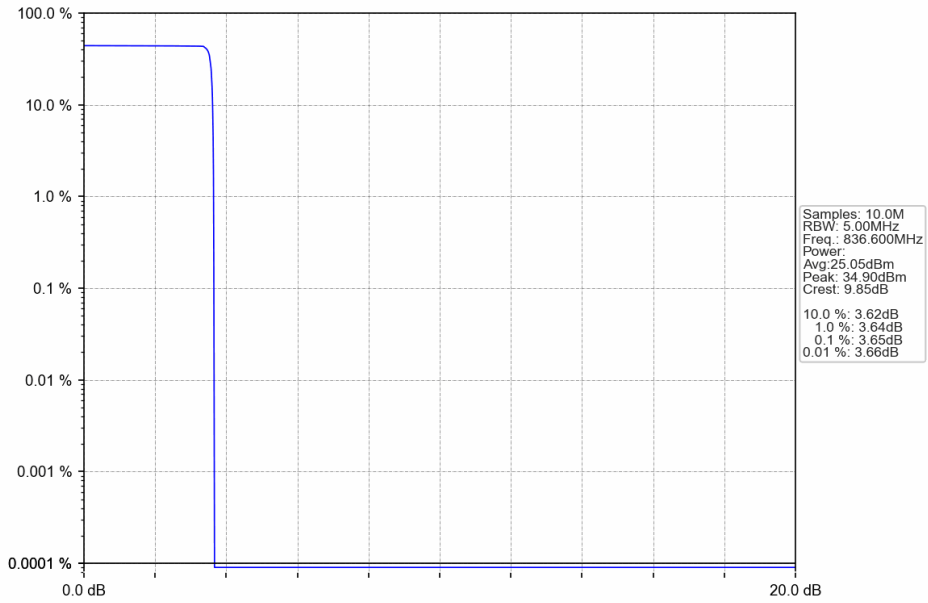


2024-08-03 11:37:46

GSM850_GPRS_HCH_848.8MHz_4 TX Slots_NTNV

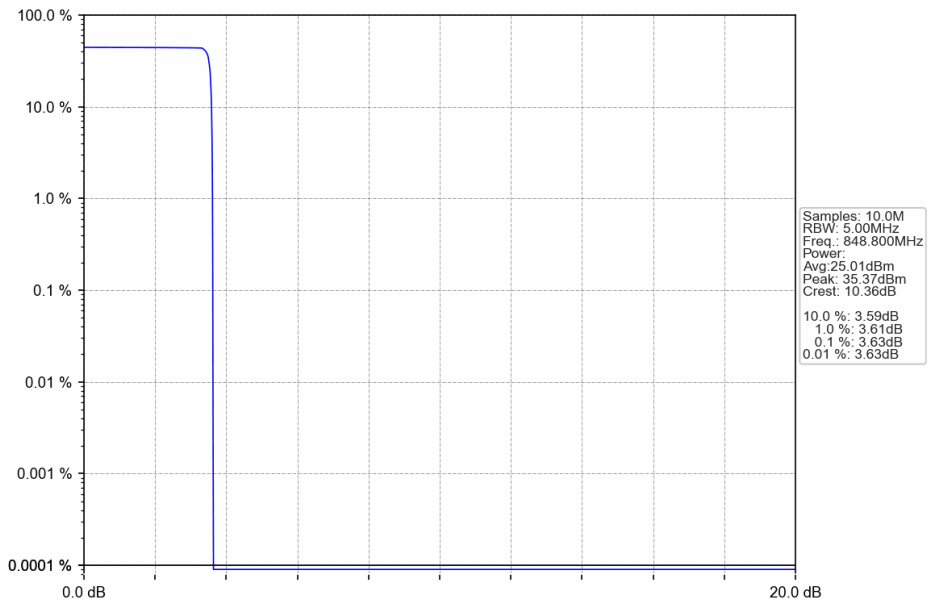


2024-08-03 11:37:56

GSM850_EGPRS_LCH_824.2MHz_4 TX Slots_NTNV

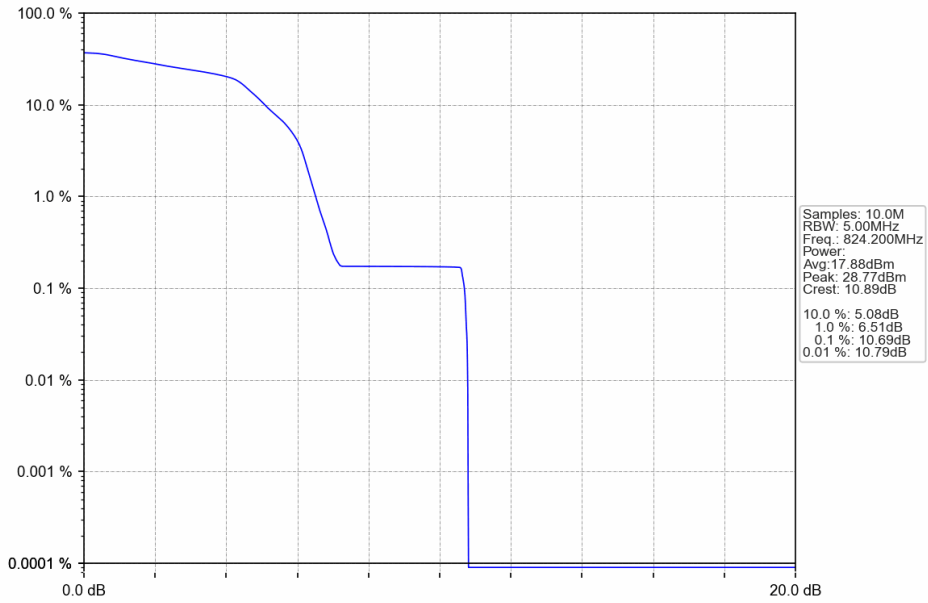


2024-08-03 11:38:18

GSM850_EGPRS_MCH_836.6MHz_4 TX Slots_NTNV

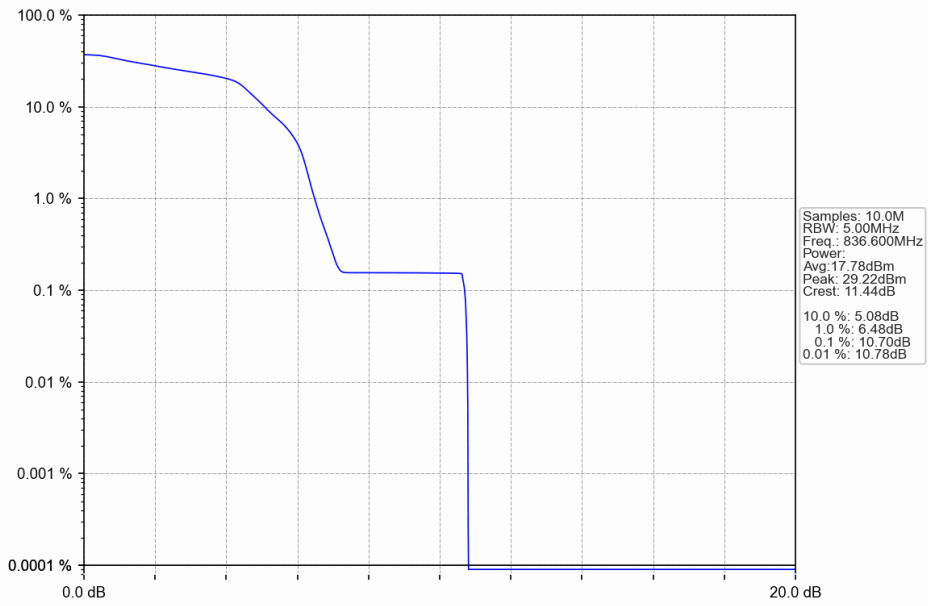

2024-08-03 11:38:34

GSM850_EGPRS_HCH_848.8MHz_4 TX Slots_NTNV

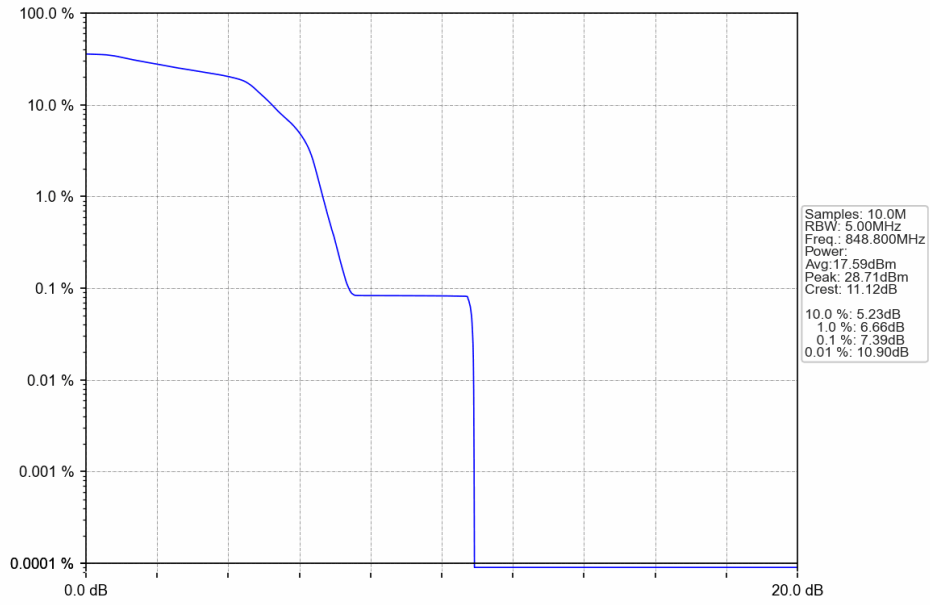

2024-08-03 11:38:49

6. Spurious Emission



6.1 Test Result

6.1.1 GSM850


Band: GSM850						
ENV	Mode		Frequency (MHz)	Spurious Emission		Verdict
	Network	Subset		Result	Limit	
NTNV	GSM	GSM	824.2	Refer To Test Graph	Pass	
			836.6	Refer To Test Graph	Pass	
			848.8	Refer To Test Graph	Pass	
	GPRS	1 TX Slot	824.2	Refer To Test Graph	Pass	
			836.6	Refer To Test Graph	Pass	
			848.8	Refer To Test Graph	Pass	
	EGPRS	1 TX Slot	824.2	Refer To Test Graph	Pass	
			836.6	Refer To Test Graph	Pass	
			848.8	Refer To Test Graph	Pass	

6.2 Test Graph


6.2.1 GSM850

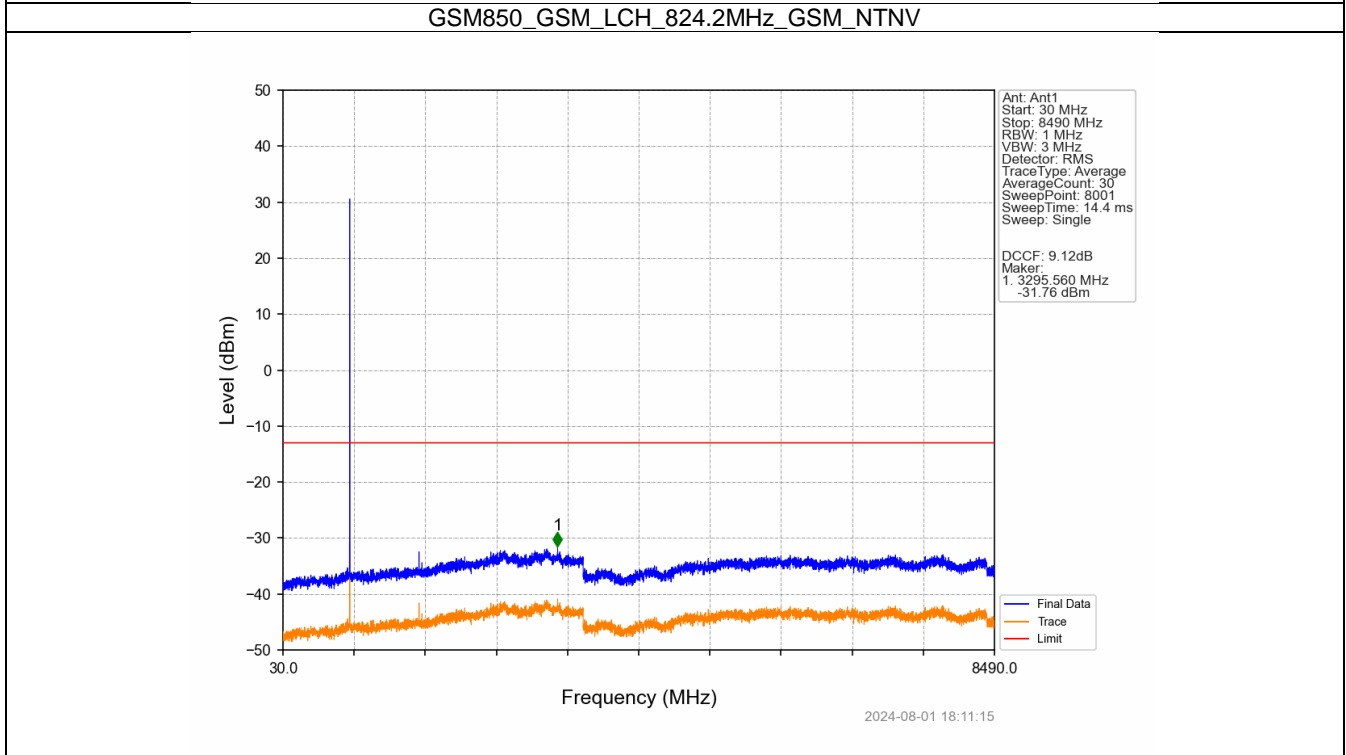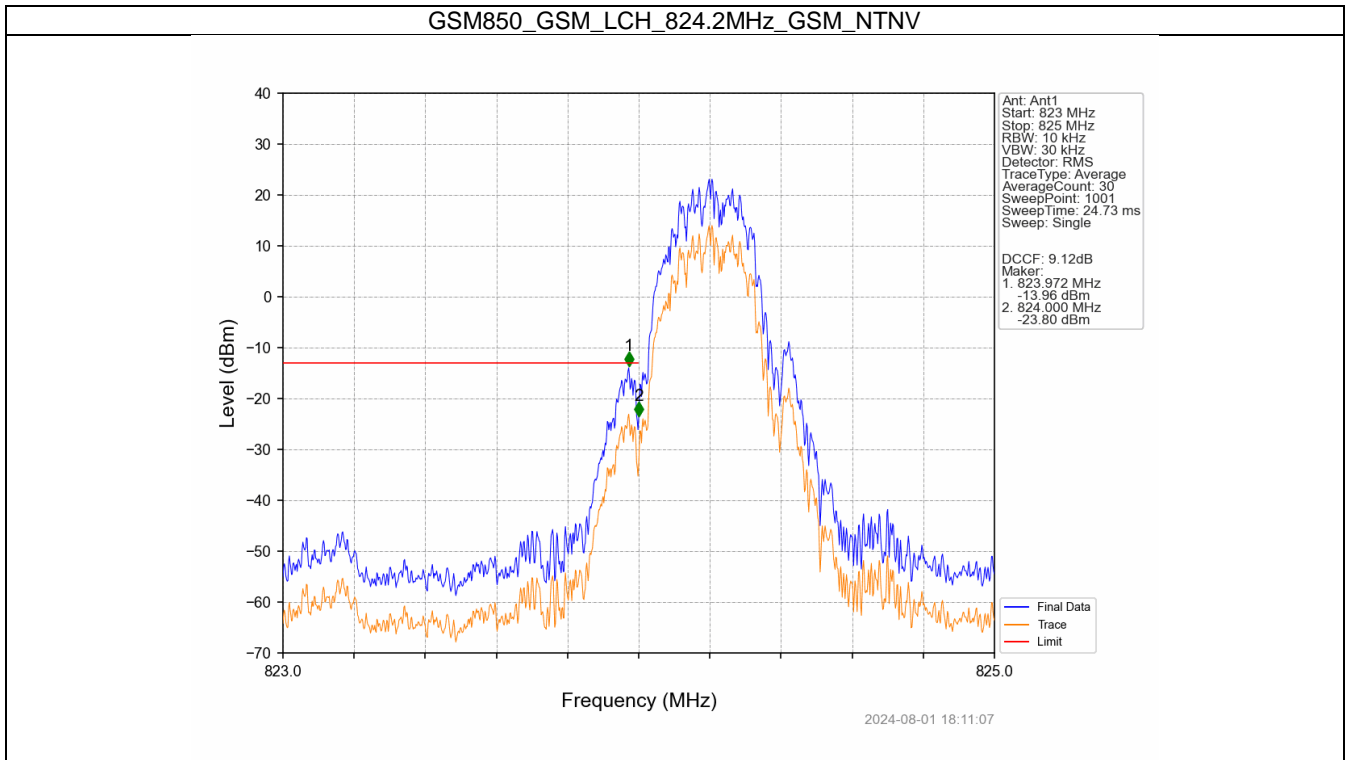


GSM850_GSM_MCH_836.6MHz_GSM_NTNV

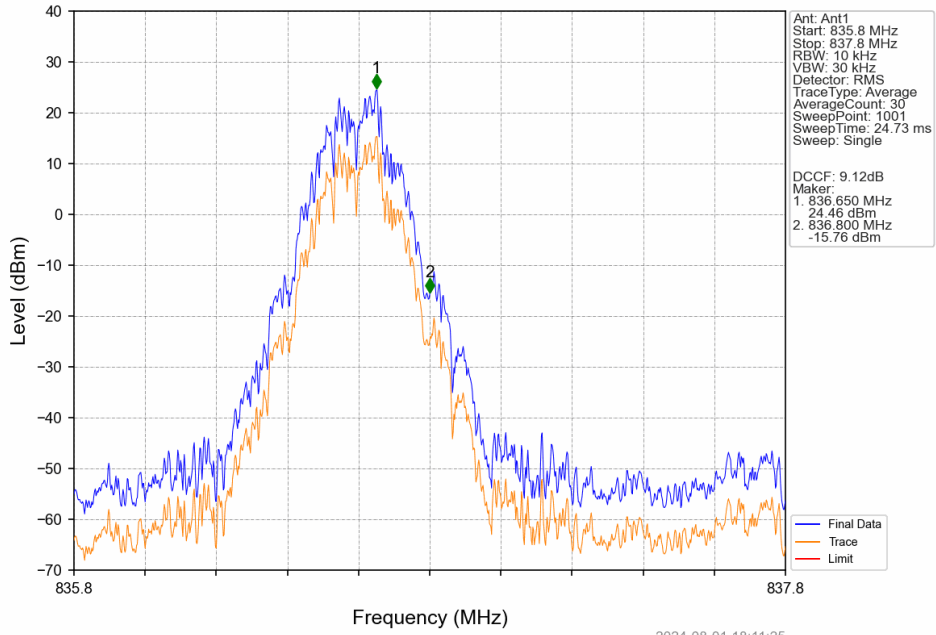


GSM850_GSM_MCH_836.6MHz_GSM_NTNV

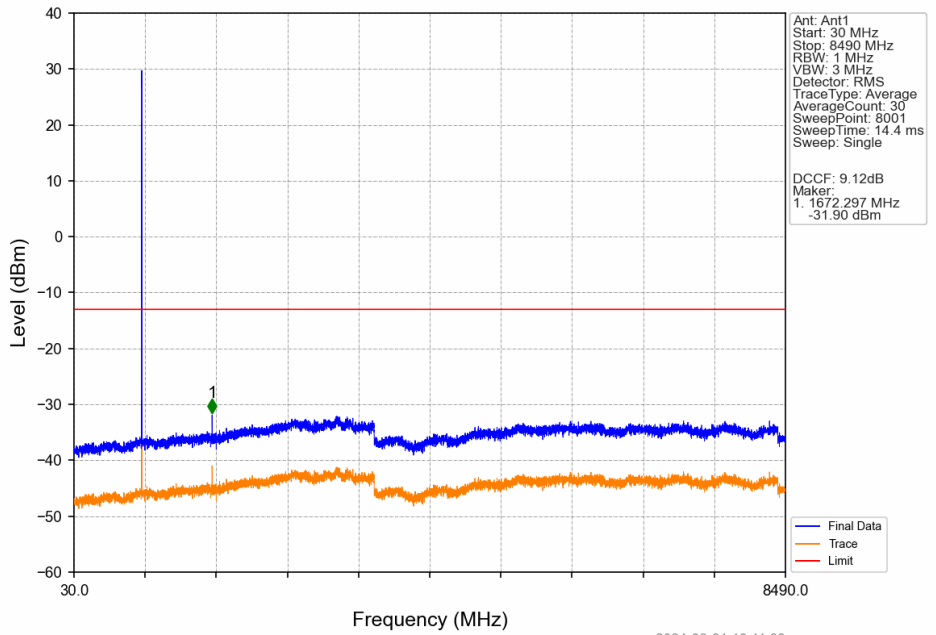


GSM850_GSM_HCH_848.8MHz_GSM_NTNV

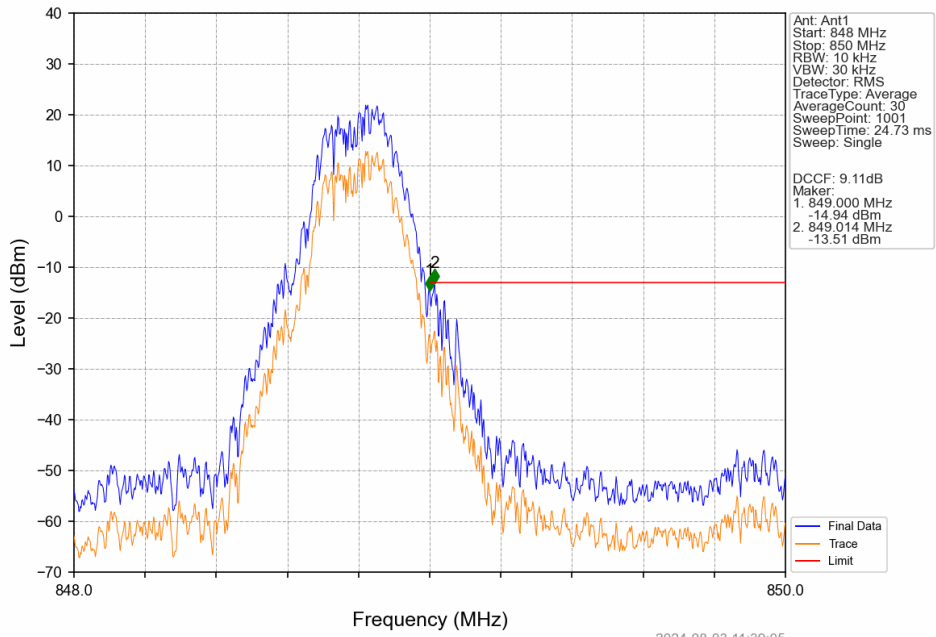


GSM850_GSM_HCH_848.8MHz_GSM_NTNV

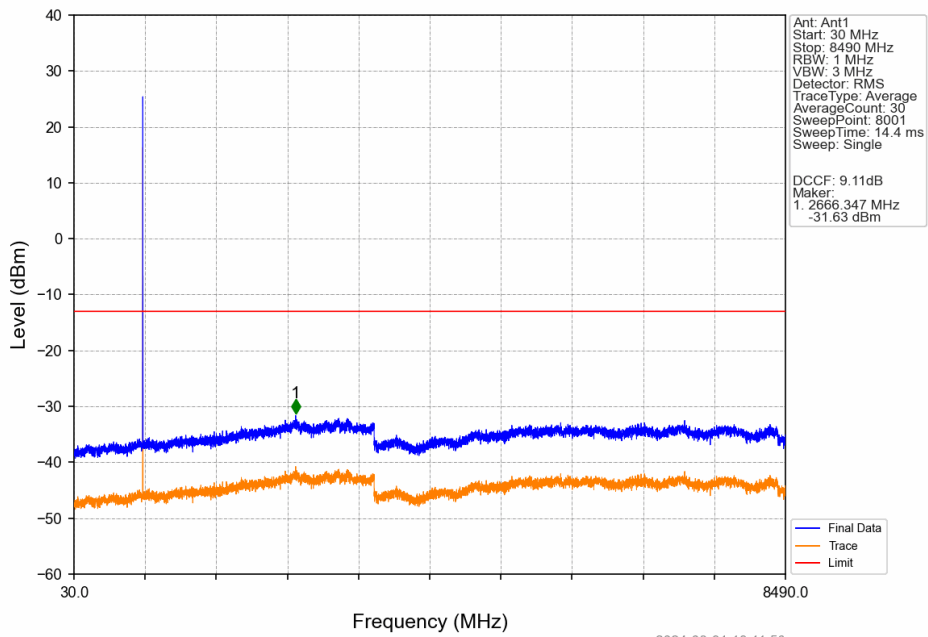


GSM850_GPRS_LCH_824.2MHz_1 TX Slot_NTNV

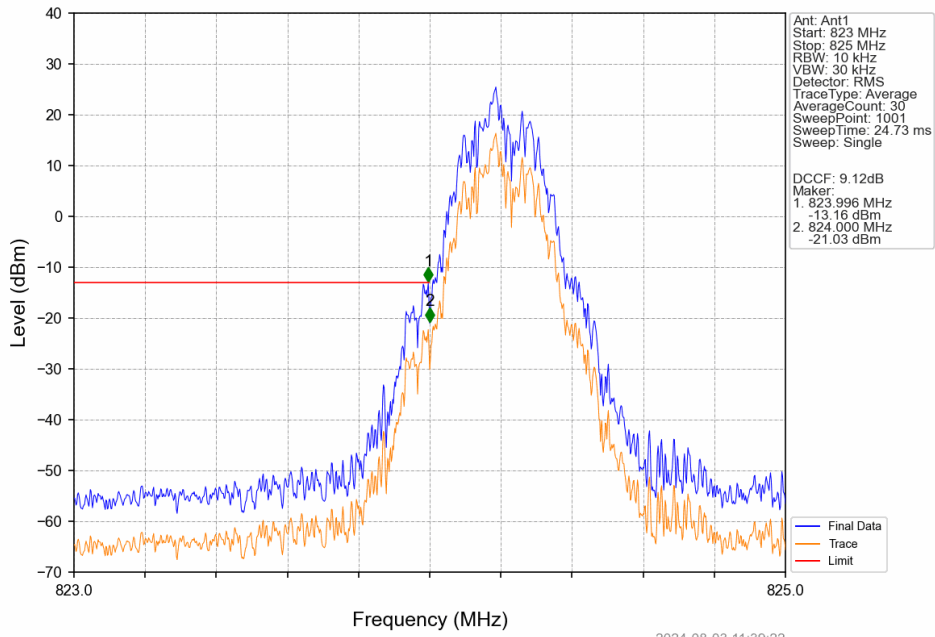


GSM850_GPRS_LCH_824.2MHz_1 TX Slot_NTNV

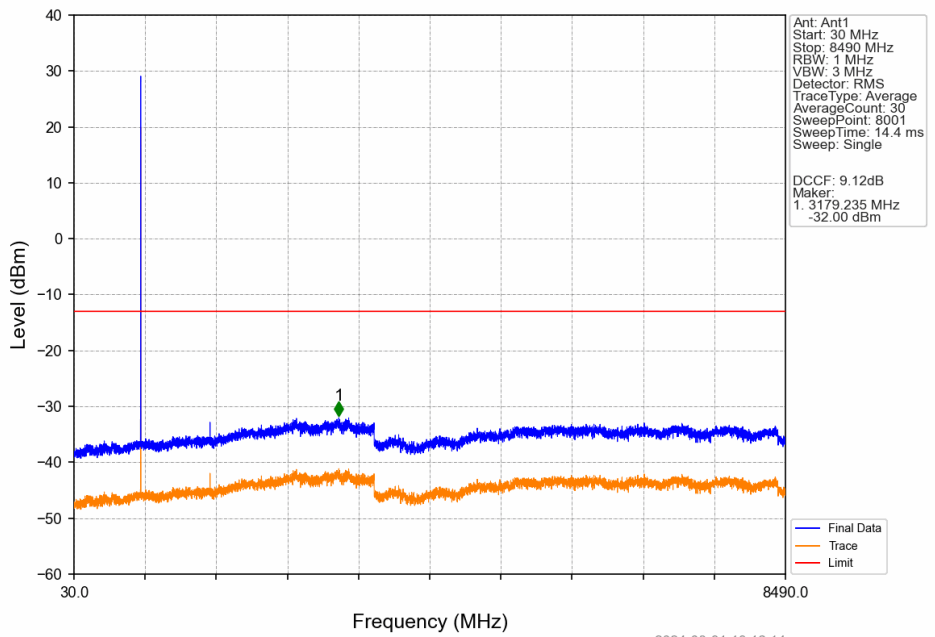


GSM850_GPRS_MCH_836.6MHz_1 TX Slot_NTNV

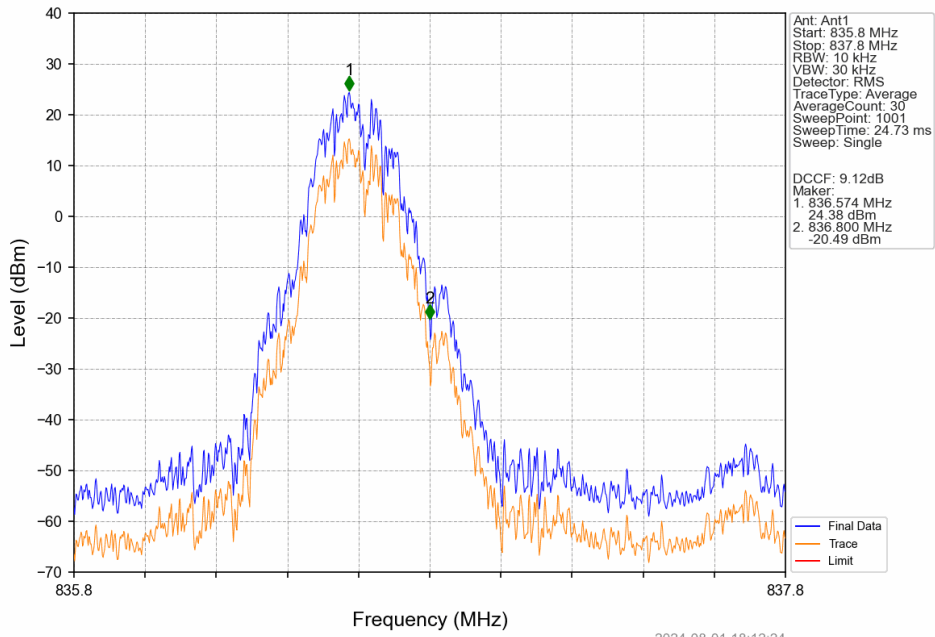


GSM850_GPRS_MCH_836.6MHz_1 TX Slot_NTNV

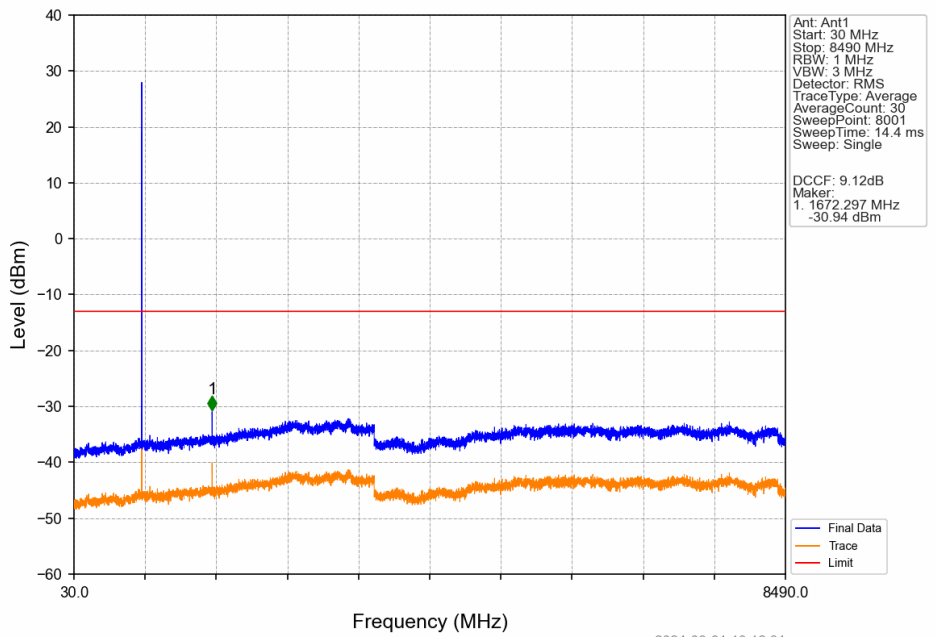


GSM850_GPRS_HCH_848.8MHz_1 TX Slot_NTNV

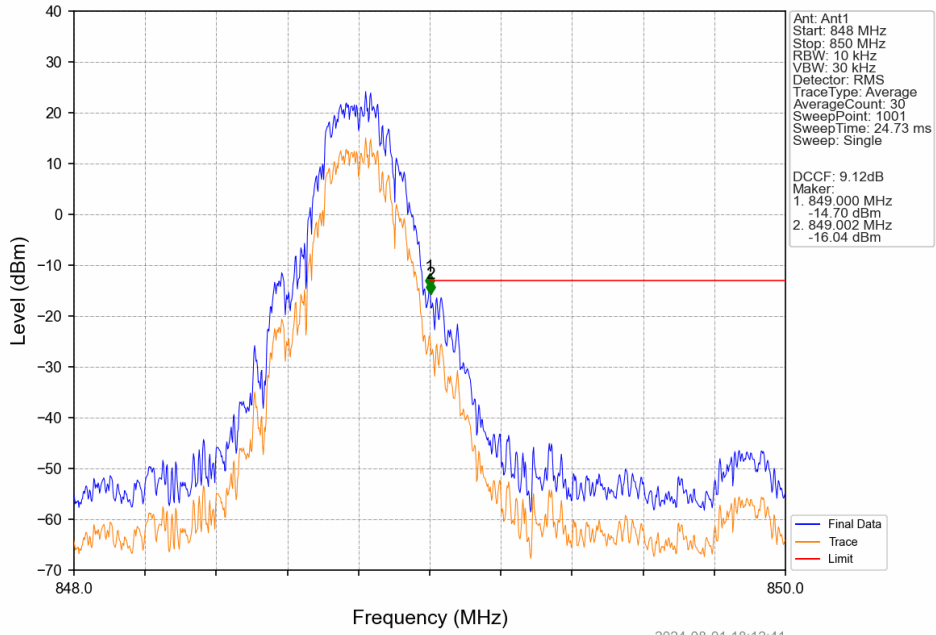


GSM850_GPRS_HCH_848.8MHz_1 TX Slot_NTNV

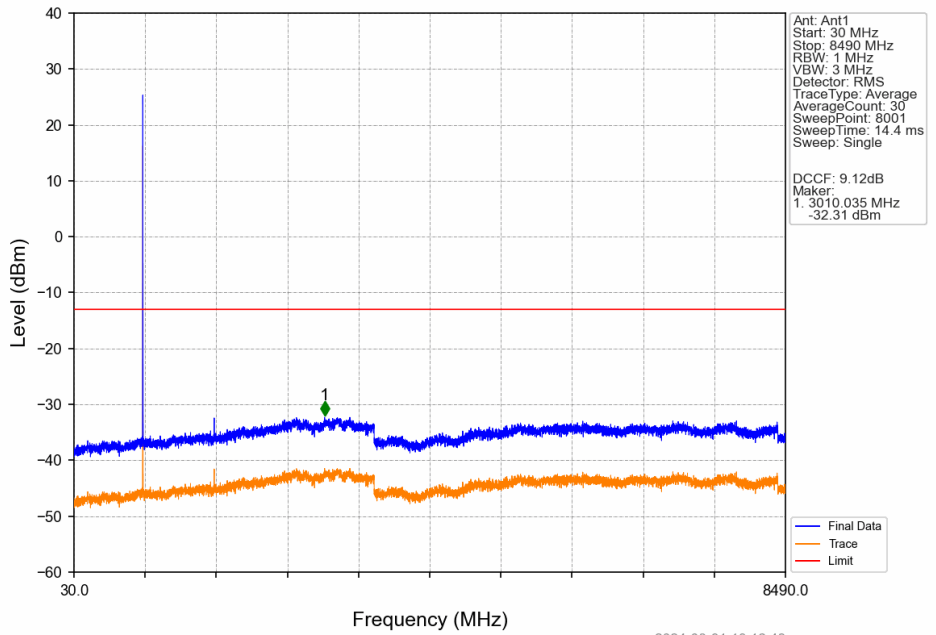


GSM850_EGPRS_LCH_824.2MHz_1 TX Slot_NTV

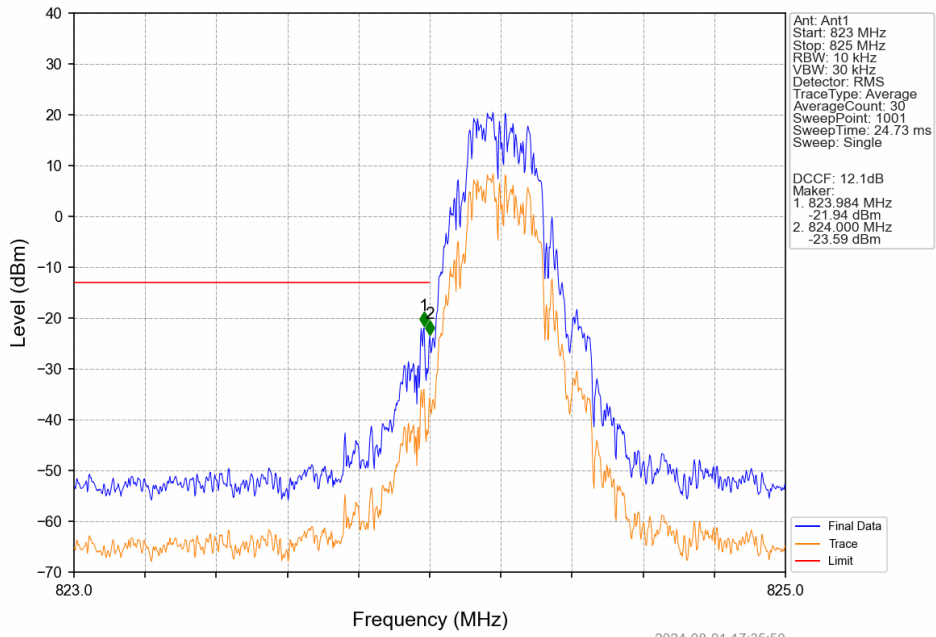


GSM850_EGPRS_LCH_824.2MHz_1 TX Slot_NTV

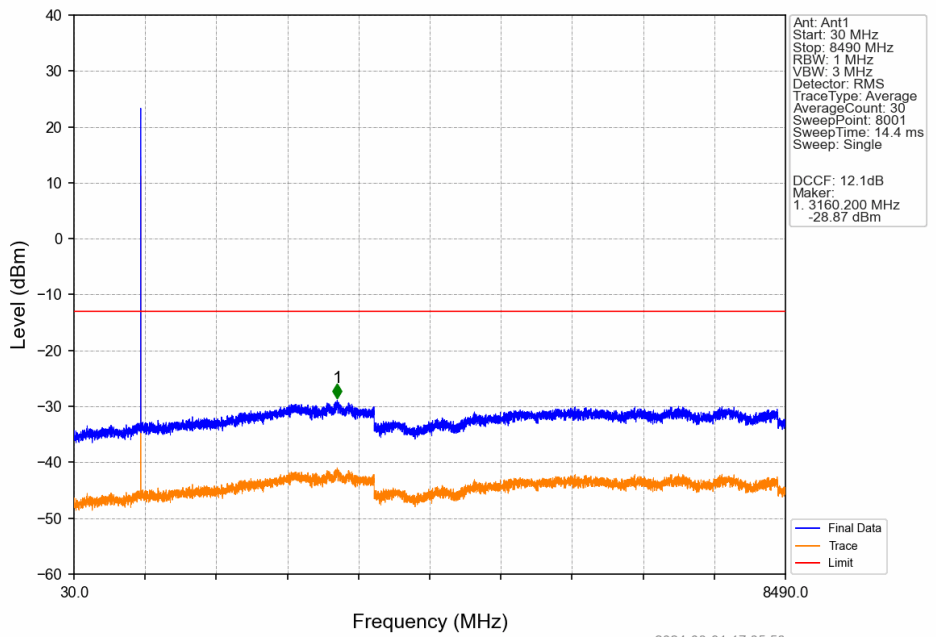


GSM850_EGPRS_MCH_836.6MHz_1 TX Slot_NTNV

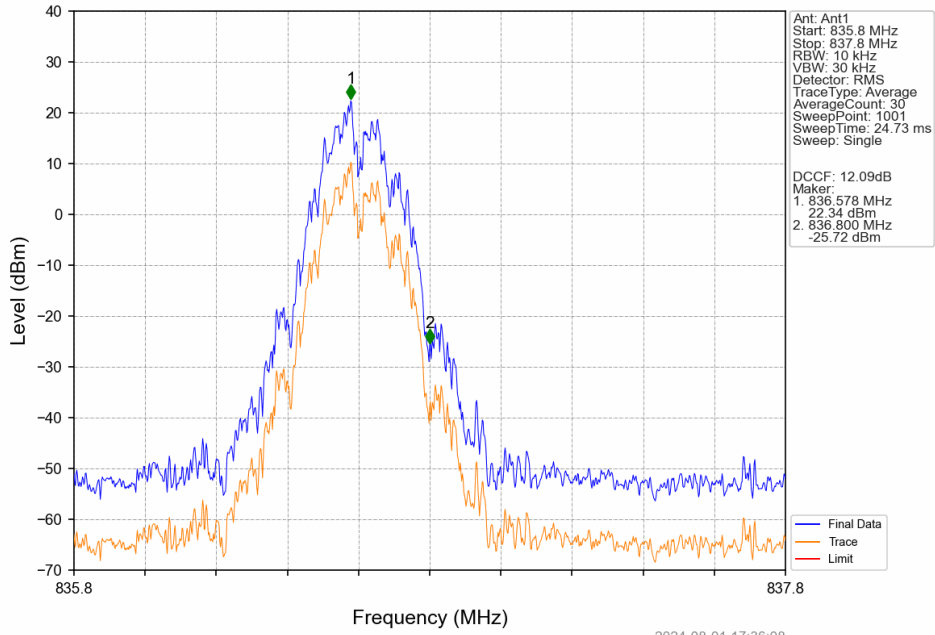


GSM850_EGPRS_MCH_836.6MHz_1 TX Slot_NTNV

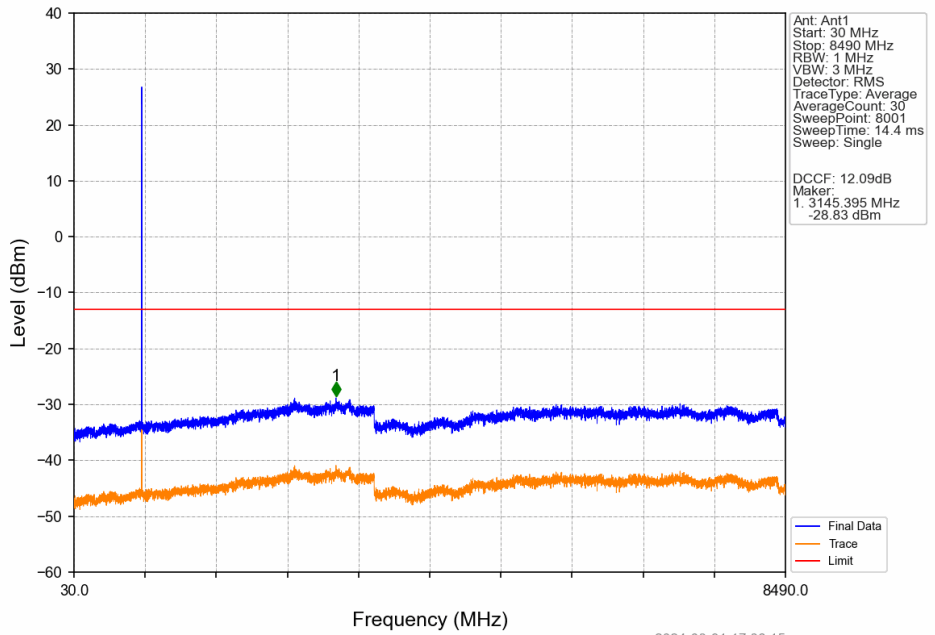

GSM850_EGPRS_HCH_848.8MHz_1 TX Slot_NTNV

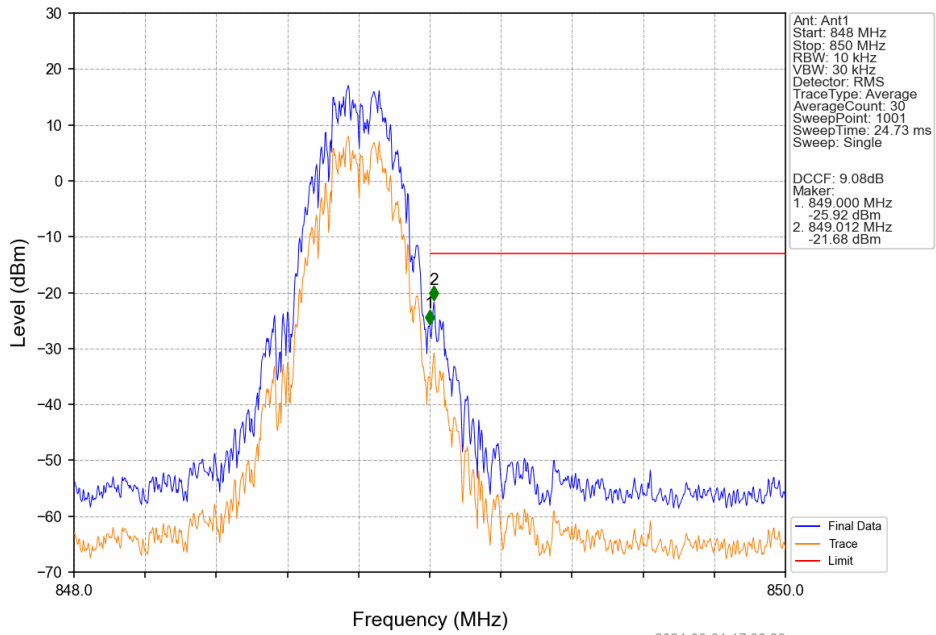

GSM850_EGPRS_HCH_848.8MHz_1 TX Slot_NTNV

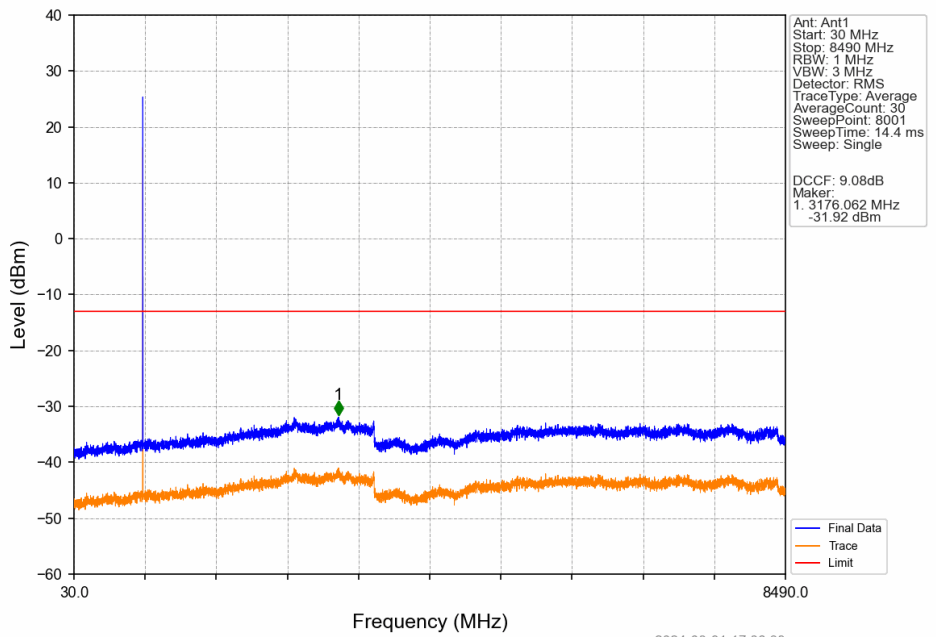

7. Form731

7.1 Test Result

7.1.1 Form731_Power

Band	BW	Lower Freq	High Freq	MAX Power (W)	Value	Hz/ppm	Emission Designator	Rule Parts	MAX Power (dBm)
GSM850	0.2	824.2	848.8	1.8072	0.0187	ppm	249KGXW	22H	32.57
GSM850	0.2	824.2	848.8	0.4207	0.0103	ppm	241KG7W	22H	26.24

7.1.2 Form731_ERP

Band	BW	Lower Freq	High Freq	MAX Power (W)	Value	Hz/ppm	Emission Designator	Rule Parts	MAX Power (dBm)
GSM850	0.2	824.2	848.8	0.8453	0.0187	ppm	249KGXW	22H	29.27
GSM850	0.2	824.2	848.8	0.1968	0.0103	ppm	241KG7W	22H	22.94