



Manufacturer :Shenzhen Bao Tianhua Technology Co., Ltd  
 Manufacturer's address: 201,Building Plant No.6 Baidajie Road,Xi Keng Community YuanshanSub-district, Longgang district,Shenzhen, Guangdong, China

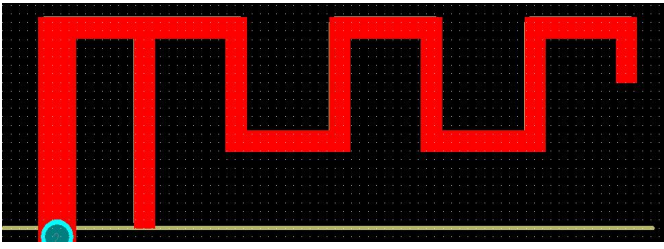


Passive Test For BT2.4								
Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	Gain (dBd)	UHS (%)	DHS (%)	Max (dB)	Min (dB)
2400	62.98	-2.01	0.8	-1.35	0	0	0.8	-14.52
2410	55.92	-2.52	0.33	-1.82	0	0	0.33	-14.9
2420	53.5	-2.72	0.23	-1.92	0	0	0.23	-14.9
2430	57.48	-2.4	0.53	-1.62	0	0	0.53	-14.84
2440	51.99	-2.84	0.03	-2.12	0	0	0.03	-15.35
2450	56.82	-2.45	0.38	-1.77	0	0	0.38	-15.12
2460	57.83	-2.38	0.59	-1.56	0	0	0.59	-15.19
2470	46.13	-3.36	-0.25	-2.4	0	0	-0.25	-15.56
2480	51.54	-2.88	0.57	-1.58	0	0	0.57	-14.09
2490	43.76	-3.59	0.14	-2.01	0	0	0.14	-13.96
2500	43.84	-3.58	0.2	-1.95	0	0	0.2	-14.29

**2400.00MHz - 2500.00MHz Gain**

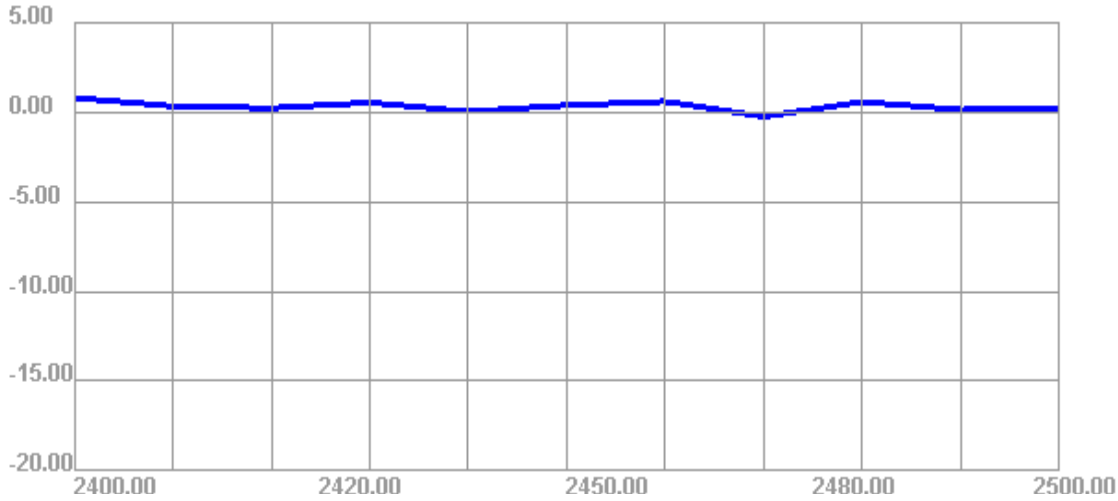


**2400.00MHz - 2500.00MHz Efficiency**

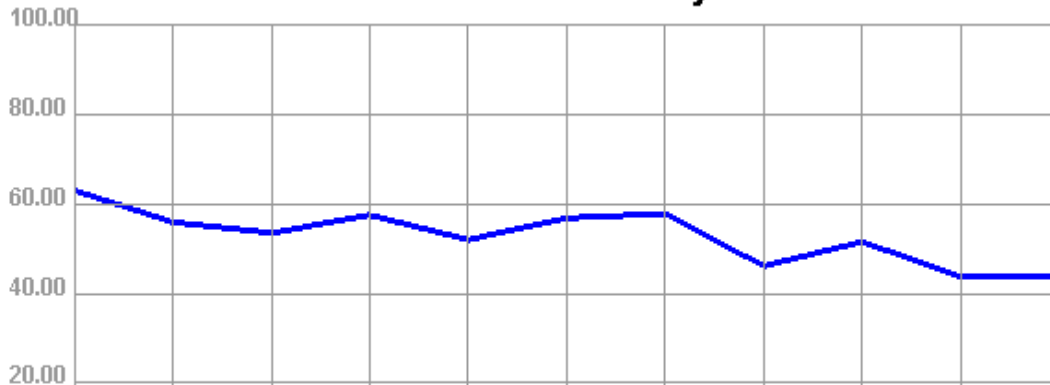





**2400.000MHz**

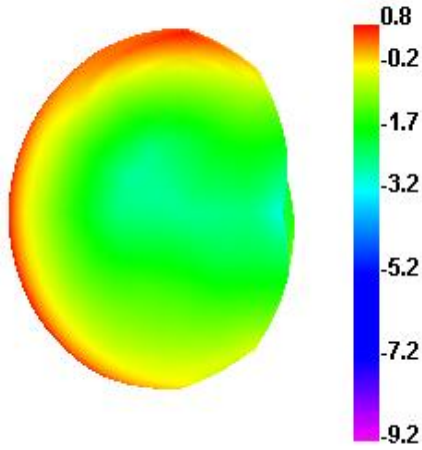


**2400.000MHz H**

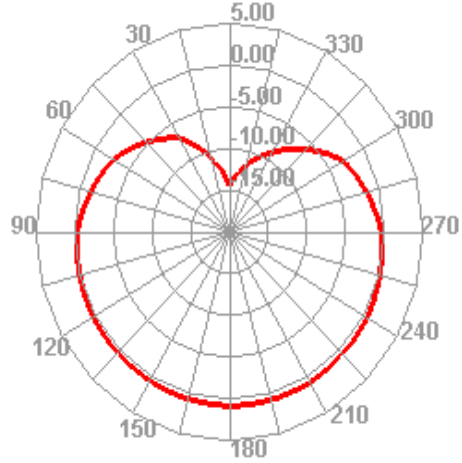


**2400.000MHz E1**

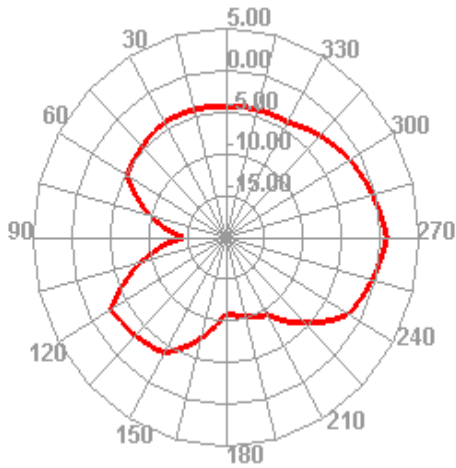


**2400.000MHz E2**

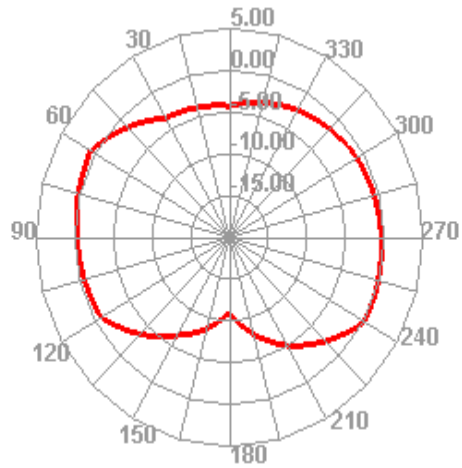

**2450.000MHz**

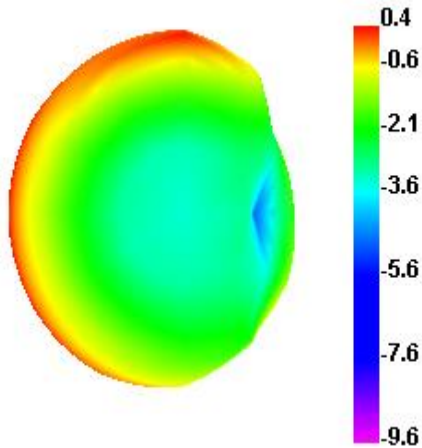


**2450.000MHz H**

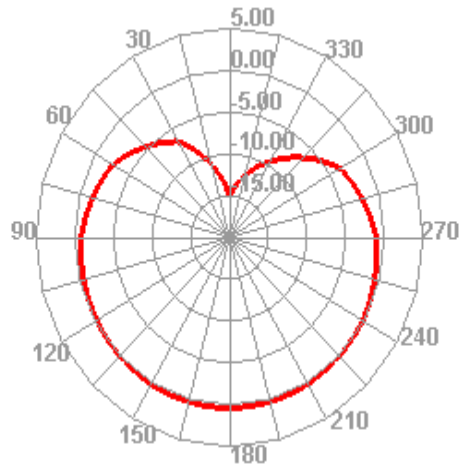


**2450.000MHz E1**



**2450.000MHz E2**

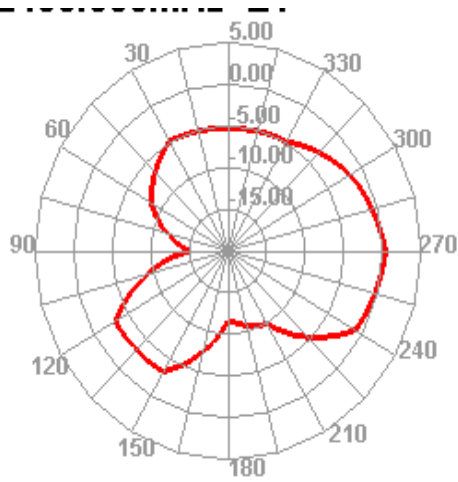

**2500.000MHz**


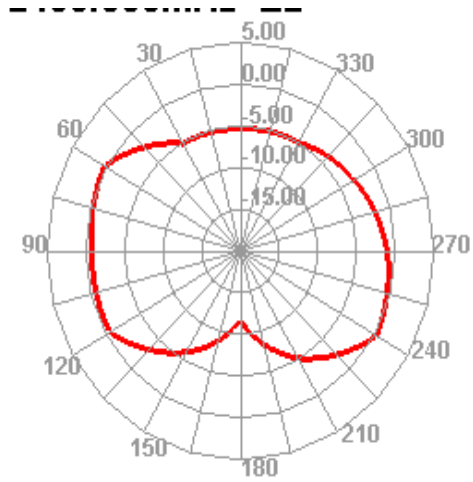


**2500.000MHz H**

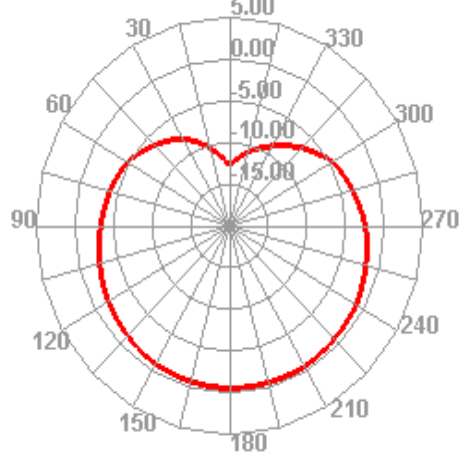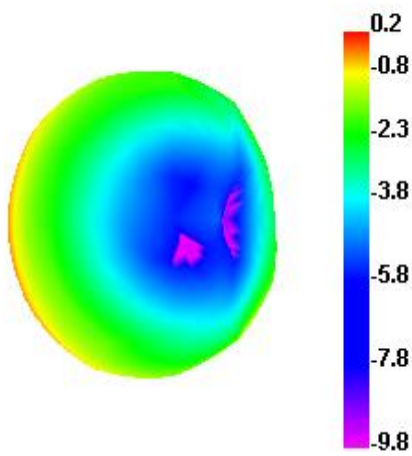

**2500.000MHz E1**

**2500.000MHz E2**

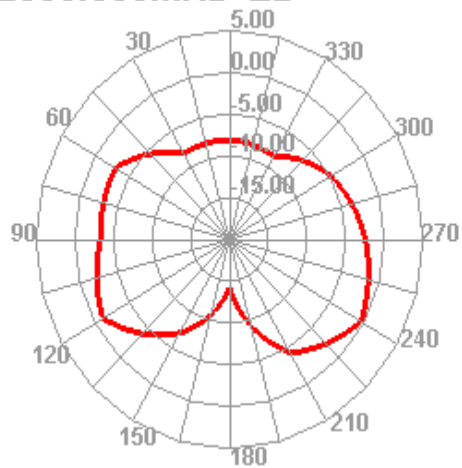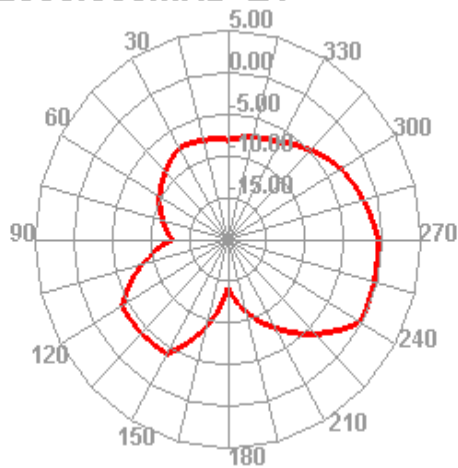

Directivity (dBi)	Beamwidth (3dB)	AttH (dB)	AttV (dB)
2.01	60	47.36	46.86
2.52	60	47.4	46.9
2.72	60	47.28	46.76
2.4	60	47.35	46.78
2.84	60	47.15	46.65
2.45	60	47.33	46.85
2.38	60	47.72	47.22
3.36	60	47.36	46.93
2.88	60	47.56	47.1
3.59	60	47.05	46.67
3.58	60	47.01	46.63

Application Information	
04Version	5.245.351
TotalTime	4m 18s 251ms
AdditionalInfor	NULL