

# RF Test Report

For

**Globe Electric Company Inc.**

<b>Test Standards:</b>	<u>Part 15C Subpart C §15.247</u> <u>IC RSS-247 Issue 2</u>
<b>Product Name:</b>	<u>Wifi Smart Socket</u>
<b>Tested Model:</b>	<u>50020*</u>
<b>Brand Name:</b>	<u>Globe</u>
<b>FCC ID:</b>	<u>2AQUQGE50020A</u>
<b>IC:</b>	<u>8290A-GE50020A</u>
<b>Classification</b>	<u>(DTS) Digital Transmission System</u>
<b>Report No.:</b>	<u>EC2102015RF02</u>
<b>Tested Date:</b>	<u>2021-02-25 to 2021-03-05</u>
<b>Issued Date:</b>	<u>2021-03-05</u>
<b>Prepared By:</b>	<u>Jack Liu.</u> Jack Liu / Engineer
<b>Approved By:</b>	<u>Tiny-yang</u> Tiny Yang / RF Manager

**Hunan Ecloud Testing Technology Co., Ltd.**  
Building A1, Changsha E Center, No. 18 Xiangtai Avenue, Liuyang Economic and  
Technological Development Zone, Hunan, P.R.C  
Tel.: +86-731-89634887 Fax.: +86-731-89634887  
www.hn-ecloud.com

Note: The test results in this report apply exclusively to the tested model / sample. Without written approval of Hunan Ecloud Testing Technology Co., Ltd., the test report shall not be reproduced except in full.

## Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	2021.03.05	Valid	Original Report

## TABLE OF CONTENTS

<b>1. TEST LABORATORY .....</b>	<b>5</b>
1.1 Test facility .....	5
<b>2. GENERAL DESCRIPTION.....</b>	<b>6</b>
2.1 Applicant .....	6
2.2 Manufacturer .....	6
2.3 General Description Of EUT .....	6
2.4 Modification of EUT .....	7
2.5 Applicable Standards .....	7
<b>3. TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....</b>	<b>8</b>
3.1 Descriptions of Test Mode .....	8
3.2 Test Mode .....	8
3.3 Support Equipment .....	9
3.4 Test Setup .....	9
3.5 Measurement Results Explanation Example.....	12
<b>4. TEST RESULT .....</b>	<b>13</b>
4.1 6dB and 99% Bandwidth Measurement .....	13
4.2 Peak Output Power Measurement .....	14
4.3 Power Spectral Density Measurement .....	15
4.4 Conducted Band Edges and Spurious Emission Measurement .....	16
4.5 Radiated Band Edges and Spurious Emission Measurement .....	17
4.6 AC Conducted Emission Measurement.....	41
4.7 Antenna Requirements .....	44
<b>5. LIST OF MEASURING EQUIPMENT .....</b>	<b>45</b>
<b>6. UNCERTAINTY OF EVALUATION.....</b>	<b>47</b>
<b>APPENDIX A: DTS BANDWIDTH .....</b>	<b>48</b>
<b>APPENDIX B: OCCUPIED CHANNEL BANDWIDTH .....</b>	<b>51</b>
<b>APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER .....</b>	<b>54</b>
<b>APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY .....</b>	<b>57</b>
<b>APPENDIX E: BAND EDGE MEASUREMENTS .....</b>	<b>60</b>
<b>APPENDIX F: CONDUCTED SPURIOUS EMISSION .....</b>	<b>62</b>
<b>APPENDIX G: SETUP PHOTOGRAPHS .....</b>	<b>68</b>

## Summary of Test RESULT

FCC Rule	IC Rule	Description	Limit	Result	Remark
15.247(a)(2)	RSS-247 5.2(a)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
-	RSS-Gen 6.7	99% Bandwidth	-	Pass	-
15.247(b)(3)	RSS-247 5.4(d)	Peak Output Power	$\leq 30\text{dBm}$	Pass	-
15.247(e)	RSS-247 5.2(b)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
15.247(d)	RSS-247 5.5	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass	-
15.247(d)	RSS-247 5.5	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d) RSS-247 5.5 & RSS-Gen Table 5 , Table 6	Pass	Under limit 7.17 dB at 9920 MHz
15.207	RSS-GEN 8.8	AC Conducted Emission	15.207(a) RSS-GEN 8.8 Table 4	Pass	Under limit 6.04 dB at 0.469 MHz
15.203 & 15.247(b)	RSS-GEN 6.8	Antenna Requirement	15.203 & 15.247(b) RSS-GEN 6.8	Pass	-

## **1. Test Laboratory**

### **1.1 Test facility**

#### **CNAS ( accreditation number:L11138 )**

Hunan Ecloud Testing Technology Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

#### **FCC (Designation number:CN1244 , Test Firm Registration**

#### **Number:793308 )**

Hunan Ecloud Testing Technology Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

#### **ISED(CAB identifier: CN0012, ISED# :24347)**

Hunan Ecloud Testing Technology Co., Ltd. has been listed on the Wireless Device Testing Laboratories list of innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements.

#### **A2LA (Certificate Number:4895.01)**

Hunan Ecloud Testing Technology Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

## 2. General Description

### 2.1 Applicant

**Globe Electric Company Inc.**  
150, Oneida, Montreal, Quebec, Canada, H9R 1A8

### 2.2 Manufacturer

**Globe Electric Company Inc.**  
150, Oneida, Montreal, Quebec, Canada, H9R 1A8

### 2.3 General Description Of EUT

<b>Product</b>	Wifi Smart Socket
<b>Model No.</b>	50020*
<b>Brand Name</b>	Globe
<b>Additional No.</b>	N/A
<b>Difference Description</b>	N/A
<b>FCC ID</b>	2AQUQGE50020A
<b>IC</b>	8290A-GE50020A
<b>Power Supply</b>	125Vac
<b>Modulation Technology</b>	BLE
<b>Modulation Type</b>	GFSK
<b>Operating Frequency</b>	2402MHz~2480MHz
<b>Number Of Channel</b>	40
<b>Max. Output Power</b>	9.27 dBm (0.0085 W)
<b>Max. e.i.r.p.</b>	8.27 dBm (0.0067W)
<b>Antenna Type</b>	PCB Antenna type with -1dBi gain
<b>HW Version</b>	SK522WR-G4
<b>SW Version</b>	1.1.0
<b>I/O Ports</b>	Refer to user's manual

**NOTE:**

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
3. \*: Pre-test AC120V and AC125V, only the worst AC125V test data is recorded in the report

## 2.4 Modification of EUT

No modifications are made to the EUT during all test items.

## 2.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ ANSI C63.10-2013
- ♦ KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ IC RSS-247 Issue 2
- ♦ IC RSS-Gen Issue 5

### Remark:

1. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B&ICES-003, recorded in a separate test report.

### 3. Test Configuration of Equipment Under Test

#### 3.1 Descriptions of Test Mode

The transmitter has a maximum peak conducted output power as follows:

Channel	Frequency	Mode	Bluetooth RF Output Power
Ch00	2402MHz	GFSK	9.27
Ch19	2440MHz	GFSK	7.1
Ch39	2480MHz	GFSK	6.74

- a. Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

#### 3.2 Test Mode

##### 3.2.1 Antenna Port Conducted Measurement

Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth 4.2 – LE GFSK
Conducted Test Cases	Mode 1: CH00_2402 MHz
	Mode 2: CH19_2440 MHz
	Mode 3: CH39_2480 MHz

##### 3.2.2 Radiated Emission Test (Below 1GHz)

Radiated Test Cases	Bluetooth 4.2 – LE GFSK
	Mode 1: CH00_2402 MHz

Note : 1. Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type. Z orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Z orientation.

2. Following channel(s) was (were) selected for the final test as listed above

##### 3.2.3 Radiated Emission Test (Above 1GHz)

Radiated Test Cases	Bluetooth 4.2 – LE GFSK
	Mode 1: CH00_2402 MHz
	Mode 2: CH19_2440 MHz



	Mode 3: CH39_2480 MHz
--	-----------------------

Note : 1. The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that Z orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Z orientation.

2. Following channel(s) was (were) selected for the final test as listed above

3. For frequency above 18GHz, the measured value is much lower than the limit, therefore, it is not reflected in the report.

### 3.2.4 Power Line Conducted Emission Test:

<b>AC Conducted Emission</b>	Mode 1 : Bluetooth Linking + Switch On + Lighting
--------------------------------------	---

### 3.3 Support Equipment


Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	NETGARE	R7800	PY315100319	N/A	unshielded AC I/P cable1.2 m
2.	Notebook	Lenovo	E470C	FCC sDoC	N/A	shielded cable DC O/P 1.8 m unshielded AC I/P cable1.2 m
3.	Light	Globe	50198	FCC sDoC	N/A	N/A

### 3.4 Test Setup


The EUT is continuously communicating to the Bluetooth tester during the tests.

EUT was set in the Hidden menu mode to enable BT communications.


The following picture is a screenshot of the test software

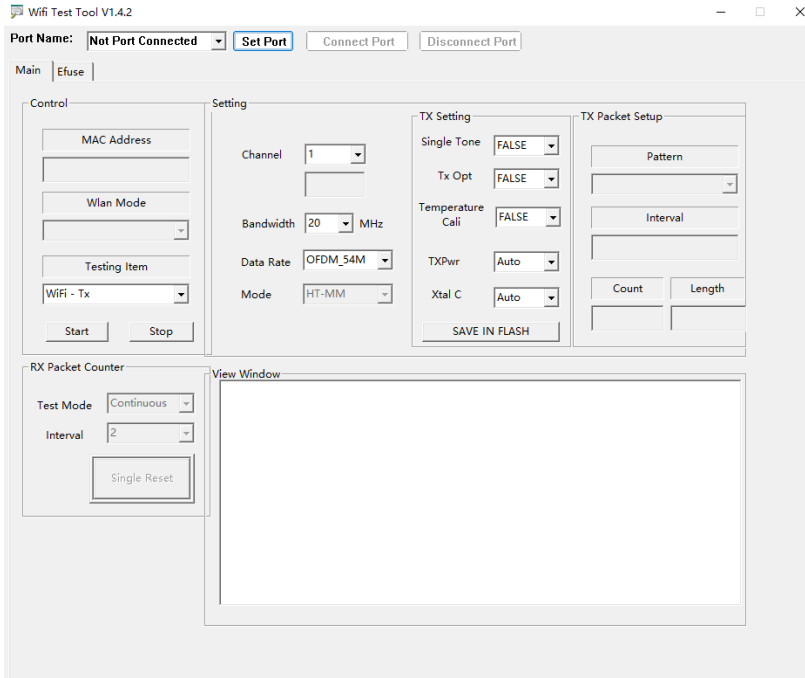


**Setup diagram for Conducted Test**

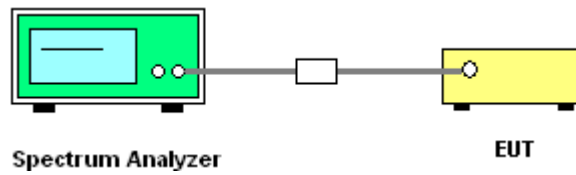


**Setup diagram for Radiation(9KHz~30MHz) Test**

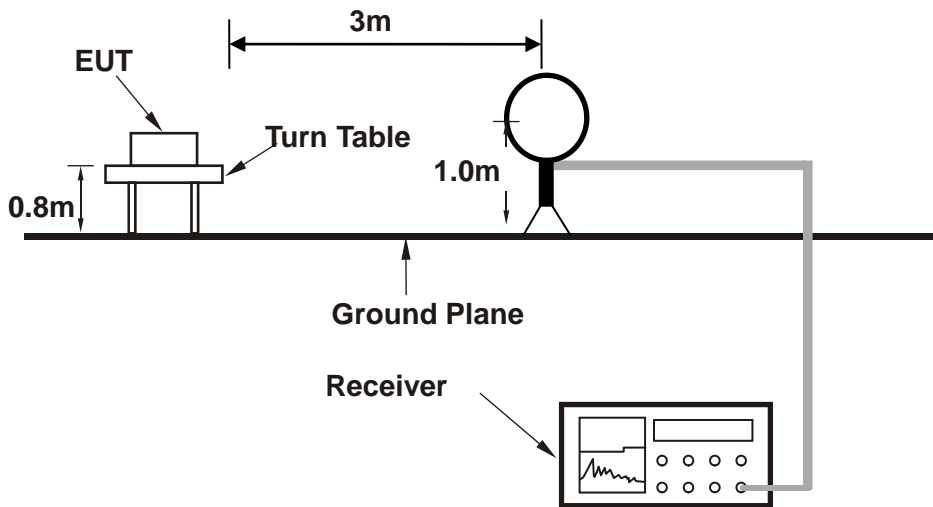


**Setup diagram for Radiation(Below 1G) Test**

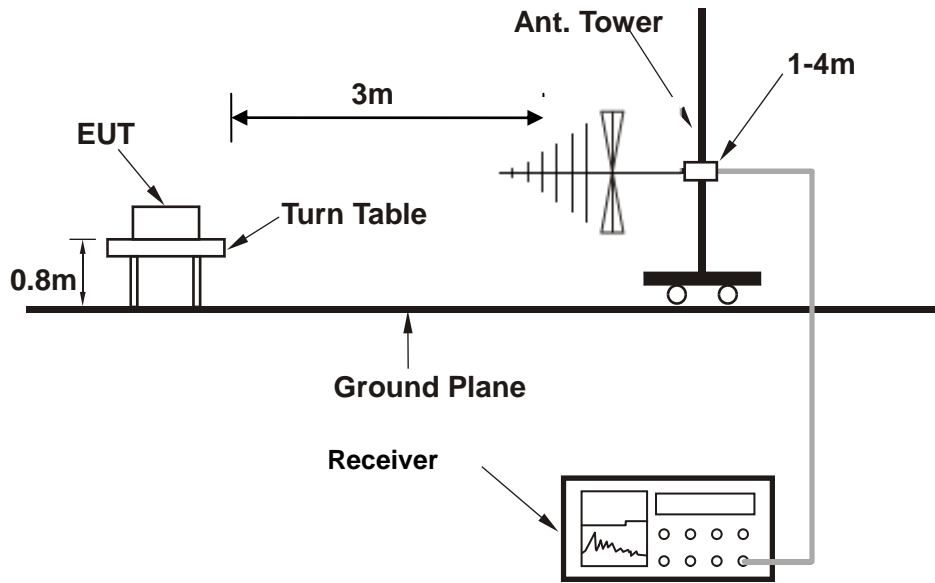

**Setup diagram for Radiation (Above 1G) Test**

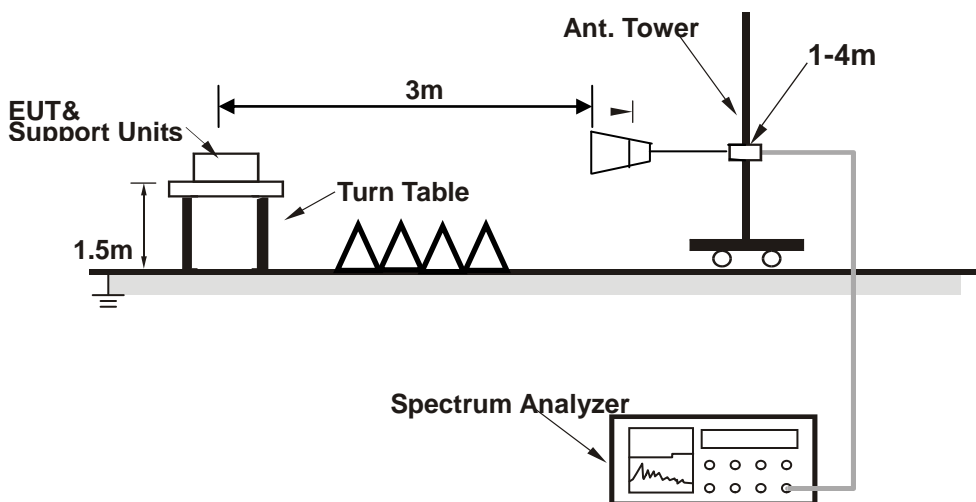

**Setup diagram for AC Conducted Emission Test**

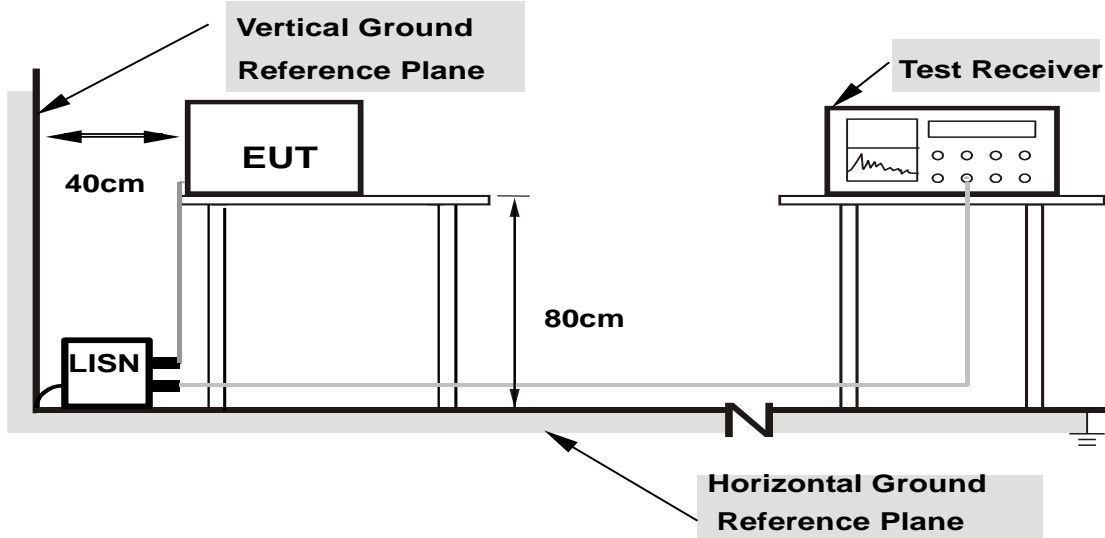

- Note:**
1. Support units were connected to second LISN.
  2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

### 3.5 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 5 dB and 10dB attenuator.

*Offset(dB) = RF cable loss(dB) + attenuator factor(dB).*

$$= 5 + 10 = 15 \text{ (dB)}$$

For all radiated test items:

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

Over Limit (dB  $\mu$  V/m) = Level(dB  $\mu$  V/m) - Limit Level (dB  $\mu$  V/m)

## 4. Test Result

### 4.1 6dB and 99% Bandwidth Measurement

#### 4.1.1 Limit of 6dB and 99% Bandwidth

FCC §15.247 (a) (2)

IC RSS-247 5.2(a)

The minimum 6 dB bandwidth shall be at least 500 kHz.

#### 4.1.2 Test Procedures

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument.
3. Set to the maximum power setting and enable the EUT transmit continuously
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 30kHz and set the Video bandwidth (VBW) = 100kHz.

#### 4.1.3 Test Result of 6dB Bandwidth

Refer to Appendix A of this test report.

#### 4.1.4 Test Result of 99% Bandwidth

Refer to Appendix B of this test report.

## 4.2 Peak Output Power Measurement

### 4.2.1 Limit of Peak Output Power

FCC §15.247 (b)(3)

For systems using digital modulation in the 2400-2483.5 MHz bands: 30dBm.

IC RSS-247 A5.4(d)

For DTSs employing digital modulation techniques operating in the bands 902-928MHz and 2400-2483.5MHz, the maximum peak conducted output power shall not exceed 1 W.

The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e)

### 4.2.2 Test Procedures

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to spectrum analyzer.
3. Set to the maximum power setting and enable the EUT transmit continuously
4. Set the  $RBW \geq DTS \text{ Bandwidth}$ ,  $VBW \geq 3 * RBW$ ,  $Span \geq 1.5 * DTS \text{ Bandwidth}$ ,  $Detector = Peak$ ,  $Sweep \text{ time} = auto \text{ couple}$ ,  $Trace \text{ mode} = max \text{ holde}$ .
5. Allow trace to fully stabilize, Use peak marker function to determine the peak amplitude level.
6. Measure the conducted output power

### 4.2.3 Test Result of Peak Output Power

Refer to Appendix C of this test report.

## 4.3 Power Spectral Density Measurement

### 4.3.1 Limits of Power Spectral Density

FCC§15.247(e)

IC RSS-247 5.2(b)

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

### 4.3.2 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument.
3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
4. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
5. Measure and record the results in the test report.
6. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

### 4.3.3 Test Result of Power Spectral Density

Refer to Appendix D of this test report.

## **4.4 Conducted Band Edges and Spurious Emission Measurement**

### **4.4.1 Limit of Conducted Band Edges and Spurious Emission**

FCC §15.247 (d)

IC RSS-247 5.5

Maximum conducted (average) output power was used to determine compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).

### **4.4.2 Test Procedures**

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument.
3. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
4. Measure and record the results in the test report.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

### **4.4.3 Test Result of Conducted Band Edges**

Refer to Appendix E of this test report.

### **4.4.4 Test Result of Conducted Spurious Emission**

Refer to Appendix F of this test report.



## 4.5 Radiated Band Edges and Spurious Emission Measurement

### 4.5.1 Limit of Radiated Band Edges and Spurious Emission

FCC §15.247 (d)

IC RSS-247 5.5

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.


Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

### 4.5.2 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The measurement distance is 3 meter.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz, RBW=1MHz for  $f > 1$ GHz ; VBW = RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
  - (3) For average measurement:  
 VBW = 10 Hz, when duty cycle is no less than 98 percent.  
 VBW  $\geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission

duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Bluetooth 4.2 - LE	100			10Hz

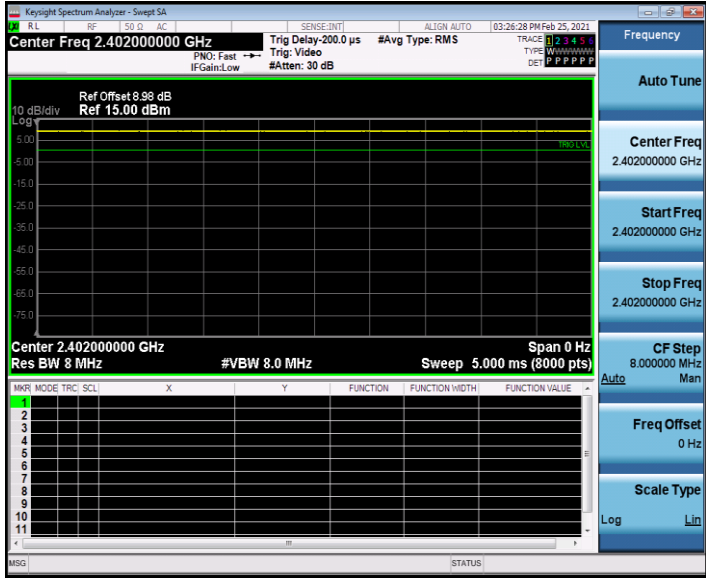

The screenshot shows the Keysight Spectrum Analyzer interface. The main display area shows a flat noise floor at a center frequency of 2.402000000 GHz. The resolution bandwidth (Res BW) is set to 8 MHz, and the video bandwidth (#VBW) is set to 8.0 MHz. The sweep rate is 5.000 ms (8000 pts). The reference level is 15.00 dBm, and the reference offset is 8.98 dB. The scale type is set to Log. The interface also shows various control buttons on the right side, such as Auto Tune, Center Freq, Start Freq, Stop Freq, CF Step, Freq Offset, and Scale Type.


#### 4.5.3 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

#### 4.5.4 Test Result of Radiated Spurious at Band Edges

<b>Test Mode :</b>	BLE CH00 (2402 MHz)	<b>Temperature :</b>	23~25°C
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	2.3GHz~2.405GHz	<b>Polarization :</b>	Horizontal


Test Site : 3m Chamber	Temp/Humi : 25°C/64%
Tested by : Jack	Pol/Phase : HORIZONTAL
Test Mode : Ble CH00(2402MHz)	Power rating: 125VAC

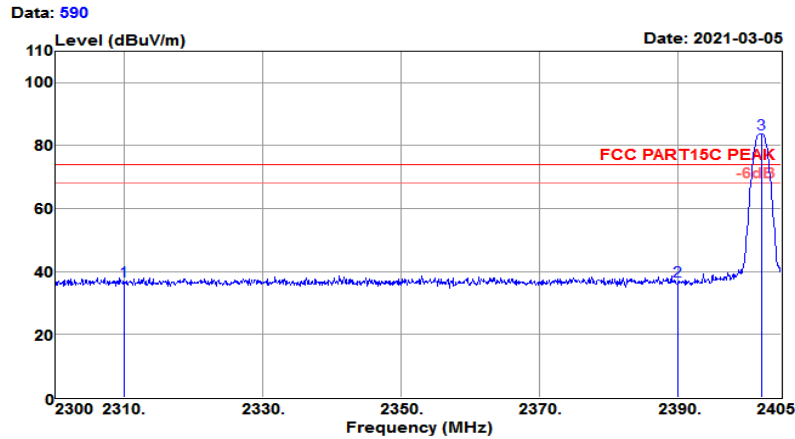

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	41.26	27.38	4.11	35.68	37.07	74.00	-36.93	Peak
2390.000	41.18	27.56	4.18	35.88	37.04	74.00	-36.96	Peak
2402.270	87.93	27.58	4.19	35.91	83.79	74.00	9.79	Peak

<b>Test Mode :</b>	BLE CH00 (2402 MHz)	<b>Temperature :</b>	23~25°C
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	2.3GHz~2.405GHz	<b>Polarization :</b>	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 25°C / 64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: Ble CH00(2402MHz)	Power rating:	: 125VAc

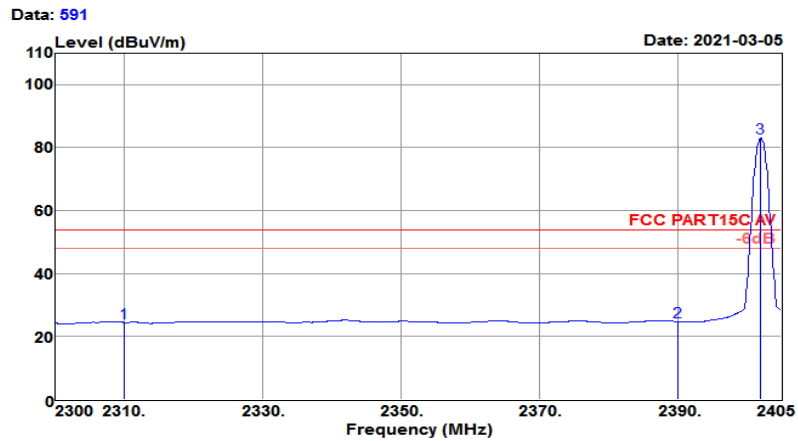

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	28.68	27.38	4.11	35.68	24.49	54.00	-29.51	Average
2390.000	28.94	27.56	4.18	35.88	24.80	54.00	-29.20	Average
2402.060	87.38	27.58	4.19	35.91	83.24	54.00	29.24	Average

<b>Test Mode :</b>	BLE CH00 (2402 MHz)	<b>Temperature :</b>	23~25°C
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	2.3GHz~2.405GHz	<b>Polarization :</b>	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 25°C / 64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: Ble CH00(2402MHz)	Power rating:	: 125VAc

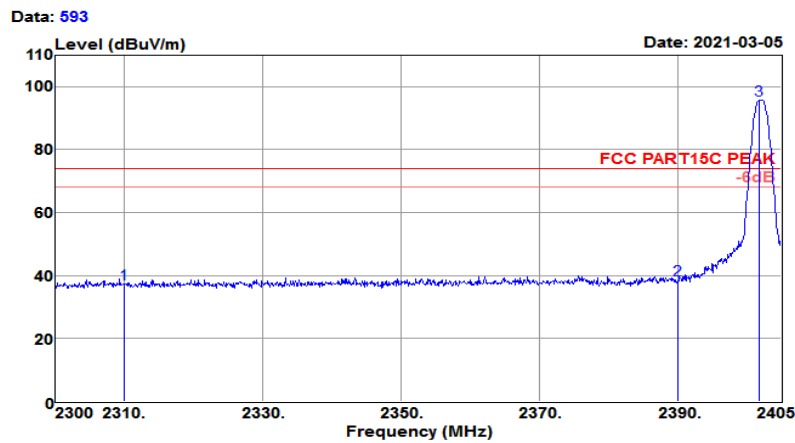

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	41.68	27.38	4.11	35.68	37.49	74.00	-36.51	Peak
2390.000	42.81	27.56	4.18	35.88	38.67	74.00	-35.33	Peak
2401.850	99.77	27.58	4.19	35.90	95.64	74.00	21.64	Peak

<b>Test Mode :</b>	BLE CH00 (2402 MHz)	<b>Temperature :</b>	23~25℃
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	2.3GHz~2.405GHz	<b>Polarization :</b>	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: Ble CH00(2402MHz)	Power rating:	: 125VAc

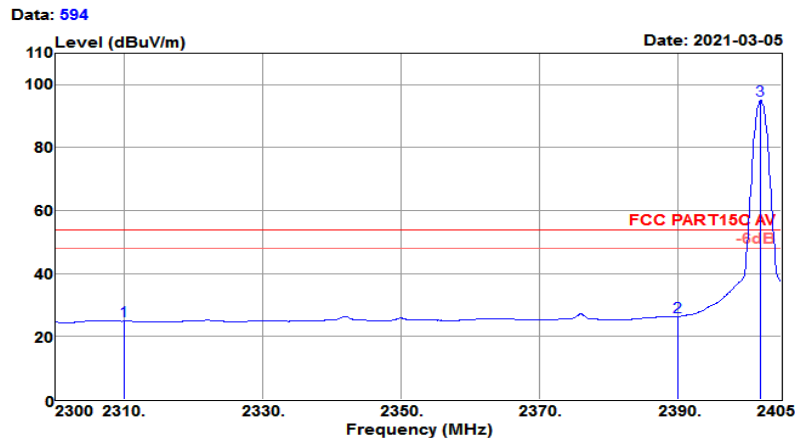

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	29.04	27.38	4.11	35.68	24.85	54.00	-29.15	Average
2390.000	30.57	27.56	4.18	35.88	26.43	54.00	-27.57	Average
2402.060	99.32	27.58	4.19	35.91	95.18	54.00	41.18	Average

<b>Test Mode :</b>	BLE CH39 (2480 MHz)	<b>Temperature :</b>	23~25°C
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	2.477GHz~2.51GHz	<b>Polarization :</b>	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 25°C / 64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: Ble CH39(2480MHz)	Power rating:	: 125VAc

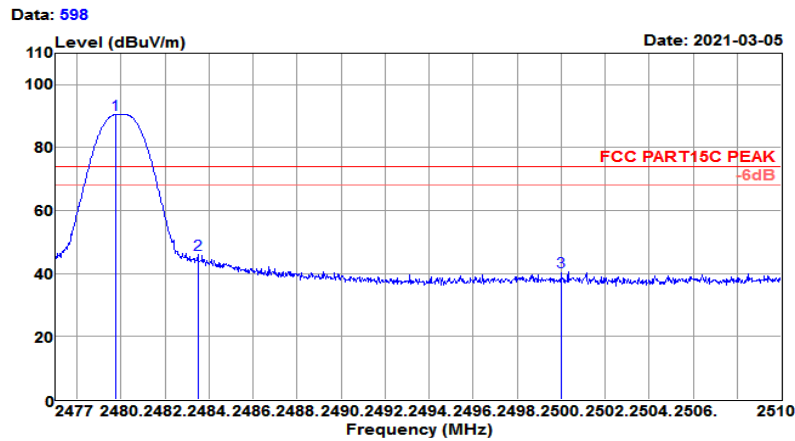

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2479.739	94.57	27.76	4.26	36.10	90.49	74.00	16.49	Peak
2483.500	50.14	27.76	4.26	36.11	46.05	74.00	-27.95	Peak
2500.000	44.51	27.80	4.28	36.15	40.44	74.00	-33.56	Peak

<b>Test Mode :</b>	BLE CH39 (2480 MHz)	<b>Temperature :</b>	23~25℃
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	2.477GHz~2.51GHz	<b>Polarization :</b>	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: Ble CH39(2480MHz)	Power rating:	: 125VAc

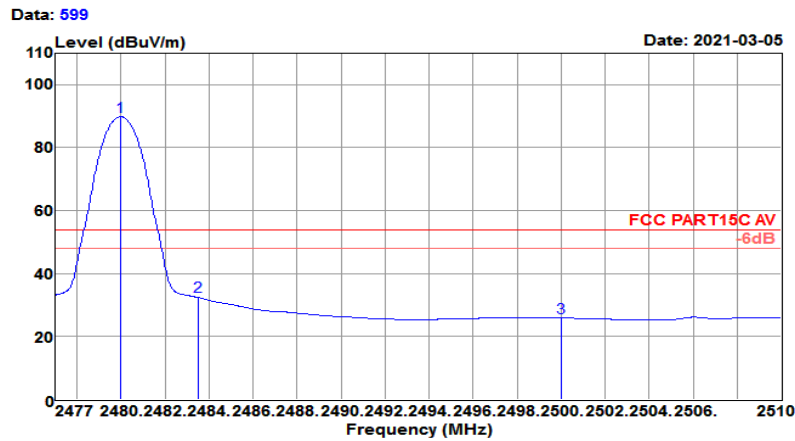


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2479.970	93.91	27.76	4.26	36.10	89.83	54.00	35.83	Average
2483.500	36.93	27.76	4.26	36.11	32.84	54.00	-21.16	Average
2500.000	29.95	27.80	4.28	36.15	25.88	54.00	-28.12	Average



<b>Test Mode :</b>	BLE CH39 (2480 MHz)	<b>Temperature :</b>	23~25°C
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	2.477GHz~2.51GHz	<b>Polarization :</b>	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 25°C / 64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: Ble CH39(2480MHz)	Power rating:	: 125VAc

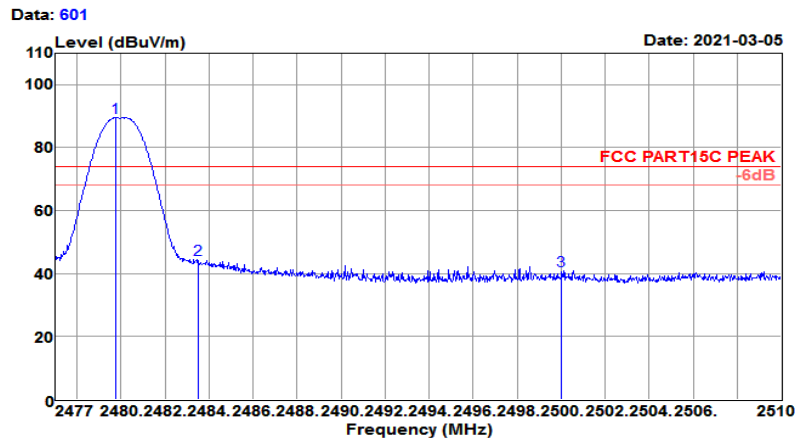

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2479.772	93.55	27.76	4.26	36.10	89.47	74.00	15.47	Peak
2483.500	48.60	27.76	4.26	36.11	44.51	74.00	-29.49	Peak
2500.000	44.85	27.80	4.28	36.15	40.78	74.00	-33.22	Peak

<b>Test Mode :</b>	BLE CH39 (2480 MHz)	<b>Temperature :</b>	23~25℃
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	2.477GHz~2.51GHz	<b>Polarization :</b>	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: Ble CH39(2480MHz)	Power rating:	: 125VAc

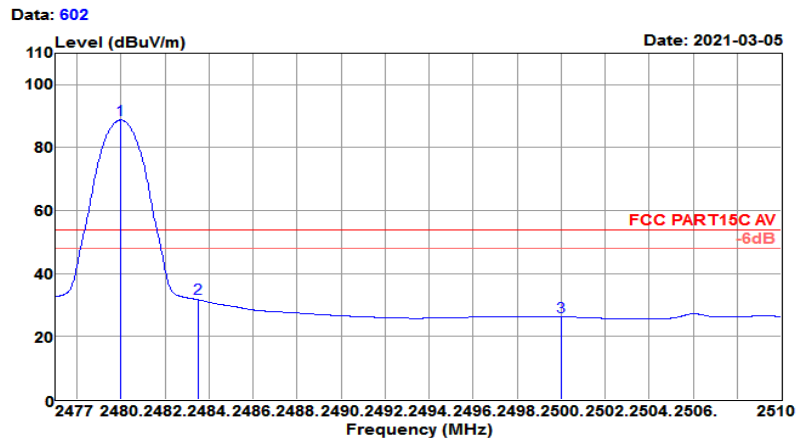


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2479.970	92.88	27.76	4.26	36.10	88.80	54.00	34.80	Average
2483.500	36.18	27.76	4.26	36.11	32.09	54.00	-21.91	Average
2500.000	30.36	27.80	4.28	36.15	26.29	54.00	-27.71	Average

#### 4.5.5 Test Result of Radiated Spurious Emission (1GHz ~ 10<sup>th</sup> Harmonic)

<b>Test Mode :</b>	BLE CH00 (2402 MHz)	<b>Temperature :</b>	23~25°C
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	1GHz~3GHz	<b>Polarization :</b>	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 25°C / 64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: Ble CH00(2402MHz)	Power rating:	: 125VAc

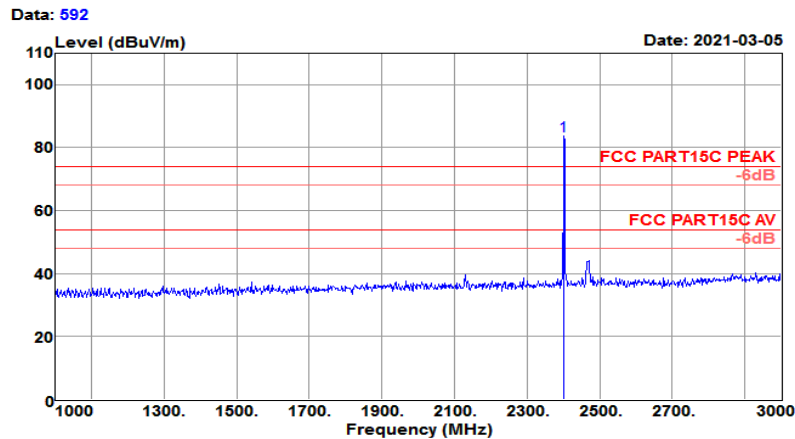

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2402.000	87.75	27.58	4.19	35.91	83.61	74.00	9.61	Peak

<b>Test Mode :</b>	BLE CH00 (2402 MHz)	<b>Temperature :</b>	23~25℃
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	3GHz~18GHz	<b>Polarization :</b>	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 25℃ / 64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: Ble CH00(2402MHz)	Power rating	: 125VAc

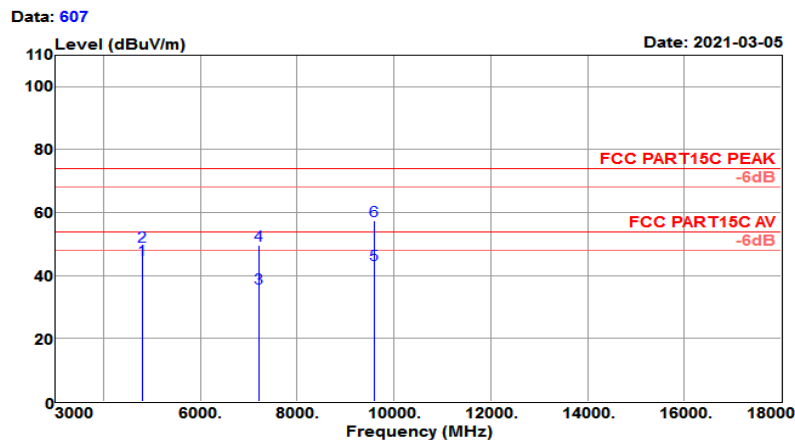


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4804.000	42.26	30.93	6.09	34.12	45.16	54.00	-8.84	Average
4804.000	46.44	30.93	6.09	34.12	49.34	74.00	-24.66	Peak
7206.000	25.69	35.39	9.22	34.39	35.91	54.00	-18.09	Average
7206.000	39.34	35.39	9.22	34.39	49.56	74.00	-24.44	Peak
9608.000	27.13	38.39	12.26	34.14	43.64	54.00	-10.36	Average
9608.000	40.90	38.39	12.26	34.14	57.41	74.00	-16.59	Peak

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

<b>Test Mode :</b>	BLE CH00 (2402 MHz)	<b>Temperature :</b>	23~25°C
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	1GHz~3GHz	<b>Polarization :</b>	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 25°C / 64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: Ble CH00(2402MHz)	Power rating:	: 125VAc

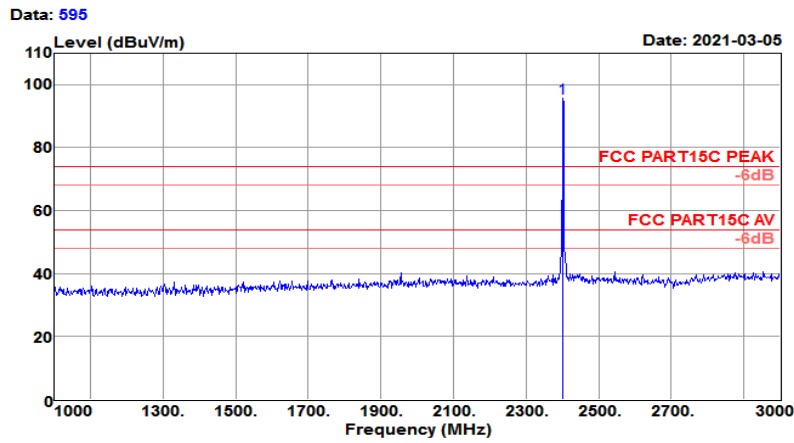

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2402.000	99.73	27.58	4.19	35.91	95.59	74.00	21.59	Peak

<b>Test Mode :</b>	BLE CH00 (2402 MHz)	<b>Temperature :</b>	23~25℃
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	3GHz~18GHz	<b>Polarization :</b>	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 25℃ / 64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: Ble CH00(2402MHz)	Power rating:	: 125VAc

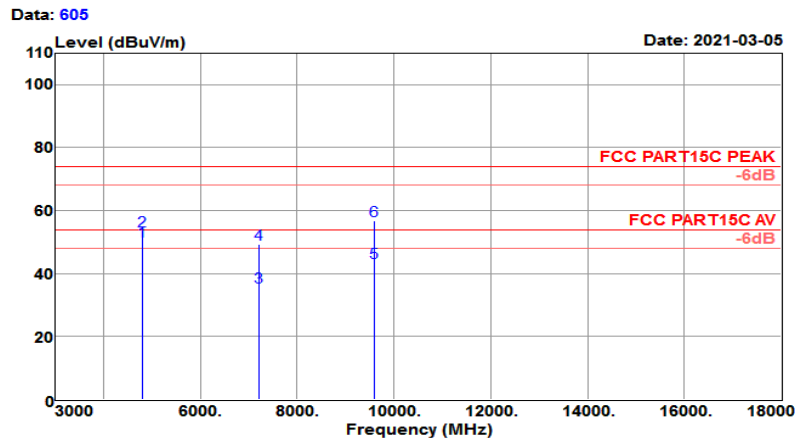

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4804.000	47.44	30.93	6.09	34.12	50.34	54.00	-3.66	Average
4804.000	50.81	30.93	6.09	34.12	53.71	74.00	-20.29	Peak
7206.000	25.45	35.39	9.22	34.39	35.67	54.00	-18.33	Average
7206.000	38.97	35.39	9.22	34.39	49.19	74.00	-24.81	Peak
9608.000	27.02	38.39	12.26	34.14	43.53	54.00	-10.47	Average
9608.000	40.14	38.39	12.26	34.14	56.65	74.00	-17.35	Peak

<b>Test Mode :</b>	BLE CH19 (2440 MHz)	<b>Temperature :</b>	23~25°C
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	1GHz~3GHz	<b>Polarization :</b>	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 25°C / 64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: Ble CH19(2440MHz)	Power rating:	: 125VAc

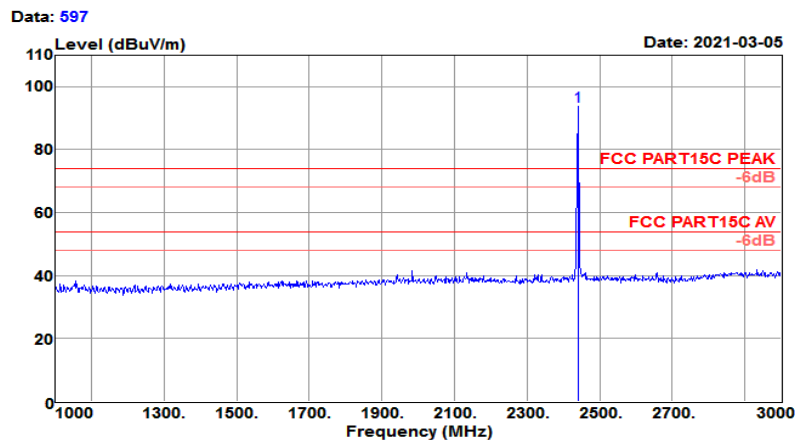

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2440.000	98.03	27.67	4.22	36.00	93.92	74.00	19.92	Peak

<b>Test Mode :</b>	BLE CH19 (2440 MHz)	<b>Temperature :</b>	23~25°C
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	3GHz~18GHz	<b>Polarization :</b>	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 25°C / 64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: Ble CH19(2440MHz)	Power rating:	: 125VAc

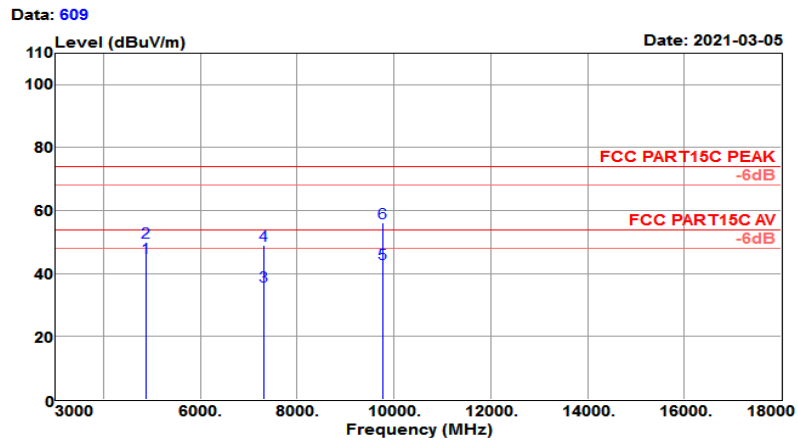


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4880.000	41.96	31.03	6.08	34.03	45.04	54.00	-8.96	Average
4880.000	47.02	31.03	6.08	34.03	50.10	74.00	-23.90	Peak
7320.000	25.51	35.67	9.20	34.49	35.89	54.00	-18.11	Average
7320.000	38.57	35.67	9.20	34.49	48.95	74.00	-25.05	Peak
9760.000	26.49	38.51	12.50	34.20	43.30	54.00	-10.70	Average
9760.000	39.35	38.51	12.50	34.20	56.16	74.00	-17.84	Peak

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.



<b>Test Mode :</b>	BLE CH19 (2440 MHz)	<b>Temperature :</b>	23~25℃
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	1GHz~3GHz	<b>Polarization :</b>	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: Ble CH19(2440MHz)	Power rating:	: 125VAc

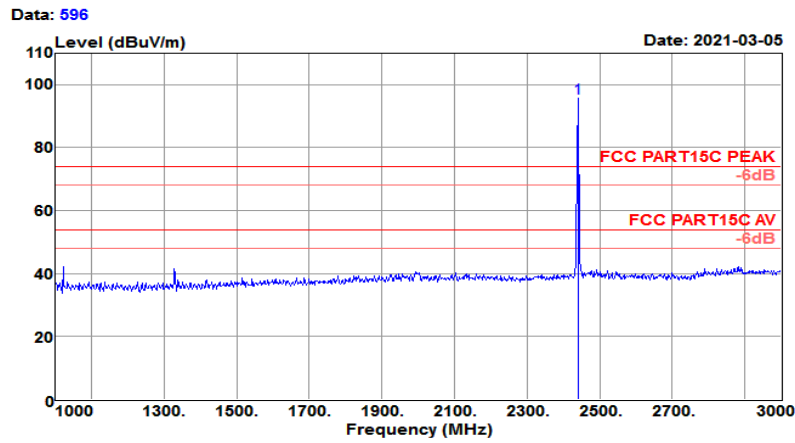

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2440.000	99.93	27.67	4.22	36.00	95.82	74.00	21.82	Peak

<b>Test Mode :</b>	BLE CH19 (2440 MHz)	<b>Temperature :</b>	23~25°C
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	3GHz~18GHz	<b>Polarization :</b>	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 25°C / 64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: Ble CH19(2440MHz)	Power rating:	: 125VAc

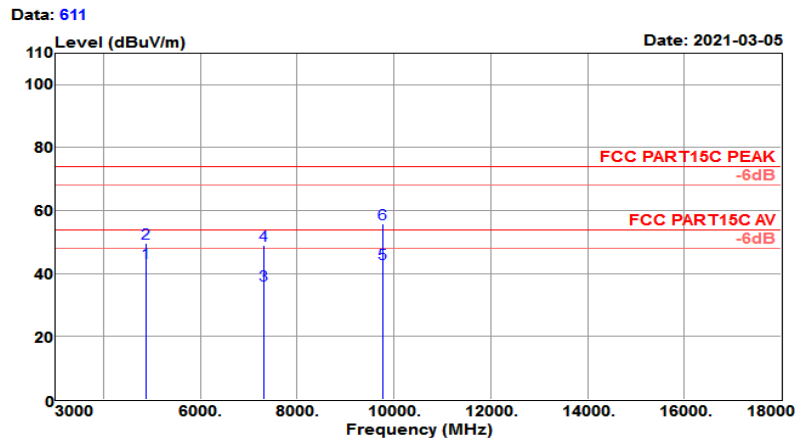


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4880.000	40.28	31.03	6.08	34.03	43.36	54.00	-10.64	Average
4880.000	46.45	31.03	6.08	34.03	49.53	74.00	-24.47	Peak
7320.000	25.83	35.67	9.20	34.49	36.21	54.00	-17.79	Average
7320.000	38.79	35.67	9.20	34.49	49.17	74.00	-24.83	Peak
9760.000	26.33	38.51	12.50	34.20	43.14	54.00	-10.86	Average
9760.000	39.12	38.51	12.50	34.20	55.93	74.00	-18.07	Peak

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

<b>Test Mode :</b>	BLE CH39 (2480 MHz)	<b>Temperature :</b>	23~25℃
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	1GHz~3GHz	<b>Polarization :</b>	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: Ble CH39(2480MHz)	Power rating:	: 125VAc

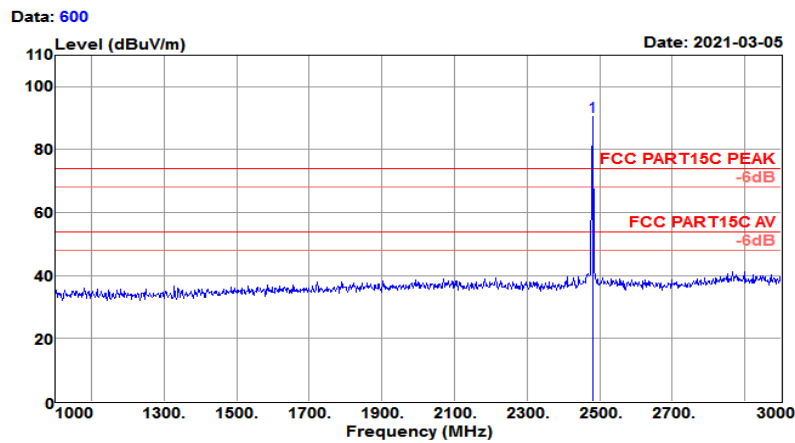

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2480.000	94.53	27.76	4.26	36.10	90.45	74.00	16.45	Peak

<b>Test Mode :</b>	BLE CH39 (2480 MHz)	<b>Temperature :</b>	23~25°C
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	3GHz~18GHz	<b>Polarization :</b>	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 25°C / 64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: Ble CH39(2480MHz)	Power rating:	: 125Wac

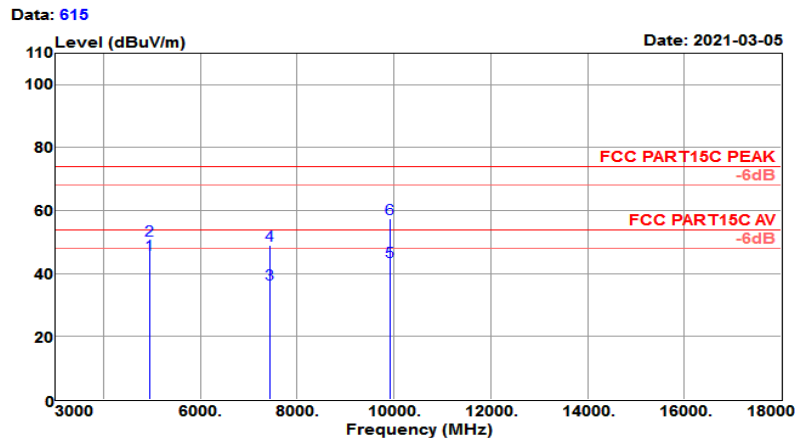


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4960.000	42.85	31.14	6.07	33.94	46.12	54.00	-7.88	Average
4960.000	47.36	31.14	6.07	33.94	50.63	74.00	-23.37	Peak
7440.000	26.24	35.96	9.04	34.60	36.64	54.00	-17.36	Average
7440.000	38.63	35.96	9.04	34.60	49.03	74.00	-24.97	Peak
9920.000	26.13	38.64	13.24	34.27	43.74	54.00	-10.26	Average
9920.000	39.73	38.64	13.24	34.27	57.34	74.00	-16.66	Peak

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

<b>Test Mode :</b>	BLE CH39 (2480 MHz)	<b>Temperature :</b>	23~25°C
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	1GHz~3GHz	<b>Polarization :</b>	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 25°C / 64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: Ble CH39(2480MHz)	Power rating:	: 125VAc

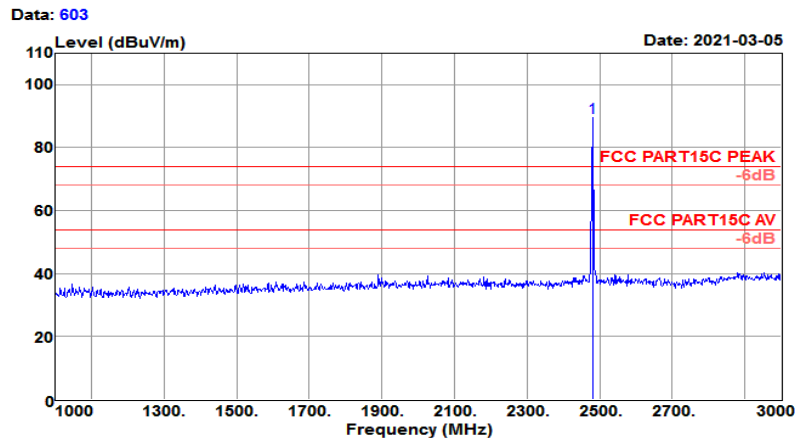

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2480.000	93.51	27.76	4.26	36.10	89.43	74.00	15.43	Peak

<b>Test Mode :</b>	BLE CH39 (2480 MHz)	<b>Temperature :</b>	23~25°C
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	3GHz~18GHz	<b>Polarization :</b>	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 25°C / 64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: Ble CH39(2480MHz)	Power rating:	: 125VAc

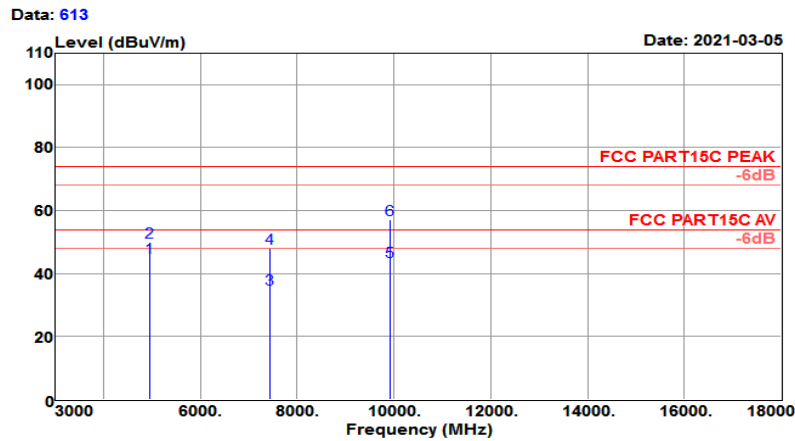


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4960.000	41.93	31.14	6.07	33.94	45.20	54.00	-8.80	Average
4960.000	46.62	31.14	6.07	33.94	49.89	74.00	-24.11	Peak
7440.000	24.58	35.96	9.04	34.60	34.98	54.00	-19.02	Average
7440.000	37.58	35.96	9.04	34.60	47.98	74.00	-26.02	Peak
9920.000	26.22	38.64	13.24	34.27	43.83	54.00	-10.17	Average
9920.000	39.53	38.64	13.24	34.27	57.14	74.00	-16.86	Peak

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

#### 4.5.6 Test Result of Radiated Spurious Emission (30MHz ~ 1GHz)

<b>Test Mode :</b>	BLE CH00 (2402 MHz)	<b>Temperature :</b>	23~25°C
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	30MHz~1GHz	<b>Polarization :</b>	Horizontal


Test Site : 3m Chamber	Temp/Humi : 25°C/64%
Tested by : Jack	Pol/Phase : HORIZONTAL
Test Mode : Ble CH00(2402MHz)	Power rating: 125VAC

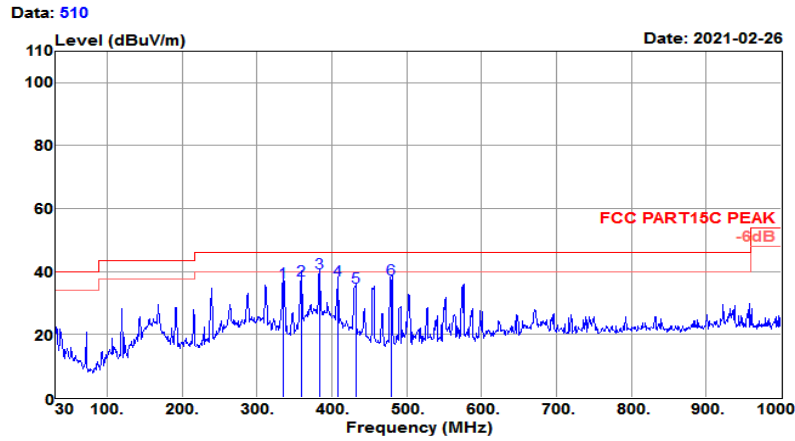

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
335.550	52.21	13.78	3.19	32.51	36.67	46.00	-9.33	QP
359.800	52.21	14.24	3.34	32.53	37.26	46.00	-8.74	QP
384.050	53.82	14.73	3.49	32.54	39.50	46.00	-6.50	QP
408.300	51.20	15.17	3.58	32.56	37.39	46.00	-8.61	QP
431.580	48.25	15.78	3.68	32.58	35.13	46.00	-10.87	QP
479.110	50.26	16.48	3.61	32.61	37.74	46.00	-8.26	QP

<b>Test Mode :</b>	BLE CH00 (2402 MHz)	<b>Temperature :</b>	23~25℃
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	30MHz~1GHz	<b>Polarization :</b>	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 25℃ / 64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: Ble CH00(2402MHz)	Power rating	: 125VAc

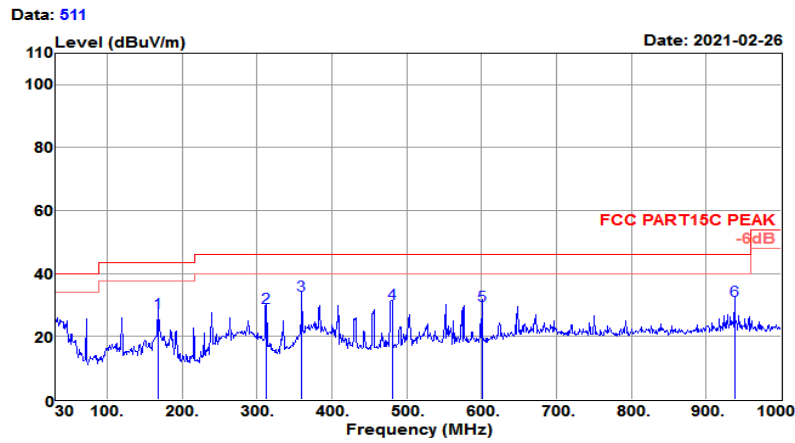

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
167.740	44.52	13.45	2.22	32.48	27.71	43.50	-15.79	QP
312.270	45.23	13.30	3.10	32.50	29.13	46.00	-16.87	QP
359.800	48.18	14.24	3.34	32.53	33.23	46.00	-12.77	QP
480.080	43.01	16.49	3.63	32.61	30.52	46.00	-15.48	QP
600.360	39.41	18.78	4.47	32.69	29.97	46.00	-16.03	QP
937.920	35.52	22.41	5.76	32.15	31.54	46.00	-14.46	QP



## 4.6 AC Conducted Emission Measurement

### 4.6.1 Limit of AC Conducted Emission

FCC §15.207

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50


\*Decreases with the logarithm of the frequency.

### 4.6.2 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 4.6.3 Test Result of AC Conducted Emission


Test Mode :	Mode 1	Temperature :	24°C
Test Engineer :	Jack Liu	Relative Humidity :	52%
Test Voltage :	125Vac / 60Hz	Phase :	Line
Function Type :	Bluetooth Linking + Switch On + Lighting		

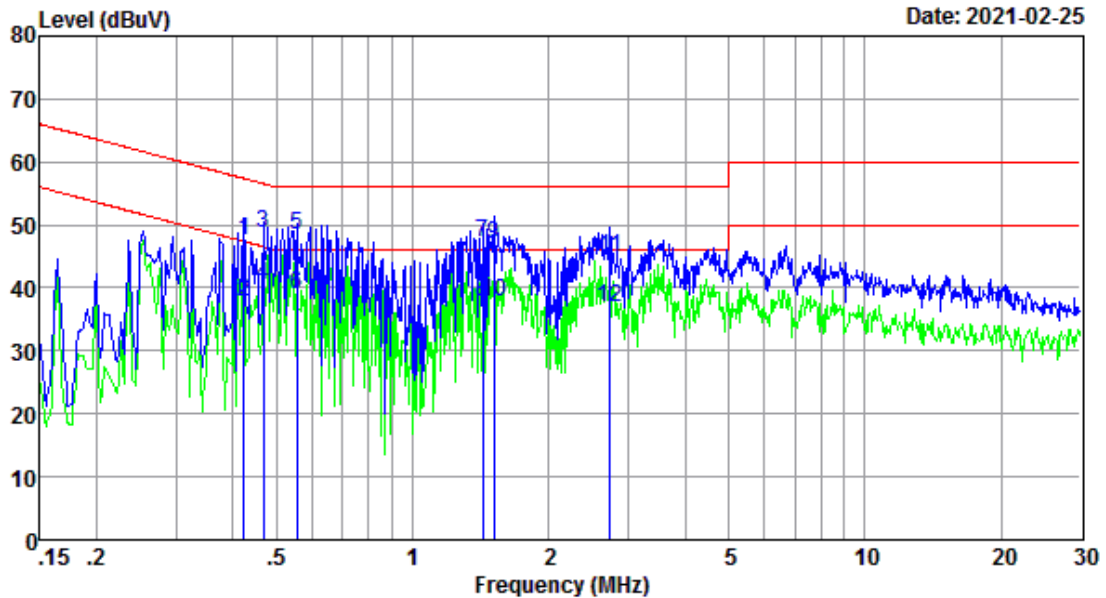

Freq MHz	Reading level dBuV	LISN/ISN factor dB	Cable loss dB	Result level dBuV	Limit level dBuV	Over limit dB	Remark
0.424	38.00	9.57	0.02	47.59	57.37	-9.78	QP
0.424	28.20	9.57	0.02	37.79	47.37	-9.58	Average
0.469	39.10	9.58	0.02	48.70	56.54	-7.84	QP
0.469	30.90	9.58	0.02	40.50	46.54	-6.04	Average
0.555	38.90	9.58	0.02	48.50	56.00	-7.50	QP
0.555	29.50	9.58	0.02	39.10	46.00	-6.90	Average
1.426	37.49	9.59	0.02	47.10	56.00	-8.90	QP
1.426	28.19	9.59	0.02	37.80	46.00	-8.20	Average
1.511	37.20	9.59	0.02	46.81	56.00	-9.19	QP
1.511	28.30	9.59	0.02	37.91	46.00	-8.09	Average
2.736	35.30	9.60	0.03	44.93	56.00	-11.07	QP
2.736	27.30	9.60	0.03	36.93	46.00	-9.07	Average

Result Level= Reading Level + LISN Factor + Cable Loss

<b>Test Mode :</b>	Mode 1	<b>Temperature :</b>	24°C
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	52%
<b>Test Voltage :</b>	125Vac / 60Hz	<b>Phase :</b>	NEUTRAL
<b>Function Type :</b>	Bluetooth Linking + Switch On + Lighting		

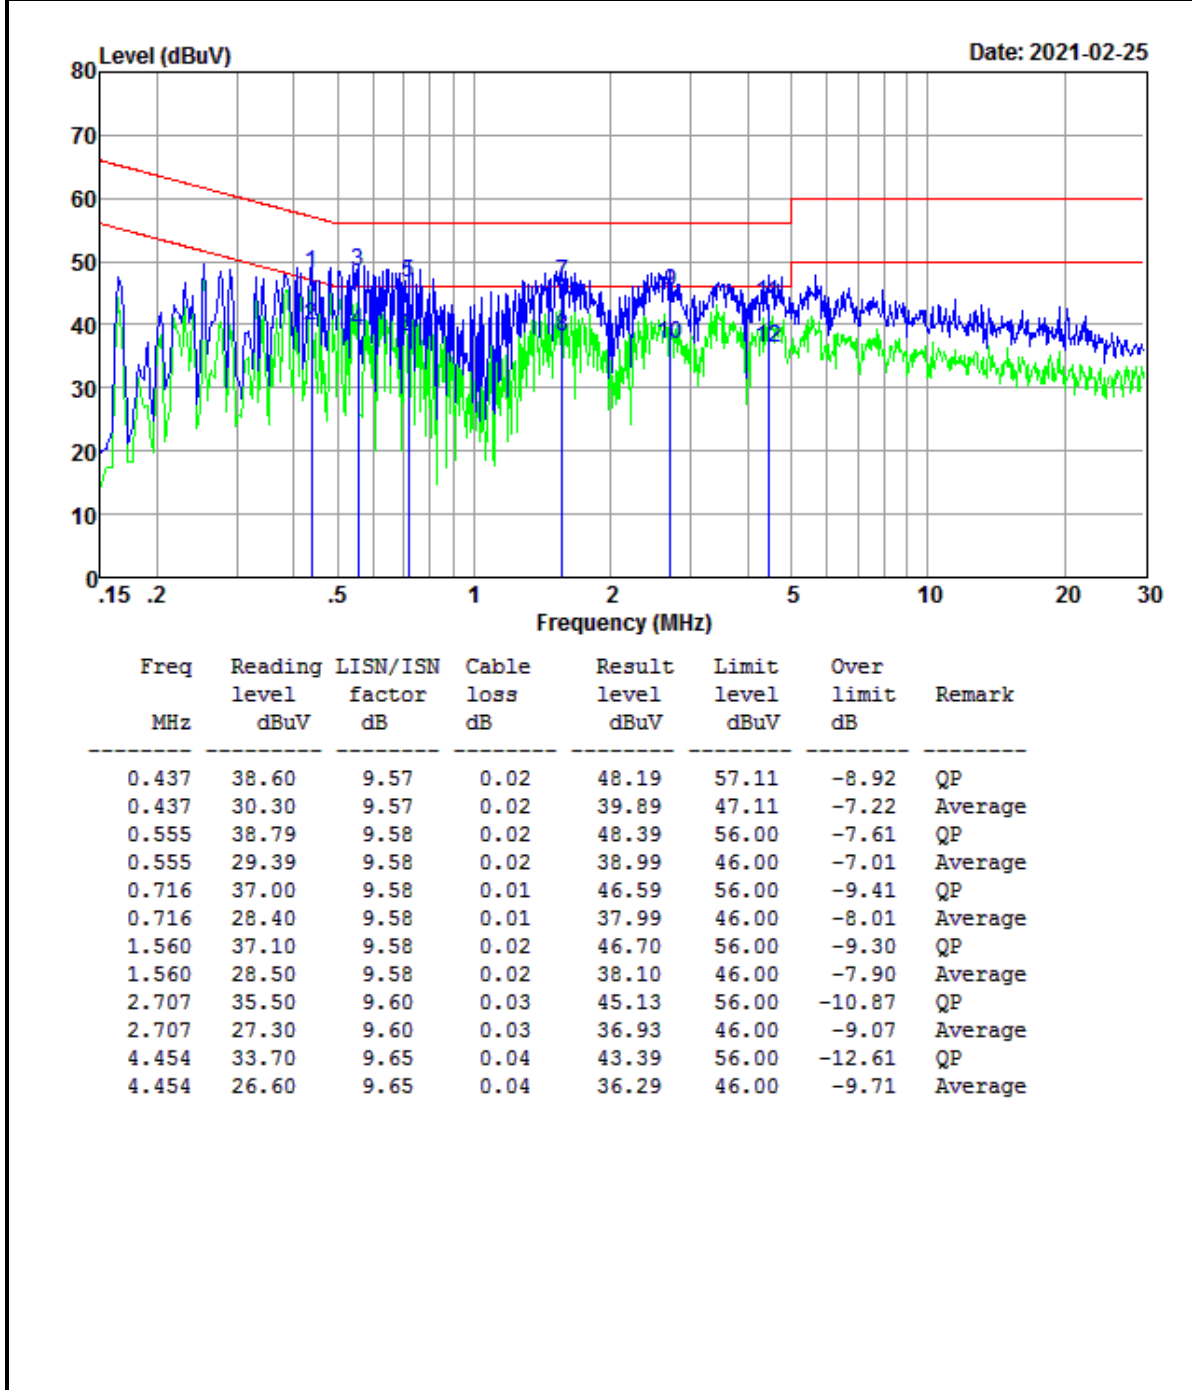

Result Level= Reading Level + LISN Factor + Cable Loss

## **4.7 Antenna Requirements**

### **4.7.1 Standard Applicable**

According to antenna requirement of §15.203.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be re-placed by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded..

And according to §15.247(4)(1), system operating in the 2400-2483.5MHz bands that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

### **4.7.2 Antenna Connected Construction**

An PCB antenna design is used.

### **4.7.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

## 5. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Due Date	Remark
Spectrum Analyzer	Keysight	N9010A	MY56070788	2021-01-05	2022-01-04	Conducted
Power Sensor	Keysight	U2021XA	MY56510025	2021-01-05	2022-01-04	Conducted
Power Sensor	Keysight	U2021XA	MY57030005	2021-01-05	2022-01-04	Conducted
Power Sensor	Keysight	U2021XA	MY56510018	2021-01-05	2022-01-04	Conducted
Power Sensor	Keysight	U2021XA	MY56480002	2021-01-05	2022-01-04	Conducted
Thermal Chamber	Howkin	UHL-34	19111801	2020-05-09	2021-05-08	Conducted
Base Station	R&S	CMW 270	101231	2021-01-05	2022-01-04	Conducted
Signal Generator (Interferer)	Keysight	N5182B	MY56200384	2021-01-05	2022-01-04	Conducted
Signal Generator (Blocker)	Keysight	N5171B	MY56200661	2021-01-05	2022-01-04	Conducted

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV 40	101433	2021-01-05	2022-01-04	Radiation
Amplifier	Sonoma	310	363917	2021-01-06	2022-01-05	Radiation
Amplifier	Schwarzbeck	BBV 9718	327	2021-01-06	2022-01-05	Radiation
Amplifier	Narda	TTA1840-35-HG	2034380	2020-05-14	2021-05-15	Radiation
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-051	2020-02-14	2023-02-13	Radiation
Broadband Antenna	Schwarzbeck	VULB 9168	9168-757	2020-09-27	2023-09-26	Radiation
Horn Antenna	Schwarzbeck	BBHA 9120 D	1677	2020-02-14	2023-02-13	Radiation
Horn Antenna	COM-POWER	AH-1840	101117	2018-06-20	2021-06-19	Radiation
Test Software	Audix	E3	6.111221a	N/A	N/A	Radiation
Filter	Micro-Tronics	BRM 50702	G266	N/A	N/A	Radiation

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Due Date	Remark
LISN	R&S	ENV216	102125	2021-01-05	2022-01-04	Conducted
LISN	R&S	ENV432	101327	2021-01-06	2022-01-05	Conducted
EMI Test Receiver	R&S	ESR3	102143	2021-01-06	2022-01-05	Conducted
EMI Test Software	Audix	E3	N/A	N/A	N/A	Conducted

N/A: No Calibration Required

## 6. Uncertainty of Evaluation

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.42dB
Radiated emission	30MHz ~ 1GMHz	2.50dB
	1GHz ~ 18GHz	3.51dB
	18GHz ~ 40GHz	3.96dB

MEASUREMENT	UNCERTAINTY
Occupied Channel Bandwidth	±196.4Hz
RF output power, conducted	±2.31dB
Power density, conducted	±2.31dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

## Appendix A: DTS Bandwidth


### Test Result

TestMode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_BT4.2	Ant1	2402	0.672	2401.652	2402.324	0.5	PASS
		2440	0.676	2439.652	2440.328	0.5	PASS
		2480	0.692	2479.656	2480.348	0.5	PASS



### Test Graphs



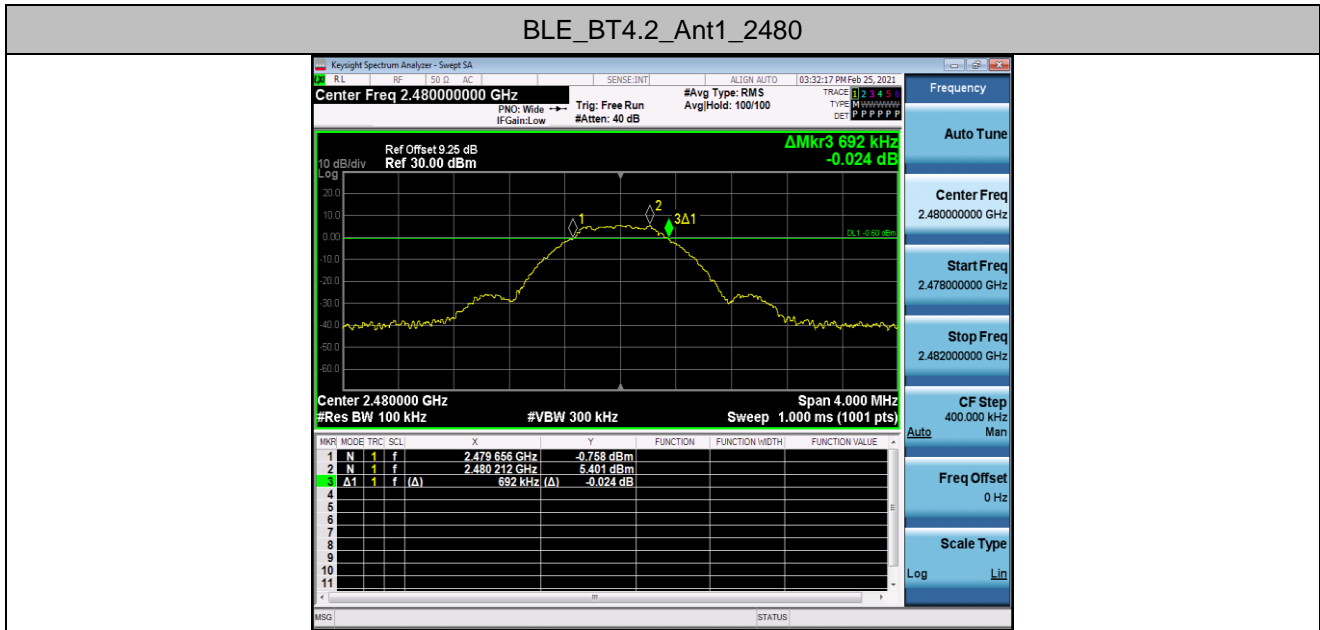


## Appendix B: Occupied Channel Bandwidth

### Test Result

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_BT4.2	Ant1	2402	1.0338	2401.480	2402.514	---	PASS
		2440	1.0348	2439.479	2440.514	---	PASS
		2480	1.0328	2479.480	2480.512	---	PASS

## Test Graphs



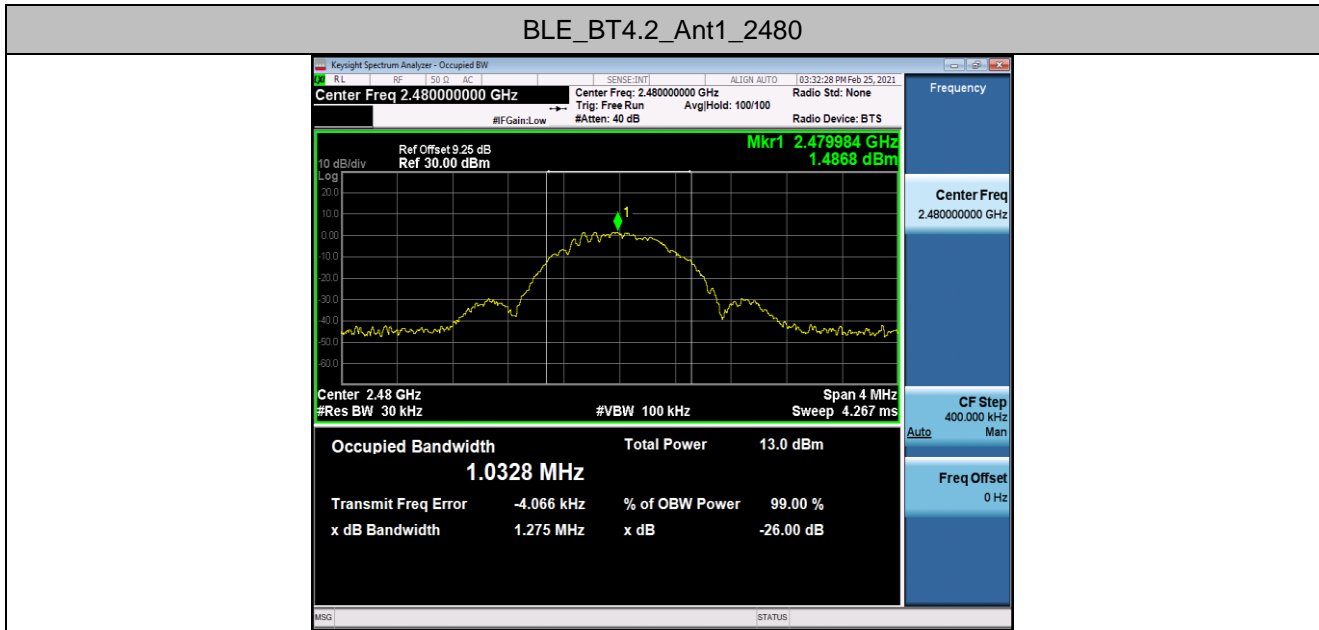


## Appendix C: Maximum conducted output power

### Test Result

TestMode	Antenna	Channel	Result[dBm]	EIRP[dBm]	Limit[dBm]	Verdict
BLE_BT4.2	Ant1	2402	9.27	8.27	<=30	PASS
		2440	7.1	6.1	<=30	PASS
		2480	6.74	5.74	<=30	PASS

### Test Graphs

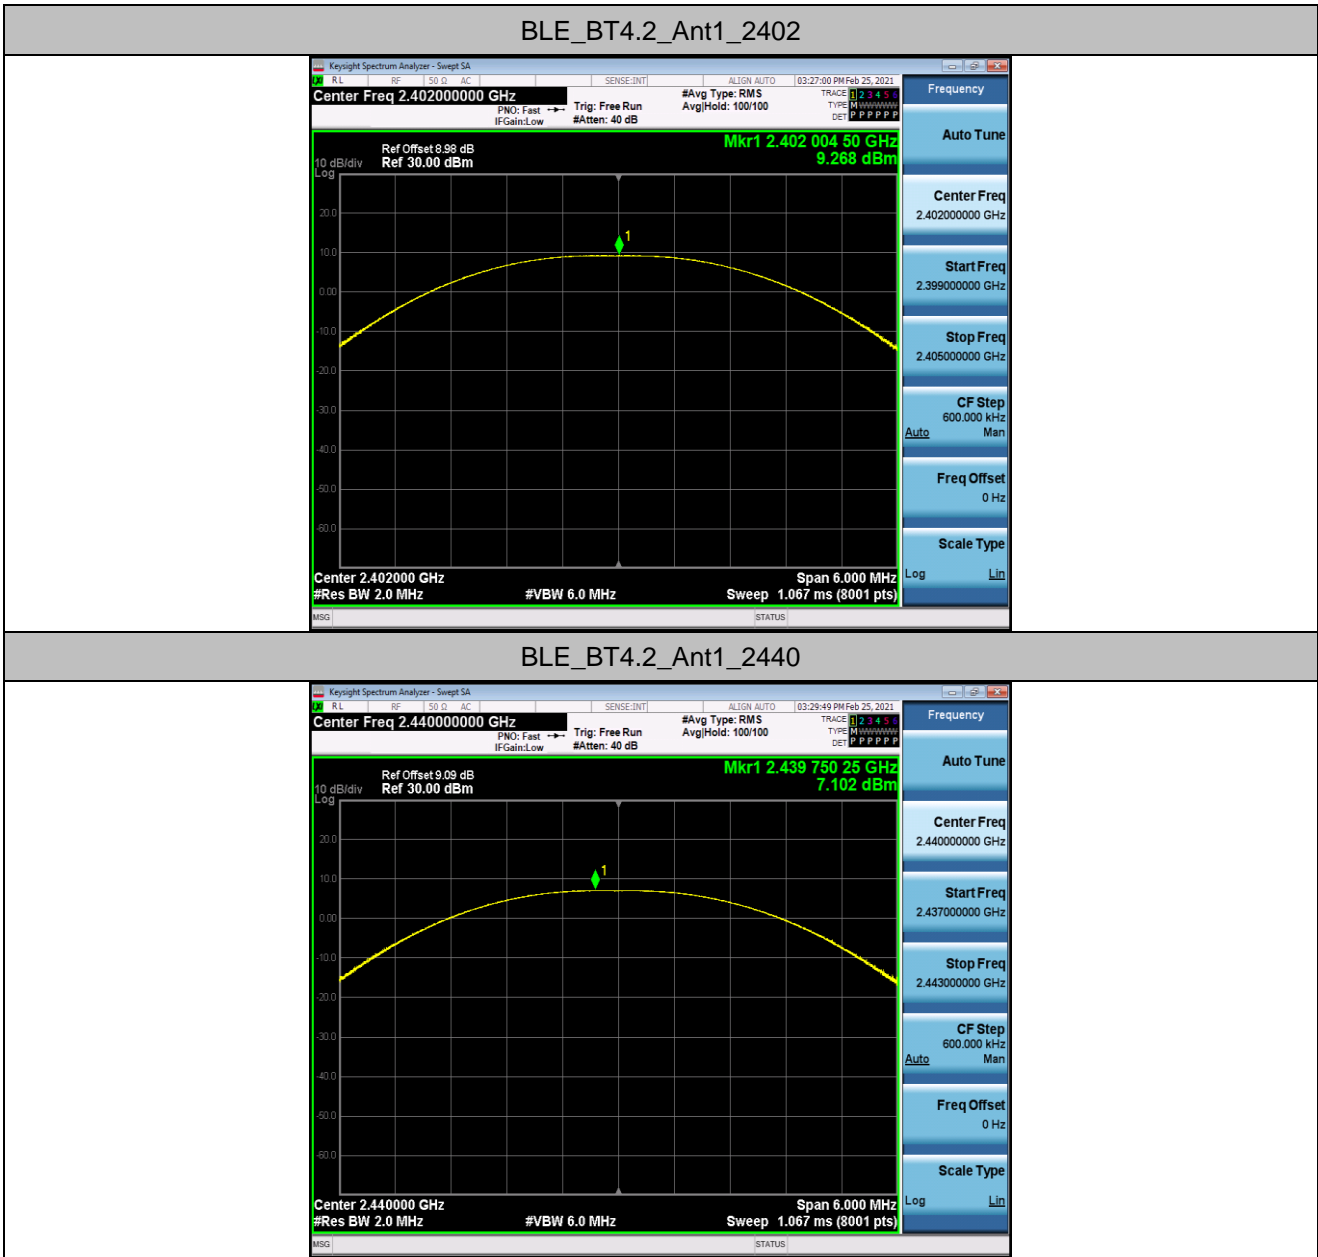







## Appendix D: Maximum power spectral density

### Test Result

TestMode	Antenna	Channel	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
BLE_BT4.2	Ant1	2402	-6.25	<=8	PASS
		2440	-8.39	<=8	PASS
		2480	-8.78	<=8	PASS

### Test Graphs

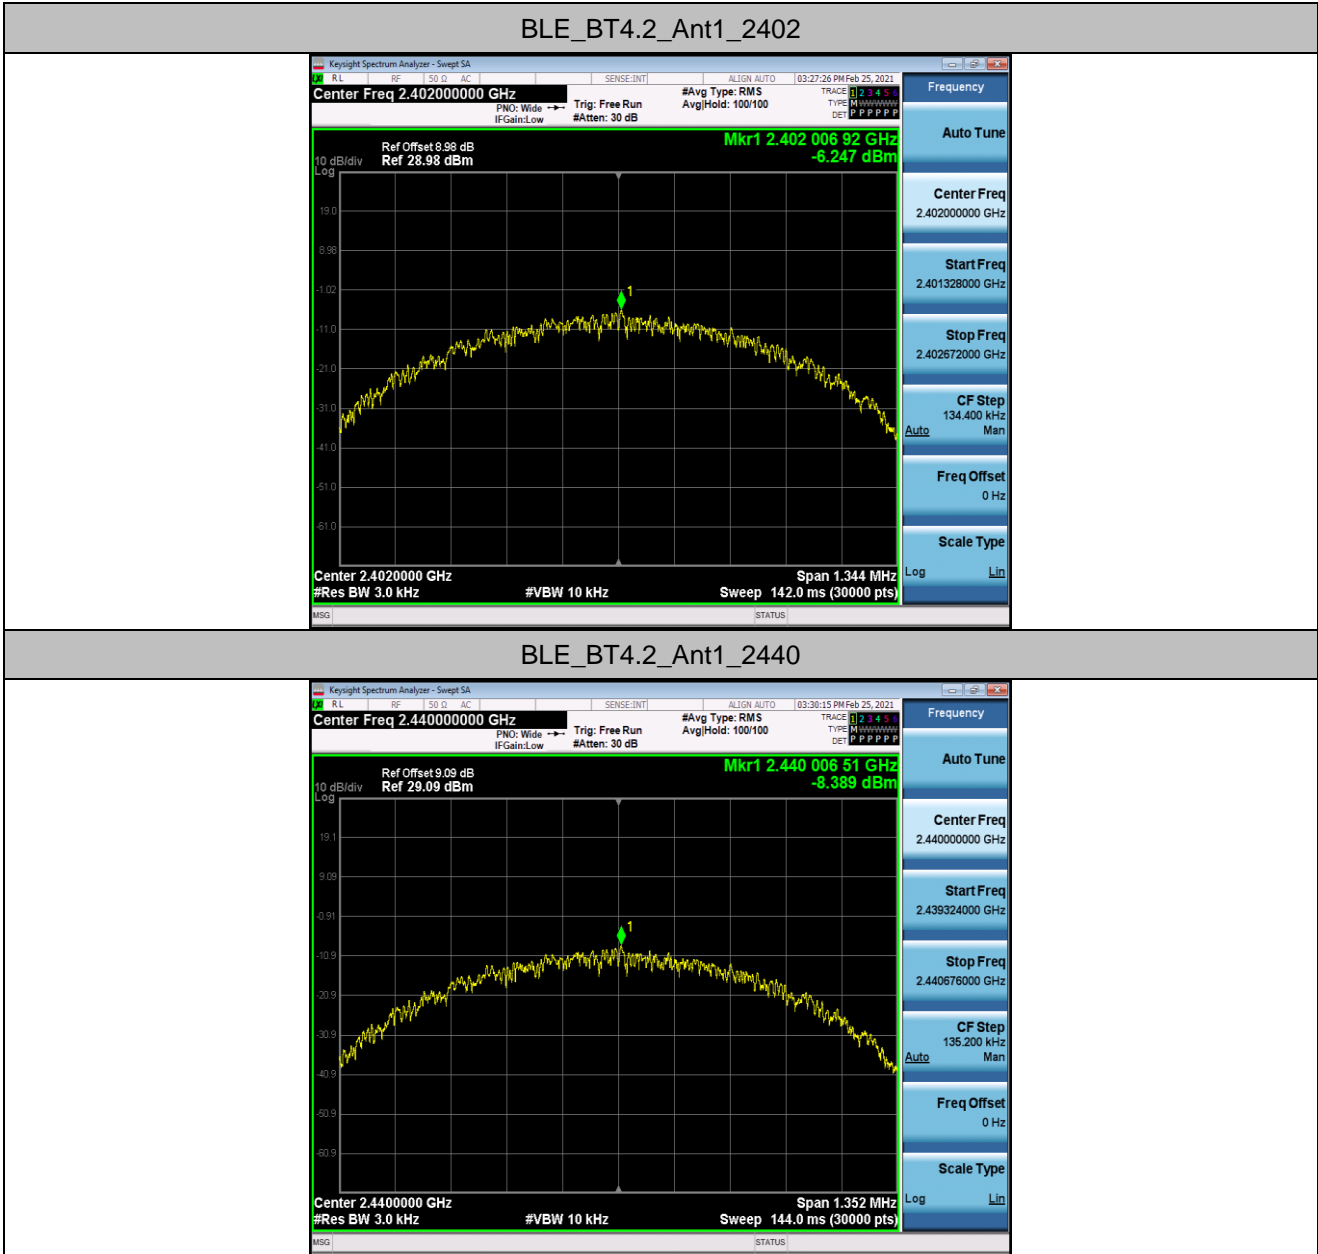

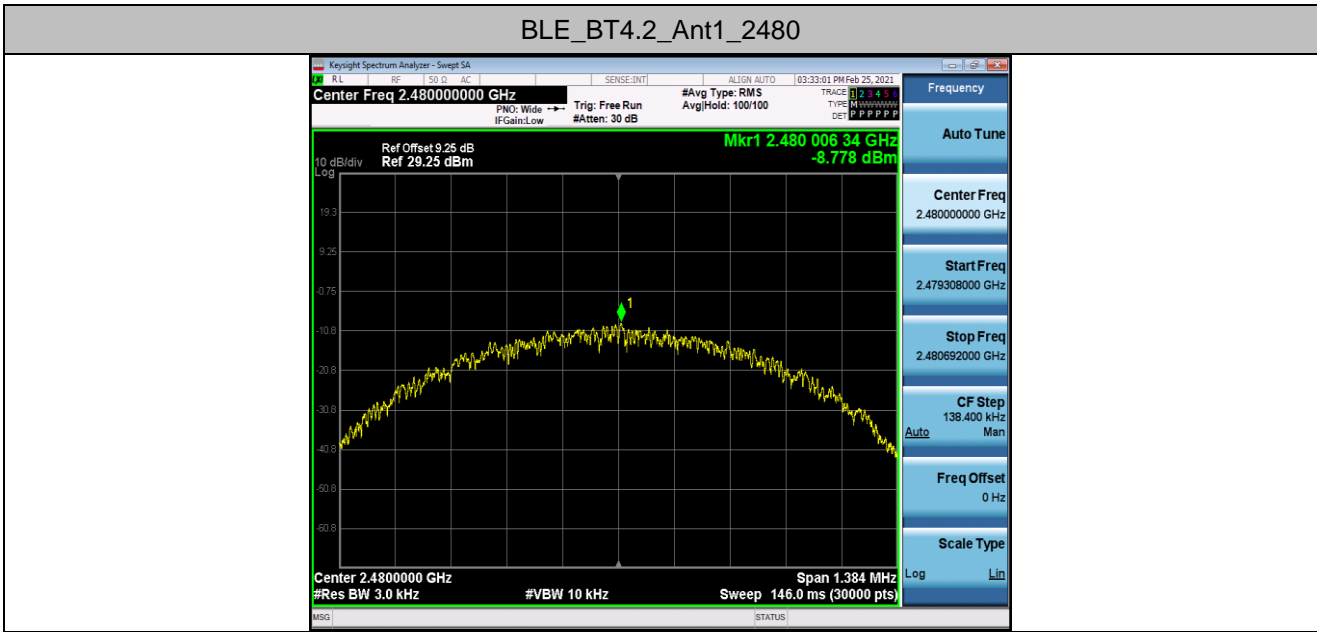


## Appendix E: Band edge measurements

### Test Result

TestMode	Antenna	ChName	Channel	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_BT4.2	Ant1	Low	2402	8.52	-44.12	<=-11.48	PASS
		High	2480	5.93	-45.48	<=-14.07	PASS

### Test Graphs

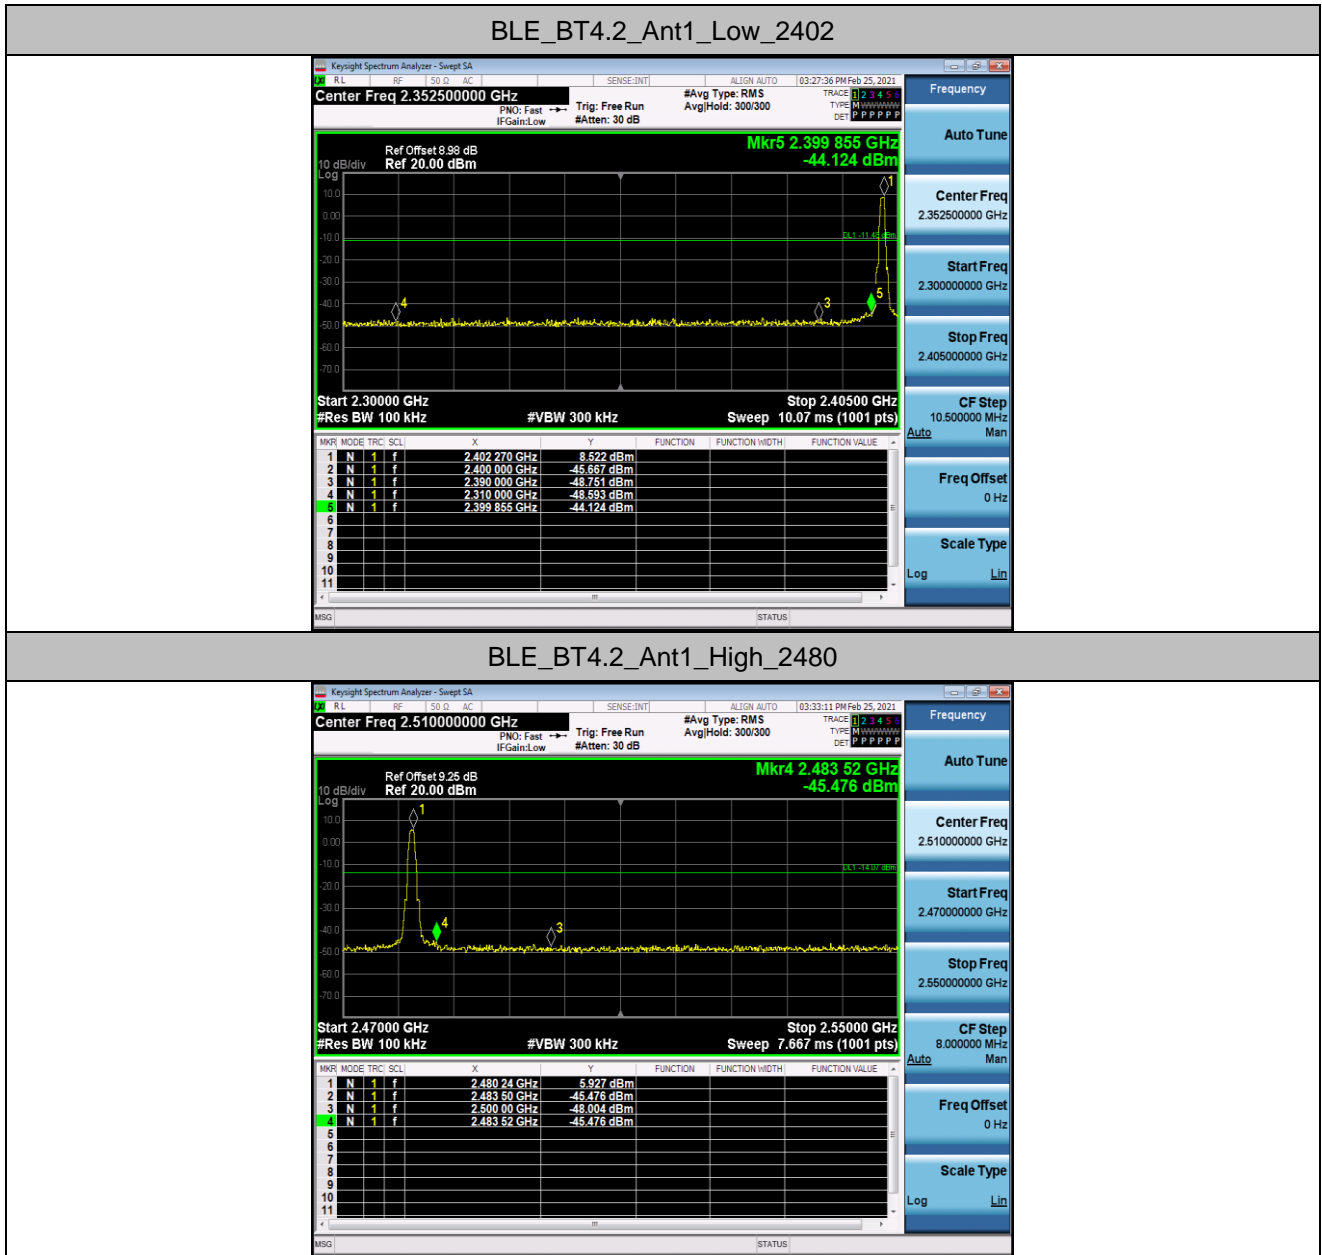


## Appendix F: Conducted Spurious Emission

### Test Result

TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_BT4.2	Ant1	2402	Reference	8.12	8.12	---	PASS
			30~1000	30~1000	-66.024	<=-11.877	PASS
			1000~26500	1000~26500	-47.752	<=-11.877	PASS
		2440	Reference	5.98	5.98	---	PASS
			30~1000	30~1000	-66.179	<=-14.017	PASS
			1000~26500	1000~26500	-47.56	<=-14.017	PASS
		2480	Reference	5.56	5.56	---	PASS
			30~1000	30~1000	-65.754	<=-14.441	PASS
			1000~26500	1000~26500	-47.671	<=-14.441	PASS

### Test Graphs

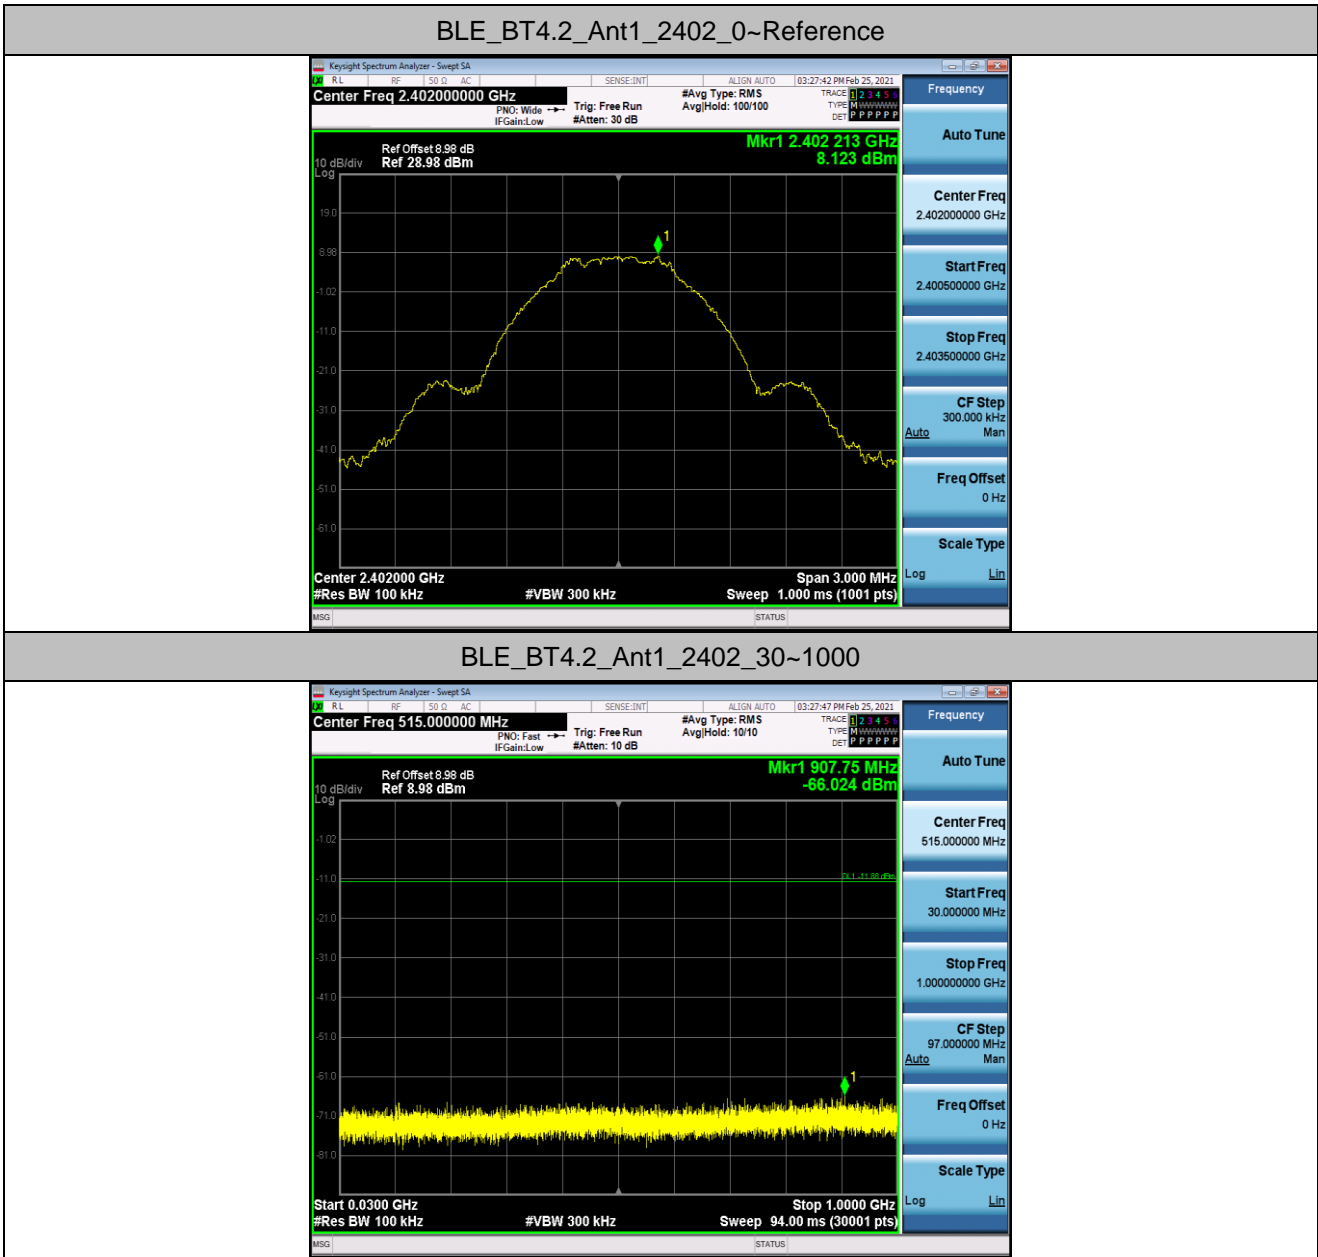

BLE\_BT4.2\_Ant1\_2402\_1000~26500




BLE\_BT4.2\_Ant1\_2440\_0~Reference





BLE\_BT4.2\_Ant1\_2440\_30~1000

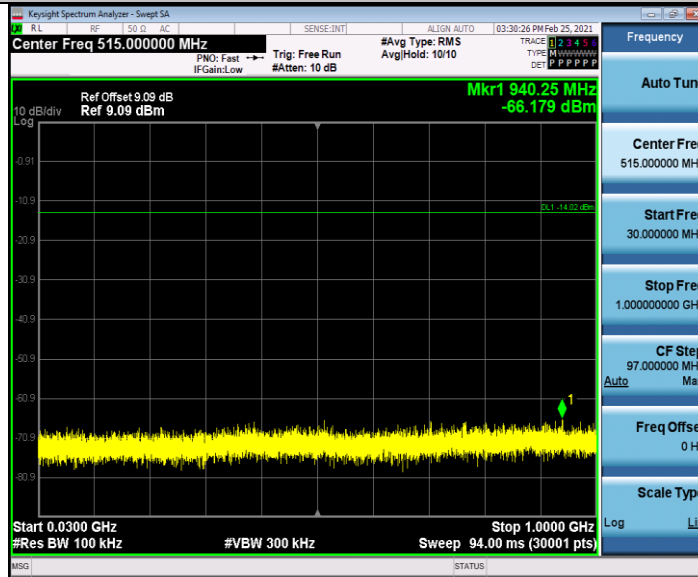


BLE\_BT4.2\_Ant1\_2440\_1000~26500




BLE\_BT4.2\_Ant1\_2480\_0~Reference



BLE\_BT4.2\_Ant1\_2480\_30~1000

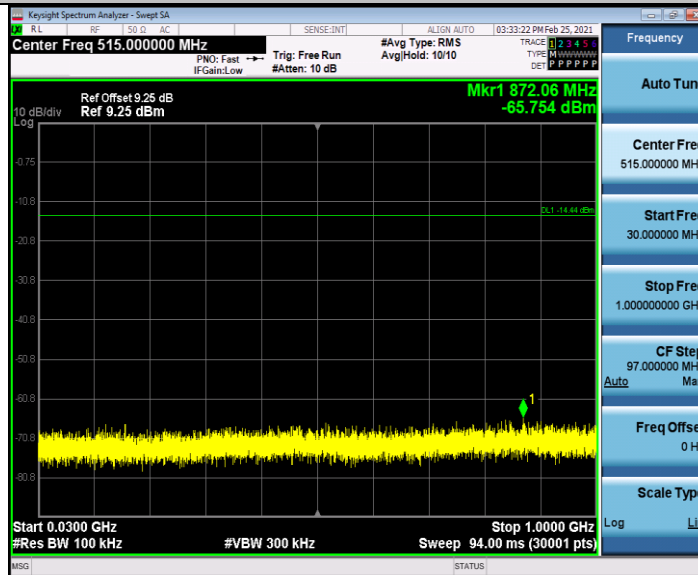

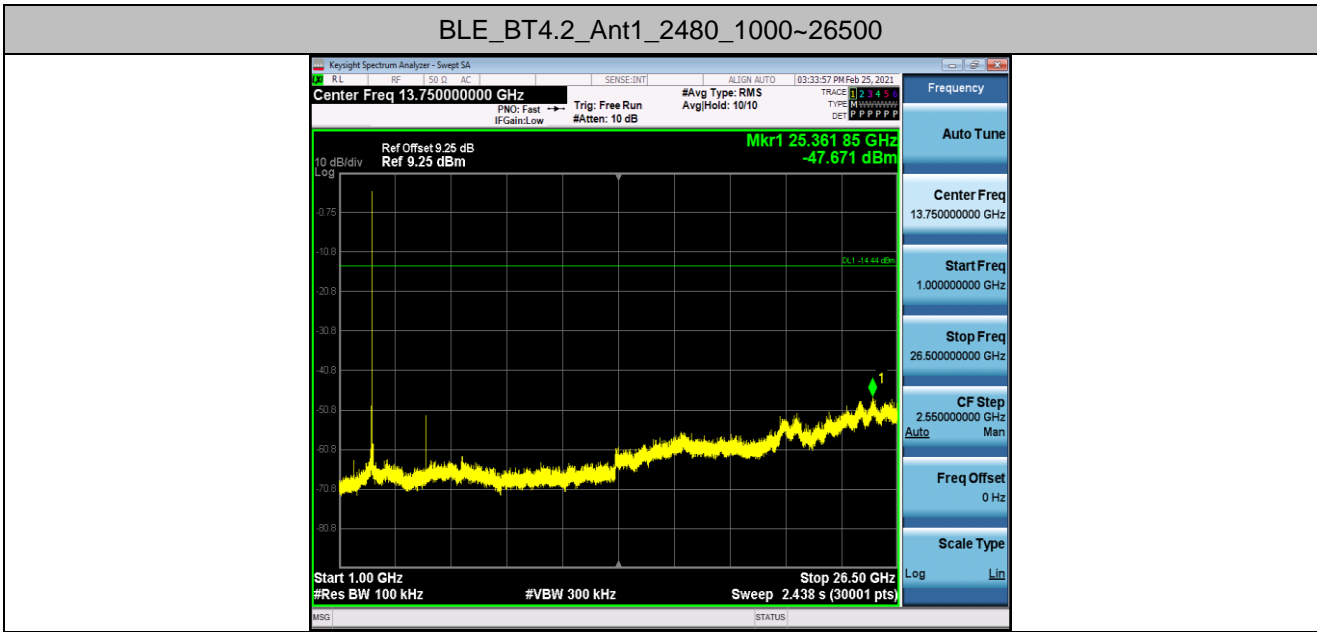

## Appendix G: Setup Photographs

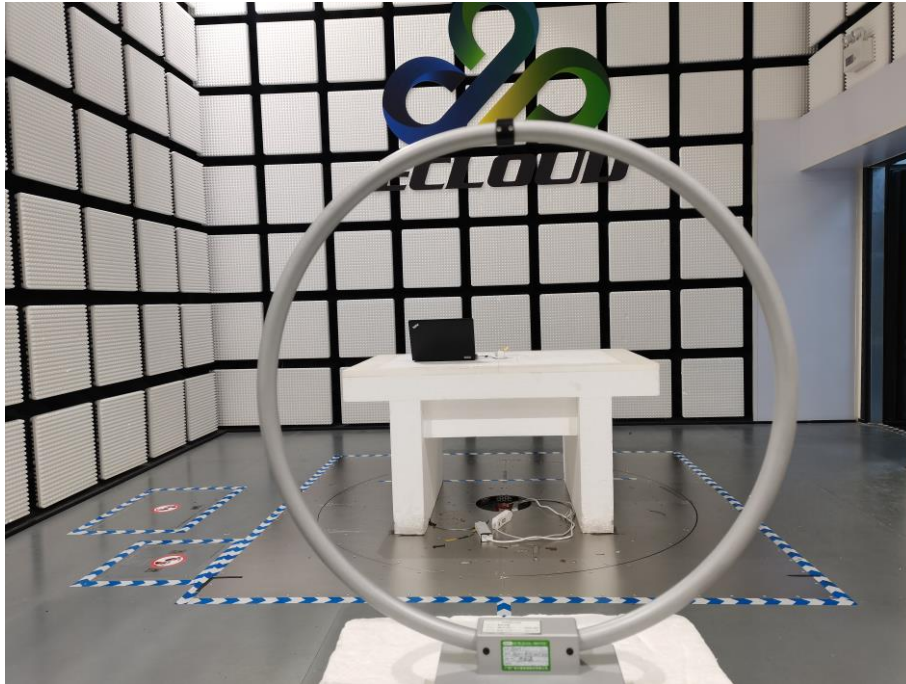


Fig. 1 Radiated emission setup photo(Below 30MHz)

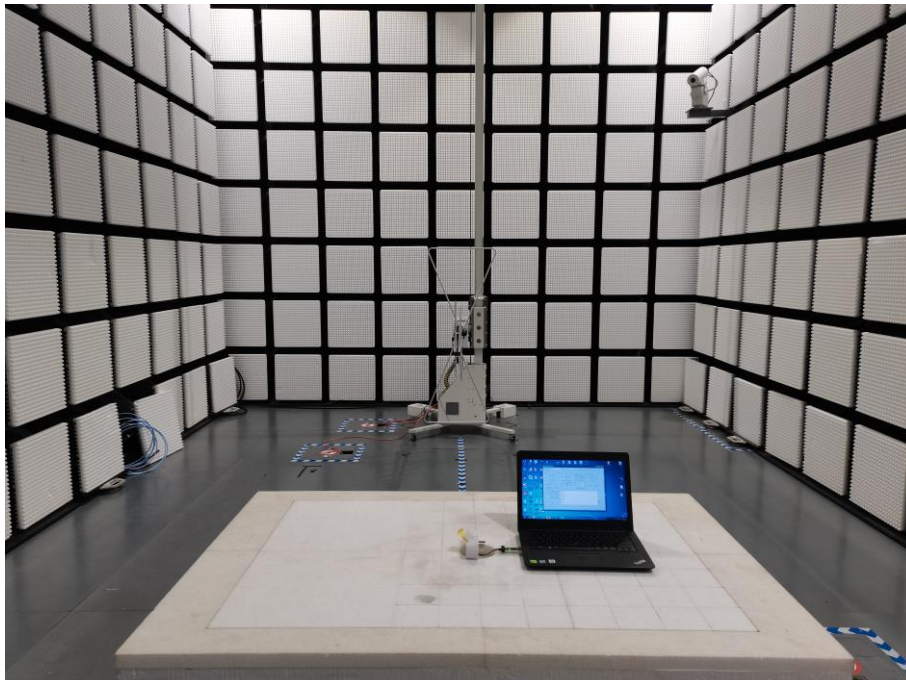


Fig. 2 Radiated emission setup photo(30MHz-1GHz)

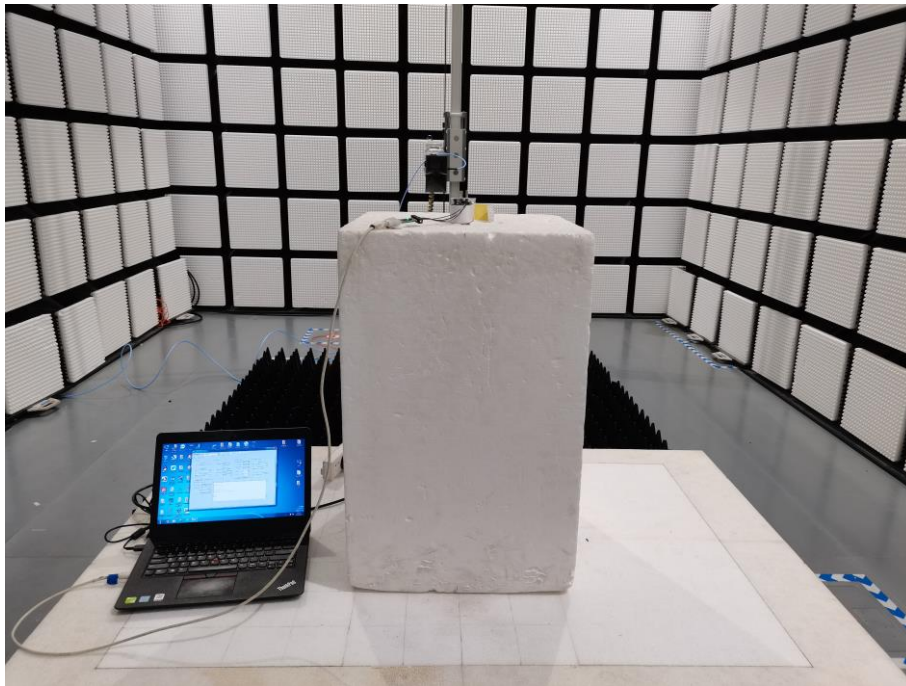


Fig. 3 Radiated emission setup photo(Above 1GHz)



Fig. 4 Power line conducted emission setup photo

-----End of the report-----