

FCC Part 15C Measurement and Test Report

For

ChamSys Ltd

Unit 3B Richmond Works, Pitt Road, Freemantle, Southampton, SO15 3FQ

FCC ID: 2AQWR-QUICKQ

FCC Rule(s):	<u>FCC Part 15.247</u>
Product Description:	<u>QuickQ Console</u>
Tested Model:	<u>QuickQ 30</u>
Report No.:	<u>STR18088151I-1</u>
Sample Receipt Date:	<u>2018-08-13</u>
Tested Date:	<u>2018-08-14 to 2018-09-07</u>
Issued Date:	<u>2018-09-07</u>
Tested By:	<u>Ray Yang / Engineer</u>
Reviewed By:	<u>Silin Chen / EMC Manager</u>
Approved & Authorized By:	<u>Jandy So / PSQ Manager</u>
Prepared By:	

Ray Yang

Silin Chen

Jandy So

Shenzhen SEM Test Technology Co., Ltd.

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
1.2 TEST STANDARDS	5
1.3 TEST METHODOLOGY	5
1.4 TEST FACILITY	5
1.5 EUT SETUP AND TEST MODE	6
1.6 MEASUREMENT UNCERTAINTY	7
1.7 TEST EQUIPMENT LIST AND DETAILS	8
2. SUMMARY OF TEST RESULTS	9
3. RF EXPOSURE	10
3.1 STANDARD APPLICABLE	10
3.2 TEST RESULT	10
4. ANTENNA REQUIREMENT	11
4.1 STANDARD APPLICABLE	11
4.2 EVALUATION INFORMATION	11
5. POWER SPECTRAL DENSITY	12
5.1 STANDARD APPLICABLE	12
5.2 TEST PROCEDURE	12
5.3 SUMMARY OF TEST RESULTS/PLOTS	12
6. 6DB BANDWIDTH	17
6.1 STANDARD APPLICABLE	17
6.2 TEST PROCEDURE	17
6.3 SUMMARY OF TEST RESULTS/PLOTS	17
7. RF OUTPUT POWER	22
7.1 STANDARD APPLICABLE	22
7.2 TEST PROCEDURE	22
7.3 SUMMARY OF TEST RESULTS/PLOTS	22
8. FIELD STRENGTH OF SPURIOUS EMISSIONS	28
8.1 STANDARD APPLICABLE	28
8.2 TEST PROCEDURE	28
8.3 CORRECTED AMPLITUDE & MARGIN CALCULATION	29
8.4 SUMMARY OF TEST RESULTS/PLOTS	29
9. OUT OF BAND EMISSIONS	37
9.1 STANDARD APPLICABLE	37
9.2 TEST PROCEDURE	37
9.3 SUMMARY OF TEST RESULTS/PLOTS	38
10. CONDUCTED EMISSIONS	58
10.1 TEST PROCEDURE	58
10.2 BASIC TEST SETUP BLOCK DIAGRAM	58
10.3 TEST RECEIVER SETUP	58
10.4 SUMMARY OF TEST RESULTS/PLOTS	58

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: ChamSys Ltd
Address of applicant: Unit 3B Richmond Works, Pitt Road, Freemantle,
Southampton, SO15 3FQ

Manufacturer: ChamSys Ltd
Address of manufacturer: Unit 3B Richmond Works, Pitt Road, Freemantle,
Southampton, SO15 3FQ

General Description of EUT	
Product Name:	QuickQ Console
Trade Name:	CHAMSYS
Model No.:	QuickQ 30
Adding Model(s):	QuickQ 20, QuickQ 10
Rated Voltage:	DC12V
Battery:	/
Power Adapter Model:	MODEL:MW06512DANBSBA INOUT:AC100-240V~50/60Hz 1.5A; OUTPUT:DC12V 5000mA
<i>Note: The test data is gathered from a production sample provided by the manufacturer. The appearance of others models listed in the report is different from main-test model QuickQ 30, but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	802.11b, 802.11g, 802.11n
Frequency Range:	2412-2462MHz for 802.11b/g/n-HT20 2422-2452MHz for 802.11n-HT40
RF Output Power:	9.63dBm (Conducted)
Type of Modulation:	CCK, OFDM, QPSK, BPSK, 16QAM, 64QAM
Data Rate:	1-11Mbps, 6-54Mbps, up to 150Mbps
Quantity of Channels:	11 for 802.11b/g/n-HT20 7 for 802.11n-HT40
Channel Separation:	5MHz
Type of Antenna:	SMA Reverse threads antenna
Antenna Gain:	3.0dBi
Lowest Internal Frequency of EUT:	26MHz

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

558074 D01 DTS Meas Guidance v04: GUIDANCE FOR PERFORMING COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEMS (DTS) OPERATING UNDER SECTION 15.247

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB 558074 D01 DTS Meas Guidance v04

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

FCC – Registration No.: 125990

Shenzhen SEM Test Technology Co., Ltd. Laboratory has been recognized to perform compliance testing on equipment subject to the Commissions Declaration Of Conformity (DOC). The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11b	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM2	802.11g	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM3	802.11n-HT20	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM4	802.11n-HT40	Low:2422MHz, Middle:2437MHz,High:2452MHz

Note: All test modes (different data rate and different modulation) are performed, but only the worst case is recorded in this report.

Test Conditions	
Temperature:	22~25 °C
Relative humidity	50~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
DC Power	1.5	Unshielded	Without Core

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
AC Power	1.2	Unshielded	Without Core

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2018-05-22	2019-05-21
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2018-05-22	2019-05-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2018-05-22	2019-05-21
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2018-05-22	2019-05-21
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2018-05-22	2019-05-21
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2017-06-08	2020-06-07
SEMT-1042	Horn Antenna	ETS	3117	00086197	2017-06-08	2020-06-07
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2017-06-08	2020-06-07
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2017-06-08	2020-06-07
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2018-05-22	2019-05-21
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2018-05-22	2019-05-21
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2018-05-22	2019-05-21
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2018-05-22	2019-05-21
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2018-05-22	2019-05-21
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2018-05-22	2019-05-21
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2018-03-19	2021-03-18
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2018-05-22	2019-05-21
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2018-05-22	2019-05-21
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2018-05-22	2019-05-21
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2018-03-19	2019-03-18
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2018-03-19	2019-03-18
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2018-03-19	2019-03-18
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2018-03-19	2019-03-18
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2018-03-19	2019-03-18
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2018-03-19	2019-03-18

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 2.1093	RF Exposure	Compliant
§ 15.203; § 15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§ 15.207(a)	Conducted Emission	Compliant
§ 15.247(e)	Power Spectral Density	Compliant
§ 15.247(a)(2)	6 dB Bandwidth	Compliant
§ 15.247(b)(3)	RF Output Power	Compliant
§ 15.209(a)	Radiated Emission	Compliant
§ 15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: not applicable

3. RF Exposure

3.1 Standard Applicable

According to § 1.1307 and § 2.1093, the portable transmitter must comply the RF exposure requirements.

3.2 Test Result

This product complied with the requirement of the RF exposure, please see the RF Exposure Report.

4. Antenna Requirement

4.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

4.2 Evaluation Information

This product has a SMA Reverse threads antenna antenna, fulfill the requirement of this section.

5. Power Spectral Density

5.1 Standard Applicable

According to 15.247(a)(1)(iii), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

5.2 Test Procedure




According to the KDB 558074 D01 v04, such specifications require that the same method as used to determine the conducted output power shall also be used to determine the power spectral density. The test method of power spectral density as below:




- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set VBW $\geq 3 \times \text{RBW}$.
- e) Detector = power averaging (RMS) or sample detector (when RMS not available).
- f) Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
- g) Sweep time = auto couple.
- h) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- i) Use the peak marker function to determine the maximum amplitude level.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span in order to meet the minimum measurement point requirement as the RBW is reduced).




5.3 Summary of Test Results/Plots




Test Mode	Test Channel MHz	Power Spectral Density dBm/3kHz	Limit dBm/3kHz
802.11b	2412	-20.08	8
	2437	-21.26	8
	2462	-23.15	8
802.11g	2412	-25.23	8
	2437	-25.82	8
	2462	-27.8	8
802.11n-HT20	2412	-25.01	8
	2437	-26.06	8
	2462	-27.90	8
802.11n-HT40	2422	-28.97	8
	2437	-30.18	8
	2452	-30.93	8

Please refer to the following test plots:
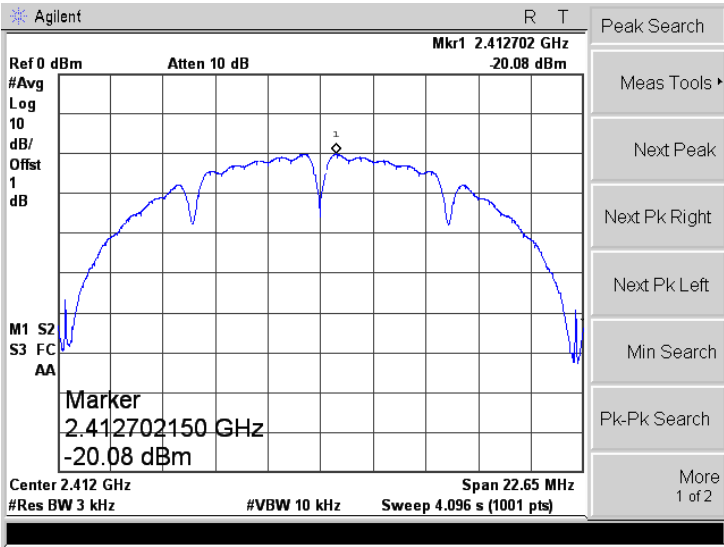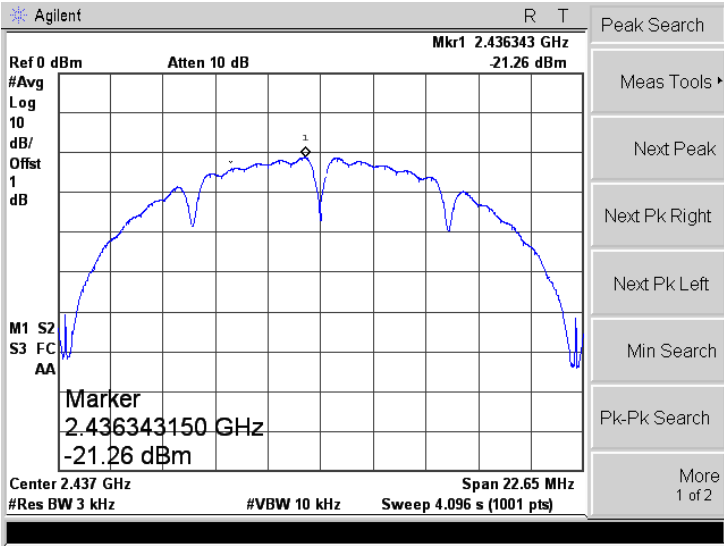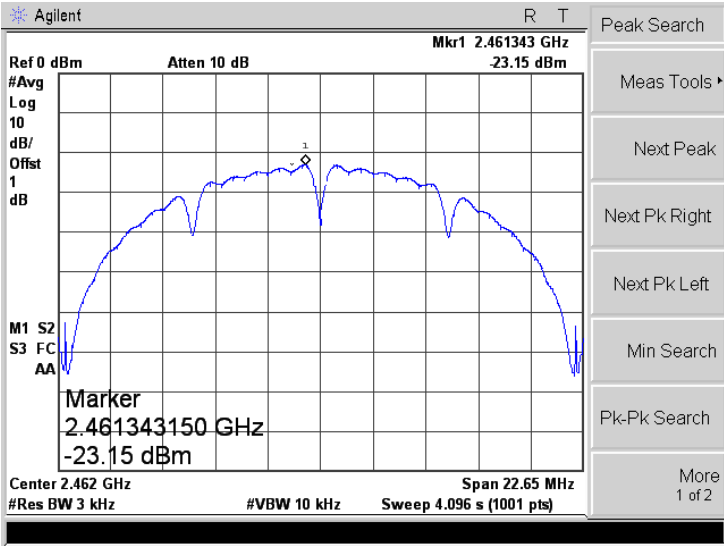
<p>802.11b-Low</p>	
<p>802.11b-Middle</p>	
<p>802.11b-High</p>	
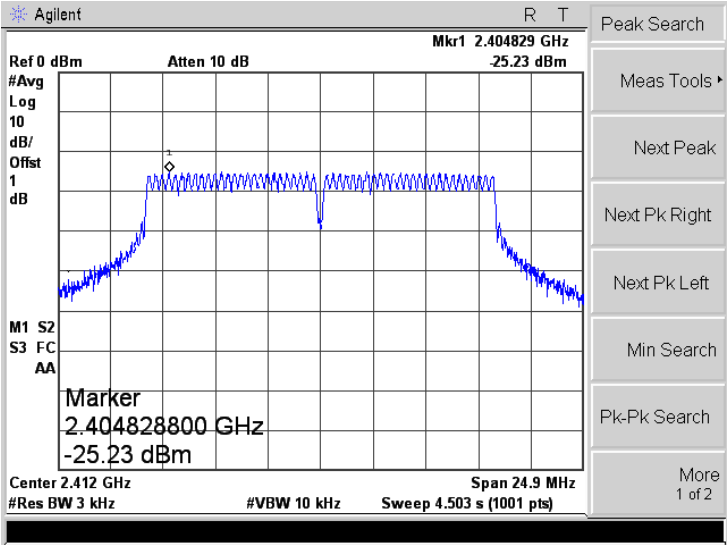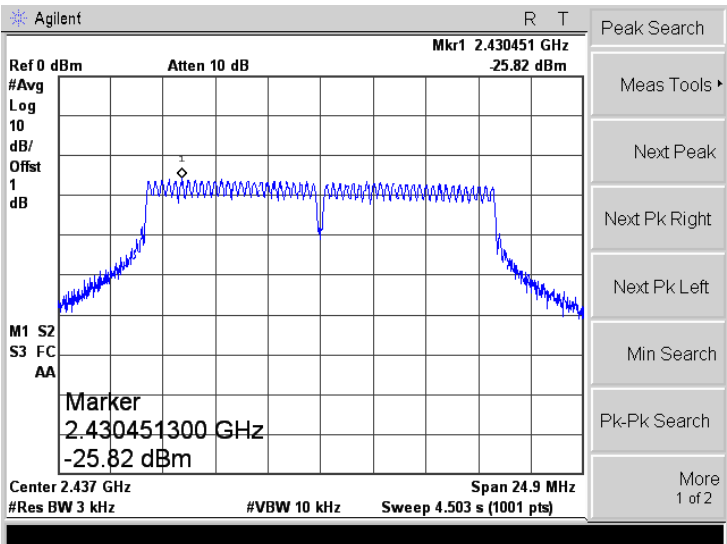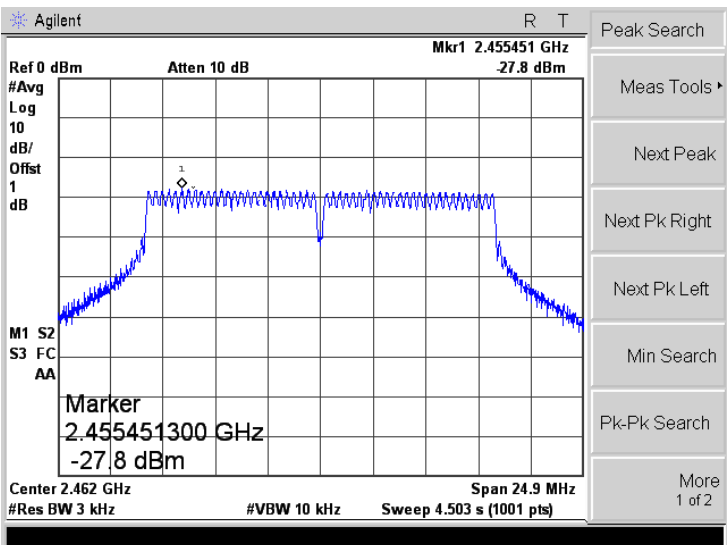
<p>802.11g-Low</p>	
<p>802.11g-Middle</p>	
<p>802.11g-High</p>	
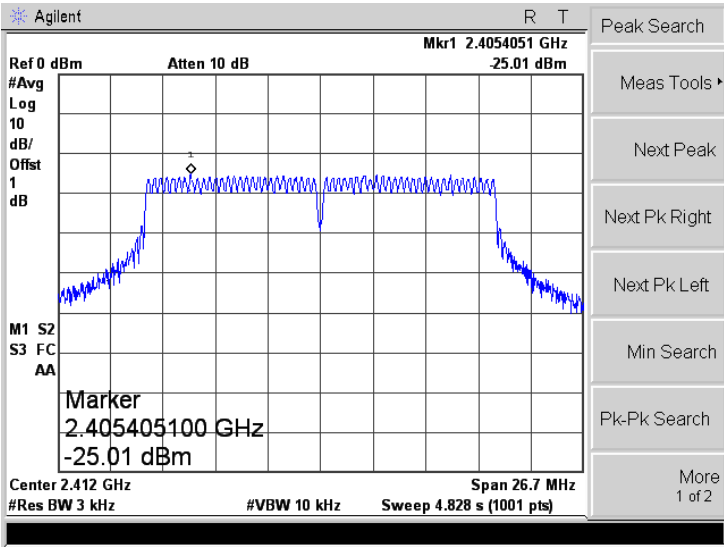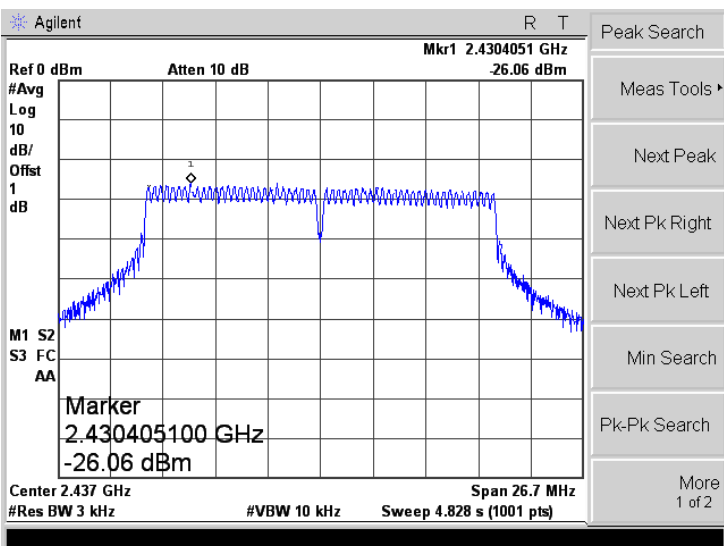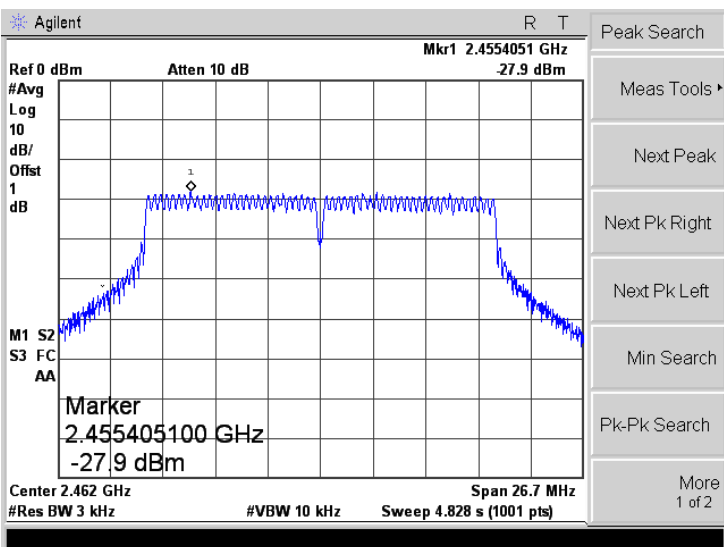
<p>802.11n-HT20-Low</p>	
<p>802.11n-HT20-Middle</p>	
<p>802.11n-HT20-High</p>	
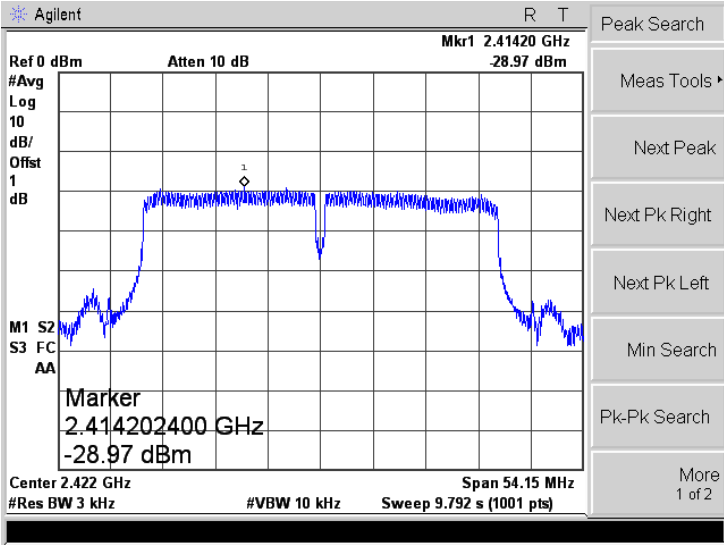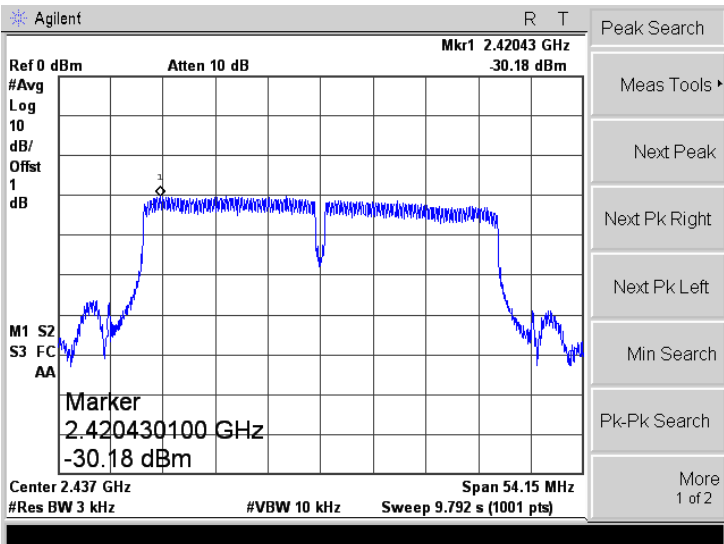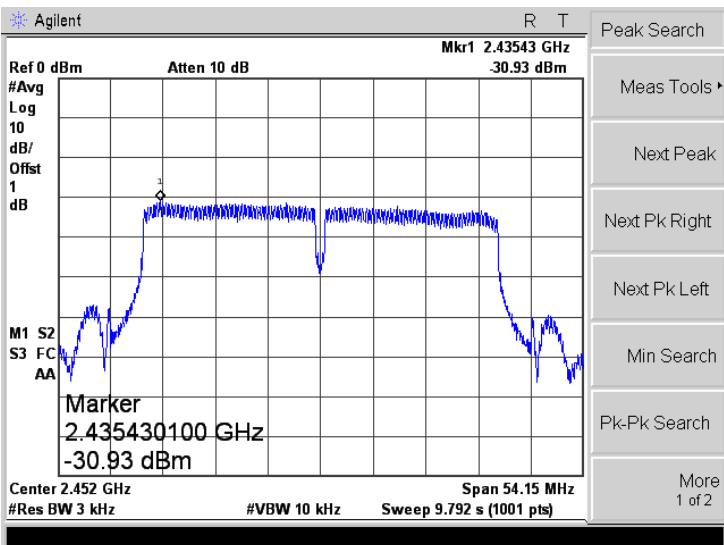
<p>802.11n-HT40-Low</p>	
<p>802.11n-HT40-Middle</p>	
<p>802.11n-HT40-High</p>	

6. 6dB Bandwidth

6.1 Standard Applicable

According to 15.247(a)(2). Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.




6.2 Test Procedure




- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.




6.3 Summary of Test Results/Plots




Test Mode	Test Channel MHz	6 dB Bandwidth MHz	Limit kHz
802.11b	2412	10.070	≥ 500
	2437	10.017	≥ 500
	2462	10.071	≥ 500
802.11g	2412	16.578	≥ 500
	2437	16.564	≥ 500
	2462	16.542	≥ 500
802.11n-HT20	2412	17.832	≥ 500
	2437	17.797	≥ 500
	2462	17.772	≥ 500
802.11n-HT40	2422	36.422	≥ 500
	2437	36.441	≥ 500
	2452	36.453	≥ 500

Please refer to the following test plots:
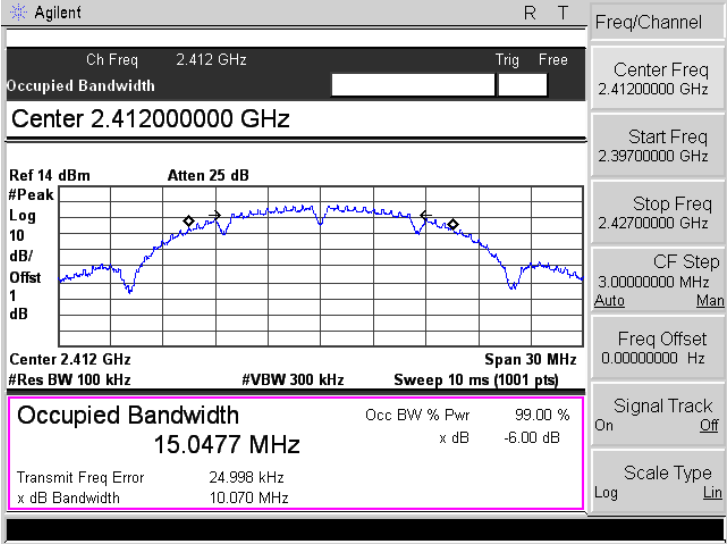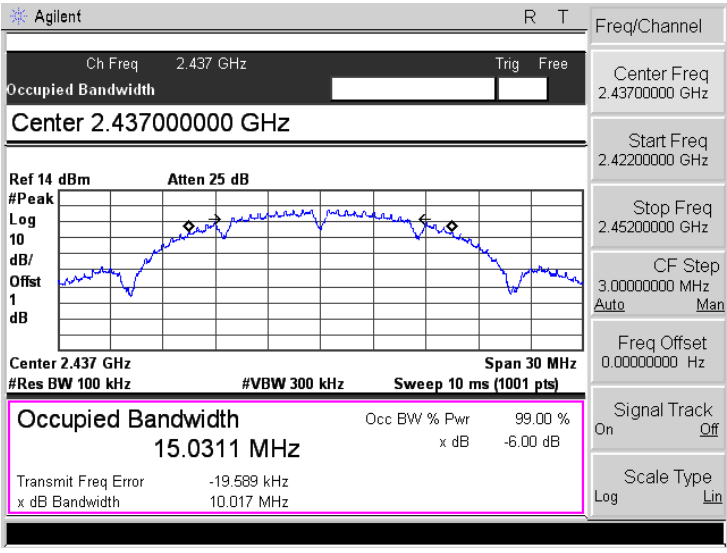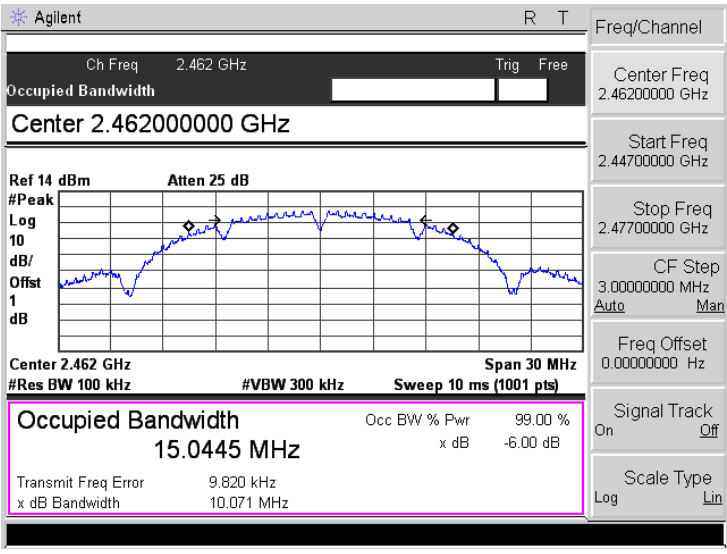
<p>802.11b-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.41200000 GHz</p> <p>Ref 14 dBm Atten 25 dB</p> <p>#Peak</p> <p>Log 10 dB/</p> <p>Offset 1 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth Occ BW % Pwr 99.00 %</p> <p>15.0477 MHz x dB -6.00 dB</p> <p>Transmit Freq Error 24.998 kHz</p> <p>x dB Bandwidth 10.070 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11b-Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.43700000 GHz</p> <p>Ref 14 dBm Atten 25 dB</p> <p>#Peak</p> <p>Log 10 dB/</p> <p>Offset 1 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth Occ BW % Pwr 99.00 %</p> <p>15.0311 MHz x dB -6.00 dB</p> <p>Transmit Freq Error -19.589 kHz</p> <p>x dB Bandwidth 10.017 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11b-High</p>	 <p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.46200000 GHz</p> <p>Ref 14 dBm Atten 25 dB</p> <p>#Peak</p> <p>Log 10 dB/</p> <p>Offset 1 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth Occ BW % Pwr 99.00 %</p> <p>15.0445 MHz x dB -6.00 dB</p> <p>Transmit Freq Error 9.820 kHz</p> <p>x dB Bandwidth 10.071 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

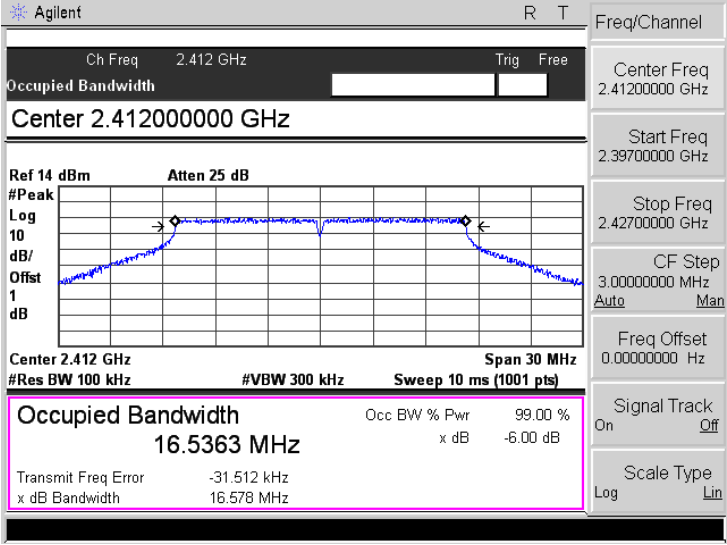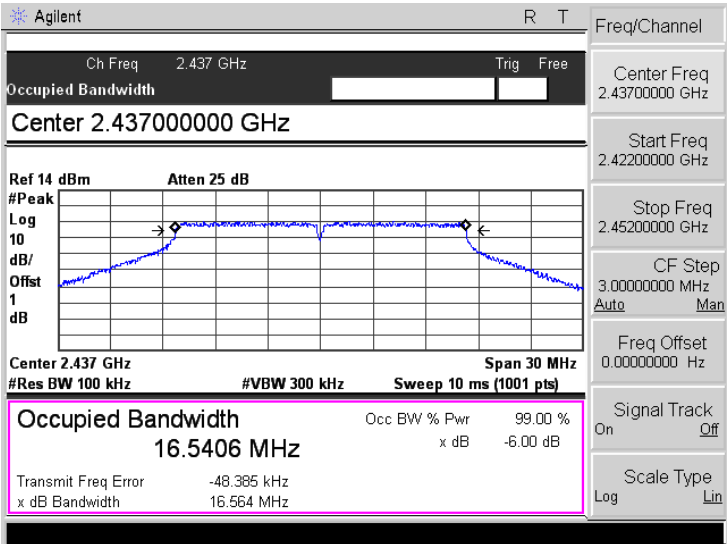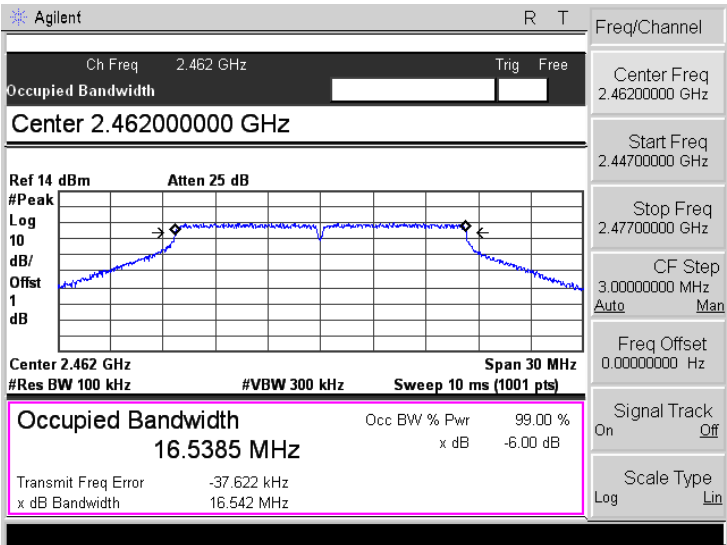802.11g-Low	 <p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Center 2.41200000 GHz</p> <p>Ref 14 dBm Atten 25 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.5363 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -31.512 kHz x dB Bandwidth 16.578 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
802.11g-Middle	 <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Center 2.43700000 GHz</p> <p>Ref 14 dBm Atten 25 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.5406 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -48.385 kHz x dB Bandwidth 16.564 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
802.11g-High	 <p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Center 2.46200000 GHz</p> <p>Ref 14 dBm Atten 25 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.5385 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -37.622 kHz x dB Bandwidth 16.542 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
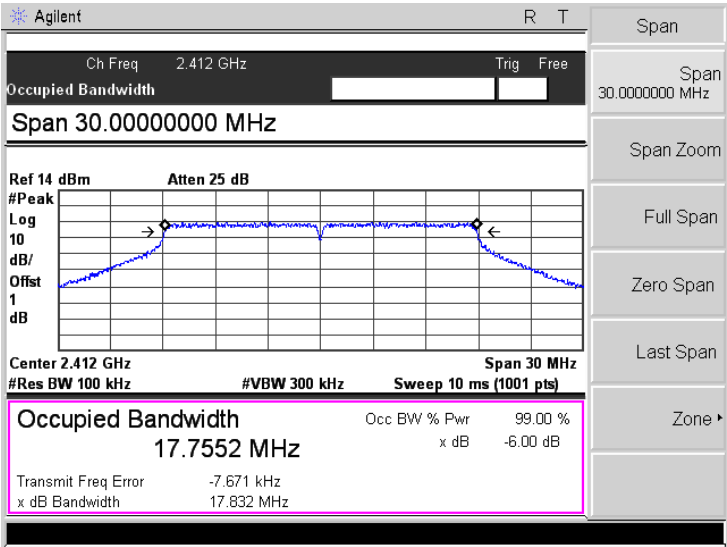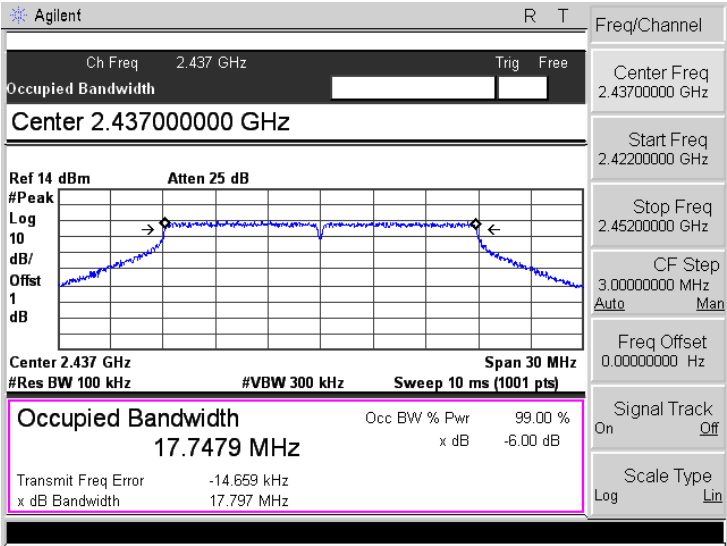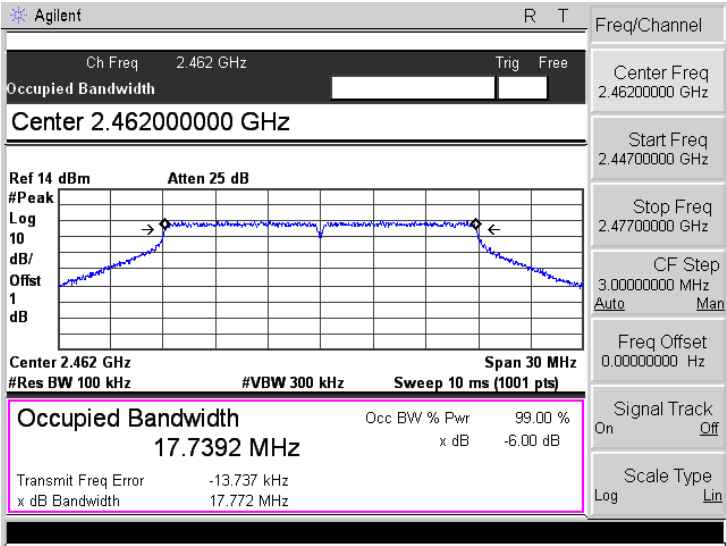
<p>802.11n-HT20-Low</p>	
<p>802.11n-HT20-Middle</p>	
<p>802.11n-HT20-High</p>	
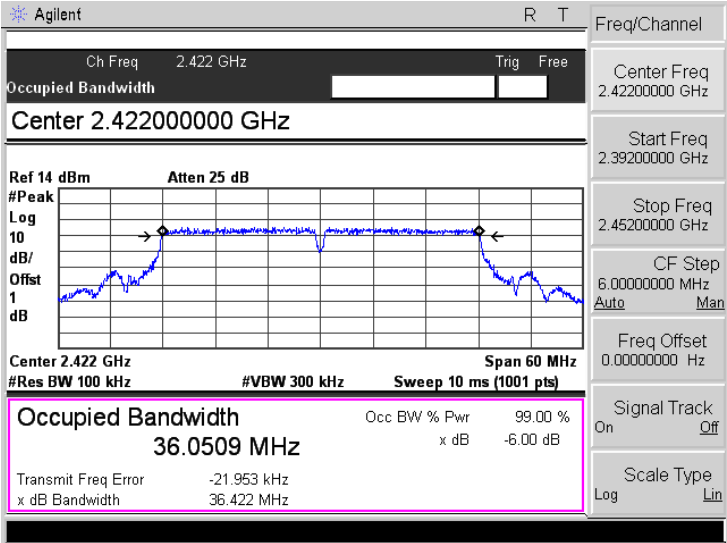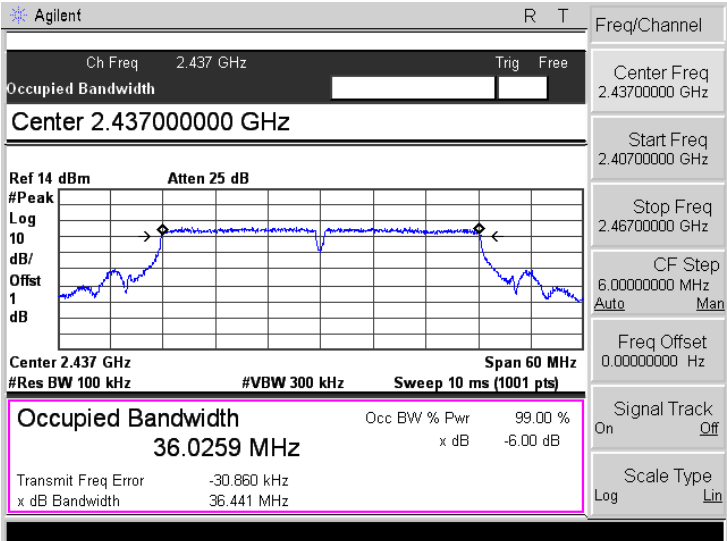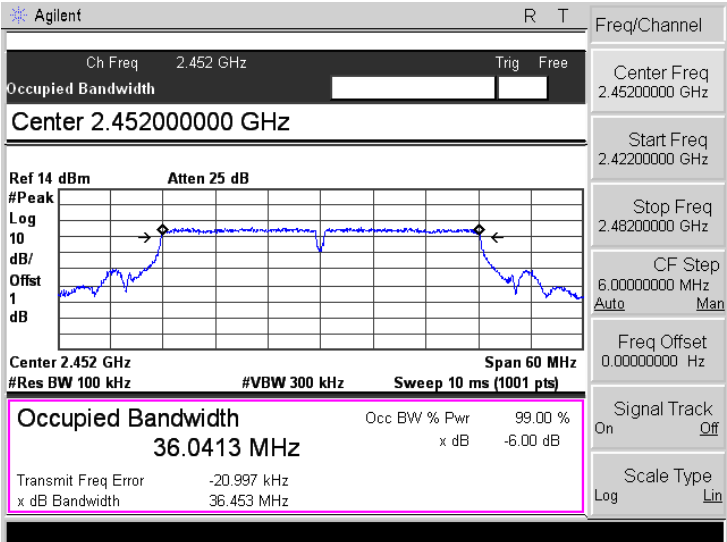
<p>802.11n-HT40-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 2.422 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.42200000 GHz</p> <p>Ref 14 dBm Atten 25 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 2.422 GHz Span 60 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 36.0509 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -21.953 kHz</p> <p>x dB Bandwidth 36.422 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.42200000 GHz</p> <p>Start Freq 2.39200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 6.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT40-Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.43700000 GHz</p> <p>Ref 14 dBm Atten 25 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 2.437 GHz Span 60 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 36.0259 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -30.860 kHz</p> <p>x dB Bandwidth 36.441 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.40700000 GHz</p> <p>Stop Freq 2.46700000 GHz</p> <p>CF Step 6.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT40-High</p>	 <p>Agilent R T</p> <p>Ch Freq 2.452 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.45200000 GHz</p> <p>Ref 14 dBm Atten 25 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 2.452 GHz Span 60 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 36.0413 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -20.997 kHz</p> <p>x dB Bandwidth 36.453 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.45200000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.48200000 GHz</p> <p>CF Step 6.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

7. RF Output Power

7.1 Standard Applicable

According to 15.247(b)(3). For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

7.2 Test Procedure




According to the KDB-558074 D01 v04, 9.2.2.2, when this option is exercised, the measured power is to be referenced to the OBW rather than the DTS bandwidth




- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW $\geq 3 \times$ RBW.
- d) Number of points in sweep $\geq 2 \times$ span / RBW. (This gives bin-to-bin spacing \leq RBW/2, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- g) If transmit duty cycle < 98 %, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 %, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run” .
- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.




7.3 Summary of Test Results/Plots




Test Mode	Frequency MHz	Reading dBm	Output Power mW	Limit mW
802.11b_11Mbps	2412	9.56	9.036	1000
	2437	9.62	9.162	1000
	2462	9.63	9.183	1000
802.11g_54Mbps	2412	7.86	6.109	1000
	2437	8.44	6.982	1000
	2462	7.87	6.124	1000
802.11n HT20_MCS7	2412	7.92	6.194	1000
	2437	7.78	5.998	1000
	2462	7.93	6.209	1000
802.11n HT40_MCS7	2422	6.03	4.009	1000
	2437	6.02	3.999	1000
	2452	5.80	3.802	1000

Please refer to the following test plots:
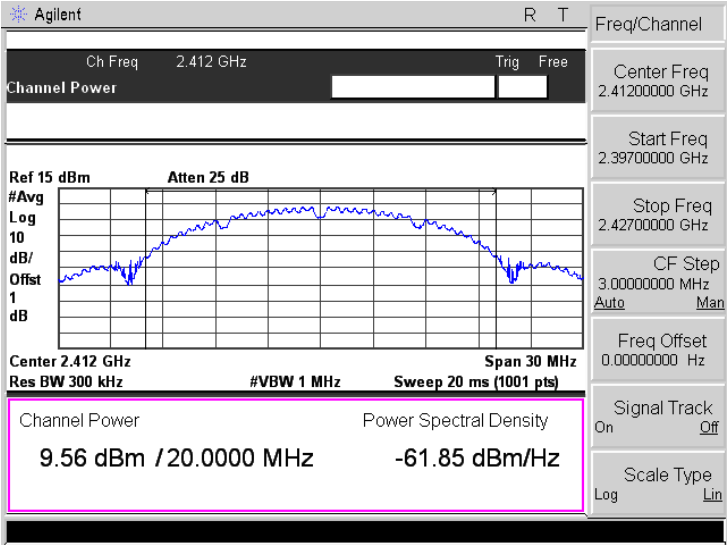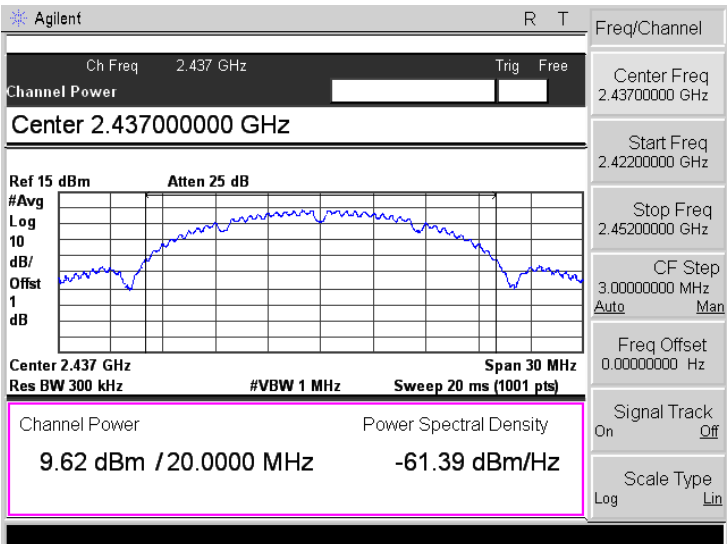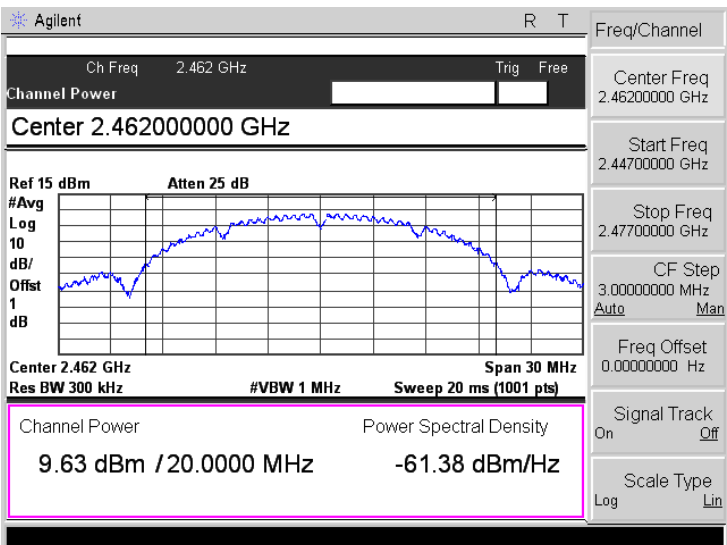
<p>802.11b-Low 11Mbps</p>	 <p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 15 dBm Atten 25 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.412 GHz Span 30 MHz Res BW 300 kHz #VBW 1 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density 9.56 dBm / 20.0000 MHz -61.85 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11b-Middle 11Mbps</p>	 <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.437000000 GHz</p> <p>Ref 15 dBm Atten 25 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.437 GHz Span 30 MHz Res BW 300 kHz #VBW 1 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density 9.62 dBm / 20.0000 MHz -61.39 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11b-High 11Mbps</p>	 <p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.462000000 GHz</p> <p>Ref 15 dBm Atten 25 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.462 GHz Span 30 MHz Res BW 300 kHz #VBW 1 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density 9.63 dBm / 20.0000 MHz -61.38 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
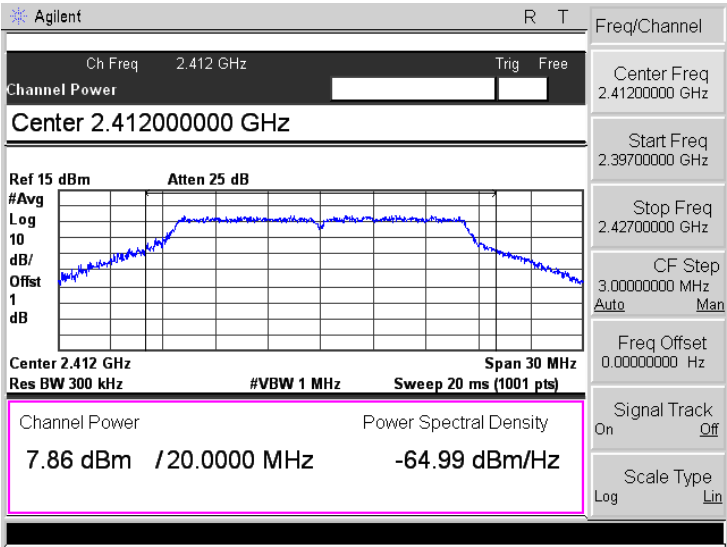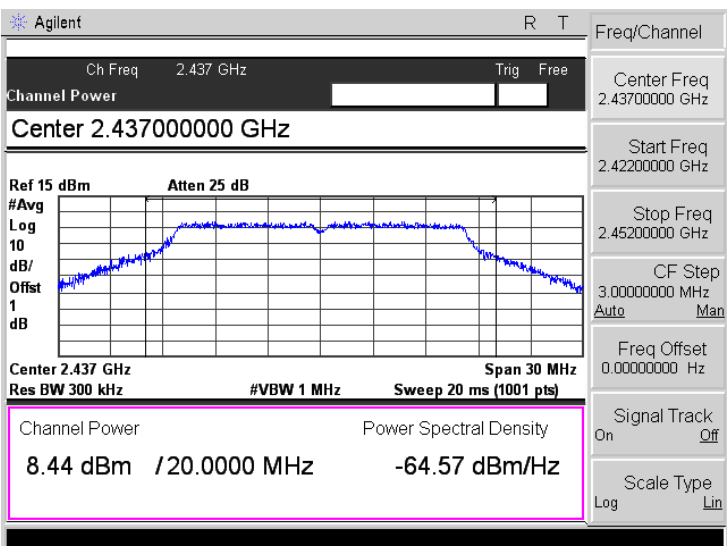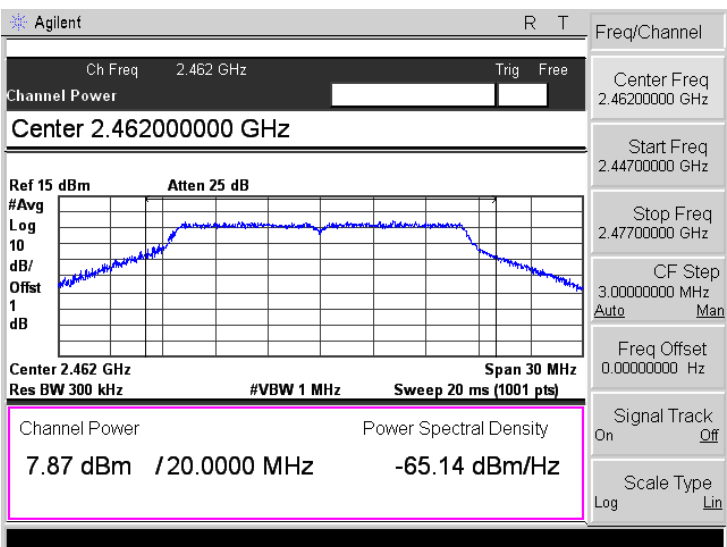
<p>802.11g-Low 54Mbps</p>	 <p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.41200000 GHz</p> <p>Ref 15 dBm Atten 25 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.412 GHz Span 30 MHz Res BW 300 kHz #VBW 1 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density 7.86 dBm /20.0000 MHz -64.99 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11g-Middle 54Mbps</p>	 <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.43700000 GHz</p> <p>Ref 15 dBm Atten 25 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.437 GHz Span 30 MHz Res BW 300 kHz #VBW 1 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density 8.44 dBm /20.0000 MHz -64.57 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11g-High 54Mbps</p>	 <p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.46200000 GHz</p> <p>Ref 15 dBm Atten 25 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.462 GHz Span 30 MHz Res BW 300 kHz #VBW 1 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density 7.87 dBm /20.0000 MHz -65.14 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
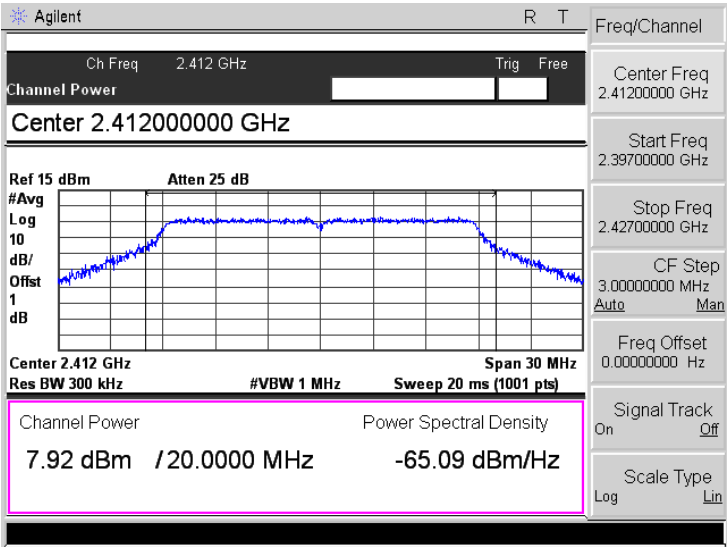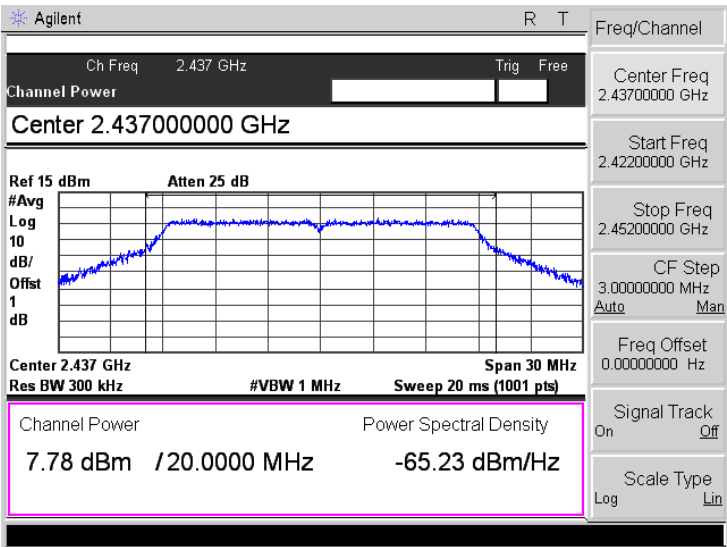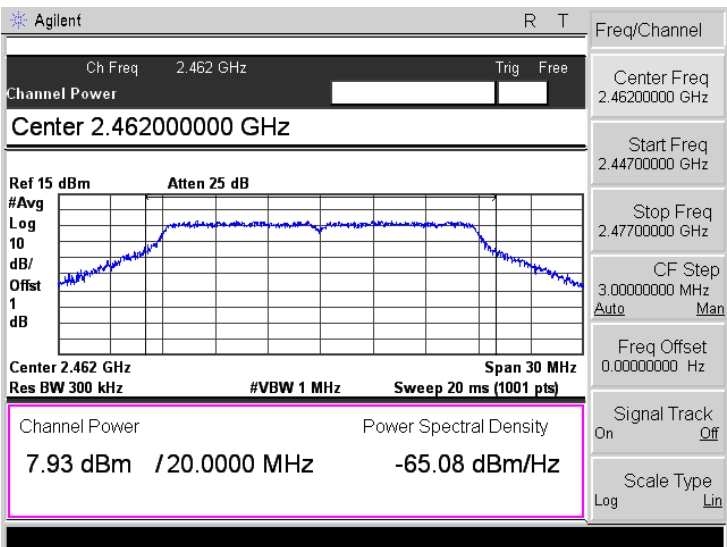
<p>802.11n-HT20-Low MCS7</p>	 <p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.41200000 GHz</p> <p>Ref 15 dBm Atten 25 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.412 GHz Res BW 300 kHz Span 30 MHz #VBW 1 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>7.92 dBm / 20.0000 MHz -65.09 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-Middle MCS7</p>	 <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.43700000 GHz</p> <p>Ref 15 dBm Atten 25 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.437 GHz Res BW 300 kHz Span 30 MHz #VBW 1 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>7.78 dBm / 20.0000 MHz -65.23 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-High MCS7</p>	 <p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.46200000 GHz</p> <p>Ref 15 dBm Atten 25 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.462 GHz Res BW 300 kHz Span 30 MHz #VBW 1 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>7.93 dBm / 20.0000 MHz -65.08 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
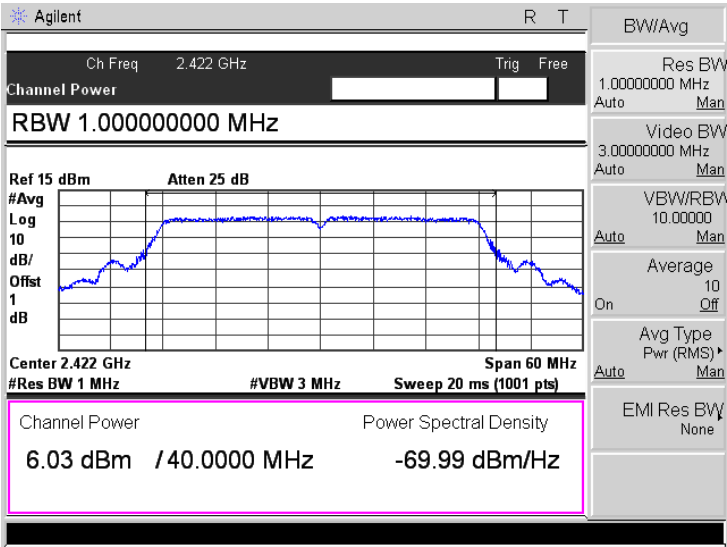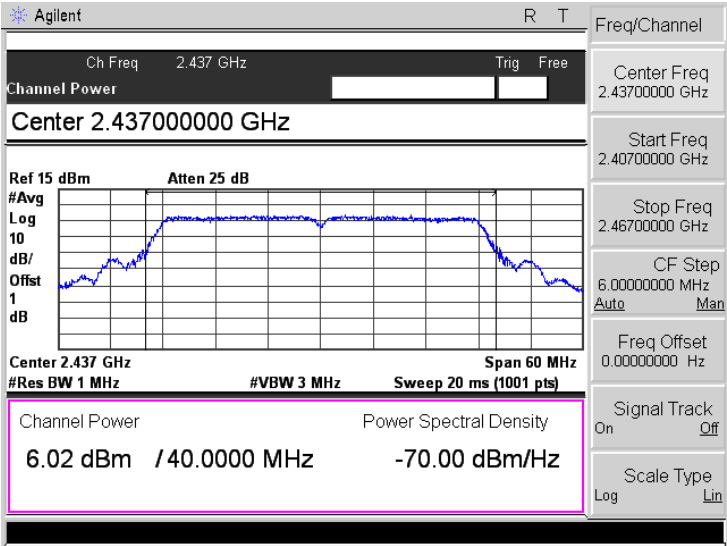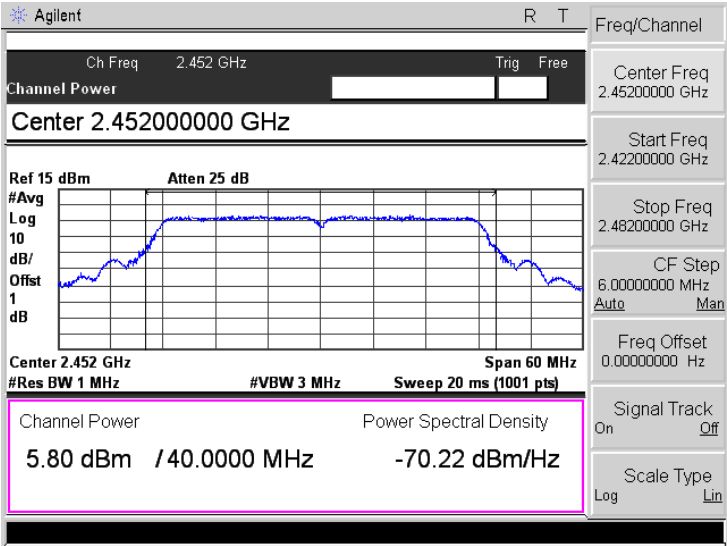
<p>802.11n-HT40-Low MCS7</p>	
<p>802.11n-HT40-Middle MCS7</p>	
<p>802.11n-HT40-High MCS7</p>	

8. Field Strength of Spurious Emissions

8.1 Standard Applicable


According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).


The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

8.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

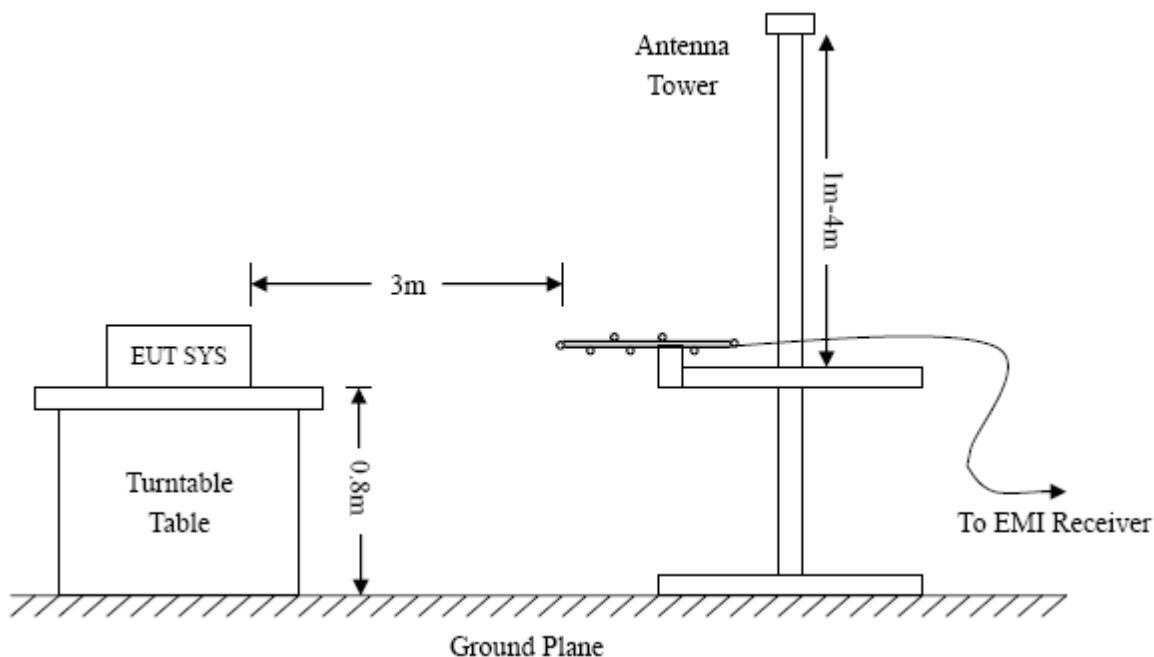

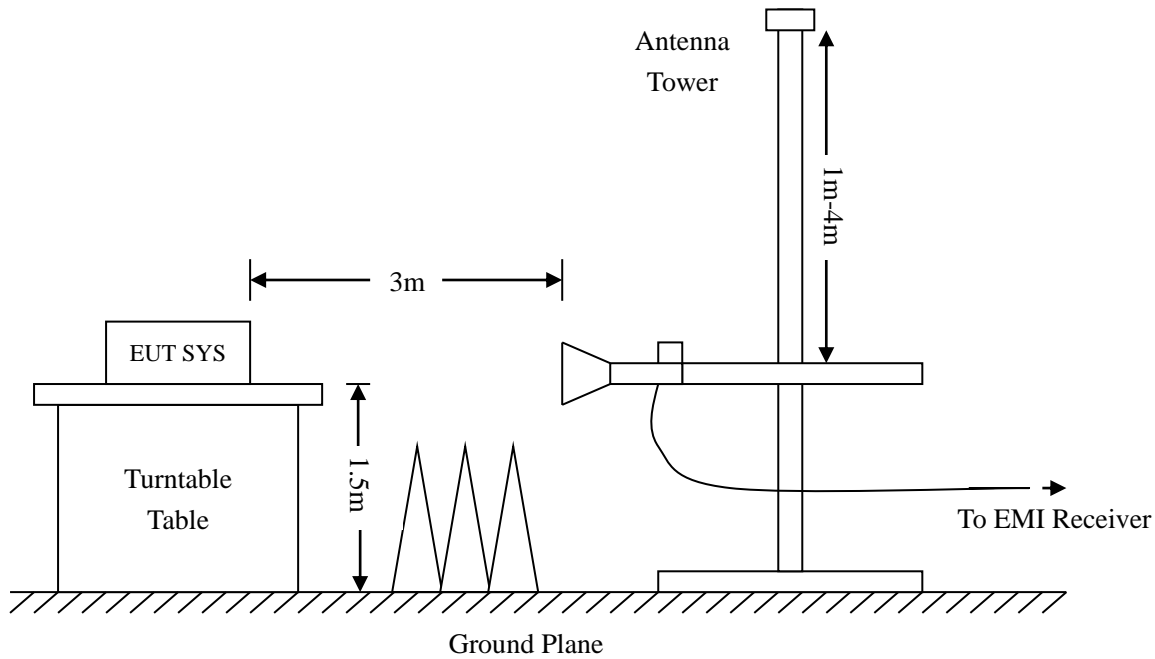

Frequency :9kHz-30MHz

RBW=10KHz,

VBW =30KHz

Sweep time= Auto

Trace = max hold

Detector function = peak

Frequency :30MHz-1GHz

RBW=120KHz,

VBW=360KHz

Sweep time= Auto

Trace = max hold

Detector function = peak, QP

Frequency :Above 1GHz

RBW=1MHz,

VBW=3MHz(Peak), 10Hz(AV)

Sweep time= Auto

Trace = max hold

Detector function = peak, AV

8.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$


8.4 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

All test modes (different data rate and different modulation) are performed, but only the worst case is recorded in this report.


➤ Spurious Emissions Below 1GHz

802.11b			
Test Channel	Low	Polarity:	Horizontal

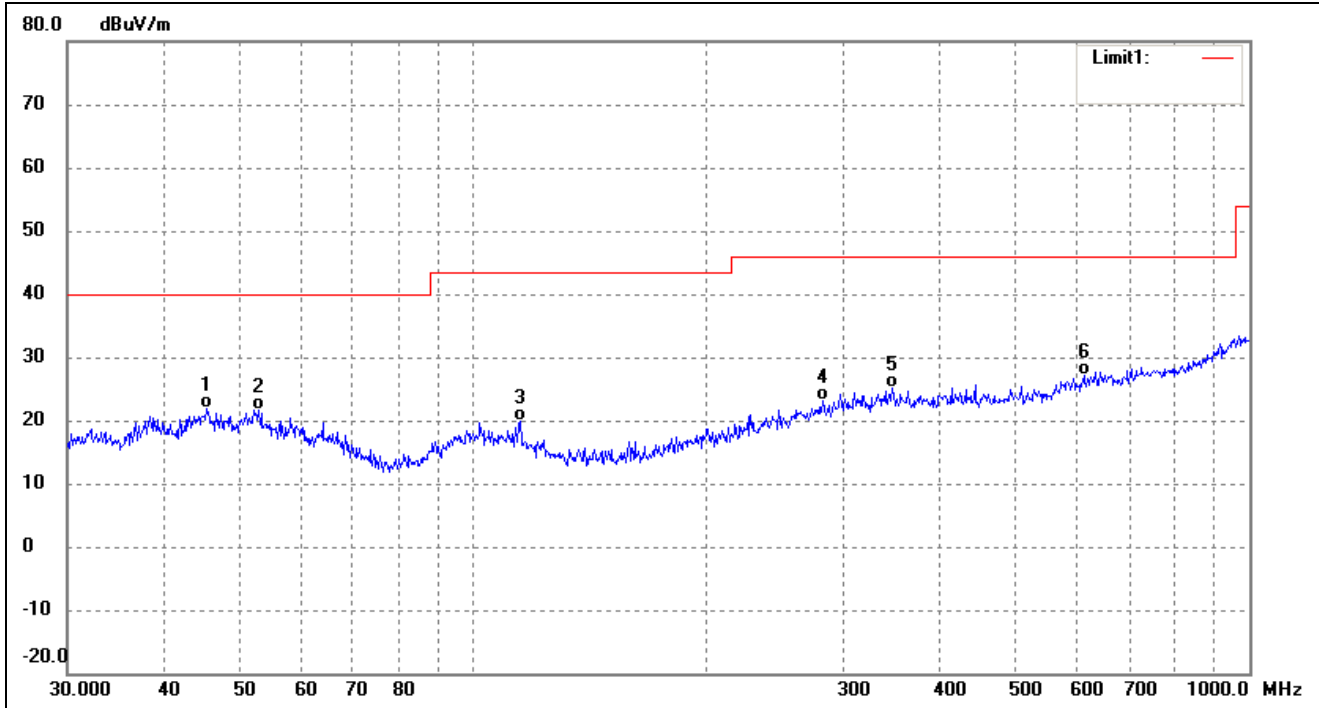


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	45.3755	34.82	-12.95	21.87	40.00	-18.13	277	100	QP
2	52.9453	34.49	-12.88	21.61	40.00	-18.39	98	100	QP
3	114.9169	34.56	-14.77	19.79	43.50	-23.71	178	100	QP
4	281.9946	31.47	-8.29	23.18	46.00	-22.82	91	100	QP
5	346.8092	31.60	-6.49	25.11	46.00	-20.89	128	100	QP
6	612.0642	30.93	-3.88	27.05	46.00	-18.95	137	100	QP

802.11b			
Test Channel	Low	Polarity:	Vertical

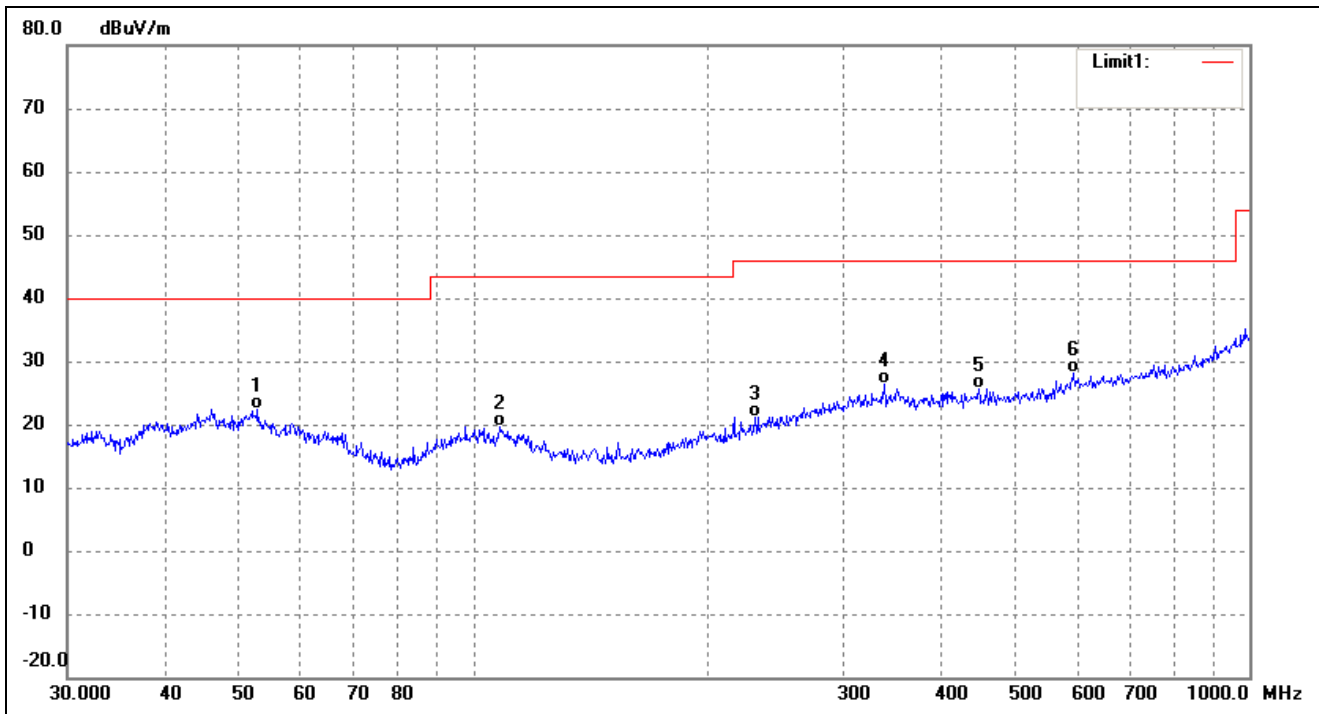


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	52.7600	35.32	-12.87	22.45	40.00	-17.55	220	100	QP
2	108.2667	33.57	-13.96	19.61	43.50	-23.89	248	100	QP
3	230.9068	31.91	-10.72	21.19	46.00	-24.81	81	100	QP
4	338.4001	32.94	-6.56	26.38	46.00	-19.62	228	100	QP
5	447.9822	32.02	-6.46	25.56	46.00	-20.44	78	100	QP
6	593.0497	32.02	-4.00	28.02	46.00	-17.98	262	100	QP

802.11b			
Test Channel	Middle	Polarity:	Horizontal

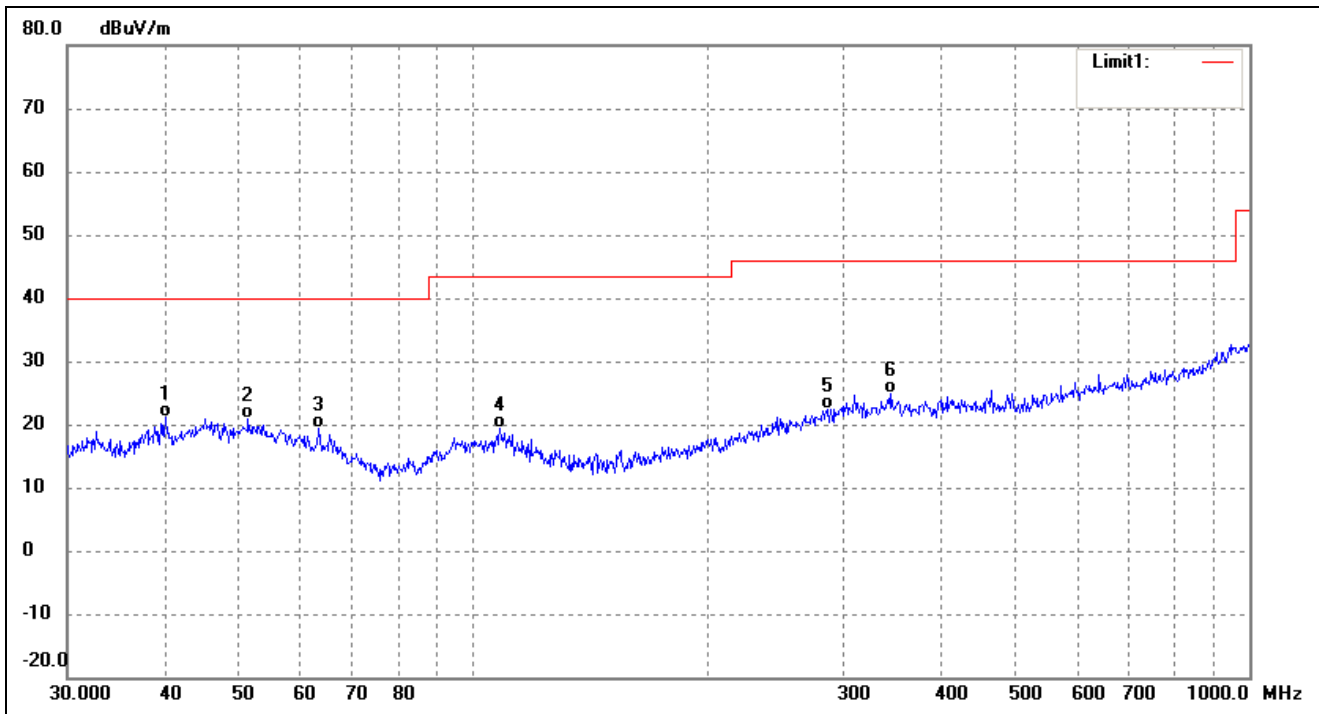


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	40.1347	35.15	-13.97	21.18	40.00	-18.82	84	100	QP
2	51.3005	33.68	-12.85	20.83	40.00	-19.17	172	100	QP
3	63.3132	34.31	-15.02	19.29	40.00	-20.71	136	100	QP
4	108.2667	33.25	-13.96	19.29	43.50	-24.21	94	100	QP
5	285.9778	30.63	-8.19	22.44	46.00	-23.56	149	100	QP
6	345.5952	31.26	-6.50	24.76	46.00	-21.24	244	100	QP

802.11b			
Test Channel	Middle	Polarity:	Vertical

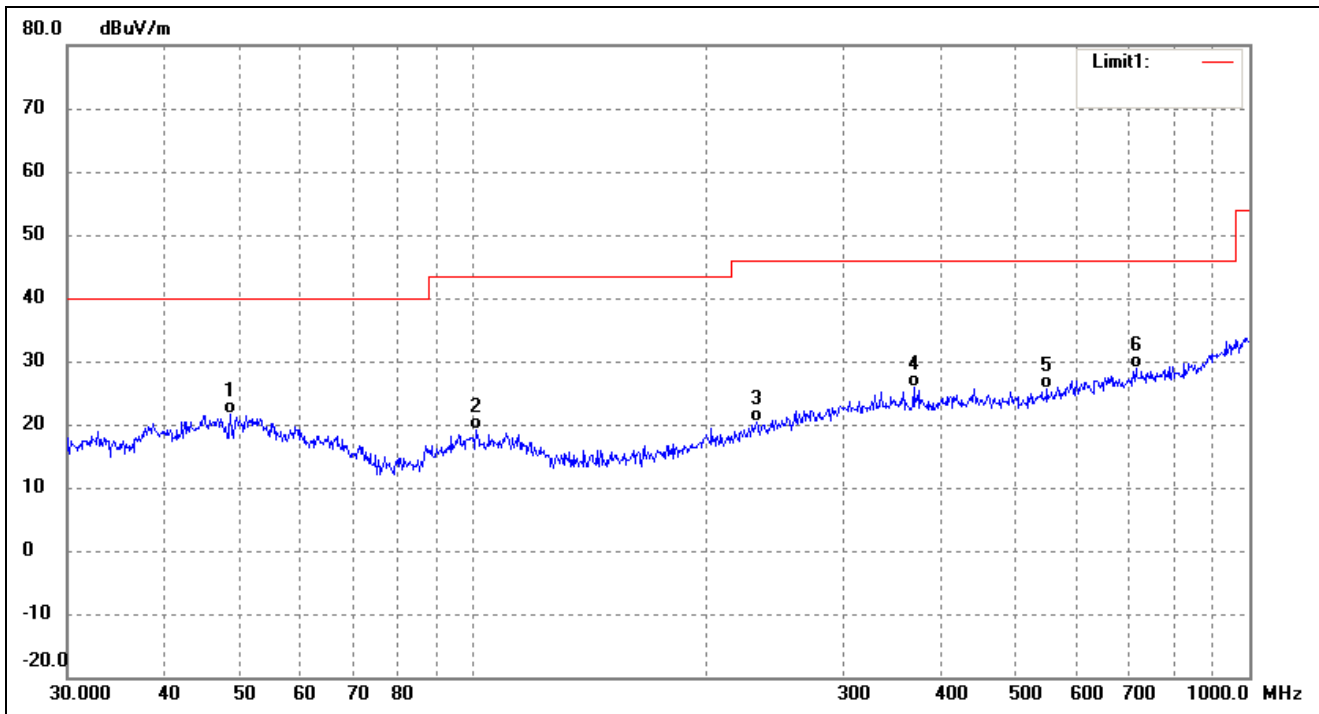


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	48.6719	34.35	-12.82	21.53	40.00	-18.47	184	100	QP
2	100.9340	33.45	-14.38	19.07	43.50	-24.43	154	100	QP
3	231.7179	30.98	-10.70	20.28	46.00	-25.72	125	100	QP
4	369.4047	32.90	-7.02	25.88	46.00	-20.12	98	100	QP
5	549.0195	31.03	-5.36	25.67	46.00	-20.33	219	100	QP
6	714.1734	31.37	-2.42	28.95	46.00	-17.05	286	100	QP

802.11b			
Test Channel	High	Polarity:	Horizontal

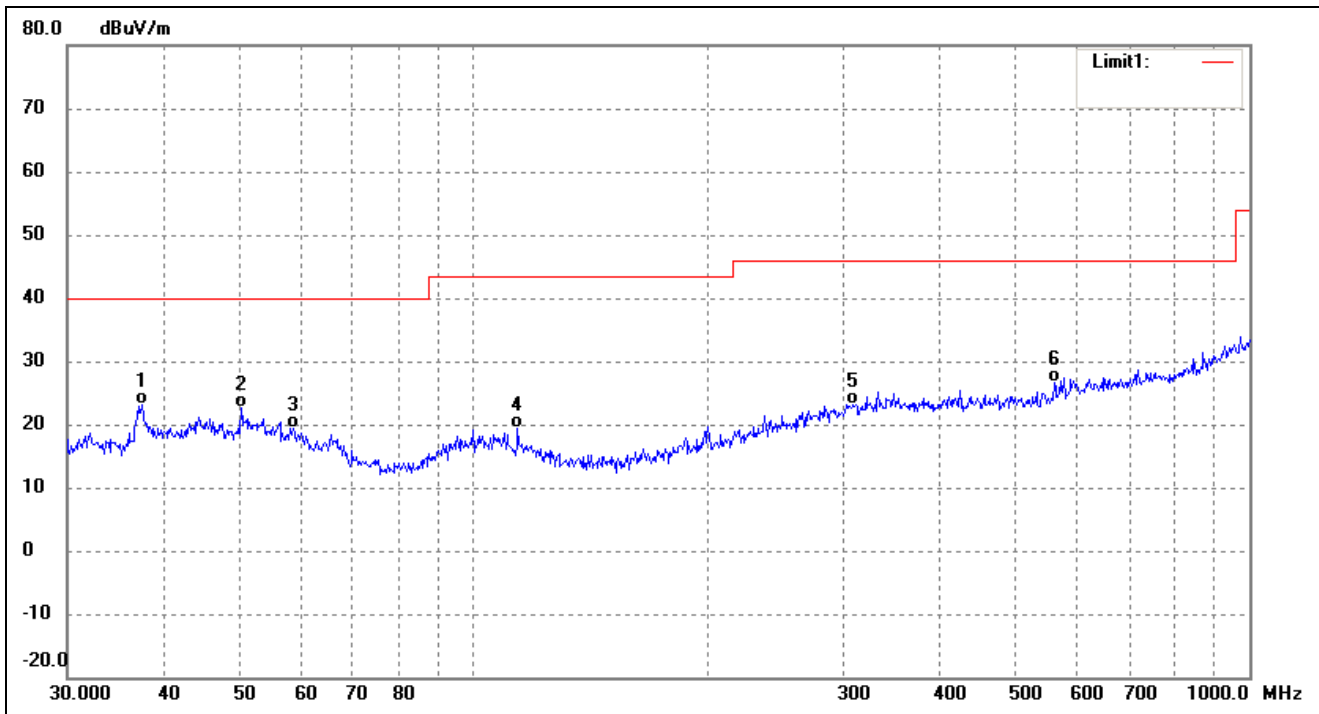

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	37.4165	37.94	-14.73	23.21	40.00	-16.79	225	100	QP
2	50.2325	35.50	-12.92	22.58	40.00	-17.42	225	100	QP
3	58.6126	33.59	-14.33	19.26	40.00	-20.74	82	100	QP
4	114.1138	34.01	-14.63	19.38	43.50	-24.12	98	100	QP
5	308.9126	30.35	-7.21	23.14	46.00	-22.86	114	100	QP
6	560.6928	31.58	-4.92	26.66	46.00	-19.34	312	100	QP

802.11b			
Test Channel	High	Polarity:	Vertical

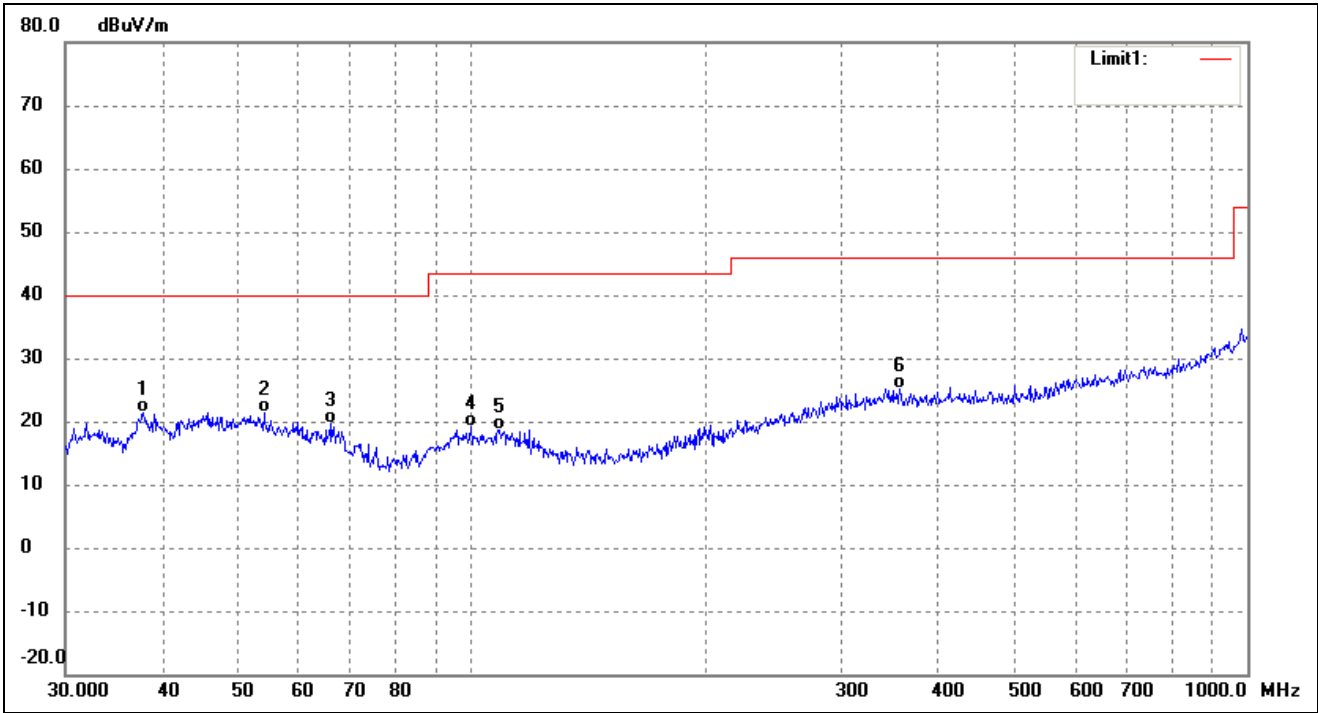

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	37.8121	35.93	-14.54	21.39	40.00	-18.61	326	100	QP
2	54.0711	34.50	-13.00	21.50	40.00	-18.50	97	100	QP
3	65.8031	35.13	-15.54	19.59	40.00	-20.41	162	100	QP
4	99.8777	33.64	-14.48	19.16	43.50	-24.34	118	100	QP
5	108.6470	32.70	-13.95	18.75	43.50	-24.75	203	100	QP
6	356.6758	31.88	-6.69	25.19	46.00	-20.81	216	100	QP

➤ Spurious Emissions Below 1GHz

➤ Test Mode: 802.11b (worst case)

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2412MHz							
4824.00	60.85	-3.87	56.98	74.00	-17.02	H	PK
4824.00	45.54	-3.87	41.67	54.00	-12.33	H	AV
7236.00	56.44	1.14	57.58	74.00	-16.42	H	PK
7236.00	42.96	1.19	44.15	54.00	-9.85	H	AV
4824.00	61.51	-3.86	57.65	74.00	-16.35	V	PK
4824.00	47.57	-3.86	43.71	54.00	-10.29	V	AV
7236.00	55.56	1.10	56.66	74.00	-17.34	V	PK
7236.00	40.88	1.10	41.98	54.00	-12.02	V	AV
Middle Channel-2437MHz							
4874.00	59.37	-3.74	55.63	74.00	-18.37	H	PK
4874.00	45.38	-3.74	41.64	54.00	-12.36	H	AV
7311.00	56.21	1.47	57.68	74.00	-16.32	H	PK
7311.00	41.12	1.47	42.59	54.00	-11.41	H	AV
4874.00	60.91	-3.74	57.17	74.00	-16.83	V	PK
4874.00	47.49	-3.74	43.75	54.00	-10.25	V	AV
7311.00	55.18	1.47	56.65	74.00	-17.35	V	PK
7311.00	42.25	1.47	43.72	54.00	-10.28	V	AV
High Channel-2462MHz							
4924.00	60.26	-3.59	56.67	74.00	-17.33	H	PK
4924.00	46.07	-3.59	42.48	54.00	-11.52	H	AV
7386.00	55.78	1.79	57.57	74.00	-16.43	H	PK
7386.00	40.92	1.79	42.71	54.00	-11.29	H	AV
4924.00	60.23	-3.59	56.64	74.00	-17.36	V	PK
4924.00	46.31	-3.59	42.72	54.00	-11.28	V	AV
7386.00	56.89	1.79	58.68	74.00	-15.32	V	PK
7440.00	41.30	1.79	43.09	54.00	-10.91	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

9. Out of Band Emissions

9.1 Standard Applicable

According to §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

9.2 Test Procedure

According to the KDB 558074D01 v04, the band-edge radiated test method as follows:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated bandedge measurements.

According to the KDB 558074 D01 v04, the conducted spurious emissions test method as follows:


1. Set start frequency to DTS channel edge frequency.
2. Set stop frequency so as to encompass the spectrum to be examined.
3. Set RBW = 100 kHz.
4. Set VBW \geq 300 kHz.
5. Detector = peak.
6. Trace Mode = max hold.
7. Sweep = auto couple.
8. Allow the trace to stabilize (this may take some time, depending on the extent of the span).
9. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

9.3 Summary of Test Results/Plots


➤ Radiated test

802.11b			
Test Channel	Low	Polarity:	Vertical(worst case)

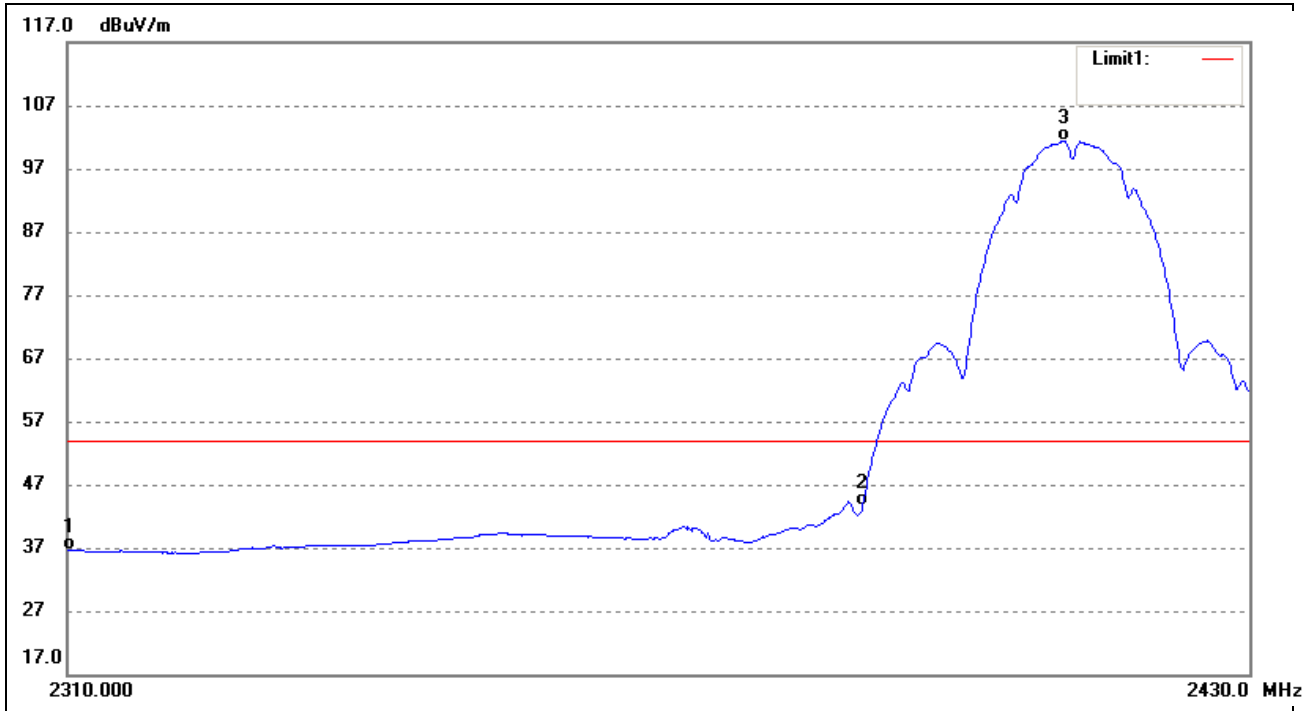


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	44.35	-7.78	36.57	54.00	-17.43	Average Detector
	2310.000	55.72	-7.78	47.94	74.00	-26.06	Peak Detector
2	2390.000	51.02	-7.32	43.70	54.00	-10.30	Average Detector
	2390.000	60.34	-7.32	53.02	74.00	-20.98	Peak Detector
3	2410.756	108.60	-7.19	101.41	/	/	Average Detector
	2410.633	112.99	-7.19	105.80	/	/	Peak Detector

802.11b			
Test Channel	High	Polarity:	Vertical(worst case)

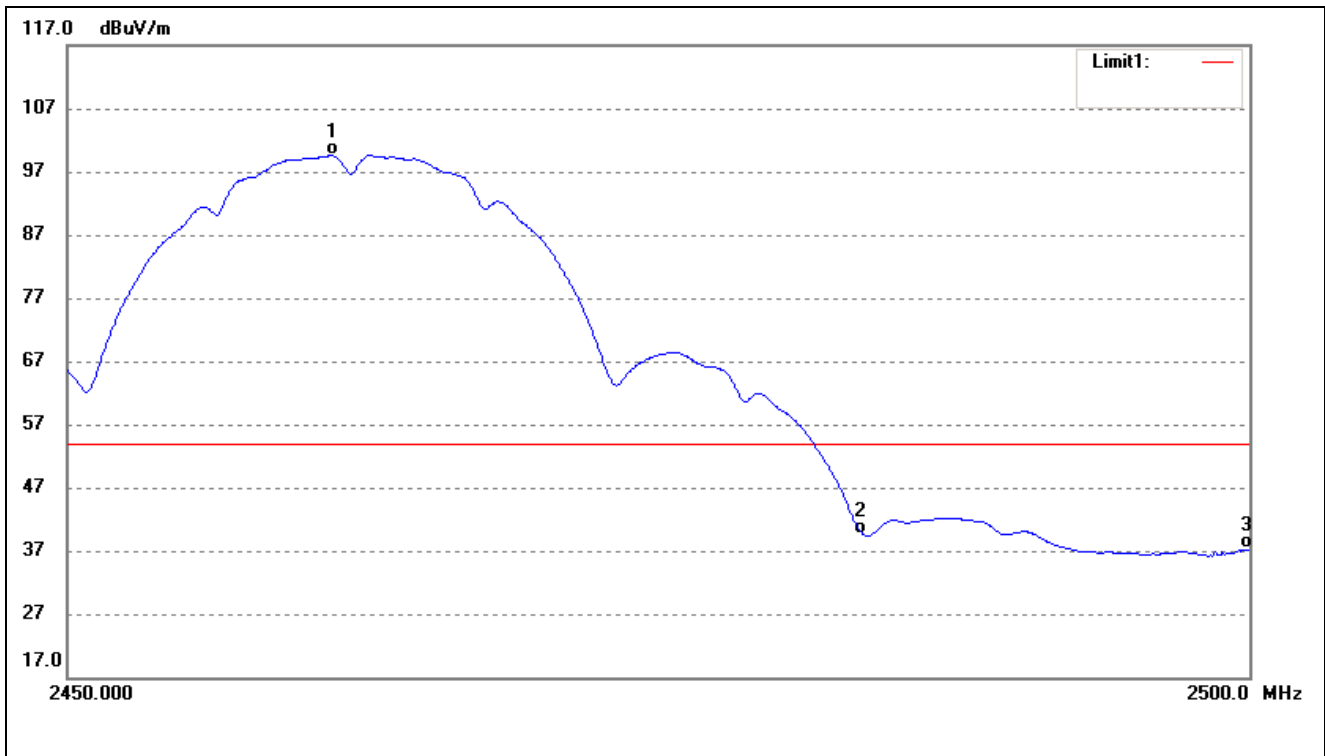


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2461.063	106.49	-6.90	99.59	/	/	Average Detector
	2463.251	111.09	-6.89	104.20	/	/	Peak Detector
2	2483.500	46.41	-6.77	39.64	54.00	-14.36	Average Detector
	2483.500	61.67	-6.77	54.90	74.00	-19.10	Peak Detector
3	2500.000	43.93	-6.67	37.26	54.00	-16.74	Average Detector
	2500.000	56.16	-6.67	49.49	74.00	-24.51	Peak Detector

802.11g			
Test Channel	Low	Polarity:	Vertical(worst case)

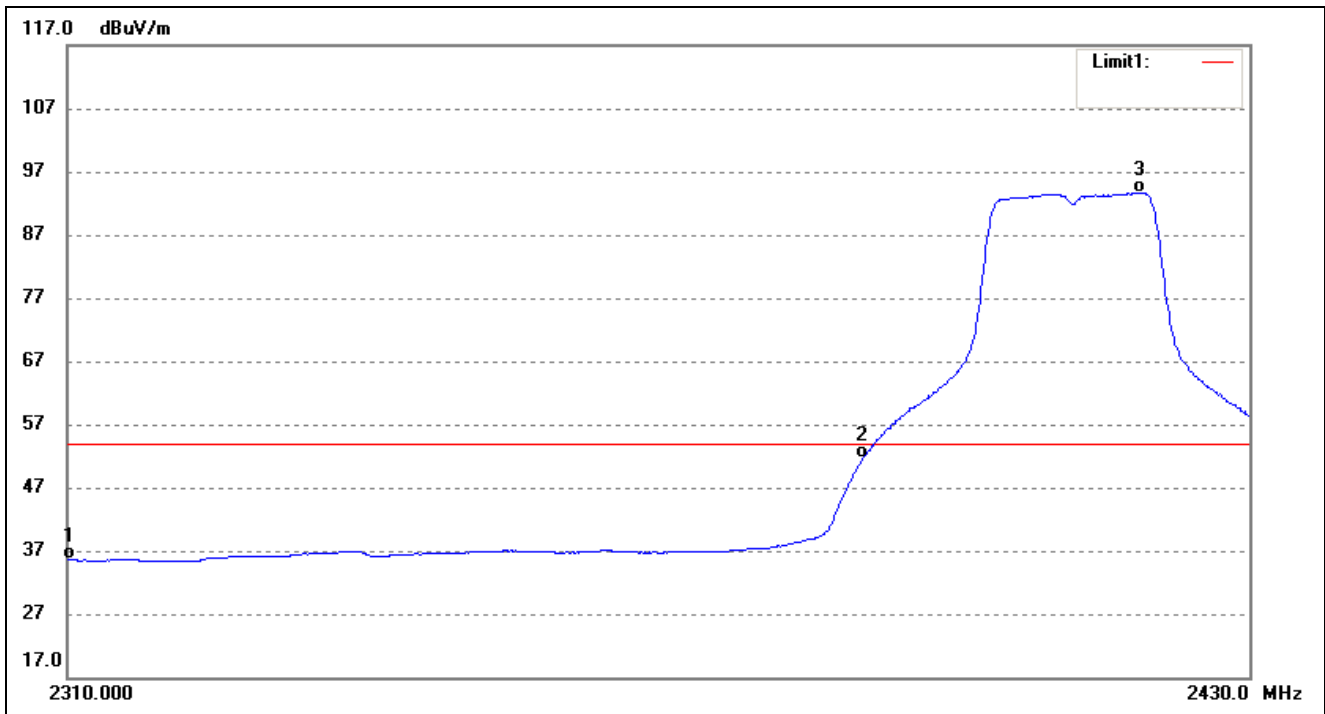


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	43.33	-7.78	35.55	54.00	-18.45	Average Detector
	2310.000	55.60	-7.78	47.82	74.00	-26.18	Peak Detector
2	2390.000	58.86	-7.32	51.54	54.00	-2.46	Average Detector
	2390.000	79.43	-7.32	72.11	74.00	-1.89	Peak Detector
3	2418.582	100.81	-7.15	93.66	/	/	Average Detector
	2409.901	111.72	-7.19	104.53	/	/	Peak Detector

802.11g			
Test Channel	High	Polarity:	Vertical(worst case)

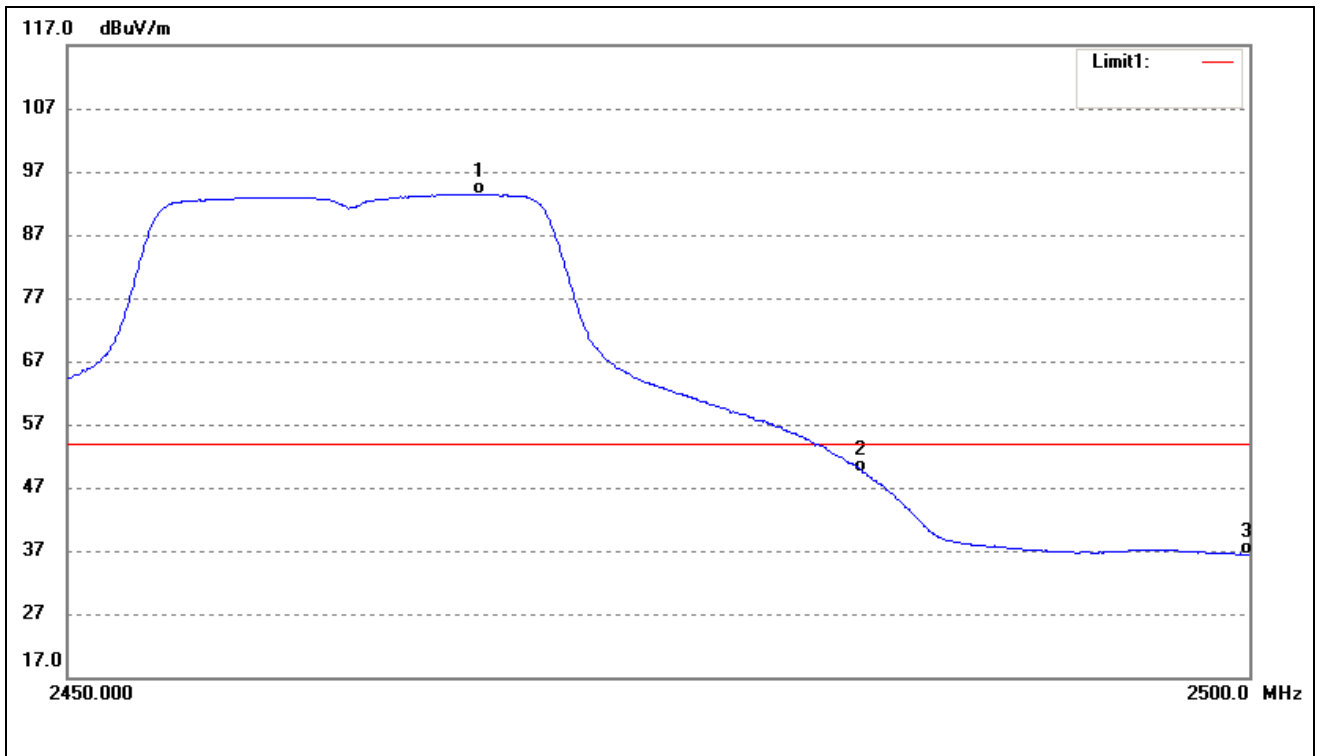


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2467.335	100.34	-6.86	93.48	/	/	Average Detector
	2463.401	111.45	-6.89	104.56	/	/	Peak Detector
2	2483.500	56.21	-6.77	49.44	54.00	-4.56	Average Detector
	2483.500	78.98	-6.77	72.21	74.00	-1.79	Peak Detector
3	2500.000	43.12	-6.67	36.45	54.00	-17.55	Average Detector
	2500.000	56.34	-6.67	49.67	74.00	-24.33	Peak Detector

802.11n-HT20			
Test Channel	Low	Polarity:	Vertical(worst case)

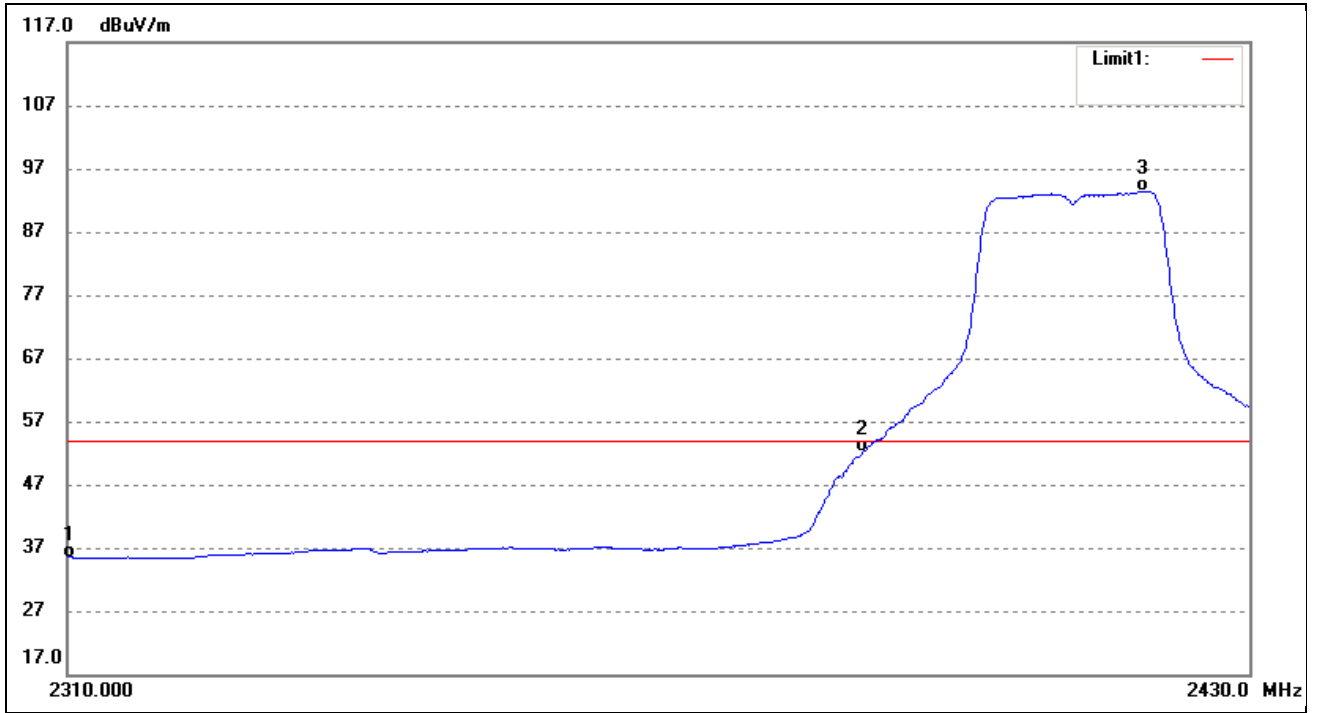


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	43.28	-7.78	35.50	54.00	-18.50	Average Detector
	2310.000	55.12	-7.78	47.34	74.00	-26.66	Peak Detector
2	2390.000	59.33	-7.32	52.01	54.00	-1.99	Average Detector
	2390.000	79.23	-7.32	71.91	74.00	-2.09	Peak Detector
3	2418.827	100.47	-7.14	93.33	/	/	Average Detector
	2417.480	111.20	-7.15	104.05	/	/	Peak Detector

802.11n-HT20			
Test Channel	High	Polarity:	Vertical(worst case)

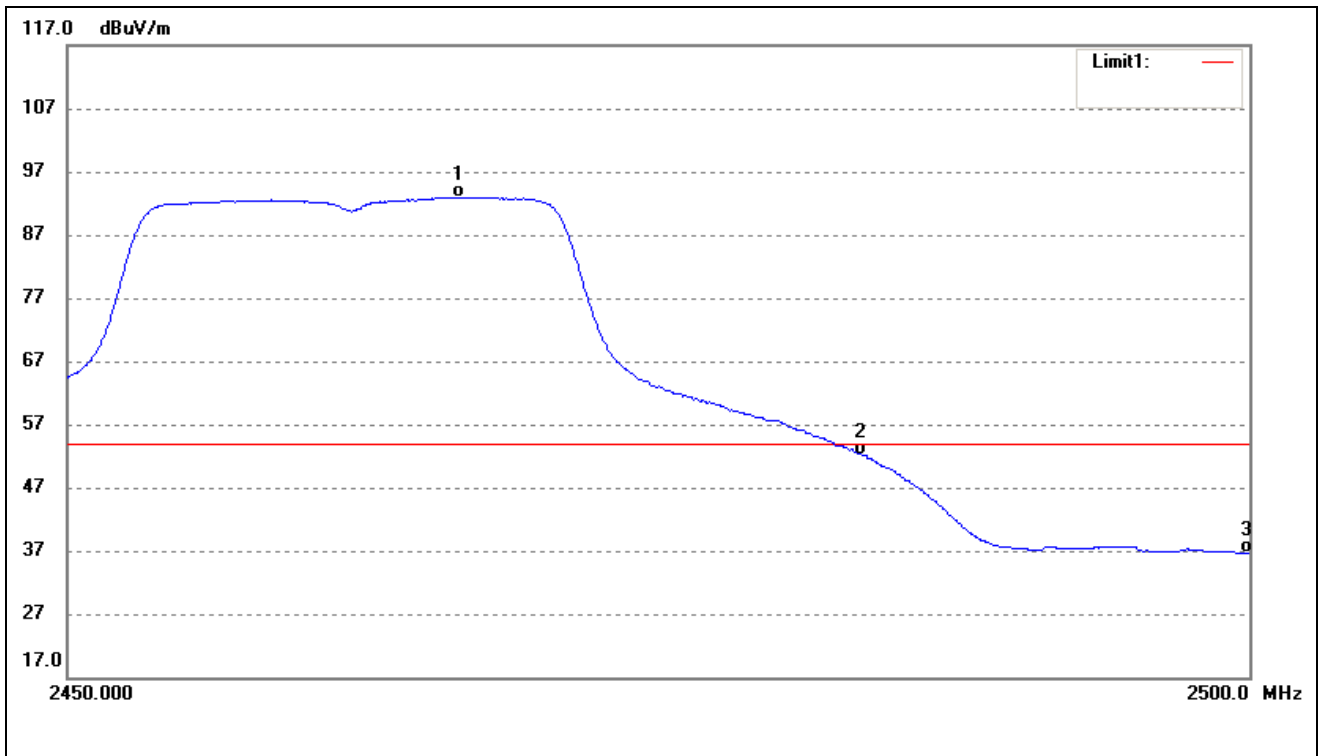


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2466.438	99.79	-6.86	92.93	/	/	Average Detector
	2466.438	111.48	-6.86	104.62	/	/	Peak Detector
2	2483.500	58.93	-6.77	52.16	54.00	-1.84	Average Detector
	2483.500	78.21	-6.77	71.44	74.00	-2.56	Peak Detector
3	2500.000	43.39	-6.67	36.72	54.00	-17.28	Average Detector
	2500.000	56.30	-6.67	49.63	74.00	-24.37	Peak Detector

802.11n-HT40			
Test Channel	Low	Polarity:	Vertical(worst case)

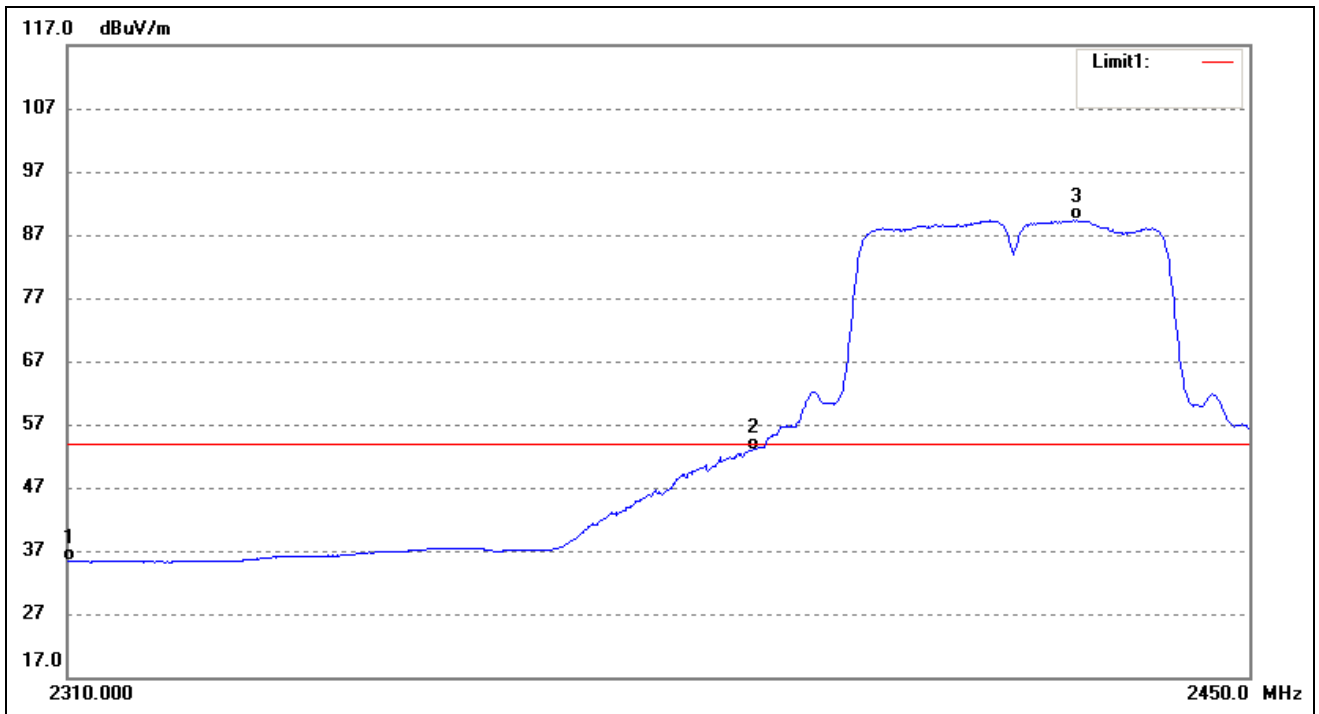

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	43.14	-7.78	35.36	54.00	-18.64	Average Detector
	2310.000	55.36	-7.78	47.58	74.00	-26.42	Peak Detector
2	2390.000	60.23	-7.32	52.91	54.00	-1.09	Average Detector
	2390.000	78.28	-7.32	70.96	74.00	-3.04	Peak Detector
3	2429.043	96.38	-7.08	89.30	/	/	Average Detector
	2418.916	107.88	-7.14	100.74	/	/	Peak Detector

802.11n-HT40			
Test Channel	High	Polarity:	Vertical(worst case)


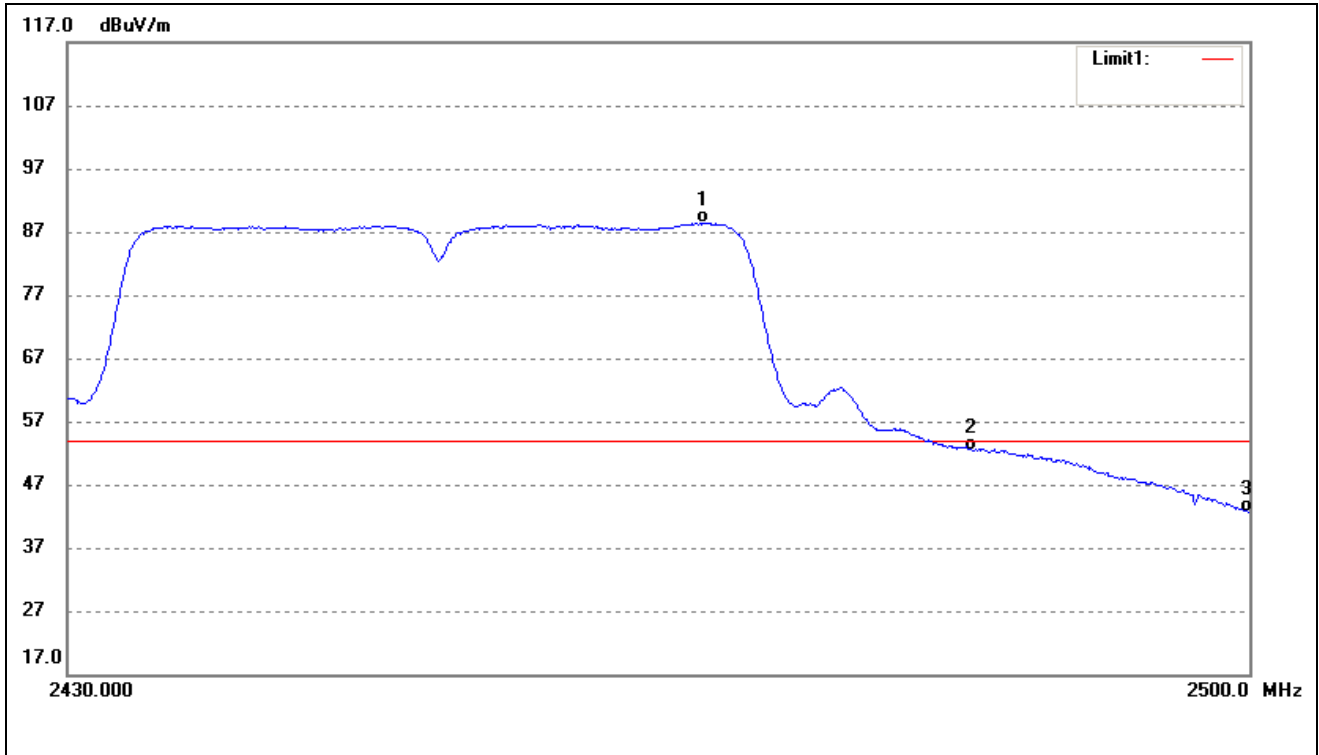


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2467.413	95.25	-6.86	88.39	/	/	Average Detector
	2437.049	106.81	-7.04	99.77	/	/	Peak Detector
2	2483.500	59.18	-6.77	52.41	54.00	-1.59	Average Detector
	2483.500	76.45	-6.77	69.68	74.00	-4.32	Peak Detector
3	2500.000	49.29	-6.67	42.62	54.00	-11.38	Average Detector
	2500.000	69.01	-6.67	62.34	74.00	-11.66	Peak Detector

➤ Conducted test



802.11b

Low

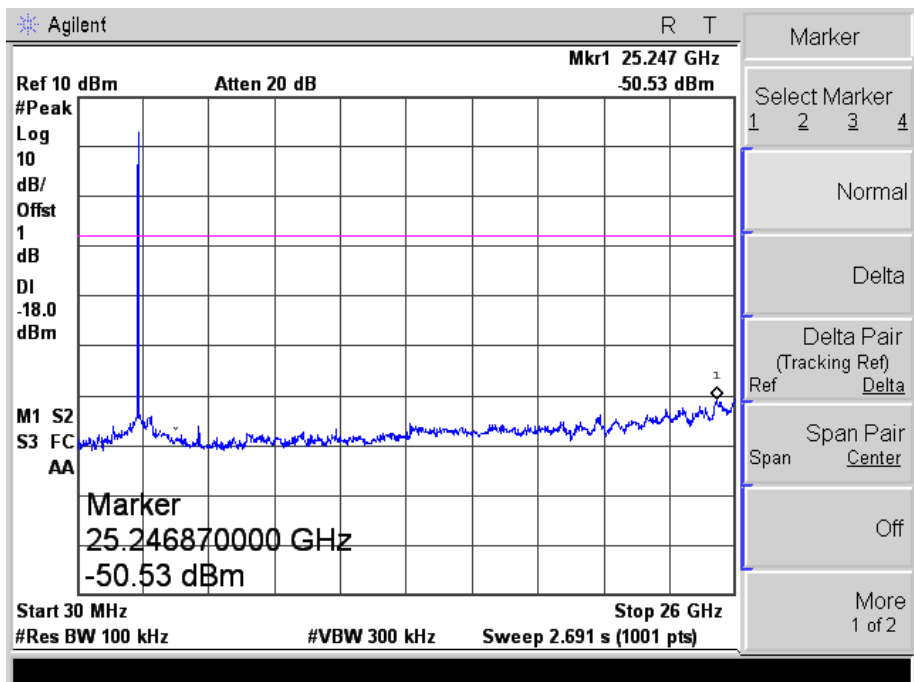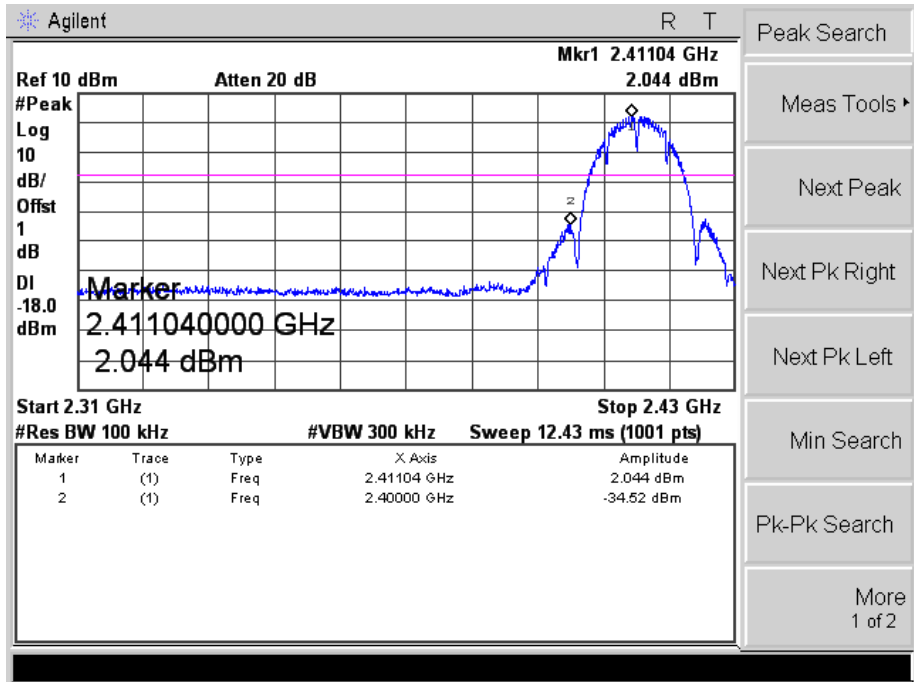



802.11b

Middle

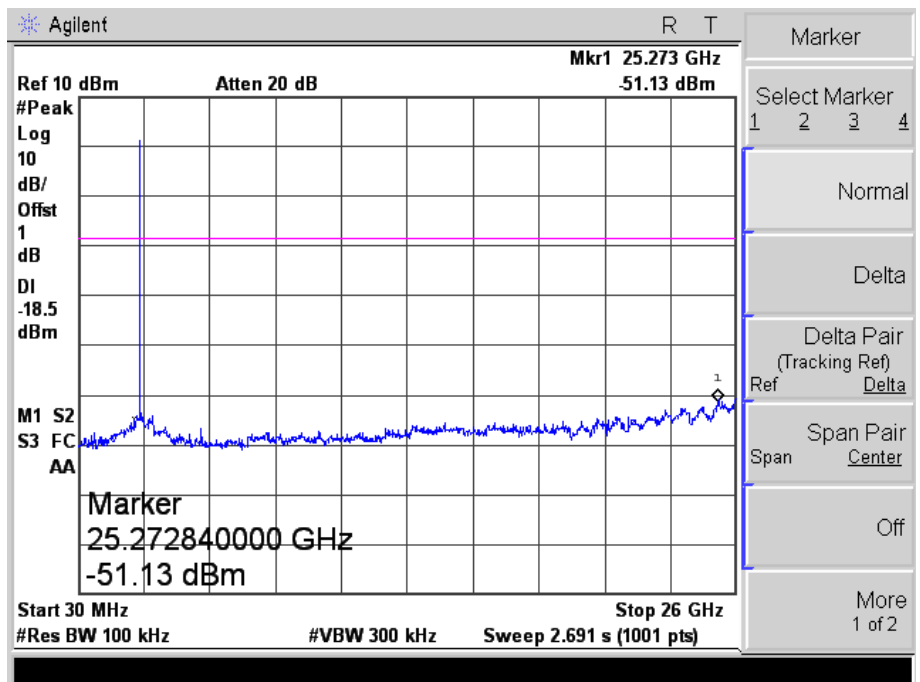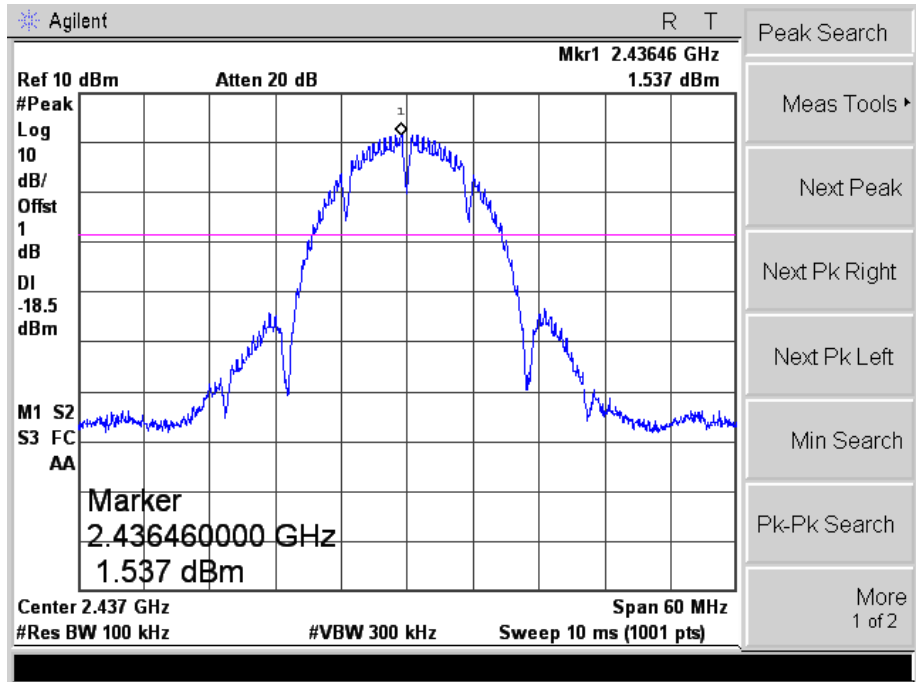



802.11b

High

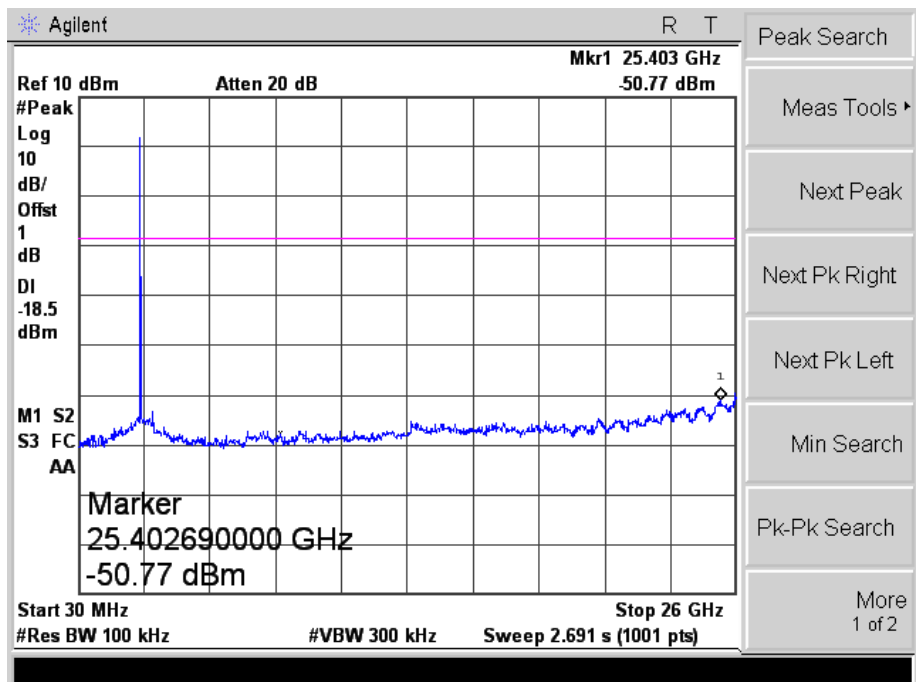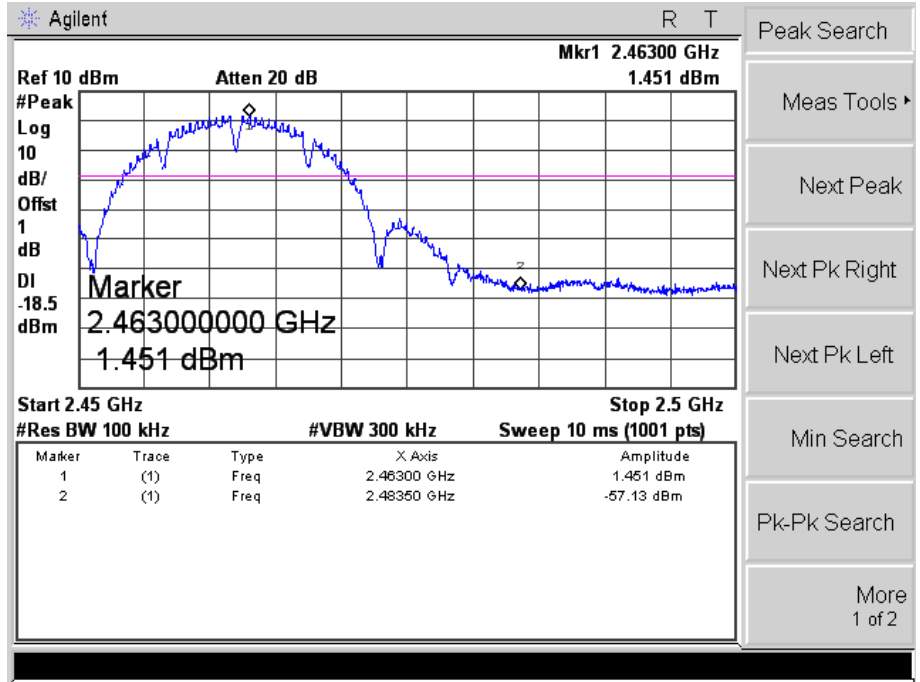



802.11g

Low

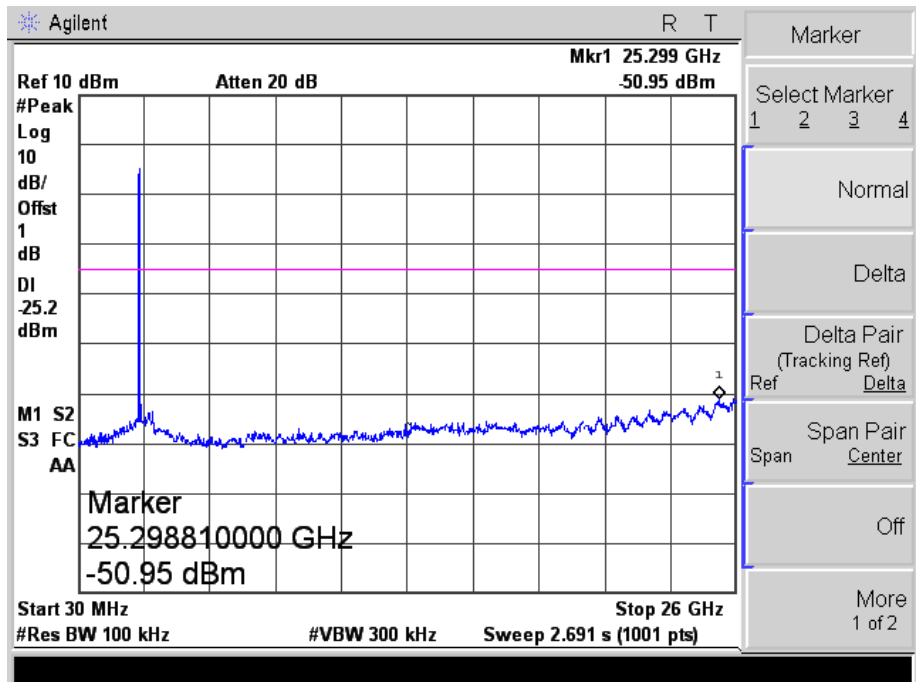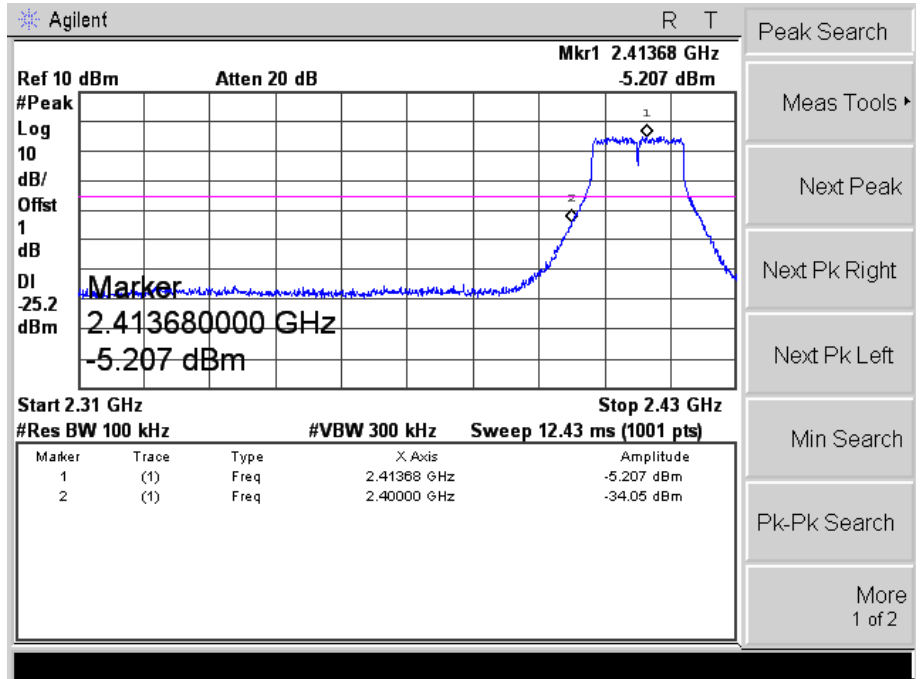



802.11g

Middle

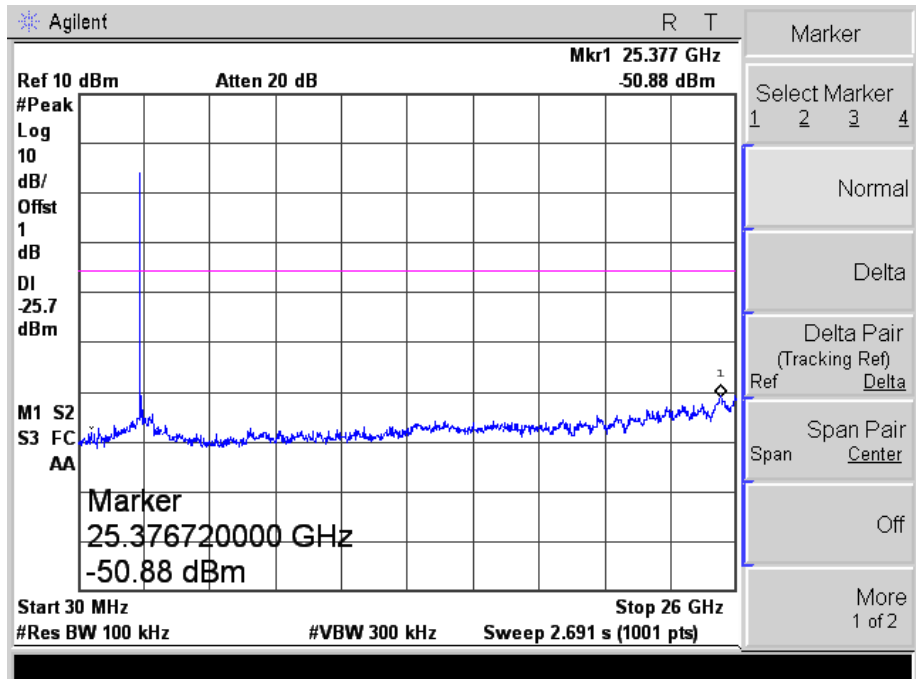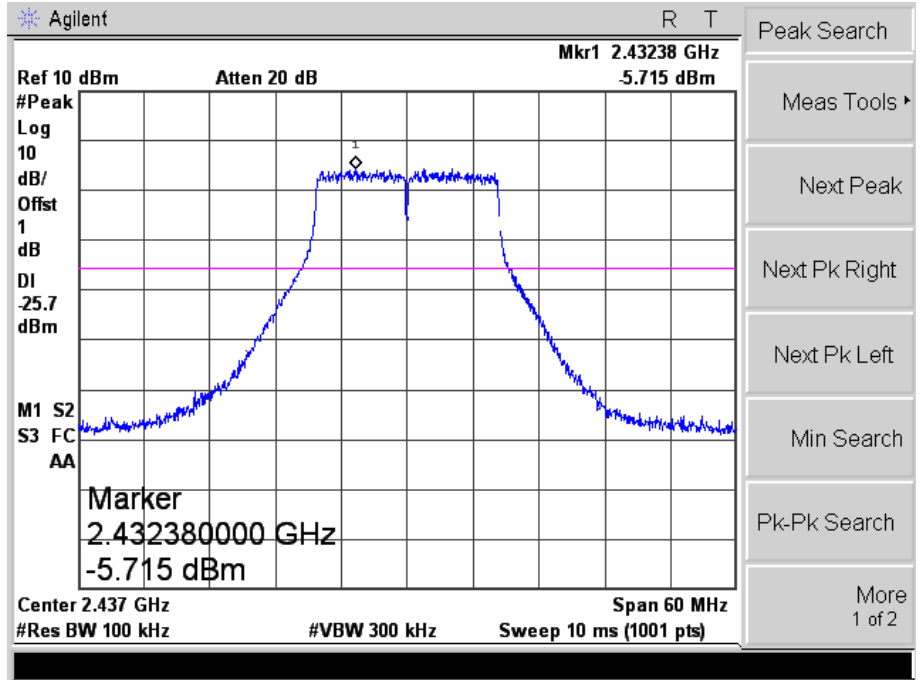



802.11g

High

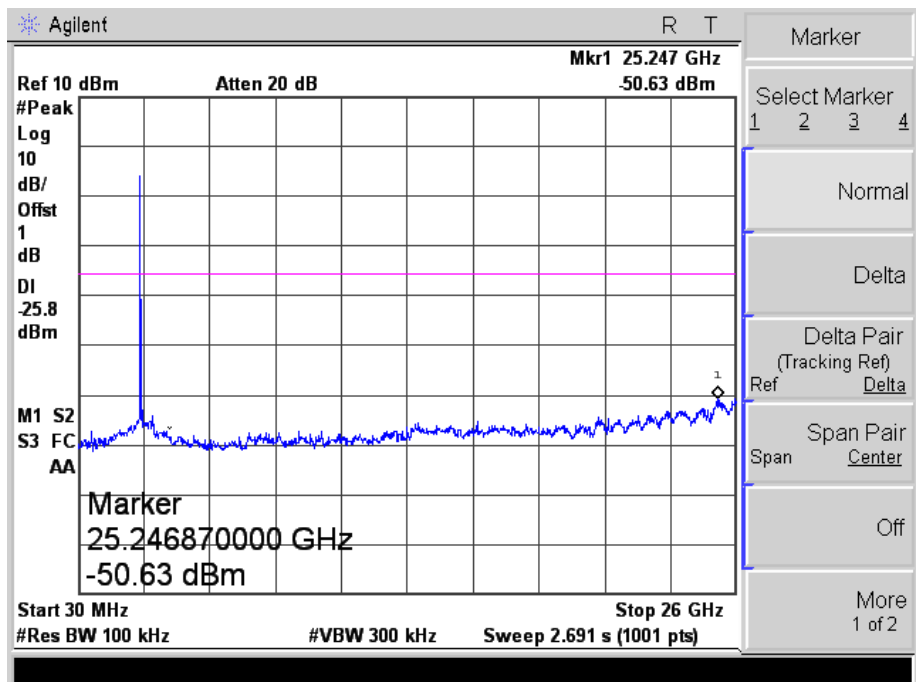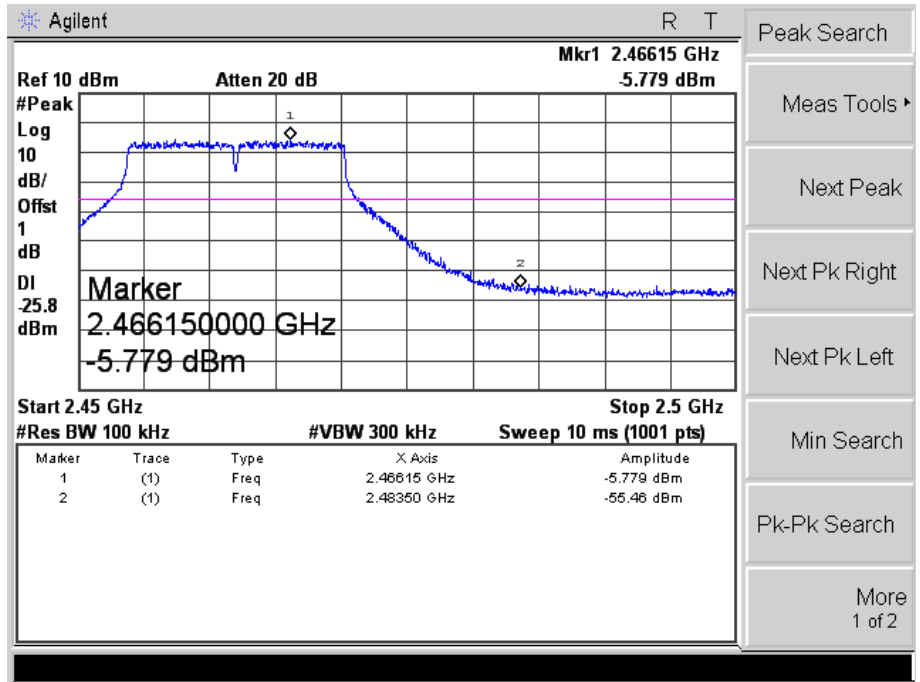



802.11n-HT20

Low

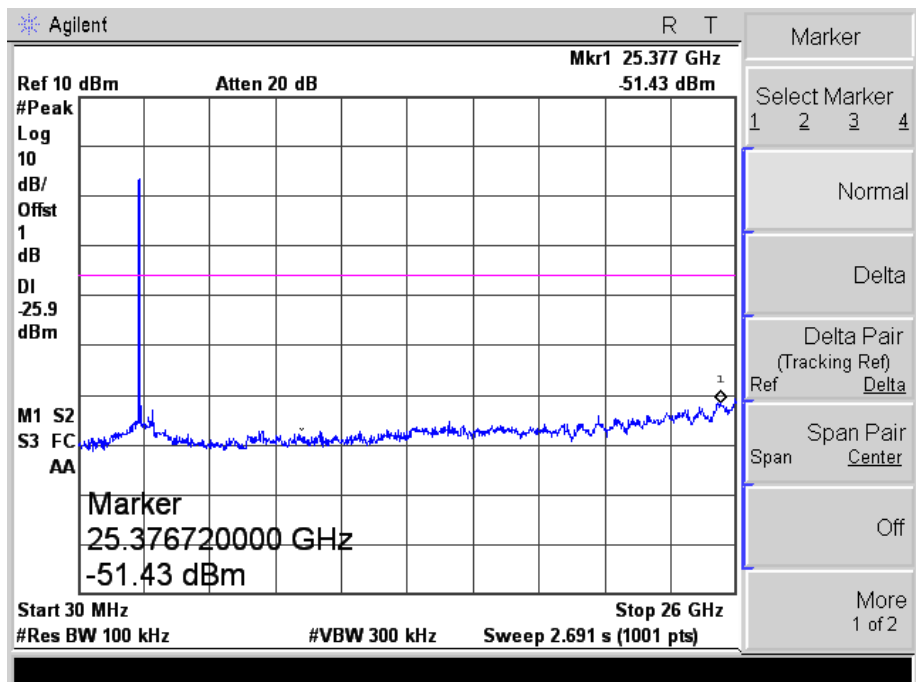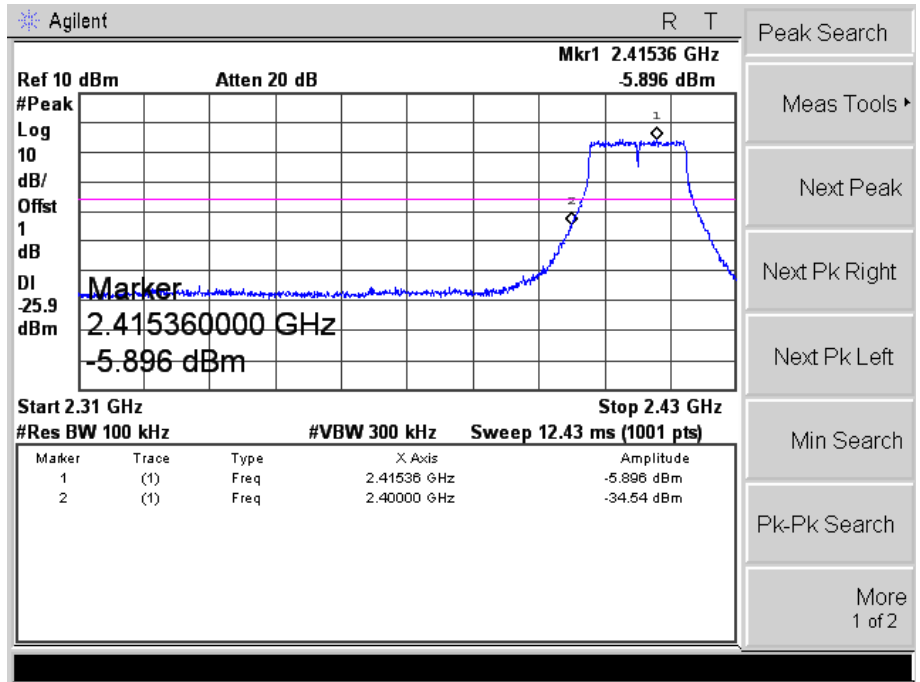



802.11n-HT20

Middle

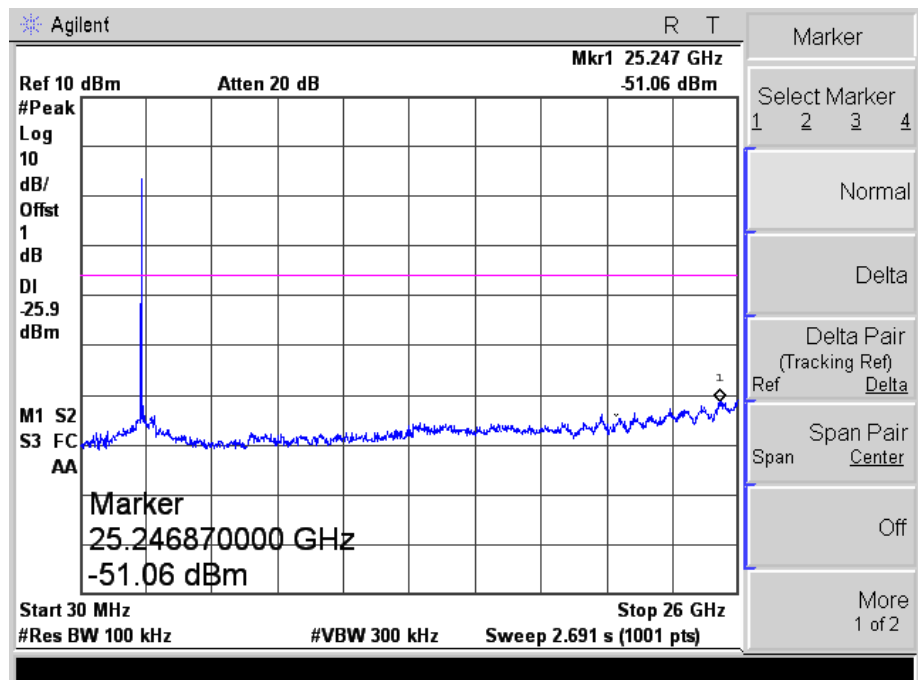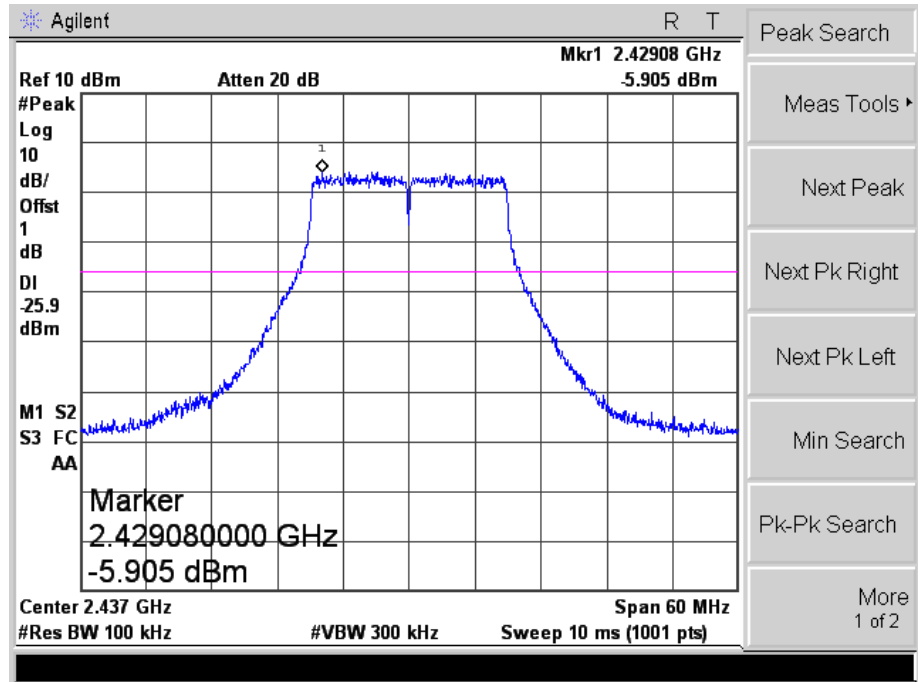



802.11n-HT20

High

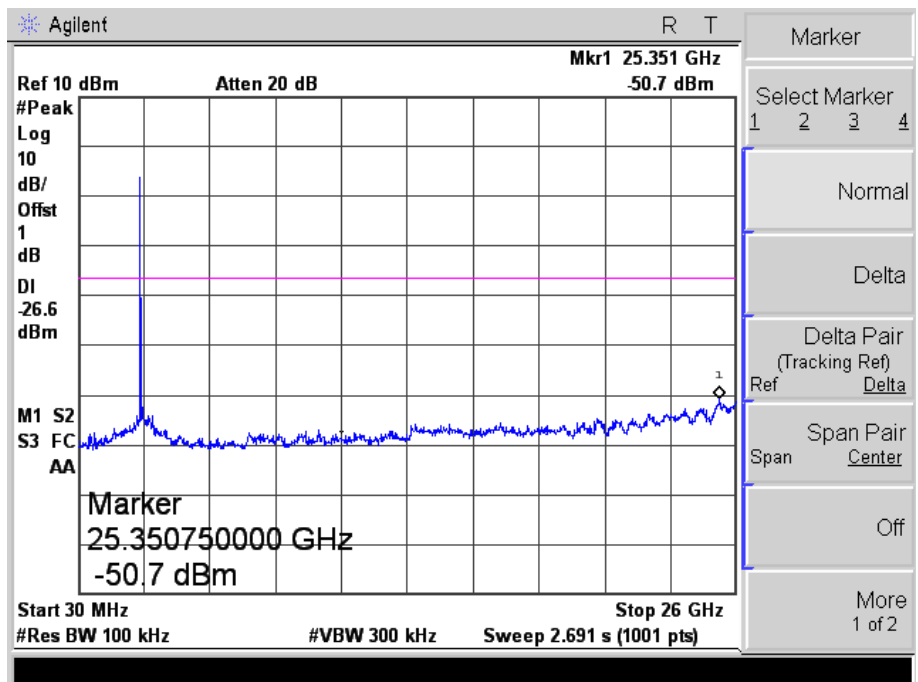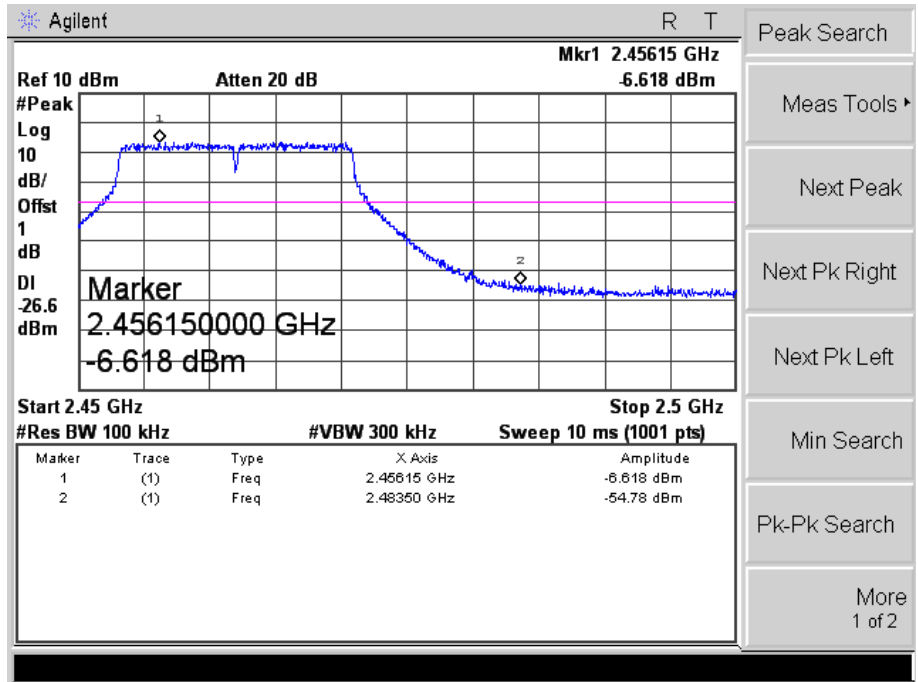



802.11n-HT40

Low

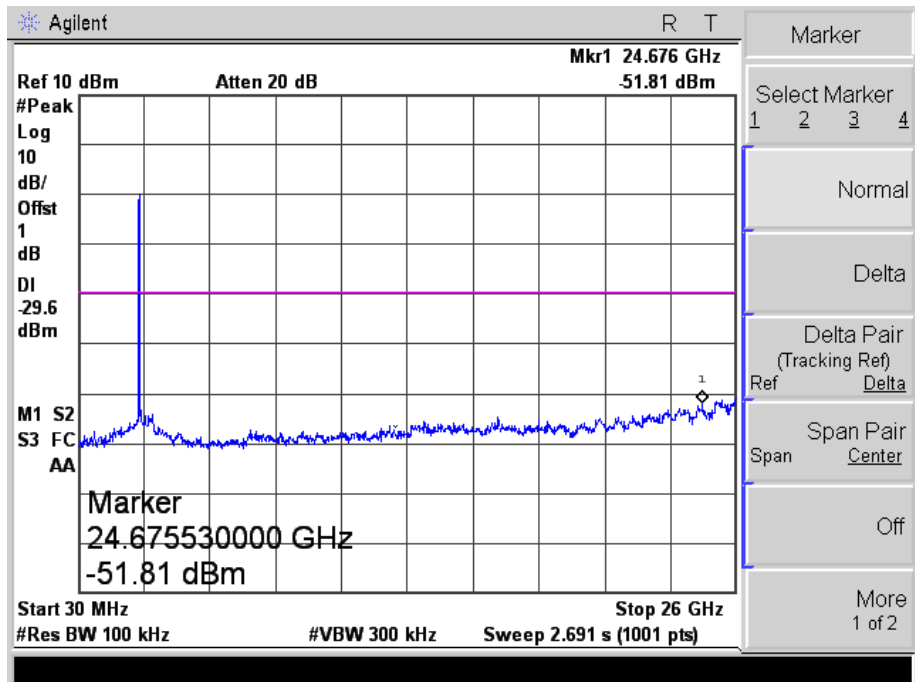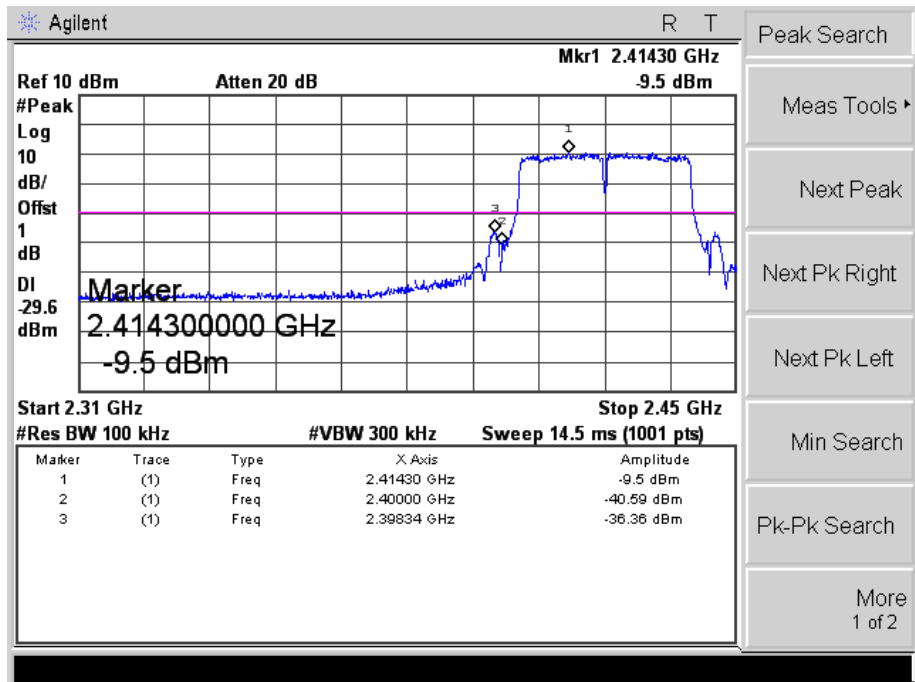



802.11n-HT40

Middle

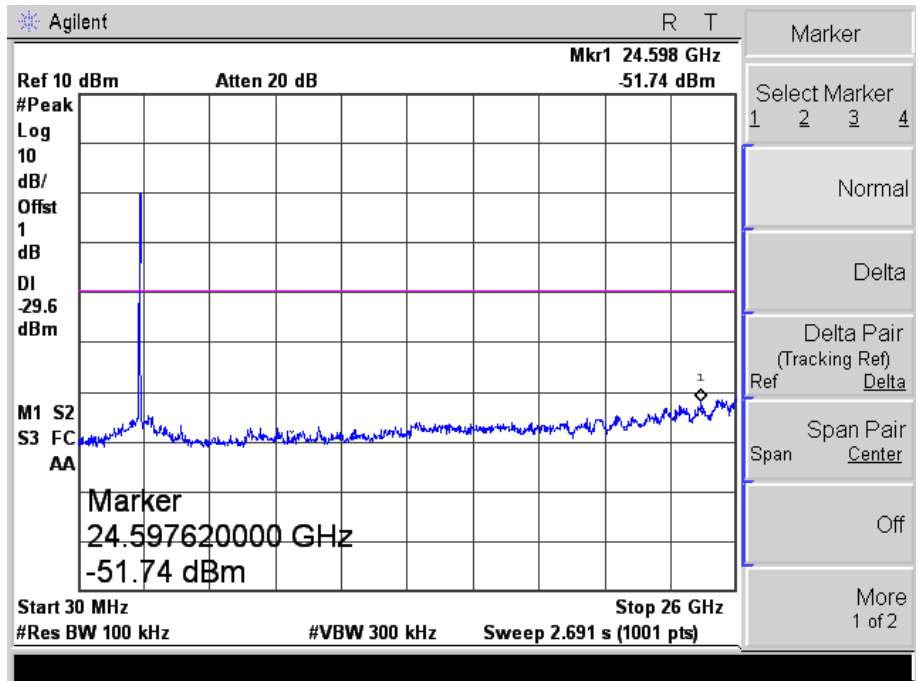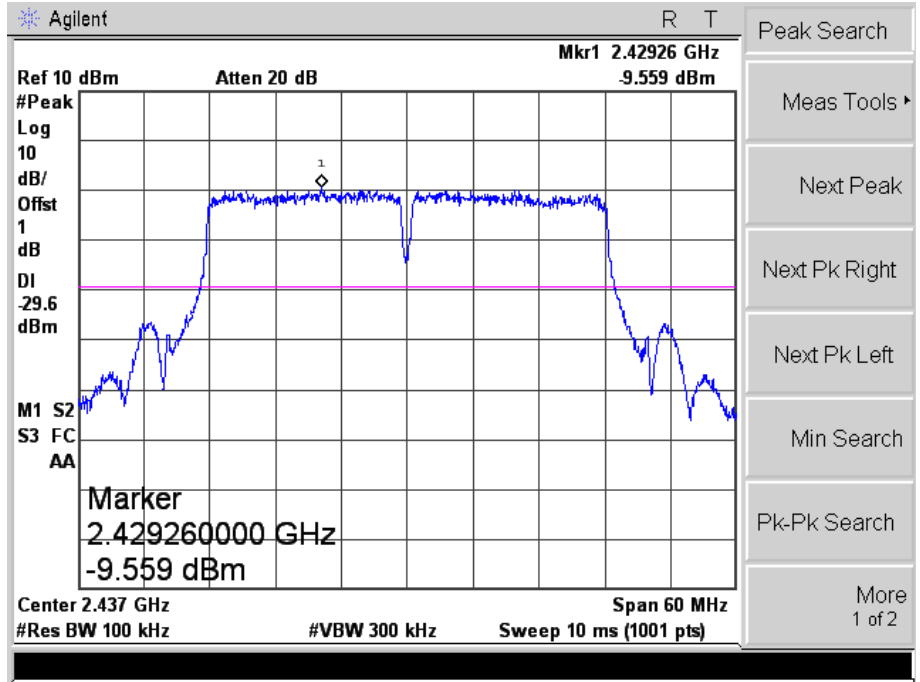

802.11n-HT40

High

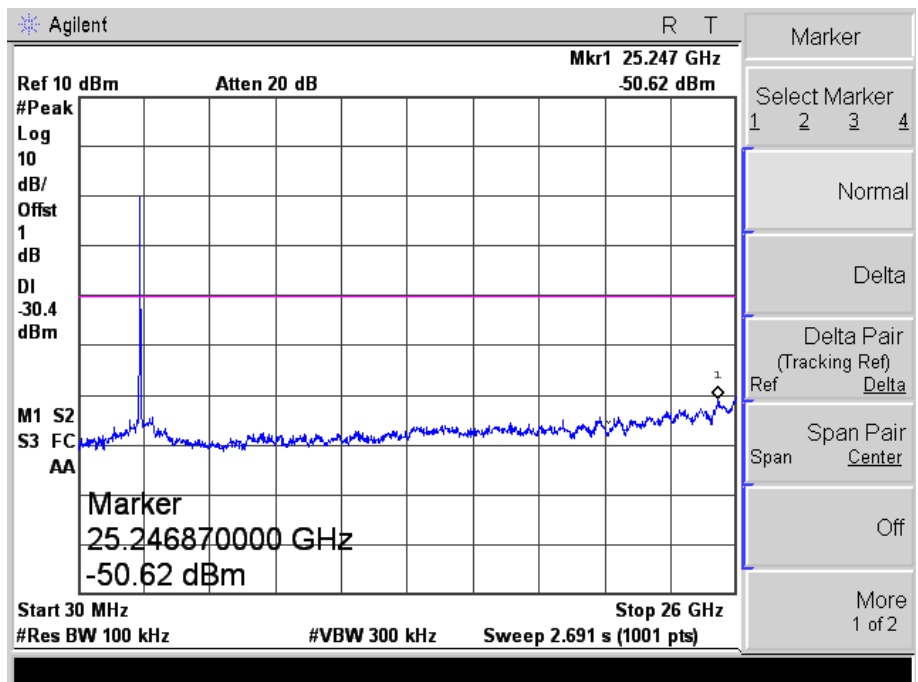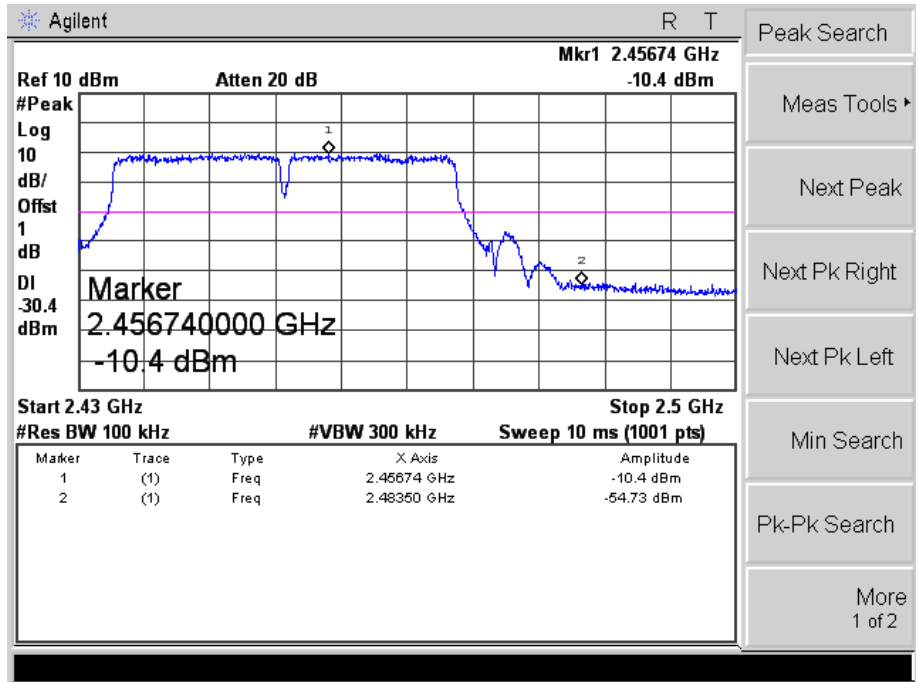


10. Conducted Emissions

10.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

10.2 Basic Test Setup Block Diagram

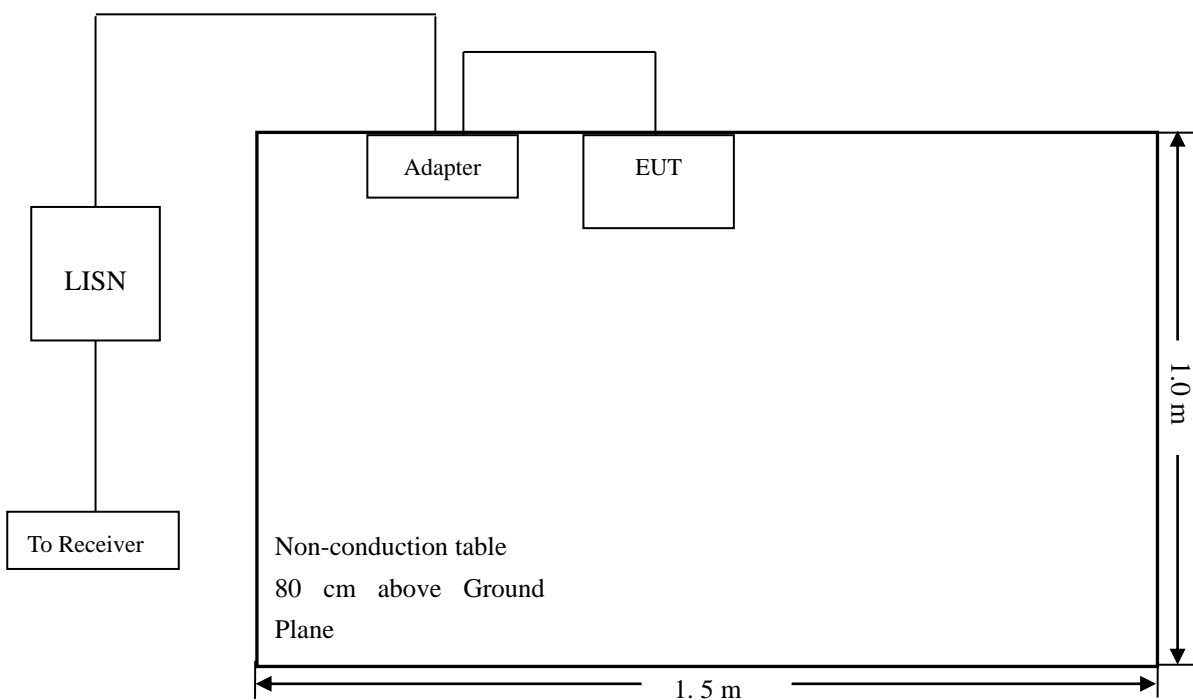


10.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency 150 kHz
 Stop Frequency 30 MHz
 Sweep Speed Auto
 IF Bandwidth..... 10 kHz
 Quasi-Peak Adapter Bandwidth 9 kHz
 Quasi-Peak Adapter Mode Normal


10.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

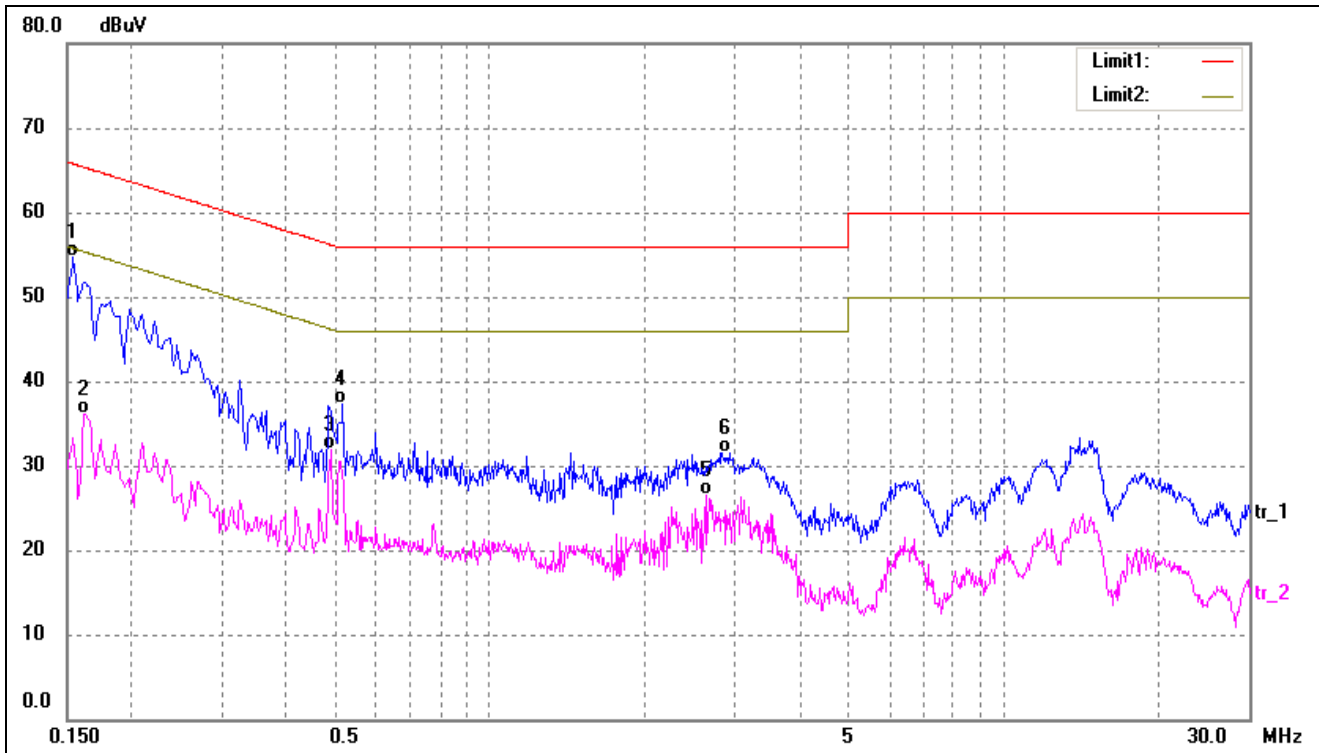

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1539	44.66	10.10	54.76	65.78	-11.02	QP
2	0.1620	26.09	10.10	36.19	55.36	-19.17	AVG
3	0.4900	21.54	10.29	31.83	46.17	-14.34	AVG
4	0.5180	26.95	10.30	37.25	56.00	-18.75	QP
5	2.6340	15.78	10.65	26.43	46.00	-19.57	AVG
6	2.8340	20.88	10.67	31.55	56.00	-24.45	QP

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

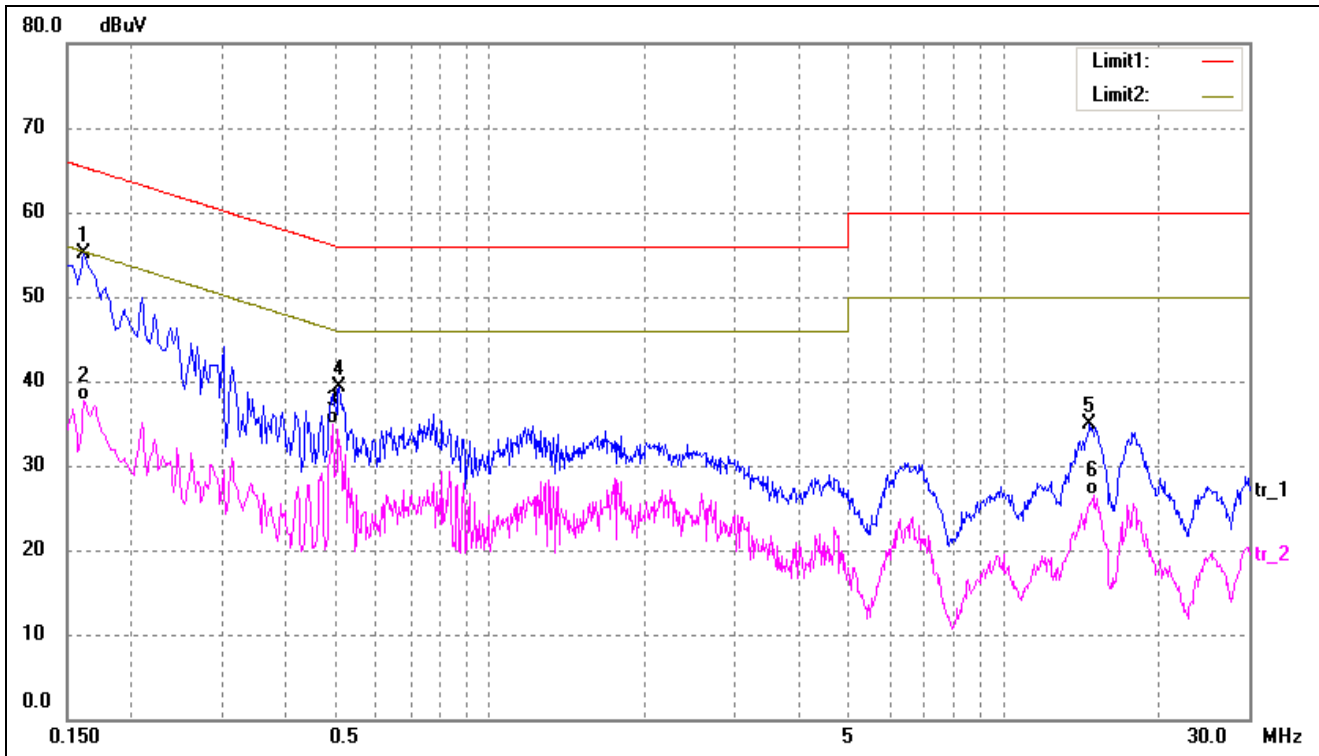

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1620	45.06	10.10	55.16	65.36	-10.20	peak
2	0.1620	27.53	10.10	37.63	55.36	-17.73	AVG
3	0.4940	24.53	10.29	34.82	46.10	-11.28	AVG
4	0.5100	28.95	10.29	39.24	56.00	-16.76	peak
5	14.6980	23.86	11.02	34.88	60.00	-25.12	peak
6	14.9100	15.47	11.03	26.50	50.00	-23.50	AVG

***** END OF REPORT *****