

TEST REPORT

Report No.: BCTC2103338309E

Applicant: SUPERSONIC GATE AND DOOR AUTOMATION CO., LIMITED

Product Name: remote control

Model/Type Ref.: 893LM
891LM,41A7633

Tested Date: 2021-03-11 to 2021-04-12

Issued Date: 2021-04-12



Shenzhen **BCTC** Testing Co., Ltd.



FCC ID: 2AQXW-893LM

Product Name: remote control
Trademark: N/A
Model/Type Ref.: 893LM
891LM,41A7633
Prepared For: SUPERSONIC GATE AND DOOR AUTOMATION CO., LIMITED
Address: No.28 tianshan road changzhou city jiangsu province China
Manufacturer: SUPERSONIC GATE AND DOOR AUTOMATION CO., LIMITED
Address: No.28 tianshan road changzhou city jiangsu province China
Prepared By: Shenzhen BCTC Testing Co., Ltd.
Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: 2021-03-11
Sample tested Date: 2021-03-11 to 2021-04-12
Issue Date: 2021-04-12
Report No.: BCTC2103338309E
Test Standards FCC Part15.231
ANSI C63.10-2013
Test Results PASS

Tested by:



Sam zeng/Project Handler

Approved by:



Zero Zhou/Reviewer


The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	5
2. TEST SUMMARY	6
3. MEASUREMENT UNCERTAINTY	7
4. PRODUCT INFORMATION AND TEST SETUP	8
4.1 Product Information	8
4.2 Test Setup Configuration	9
4.3 Support Equipment	9
4.4 Channel List	10
4.5 Test Mode	10
5. TEST FACILITY AND TEST INSTRUMENT USED	11
5.1 Test Facility	11
5.2 Test Instrument Used	12
6. CONDUCTED EMISSIONS	14
6.1 Block Diagram Of Test Setup	14
6.2 Limit	14
6.3 Test procedure	14
6.4 EUT operating Conditions	15
6.5 Test Result	15
7. RADIATED EMISSIONS	15
7.1 Block Diagram Of Test Setup	15
7.2 Limit	16
7.3 Test procedure	17
7.4 EUT operating Conditions	19
7.5 Test Result	20
8. BANDWIDTH TEST	42
8.1 Block Diagram Of Test Setup	42
8.2 Limit	42
8.3 Test procedure	42
8.4 EUT operating Conditions	42
8.5 Test Result	43
9. CALCULATION OF AVERAGE FACTOR	45
10. TRANSMISSION TERMINATION TIME	51
10.1 Block Diagram Of Test Setup	51
10.2 Limit	51
10.3 Test procedure	51
10.4 Test Result	52
11. ANTENNA REQUIREMENT	54
11.1 STANDARD REQUIREMENT	54
11.2 EUT ANTENNA	54


12. EUT PHOTOGRAPHS	55
13. T TEST SETUP PHOTOGRAPHS	57

(Note: N/A means not applicable)

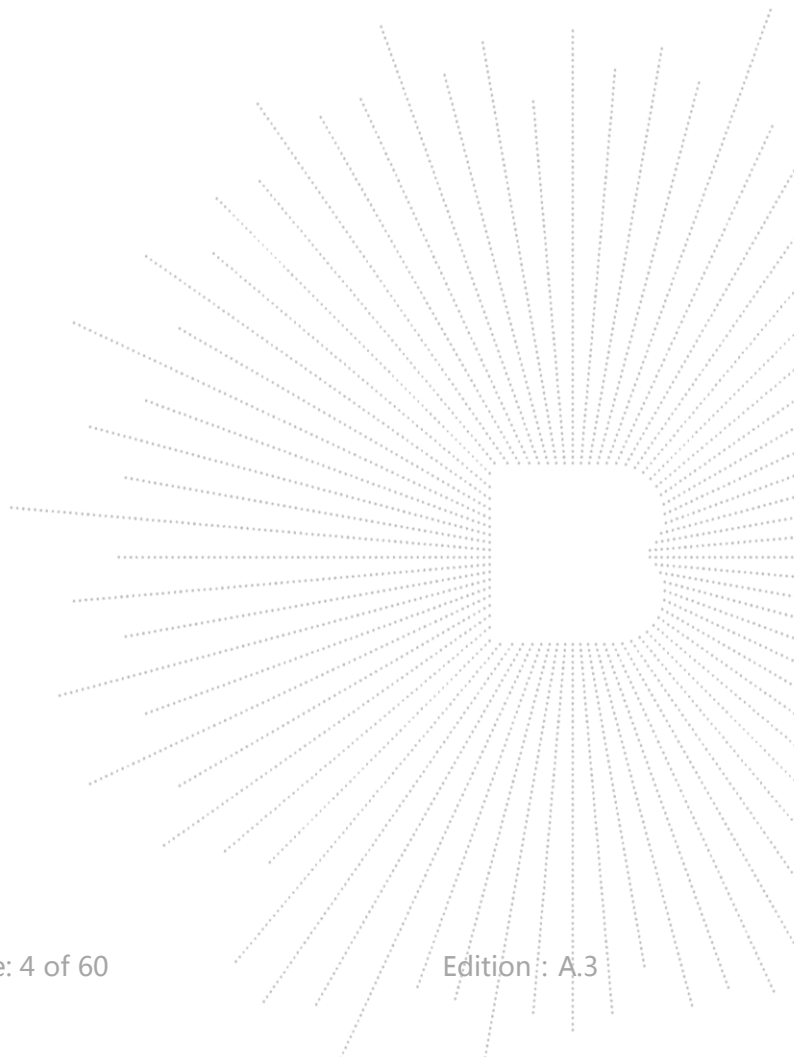

1. VERSION

Report No.	Issue Date	Description	Approved
BCTC2103338309E	2021-04-12	Original	Valid

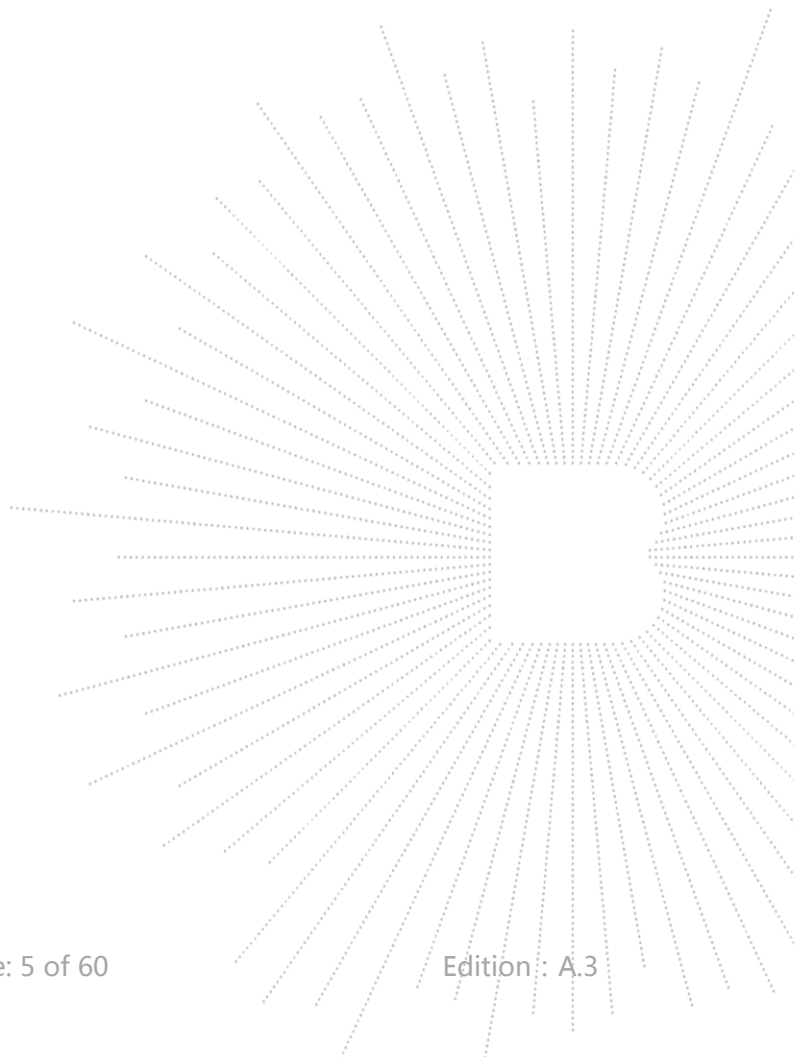

2. TEST SUMMARY

The Product has been tested according to the following specifications:

No.	Test Parameter	Clause No	Results
1	Conducted Emission	§15.207	N/A
2	Fundamental & Radiated Spurious Emission Measurement	15.209, 15.231b	PASS
3	Occupy Bandwidth	15.231c	PASS
4	Transmission termination time	15.231a	PASS
5	Antenna Requirement	15.203	PASS

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.3dB
2	3m chamber Radiated spurious emission(9KHz-30MHz)	U=3.7dB
3	3m chamber Radiated spurious emission(1GHz-18GHz)	U=4.5dB
4	3m chamber Radiated spurious emission(18GHz-40GHz)	U=3.34dB
5	Conducted Adjacent channel power	U=1.38dB
6	Conducted output power uncertainty Above 1G	U=1.576dB
7	Conducted output power uncertainty below 1G	U=1.28dB
8	Occupy Bandwidth	1.1%
9	humidity uncertainty	U=5.3%
10	Temperature uncertainty	U=0.59°C

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model/Type Ref.:	893LM 891LM, 41A7633
Model differences:	All models have the same circuit and RF module, but the model name, color, appearance and shell are different.
Hardware Version:	N/A
Software Version:	N/A
Operation Frequency:	310 MHz 315 MHz 390MHz
Type of Modulation:	ASK
Number Of Channel	3CH
Antenna installation:	Internal antenna
Antenna Gain:	0dBi
Ratings:	DC 3.0V from Battery

Note 1:


Model: 893LM



Model: 891LM




Model: 41A7633

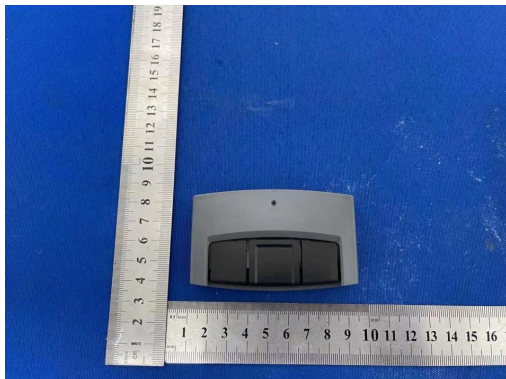

4.2 Test Setup Configuration

See test photographs attached in *EUT TEST SETUP PHOTOGRAPHS* for the actual connections between Product and support equipment.

Radiated Spurious Emission



4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Data Cable	Power Cord
E-1	remote control	N/A	893LM	891LM 41A7633	EUT	E-1

Item	Shielded Type	Ferrite Core	Length	Note
N/A	N/A	N/A	N/A	N/A

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)
1	310
2	315
3	390


4.5 Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Final Test Mode	Description
Mode 1	TX Mode

Note:

- (1) all channel frequency need to be tested.
- (2) Fully-charged battery is used during the test

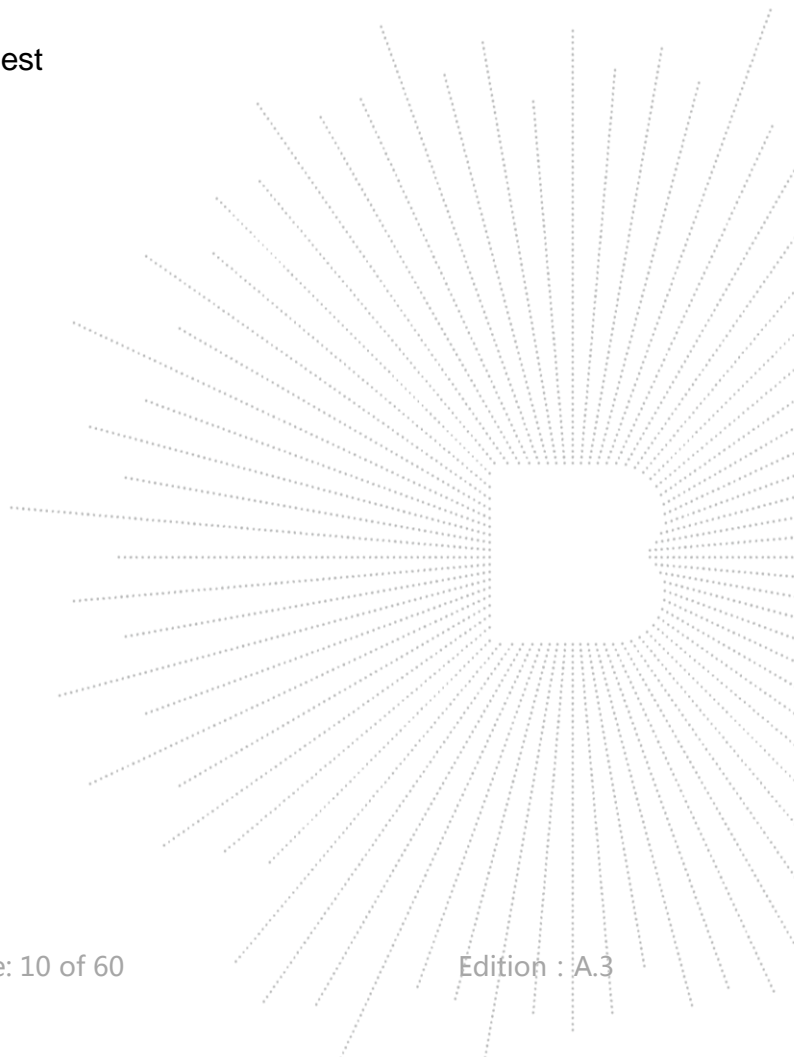


5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850

IC Registered No.: 23583

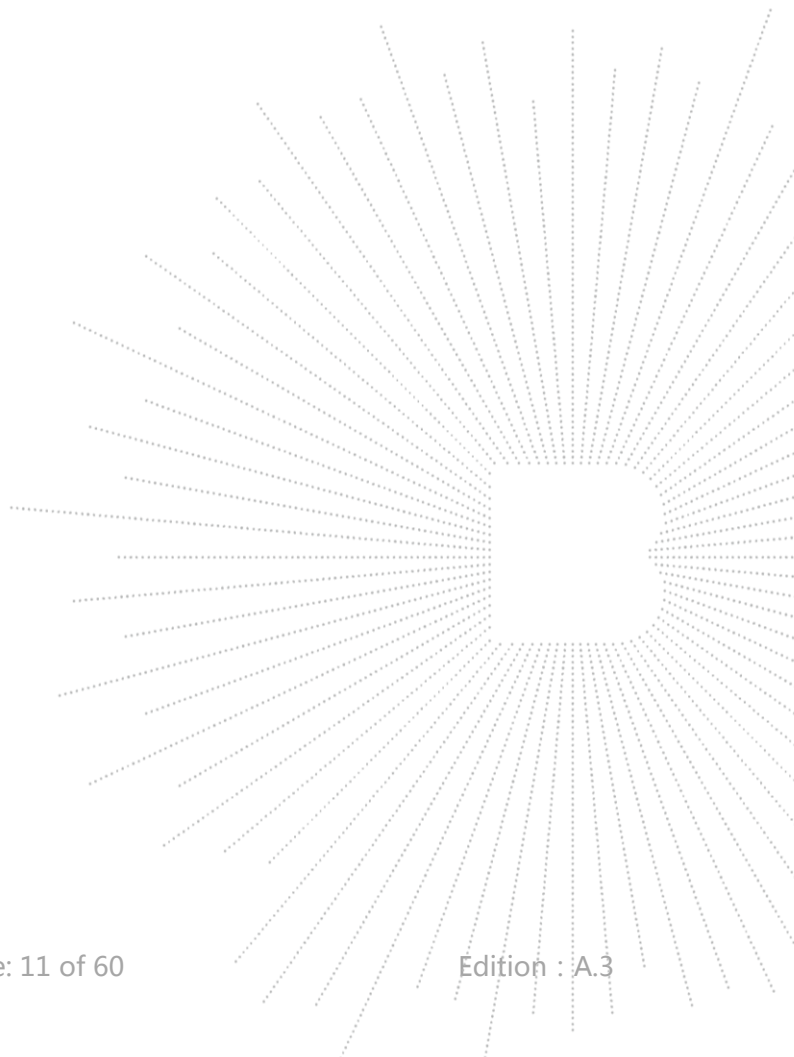

5.2 Test Instrument Used

Radiation Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4407B	MY45109572	Jun. 08, 2020	Jun. 07, 2021
2	Test Receiver (9kHz-7GHz)	R&S	ESR7	101154	Jun. 08, 2020	Jun. 07, 2021
3	Bilog Antenna (30MHz-3GHz)	SCHWARZBEC K	VULB9163	VULB9163-942	Jun. 08, 2020	Jun. 07, 2021
4	Horn Antenna (1GHz-18GHz)	SCHWARZBEC K	BBHA9120D	1541	Jun. 10, 2020	Jun. 09, 2021
5	Horn Antenna (18GHz-40GHz)	SCHWARZBEC K	BBHA9170	00822	Jun. 10, 2020	Jun. 09, 2021
6	Amplifier (9kHz-6GHz)	SCHWARZBEC K	BBV9744	9744-0037	Jun. 04, 2020	Jun. 03, 2021
7	Amplifier (0.5GHz-18GHz)	SCHWARZBEC K	BBV9718	9718-309	Jun. 04, 2020	Jun. 03, 2021
8	Amplifier (18GHz-40GHz)	MITEQ	TTA1840-35-HG	2034381	Jun. 08, 2020	Jun. 07, 2021
9	Loop Antenna (9kHz-30MHz)	SCHWARZBEC K	FMZB1519B	00014	Jun. 08, 2020	Jun. 07, 2021
10	RF cables1 (9kHz-30MHz)	Huber+Suhnar	9kHz-30MHz	B1702988-0008	Jun. 08, 2020	Jun. 07, 2021
11	RF cables2 (30MHz-1GHz)	Huber+Suhnar	30MHz-1GHz	1486150	Jun. 08, 2020	Jun. 07, 2021
12	RF cables3 (1GHz-40GHz)	Huber+Suhnar	1GHz-40GHz	1607106	Jun. 08, 2020	Jun. 07, 2021
13	Power Meter	Keysight	E4419B	\	Jun. 08, 2020	Jun. 07, 2021
14	Power Sensor (AV)	Keysight	E9 300A	\	Jun. 08, 2020	Jun. 07, 2021
15	Signal Analyzer 20kHz-26.5GHz	KEYSIGHT	N9020A	MY49100060	Jun. 04, 2020	Jun. 03, 2021
16	Spectrum Analyzer 9kHz-40GHz	Agilent	FSP40	100363	Jun. 04, 2020	Jun. 03, 2021
17	D.C. Power Supply	LongWei	TPR-6405D	\	\	\
18	Software	Frad	EZ-EMC	FA-03A2 RE	\	\


Conduction Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Test Receiver	R&S	ESR3	102075	Jun. 08, 2020	Jun. 07, 2021
2	LISN	SCHWARZBEC K	NSLK8127	8127739	Jun. 08, 2020	Jun. 07, 2021
3	LISN	R&S	ENV216	101375	Jun. 04, 2020	Jun. 03, 2021
4	RF cables	Huber+Suhnar	9kHz-30MHz	B1702988-000 8	Jun. 08, 2020	Jun. 07, 2021
5	Software	Frad	EZ-EMC	EMC-CON 3A1	\	\

RF conducted test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Power Metter	Keysight	E4419B	\	Jun. 08, 2020	Jun. 07, 2021
Power Sensor (AV)	Keysight	E9 300A	\	Jun. 08, 2020	Jun. 07, 2021
Signal Analyzer 20kHz-26.5GHz	KEYSIGHT	N9020A	MY4910006 0	Jun. 04, 2020	Jun. 03, 2021
Spectrum Analyzer 9kHz-40GHz	Agilent	FSP40	100363	Jun. 13, 2020	Jun. 12, 2021

6. CONDUCTED EMISSIONS

6.1 Block Diagram Of Test Setup

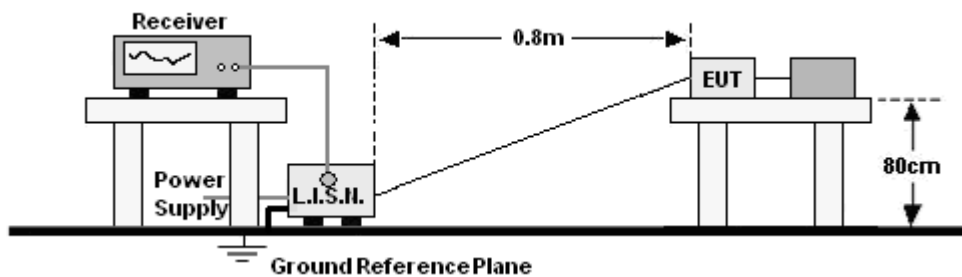

6.2 Limit

FREQUENCY (MHz)	Limit (dBuV)	
	Quas-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Notes:
1. *Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

6.3 Test procedure

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

a. The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).

b. The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.

c. For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.

6.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


6.5 Test Result

The EUT is powered by the DC only, the test item is not applicable.


7. RADIATED EMISSIONS

7.1 Block Diagram Of Test Setup


(A) Radiated Emission Test-Up Frequency Below 30MHz

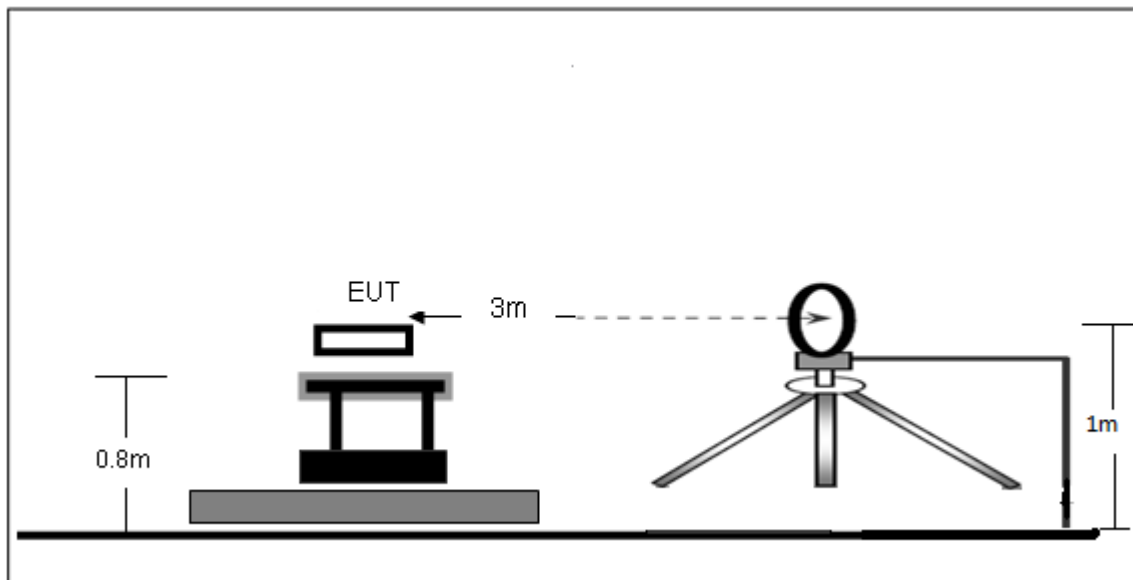

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

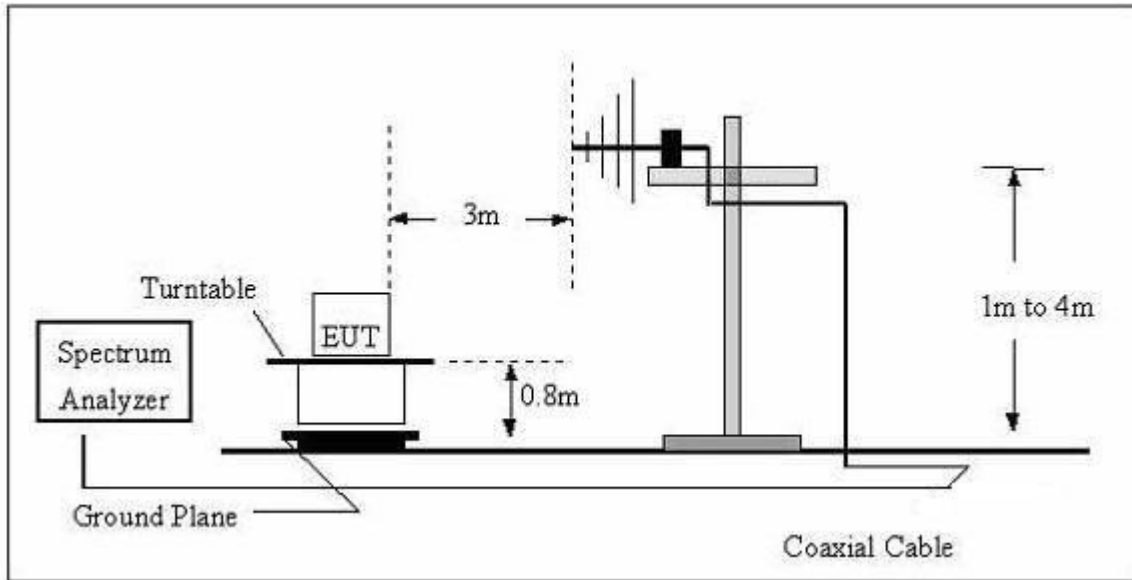

(C) Radiated Emission Test-Up Frequency Above 1GHz

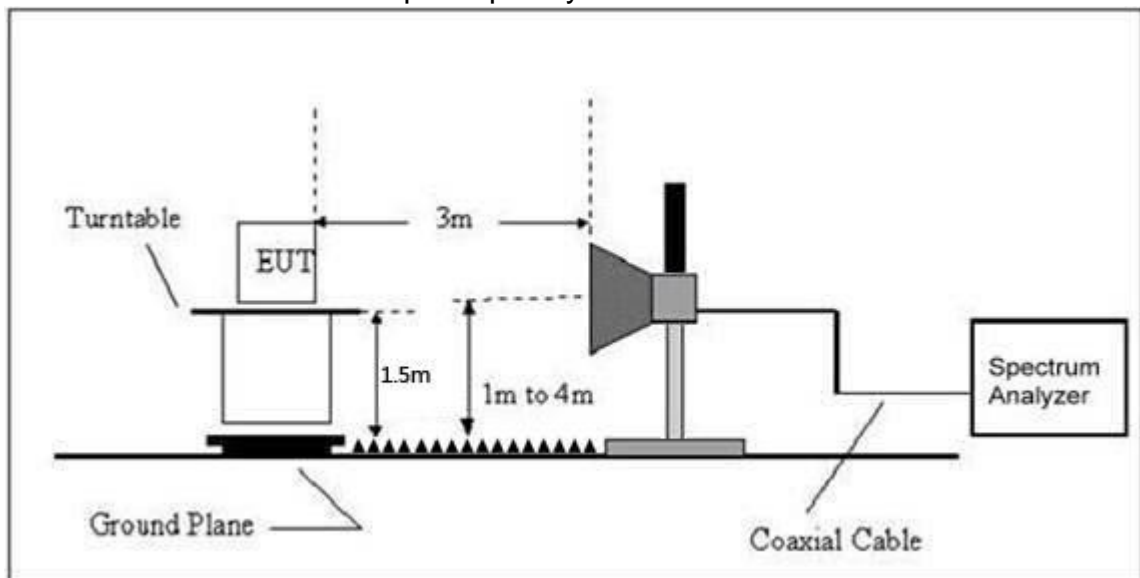

7.2 Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency	Field Strength	Distance	Field Strength Limit at 3m Distance	
(MHz)	uV/m	(m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$

30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m) = $20\log$ Emission level (uV/m).

FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

7.3 Test procedure

Receiver Parameter	Setting
Attenuation	Auto
9kHz~150kHz	RBW 200Hz for QP
150kHz~30MHz	RBW 9kHz for QP
30MHz~1000MHz	RBW 120kHz for QP

Spectrum Parameter	Setting
1-6GHz	RBW 1 MHz /VBW 1 MHz for Peak, RBW 1 MHz / VBW 10Hz for Average

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

Above 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.

e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


g. Test the EUT in the lowest channel, the Highest channel.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

7.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

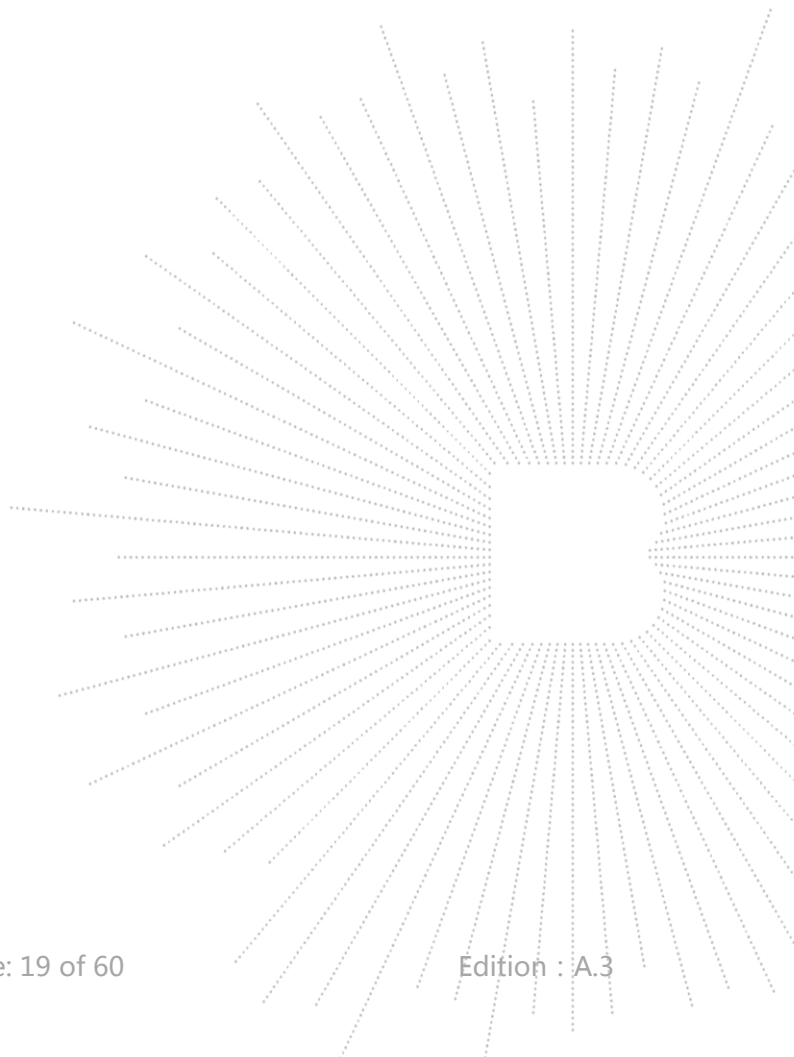

7.5 Test Result


Below 30MHz

Temperature:	26°C	Relative Humidity:	24%
Pressure:	101 kPa	Test Voltage :	DC 3.0V
Test Mode :	Mode 1	Polarization :	--

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State P/F
--	--	--	--	PASS
--	--	--	--	PASS

Note:


1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.Distance extrapolation factor =40 log (specific distance/test distance)(dB);Limit line = specific limits(dBuv) + distance extrapolation factor.
2. all models have been tested and only recorded the worst case for model 893LM in this report.

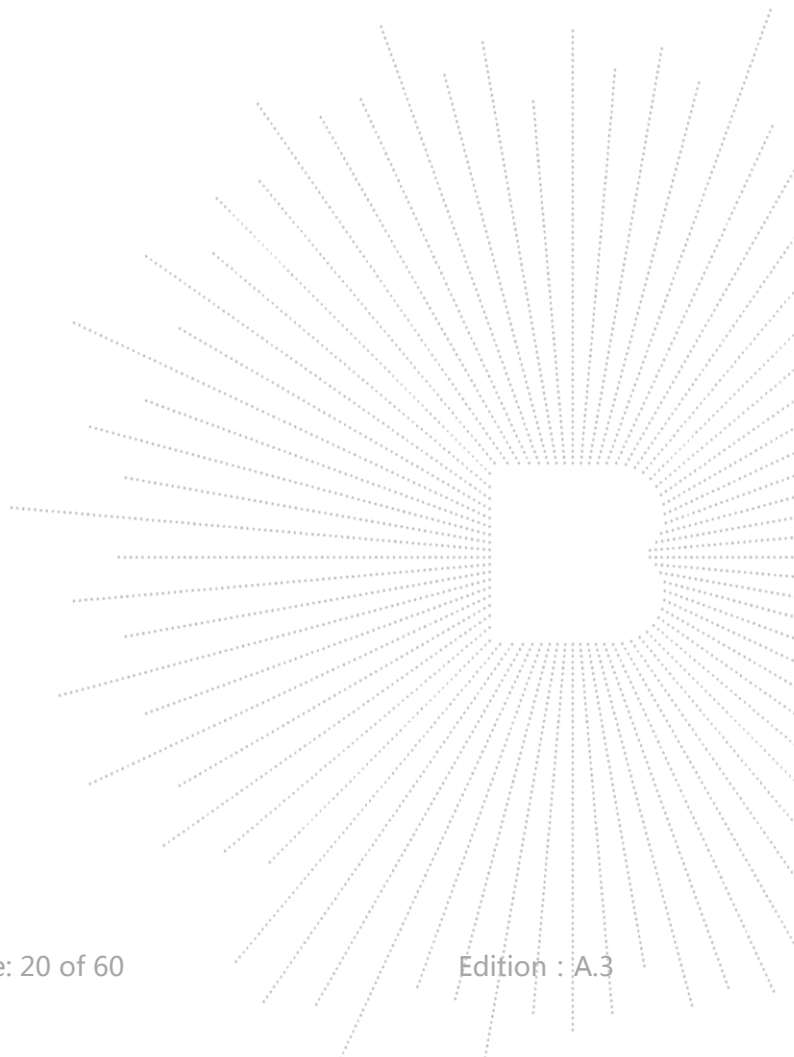

893LM:
#310MHz

Between 30MHz – 1GHz

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Test Voltage :	DC 3.0V
Test Mode :	Mode 1	Polarization :	Horizontal

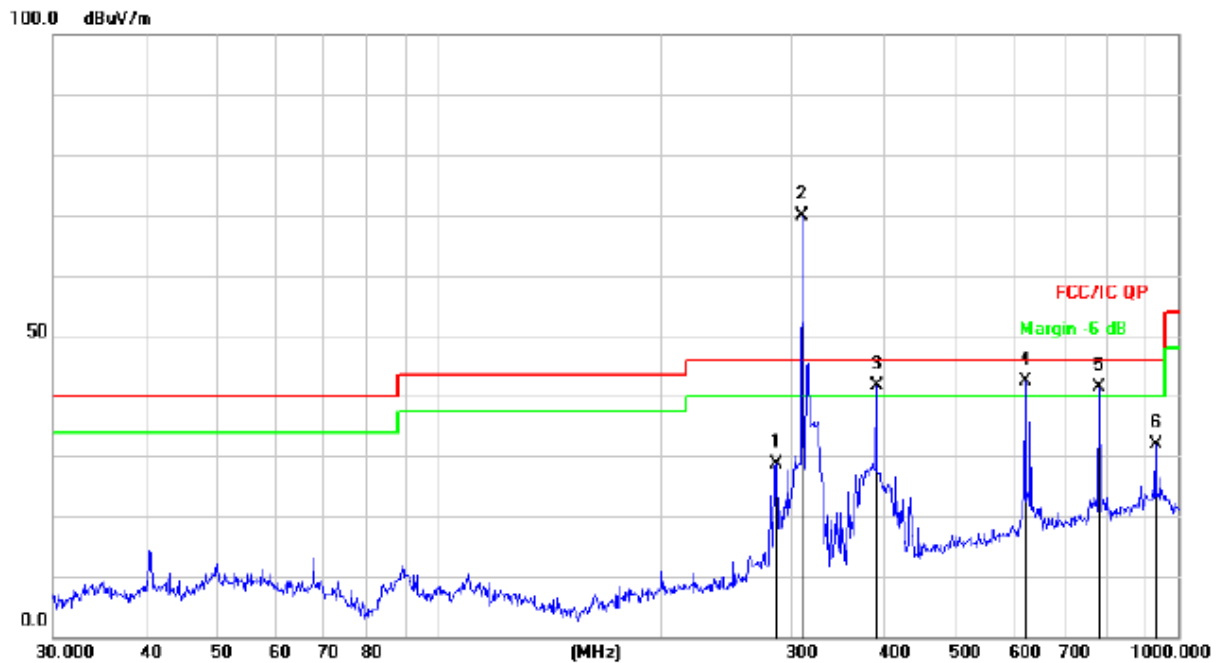


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		285.9778	41.51	-12.91	28.60	46.00	-17.40	QP
2	*	309.9977	82.05	-12.13	69.92	46.00	23.92	peak
3	!	390.7225	51.50	-9.94	41.56	46.00	-4.44	QP
4	!	620.7096	47.21	-4.75	42.46	46.00	-3.54	peak
5	!	782.3451	43.69	-2.28	41.41	46.00	-4.59	QP
6		932.2712	32.28	-0.36	31.92	46.00	-14.08	QP

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kpa	Test Voltage :	DC 3.0V
Test Mode :	Mode 1	Polarization :	Vertical

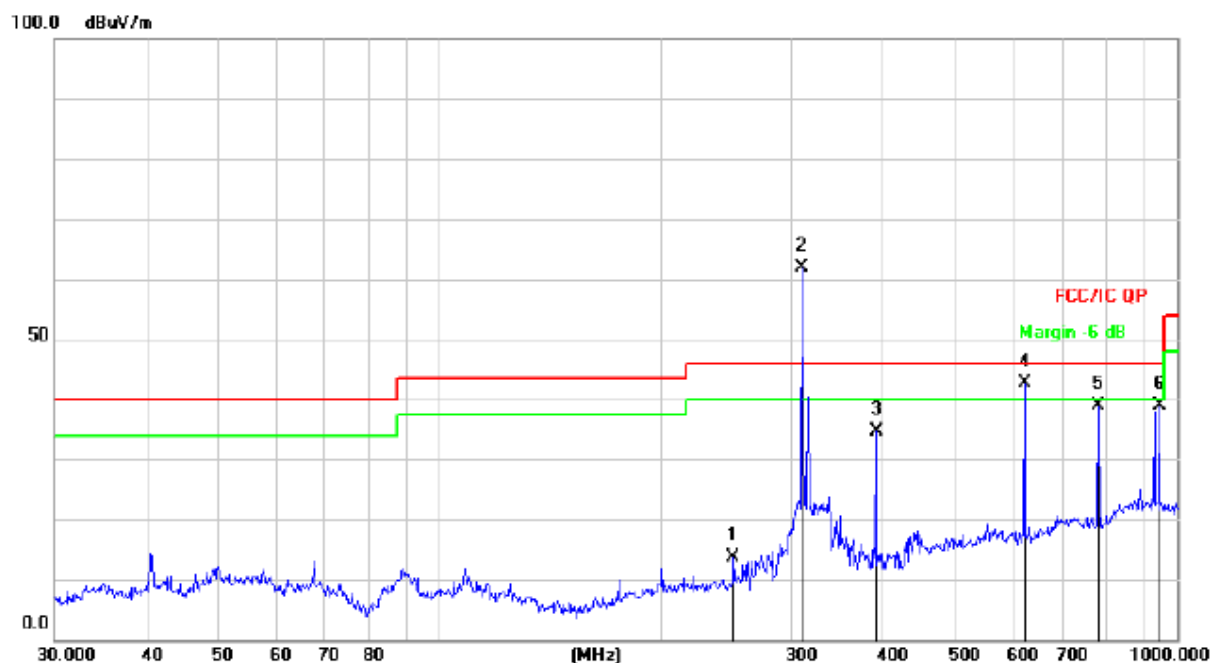

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		250.3009	27.75	-14.22	13.53	46.00	-32.47	QP
2	*	309.9977	74.05	-12.13	61.92	46.00	15.92	peak
3		390.7225	44.50	-9.94	34.56	46.00	-11.44	QP
4	!	620.7096	47.49	-4.75	42.74	46.00	-3.26	peak
5		782.3451	41.19	-2.28	38.91	46.00	-7.09	QP
6		945.4397	39.43	-0.49	38.94	46.00	-7.06	QP

For average Emission

Frequency MHz	Peak Level dBuV/m	Duty cycle factor	Average Level dBuV/m	Limit AV	Margin	Polarization
310	69.92	-15.19	54.73	75.32	-20.59	Horizontal
620	42.46	-15.19	27.27	65.46	-38.19	Horizontal

Notes: 1. Average emission Level = Peak Level + Duty cycle factor
2. Duty cycle level please see clause 5.

Frequency MHz	Peak Level dBuV/m	Duty cycle factor	Average Level dBuV/m	Limit AV	Margin	Polarization
310	61.92	-15.19	46.73	75.32	-28.59	Vertical
620	42.74	-15.19	27.55	65.46	-37.91	Vertical

Notes: 1. Average emission Level = Peak Level + Duty cycle factor
2. Duty cycle level please see clause 5.

Radiated Spurious Emission (1GHz to 10th harmonics)


Frequency MHz	Peak Level dBuV/m	Duty cycle factor	Average Level dBuV/m	Limit		Margin dB		Polarization
				PK	AV	PK	AV	
1302.69	51.55	-15.19	36.36	75.32	65.46	-38.96	-29.1	Vertical
1736.19	52.27	-15.19	37.08	75.32	65.46	-38.24	-28.38	Vertical
2603.67	50.41	-15.19	35.22	75.32	65.46	-40.1	-30.24	Vertical
3036.55	50.53	-15.19	35.34	75.32	65.46	-39.98	-30.12	Vertical
3472.57	50.73	-15.19	35.54	75.32	65.46	-39.78	-29.92	Vertical
3903.62	47.61	-15.19	32.42	75.32	65.46	-42.90	-33.04	Vertical
1301.52	47.55	-15.19	32.36	75.32	65.46	-42.96	-33.10	Horizontal
1735.36	47.32	-15.19	32.13	75.32	65.46	-43.19	-33.33	Horizontal
2603.57	49.75	-15.19	34.56	75.32	65.46	-40.76	-30.9	Horizontal
3036.33	49.32	-15.19	34.13	75.32	65.46	-41.19	-31.33	Horizontal
3471.12	47.28	-15.19	32.09	75.32	65.46	-43.23	-33.37	Horizontal
3905.57	48.53	-15.19	33.34	75.32	65.46	-41.98	-32.12	Horizontal

Notes: 1. Average emission Level = Peak Level + Duty cycle factor
2. Duty cycle level please see clause 5.
3. Pulse Desensitization Correction Factor
Pulse Width (PW) = 100ms
2/PW = 2/100ms = 0.020 kHz
RBW (100 kHz) > 2/PW (0.020 kHz)
Therefore PDCF is not needed
4. Other harmonics emissions are lower than 20dB below the allowable limit.

#315MHz

Between 30MHz – 1GHz

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Test Voltage :	DC 3.0V
Test Mode :	Mode 1	Polarization :	Horizontal

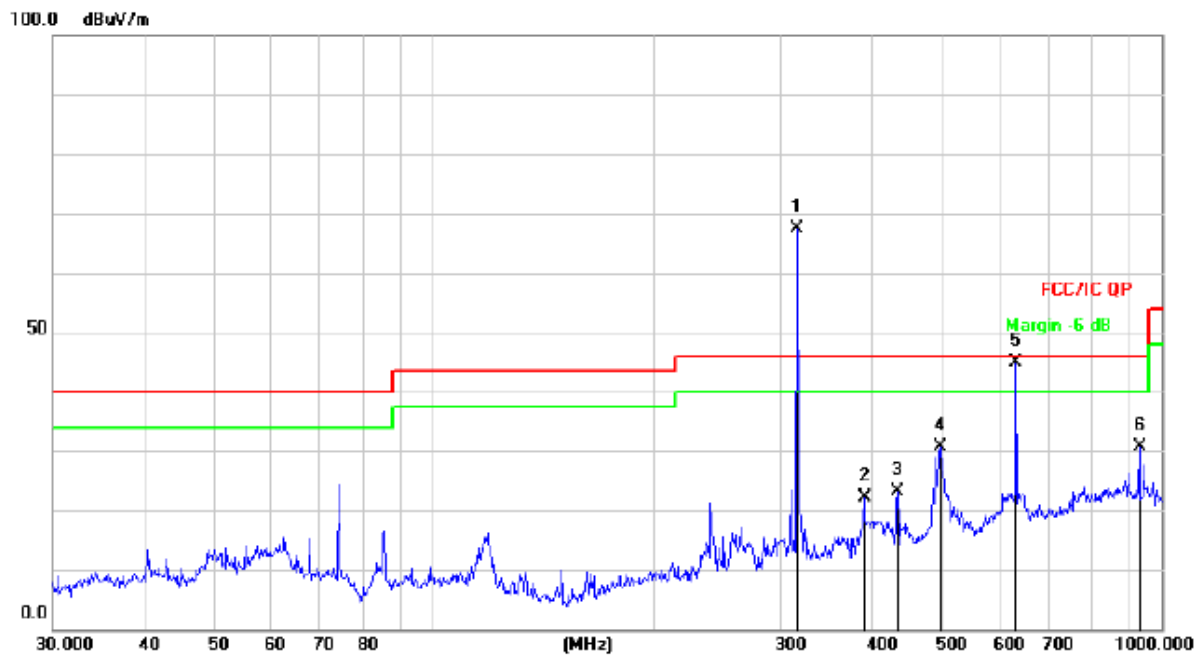


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	*	315.4806	79.38	-11.99	67.39	46.00	21.39	peak
2		390.7225	32.02	-9.94	22.08	46.00	-23.92	peak
3		434.0649	32.05	-8.96	23.09	46.00	-22.91	peak
4		495.9343	38.20	-7.66	30.54	46.00	-15.46	peak
5	!	631.6884	49.45	-4.59	44.86	46.00	-1.14	peak
6		932.2713	30.88	-0.36	30.52	46.00	-15.48	peak

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kpa	Test Voltage :	DC 3.0V
Test Mode :	Mode 1	Polarization :	Vertical

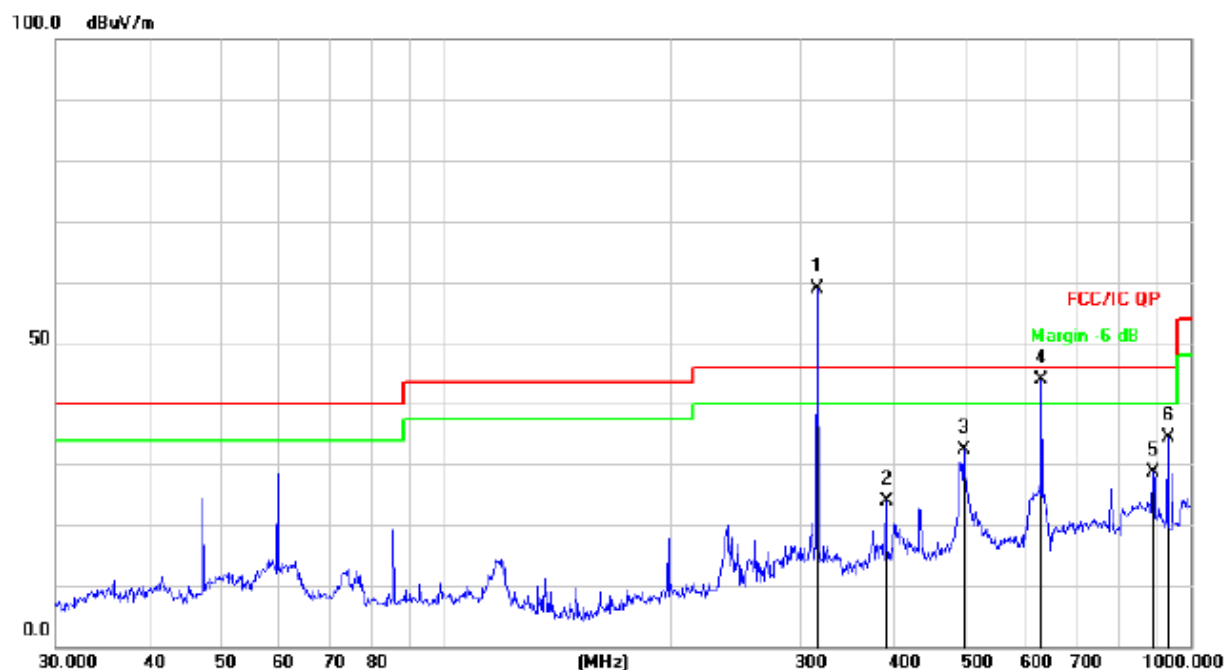

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	*	315.4806	70.77	-11.99	58.78	46.00	12.78	QP
2		390.7225	33.83	-9.94	23.89	46.00	-22.11	peak
3		495.9343	40.06	-7.66	32.40	46.00	-13.60	QP
4	!	631.6884	48.54	-4.59	43.95	46.00	-2.05	peak
5		890.7278	28.84	-0.20	28.64	46.00	-17.36	QP
6		932.2713	34.64	-0.36	34.28	46.00	-11.72	QP

For average Emission

Frequency MHz	Peak Level dBuV/m	Duty cycle factor	Average Level dBuV/m	Limit AV	Margin	Polarization
315	67.39	-15.04	52.35	75.62	-23.27	Horizontal
630	44.86	-15.04	29.82	65.65	-35.83	Horizontal

Notes: 1. Average emission Level = Peak Level + Duty cycle factor
2. Duty cycle level please see clause 5.

Frequency MHz	Peak Level dBuV/m	Duty cycle factor	Average Level dBuV/m	Limit AV	Margin	Polarization
315	58.78	-15.04	43.74	75.62	-31.88	Vertical
630	43.95	-15.04	28.91	65.65	-36.74	Vertical

Notes: 1. Average emission Level = Peak Level + Duty cycle factor
2. Duty cycle level please see clause 5.

Radiated Spurious Emission (1GHz to 10th harmonics)


Frequency MHz	Peak Level dBuV/m	Duty cycle factor	Average Level dBuV/m	Limit		Margin dB		Polarization
				PK	AV	PK	AV	
1301.37	51.53	-15.04	36.49	75.62	65.65	-39.13	-29.16	Vertical
1735.65	52.27	-15.04	37.23	75.62	65.65	-38.39	-28.42	Vertical
2603.50	50.45	-15.04	35.41	75.62	65.65	-40.21	-30.24	Vertical
3037.17	50.63	-15.04	35.59	75.62	65.65	-40.03	-30.06	Vertical
3471.25	50.15	-15.04	35.11	75.62	65.65	-40.51	-30.54	Vertical
3905.32	47.63	-15.04	32.59	75.62	65.65	-43.03	-33.06	Vertical
1301.57	47.32	-15.04	32.28	75.62	65.65	-43.34	-33.37	Horizontal
1735.32	47.37	-15.04	32.33	75.62	65.65	-43.29	-33.32	Horizontal
2603.55	49.71	-15.04	34.67	75.62	65.65	-40.95	-30.98	Horizontal
3037.64	49.35	-15.04	34.31	75.62	65.65	-41.31	-31.34	Horizontal
3471.18	47.22	-15.04	32.18	75.62	65.65	-43.44	-33.47	Horizontal
3905.55	48.57	-15.04	33.53	75.62	65.65	-42.09	-32.12	Horizontal

Notes: 1. Average emission Level = Peak Level + Duty cycle factor
2. Duty cycle level please see clause 5.
3. Pulse Desensitization Correction Factor
Pulse Width (PW) = 100ms
2/PW = 2/100ms = 0.020 kHz
RBW (100 kHz) > 2/PW (0.020 kHz)
Therefore PDCF is not needed
4. Other harmonics emissions are lower than 20dB below the allowable limit.

#390MHz

Between 30MHz – 1GHz

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Test Voltage :	DC 3.0V
Test Mode :	Mode 1	Polarization :	Horizontal

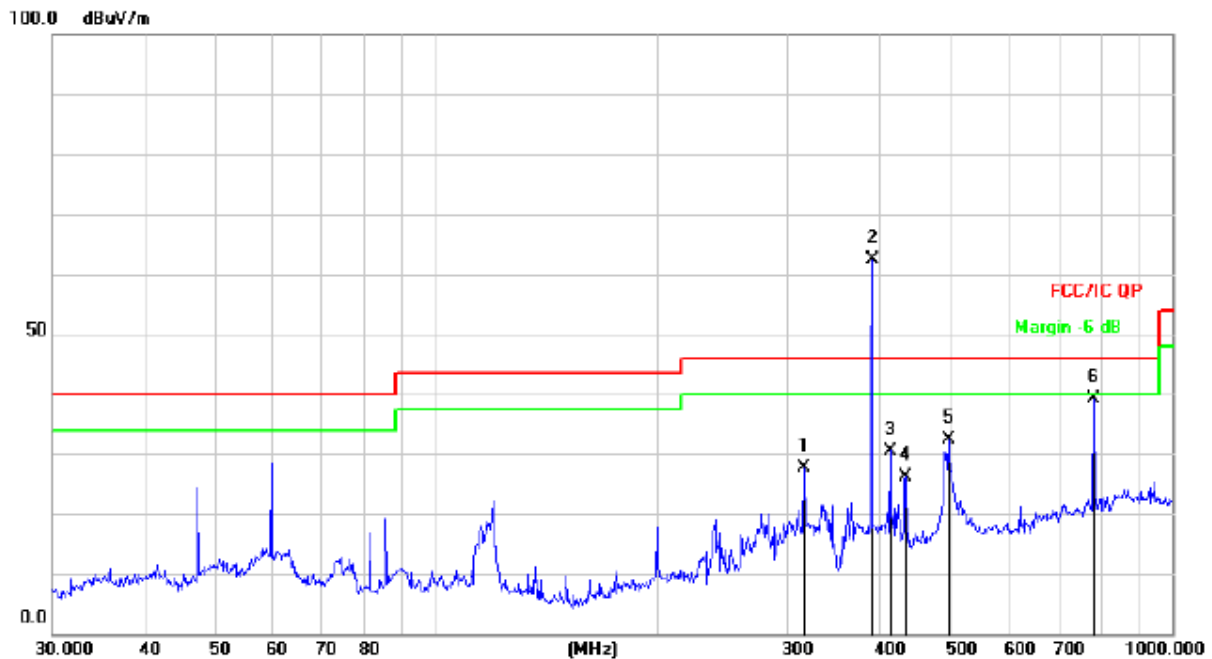


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dB/m	dB	
1		315.4806	39.64	-11.99	27.65	46.00	-18.35	peak
2	*	390.7225	72.43	-9.94	62.49	46.00	16.49	peak
3		413.2706	39.90	-9.40	30.50	46.00	-15.50	peak
4		434.0649	35.00	-8.96	26.04	46.00	-19.96	peak
5		495.9343	40.06	-7.66	32.40	46.00	-13.60	peak
6		782.3451	41.45	-2.28	39.17	46.00	-6.83	peak

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kpa	Test Voltage :	DC 3.0V
Test Mode :	Mode 1	Polarization :	Vertical

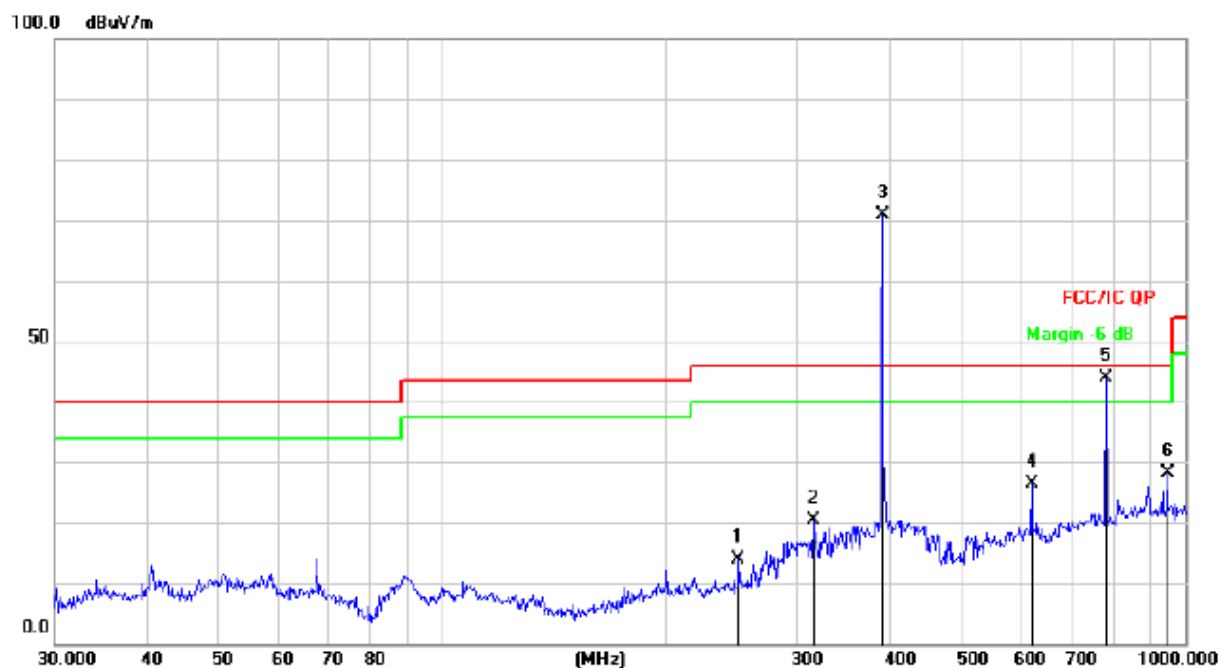

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		250.3010	28.06	-14.22	13.84	46.00	-32.16	QP
2		315.4806	32.32	-11.99	20.33	46.00	-25.67	QP
3	*	390.7225	80.79	-9.94	70.85	46.00	24.85	peak
4		620.7096	31.16	-4.75	26.41	46.00	-19.59	QP
5	!	782.3451	46.12	-2.28	43.84	46.00	-2.16	peak
6		945.4397	28.50	-0.49	28.01	46.00	-17.99	QP

For average Emission

Frequency MHz	Peak Level dBuV/m	Duty cycle factor	Average Level dBuV/m	Limit AV	Margin	Polarization
390	62.49	-14.85	47.67	79.24	-31.60	Horizontal
780	39.17	-14.85	24.32	68.10	-43.78	Horizontal

Notes: 1. Average emission Level = Peak Level + Duty cycle factor
2. Duty cycle level please see clause 5.

Frequency MHz	Peak Level dBuV/m	Duty cycle factor	Average Level dBuV/m	Limit AV	Margin	Polarization
390	70.85	-14.85	56.00	79.24	-23.24	Vertical
780	43.84	-14.85	28.99	68.10	-39.11	Vertical

Notes: 1. Average emission Level = Peak Level + Duty cycle factor
2. Duty cycle level please see clause 5.

Radiated Spurious Emission (1GHz to 10th harmonics)


Frequency MHz	Peak Level dBuV/m	Duty cycle factor	Average Level dBuV/m	Limit		Margin dB		Polarization
				PK	AV	PK	AV	
1301.72	51.72	-14.85	36.87	79.24	68.10	-42.37	-31.23	Vertical
1735.57	52.21	-14.85	37.36	79.24	68.10	-41.88	-30.74	Vertical
2603.20	50.42	-14.85	35.57	79.24	68.10	-43.67	-32.53	Vertical
3037.11	50.85	-14.85	36.00	79.24	68.10	-43.24	-32.10	Vertical
3471.23	50.12	-14.85	35.27	79.24	68.10	-43.97	-32.83	Vertical
3905.37	47.74	-14.85	32.89	79.24	68.10	-46.35	-35.21	Vertical
1301.52	47.37	-14.85	32.52	79.24	68.10	-46.72	-35.58	Horizontal
1735.37	47.33	-14.85	32.48	79.24	68.10	-46.76	-35.62	Horizontal
2603.51	49.75	-14.85	34.90	79.24	68.10	-44.34	-33.20	Horizontal
3037.62	49.32	-14.85	34.47	79.24	68.10	-44.77	-33.63	Horizontal
3471.12	47.27	-14.85	32.42	79.24	68.10	-46.82	-35.68	Horizontal
3905.53	48.53	-14.85	33.68	79.24	68.10	-45.56	-34.42	Horizontal

Notes: 1. Average emission Level = Peak Level + Duty cycle factor
2. Duty cycle level please see clause 5.
3. Pulse Desensitization Correction Factor
Pulse Width (PW) = 100ms
 $2/PW = 2/100\text{ms} = 0.020\text{ kHz}$
RBW (100 kHz) > 2/PW (0.020 kHz)
Therefore PDCF is not needed
4. Other harmonics emissions are lower than 20dB below the allowable limit.

891LM:
#310MHz

Between 30MHz – 1GHz

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Test Voltage :	DC 3.0V
Test Mode :	Mode 1	Polarization :	Horizontal

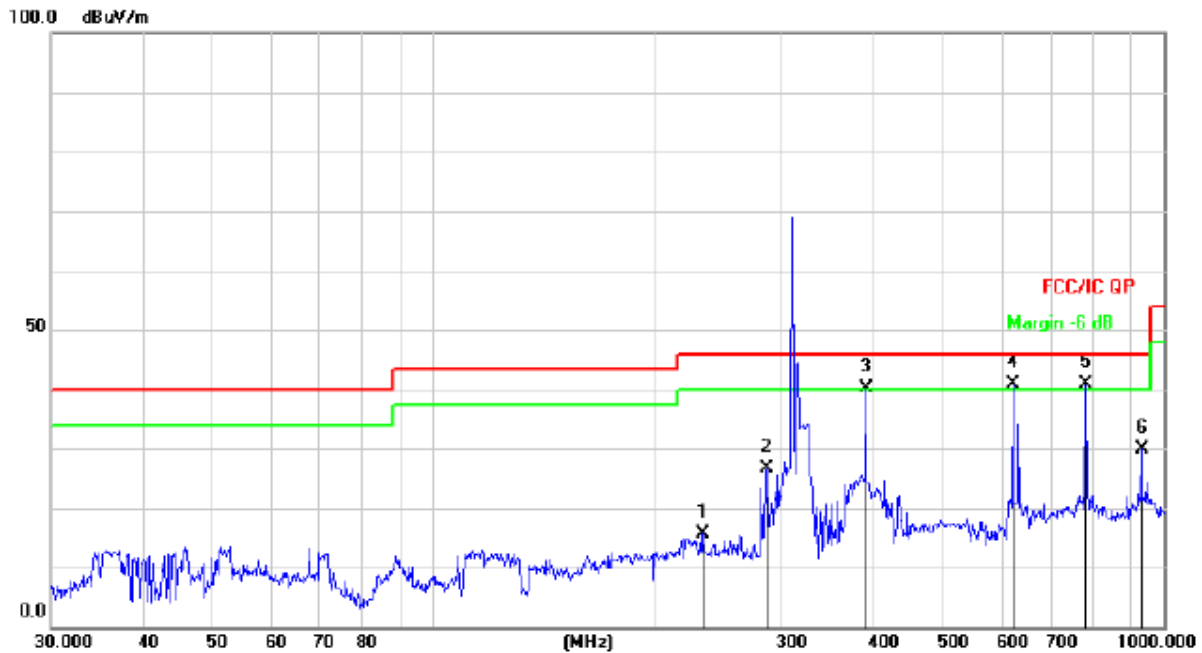


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		234.1682	30.26	-14.56	15.70	46.00	-30.30	QP
2		285.9778	39.51	-12.91	26.60	46.00	-19.40	QP
3	!	390.7225	50.00	-9.94	40.06	46.00	-5.94	QP
4	*	620.7096	45.71	-4.75	40.96	46.00	-5.04	QP
5	!	782.3451	43.19	-2.28	40.91	46.00	-5.09	QP
6		932.2712	30.28	-0.36	29.92	46.00	-16.08	QP

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kpa	Test Voltage :	DC 3.0V
Test Mode :	Mode 1	Polarization :	Vertical

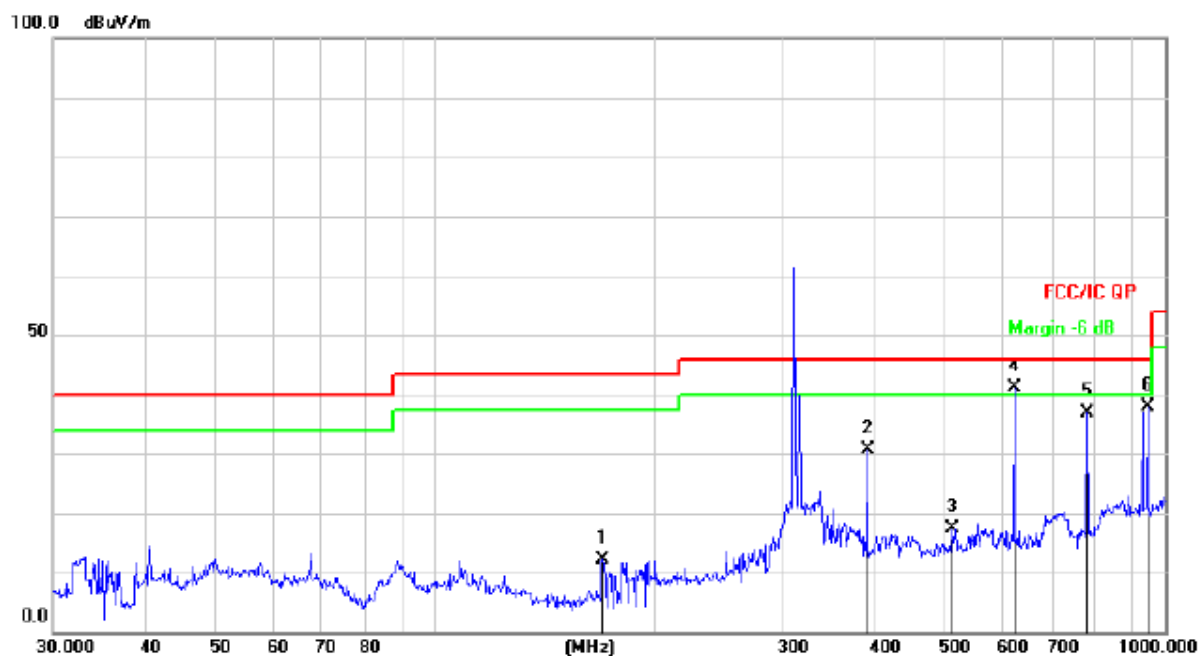

Remark:


Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		169.5988	29.59	-17.36	12.23	43.50	-31.27	QP
2		390.7225	40.50	-9.94	30.56	46.00	-15.44	QP
3		510.0436	24.77	-7.32	17.45	46.00	-28.55	QP
4	*	620.7096	45.99	-4.75	41.24	46.00	-4.76	QP
5		782.3451	39.19	-2.28	36.91	46.00	-9.09	QP
6		945.4397	38.43	-0.49	37.94	46.00	-8.06	QP

#315MHz

Between 30MHz – 1GHz

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Test Voltage :	DC 3.0V
Test Mode :	Mode 1	Polarization :	Horizontal

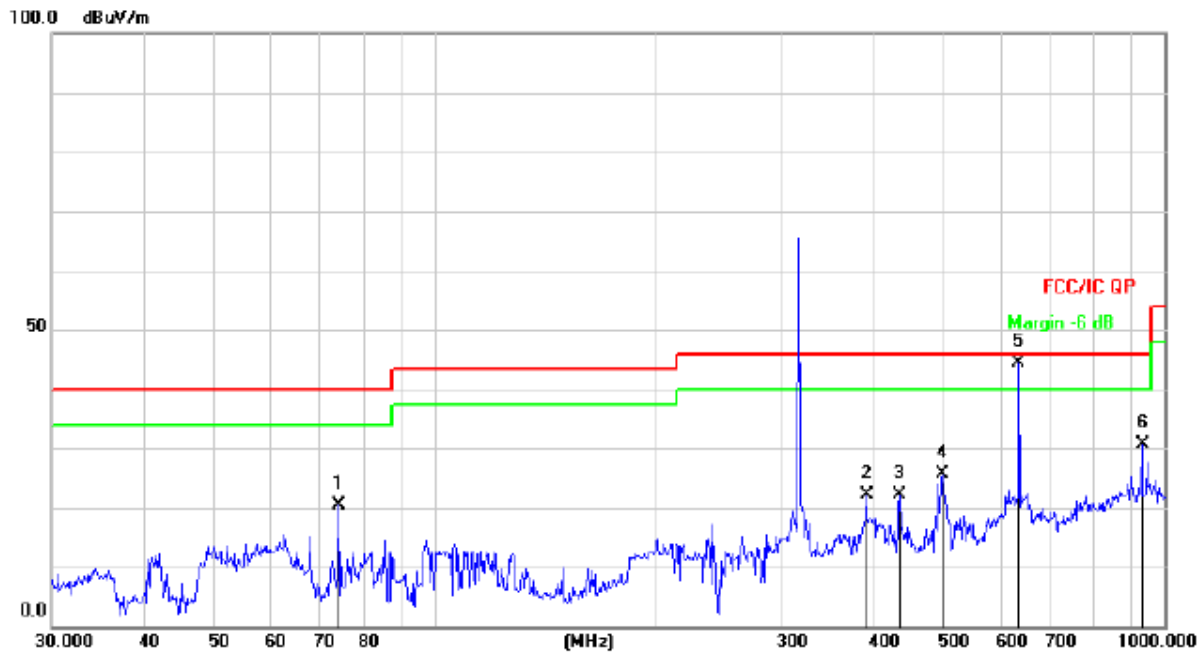


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		74.1350	38.51	-18.18	20.33	40.00	-19.67	QP
2		390.7225	32.02	-9.94	22.08	46.00	-23.92	QP
3		434.0649	31.05	-8.96	22.09	46.00	-23.91	QP
4		495.9343	33.20	-7.66	25.54	46.00	-20.46	QP
5	*	631.6884	48.95	-4.59	44.36	46.00	-1.64	QP
6		932.2712	30.88	-0.36	30.52	46.00	-15.48	QP

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kpa	Test Voltage :	DC 3.0V
Test Mode :	Mode 1	Polarization :	Vertical

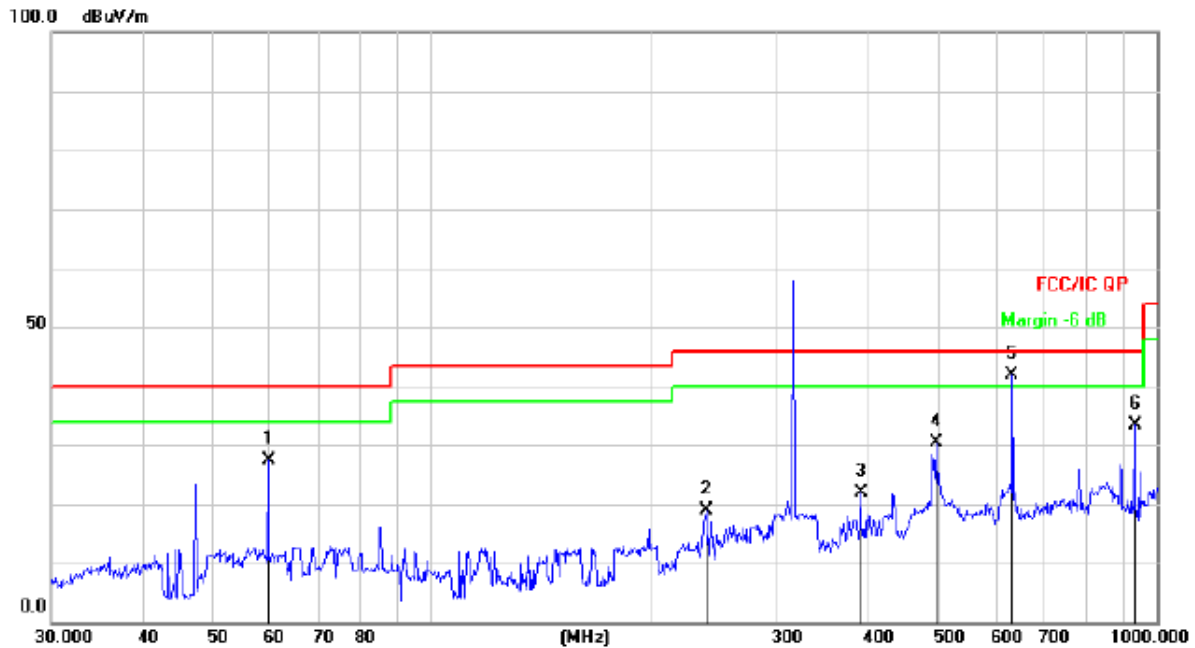

Remark:


Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		59.6492	41.94	-14.64	27.30	40.00	-12.70	QP
2		239.1473	33.34	-14.45	18.89	46.00	-27.11	QP
3		390.7225	31.83	-9.94	21.89	46.00	-24.11	QP
4		495.9343	38.06	-7.66	30.40	46.00	-15.60	QP
5	*	631.6884	46.54	-4.59	41.95	46.00	-4.05	QP
6		932.2712	33.64	-0.36	33.28	46.00	-12.72	QP

#390MHz

Between 30MHz – 1GHz

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Test Voltage :	DC 3.0V
Test Mode :	Mode 1	Polarization :	Horizontal

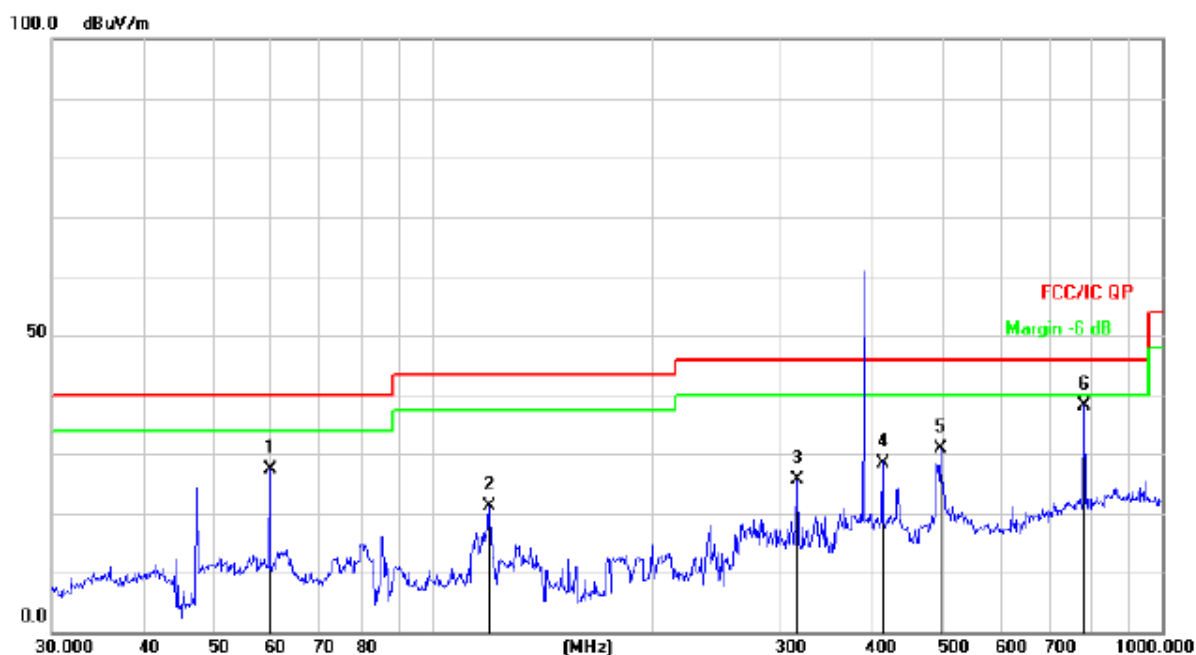


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		59.6492	41.94	-14.64	27.30	40.00	-12.70	QP
2		119.4360	37.91	-16.73	21.18	43.50	-22.32	QP
3		315.4806	37.64	-11.99	25.65	46.00	-20.35	QP
4		413.2706	37.90	-9.40	28.50	46.00	-17.50	QP
5		495.9343	38.56	-7.66	30.90	46.00	-15.10	QP
6	*	782.3451	40.45	-2.28	38.17	46.00	-7.83	QP

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kpa	Test Voltage :	DC 3.0V
Test Mode :	Mode 1	Polarization :	Vertical

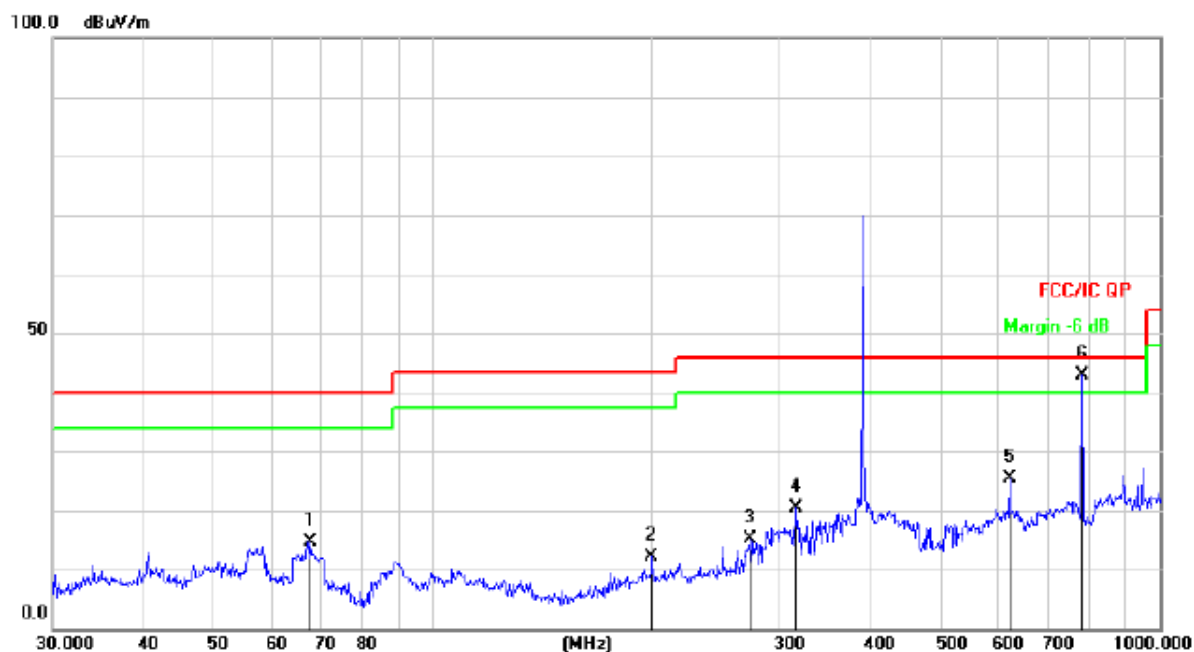

Remark:


Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		67.9128	31.28	-16.70	14.58	40.00	-25.42	QP
2		199.9856	27.28	-15.26	12.02	43.50	-31.48	QP
3		273.2341	28.44	-13.38	15.06	46.00	-30.94	QP
4		315.4806	32.32	-11.99	20.33	46.00	-25.67	QP
5		620.7096	30.16	-4.75	25.41	46.00	-20.59	QP
6	*	782.3451	45.12	-2.28	42.84	46.00	-3.16	QP

41A7633
#310MHz

Between 30MHz – 1GHz

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Test Voltage :	DC 3.0V
Test Mode :	Mode 1	Polarization :	Horizontal

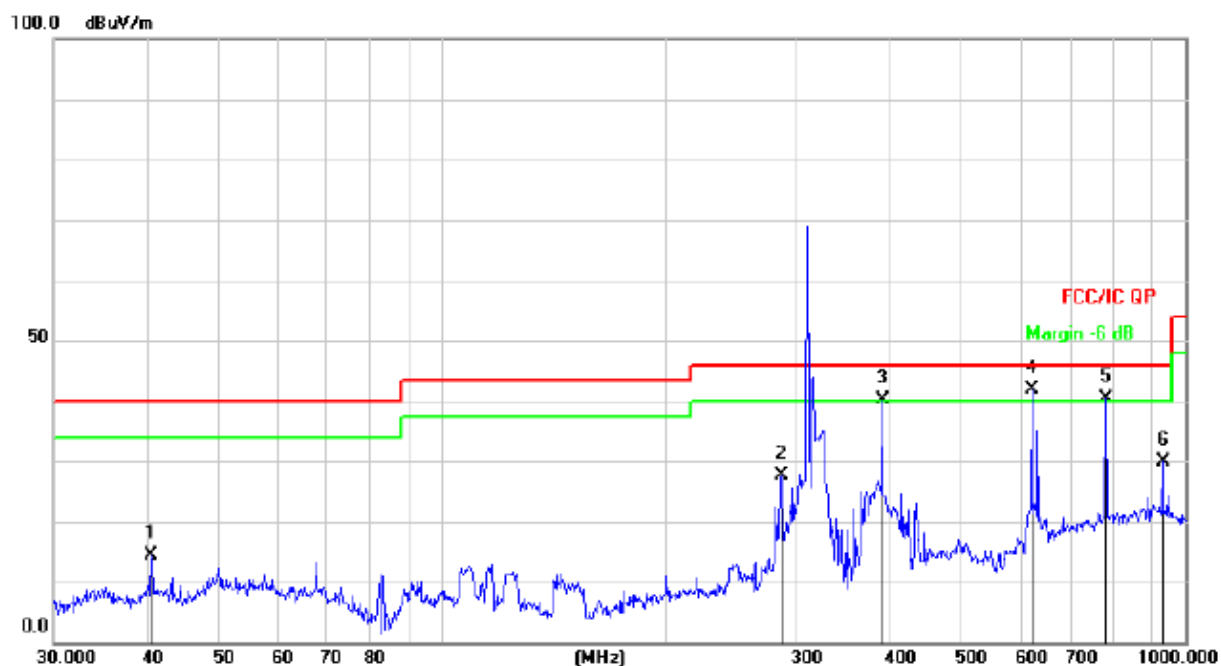


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dB/m	dB	
1		40.5591	29.37	-14.89	14.48	40.00	-25.52	QP
2		285.9778	40.51	-12.91	27.60	46.00	-18.40	QP
3	!	390.7225	50.00	-9.94	40.06	46.00	-5.94	QP
4	*	620.7096	46.71	-4.75	41.96	46.00	-4.04	QP
5	!	782.3451	42.69	-2.28	40.41	46.00	-5.59	QP
6		932.2712	30.28	-0.36	29.92	46.00	-16.08	QP

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kpa	Test Voltage :	DC 3.0V
Test Mode :	Mode 1	Polarization :	Vertical

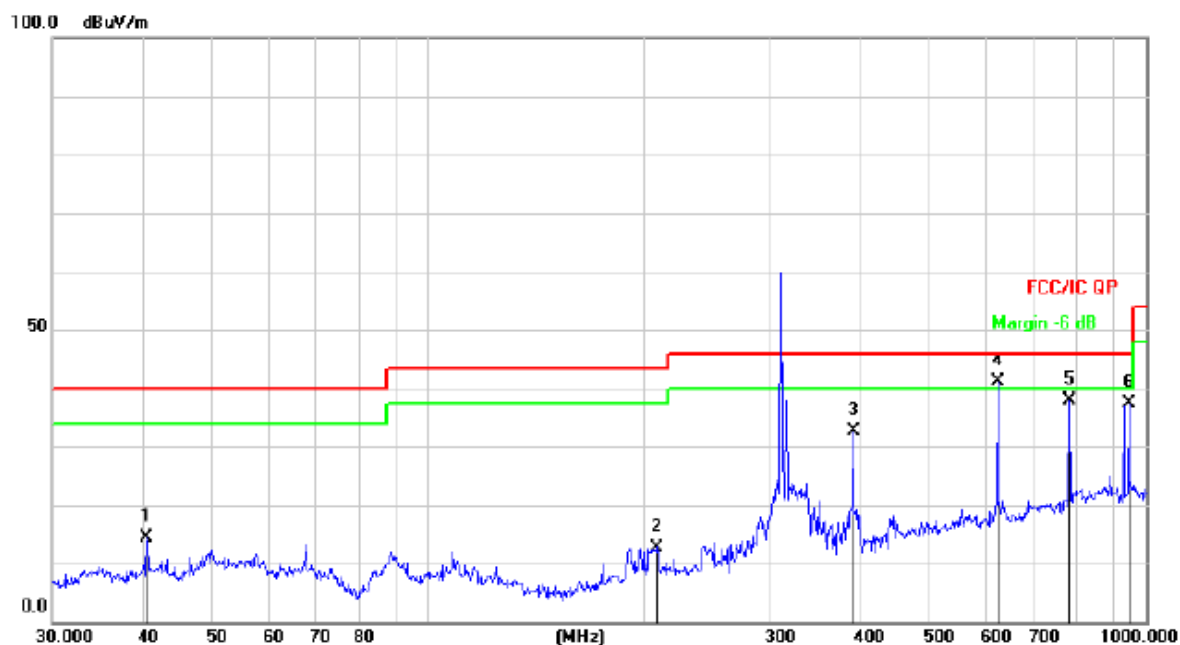

Remark:


Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
	MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	40.5591	29.37	-14.89	14.48	40.00	-25.52	QP
2	208.5800	27.83	-15.08	12.75	43.50	-30.75	QP
3	390.7225	42.50	-9.94	32.56	46.00	-13.44	QP
4 *	620.7096	45.99	-4.75	41.24	46.00	-4.76	QP
5	782.3451	40.19	-2.28	37.91	46.00	-8.09	QP
6	945.4397	37.93	-0.49	37.44	46.00	-8.56	QP

#315MHz

Between 30MHz – 1GHz

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Test Voltage :	DC 3.0V
Test Mode :	Mode 1	Polarization :	Horizontal

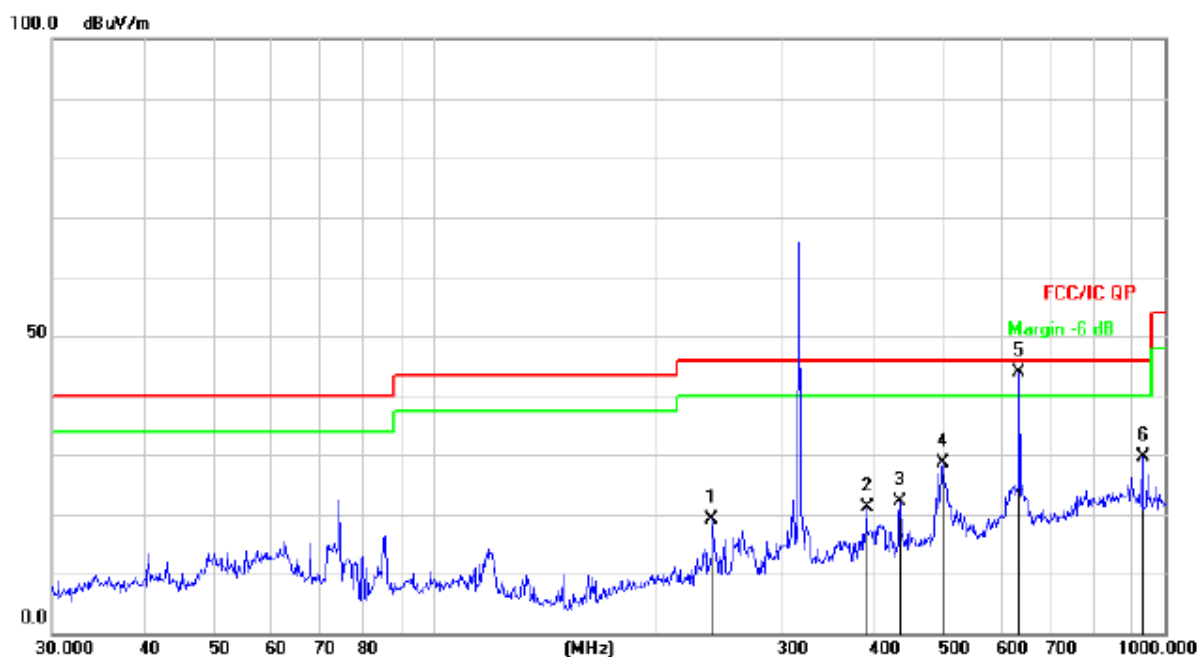


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		239.9874	33.48	-14.44	19.04	46.00	-26.96	QP
2		390.7225	31.02	-9.94	21.08	46.00	-24.92	QP
3		434.0649	31.05	-8.96	22.09	46.00	-23.91	QP
4		495.9343	36.20	-7.66	28.54	46.00	-17.46	QP
5	*	631.6884	48.45	-4.59	43.86	46.00	-2.14	QP
6		932.2712	29.88	-0.36	29.52	46.00	-16.48	QP

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kpa	Test Voltage :	DC 3.0V
Test Mode :	Mode 1	Polarization :	Vertical

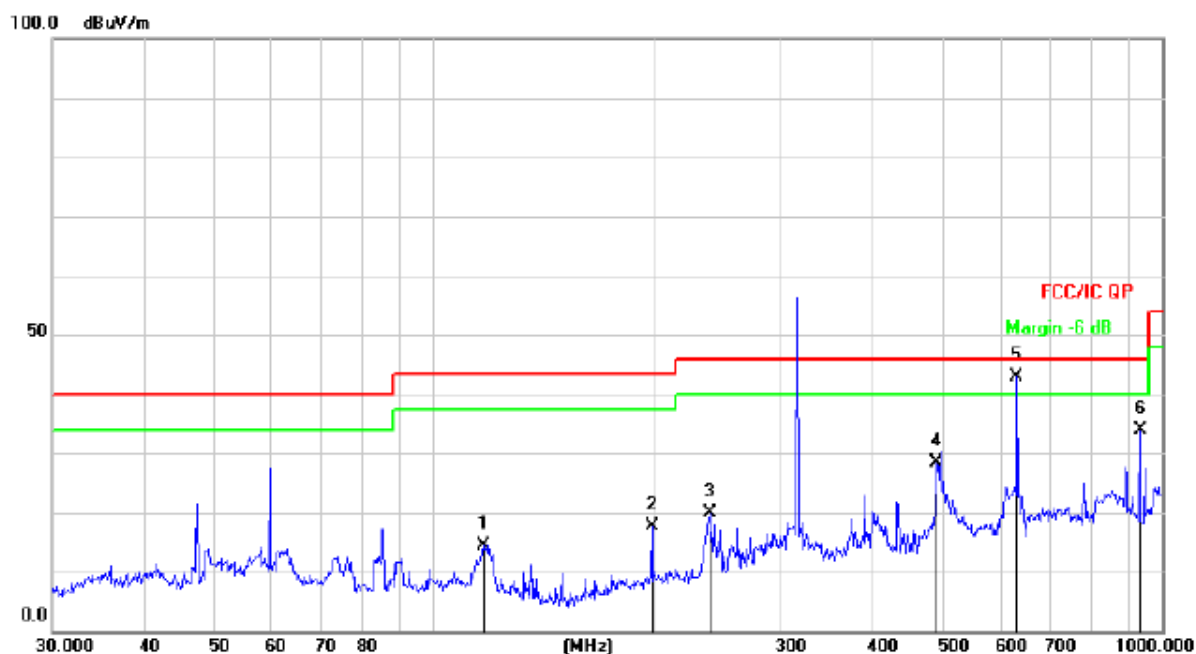

Remark:


Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dB/m	dB	
1		116.9495	30.95	-16.57	14.38	43.50	-29.12	QP
2		199.2855	32.90	-15.31	17.59	43.50	-25.91	QP
3		239.1473	34.34	-14.45	19.89	46.00	-26.11	QP
4		490.7447	36.03	-7.76	28.27	46.00	-17.73	QP
5	*	631.6884	47.54	-4.59	42.95	46.00	-3.05	QP
6		932.2712	34.14	-0.36	33.78	46.00	-12.22	QP

#390MHz

Between 30MHz – 1GHz

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Test Voltage :	DC 3.0V
Test Mode :	Mode 1	Polarization :	Horizontal

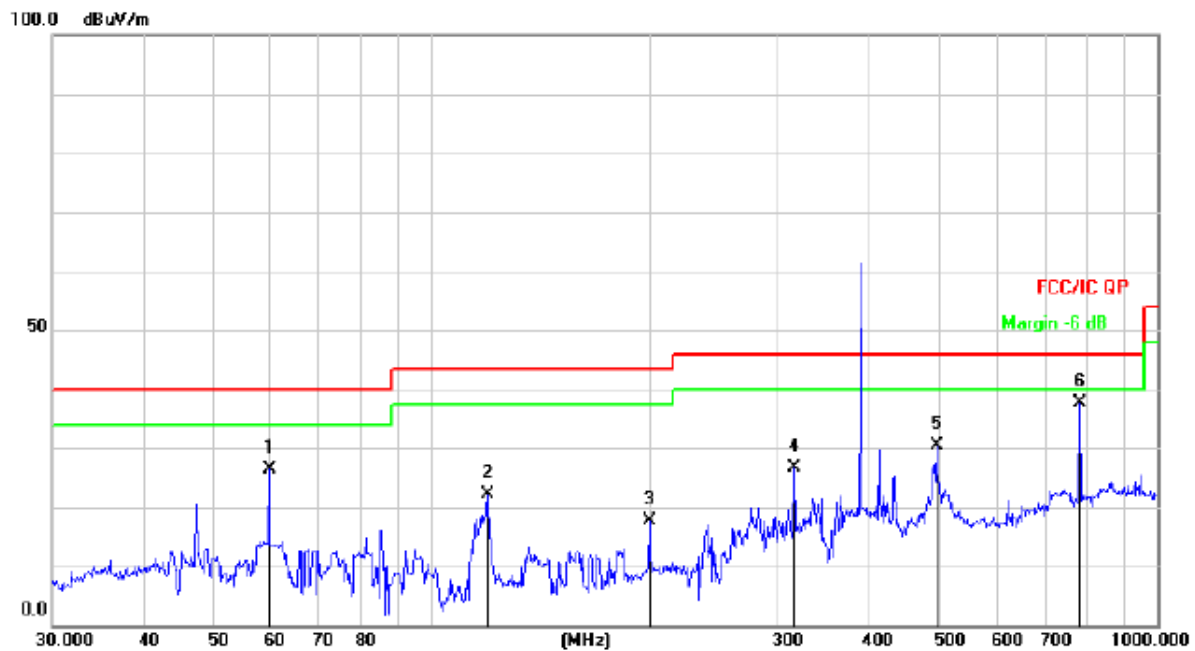


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		59.6492	40.94	-14.64	26.30	40.00	-13.70	QP
2		119.4360	38.91	-16.73	22.18	43.50	-21.32	QP
3		199.2855	32.90	-15.31	17.59	43.50	-25.91	QP
4		315.4806	38.64	-11.99	26.65	46.00	-19.35	QP
5		495.9343	38.06	-7.66	30.40	46.00	-15.60	QP
6	*	782.3451	39.95	-2.28	37.67	46.00	-8.33	QP

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kpa	Test Voltage :	DC 3.0V
Test Mode :	Mode 1	Polarization :	Vertical

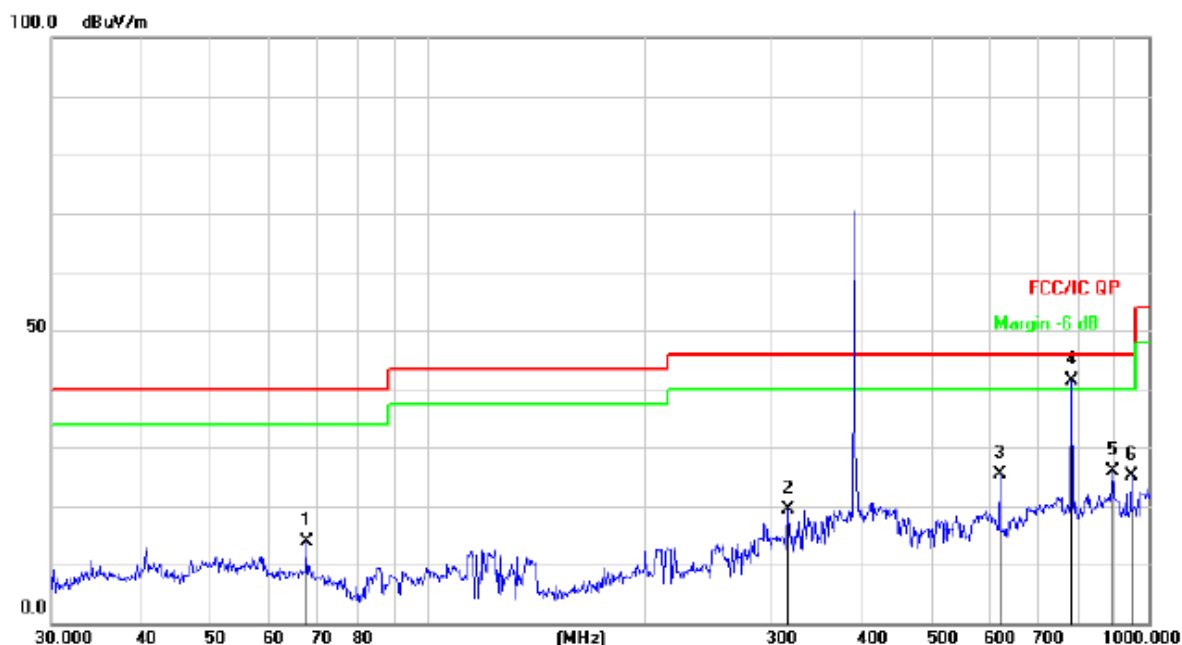

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		67.6751	30.43	-16.64	13.79	40.00	-26.21	QP
2		315.4806	31.32	-11.99	19.33	46.00	-26.67	QP
3		620.7096	30.16	-4.75	25.41	46.00	-20.59	QP
4	*	782.3451	43.62	-2.28	41.34	46.00	-4.66	QP
5		890.7278	26.03	-0.20	25.83	46.00	-20.17	QP
6		945.4397	25.50	-0.49	25.01	46.00	-20.99	QP

8. BANDWIDTH TEST

8.1 Block Diagram Of Test Setup



8.2 Limit

According to FCC 15.231(c) requirement:

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating between 70 MHz to 900 MHz. Those devices operating above 900 MHz, the emission spurious shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

B.W (20dBc) Limit = 0.25% * f(MHz) = 0.25% * 310MHz = 0.7750MHz

B.W (20dBc) Limit = 0.25% * f(MHz) = 0.25% * 315MHz = 0.7875MHz

B.W (20dBc) Limit = 0.25% * f(MHz) = 0.25% * 390MHz = 0.9750MHz

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	1% to 5% of the OBW
VB	≥RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

8.3 Test procedure

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 1% to 5% of the OBW, VBW≥ RBW, Sweep time = Auto.


8.4 EUT operating Conditions



The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

8.5 Test Result

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 3.7V
Test Mode :	Mode 1		

Frequency	20dB Bandwidth (kHz)	Limit (MHz)	Result
310 MHz	23.00	0.7750	PASS
315 MHz	20.19	0.7875	PASS
390 MHz	16.41	0.9750	PASS

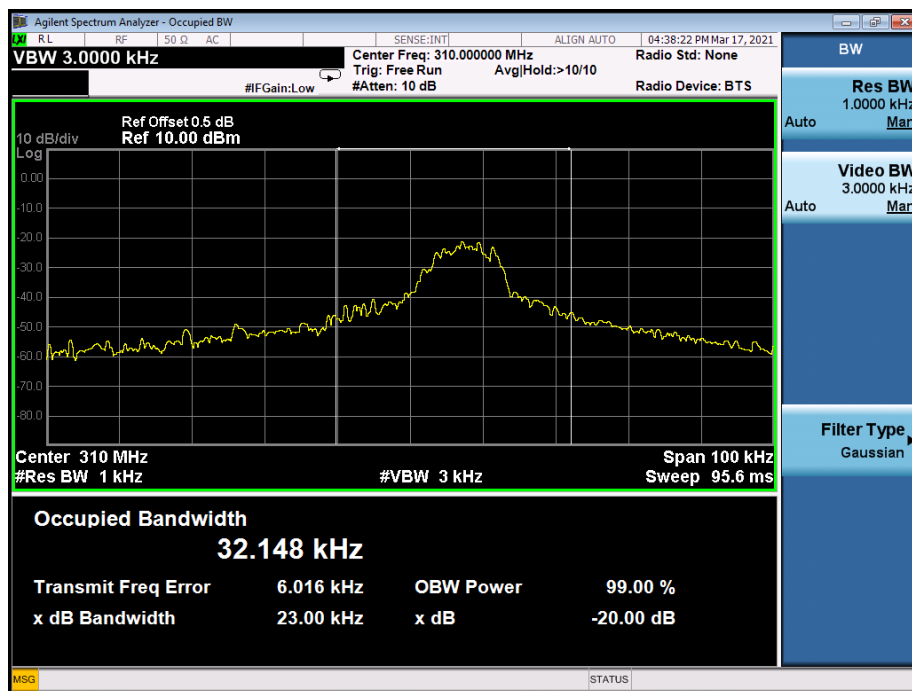

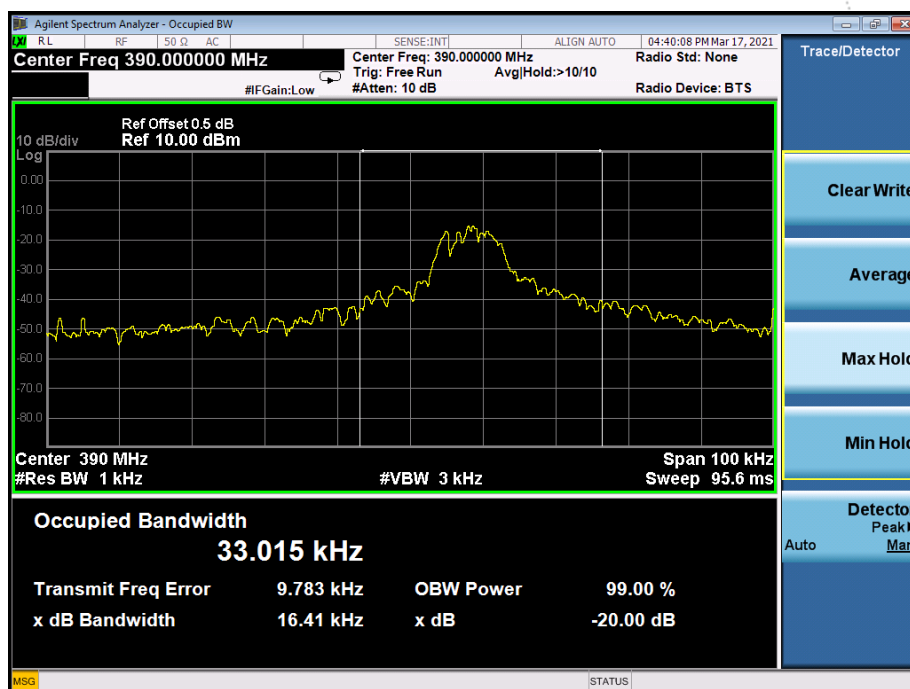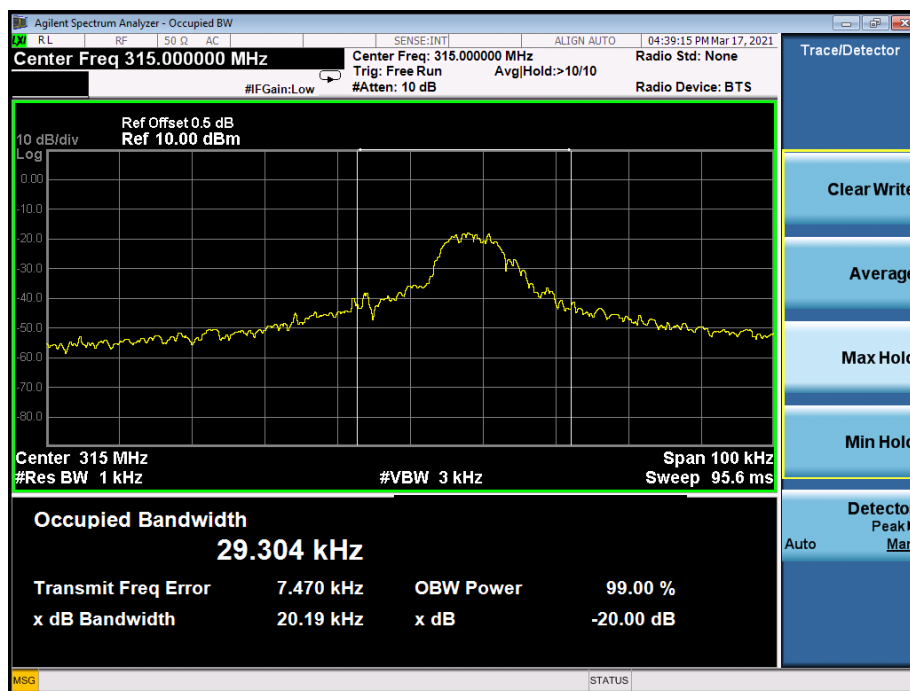

9. CALCULATION OF AVERAGE FACTOR

The output field strengths of specification in accordance with the FCC rules specify measurements with an average detector. During the test, a spectrum analyzer incorporating a peak detector was used. Therefore, a reduction factor can be applied to the resultant peak signal level and compared to the limit for measurement instrumentation incorporating an average detector.

The duty cycle is measured in 100 ms or the repetition cycle period, whichever is a shorter time frame. The duty cycle is measured by placing the spectrum analyzer to set zero span at 100kHz resolution bandwidth.

310MHz:

Averaging factor in dB = $20\log(\text{duty cycle})$

The duration of one cycle = 100ms

The duty cycle is simply the on-time divided the duration of one cycle

Duty Cycle = $(0.512\text{ms} \times 10 + 0.272\text{ms} \times 45) / 100\text{ms}$

= 17.36ms / 100ms


= 0.174

Therefore, the averaging factor is found by $20\log 0.174 = -15.19\text{dB}$


Test plot as follows:

Note: During the 100ms, the amount of pulse and on-time of pulse are the same for every pulse train.


Cycle

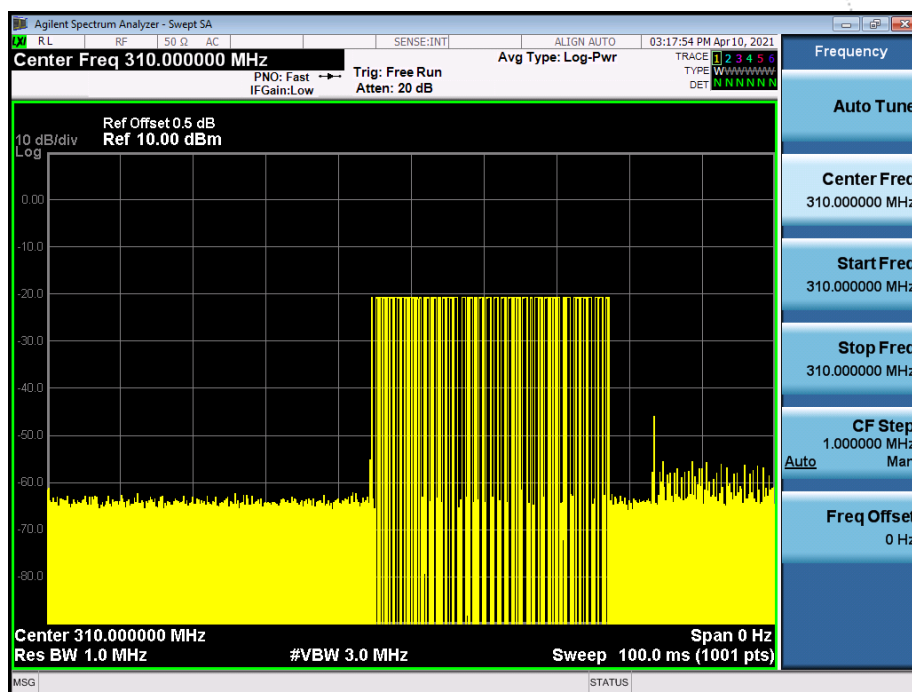

Pulse

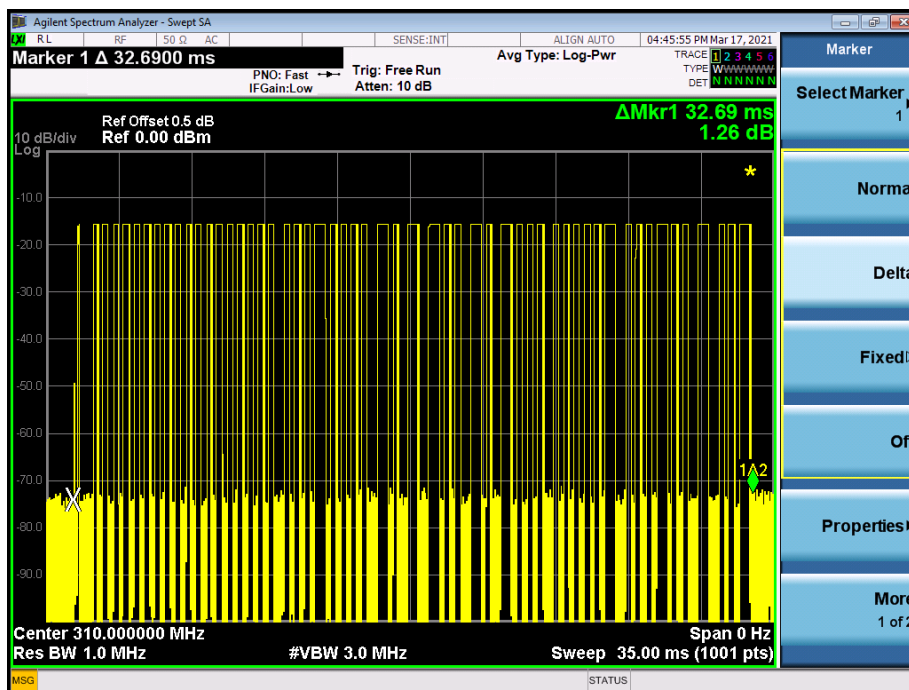

On-time

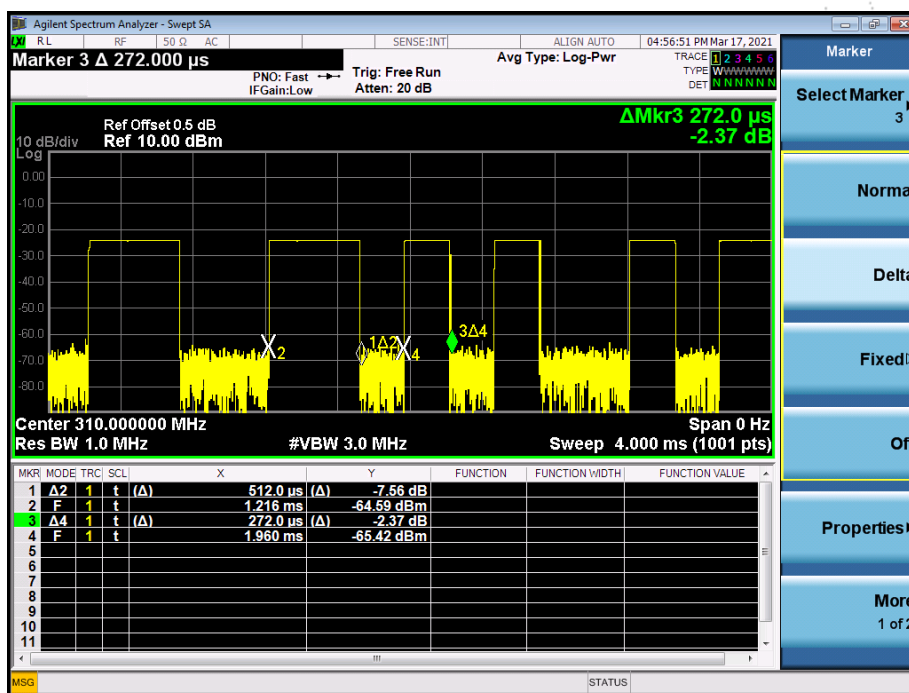

315MHz:

Averaging factor in dB = $20\log(\text{duty cycle})$

The duration of one cycle = 100ms

The duty cycle is simply the on-time divided the duration of one cycle

Duty Cycle = $(0.516\text{ms} \times 12 + 0.280\text{ms} \times 41) / 100\text{ms}$

= 17.672ms / 100ms


= 0.177

Therefore, the averaging factor is found by $20\log 0.177 = -15.04\text{dB}$


Test plot as follows:

Note: During the 100ms, the amount of pulse and on-time of pulse are the same for every pulse train.


Cycle

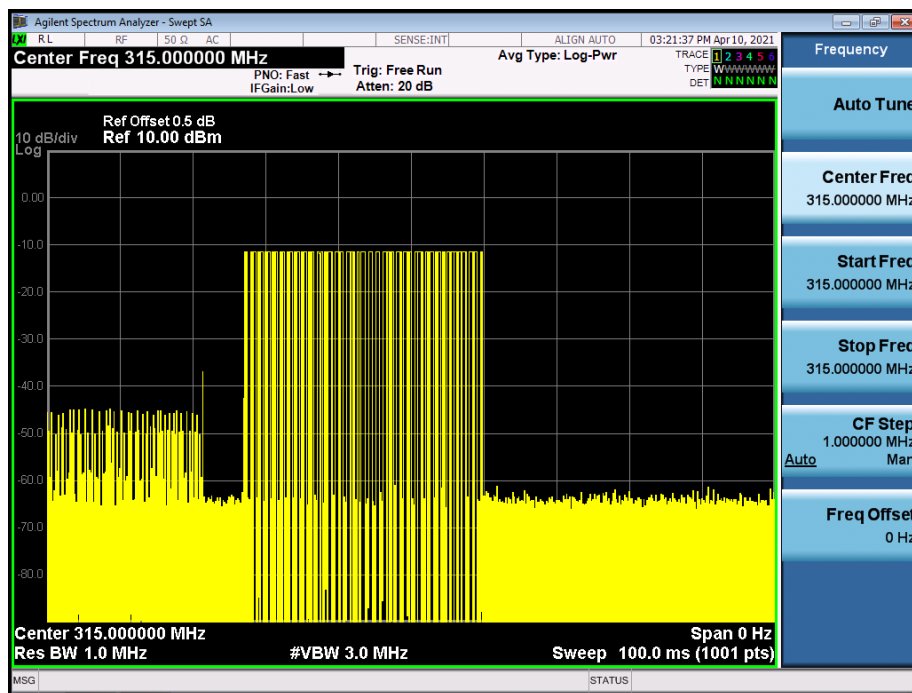

Pulse

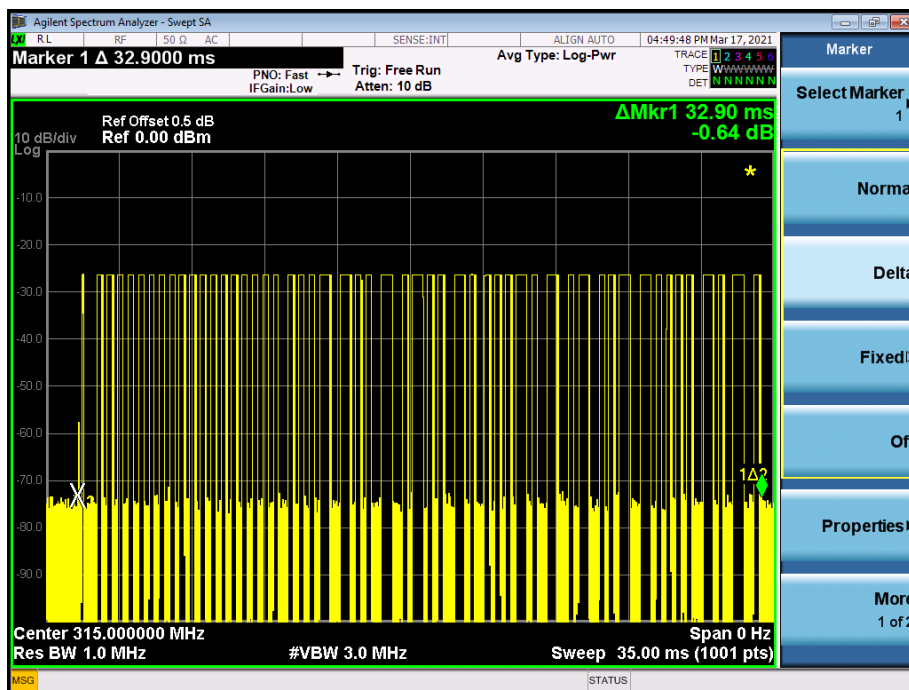

On-time

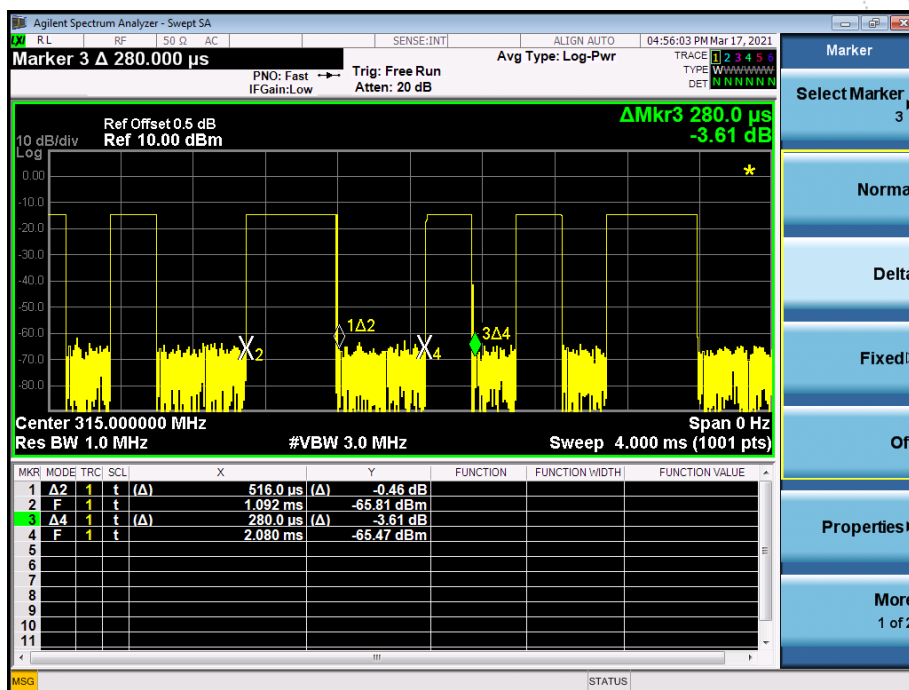

390MHz:

Averaging factor in dB = $20 \log(\text{duty cycle})$

The duration of one cycle = 100ms

The duty cycle is simply the on-time divided the duration of one cycle

Duty Cycle = $(0.520\text{ms} \times 12 + 0.290\text{ms} \times 41) / 100 \text{ ms}$

= $18.13\text{ms} / 100\text{ms}$


= 0.181

Therefore, the averaging factor is found by $20 \log 0.181 = -14.85\text{dB}$


Test plot as follows:

Note: During the 100ms, the amount of pulse and on-time of pulse are the same for every pulse train.


Cycle

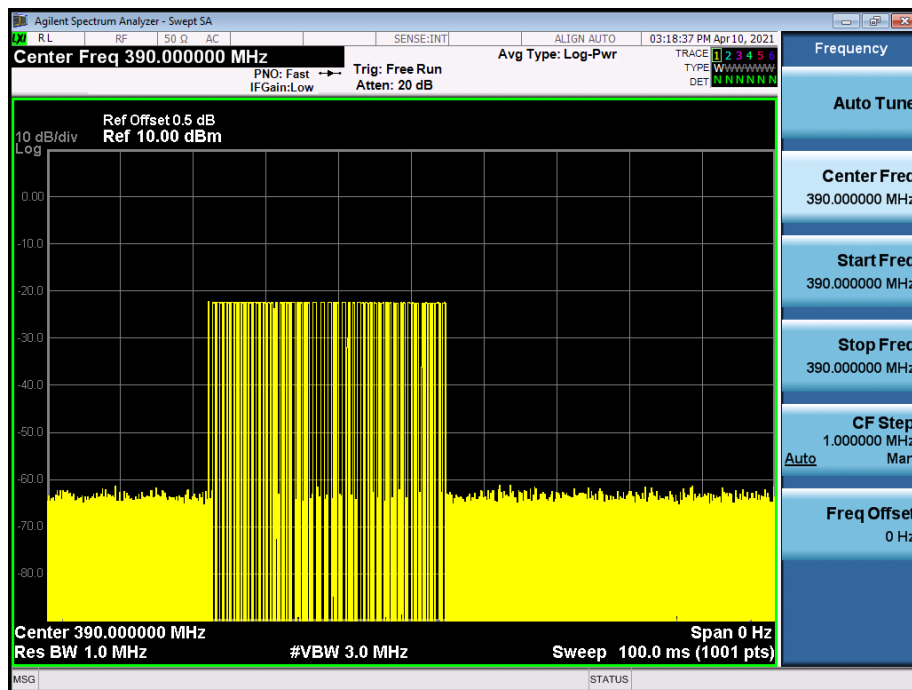

Pulse

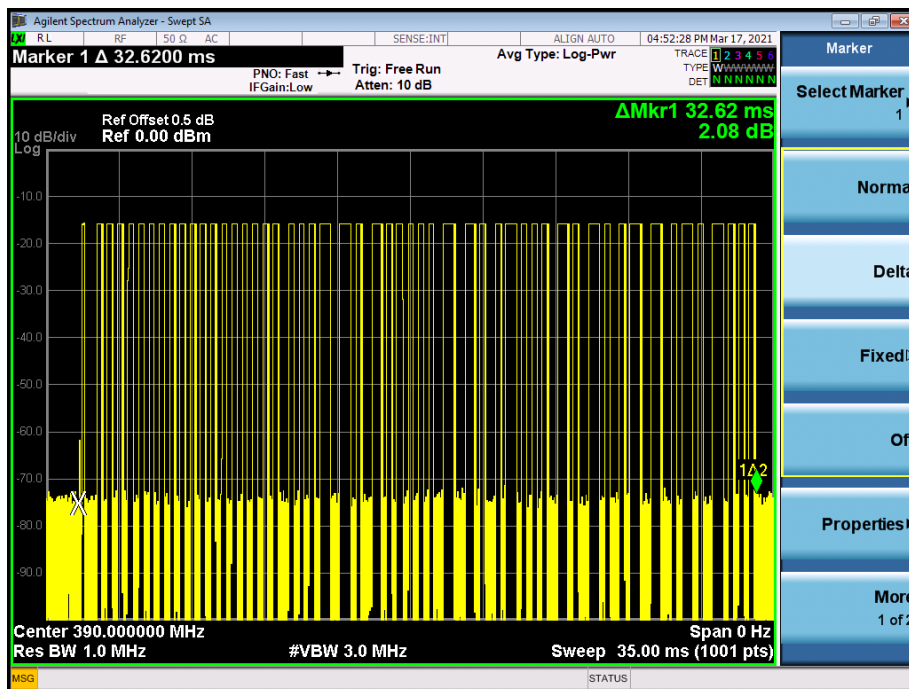

On-time

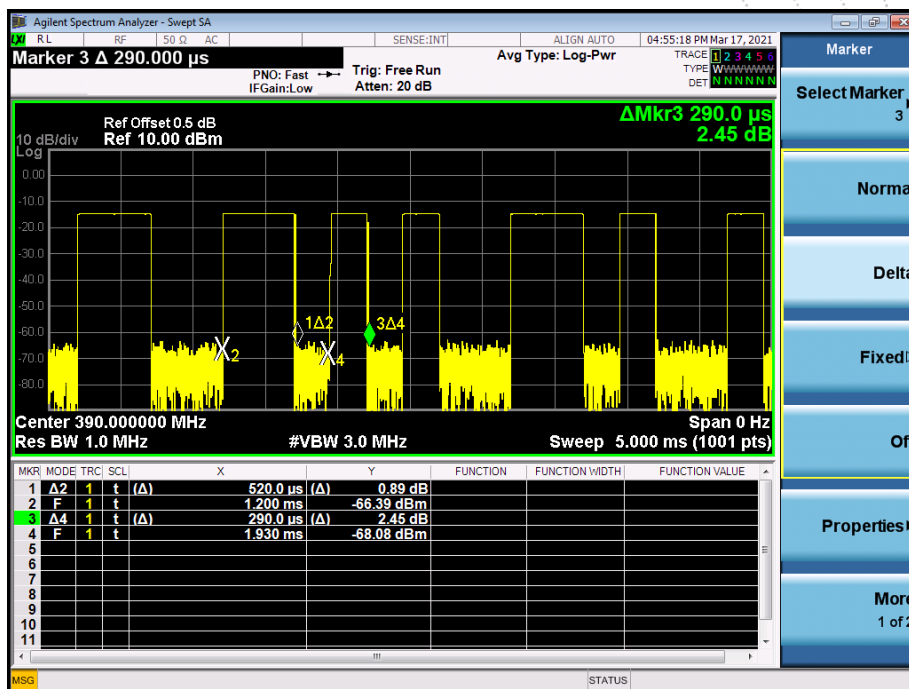

10. TRANSMISSION TERMINATION TIME

10.1 Block Diagram Of Test Setup



10.2 Limit

According to FCC 15.231(a) requirement:

A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

10.3 Test procedure


- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- c) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- d) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- e) Repeat above procedures until all measured frequencies were complete.

10.4 Test Result


Channel	Transmission termination time (second)	Limit (second)	Result
310 MHz	0.840s	<5s	Pass
315 MHz	0.840s	<5s	Pass
390 MHz	0.840s	<5s	Pass

Test plot as follows:


310 MHz

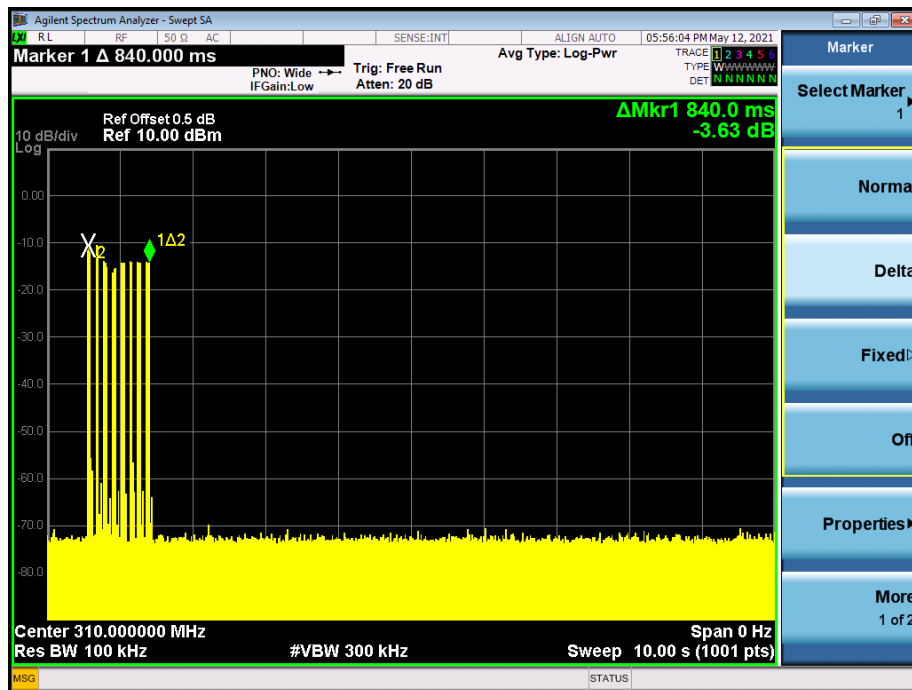

315 MHz

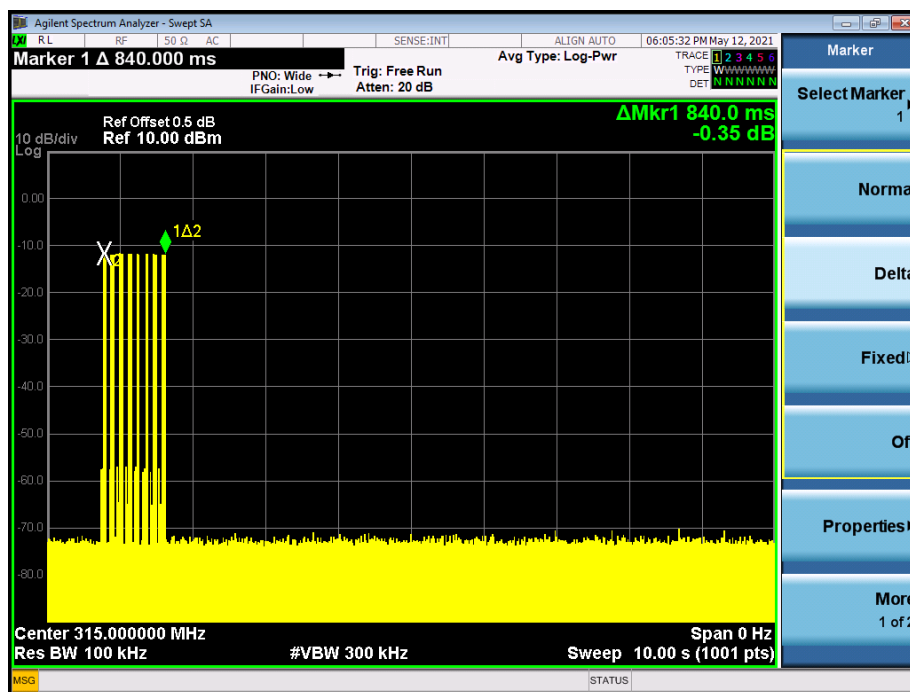

390 MHz

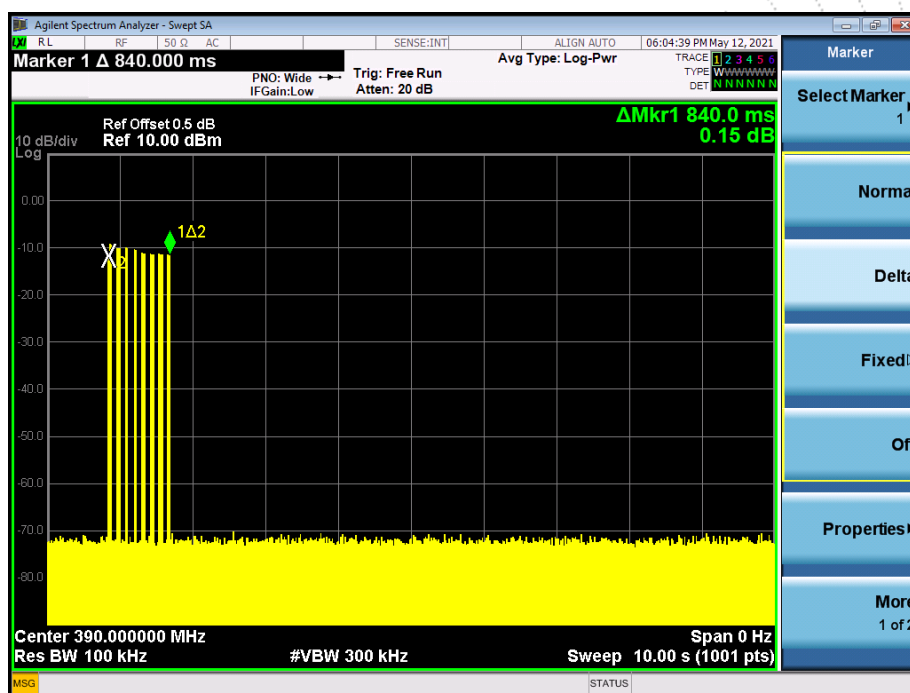


11. ANTENNA REQUIREMENT

11.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

11.2 EUT ANTENNA

The EUT antenna is the Internal antenna. It comply with the standard requirement.

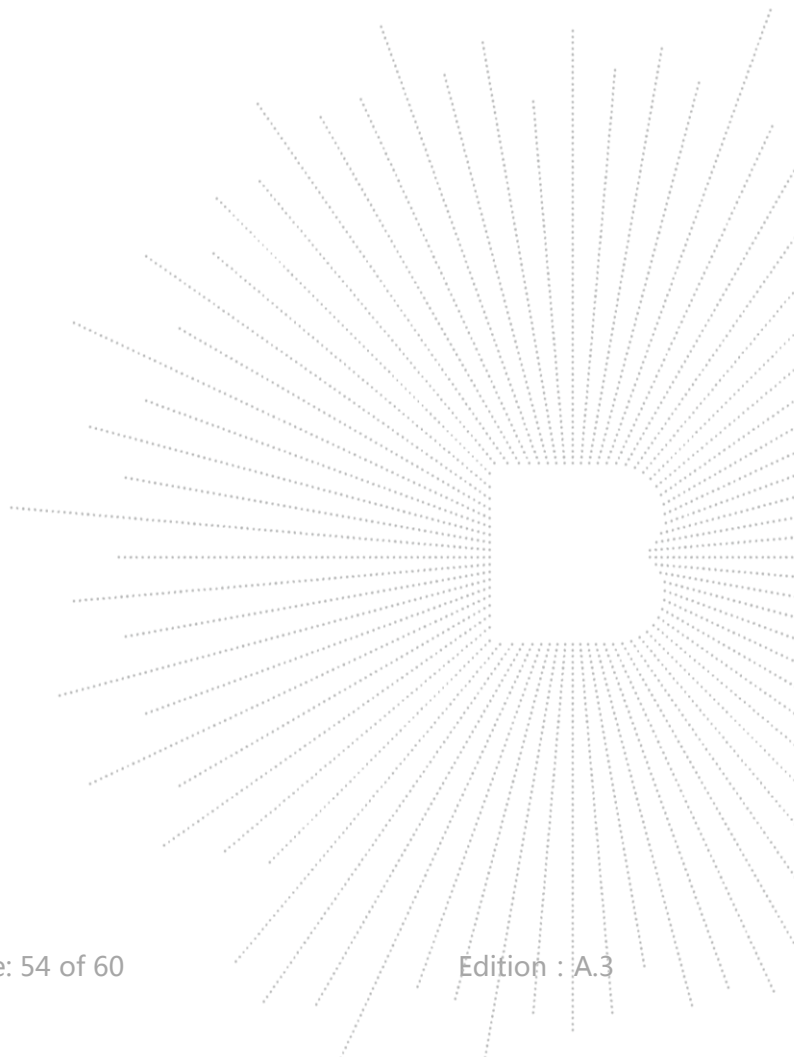


12. EUT PHOTOGRAPHS

EUT Photo 1



EUT Photo 2

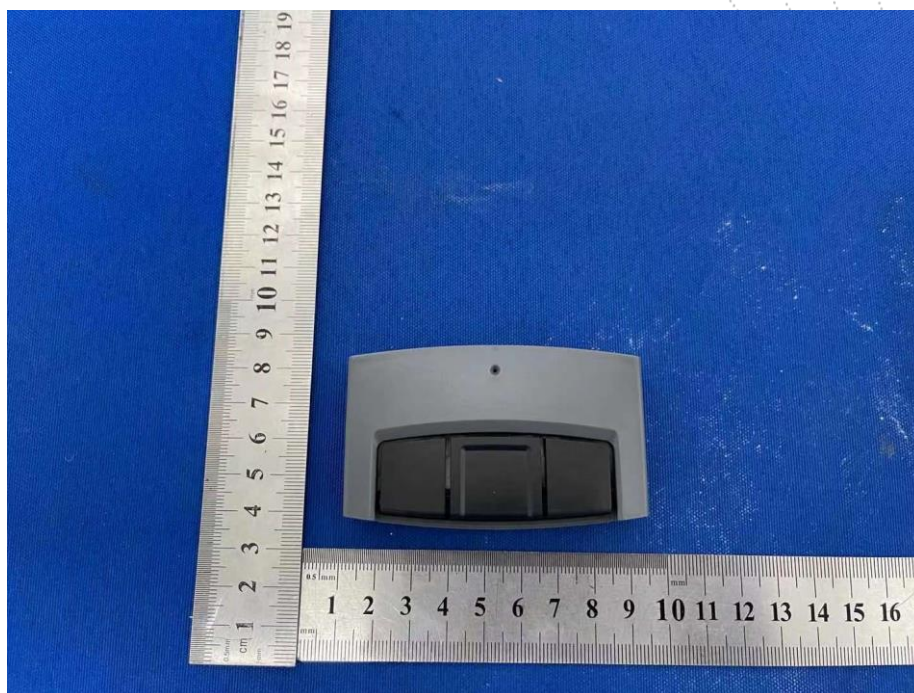


EUT Photo 3**EUT Photo 4**

13. T TEST SETUP PHOTOGRAPHS

Radiated Measurement Photos
893LM



891LM

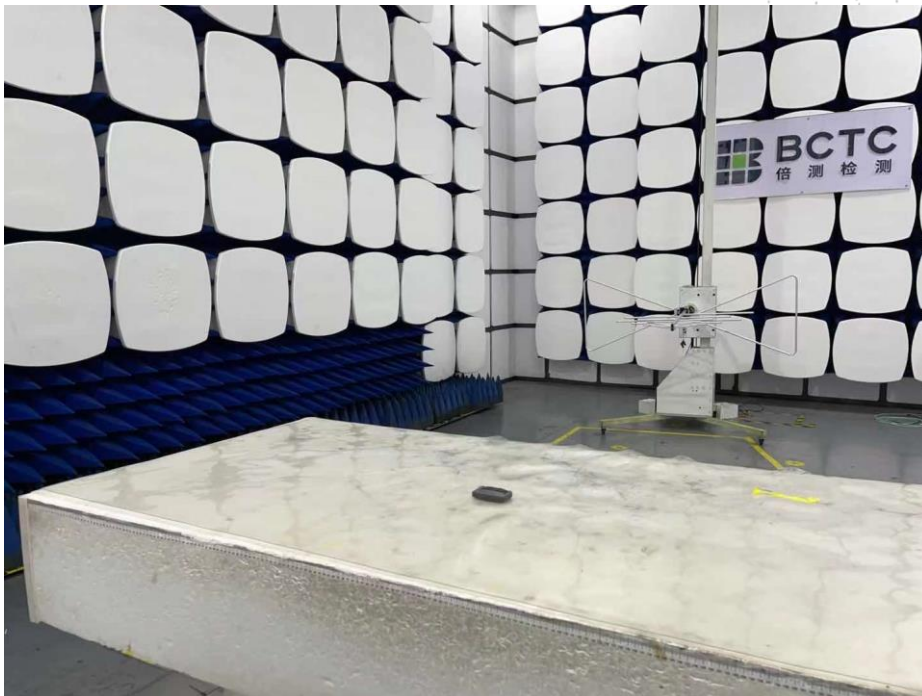


41A7633




893LM



891LM

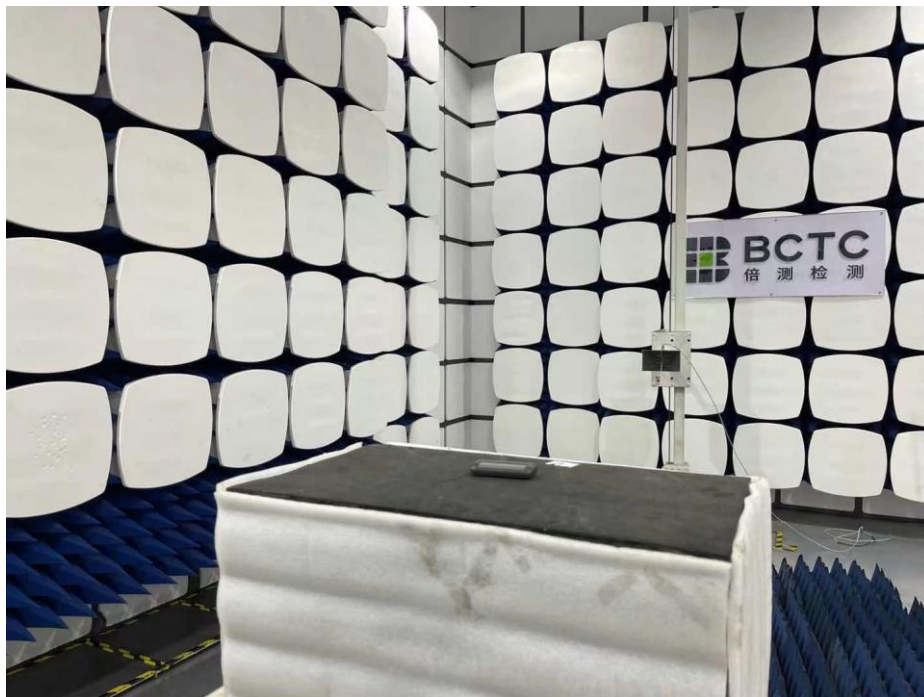

41A7633

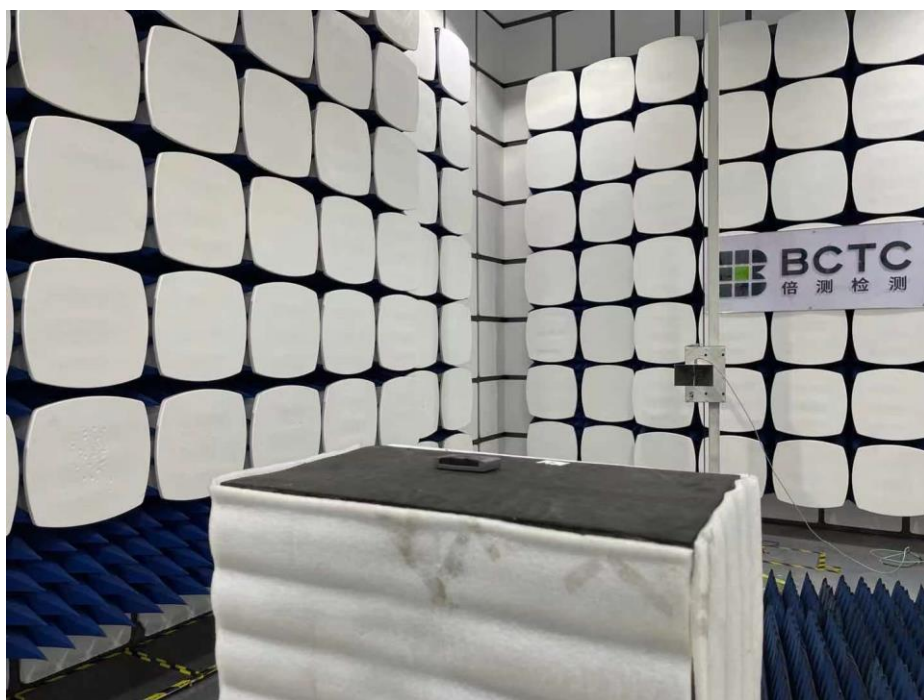

STATEMENT

- 1.The equipment lists are traceable to the national reference standards.
- 2.The test report can not be partially copied unless prior written approval is issued from our lab.
- 3.The test report is invalid without stamp of laboratory.
- 4.The test report is invalid without signature of person(s) testing and authorizing.
- 5.The test process and test result is only related to the Unit Under Test.
- 6.The quality system of our laboratory is in accordance with ISO/IEC17025.
- 7.If there is any objection to report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL : 400-788-9558

P.C.: 518103

FAX : 0755-33229357

Website : <http://www.bctc-lab.com>

E-Mail : bctc@bctc-lab.com.cn

***** END *****