



# FCC SAR TEST REPORT

**FCC ID** : 2AQYEFMP176  
**Equipment** : Mobile Phone  
**Brand Name** : FUJITSU  
**Model Name** : F-51A  
**Applicant** : FUJITSU CONNECTED TECHNOLOGIES Ltd.  
Chuorinkan 7-10-1 Yamato, Kanagawa 242-0007, Japan.  
**Manufacturer** : FUJITSU CONNECTED TECHNOLOGIES Ltd.  
Chuorinkan 7-10-1 Yamato, Kanagawa 242-0007, Japan.  
**Standard** : FCC 47 CFR Part 2 (2.1093)  
ANSI/IEEE C95.1-1992  
IEEE 1528-2013

The product was received on Mar. 13, 2020 and testing was started from Mar. 20, 2020 and completed on Apr. 17, 2020. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Cona Huang / Deputy Manager

**SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory**  
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

1. Statement of Compliance ..... 4
2. Guidance Applied..... 4
3. Equipment Under Test (EUT) Information..... 5
3.1 General Information ..... 5
3.2 General LTE SAR Test and Reporting Considerations ..... 6
4. RF Exposure Limits..... 7
4.1 Uncontrolled Environment..... 7
4.2 Controlled Environment..... 7
5. Specific Absorption Rate (SAR)..... 8
5.1 Introduction ..... 8
5.2 SAR Definition..... 8
6. System Description and Setup ..... 9
6.1 E-Field Probe ..... 10
6.2 Data Acquisition Electronics (DAE) ..... 10
6.3 Phantom..... 11
6.4 Device Holder..... 12
7. Measurement Procedures ..... 13
7.1 Spatial Peak SAR Evaluation ..... 13
7.2 Power Reference Measurement..... 14
7.3 Area Scan ..... 14
7.4 Zoom Scan..... 15
7.5 Volume Scan Procedures..... 15
7.6 Power Drift Monitoring..... 15
8. Test Equipment List ..... 16
9. System Verification ..... 17
9.1 Tissue Simulating Liquids..... 17
9.2 Tissue Verification ..... 18
9.3 System Performance Check Results..... 19
10. RF Exposure Positions ..... 20
10.1 Ear and handset reference point ..... 20
10.2 Definition of the cheek position ..... 21
10.3 Definition of the tilt position ..... 22
10.4 Body Worn Accessory ..... 22
10.5 Product Specific Exposure ..... 23
10.6 Wireless Router..... 23
11. GSM/UMTS/CDMA/LTE Output Power (Unit: dBm)..... 24
12. WiFi/Bluetooth Output Power (Unit: dBm) ..... 33
13. Antenna Location ..... 45
14. SAR Test Results ..... 46
14.1 Head SAR ..... 48
14.2 Hotspot SAR ..... 49
14.3 Body Worn Accessory SAR..... 51
14.4 Product Specific SAR..... 52
15. Simultaneous Transmission Analysis..... 53
15.1 Head Exposure Conditions ..... 53
15.2 Hotspot Exposure Conditions..... 54
15.3 Body-Worn Accessory Exposure Conditions ..... 55
15.4 Product Specific Exposure Conditions ..... 55
16. Uncertainty Assessment ..... 56
17. References ..... 56
Appendix A. Plots of System Performance Check
Appendix B. Plots of High SAR Measurement
Appendix C. DASYS Calibration Certificate
Appendix D. Test Setup Photos



### History of this test report

Report No.	Version	Description	Issued Date
FA011730	01	Initial issue of report	Apr. 28, 2020



**1. Statement of Compliance**

The maximum results of Specific Absorption Rate (SAR) found during testing for FUJITSU CONNECTED TECHNOLOGIES Ltd., Mobile Phone, F-51A, are as follows.

Equipment Class	Frequency Band	Highest SAR Summary				Highest Simultaneous Transmission 1g SAR (W/kg) of head	Highest Simultaneous Transmission 1g SAR (W/kg) of body
		Head (Separation 0mm)	Body-worn (Separation 10mm)	Hotspot (Separation 10mm)	Product Specific (Separation 0mm)		
		1g SAR (W/kg)			10g SAR (W/kg)		
Licensed	GSM850	0.04	0.11	0.11		0.41	0.35
	GSM1900	0.01	0.24	0.35			
	WCDMA V	0.03	0.10	0.10			
	LTE Band 5	0.05	0.17	0.17			
	LTE Band 12	0.06	0.19	0.19			
DTS	2.4GHz WLAN	0.16	0.04	0.08		0.41	0.35
NII	5GHz WLAN	0.21	0.04		0.15	0.41	0.32
DSS	Bluetooth	0.13	0.05	0.09		0.38	0.35
Date of Testing:		2020/3/20 ~ 2020/4/17					
<b>Remark :</b>							
1. The highest simultaneous transmission 1g SAR result is referring to section15 and rounded to two decimal places.							
2. This device WLAN 2.4GHz supports Hotspot operation.							

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications

**Reviewed by: Jason Wang**  
**Report Producer: Wan Liu**

**2. Guidance Applied**

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01



3. Equipment Under Test (EUT) Information

3.1 General Information

Product Feature & Specification	
Equipment Name	Mobile Phone
Brand Name	FUJITSU
Model Name	F-51A
FCC ID	2AQYEFMP176
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 12: 699 MHz ~ 716 MHz WLAN 2.4GHz Band: 2400 MHz ~ 2483.5 MHz WLAN 5.2GHz Band: 5150 MHz ~ 5250 MHz WLAN 5.3GHz Band: 5250 MHz ~ 5350 MHz WLAN 5.6GHz Band: 5470 MHz ~ 5725 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz NFC : 13.56 MHz
Mode	GSM/GPRS/DTM RMC/AMR 12.2Kbps HSDPA HSUPA LTE: QPSK, 16QAM, 64QAM WLAN: 802.11a/b/g/n/ac/ax HT20/HT40/VHT20/VHT40/VHT80/HE20/HE40/HE80 Bluetooth BR/EDR/LE NFC:ASK
GSM / (E)GPRS Dual Transfer mode	Class A – EUT can support Packet Switched and Circuit Switched Network simultaneously.
EUT Stage	Identical Prototype



**3.2 General LTE SAR Test and Reporting Considerations**

Summarized necessary items addressed in KDB 941225 D05 v02r05								
FCC ID	2AQYEFMP176							
Equipment Name	Mobile Phone							
Operating Frequency Range of each LTE transmission band	LTE Band 5: 824 MHz ~ 849 MHz LTE Band 12: 699 MHz ~ 716 MHz							
Channel Bandwidth	LTE Band 05:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 12:1.4MHz, 3MHz, 5MHz, 10MHz							
uplink modulations used	QPSK / 16QAM / 64QAM							
LTE Voice / Data requirements	Voice and Data							
LTE MPR permanently built-in by design	<b>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</b>							
	Modulation	Channel bandwidth / Transmission bandwidth ( $N_{RB}$ )						MPR (dB)
		1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	
256 QAM	≥ 1						≤ 5	
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)							
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.							
Transmission (H, M, L) channel numbers and frequencies in each LTE band								
LTE Band 5								
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5
H	20643	848.3	20635	847.5	20625	846.5	20600	844
LTE Band 12								
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	23017	699.7	23025	700.5	23035	701.5	23060	704
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5
H	23173	715.3	23165	714.5	23155	713.5	23130	711



## 4. RF Exposure Limits

### 4.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

### 4.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Limits for Occupational/Controlled Exposure (W/kg)**

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

**Limits for General Population/Uncontrolled Exposure (W/kg)**

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

## **5. Specific Absorption Rate (SAR)**

### **5.1 Introduction**

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### **5.2 SAR Definition**

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the RMS electrical field strength.



## 6. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:




- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.


**6.1 E-Field Probe**

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG).The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

**<ES3DV3 Probe>**

<b>Construction</b>	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
<b>Frequency</b>	10 MHz – 4 GHz; Linearity: $\pm 0.2$ dB (30 MHz – 4 GHz)	
<b>Directivity</b>	$\pm 0.2$ dB in TSL (rotation around probe axis) $\pm 0.3$ dB in TSL (rotation normal to probe axis)	
<b>Dynamic Range</b>	5 $\mu$ W/g – >100 mW/g; Linearity: $\pm 0.2$ dB	
<b>Dimensions</b>	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

**<EX3DV4 Probe>**

<b>Construction</b>	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
<b>Frequency</b>	10 MHz – >6 GHz Linearity: $\pm 0.2$ dB (30 MHz – 6 GHz)	
<b>Directivity</b>	$\pm 0.3$ dB in TSL (rotation around probe axis) $\pm 0.5$ dB in TSL (rotation normal to probe axis)	
<b>Dynamic Range</b>	10 $\mu$ W/g – >100 mW/g Linearity: $\pm 0.2$ dB (noise: typically <1 $\mu$ W/g)	
<b>Dimensions</b>	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

**6.2 Data Acquisition Electronics (DAE)**

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.


The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



**Fig 5.1 Photo of DAE**


**6.3 Phantom**

**<SAM Twin Phantom>**

<b>Shell Thickness</b>	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
<b>Filling Volume</b>	Approx. 25 liters	
<b>Dimensions</b>	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
<b>Measurement Areas</b>	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

**<ELI Phantom>**

<b>Shell Thickness</b>	2 ± 0.2 mm (sagging: <1%)	
<b>Filling Volume</b>	Approx. 30 liters	
<b>Dimensions</b>	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

## **6.4 Device Holder**

### **<Mounting Device for Hand-Held Transmitter>**

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

### **<Mounting Device for Laptops and other Body-Worn Transmitters>**

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops



## **7. Measurement Procedures**

The measurement procedures are as follows:

### <Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

### <SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

### **7.1 Spatial Peak SAR Evaluation**

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

**7.2 Power Reference Measurement**

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

**7.3 Area Scan**

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

**7.4 Zoom Scan**

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		$\leq 2$ GHz: $\leq 8$ mm 2 – 3 GHz: $\leq 5$ mm*	3 – 4 GHz: $\leq 5$ mm* 4 – 6 GHz: $\leq 4$ mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	$\leq 5$ mm	3 – 4 GHz: $\leq 4$ mm 4 – 5 GHz: $\leq 3$ mm 5 – 6 GHz: $\leq 2$ mm	
	graded grid	$\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	$\leq 4$ mm	3 – 4 GHz: $\leq 3$ mm 4 – 5 GHz: $\leq 2.5$ mm 5 – 6 GHz: $\leq 2$ mm
		$\Delta z_{Zoom}(n>1)$ : between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	$\geq 30$ mm	3 – 4 GHz: $\geq 28$ mm 4 – 5 GHz: $\geq 25$ mm 5 – 6 GHz: $\geq 22$ mm	
Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is $\leq 1.4$ W/kg, $\leq 8$ mm, $\leq 7$ mm and $\leq 5$ mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

**7.5 Volume Scan Procedures**

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

**7.6 Power Drift Monitoring**

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



### 8. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1107	Mar. 08, 2019	Mar. 06, 2021
SPEAG	835MHz System Validation Kit	D835V2	4d167	Nov. 25, 2019	Nov. 24, 2020
SPEAG	1900MHz System Validation Kit	D1900V2	5d041	Sep. 11, 2018	Sep. 09, 2020
SPEAG	2450MHz System Validation Kit	D2450V2	736	Aug. 31, 2018	Aug. 29, 2020
SPEAG	5GHz System Validation Kit	D5GHzV2	1006	Sep. 27, 2018	Sep. 25, 2020
SPEAG	Data Acquisition Electronics	DAE3	495	May. 21, 2019	May. 20, 2020
SPEAG	Data Acquisition Electronics	DAE3	577	Sep. 17, 2019	Sep. 16, 2020
SPEAG	Data Acquisition Electronics	DAE4	699	Feb. 26, 2020	Feb. 25, 2021
SPEAG	Data Acquisition Electronics	DAE4	1305	Apr. 30, 2019	Apr. 29, 2020
SPEAG	Dosimetric E-Field Probe	ES3DV3	3169	May. 24, 2019	May. 23, 2020
SPEAG	Dosimetric E-Field Probe	ES3DV3	3184	Sep. 25, 2019	Sep. 24, 2020
SPEAG	Dosimetric E-Field Probe	EX3DV4	3728	Feb. 04, 2020	Feb. 03, 2021
SPEAG	Dosimetric E-Field Probe	EX3DV4	7306	Jul. 22, 2019	Jul. 21, 2020
RCPTWN	Thermometer	HTC-1	TM685-1	Nov. 12, 2019	Nov. 11, 2020
RCPTWN	Thermometer	HTC-1	TM560-2	Nov. 12, 2019	Nov. 11, 2020
Anritsu	Radio Communication Analyzer	MT8821C	6201341950	Oct. 31, 2019	Oct. 30, 2020
Agilent	Wireless Communication Test Set	E5515C	MY50266977	May. 27, 2019	May. 26, 2020
R&S	BT Base Station	CBT32	100519	Jun. 04, 2019	Jun. 03, 2020
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Anritsu	Signal Generator	MG3710A	6201502524	Nov. 20, 2019	Nov. 19, 2020
Agilent	ENA Network Analyzer	E5071C	MY46104758	Sep. 06, 2019	Sep. 05, 2020
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Sep. 18, 2019	Sep. 17, 2020
LINE SEIKI	Digital Thermometer	DTM3000-spezial	3169	Sep. 10, 2019	Sep. 09, 2020
Anritsu	Power Meter	ML2495A	1036004	Aug. 08, 2019	Aug. 07, 2020
Anritsu	Power Sensor	MA2411B	1027253	Aug. 08, 2019	Aug. 07, 2020
Anritsu	Power Meter	ML2495A	1419002	May. 29, 2019	May. 28, 2020
Anritsu	Power Sensor	MA2411B	1339124	May. 29, 2019	May. 28, 2020
Agilent	Spectrum Analyzer	E4408B	MY44211028	Aug. 27, 2019	Aug. 26, 2020
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jun. 27, 2019	Jun. 26, 2020
Mini-Circuits	Power Amplifier	ZVE-8G+	6418	Oct. 16, 2019	Oct. 15, 2020
Mini-Circuits	Power Amplifier	ZVE-8G+	6382	Aug. 12, 2019	Aug. 11, 2020
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005- 3	N/A	Note 1	

**General Note:**

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
2. Referring to KDB 865664 D01v01r04, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
3. The justification data of dipole D750V3, SN: 1107, D1900V2, SN: 5d041, D2450V2, SN: 736, D5GHzV2,SN: 1006, can be found in appendix C. The return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration.




## **9. System Verification**

### **9.1 Tissue Simulating Liquids**

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.2.



**Fig 10.1** Photo of Liquid Height for Head SAR

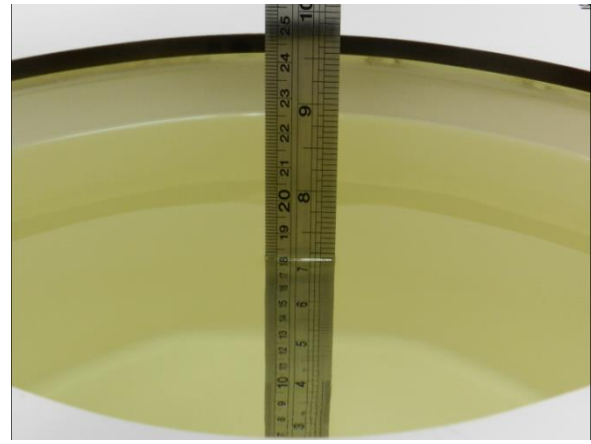

**Fig 10.2** Photo of Liquid Height for Body SAR



**9.2 Tissue Verification**

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0

**Simulating Liquid for 5GHz, Manufactured by SPEAG**

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

**<Tissue Dielectric Parameter Check Results>**


Frequency (MHz)	Liquid Temp. (°C)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )	Conductivity Target ( $\sigma$ )	Permittivity Target ( $\epsilon_r$ )	Delta ( $\sigma$ ) (%)	Delta ( $\epsilon_r$ ) (%)	Limit (%)	Date
750	22.2	0.894	40.536	0.89	41.90	0.45	-3.26	±5	2020/3/20
835	22.2	0.897	42.895	0.90	41.50	-0.33	3.36	±5	2020/3/20
835	22.3	0.877	41.577	0.90	41.50	-2.56	0.19	±5	2020/3/31
1900	22.2	1.418	39.211	1.40	40.00	1.29	-1.97	±5	2020/3/31
2450	22.3	1.848	39.101	1.80	39.20	2.67	-0.25	±5	2020/4/16
5250	22.6	4.674	35.972	4.71	35.95	-0.76	0.06	±5	2020/4/17
5600	22.6	5.014	35.497	5.07	35.50	-1.10	-0.01	±5	2020/4/17
5750	22.6	5.171	35.291	5.22	35.35	-0.94	-0.17	±5	2020/4/17

**9.3 System Performance Check Results**

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2020/3/20	750	250	D750V3-1107	EX3DV4 - SN7306	DAE3 Sn577	2.09	8.32	8.36	0.48
2020/3/20	835	250	D835V2-4d167	EX3DV4 - SN7306	DAE3 Sn577	2.50	9.55	10	4.71
2020/3/31	835	250	D835V2-4d167	ES3DV3 - SN3184	DAE4 Sn1305	2.23	9.55	8.92	-6.60
2020/3/31	1900	250	D1900V2-5d041	ES3DV3 - SN3169	DAE4 Sn699	9.52	40.20	38.08	-5.27
2020/4/16	2450	250	D2450V2-736	EX3DV4 - SN3728	DAE3 Sn495	13.10	52.70	52.4	-0.57
2020/4/17	5250	100	D5GHzV2-1006-5250	EX3DV4 - SN3728	DAE3 Sn495	7.87	80.70	78.7	-2.48
2020/4/17	5600	100	D5GHzV2-1006-5600	EX3DV4 - SN3728	DAE3 Sn495	8.52	83.30	85.2	2.28
2020/4/17	5750	100	D5GHzV2-1006-5750	EX3DV4 - SN3728	DAE3 Sn495	7.83	80.40	78.3	-2.61

Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2020/4/17	5250	100	D5GHzV2-1006-5250	EX3DV4 - SN3728	DAE3 Sn495	2.23	23.20	22.3	-3.88
2020/4/17	5600	100	D5GHzV2-1006-5600	EX3DV4 - SN3728	DAE3 Sn495	2.40	23.80	24	0.84
2020/4/17	5750	100	D5GHzV2-1006-5750	EX3DV4 - SN3728	DAE3 Sn495	2.21	22.90	22.1	-3.49

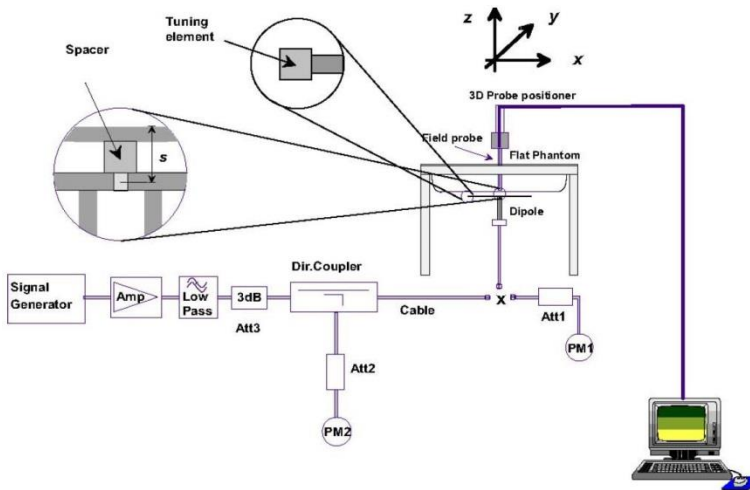

**Fig 8.3.1 System Performance Check Setup**



**Fig 8.3.2 Setup Photo**

## 10. RF Exposure Positions

### 10.1 Ear and handset reference point

Figure 9.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M,” the left ear reference point (ERP) is marked “LE,” and the right ERP is marked “RE.” Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 9.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 9.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 9.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

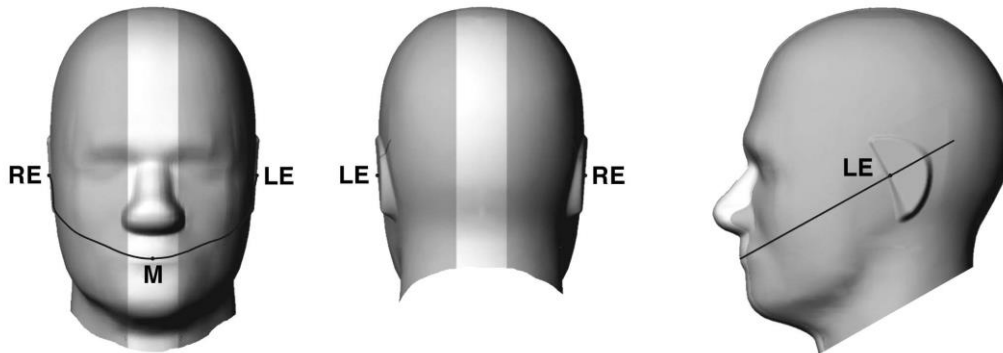


Fig 9.1.1 Front, back, and side views of SAM twin phantom



Fig 9.1.2 Close-up side view of phantom showing the ear region.

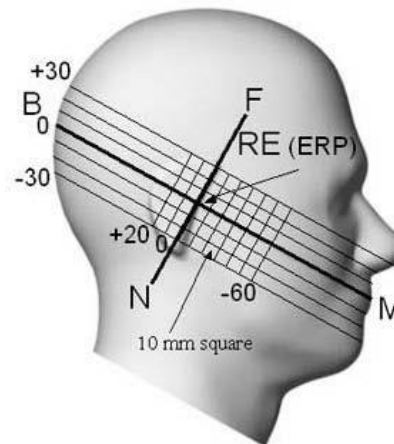



Fig 9.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

**10.2 Definition of the cheek position**


1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width  $w_t$  of the handset at the level of the acoustic output (point A in Figure 9.2.1 and Figure 9.2.2), and the midpoint of the width  $w_b$  of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 9.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 9.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 9.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 9.2.3. The actual rotation angles should be documented in the test report.



**Fig 9.2.1 Handset vertical and horizontal reference lines—“fixed case”**

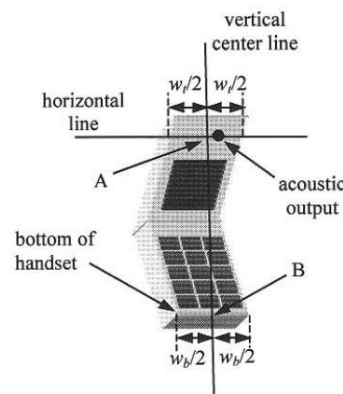


**Fig 9.2.2 Handset vertical and horizontal reference lines—“clam-shell case”**

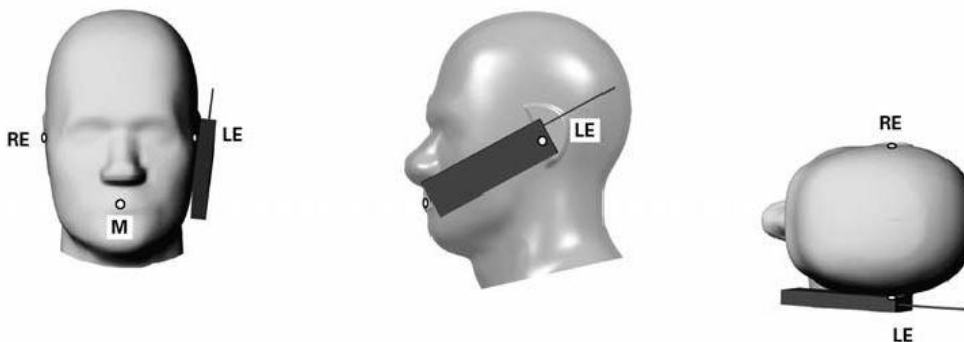

**Fig 9.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.**

**10.3 Definition of the tilt position**

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 9.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

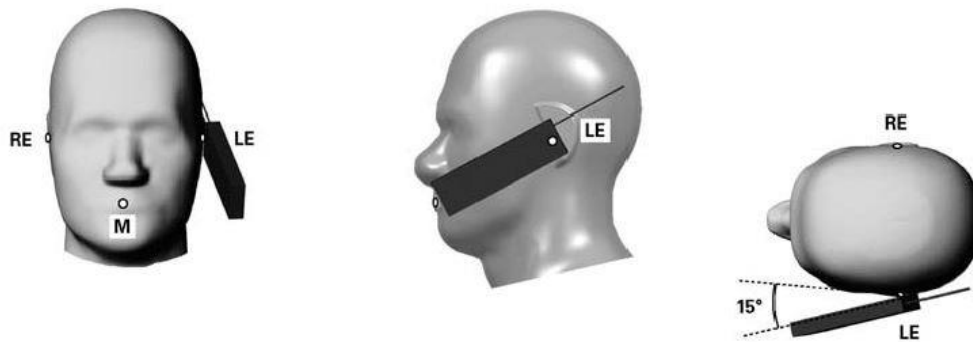


**Fig 9.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.**

**10.4 Body Worn Accessory**

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-chip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

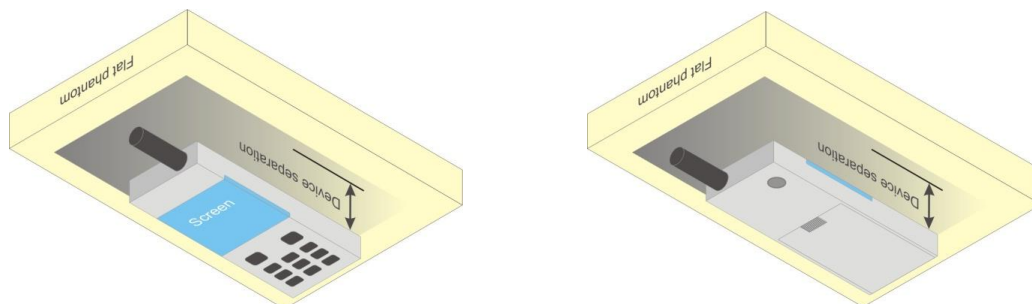

**Fig 9.4 Body Worn Position**



### **10.5 Product Specific Exposure**

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at  $\leq 25$  mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.6 The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

### **10.6 Wireless Router**

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets (L x W  $\geq 9$  cm x 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.



## 11. GSM/UMTS/CDMA/LTE Output Power (Unit: dBm)

### <GSM Conducted Power>

- Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
- Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / DTM modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (3Tx slots) for GSM850 and GPRS (4Tx slots) for GSM1900 is considered as the primary mode.
- Other configurations of GSM / GPRS / DTM are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode, SAR measurement is not required for the secondary mode

GSM850		Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel		128	189	251		128	189	251	
Frequency (MHz)		824.2	836.4	848.8	824.2	836.4	848.8		
GSM 1 Tx slot		30.88	31.08	31.09	32.00	21.88	22.08	22.09	23.00
GPRS 1 Tx slot		30.90	31.13	31.15	32.00	21.90	22.13	22.15	23.00
GPRS 2 Tx slots		28.68	28.94	29.00	29.00	22.68	22.94	23.00	23.00
GPRS 3 Tx slots		26.42	27.15	27.22	28.00	22.16	22.89	22.96	23.74
GPRS 4 Tx slots		25.14	25.50	25.60	26.00	22.14	22.50	22.60	23.00
DTM Multi-slot class 5	GSM 1 Tx slot	28.63	28.93	28.88	29.00	22.62	22.91	22.85	22.98
	GPRS 1 Tx slot	28.66	28.94	28.86	29.00				
DTM Multi-slot class 9	GSM 1 Tx slot	28.62	28.91	28.82	29.00	22.61	22.89	22.80	22.98
	GPRS 1 Tx slot	28.65	28.92	28.83	29.00				
DTM Multi-slot class 11	GSM 1 Tx slot	26.44	27.03	27.11	28.00	22.19	22.76	22.82	23.74
	GPRS 2 Tx slots	26.45	27.01	27.06	28.00				

GSM1900		Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel		512	661	810		512	661	810	
Frequency (MHz)		1850.2	1880	1909.8	1850.2	1880	1909.8		
GSM 1 Tx slot		29.91	29.43	29.20	30.00	20.91	20.43	20.20	21.00
GPRS 1 Tx slot		29.95	29.47	29.21	30.00	20.95	20.47	20.21	21.00
GPRS 2 Tx slots		26.77	26.88	26.77	27.00	20.77	20.88	20.77	21.00
GPRS 3 Tx slots		25.00	24.89	24.78	25.00	20.74	20.63	20.52	20.74
GPRS 4 Tx slots		23.61	23.61	23.65	24.00	20.61	20.61	20.65	21.00
DTM Multi-slot class 5	GSM 1 Tx slot	26.71	26.83	26.73	27.00	20.69	20.80	20.70	20.98
	GPRS 1 Tx slot	26.72	26.81	26.72	27.00				
DTM Multi-slot class 9	GSM 1 Tx slot	26.68	26.78	26.68	27.00	20.64	20.73	20.64	20.98
	GPRS 1 Tx slot	26.65	26.73	26.65	27.00				
DTM Multi-slot class 11	GSM 1 Tx slot	24.87	24.91	24.73	25.00	20.60	20.63	20.46	20.74
	GPRS 2 Tx slots	24.86	24.88	24.71	25.00				



**<WCDMA Conducted Power>**

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.

A summary of these settings are illustrated below:

**HSDPA Setup Configuration:**

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
  - i. Set Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters were set according to each
  - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
  - iii. Set RMC 12.2Kbps + HSDPA mode.
  - iv. Set Cell Power = -86 dBm
  - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
  - vi. Select HSDPA Uplink Parameters
  - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
  - viii. Set Ack-Nack Repetition Factor to 3
  - ix. Set CQI Feedback Cycle (k) to 4 ms
  - x. Set CQI Repetition Factor to 2
  - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

**Table C.10.1.4:  $\beta$  values for transmitter characteristics tests with HS-DPCCH**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}$ (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1:  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{HS} = 30/15 * \beta_c$ .

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA,  $\Delta_{ACK}$  and  $\Delta_{NACK} = 30/15$  with  $\beta_{HS} = 30/15 * \beta_c$ , and  $\Delta_{CQI} = 24/15$  with  $\beta_{HS} = 24/15 * \beta_c$ .

Note 3: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{HS}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$ .

**Setup Configuration**

**HSUPA Setup Configuration:**

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting \* :
  - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
  - ii. Set the Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
  - iii. Set Cell Power = -86 dBm
  - iv. Set Channel Type = 12.2k + HSPA
  - v. Set UE Target Power
  - vi. Power Ctrl Mode= Alternating bits
  - vii. Set and observe the E-TFCl
  - viii. Confirm that E-TFCl is equal to the target E-TFCl of 75 for sub-test 1, and other subtest's E-TFCl
- d. The transmitted maximum output power was recorded.

**Table C.11.1.3:  $\beta$  values for transmitter characteristics tests with HS-DPCCH and E-DCH**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}$ (Note1)	$\beta_{ec}$	$\beta_{ed}$ (Note 4) (Note 5)	$\beta_{ed}$ (SF)	$\beta_{ed}$ (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCl
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4,  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{hs} = 30/15 * \beta_c$ . For sub-test 5,  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 5/15$  with  $\beta_{hs} = 5/15 * \beta_c$ .

Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 10/15$  and  $\beta_d = 15/15$ .

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5:  $\beta_{ed}$  can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

**Setup Configuration**



<WCDMA Conducted Power>

General Note:


1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA is  $\leq 1/4$  dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA to RMC12.2Kbps and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for HSDPA / HSUPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA) are less than  $1/4$  dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA.

Band		WCDMA V			Tune-up Limit (dBm)
TX Channel		4132	4182	4233	
Rx Channel		4357	4407	4458	
Frequency (MHz)		826.4	836.4	846.6	
3GPP Rel 99	AMR 12.2Kbps	22.93	23.03	23.18	24.00
3GPP Rel 99	RMC 12.2Kbps	22.94	23.04	23.20	24.00
3GPP Rel 6	HSDPA Subtest-1	21.91	22.04	22.22	23.00
3GPP Rel 6	HSDPA Subtest-2	21.65	21.98	22.22	23.00
3GPP Rel 6	HSDPA Subtest-3	21.44	21.51	21.67	22.50
3GPP Rel 6	HSDPA Subtest-4	21.41	21.51	21.72	22.50
3GPP Rel 6	HSUPA Subtest-1	21.92	22.01	22.25	23.00
3GPP Rel 6	HSUPA Subtest-2	19.91	19.99	20.22	21.00
3GPP Rel 6	HSUPA Subtest-3	20.96	21.06	21.20	22.00
3GPP Rel 6	HSUPA Subtest-4	19.94	20.02	20.23	21.00
3GPP Rel 6	HSUPA Subtest-5	22.00	22.00	22.20	23.00


**<LTE Conducted Power>**

**General Note:**

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B5/B12 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. According to 2017 TCB workshop, for 64 QAM and 16 QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 64QAM and 16QAM signal modulation are correct.

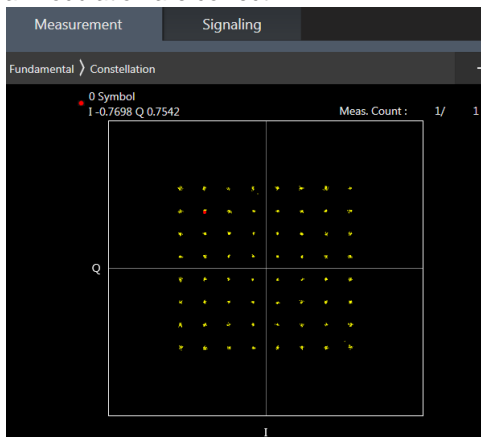

**64QAM**

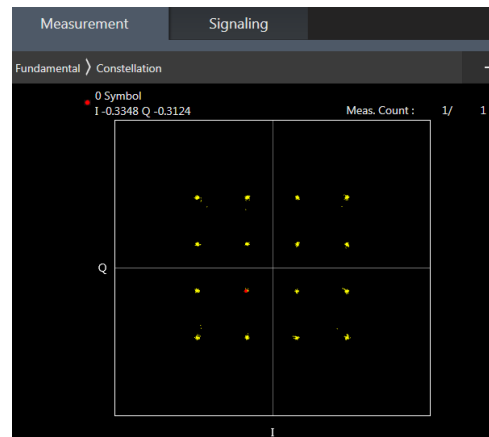

**16QAM**



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	23.76	23.85	23.98	24	0
10	QPSK	1	25	23.71	23.83	23.97		
10	QPSK	1	49	23.86	23.91	23.27		
10	QPSK	25	0	22.84	22.98	22.99	23.5	0.5
10	QPSK	25	12	22.92	23.00	23.06		
10	QPSK	25	25	22.97	23.07	23.06		
10	QPSK	50	0	22.94	23.04	23.11	23.5	0.5
10	16QAM	1	0	23.11	23.22	23.25		
10	16QAM	1	25	23.10	23.24	23.35		
10	16QAM	1	49	23.19	23.30	22.49	22.5	1.5
10	16QAM	25	0	21.84	21.95	22.01		
10	16QAM	25	12	21.95	21.95	22.07		
10	16QAM	25	25	21.93	22.10	22.04	22.5	1.5
10	16QAM	50	0	21.92	22.02	22.06		
10	64QAM	1	0	21.96	22.03	21.82		
10	64QAM	1	25	22.02	22.13	21.93	22.5	1.5
10	64QAM	1	49	22.13	21.54	20.59		
10	64QAM	25	0	20.89	21.00	20.72		
10	64QAM	25	12	20.94	21.04	20.93	21.5	2.5
10	64QAM	25	25	21.00	20.93	20.41		
10	64QAM	50	0	20.97	21.10	20.37		
Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	23.89	23.88	23.91	24	0
5	QPSK	1	12	23.76	23.92	23.69		
5	QPSK	1	24	23.78	23.91	23.31		
5	QPSK	12	0	22.93	22.97	23.10	23.5	0.5
5	QPSK	12	7	22.88	23.00	22.77		
5	QPSK	12	13	22.86	22.96	22.35		
5	QPSK	25	0	22.86	23.04	22.81	23.5	0.5
5	16QAM	1	0	23.21	23.19	23.32		
5	16QAM	1	12	23.11	23.21	23.12		
5	16QAM	1	24	23.10	23.23	22.72	22.5	1.5
5	16QAM	12	0	21.97	21.98	22.12		
5	16QAM	12	7	21.93	22.02	21.96		
5	16QAM	12	13	21.87	21.98	21.52	22.5	1.5
5	16QAM	25	0	21.92	21.99	22.00		
5	64QAM	1	0	21.78	22.13	21.81		
5	64QAM	1	12	21.99	22.13	21.27	22.5	1.5
5	64QAM	1	24	22.06	21.76	20.68		
5	64QAM	12	0	20.85	21.03	20.81		
5	64QAM	12	7	20.91	21.04	20.22	21.5	2.5
5	64QAM	12	13	20.90	21.00	19.63		
5	64QAM	25	0	20.76	21.05	20.17		
Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	23.78	23.87	23.68	24	0
3	QPSK	1	8	23.75	23.92	23.15		
3	QPSK	1	14	23.65	23.87	23.21		
3	QPSK	8	0	22.89	22.88	22.38	23.5	0.5
3	QPSK	8	4	22.86	22.97	22.24		



3	QPSK	8	7	22.79	22.93	22.17		
3	QPSK	15	0	22.81	22.96	22.25		
3	16QAM	1	0	23.15	23.16	22.83	23.5	0.5
3	16QAM	1	8	23.09	23.26	22.39		
3	16QAM	1	14	23.02	23.18	22.43		
3	16QAM	8	0	21.92	21.96	21.57	22.5	1.5
3	16QAM	8	4	21.91	22.05	21.34		
3	16QAM	8	7	21.85	21.98	21.31		
3	16QAM	15	0	21.87	21.97	21.40		
3	64QAM	1	0	21.72	22.07	21.00	22.5	1.5
3	64QAM	1	8	21.96	22.15	20.63		
3	64QAM	1	14	21.86	21.95	20.50		
3	64QAM	8	0	20.64	20.96	19.81	21.5	2.5
3	64QAM	8	4	20.81	21.05	19.54		
3	64QAM	8	7	20.86	21.00	19.50		
3	64QAM	15	0	20.76	21.01	19.62		
Channel				20407	20525	20643		
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	23.76	23.85	23.08	24	0
1.4	QPSK	1	3	23.81	23.96	23.07		
1.4	QPSK	1	5	23.69	23.86	23.10		
1.4	QPSK	3	0	23.81	23.81	23.15		
1.4	QPSK	3	1	23.83	23.89	23.16		
1.4	QPSK	3	3	23.77	23.88	23.29		
1.4	QPSK	6	0	22.85	22.97	22.24	23.5	0.5
1.4	16QAM	1	0	23.09	23.18	22.34	23.5	0.5
1.4	16QAM	1	3	23.13	23.27	22.50		
1.4	16QAM	1	5	23.02	23.19	22.50		
1.4	16QAM	3	0	22.87	22.95	22.28		
1.4	16QAM	3	1	22.91	22.97	22.30		
1.4	16QAM	3	3	22.84	22.97	22.37		
1.4	16QAM	6	0	21.92	22.05	21.40	22.5	1.5
1.4	64QAM	1	0	21.79	22.06	20.53	22.5	1.5
1.4	64QAM	1	3	21.85	22.19	20.51		
1.4	64QAM	1	5	21.79	22.11	20.52		
1.4	64QAM	3	0	21.79	22.08	20.57		
1.4	64QAM	3	1	21.84	22.09	20.53		
1.4	64QAM	3	3	21.80	22.08	20.50		
1.4	64QAM	6	0	20.65	21.02	19.52		



<LTE Band 12>

Channel	BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel					23060	23095	23130	23.5	0
Frequency (MHz)					704	707.5	711		
10	QPSK	1	0	22.58	22.37	22.32			
10	QPSK	1	25	22.40	22.28	22.26	22.5	1	
10	QPSK	1	49	22.38	22.33	22.26			
10	QPSK	25	0	21.61	21.47	21.38			
10	QPSK	25	12	21.58	21.50	21.44	22.5	1	
10	QPSK	25	25	21.54	21.48	21.43			
10	QPSK	50	0	21.60	21.52	21.46			
10	16QAM	1	0	21.80	21.75	21.67	22.5	1	
10	16QAM	1	25	21.74	21.65	21.62			
10	16QAM	1	49	21.75	21.68	21.63			
10	16QAM	25	0	20.62	20.42	20.40	21.5	2	
10	16QAM	25	12	20.57	20.52	20.46			
10	16QAM	25	25	20.52	20.46	20.40			
10	16QAM	50	0	20.58	20.50	20.47	21.5	2	
10	64QAM	1	0	20.69	20.68	20.56			
10	64QAM	1	25	20.75	20.67	20.63			
10	64QAM	1	49	20.68	20.67	20.58	20.5	3	
10	64QAM	25	0	19.65	19.51	19.44			
10	64QAM	25	12	19.62	19.55	19.52			
10	64QAM	25	25	19.58	19.50	19.48	20.5	3	
10	64QAM	25	0	19.61	19.53	19.48			
Channel					23035	23095			23155
Frequency (MHz)					701.5	707.5	713.5		
5	QPSK	1	0	22.50	22.37	22.26	23.5	0	
5	QPSK	1	12	22.43	22.31	22.29			
5	QPSK	1	24	22.20	22.24	22.24			
5	QPSK	12	0	21.57	21.46	21.37	22.5	1	
5	QPSK	12	7	21.53	21.41	21.34			
5	QPSK	12	13	21.59	21.46	21.35			
5	QPSK	25	0	21.89	21.73	21.33	22.5	1	
5	16QAM	1	0	21.71	21.66	21.53			
5	16QAM	1	12	21.76	21.63	21.58			
5	16QAM	1	24	20.65	20.50	21.56	21.5	2	
5	16QAM	12	0	20.62	20.47	20.39			
5	16QAM	12	7	20.54	20.43	20.35			
5	16QAM	12	13	20.59	20.49	20.37	21.5	2	
5	16QAM	25	0	20.85	20.66	20.34			
5	64QAM	1	0	20.69	20.57	20.52			
5	64QAM	1	12	20.69	20.63	20.53	21.5	2	
5	64QAM	1	24	19.73	19.53	20.54			
5	64QAM	12	0	19.65	19.52	19.46			
5	64QAM	12	7	19.63	19.48	19.40	20.5	3	
5	64QAM	12	13	19.60	19.49	19.41			
5	64QAM	25	0	19.65	19.46	19.39			
Channel					23025	23095	23165	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)					700.5	707.5	714.5		
3	QPSK	1	0	22.56	22.41	22.32	23.5	0	
3	QPSK	1	8	22.53	22.41	22.30			
3	QPSK	1	14	22.43	22.33	22.20			
3	QPSK	8	0	21.60	21.49	21.35	22.5	1	
3	QPSK	8	4	21.58	21.45	21.35			



3	QPSK	8	7	21.52	21.40	21.31		
3	QPSK	15	0	21.58	21.42	21.33		
3	16QAM	1	0	21.88	21.75	21.61	22.5	1
3	16QAM	1	8	21.81	21.65	21.59		
3	16QAM	1	14	21.79	21.66	21.55		
3	16QAM	8	0	20.68	20.53	20.41	21.5	2
3	16QAM	8	4	20.65	20.53	20.42		
3	16QAM	8	7	20.62	20.47	20.36		
3	16QAM	15	0	20.62	20.47	20.37		
3	64QAM	1	0	20.82	20.68	20.54	21.5	2
3	64QAM	1	8	20.82	20.67	20.53		
3	64QAM	1	14	20.71	20.57	20.44		
3	64QAM	8	0	19.70	19.55	19.44	20.5	3
3	64QAM	8	4	19.67	19.52	19.41		
3	64QAM	8	7	19.61	19.48	19.37		
3	64QAM	15	0	19.65	19.46	19.39		
Channel				23017	23095	23173	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				699.7	707.5	715.3		
1.4	QPSK	1	0	22.55	22.33	22.23	23.5	0
1.4	QPSK	1	3	22.53	22.41	22.24		
1.4	QPSK	1	5	22.47	22.31	22.18		
1.4	QPSK	3	0	22.54	22.37	22.26		
1.4	QPSK	3	1	22.57	22.39	22.27		
1.4	QPSK	3	3	22.50	22.35	22.22		
1.4	QPSK	6	0	21.60	21.44	21.30	22.5	1
1.4	16QAM	1	0	21.84	21.70	21.53	22.5	1
1.4	16QAM	1	3	21.90	21.73	21.62		
1.4	16QAM	1	5	21.80	21.65	21.52		
1.4	16QAM	3	0	21.62	21.44	21.33		
1.4	16QAM	3	1	21.64	21.49	21.37		
1.4	16QAM	3	3	21.56	21.39	21.28		
1.4	16QAM	6	0	20.69	20.51	20.39	21.5	2
1.4	64QAM	1	0	20.79	20.62	20.51	21.5	2
1.4	64QAM	1	3	20.82	20.65	20.51		
1.4	64QAM	1	5	20.74	20.58	20.42		
1.4	64QAM	3	0	20.75	20.57	20.44		
1.4	64QAM	3	1	20.78	20.63	20.49		
1.4	64QAM	3	3	20.70	20.56	20.43		
1.4	64QAM	6	0	19.60	19.45	19.32	20.5	3





## **12. WiFi/Bluetooth Output Power (Unit: dBm)**

### **General Note:**

1. For each antenna, transmit power in SISO operation is less than the power in MIMO operation, RF exposure compliance of SISO mode can be deduced from the compliance simultaneous transmission of antennas operating in MIMO mode.
2. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
3. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
4. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
5. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures. 18 The initial test position procedure is described in the following:
  - a. When the reported SAR of the initial test position is  $\leq 0.4$  W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
  - b. When the reported SAR of the test position is  $> 0.4$  W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is  $\leq 0.8$  W/kg or all required test position are tested.
  - c. For all positions/configurations, when the reported SAR is  $> 0.8$  W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested.
6. Per 201904 TCBC workshops, General principles of FCC KDB Publication 248227 D01 can be applied to determine the SAR Initial Test Configurations and test reduction for 802.11ax SAR testing. For the table below the 802.11ax maximum power is SU (non-OFDMA).
7. In applying the test guidance, the IEEE 802.11 mode with the maximum output power (out of all modes) should be considered for testing
8. For modes with the same maximum output power, the guidance from section 5.3.2 a) of FCC KDB Publication 248227 D01 should be applied, with 802.11ax being considered as the highest 802.11 mode for the appropriate frequency bands
9. When SAR testing for 802.11ax is required
  - a. If the maximum output power is highest for OFDMA scenarios, choose the tone size with the maximum number of tones and the highest maximum output power
  - b. Otherwise, consider the fully allocated channel for SAR testing
  - c. When SAR testing is required on RU sizes less than the fully allocated channel, use the RU number closest to the middle of the channel, choosing the higher RU number when two RUs are equidistant to the middle of the channel



<2.4GHz WLAN ANT 1>

Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
2.4GHz WLAN	802.11b 1Mbps	1	2412	15.66	16.00	100
		6	2437	15.51		
		11	2462	15.58		
	802.11g 6Mbps	1	2412	14.51	15.00	99.64
		6	2437	14.53		
		11	2462	14.42		
	802.11n-HT20 MCS0	1	2412	12.43	12.50	100
		6	2437	12.46		
		11	2462	12.41		
802.11n-HT40 MCS0	3	2422	11.42	12.00	100	
	6	2437	11.50			
	9	2452	11.48			
802.11ax-HE20 MCS0	1	2412	11.52	12.00	100	
	6	2437	11.57			
	11	2462	11.51			
802.11ax-HE40 MCS0	3	2422	11.56	12.00	100	
	6	2437	11.53			
	9	2452	11.61			

<2.4GHz WLAN ANT 2>

Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
2.4GHz WLAN	802.11b 1Mbps	1	2412	15.47	16.00	100
		6	2437	15.72		
		11	2462	15.56		
	802.11g 6Mbps	1	2412	12.81	13.00	99.64
		6	2437	12.63		
		11	2462	12.51		
	802.11n-HT20 MCS0	1	2412	10.27	11.00	100
		6	2437	10.54		
		11	2462	10.51		
802.11n-HT40 MCS0	3	2422	9.58	10.00	100	
	6	2437	9.59			
	9	2452	9.72			
802.11ax-HE20 MCS0	1	2412	10.78	11.00	100	
	6	2437	10.89			
	11	2462	10.59			
802.11ax-HE40 MCS0	3	2422	9.56	10.00	100	
	6	2437	9.62			
	9	2452	9.72			



<2.4GHz WLAN ANT 1+2>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	19.16	19.50	100
		6	2437	19.04	19.50	
		11	2462	19.07	19.50	
	802.11g 6Mbps	1	2412	17.79	18.00	99.64
		6	2437	17.70	18.00	
		11	2462	17.57	18.00	
	802.11n-HT20 MCS0	1	2412	15.71	16.00	100
		6	2437	15.74	16.00	
		11	2462	15.53	16.00	
	802.11n-HT40 MCS0	3	2422	14.63	15.00	100
		6	2437	14.70	15.00	
		9	2452	14.69	15.00	
	802.11ax-HE20 MCS0	1	2412	14.67	15.00	100
		6	2437	14.75	15.00	
		11	2462	14.59	15.00	
802.11ax-HE40 MCS0	3	2422	14.88	15.00	100	
	6	2437	14.84	15.00		
	9	2452	14.92	15.00		

<5GHz WLAN ANT1>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	13.68	14.00	99.64
		40	5200	13.58	14.00	
		44	5220	13.64	14.00	
		48	5240	13.60	14.00	
	802.11n-HT20 MCS0	36	5180	12.51	13.00	98.78
		40	5200	12.50	13.00	
		44	5220	12.47	13.00	
		48	5240	12.42	13.00	
	802.11n-HT40 MCS0	38	5190	11.52	12.00	99.21
		46	5230	11.54	12.00	
	802.11ac-VHT20 MCS0	36	5180	10.54	11.00	98.98
		40	5200	10.44	11.00	
		44	5220	10.46	11.00	
		48	5240	10.45	11.00	
	802.11ac-VHT40 MCS0	38	5190	10.49	11.00	99.24
		46	5230	10.52	11.00	
	802.11ac-VHT80 MCS0	42	5210	10.40	11.00	99.41
	802.11ax-HE20 MCS0	36	5180	9.51	10.00	98.93
		40	5200	9.48	10.00	
		44	5220	9.46	10.00	
48		5240	9.42	10.00		
802.11ax-HE40 MCS0	38	5190	9.46	10.00	98.93	
	46	5230	9.45	10.00		
802.11ax-HE80 MCS0	42	5210	9.42	10.00	99.15	



	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a 6Mbps	52	5260	13.45	14.00	99.64
		56	5280	13.40	14.00	
		60	5300	13.42	14.00	
		64	5320	13.41	14.00	
	802.11n-HT20 MCS0	52	5260	12.40	13.00	98.78
		56	5280	12.41	13.00	
		60	5300	12.49	13.00	
		64	5320	12.55	13.00	
	802.11n-HT40 MCS0	54	5270	11.55	12.00	99.21
		62	5310	11.54	12.00	
	802.11ac-VHT20 MCS0	52	5260	10.40	11.00	98.98
		56	5280	10.53	11.00	
		60	5300	10.56	11.00	
		64	5320	10.49	11.00	
	802.11ac-VHT40 MCS0	54	5270	10.50	11.00	99.24
		62	5310	10.47	11.00	
	802.11ac-VHT80 MCS0	58	5290	10.45	11.00	99.41
	802.11ax-HE20 MCS0	52	5260	9.45	10.00	98.93
		56	5280	9.43	10.00	
		60	5300	9.51	10.00	
64		5320	9.44	10.00		
802.11ax-HE40 MCS0	54	5270	9.42	10.00	98.93	
	62	5310	9.54	10.00		
802.11ax-HE80 MCS0	58	5290	9.46	10.00	99.15	



	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.5GHz WLAN	802.11a 6Mbps	100	5500	13.57	14.00	99.64
		116	5580	13.45	14.00	
		124	5620	13.52	14.00	
		132	5660	13.51	14.00	
		144	5720	13.54	14.00	
	802.11n-HT20 MCS0	100	5500	12.50	13.00	98.78
		116	5580	12.46	13.00	
		124	5620	12.54	13.00	
		132	5660	12.42	13.00	
		144	5720	12.52	13.00	
	802.11n-HT40 MCS0	102	5510	11.60	12.00	99.21
		110	5550	11.43	12.00	
		126	5630	11.51	12.00	
		134	5670	11.52	12.00	
		142	5710	11.58	12.00	
	802.11ac-VHT20 MCS0	100	5500	10.46	11.00	98.98
		116	5580	10.45	11.00	
		124	5620	10.53	11.00	
		132	5660	10.46	11.00	
		144	5720	10.56	11.00	
	802.11ac-VHT40 MCS0	102	5510	10.59	11.00	99.24
		110	5550	10.63	11.00	
		126	5630	10.49	11.00	
		134	5670	10.52	11.00	
		142	5710	10.54	11.00	
	802.11ac-VHT80 MCS0	106	5530	10.38	11.00	99.41
		122	5610	10.42	11.00	
		138	5690	10.53	11.00	
	802.11ax-HE20 MCS0	100	5500	9.51	10.00	98.93
		116	5580	9.38	10.00	
		124	5620	9.43	10.00	
		132	5660	9.42	10.00	
		144	5720	9.52	10.00	
	802.11ax-HE40 MCS0	102	5510	9.45	10.00	98.93
		110	5550	9.42	10.00	
		126	5630	9.43	10.00	
		134	5670	9.45	10.00	
		142	5710	9.52	10.00	
	802.11ax-HE80 MCS0	106	5530	9.43	10.00	99.15
		122	5610	9.49	10.00	
138		5690	9.51	10.00		



<5GHz WLAN ANT2>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	12.44	13.00	99.64
		40	5200	12.40	13.00	
		44	5220	12.45	13.00	
		48	5240	12.65	13.00	
	802.11n-HT20 MCS0	36	5180	11.75	12.00	98.78
		40	5200	11.43	12.00	
		44	5220	11.46	12.00	
		48	5240	11.61	12.00	
	802.11n-HT40 MCS0	38	5190	10.51	11.00	99.21
		46	5230	10.71	11.00	
	802.11ac-VHT20 MCS0	36	5180	9.45	10.00	98.98
		40	5200	9.43	10.00	
		44	5220	9.48	10.00	
		48	5240	9.75	10.00	
	802.11ac-VHT40 MCS0	38	5190	9.59	10.00	99.24
		46	5230	9.53	10.00	
	802.11ac-VHT80 MCS0	42	5210	9.42	10.00	99.41
	802.11ax-HE20 MCS0	36	5180	8.74	9.00	98.93
		40	5200	8.69	9.00	
		44	5220	8.62	9.00	
48		5240	8.61	9.00		
802.11ax-HE40 MCS0	38	5190	8.86	9.00	98.93	
	46	5230	8.75	9.00		
802.11ax-HE80 MCS0	42	5210	8.88	9.00	99.15	



	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a 6Mbps	52	5260	12.55	13.00	99.64
		56	5280	12.56	13.00	
		60	5300	12.54	13.00	
		64	5320	12.73	13.00	
	802.11n-HT20 MCS0	52	5260	11.52	12.00	98.78
		56	5280	11.54	12.00	
		60	5300	11.59	12.00	
		64	5320	11.52	12.00	
	802.11n-HT40 MCS0	54	5270	10.51	11.00	99.21
		62	5310	10.71	11.00	
	802.11ac-VHT20 MCS0	52	5260	9.64	10.00	98.98
		56	5280	9.52	10.00	
		60	5300	9.63	10.00	
		64	5320	9.61	10.00	
	802.11ac-VHT40 MCS0	54	5270	9.69	10.00	99.24
		62	5310	9.71	10.00	
	802.11ac-VHT80 MCS0	58	5290	9.45	10.00	99.41
	802.11ax-HE20 MCS0	52	5260	8.60	9.00	98.93
		56	5280	8.61	9.00	
		60	5300	8.75	9.00	
64		5320	8.81	9.00		
802.11ax-HE40 MCS0	54	5270	8.73	9.00	98.93	
	62	5310	8.65	9.00		
802.11ax-HE80 MCS0	58	5290	8.72	9.00	99.15	



	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.5GHz WLAN	802.11a 6Mbps	100	5500	12.25	13.00	99.64
		116	5580	12.35	13.00	
		124	5620	12.60	13.00	
		132	5660	12.43	13.00	
		144	5720	12.63	13.00	
	802.11n-HT20 MCS0	100	5500	11.57	12.00	98.78
		116	5580	11.60	12.00	
		124	5620	11.92	12.00	
		132	5660	11.75	12.00	
		144	5720	11.43	12.00	
	802.11n-HT40 MCS0	102	5510	10.86	11.00	99.21
		110	5550	10.45	11.00	
		126	5630	10.85	11.00	
		134	5670	10.62	11.00	
		142	5710	10.51	11.00	
	802.11ac-VHT20 MCS0	100	5500	9.82	10.00	98.98
		116	5580	9.83	10.00	
		124	5620	9.96	10.00	
		132	5660	9.92	10.00	
		144	5720	9.67	10.00	
	802.11ac-VHT40 MCS0	102	5510	9.85	10.00	99.24
		110	5550	9.42	10.00	
		126	5630	9.86	10.00	
		134	5670	9.70	10.00	
		142	5710	9.49	10.00	
	802.11ac-VHT80 MCS0	106	5530	9.81	10.00	99.41
		122	5610	9.53	10.00	
		138	5690	9.42	10.00	
	802.11ax-HE20 MCS0	100	5500	8.76	9.00	98.93
		116	5580	8.60	9.00	
		124	5620	8.61	9.00	
		132	5660	8.66	9.00	
		144	5720	8.68	9.00	
	802.11ax-HE40 MCS0	102	5510	8.64	9.00	98.93
		110	5550	8.60	9.00	
		126	5630	8.81	9.00	
134		5670	8.77	9.00		
142		5710	8.78	9.00		
802.11ax-HE80 MCS0	106	5530	8.58	9.00	99.15	
	122	5610	8.83	9.00		
	138	5690	8.65	9.00		





<5GHz WLAN ANT1+2>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	16.83	17.00	99.64
		40	5200	16.77	17.00	
		44	5220	16.86	17.00	
		48	5240	16.85	17.00	
	802.11n-HT20 MCS0	36	5180	15.76	16.00	98.78
		40	5200	15.77	16.00	
		44	5220	15.72	16.00	
		48	5240	15.76	16.00	
	802.11n-HT40 MCS0	38	5190	14.73	15.00	99.21
		46	5230	14.74	15.00	
	802.11ac-VHT20 MCS0	36	5180	13.82	14.00	98.98
		40	5200	13.84	14.00	
		44	5220	13.79	14.00	
		48	5240	13.79	14.00	
	802.11ac-VHT40 MCS0	38	5190	13.68	14.00	99.24
		46	5230	13.70	14.00	
	802.11ac-VHT80 MCS0	42	5210	13.66	14.00	99.41
	802.11ax-HE20 MCS0	36	5180	12.83	13.00	98.93
		40	5200	12.86	13.00	
		44	5220	12.84	13.00	
48		5240	12.79	13.00		
802.11ax-HE40 MCS0	38	5190	12.70	13.00	98.93	
	46	5230	12.73	13.00		
802.11ax-HE80 MCS0	42	5210	12.71	13.00	99.15	



	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a 6Mbps	52	5260	16.72	17.00	99.64
		56	5280	16.65	17.00	
		60	5300	16.66	17.00	
		64	5320	16.62	17.00	
	802.11n-HT20 MCS0	52	5260	15.66	16.00	98.78
		56	5280	15.65	16.00	
		60	5300	15.74	16.00	
		64	5320	15.73	16.00	
	802.11n-HT40 MCS0	54	5270	14.71	15.00	99.21
		62	5310	14.69	15.00	
	802.11ac-VHT20 MCS0	52	5260	13.72	14.00	98.98
		56	5280	13.73	14.00	
		60	5300	13.77	14.00	
		64	5320	13.70	14.00	
	802.11ac-VHT40 MCS0	54	5270	13.71	14.00	99.24
		62	5310	13.58	14.00	
	802.11ac-VHT80 MCS0	58	5290	13.67	14.00	99.41
	802.11ax-HE20 MCS0	52	5260	12.79	13.00	98.93
		56	5280	12.77	13.00	
		60	5300	12.69	13.00	
64		5320	12.63	13.00		
802.11ax-HE40 MCS0	54	5270	12.66	13.00	98.93	
	62	5310	12.75	13.00		
802.11ax-HE80 MCS0	58	5290	12.69	13.00	99.15	



	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.5GHz WLAN	802.11a 6Mbps	100	5500	16.74	17.00	99.64
		116	5580	16.69	17.00	
		124	5620	16.62	17.00	
		132	5660	16.65	17.00	
		144	5720	16.71	17.00	
	802.11n-HT20 MCS0	100	5500	15.70	16.00	98.78
		116	5580	15.73	16.00	
		124	5620	15.70	16.00	
		132	5660	15.58	16.00	
		144	5720	15.75	16.00	
	802.11n-HT40 MCS0	102	5510	14.74	15.00	99.21
		110	5550	14.73	15.00	
		126	5630	14.70	15.00	
		134	5670	14.70	15.00	
		142	5710	14.71	15.00	
	802.11ac-VHT20 MCS0	100	5500	13.72	14.00	98.98
		116	5580	13.74	14.00	
		124	5620	13.70	14.00	
		132	5660	13.65	14.00	
		144	5720	13.73	14.00	
	802.11ac-VHT40 MCS0	102	5510	13.77	14.00	99.24
		110	5550	13.87	14.00	
		126	5630	13.71	14.00	
		134	5670	13.68	14.00	
		142	5710	13.71	14.00	
	802.11ac-VHT80 MCS0	106	5530	13.60	14.00	99.41
		122	5610	13.70	14.00	
		138	5690	13.69	14.00	
	802.11ax-HE20 MCS0	100	5500	12.77	13.00	98.93
		116	5580	12.65	13.00	
		124	5620	12.70	13.00	
		132	5660	12.66	13.00	
		144	5720	12.79	13.00	
	802.11ax-HE40 MCS0	102	5510	12.76	13.00	98.93
		110	5550	12.78	13.00	
		126	5630	12.65	13.00	
134		5670	12.65	13.00		
142		5710	12.71	13.00		
802.11ax-HE80 MCS0	106	5530	12.68	13.00	99.15	
	122	5610	12.73	13.00		
	138	5690	12.71	13.00		




<2.4GHz Bluetooth>

Mode	Channel	Frequency (MHz)	Average power (dBm)		
			1Mbps	2Mbps	3Mbps
BR / EDR	CH 00	2402	14.08	10.36	10.37
	CH 39	2441	13.49	9.77	9.78
	CH 78	2480	13.79	10.12	10.12
Tune-up Limit			14.50	10.50	10.50

Mode	Channel	Frequency (MHz)	Average power (dBm)	
			1Mbps	2Mbps
LE	CH 00	2402	3.12	3.11
	CH 19	2440	2.85	2.84
	CH 39	2480	2.87	2.86
Tune-up Limit			3.50	3.50

General Note:

- For 2.4GHz Bluetooth SAR testing was selected 1Mbps due to its highest average power and duty cycle is 78.19% considered in SAR testing, and the duty cycle would be scaled to theoretical 83.3% in reported SAR calculation.

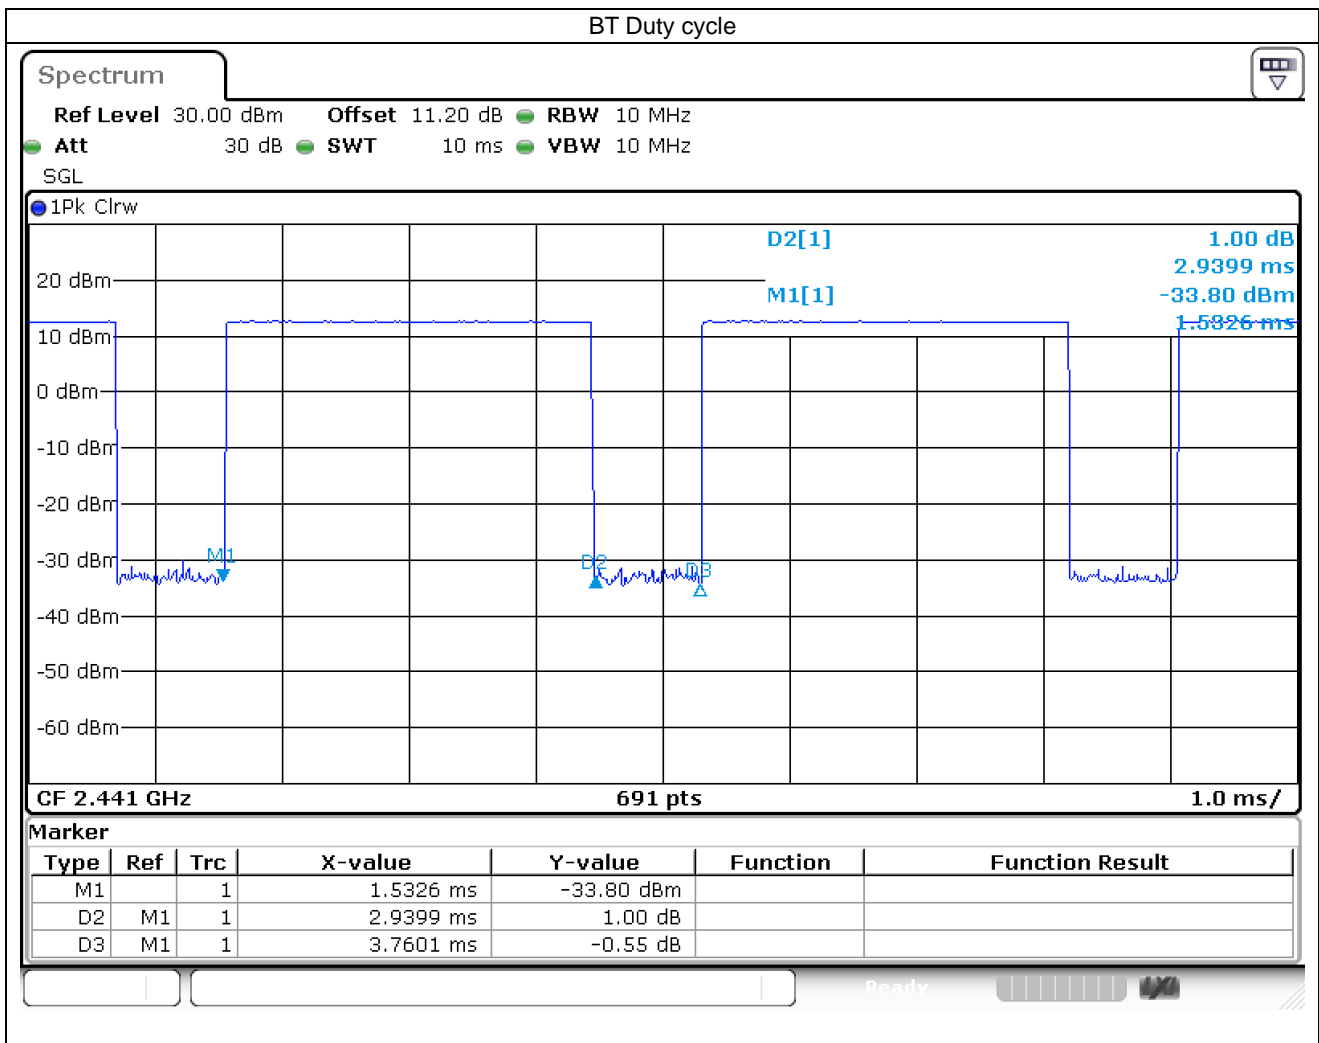

**13. Antenna Location**

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN ANT	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm	≤ 25mm
WLAN ANT 1+2	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm
WLAN/BT ANT1	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN ANT	Yes	Yes	No	Yes	Yes	Yes
WLAN ANT 1+2	Yes	Yes	Yes	No	Yes	Yes
WLAN/BT ANT 1	Yes	Yes	Yes	No	Yes	Yes

**General Note:**

1. The detail antenna location refers to appendix D.
2. Referring to KDB 941225 D06 v02r01, when the overall device length and width are ≥ 9cm\*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge



## 14. SAR Test Results

### General Note:

- Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
  - Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
  - For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
  - For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)\*Tune-up Scaling Factor
  - For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)\* Duty Cycle scaling factor \* Tune-up scaling factor
- Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
  - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
  - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
- Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥0.8W/kg.
- Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.
- Per KDB648474 D04v01r03, for smart phones with a display diagonal dimension > 15cm or an overall diagonal dimension > 16cm, when hotspot mode applies, 10-g product specific SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg, in this report all the hotspot mode results are < 1.2W/kg.
- For 5GHz WLAN product specific SAR is necessary too, due to an overall diagonal dimension is > 16cm.

### GSM Note:

- Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / DTM modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (3Tx slots) for GSM850 and GPRS (4Tx slots) for GSM1900 is considered as the primary mode.
- Other configurations of GSM / GPRS / DTM are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is ≤ ¼ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

### UMTS Note:

- Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
- Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA is ≤ ¼ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than ¼ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA.

**LTE Note:**

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B5/B12 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

**WLAN Note:**

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is  $\leq 1.2$  W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is  $> 0.4$  W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is  $\leq 0.8$  W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is  $> 0.8$  W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested.
5. For each antenna, transmit power in SISO operation is less than the power in MIMO operation, RF exposure compliance of SISO mode can be deduced from the compliance simultaneous transmission of antennas operating in MIMO mode.
6. During SAR testing the WLAN transmission was verified using a spectrum analyzer.



14.1 Head SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
01	GSM850	GPRS (3 Tx slots)	Right Cheek	0mm	251	848.8	27.22	28.00	1.197	0.15	0.033	0.039
	GSM850	GPRS (3 Tx slots)	Right Tilted	0mm	251	848.8	27.22	28.00	1.197	-0.02	0.013	0.016
	GSM850	GPRS (3 Tx slots)	Left Cheek	0mm	251	848.8	27.22	28.00	1.197	-0.01	0.022	0.026
	GSM850	GPRS (3 Tx slots)	Left Tilted	0mm	251	848.8	27.22	28.00	1.197	0.09	0.009	0.011
	GSM1900	GPRS (4 Tx slots)	Right Cheek	0mm	810	1909.8	23.65	24.00	1.084	-0.06	0.003	0.003
	GSM1900	GPRS (4 Tx slots)	Right Tilted	0mm	810	1909.8	23.65	24.00	1.084	0.06	0.003	0.003
02	GSM1900	GPRS (4 Tx slots)	Left Cheek	0mm	810	1909.8	23.65	24.00	1.084	0.13	0.005	0.005
	GSM1900	GPRS (4 Tx slots)	Left Tilted	0mm	810	1909.8	23.65	24.00	1.084	0.14	0.001	0.001

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
03	WCDMA V	RMC 12.2Kbps	Right Cheek	0mm	4233	846.6	23.20	24.00	1.202	-0.11	0.025	0.030
	WCDMA V	RMC 12.2Kbps	Right Tilted	0mm	4233	846.6	23.20	24.00	1.202	0.02	0.011	0.013
	WCDMA V	RMC 12.2Kbps	Left Cheek	0mm	4233	846.6	23.20	24.00	1.202	0	0.013	0.016
	WCDMA V	RMC 12.2Kbps	Left Tilted	0mm	4233	846.6	23.20	24.00	1.202	-0.09	0.014	0.017

<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
04	LTE Band 5	10M	QPSK	1	49	Right Cheek	0mm	20525	836.5	23.91	24.00	1.021	-0.07	0.045	0.046
	LTE Band 5	10M	QPSK	25	25	Right Cheek	0mm	20525	836.5	23.07	23.50	1.104	-0.16	0.036	0.040
	LTE Band 5	10M	QPSK	1	49	Right Tilted	0mm	20525	836.5	23.91	24.00	1.021	-0.11	0.022	0.022
	LTE Band 5	10M	QPSK	25	25	Right Tilted	0mm	20525	836.5	23.07	23.50	1.104	-0.01	0.018	0.020
	LTE Band 5	10M	QPSK	1	49	Left Cheek	0mm	20525	836.5	23.91	24.00	1.021	-0.04	0.015	0.015
	LTE Band 5	10M	QPSK	25	25	Left Cheek	0mm	20525	836.5	23.07	23.50	1.104	-0.07	0.017	0.019
	LTE Band 5	10M	QPSK	1	49	Left Tilted	0mm	20525	836.5	23.91	24.00	1.021	0.08	0.010	0.010
	LTE Band 5	10M	QPSK	25	25	Left Tilted	0mm	20525	836.5	23.07	23.50	1.104	0.16	0.010	0.011
05	LTE Band 12	10M	QPSK	1	0	Right Cheek	0mm	23095	707.5	22.37	23.50	1.297	-0.05	0.044	0.057
	LTE Band 12	10M	QPSK	25	12	Right Cheek	0mm	23095	707.5	21.50	22.50	1.259	-0.1	0.040	0.050
	LTE Band 12	10M	QPSK	1	0	Right Tilted	0mm	23095	707.5	22.37	23.50	1.297	-0.16	0.011	0.014
	LTE Band 12	10M	QPSK	25	12	Right Tilted	0mm	23095	707.5	21.50	22.50	1.259	-0.14	0.010	0.013
	LTE Band 12	10M	QPSK	1	0	Left Cheek	0mm	23095	707.5	22.37	23.50	1.297	0.09	0.031	0.040
	LTE Band 12	10M	QPSK	25	12	Left Cheek	0mm	23095	707.5	21.50	22.50	1.259	-0.14	0.024	0.030
	LTE Band 12	10M	QPSK	1	0	Left Tilted	0mm	23095	707.5	22.37	23.50	1.297	0.1	0.023	0.030
	LTE Band 12	10M	QPSK	25	12	Left Tilted	0mm	23095	707.5	21.50	22.50	1.259	0.13	0.018	0.023





**<WLAN SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	Ant 1+2	1	2412	19.16	19.50	1.082	100	1.000	0.12	0.039	0.042
	WLAN2.4GHz	802.11b 1Mbps	Rght Tilted	0mm	Ant 1+2	1	2412	19.16	19.50	1.082	100	1.000	0.12	0.036	0.039
06	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 1+2	1	2412	19.16	19.50	1.082	100	1.000	-0.07	0.144	0.156
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	Ant 1+2	1	2412	19.16	19.50	1.082	100	1.000	0.13	0.068	0.074
	WLAN5GHz	802.11a 6Mbps	Right Cheek	0mm	Ant 1+2	52	5260	16.72	17.00	1.066	99.64	1.004	0	0.075	0.080
	WLAN5GHz	802.11a 6Mbps	Right Tilted	0mm	Ant 1+2	52	5260	16.72	17.00	1.066	99.64	1.004	0.03	0.062	0.066
07	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	Ant 1+2	52	5260	16.72	17.00	1.066	99.64	1.004	-0.01	0.199	0.213
	WLAN5GHz	802.11a 6Mbps	Left Tilted	0mm	Ant 1+2	52	5260	16.72	17.00	1.066	99.64	1.004	0.15	0.155	0.166
	WLAN5GHz	802.11a 6Mbps	Right Cheek	0mm	Ant 1+2	140	5700	16.76	17.00	1.057	99.64	1.004	0.13	0.071	0.075
	WLAN5GHz	802.11a 6Mbps	Right Tilted	0mm	Ant 1+2	140	5700	16.76	17.00	1.057	99.64	1.004	0.19	0.052	0.055
08	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	Ant 1+2	140	5700	16.76	17.00	1.057	99.64	1.004	-0.1	0.193	0.205
	WLAN5GHz	802.11a 6Mbps	Left Tilted	0mm	Ant 1+2	140	5700	16.76	17.00	1.057	99.64	1.004	-0.11	0.161	0.171

**<Bluetooth SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Right Cheek	0mm	Ant 1	00	2402	14.08	14.50	1.102	78.19	1.065	-0.02	0.028	0.033
	Bluetooth	1Mbps	Right Tilted	0mm	Ant 1	00	2402	14.08	14.50	1.102	78.19	1.065	0.01	0.025	0.029
09	Bluetooth	1Mbps	Left Cheek	0mm	Ant 1	00	2402	14.08	14.50	1.102	78.19	1.065	0.02	0.110	0.129
	Bluetooth	1Mbps	Left Tilted	0mm	Ant 1	00	2402	14.08	14.50	1.102	78.19	1.065	0.12	0.051	0.060

**14.2 Hotspot SAR**

**<GSM SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS (3 Tx slots)	Front	10mm	251	848.8	27.22	28.00	1.197	0	0.065	0.078
10	GSM850	GPRS (3 Tx slots)	Back	10mm	251	848.8	27.22	28.00	1.197	0.06	0.093	0.111
	GSM850	GPRS (3 Tx slots)	Left Side	10mm	251	848.8	27.22	28.00	1.197	-0.16	0.019	0.023
	GSM850	GPRS (3 Tx slots)	Right Side	10mm	251	848.8	27.22	28.00	1.197	-0.04	0.033	0.039
	GSM850	GPRS (3 Tx slots)	Bottom Side	10mm	251	848.8	27.22	28.00	1.197	0.06	0.062	0.074
	GSM1900	GPRS (4 Tx slots)	Front	10mm	810	1909.8	23.65	24.00	1.084	-0.17	0.167	0.181
	GSM1900	GPRS (4 Tx slots)	Back	10mm	810	1909.8	23.65	24.00	1.084	0.08	0.220	0.238
	GSM1900	GPRS (4 Tx slots)	Left Side	10mm	810	1909.8	23.65	24.00	1.084	0.16	0.009	0.009
	GSM1900	GPRS (4 Tx slots)	Right Side	10mm	810	1909.8	23.65	24.00	1.084	-0.13	0.008	0.009
11	GSM1900	GPRS (4 Tx slots)	Bottom Side	10mm	810	1909.8	23.65	24.00	1.084	-0.13	0.323	0.350

**<WCDMA SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA V	RMC 12.2Kbps	Front	10mm	4233	846.6	23.20	24.00	1.202	0.06	0.058	0.070
12	WCDMA V	RMC 12.2Kbps	Back	10mm	4233	846.6	23.20	24.00	1.202	-0.14	0.086	0.103
	WCDMA V	RMC 12.2Kbps	Left Side	10mm	4233	846.6	23.20	24.00	1.202	-0.03	0.019	0.023
	WCDMA V	RMC 12.2Kbps	Right Side	10mm	4233	846.6	23.20	24.00	1.202	0.08	0.026	0.031
	WCDMA V	RMC 12.2Kbps	Bottom Side	10mm	4233	846.6	23.20	24.00	1.202	-0.12	0.054	0.065

**<FDD LTE SAR>**

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 5	10M	QPSK	1	49	Front	10mm	20525	836.5	23.91	24.00	1.021	-0.08	0.107	0.109
	LTE Band 5	10M	QPSK	25	25	Front	10mm	20525	836.5	23.07	23.50	1.104	-0.07	0.089	0.098
13	LTE Band 5	10M	QPSK	1	49	Back	10mm	20525	836.5	23.91	24.00	1.021	-0.08	0.167	0.170
	LTE Band 5	10M	QPSK	25	25	Back	10mm	20525	836.5	23.07	23.50	1.104	-0.12	0.137	0.151
	LTE Band 5	10M	QPSK	1	49	Left Side	10mm	20525	836.5	23.91	24.00	1.021	-0.06	0.035	0.036
	LTE Band 5	10M	QPSK	25	25	Left Side	10mm	20525	836.5	23.07	23.50	1.104	-0.07	0.028	0.031
	LTE Band 5	10M	QPSK	1	49	Right Side	10mm	20525	836.5	23.91	24.00	1.021	-0.15	0.052	0.053
	LTE Band 5	10M	QPSK	25	25	Right Side	10mm	20525	836.5	23.07	23.50	1.104	-0.06	0.042	0.046
	LTE Band 5	10M	QPSK	1	49	Bottom Side	10mm	20525	836.5	23.91	24.00	1.021	-0.05	0.082	0.084
	LTE Band 5	10M	QPSK	25	25	Bottom Side	10mm	20525	836.5	23.07	23.50	1.104	-0.04	0.071	0.078
	LTE Band 12	10M	QPSK	1	0	Front	10mm	23095	707.5	22.37	23.50	1.297	-0.13	0.107	0.139
	LTE Band 12	10M	QPSK	25	12	Front	10mm	23095	707.5	21.50	22.50	1.259	-0.12	0.084	0.106
14	LTE Band 12	10M	QPSK	1	0	Back	10mm	23095	707.5	22.37	23.50	1.297	-0.11	0.144	0.187
	LTE Band 12	10M	QPSK	25	12	Back	10mm	23095	707.5	21.50	22.50	1.259	-0.03	0.116	0.146
	LTE Band 12	10M	QPSK	1	0	Left Side	10mm	23095	707.5	22.37	23.50	1.297	-0.05	0.035	0.045
	LTE Band 12	10M	QPSK	25	12	Left Side	10mm	23095	707.5	21.50	22.50	1.259	-0.14	0.030	0.038
	LTE Band 12	10M	QPSK	1	0	Right Side	10mm	23095	707.5	22.37	23.50	1.297	-0.07	0.072	0.093
	LTE Band 12	10M	QPSK	25	12	Right Side	10mm	23095	707.5	21.50	22.50	1.259	-0.14	0.060	0.076
	LTE Band 12	10M	QPSK	1	0	Bottom Side	10mm	23095	707.5	22.37	23.50	1.297	-0.09	0.055	0.071
	LTE Band 12	10M	QPSK	25	12	Bottom Side	10mm	23095	707.5	21.50	22.50	1.259	-0.05	0.044	0.055

**<WLAN SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Ant 1+2	1	2412	19.16	19.50	1.082	100	1.000	0.11	0.013	0.014
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 1+2	1	2412	19.16	19.50	1.082	100	1.000	0.17	0.035	0.038
	WLAN2.4GHz	802.11b 1Mbps	Left Side	10mm	Ant 1+2	1	2412	19.16	19.50	1.082	100	1.000	0	0.001	0.001
15	WLAN2.4GHz	802.11b 1Mbps	Right Side	10mm	Ant 1+2	1	2412	19.16	19.50	1.082	100	1.000	0.13	0.074	0.080
	WLAN2.4GHz	802.11b 1Mbps	Top Side	10mm	Ant 1+2	1	2412	19.16	19.50	1.082	100	1.000	0	0.001	0.001

**<Bluetooth SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	10mm	Ant 1	00	2402	14.08	14.50	1.102	78.19	1.065	-0.18	0.025	0.029
	Bluetooth	1Mbps	Back	10mm	Ant 1	00	2402	14.08	14.50	1.102	78.19	1.065	-0.06	0.040	0.047
	Bluetooth	1Mbps	Left Side	10mm	Ant 1	00	2402	14.08	14.50	1.102	78.19	1.065	0.01	0.001	0.001
16	Bluetooth	1Mbps	Right Side	10mm	Ant 1	00	2402	14.08	14.50	1.102	78.19	1.065	0	0.078	0.092
	Bluetooth	1Mbps	Top Side	10mm	Ant 1	00	2402	14.08	14.50	1.102	78.19	1.065	0.14	0.013	0.015

**14.3 Body Worn Accessory SAR**

**<GSM SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS (3 Tx slots)	Front	10mm	251	848.8	27.22	28.00	1.197	0	0.065	0.078
17	GSM850	GPRS (3 Tx slots)	Back	10mm	251	848.8	27.22	28.00	1.197	0.06	0.093	0.111
	GSM1900	GPRS (4 Tx slots)	Front	10mm	810	1909.8	23.65	24.00	1.084	-0.17	0.167	0.181
18	GSM1900	GPRS (4 Tx slots)	Back	10mm	810	1909.8	23.65	24.00	1.084	0.08	0.220	0.238

**<WCDMA SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA V	RMC 12.2Kbps	Front	10mm	4233	846.6	23.20	24.00	1.202	0.06	0.058	0.070
19	WCDMA V	RMC 12.2Kbps	Back	10mm	4233	846.6	23.20	24.00	1.202	-0.14	0.086	0.103

**<FDD LTE SAR>**

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 5	10M	QPSK	1	49	Front	10mm	20525	836.5	23.91	24.00	1.021	-0.08	0.107	0.109
	LTE Band 5	10M	QPSK	25	25	Front	10mm	20525	836.5	23.07	23.50	1.104	-0.07	0.089	0.098
20	LTE Band 5	10M	QPSK	1	49	Back	10mm	20525	836.5	23.91	24.00	1.021	-0.08	0.167	0.170
	LTE Band 5	10M	QPSK	25	25	Back	10mm	20525	836.5	23.07	23.50	1.104	-0.12	0.137	0.151
	LTE Band 12	10M	QPSK	1	0	Front	10mm	23095	707.5	22.37	23.50	1.297	-0.13	0.107	0.139
	LTE Band 12	10M	QPSK	25	12	Front	10mm	23095	707.5	21.50	22.50	1.259	-0.12	0.084	0.106
21	LTE Band 12	10M	QPSK	1	0	Back	10mm	23095	707.5	22.37	23.50	1.297	-0.11	0.144	0.187
	LTE Band 12	10M	QPSK	25	12	Back	10mm	23095	707.5	21.50	22.50	1.259	-0.03	0.116	0.146

**<WLAN SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Ant 1+2	1	2412	19.16	19.50	1.082	100	1.000	0.11	0.013	0.014
22	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 1+2	1	2412	19.16	19.50	1.082	100	1.000	0.17	0.035	0.038
	WLAN5GHz	802.11a 6Mbps	Front	10mm	Ant 1+2	52	5260	16.72	17.00	1.066	99.64	1.004	0.02	0.015	0.016
23	WLAN5GHz	802.11a 6Mbps	Back	10mm	Ant 1+2	52	5260	16.72	17.00	1.066	99.64	1.004	-0.13	0.025	0.027
	WLAN5GHz	802.11a 6Mbps	Front	10mm	Ant 1+2	140	5700	16.76	17.00	1.057	99.64	1.004	0.09	0.022	0.023
24	WLAN5GHz	802.11a 6Mbps	Back	10mm	Ant 1+2	140	5700	16.76	17.00	1.057	99.64	1.004	0.11	0.038	0.040

**<Bluetooth SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	10mm	Ant 1	00	2402	14.08	14.50	1.102	78.19	1.065	-0.18	0.025	0.029
25	Bluetooth	1Mbps	Back	10mm	Ant 1	00	2402	14.08	14.50	1.102	78.19	1.065	-0.06	0.040	0.047



14.4 Product Specific SAR

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN5GHz	802.11a 6Mbps	Front	0mm	Ant 1+2	52	5260	16.72	17.00	1.066	99.64	1.004	0.09	0.068	0.073
	WLAN5GHz	802.11a 6Mbps	Back	0mm	Ant 1+2	52	5260	16.72	17.00	1.066	99.64	1.004	-0.12	0.071	0.076
	WLAN5GHz	802.11a 6Mbps	Left Side	0mm	Ant 1+2	52	5260	16.72	17.00	1.066	99.64	1.004	0.03	0.027	0.029
26	WLAN5GHz	802.11a 6Mbps	Right Side	0mm	Ant 1+2	52	5260	16.72	17.00	1.066	99.64	1.004	-0.1	0.125	0.134
	WLAN5GHz	802.11a 6Mbps	Top Side	0mm	Ant 1+2	52	5260	16.72	17.00	1.066	99.64	1.004	0.1	0.085	0.091
	WLAN5GHz	802.11a 6Mbps	Front	0mm	Ant 1+2	140	5700	16.76	17.00	1.057	99.64	1.004	0	0.093	0.099
	WLAN5GHz	802.11a 6Mbps	Back	0mm	Ant 1+2	140	5700	16.76	17.00	1.057	99.64	1.004	0.15	0.113	0.120
	WLAN5GHz	802.11a 6Mbps	Left Side	0mm	Ant 1+2	140	5700	16.76	17.00	1.057	99.64	1.004	-0.11	0.046	0.049
27	WLAN5GHz	802.11a 6Mbps	Right Side	0mm	Ant 1+2	140	5700	16.76	17.00	1.057	99.64	1.004	-0.18	0.140	0.149
	WLAN5GHz	802.11a 6Mbps	Top Side	0mm	Ant 1+2	140	5700	16.76	17.00	1.057	99.64	1.004	0.09	0.085	0.090

**15. Simultaneous Transmission Analysis**

NO.	Simultaneous Transmission Configurations	Portable Handset			
		Head	Body-worn	Hotspot	Product Specific
1.	WWAN + WLAN2.4GHz MIMO	Yes	Yes	Yes	Yes
2.	WWAN + WLAN2.4GHz MIMO + WLAN5GHz MIMO	Yes	Yes		Yes
3.	WWAN + WLAN5GHz MIMO + Bluetooth	Yes	Yes		Yes
4.	WWAN + Bluetooth	Yes	Yes	Yes	Yes

**General Note:**

1. This device WLAN 2.4GHz supports Hotspot operation and Bluetooth support tethering applications.
2. 2.4GHz WLAN and Bluetooth share the same antenna, and cannot transmit simultaneously.
3. All licensed modes share the same antenna part and cannot transmit simultaneously.
4. The Scaled SAR summation is calculated based on the same configuration and test position.
5. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
  - i) Scalar SAR summation < 1.6W/kg.
  - ii)  $SPLSR = (SAR_1 + SAR_2)^{1.5} / (\text{min. separation distance, mm})$ , and the peak separation distance is determined from the square root of  $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$ , where  $(x_1, y_1, z_1)$  and  $(x_2, y_2, z_2)$  are the coordinates of the extrapolated peak SAR locations in the zoom scan.
  - iii) If  $SPLSR \leq 0.04$ , simultaneously transmission SAR measurement is not necessary.
  - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.

**15.1 Head Exposure Conditions**

WWAN Band		Exposure Position	1	2	3	4	1+2+3 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
			WWAN 1g SAR (W/kg)	2.4GHz WLAN Ant 1+2 1g SAR (W/kg)	5GHz WLAN Ant 1+2 1g SAR (W/kg)	Bluetooth Ant 1 1g SAR (W/kg)		
GSM	GSM850	Right Cheek	0.039	0.042	0.080	0.033	0.161	0.152
		Right Tilted	0.016	0.039	0.066	0.029	0.121	0.111
		Left Cheek	0.026	0.156	0.213	0.129	0.395	0.368
		Left Tilted	0.011	0.074	0.171	0.060	0.256	0.242
	GSM1900	Right Cheek	0.003	0.042	0.080	0.033	0.125	0.116
		Right Tilted	0.003	0.039	0.066	0.029	0.108	0.098
		Left Cheek	0.005	0.156	0.213	0.129	0.374	0.347
		Left Tilted	0.001	0.074	0.171	0.060	0.246	0.232
WCDMA	WCDMA V	Right Cheek	0.030	0.042	0.080	0.033	0.152	0.143
		Right Tilted	0.013	0.039	0.066	0.029	0.118	0.108
		Left Cheek	0.016	0.156	0.213	0.129	0.385	0.358
		Left Tilted	0.017	0.074	0.171	0.060	0.262	0.248
LTE	LTE Band 5	Right Cheek	0.046	0.042	0.080	0.033	0.168	0.159
		Right Tilted	0.022	0.039	0.066	0.029	0.127	0.117
		Left Cheek	0.019	0.156	0.213	0.129	0.388	0.361
		Left Tilted	0.011	0.074	0.171	0.060	0.256	0.242
	LTE Band 12	Right Cheek	0.057	0.042	0.080	0.033	0.179	0.170
		Right Tilted	0.014	0.039	0.066	0.029	0.119	0.109
		Left Cheek	0.040	0.156	0.213	0.129	0.409	0.382
		Left Tilted	0.030	0.074	0.171	0.060	0.275	0.261



**15.2 Hotspot Exposure Conditions**

WWAN Band		Exposure Position	1	2	4	1+2 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)
			WWAN 1g SAR (W/kg)	2.4GHz WLAN Ant 1+2 1g SAR (W/kg)	Bluetooth Ant 1 1g SAR (W/kg)		
GSM	GSM850	Front	0.078	0.014	0.029	<b>0.092</b>	<b>0.107</b>
		Back	0.111	0.038	0.047	<b>0.149</b>	<b>0.158</b>
		Left side	0.023	0.001	0.001	<b>0.024</b>	<b>0.024</b>
		Right side	0.039	0.080	0.092	<b>0.119</b>	<b>0.131</b>
		Top side		0.001	0.015	<b>0.001</b>	<b>0.015</b>
		Bottom side	0.074			<b>0.074</b>	<b>0.074</b>
	GSM1900	Front	0.181	0.014	0.029	<b>0.195</b>	<b>0.210</b>
		Back	0.238	0.038	0.047	<b>0.276</b>	<b>0.285</b>
		Left side	0.009	0.001	0.001	<b>0.010</b>	<b>0.010</b>
		Right side	0.009	0.080	0.092	<b>0.089</b>	<b>0.101</b>
		Top side		0.001	0.015	<b>0.001</b>	<b>0.015</b>
		Bottom side	0.350			<b>0.350</b>	<b>0.350</b>
WCDMA	WCDMA V	Front	0.070	0.014	0.029	<b>0.084</b>	<b>0.099</b>
		Back	0.103	0.038	0.047	<b>0.141</b>	<b>0.150</b>
		Left side	0.023	0.001	0.001	<b>0.024</b>	<b>0.024</b>
		Right side	0.031	0.080	0.092	<b>0.111</b>	<b>0.123</b>
		Top side		0.001	0.015	<b>0.001</b>	<b>0.015</b>
		Bottom side	0.065			<b>0.065</b>	<b>0.065</b>
LTE	LTE Band 5	Front	0.109	0.014	0.029	<b>0.123</b>	<b>0.138</b>
		Back	0.170	0.038	0.047	<b>0.208</b>	<b>0.217</b>
		Left side	0.036	0.001	0.001	<b>0.037</b>	<b>0.037</b>
		Right side	0.053	0.080	0.092	<b>0.133</b>	<b>0.145</b>
		Top side		0.001	0.015	<b>0.001</b>	<b>0.015</b>
		Bottom side	0.084			<b>0.084</b>	<b>0.084</b>
	LTE Band 12	Front	0.139	0.014	0.029	<b>0.153</b>	<b>0.168</b>
		Back	0.187	0.038	0.047	<b>0.225</b>	<b>0.234</b>
		Left side	0.045	0.001	0.001	<b>0.046</b>	<b>0.046</b>
		Right side	0.093	0.080	0.092	<b>0.173</b>	<b>0.185</b>
		Top side		0.001	0.015	<b>0.001</b>	<b>0.015</b>
		Bottom side	0.071			<b>0.071</b>	<b>0.071</b>

**15.3 Body-Worn Accessory Exposure Conditions**

WWAN Band		Exposure Position	1	2	3	4	1+2+3 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
			WWAN 1g SAR (W/kg)	2.4GHz WLAN Ant 1+2 1g SAR (W/kg)	5GHz WLAN Ant 1+2 1g SAR (W/kg)	Bluetooth Ant 1 1g SAR (W/kg)		
GSM	GSM850	Front	0.078	0.014	0.023	0.029	0.115	0.121
		Back	0.111	0.038	0.040	0.047	0.189	0.196
	GSM1900	Front	0.181	0.014	0.023	0.029	0.218	0.224
		Back	0.238	0.038	0.040	0.047	0.316	0.323
WCDMA	WCDMA V	Front	0.070	0.014	0.023	0.029	0.107	0.113
		Back	0.103	0.038	0.040	0.047	0.181	0.188
LTE	LTE Band 5	Front	0.109	0.014	0.023	0.029	0.146	0.152
		Back	0.170	0.038	0.040	0.047	0.248	0.255
	LTE Band 12	Front	0.139	0.014	0.023	0.029	0.176	0.182
		Back	0.187	0.038	0.040	0.047	0.265	0.272

**15.4 Product Specific Exposure Conditions**

Exposure Position	1	2	3	4	1+2+3 Summed 10g SAR (W/kg)	1+3+4 Summed 10g SAR (W/kg)
	WWAN 10g SAR (W/kg)	2.4GHz WLAN Ant 1+2 10g SAR (W/kg)	5GHz WLAN Ant 1+2 10g SAR (W/kg)	Bluetooth Ant 1 10g SAR (W/kg)		
Front			0.099		0.099	0.099
Back			0.120		0.120	0.120
Left side			0.049		0.049	0.049
Right side			0.149		0.149	0.149
Top side			0.091		0.091	0.091
Bottom side					0.000	0.000

Test Engineer : Jay Jian Thomas Wang Andy Chiang and Tommy Chen



## **16. Uncertainty Assessment**

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be  $\leq 30\%$ , for a confidence interval of  $k = 2$ . If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg. Therefore, the measurement uncertainty table is not required in this report.

## **17. References**

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [8] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [9] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [10] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.
- [11] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [12] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.





---

***Appendix A. Plots of System Performance Check***

The plots are shown as follows.

## System Check\_Head\_750MHz

### DUT: D750V3-1107

Communication System: CW ; Frequency: 750 MHz;Duty Cycle: 1:1

Medium: HSL\_750\_200320 Medium parameters used:  $f = 750$  MHz;  $\sigma = 0.894$  S/m;  $\epsilon_r = 40.536$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(9.97, 9.97, 9.97) @ 750 MHz; Calibrated: 2019/7/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2019/9/17
- Phantom: SAM\_Right; Type: SAM; Serial: TP:1446
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 2.93 W/kg

**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 58.08 V/m; Power Drift = -0.03 dB  
Peak SAR (extrapolated) = 3.00 W/kg  
**SAR(1 g) = 2.09 W/kg; SAR(10 g) = 1.42 W/kg**  
Maximum value of SAR (measured) = 2.72 W/kg

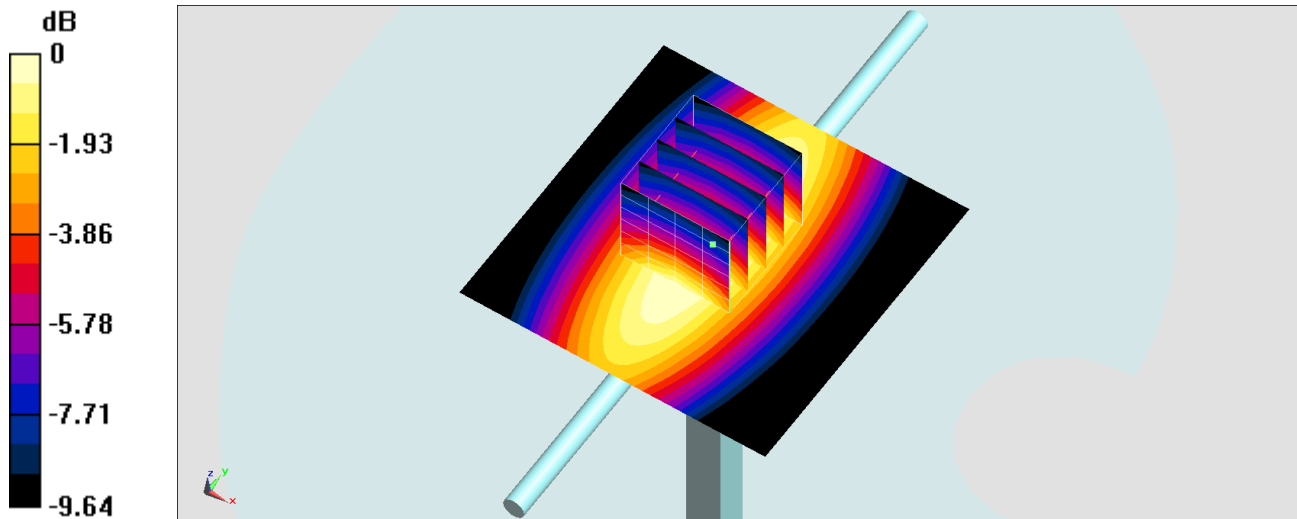

0 dB = 2.72 W/kg = 4.35 dBW/kg

## System Check\_Head\_835MHz

### DUT: D835V2-4d167

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL\_850\_200320 Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.897$  S/m;  $\epsilon_r = 42.895$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(9.73, 9.73, 9.73) @ 835 MHz; Calibrated: 2019/7/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2019/9/17
- Phantom: SAM\_Right; Type: SAM; Serial: TP:1446
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 3.36 W/kg

**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 63.08 V/m; Power Drift = -0.10 dB  
Peak SAR (extrapolated) = 3.75 W/kg  
**SAR(1 g) = 2.5 W/kg; SAR(10 g) = 1.65 W/kg**  
Maximum value of SAR (measured) = 3.34 W/kg

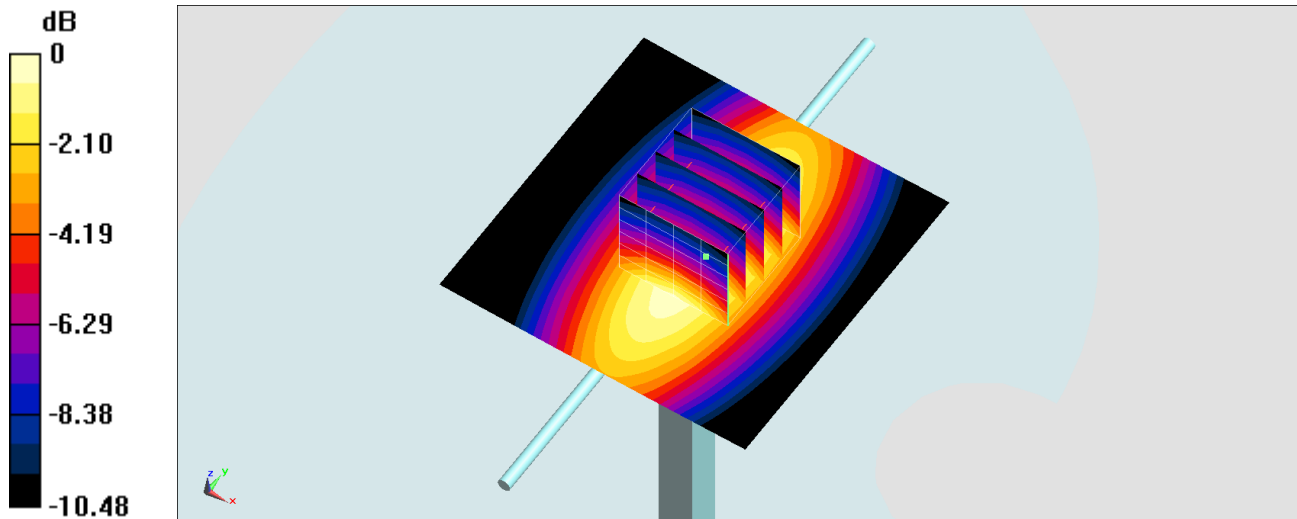

0 dB = 3.34 W/kg = 5.24 dBW/kg

## System Check\_Head\_835MHz

### DUT: D835V2-4d167

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL\_850\_200331 Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.877$  S/m;  $\epsilon_r = 41.577$ ;  $\rho = 1000$  kg/m<sup>3</sup>



Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3184; ConvF(6.41, 6.41, 6.41) @ 835 MHz; Calibrated: 2019/9/25
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1305; Calibrated: 2019/4/30
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 2.60 W/kg

**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 56.09 V/m; Power Drift = 0.06 dB  
Peak SAR (extrapolated) = 3.28 W/kg  
**SAR(1 g) = 2.23 W/kg; SAR(10 g) = 1.47 W/kg**  
Maximum value of SAR (measured) = 2.61 W/kg

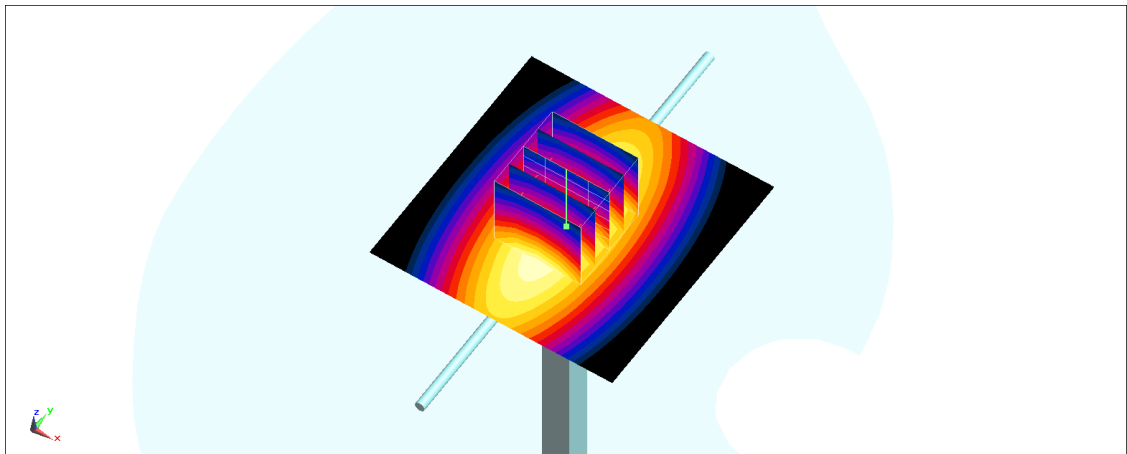

0 dB = 2.61 W/kg = 4.17 dBW/kg

## System Check\_Head\_1900MHz

### DUT: D1900V2-5d041

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL\_1900\_200331 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.418$  S/m;  $\epsilon_r = 39.211$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(5.14, 5.14, 5.14) @ 1900 MHz; Calibrated: 2019/5/24
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn699; Calibrated: 2020/2/26
- Phantom: SAM\_Left; Type: SAM; Serial: 1796
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 12.0 W/kg

**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 94.50 V/m; Power Drift = -0.03 dB  
Peak SAR (extrapolated) = 17.0 W/kg  
**SAR(1 g) = 9.52 W/kg; SAR(10 g) = 5.01 W/kg**  
Maximum value of SAR (measured) = 11.9 W/kg

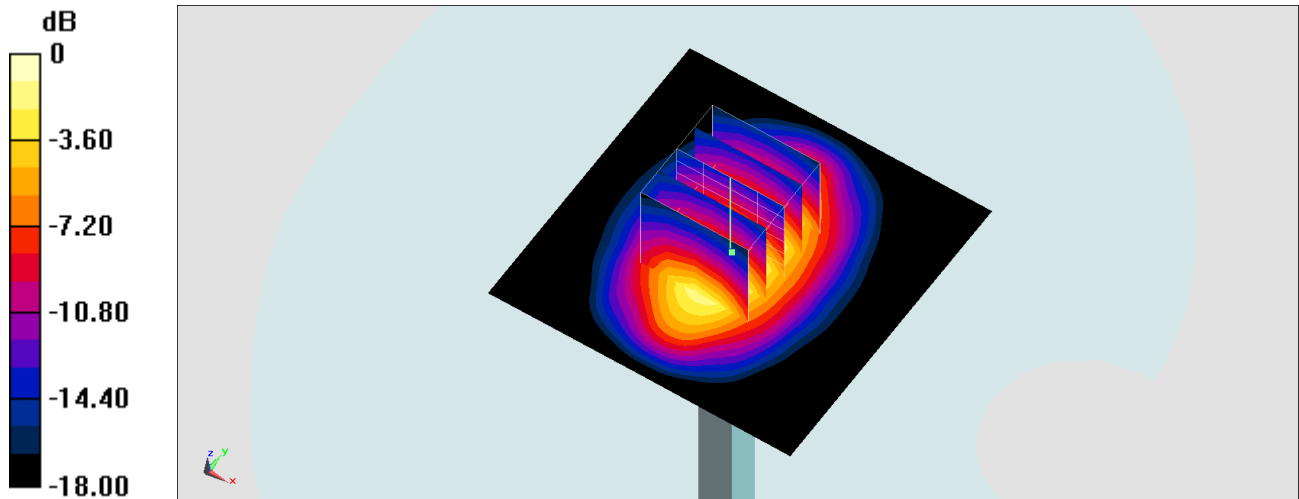

0 dB = 11.9 W/kg = 10.76 dBW/kg

## System Check\_Head\_2450MHz

### DUT: D2450V2-736

Communication System: CW ; Frequency: 2450 MHz;Duty Cycle: 1:1

Medium: HSL\_2450\_200416 Medium parameters used :  $f = 2450$  MHz;  $\sigma = 1.848$  S/m;  $\epsilon_r = 39.101$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.33, 7.33, 7.33) @ 2450 MHz; Calibrated: 2020/2/4
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2019/5/21
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1815
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Pin=250mW/Area Scan (71x71x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 23.8 W/kg

**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 103.7 V/m; Power Drift = -0.11 dB  
Peak SAR (extrapolated) = 27.2 W/kg  
**SAR(1 g) = 13.1 W/kg; SAR(10 g) = 6.07 W/kg**  
Maximum value of SAR (measured) = 22.0 W/kg

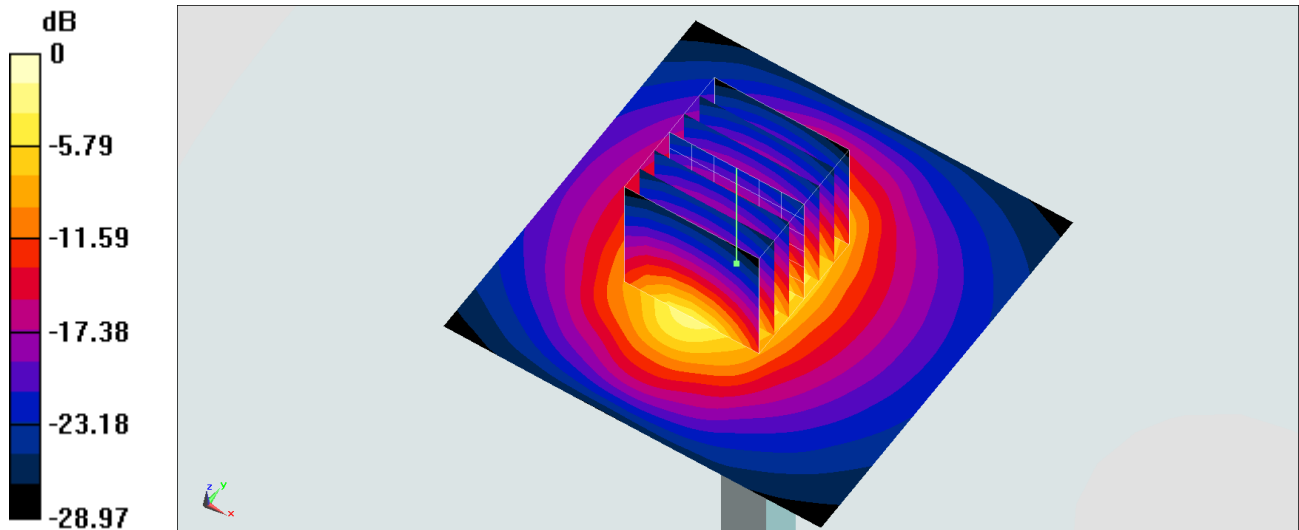

## System Check\_Head\_5250MHz

### DUT: D5GHzV2-1006

Communication System: CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: HSL\_5G\_200417 Medium parameters used :  $f = 5250$  MHz;  $\sigma = 4.674$  S/m;  $\epsilon_r = 35.972$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(5.14, 5.14, 5.14) @ 5250 MHz; Calibrated: 2020/2/4
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2019/5/21
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1815
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Pin=100mW/Area Scan (71x71x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 22.7 W/kg

**Pin=100mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 79.04 V/m; Power Drift = -0.13 dB  
Peak SAR (extrapolated) = 32.0 W/kg  
**SAR(1 g) = 7.87 W/kg; SAR(10 g) = 2.23 W/kg**  
Maximum value of SAR (measured) = 20.1 W/kg

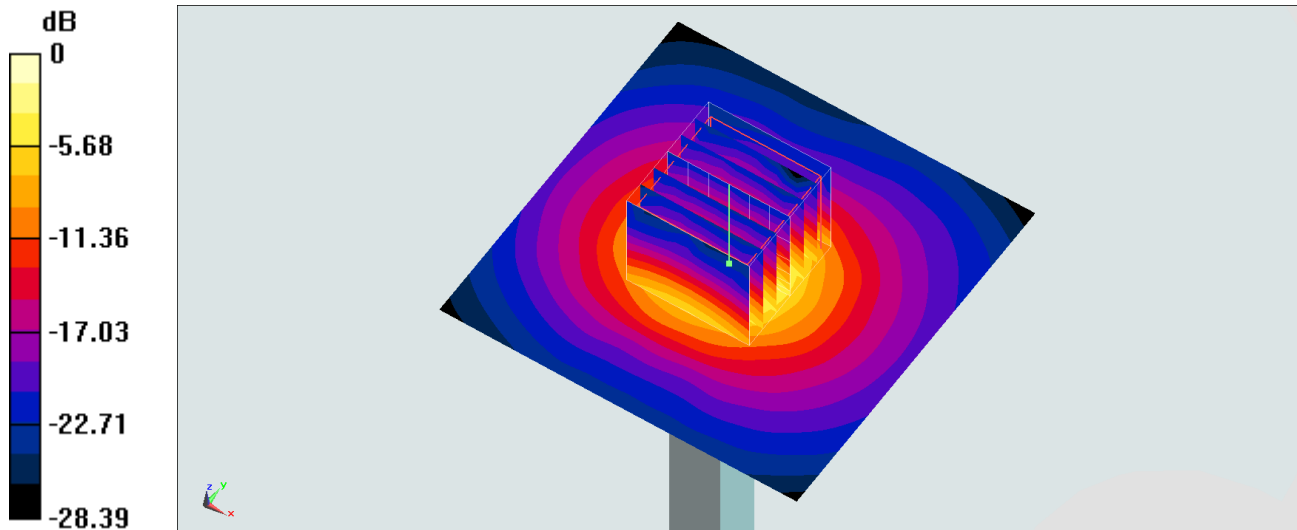

0 dB = 22.7 W/kg = 13.56 dBW/kg

## System Check\_Head\_5600MHz

### DUT: D5GHzV2-1006

Communication System: CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: HSL\_5G\_200417 Medium parameters used:  $f = 5600$  MHz;  $\sigma = 5.014$  S/m;  $\epsilon_r = 35.497$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(4.57, 4.57, 4.57) @ 5600 MHz; Calibrated: 2020/2/4
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2019/5/21
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1815
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Pin=100mW/Area Scan (71x71x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 21.6 W/kg

**Pin=100mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 73.48 V/m; Power Drift = -0.05 dB  
Peak SAR (extrapolated) = 38.1 W/kg  
**SAR(1 g) = 8.52 W/kg; SAR(10 g) = 2.4 W/kg**  
Maximum value of SAR (measured) = 22.2 W/kg

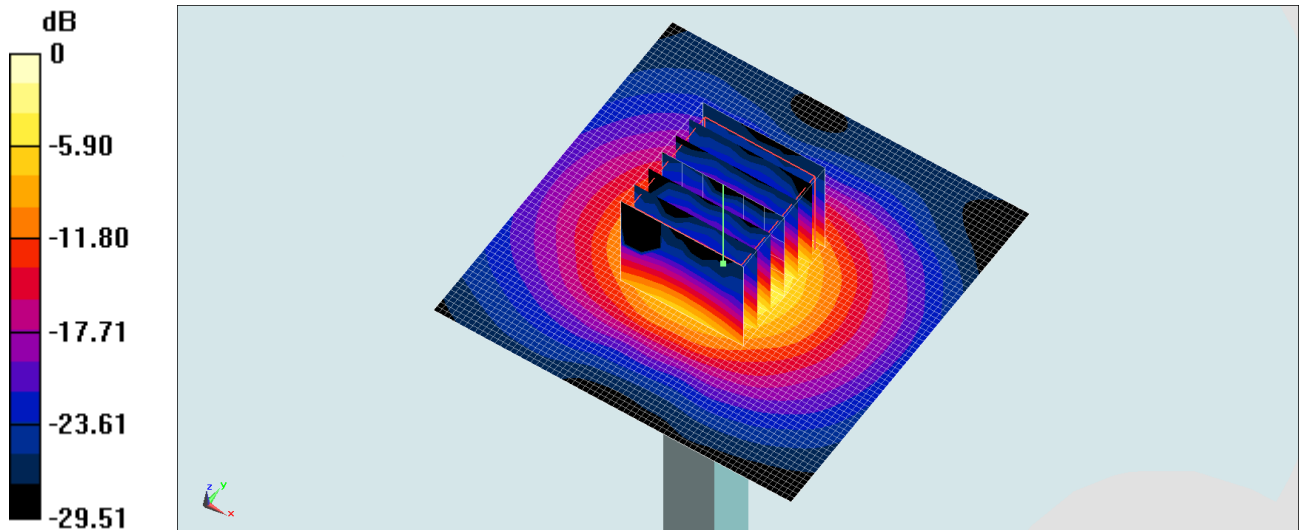

0 dB = 21.6 W/kg = 13.34 dBW/kg



## System Check\_Head\_5750MHz

### DUT: D5GHzV2-1006

Communication System: CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: HSL\_5G\_200417 Medium parameters used:  $f = 5750$  MHz;  $\sigma = 5.171$  S/m;  $\epsilon_r = 35.291$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(4.78, 4.78, 4.78) @ 5750 MHz; Calibrated: 2020/2/4
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2019/5/21
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1815
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Pin=100mW/Area Scan (71x71x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 21.3 W/kg

**Pin=100mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 72.05 V/m; Power Drift = -0.12 dB  
Peak SAR (extrapolated) = 36.7 W/kg  
**SAR(1 g) = 7.83 W/kg; SAR(10 g) = 2.21 W/kg**  
Maximum value of SAR (measured) = 20.7 W/kg

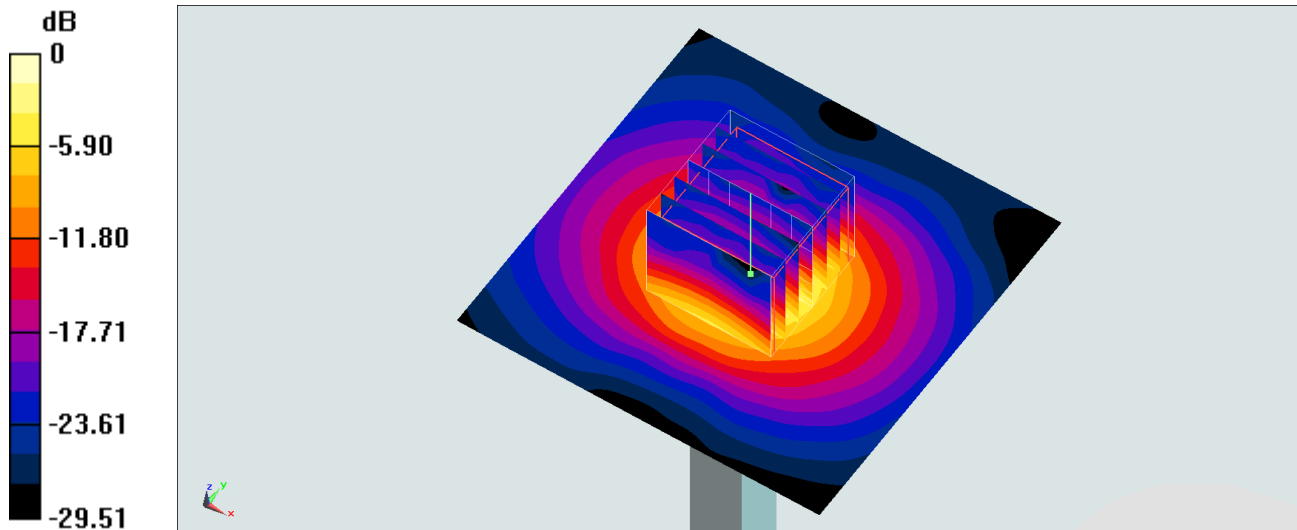

0 dB = 21.3 W/kg = 13.28 dBW/kg



---

**Appendix B. Plots of SAR Measurement**

The plots are shown as follows.

**#01\_GSM850\_GPRS (3 Tx slots)\_Right Cheek\_Ch251**

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:2.77

Medium: HSL\_850\_200331 Medium parameters used:  $f = 849$  MHz;  $\sigma = 0.89$  S/m;  $\epsilon_r = 41.409$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3184; ConvF(6.41, 6.41, 6.41) @ 848.8 MHz; Calibrated: 2019/9/25
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1305; Calibrated: 2019/4/30
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0352 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.322 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.0390 W/kg

**SAR(1 g) = 0.033 W/kg; SAR(10 g) = 0.025 W/kg**

Maximum value of SAR (measured) = 0.0356 W/kg

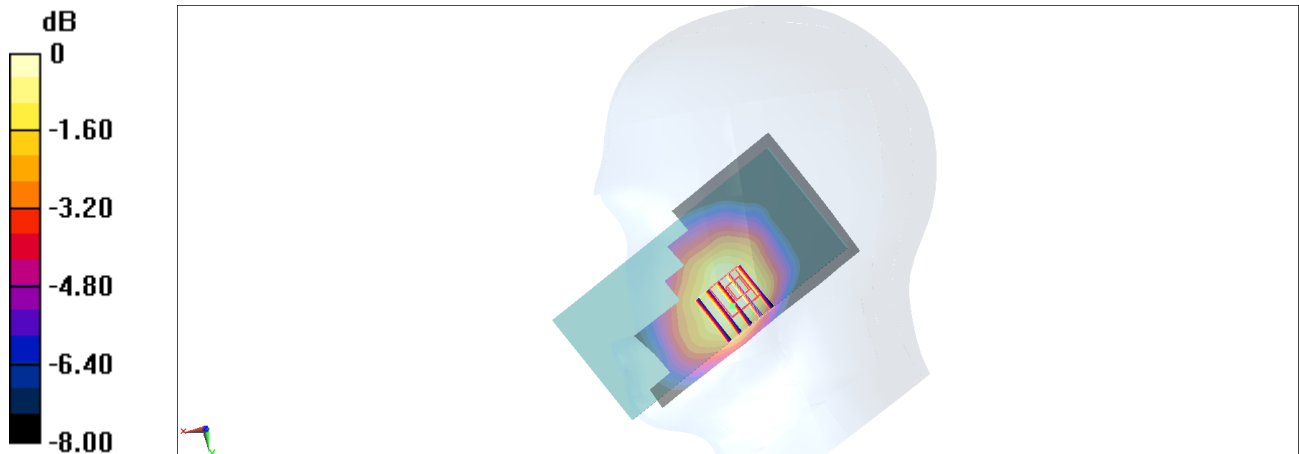

0 dB = 0.0356 W/kg = -14.49 dBW/kg

**#02\_GSM1900\_GPRS (4 Tx slots)\_Left Cheek\_Ch810**

Communication System: PCS; Frequency: 1909.8 MHz; Duty Cycle: 1:2.08

Medium: HSL\_1900\_200331 Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.427$  S/m;  $\epsilon_r = 39.162$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(5.14, 5.14, 5.14) @ 1909.8 MHz; Calibrated: 2019/5/24
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn699; Calibrated: 2020/2/26
- Phantom: SAM\_Left; Type: SAM; Serial: 1796
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0103 W/kg



**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.039 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.00753 W/kg

**SAR(1 g) = 0.00474 W/kg; SAR(10 g) = 0.00287 W/kg**

Maximum value of SAR (measured) = 0.00586 W/kg

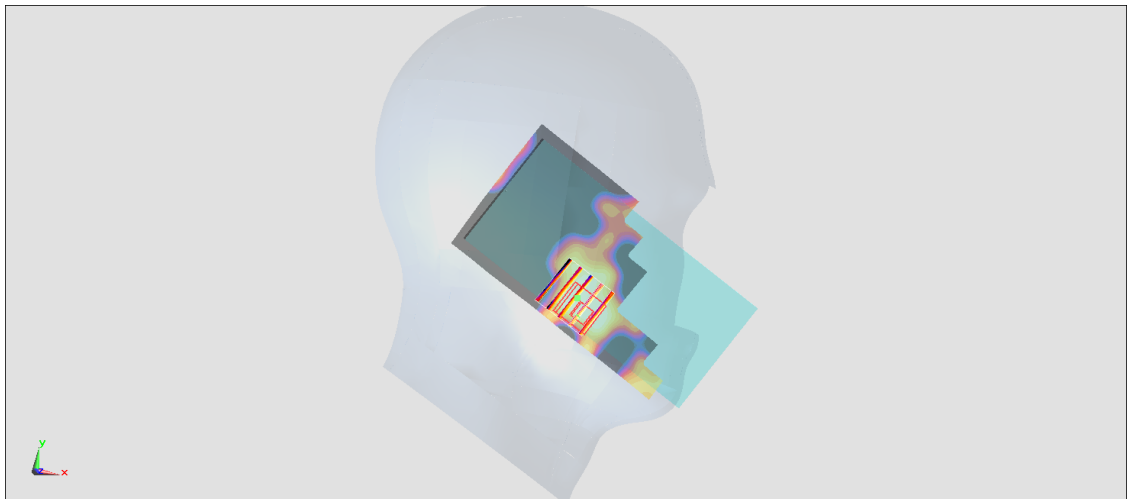

0 dB = 0.00586 W/kg = -22.32 dBW/kg

**#03\_WCDMA V\_RMC 12.2Kbps\_Right Cheek\_Ch4233**

Communication System: WCDMA ; Frequency: 846.6 MHz;Duty Cycle: 1:1

Medium: HSL\_850\_200320 Medium parameters used:  $f = 847$  MHz;  $\sigma = 0.909$  S/m;  $\epsilon_r = 42.722$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(9.73, 9.73, 9.73) @ 846.6 MHz; Calibrated: 2019/7/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2019/9/17
- Phantom: SAM\_Right; Type: SAM; Serial: TP:1446
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0294 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.796 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.0330 W/kg

**SAR(1 g) = 0.025 W/kg; SAR(10 g) = 0.018 W/kg**

Maximum value of SAR (measured) = 0.0303 W/kg

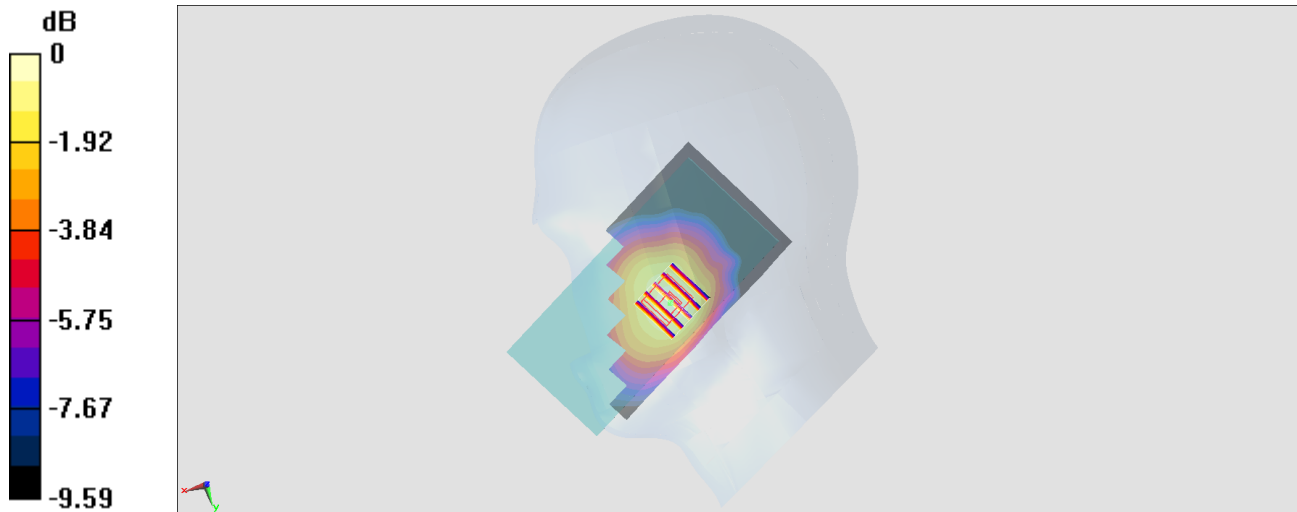

0 dB = 0.0303 W/kg = -15.19 dBW/kg

**#04\_LTE Band 5\_10M\_QPSK\_1\_49\_Right Cheek\_Ch20525**

Communication System: LTE ; Frequency: 836.5 MHz;Duty Cycle: 1:1

Medium: HSL\_850\_200320 Medium parameters used :  $f = 836.5$  MHz;  $\sigma = 0.899$  S/m;  $\epsilon_r = 42.874$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(9.73, 9.73, 9.73) @ 836.5 MHz; Calibrated: 2019/7/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2019/9/17
- Phantom: SAM\_Right; Type: SAM; Serial: TP:1446
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0522 W/kg



**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.676 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.0560 W/kg

**SAR(1 g) = 0.045 W/kg; SAR(10 g) = 0.034 W/kg**

Maximum value of SAR (measured) = 0.0532 W/kg

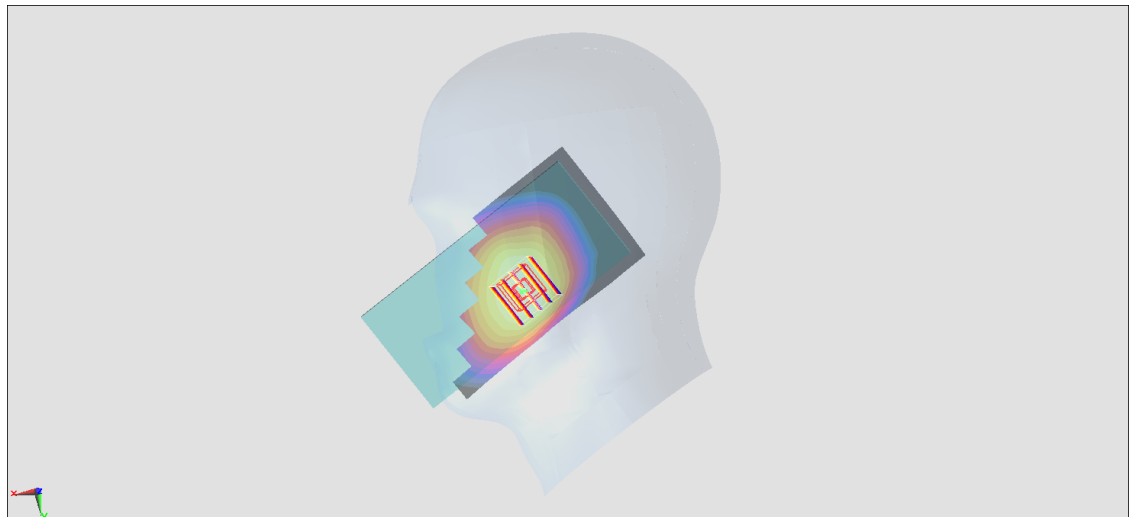

0 dB = 0.0532 W/kg = -12.74 dBW/kg

**#05\_LTE Band 12\_10M\_QPSK\_1\_0\_Right Cheek\_Ch23095**

Communication System: LTE ; Frequency: 707.5 MHz;Duty Cycle: 1:1

Medium: HSL\_750\_200320 Medium parameters used :  $f = 707.5$  MHz;  $\sigma = 0.854$  S/m;  $\epsilon_r = 41.096$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(9.97, 9.97, 9.97) @ 707.5 MHz; Calibrated: 2019/7/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2019/9/17
- Phantom: SAM\_Right; Type: SAM; Serial: TP:1446
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0508 W/kg



**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.316 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.0540 W/kg

**SAR(1 g) = 0.044 W/kg; SAR(10 g) = 0.034 W/kg**

Maximum value of SAR (measured) = 0.0508 W/kg

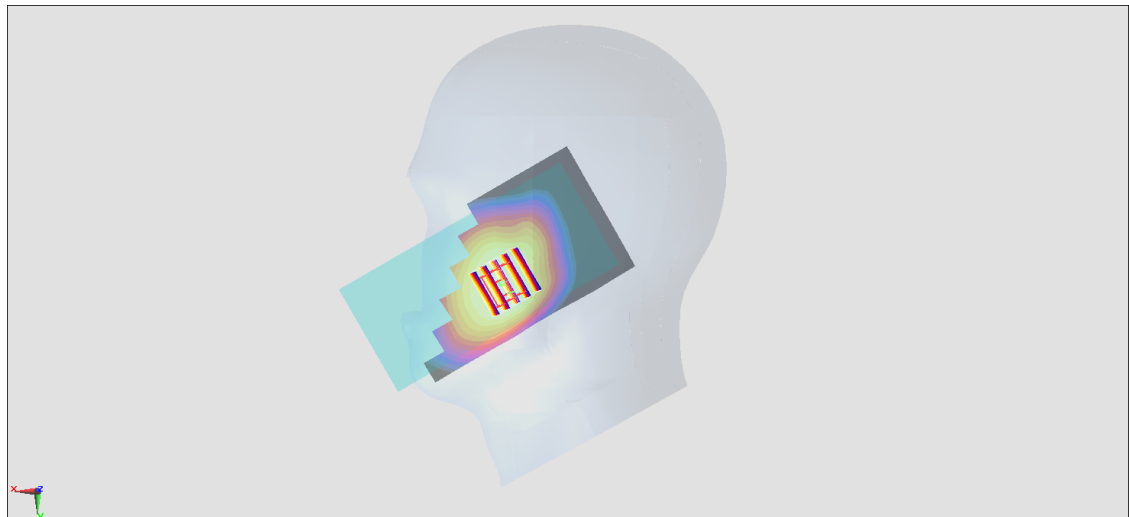

0 dB = 0.0508 W/kg = -12.94 dBW/kg

**#06\_WLAN2.4GHz\_802.11b 1Mbps\_Left Cheek\_Ch1;Ant 1+2**

Communication System: 802.11b ; Frequency: 2412 MHz;Duty Cycle: 1:1

Medium: HSL\_2450\_200416 Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.806$  S/m;  $\epsilon_r = 39.216$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.33, 7.33, 7.33) @ 2412 MHz; Calibrated: 2020/2/4
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2019/5/21
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1815
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Area Scan (111x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.314 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.358 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.443 W/kg

**SAR(1 g) = 0.144 W/kg; SAR(10 g) = 0.052 W/kg**

Maximum value of SAR (measured) = 0.267 W/kg

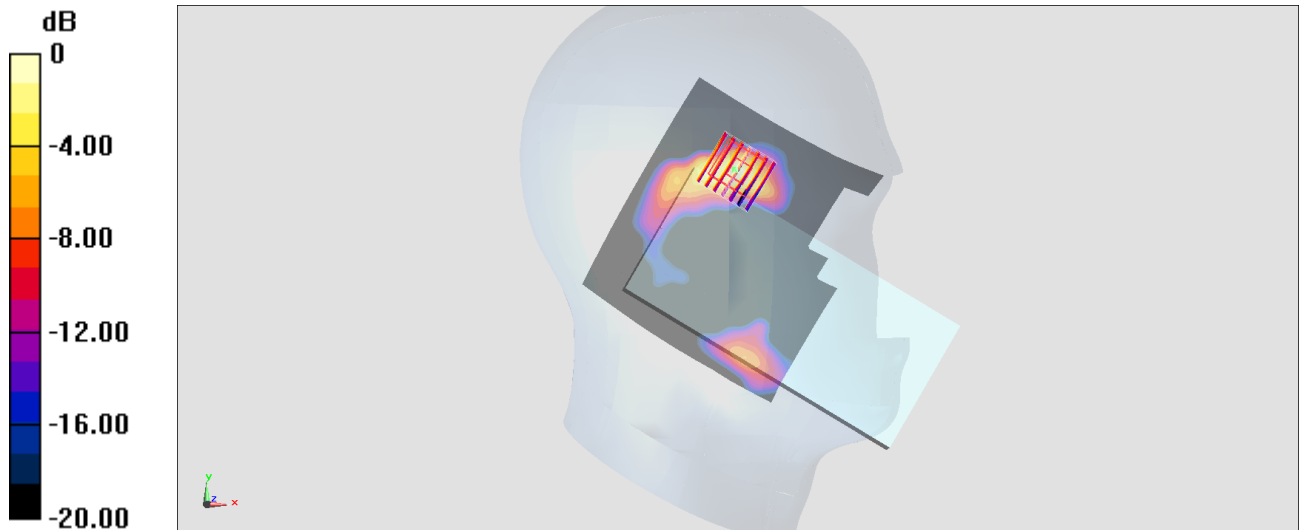

0 dB = 0.314 W/kg = -5.03 dBW/kg



**#07\_WLAN5GHz\_802.11a 6Mbps\_Left Cheek\_Ch52;Ant 1+2**

Communication System: 802.11a ; Frequency: 5260 MHz;Duty Cycle: 1:1.004

Medium: HSL\_5G\_200417 Medium parameters used:  $f = 5260$  MHz;  $\sigma = 4.684$  S/m;  $\epsilon_r = 35.974$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(5.14, 5.14, 5.14) @ 5260 MHz; Calibrated: 2020/2/4
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2019/5/21
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1815
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Area Scan (161x141x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.591 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 10.88 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.771 W/kg

**SAR(1 g) = 0.199 W/kg; SAR(10 g) = 0.050 W/kg**

Maximum value of SAR (measured) = 0.515 W/kg

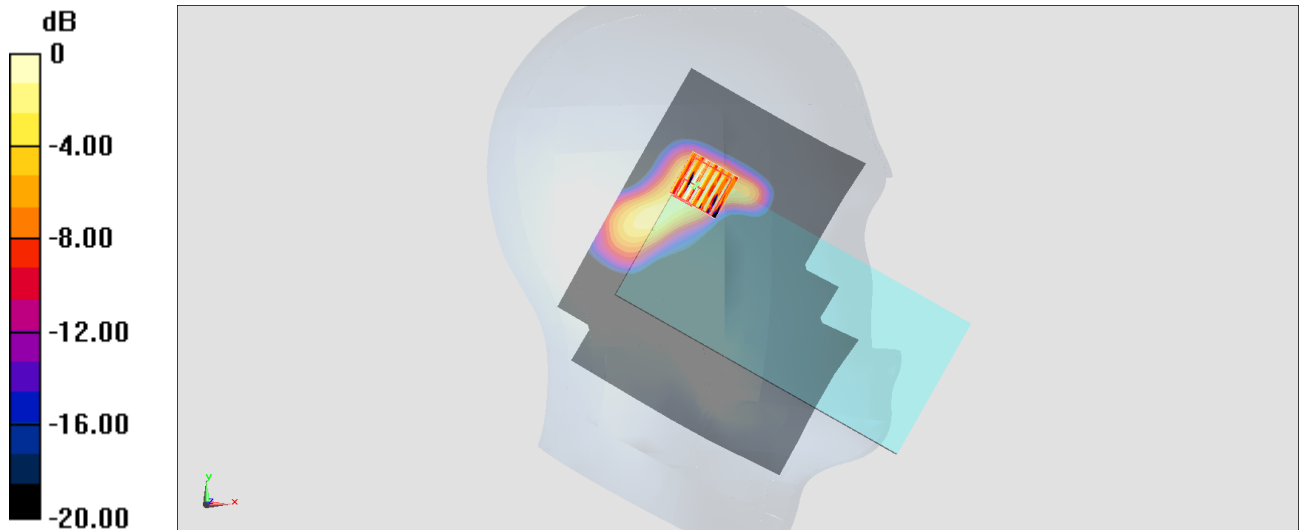

0 dB = 0.591 W/kg = -2.28 dBW/kg

## #08\_WLAN5GHz\_802.11a 6Mbps\_Left Cheek\_Ch140;Ant 1+2

Communication System: 802.11a ; Frequency: 5700 MHz;Duty Cycle: 1:1.004

Medium: HSL\_5G\_200417 Medium parameters used :  $f = 5700$  MHz;  $\sigma = 5.118$  S/m;  $\epsilon_r = 35.368$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(4.78, 4.78, 4.78) @ 5700 MHz; Calibrated: 2020/2/4
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2019/5/21
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1815
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Area Scan (161x141x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.662 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 10.90 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.989 W/kg

**SAR(1 g) = 0.193 W/kg; SAR(10 g) = 0.056 W/kg**

Maximum value of SAR (measured) = 0.531 W/kg

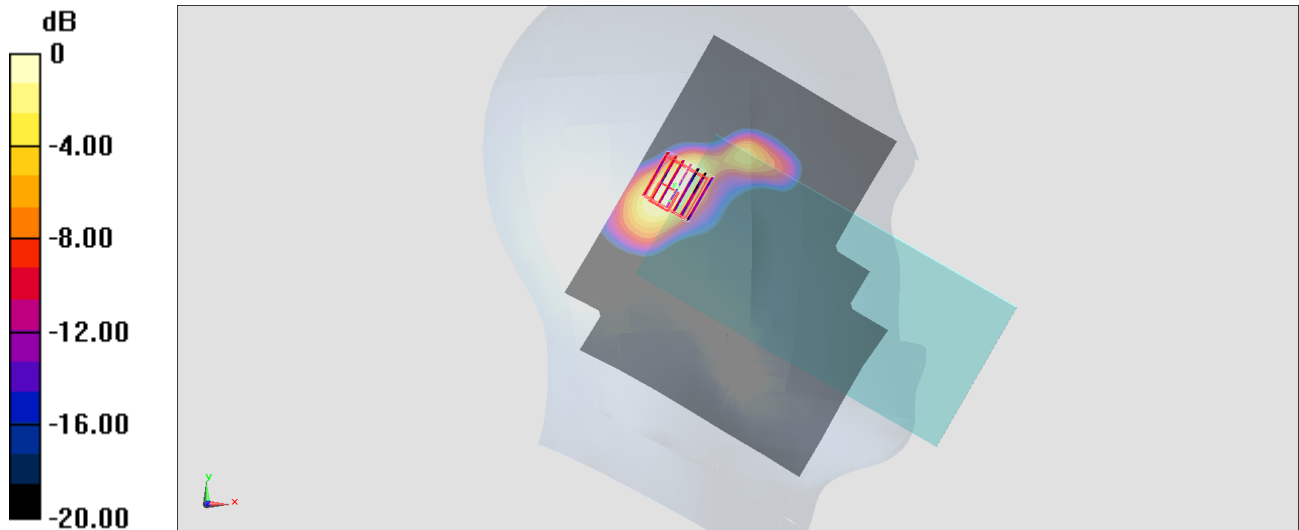

0 dB = 0.662 W/kg = -1.79 dBW/kg

## #09\_Bluetooth\_1Mbps\_Left Cheek\_Ch00;Ant 1

Communication System: Bluetooth; Frequency: 2402 MHz; Duty Cycle: 1:1.279

Medium: HSL\_2450\_200416 Medium parameters used :  $f = 2402$  MHz;  $\sigma = 1.793$  S/m;  $\epsilon_r = 39.308$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.33, 7.33, 7.33) @ 2402 MHz; Calibrated: 2020/2/4
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2019/5/21
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1815
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (81x71x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.250 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.03 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.304 W/kg

**SAR(1 g) = 0.110 W/kg; SAR(10 g) = 0.042 W/kg**

Maximum value of SAR (measured) = 0.206 W/kg

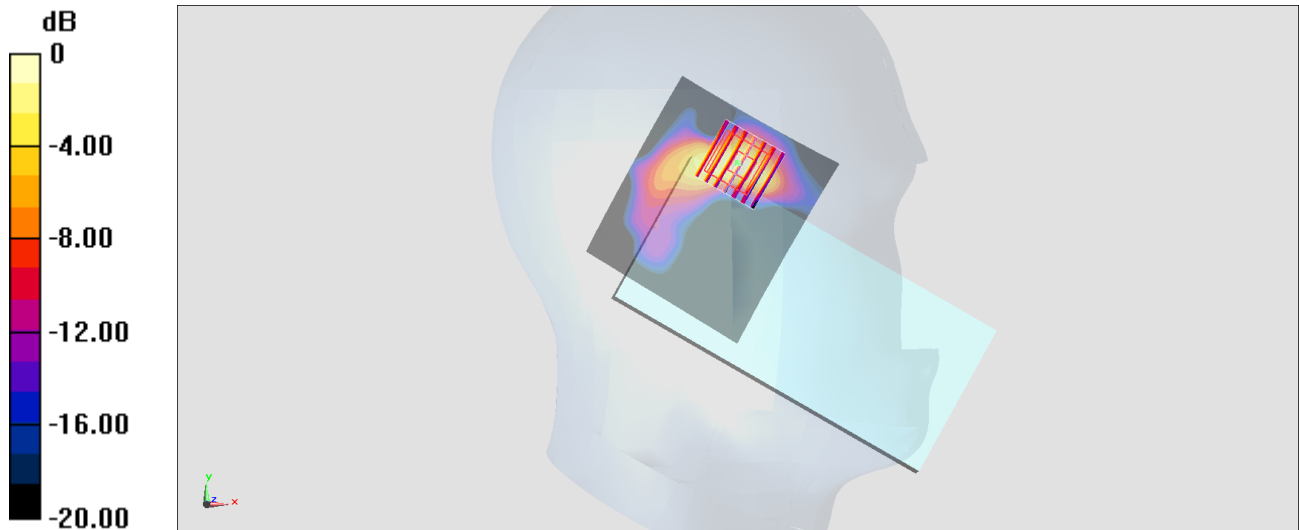

0 dB = 0.250 W/kg = -6.02 dBW/kg

**#10\_GSM850\_GPRS (3 Tx slots)\_Back\_10mm\_Ch251**

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:2.77

Medium: HSL\_850\_200331 Medium parameters used:  $f = 849$  MHz;  $\sigma = 0.89$  S/m;  $\epsilon_r = 41.409$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3184; ConvF(6.41, 6.41, 6.41) @ 848.8 MHz; Calibrated: 2019/9/25
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1305; Calibrated: 2019/4/30
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (71x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.118 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.08 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.152 W/kg

**SAR(1 g) = 0.093 W/kg; SAR(10 g) = 0.056 W/kg**

Maximum value of SAR (measured) = 0.119 W/kg

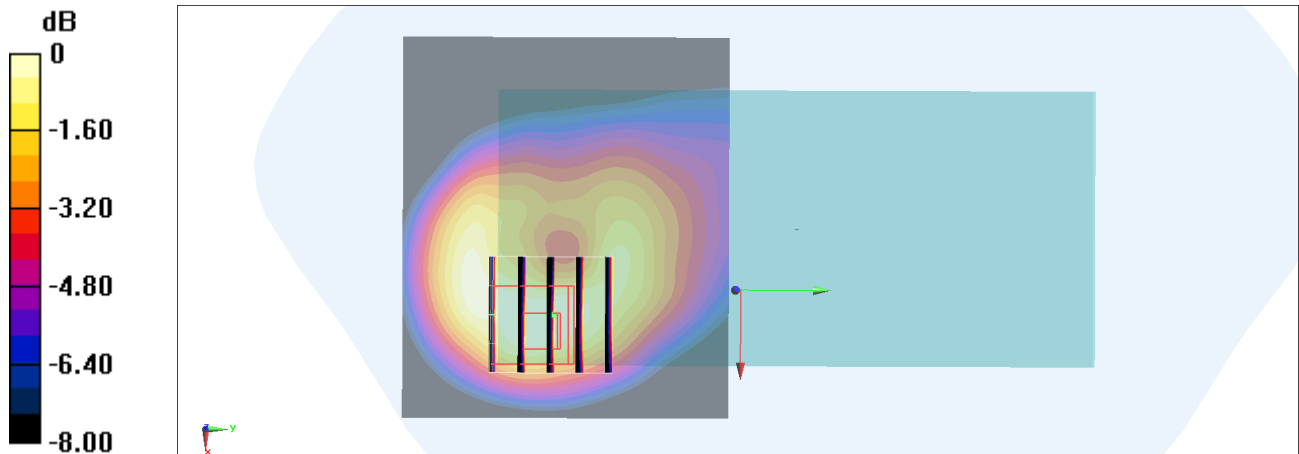

0 dB = 0.119 W/kg = -9.24 dBW/kg

**#11\_GSM1900\_GPRS (4 Tx slots)\_Bottom\_10mm\_Ch810**

Communication System: PCS; Frequency: 1909.8 MHz; Duty Cycle: 1:2.08

Medium: HSL\_1900\_200331 Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.427$  S/m;  $\epsilon_r = 39.162$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(5.14, 5.14, 5.14) @ 1909.8 MHz; Calibrated: 2019/5/24
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn699; Calibrated: 2020/2/26
- Phantom: SAM\_Left; Type: SAM; Serial: 1796
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (41x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.431 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.52 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.585 W/kg

**SAR(1 g) = 0.323 W/kg; SAR(10 g) = 0.161 W/kg**

Maximum value of SAR (measured) = 0.410 W/kg

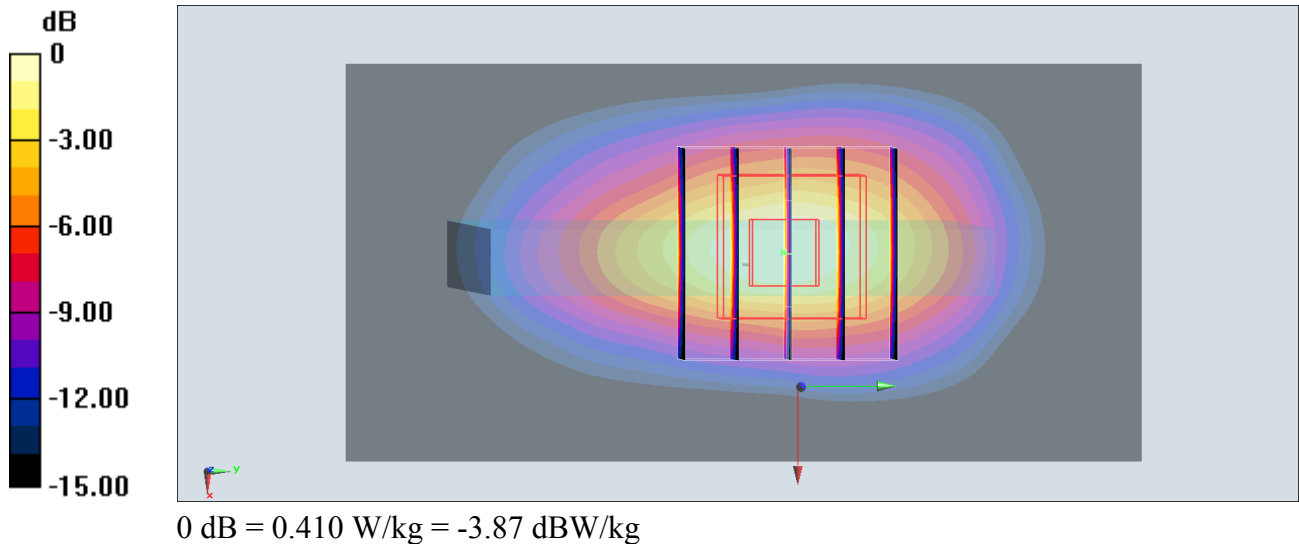

## #12\_WCDMA V\_RMC 12.2Kbps\_Back\_10mm\_Ch4233

Communication System: WCDMA ; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: HSL\_850\_200320 Medium parameters used:  $f = 847$  MHz;  $\sigma = 0.909$  S/m;  $\epsilon_r = 42.722$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(9.73, 9.73, 9.73) @ 846.6 MHz; Calibrated: 2019/7/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2019/9/17
- Phantom: SAM\_Right; Type: SAM; Serial: TP:1446
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.122 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.626 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.158 W/kg

**SAR(1 g) = 0.086 W/kg; SAR(10 g) = 0.048 W/kg**

Maximum value of SAR (measured) = 0.126 W/kg

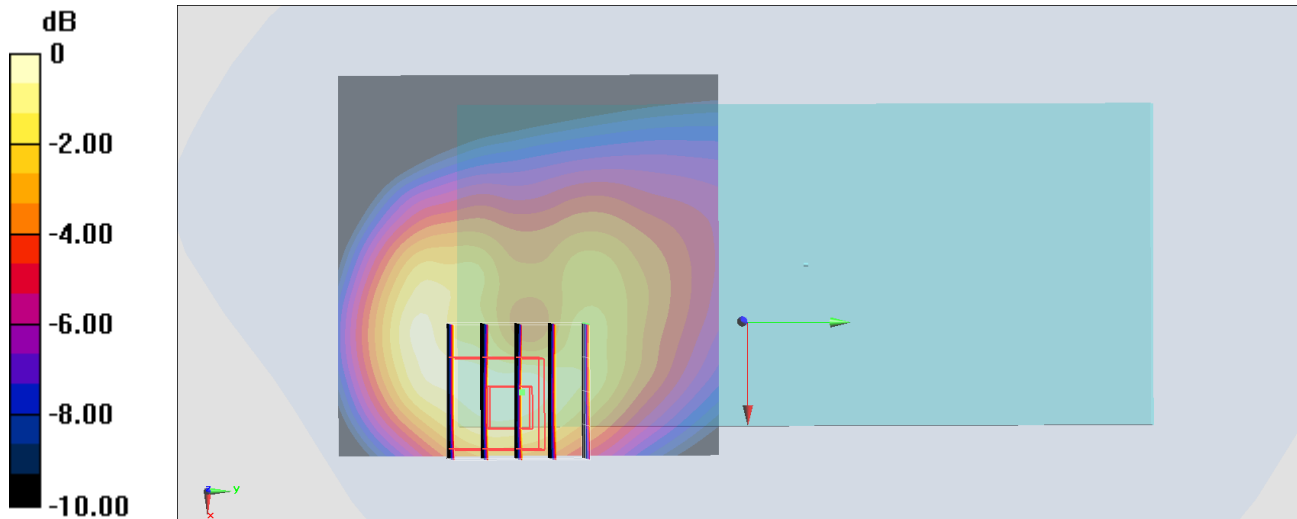

0 dB = 0.126 W/kg = -9.00 dBW/kg

**#13\_LTE Band 5\_10M\_QPSK\_1\_49\_Back\_10mm\_Ch20525**

Communication System: LTE ; Frequency: 836.5 MHz;Duty Cycle: 1:1

Medium: HSL\_850\_200320 Medium parameters used :  $f = 836.5$  MHz;  $\sigma = 0.899$  S/m;  $\epsilon_r = 42.874$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(9.73, 9.73, 9.73) @ 836.5 MHz; Calibrated: 2019/7/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2019/9/17
- Phantom: SAM\_Right; Type: SAM; Serial: TP:1446
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.226 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.30 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.283 W/kg

**SAR(1 g) = 0.167 W/kg; SAR(10 g) = 0.093 W/kg**

Maximum value of SAR (measured) = 0.243 W/kg

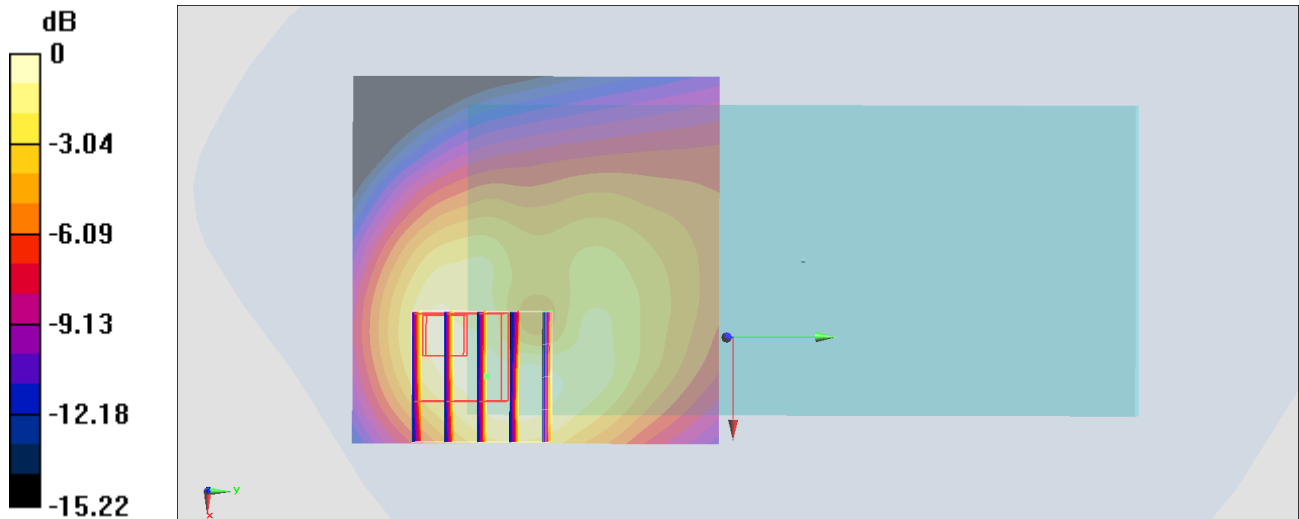

0 dB = 0.243 W/kg = -6.14 dBW/kg

## #14\_LTE Band 12\_10M\_QPSK\_1\_0\_Back\_10mm\_Ch23095

Communication System: LTE ; Frequency: 707.5 MHz;Duty Cycle: 1:1

Medium: HSL\_750\_200320 Medium parameters used :  $f = 707.5$  MHz;  $\sigma = 0.854$  S/m;  $\epsilon_r = 41.096$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(9.97, 9.97, 9.97) @ 707.5 MHz; Calibrated: 2019/7/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2019/9/17
- Phantom: SAM\_Right; Type: SAM; Serial: TP:1446
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.197 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.27 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.257 W/kg

**SAR(1 g) = 0.144 W/kg; SAR(10 g) = 0.085 W/kg**

Maximum value of SAR (measured) = 0.206 W/kg

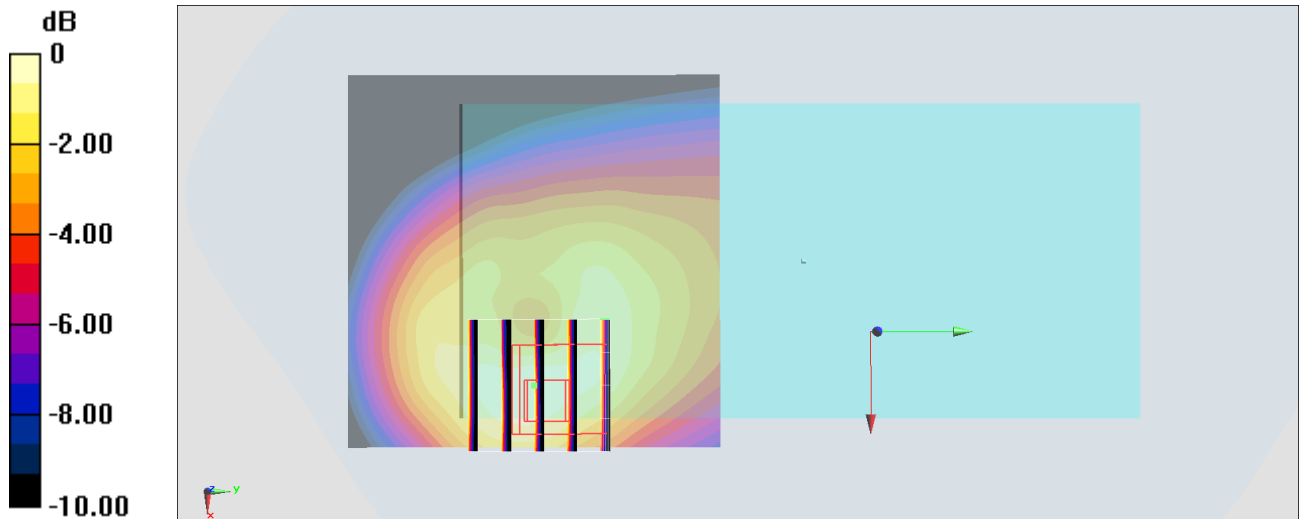

0 dB = 0.206 W/kg = -6.86 dBW/kg



**#15\_WLAN2.4GHz\_802.11b 1Mbps\_Right Side\_10mm\_Ch1;Ant 1+2**

Communication System: 802.11b ; Frequency: 2412 MHz;Duty Cycle: 1:1

Medium: HSL\_2450\_200416 Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.806$  S/m;  $\epsilon_r = 39.216$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.33, 7.33, 7.33) @ 2412 MHz; Calibrated: 2020/2/4
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2019/5/21
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1815
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Area Scan (51x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.196 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.248 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.173 W/kg

**SAR(1 g) = 0.074 W/kg; SAR(10 g) = 0.027 W/kg**

Maximum value of SAR (measured) = 0.131 W/kg

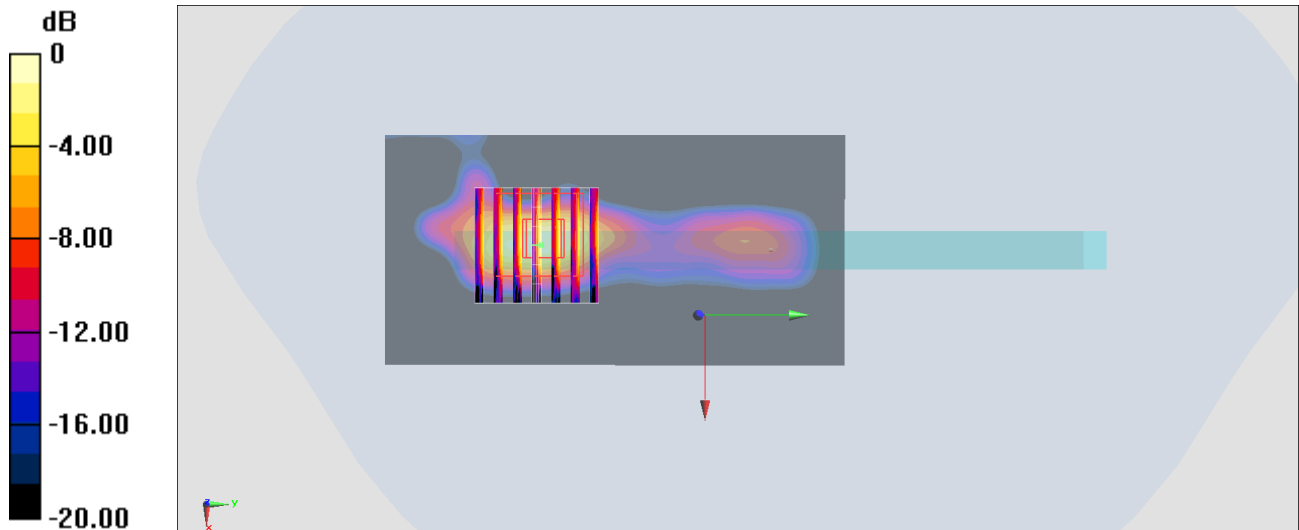

0 dB = 0.196 W/kg = -7.08 dBW/kg

## #16\_Bluetooth\_1Mbps\_Right Side\_10mm\_Ch00;Ant 1

Communication System: Bluetooth; Frequency: 2402 MHz; Duty Cycle: 1:1.279

Medium: HSL\_2450\_200416 Medium parameters used:  $f = 2402$  MHz;  $\sigma = 1.793$  S/m;  $\epsilon_r = 39.308$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.33, 7.33, 7.33) @ 2402 MHz; Calibrated: 2020/2/4
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2019/5/21
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1815
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (41x61x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.148 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.833 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.175 W/kg

**SAR(1 g) = 0.078 W/kg; SAR(10 g) = 0.032 W/kg**

Maximum value of SAR (measured) = 0.140 W/kg

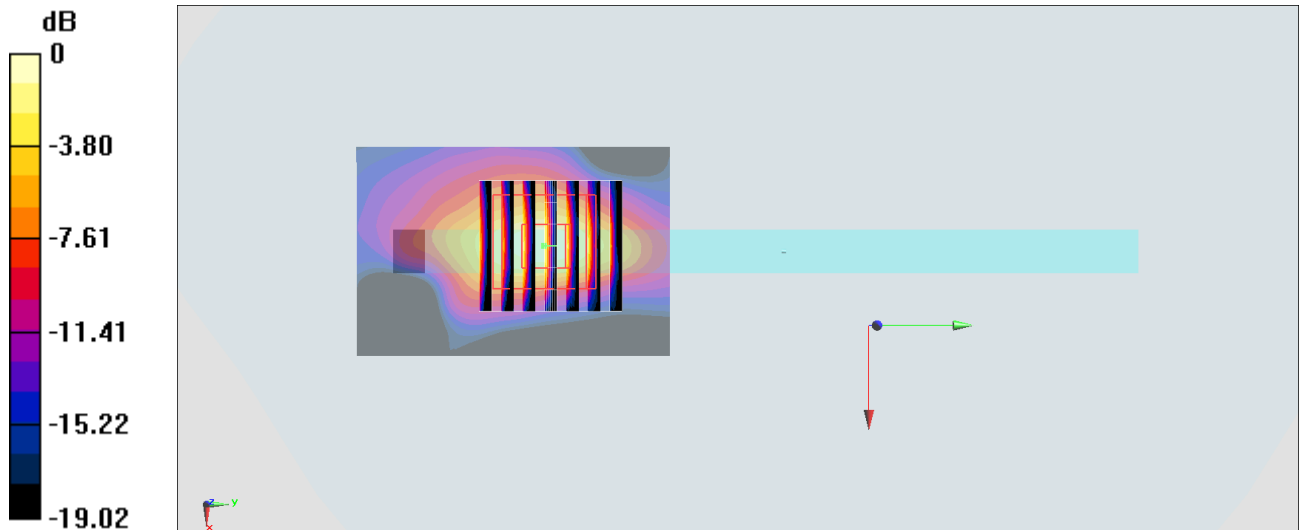

0 dB = 0.148 W/kg = -8.30 dBW/kg

**#17\_GSM850\_GPRS (3 Tx slots)\_Back\_10mm\_Ch251**

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:2.77

Medium: HSL\_850\_200331 Medium parameters used:  $f = 849$  MHz;  $\sigma = 0.89$  S/m;  $\epsilon_r = 41.409$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3184; ConvF(6.41, 6.41, 6.41) @ 848.8 MHz; Calibrated: 2019/9/25
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1305; Calibrated: 2019/4/30
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (71x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.118 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.08 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.152 W/kg

**SAR(1 g) = 0.093 W/kg; SAR(10 g) = 0.056 W/kg**

Maximum value of SAR (measured) = 0.119 W/kg

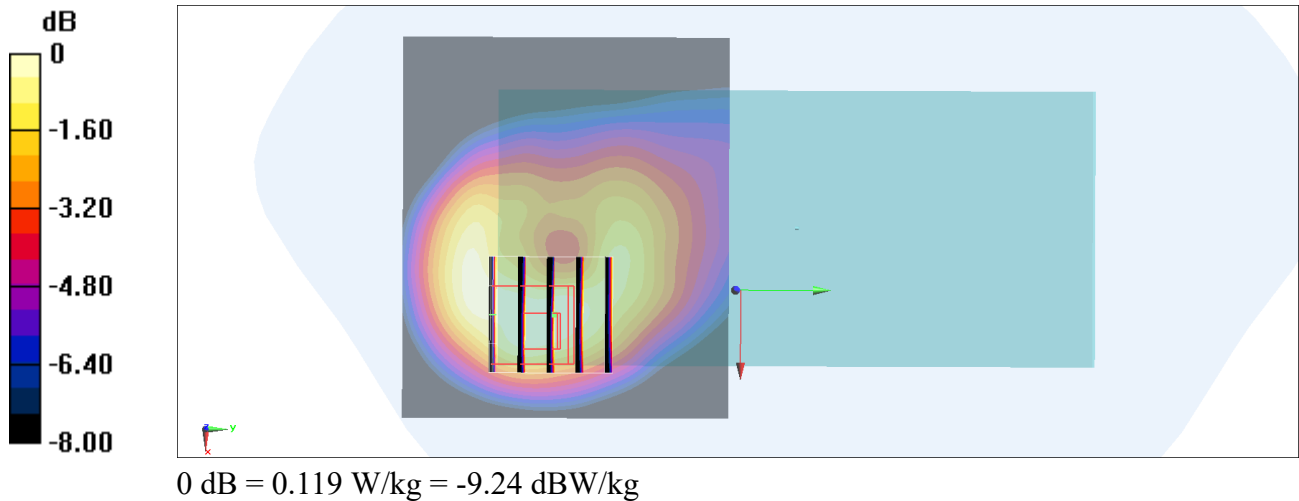

**#18\_GSM1900\_GPRS (4 Tx slots)\_Back\_10mm\_Ch810**

Communication System: PCS; Frequency: 1909.8 MHz; Duty Cycle: 1:2.08

Medium: HSL\_1900\_200331 Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.427$  S/m;  $\epsilon_r = 39.162$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(5.14, 5.14, 5.14) @ 1909.8 MHz; Calibrated: 2019/5/24
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn699; Calibrated: 2020/2/26
- Phantom: SAM\_Left; Type: SAM; Serial: 1796
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (71x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.270 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.07 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.393 W/kg

**SAR(1 g) = 0.220 W/kg; SAR(10 g) = 0.112 W/kg**

Maximum value of SAR (measured) = 0.274 W/kg

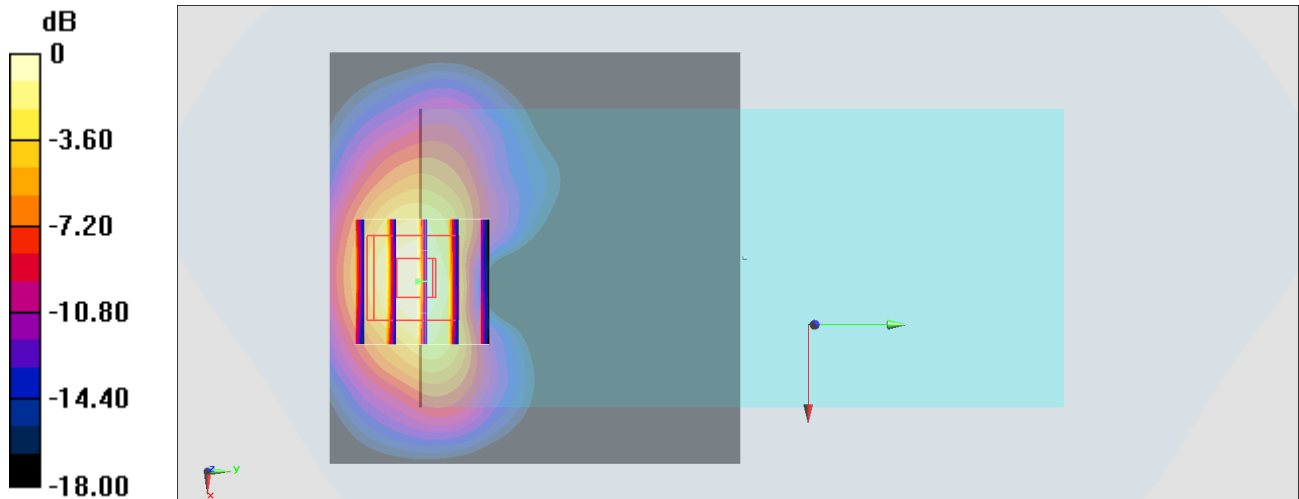

0 dB = 0.274 W/kg = -5.62 dBW/kg

## #19\_WCDMA V\_RMC 12.2Kbps\_Back\_10mm\_Ch4233

Communication System: WCDMA ; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: HSL\_850\_200320 Medium parameters used:  $f = 847$  MHz;  $\sigma = 0.909$  S/m;  $\epsilon_r = 42.722$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(9.73, 9.73, 9.73) @ 846.6 MHz; Calibrated: 2019/7/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2019/9/17
- Phantom: SAM\_Right; Type: SAM; Serial: TP:1446
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.122 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.626 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.158 W/kg

**SAR(1 g) = 0.086 W/kg; SAR(10 g) = 0.048 W/kg**

Maximum value of SAR (measured) = 0.126 W/kg

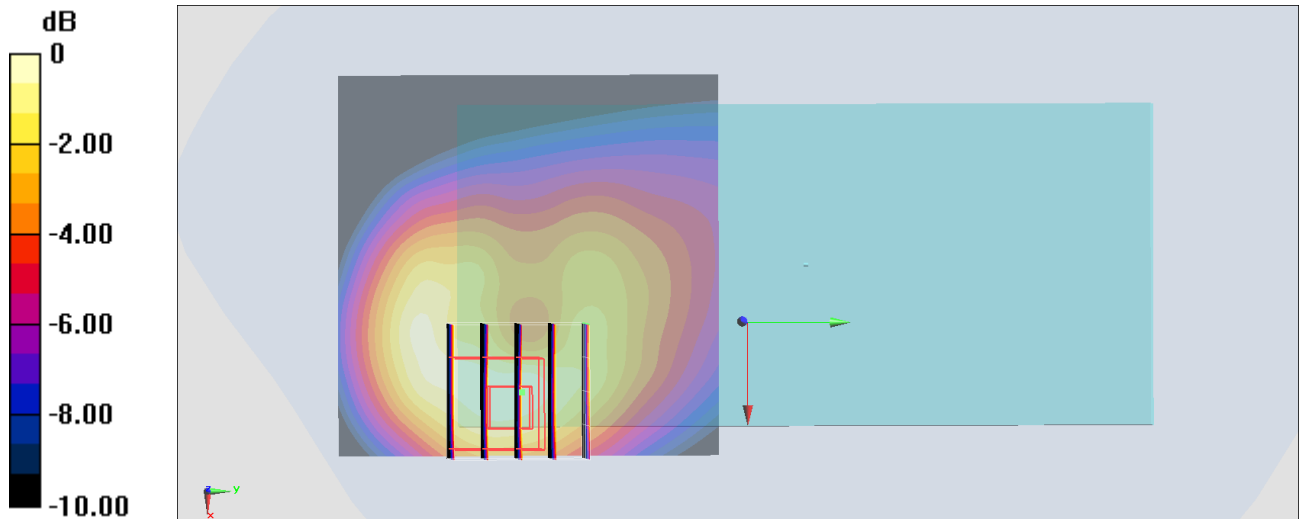

0 dB = 0.126 W/kg = -9.00 dBW/kg

**#20\_LTE Band 5\_10M\_QPSK\_1\_49\_Back\_10mm\_Ch20525**

Communication System: LTE ; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: HSL\_850\_200320 Medium parameters used :  $f = 836.5$  MHz;  $\sigma = 0.899$  S/m;  $\epsilon_r = 42.874$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(9.73, 9.73, 9.73) @ 836.5 MHz; Calibrated: 2019/7/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2019/9/17
- Phantom: SAM\_Right; Type: SAM; Serial: TP:1446
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.226 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.30 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.283 W/kg

**SAR(1 g) = 0.167 W/kg; SAR(10 g) = 0.093 W/kg**

Maximum value of SAR (measured) = 0.243 W/kg

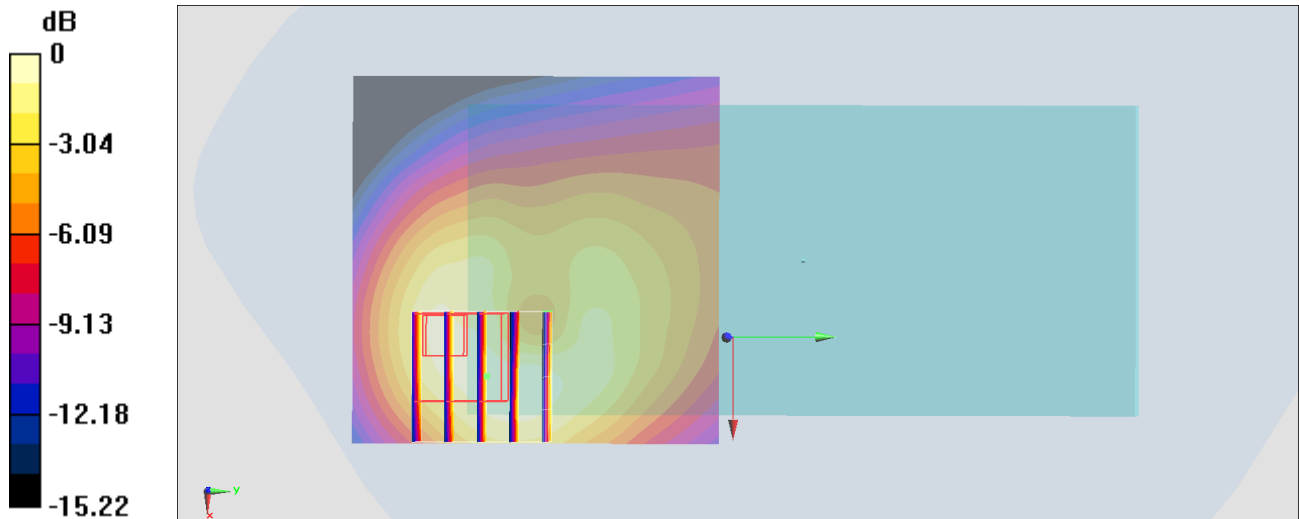

0 dB = 0.243 W/kg = -6.14 dBW/kg

## #21\_LTE Band 12\_10M\_QPSK\_1\_0\_Back\_10mm\_Ch23095

Communication System: LTE ; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL\_750\_200320 Medium parameters used :  $f = 707.5$  MHz;  $\sigma = 0.854$  S/m;  $\epsilon_r = 41.096$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(9.97, 9.97, 9.97) @ 707.5 MHz; Calibrated: 2019/7/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2019/9/17
- Phantom: SAM\_Right; Type: SAM; Serial: TP:1446
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.197 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.27 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.257 W/kg

**SAR(1 g) = 0.144 W/kg; SAR(10 g) = 0.085 W/kg**

Maximum value of SAR (measured) = 0.206 W/kg

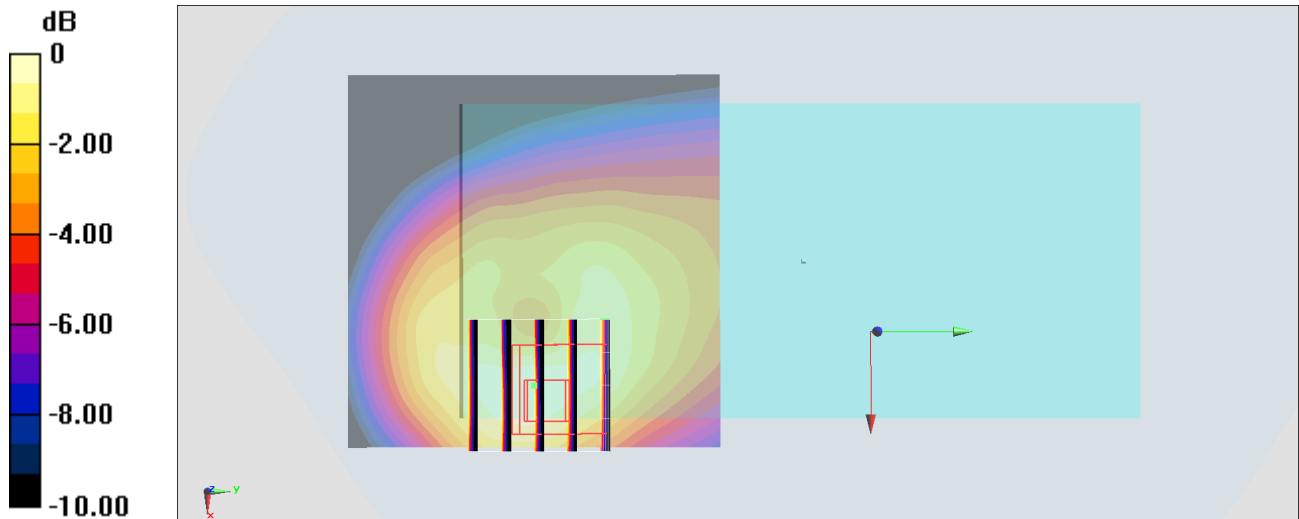

0 dB = 0.206 W/kg = -6.86 dBW/kg

## #22\_WLAN2.4GHz\_802.11b 1Mbps\_Back\_10mm\_Ch1;Ant 1+2

Communication System: 802.11b ; Frequency: 2412 MHz;Duty Cycle: 1:1

Medium: HSL\_2450\_200416 Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.806$  S/m;  $\epsilon_r = 39.216$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.33, 7.33, 7.33) @ 2412 MHz; Calibrated: 2020/2/4
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2019/5/21
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1815
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Area Scan (101x111x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0928 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.281 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.201 W/kg

**SAR(1 g) = 0.035 W/kg; SAR(10 g) = 0.012 W/kg**

Maximum value of SAR (measured) = 0.0567 W/kg

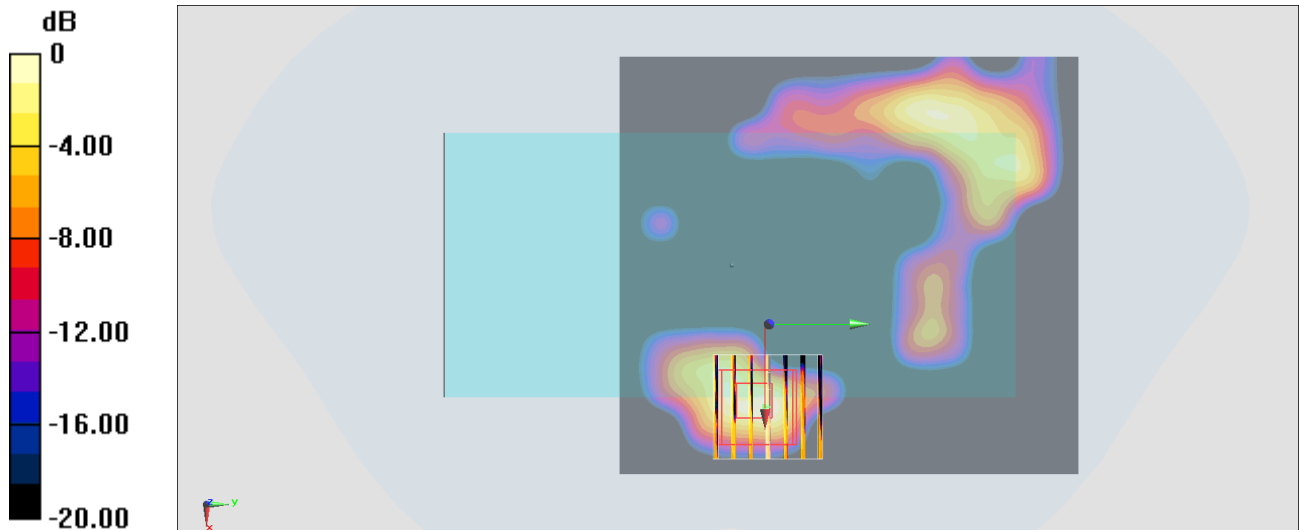

0 dB = 0.0928 W/kg = -10.32 dBW/kg



## #23\_WLAN5GHz\_802.11a 6Mbps\_Back\_10mm\_Ch52;Ant 1+2

Communication System: 802.11a ; Frequency: 5260 MHz;Duty Cycle: 1:1.004

Medium: HSL\_5G\_200417 Medium parameters used:  $f = 5260$  MHz;  $\sigma = 4.684$  S/m;  $\epsilon_r = 35.974$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(5.14, 5.14, 5.14) @ 5260 MHz; Calibrated: 2020/2/4
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2019/5/21
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1815
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Area Scan (121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0766 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 2.878 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.285 W/kg

**SAR(1 g) = 0.025 W/kg; SAR(10 g) = 0.00763 W/kg**

Maximum value of SAR (measured) = 0.0761 W/kg

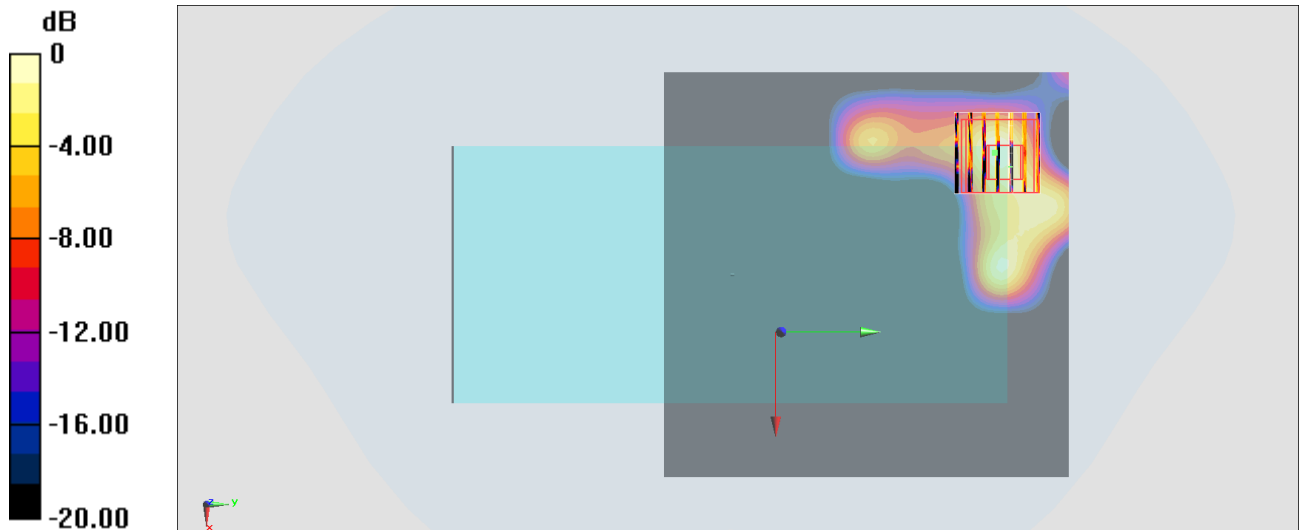

0 dB = 0.0766 W/kg = -11.16 dBW/kg

## #24\_WLAN5GHz\_802.11a 6Mbps\_Back\_10mm\_Ch140;Ant 1+2

Communication System: 802.11a ; Frequency: 5700 MHz;Duty Cycle: 1:1.004

Medium: HSL\_5G\_200417 Medium parameters used :  $f = 5700$  MHz;  $\sigma = 5.118$  S/m;  $\epsilon_r = 35.368$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(4.78, 4.78, 4.78) @ 5700 MHz; Calibrated: 2020/2/4
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2019/5/21
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1815
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Area Scan (121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.140 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 4.725 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.426 W/kg

**SAR(1 g) = 0.038 W/kg; SAR(10 g) = 0.011 W/kg**

Maximum value of SAR (measured) = 0.128 W/kg

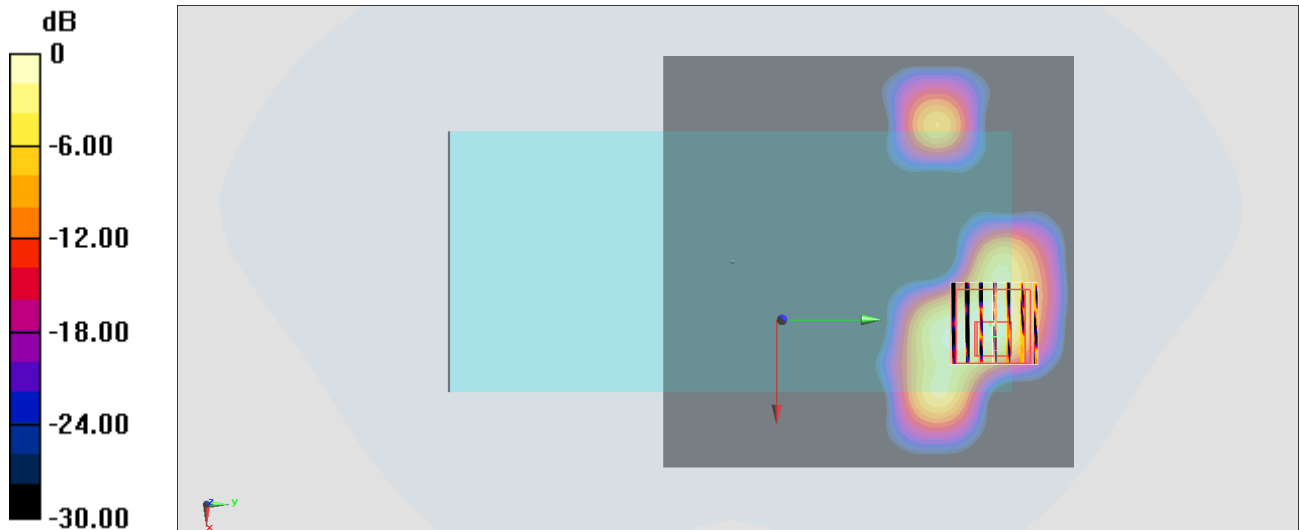

0 dB = 0.140 W/kg = -8.54 dBW/kg

## #25\_Bluetooth\_1Mbps\_Back\_10mm\_Ch00;Ant 1

Communication System: Bluetooth; Frequency: 2402 MHz; Duty Cycle: 1:1.279

Medium: HSL\_2450\_200416 Medium parameters used:  $f = 2402$  MHz;  $\sigma = 1.793$  S/m;  $\epsilon_r = 39.308$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.33, 7.33, 7.33) @ 2402 MHz; Calibrated: 2020/2/4
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2019/5/21
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1815
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (71x61x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0653 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.238 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.0860 W/kg

**SAR(1 g) = 0.040 W/kg; SAR(10 g) = 0.018 W/kg**

Maximum value of SAR (measured) = 0.0670 W/kg

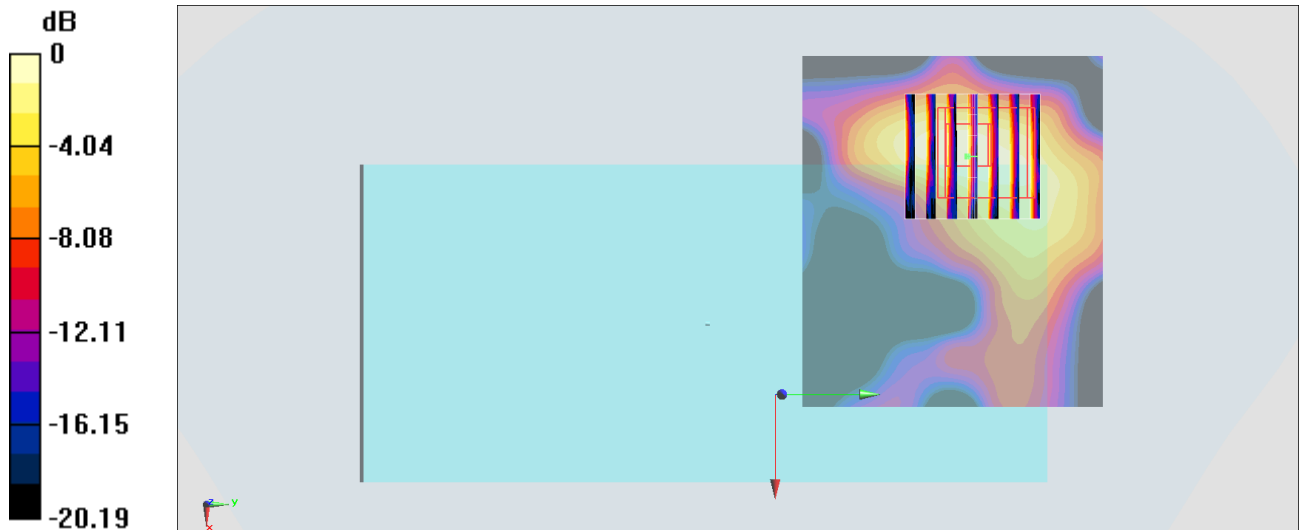

0 dB = 0.0653 W/kg = -11.85 dBW/kg

## #26\_WLAN5GHz\_802.11a\_6Mbps\_Right Side\_0mm\_Ch52;Ant 1+2

Communication System: 802.11a ; Frequency: 5260 MHz;Duty Cycle: 1:1.004

Medium: HSL\_5G\_200417 Medium parameters used:  $f = 5260$  MHz;  $\sigma = 4.684$  S/m;  $\epsilon_r = 35.974$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(5.14, 5.14, 5.14) @ 5260 MHz; Calibrated: 2020/2/4
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2019/5/21
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1815
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Area Scan (61x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.245 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 26.93 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 5.43 W/kg

**SAR(1 g) = 0.661 W/kg; SAR(10 g) = 0.125 W/kg**

Maximum value of SAR (measured) = 2.74 W/kg

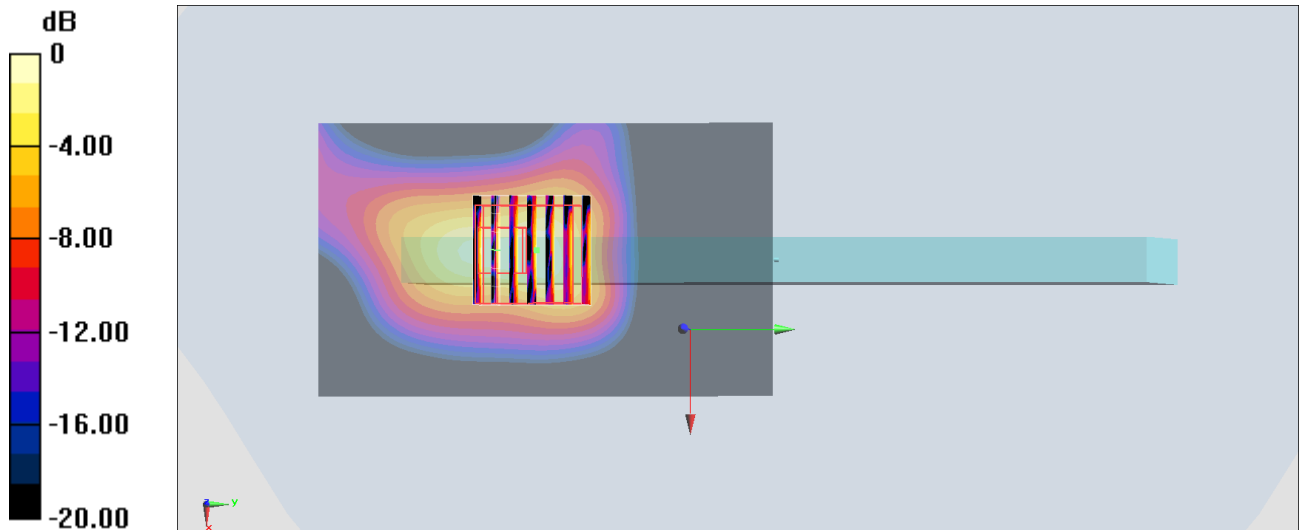

0 dB = 0.245 W/kg = -6.11 dBW/kg

## #27\_WLAN5GHz\_802.11a 6Mbps\_Right Side\_0mm\_Ch140;Ant 1+2

Communication System: 802.11a ; Frequency: 5700 MHz;Duty Cycle: 1:1.004

Medium: HSL\_5G\_200417 Medium parameters used :  $f = 5700$  MHz;  $\sigma = 5.118$  S/m;  $\epsilon_r = 35.368$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(4.78, 4.78, 4.78) @ 5700 MHz; Calibrated: 2020/2/4
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2019/5/21
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1815
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Area Scan (61x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.228 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 24.15 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 6.25 W/kg

**SAR(1 g) = 0.748 W/kg; SAR(10 g) = 0.140 W/kg**

Maximum value of SAR (measured) = 2.51 W/kg

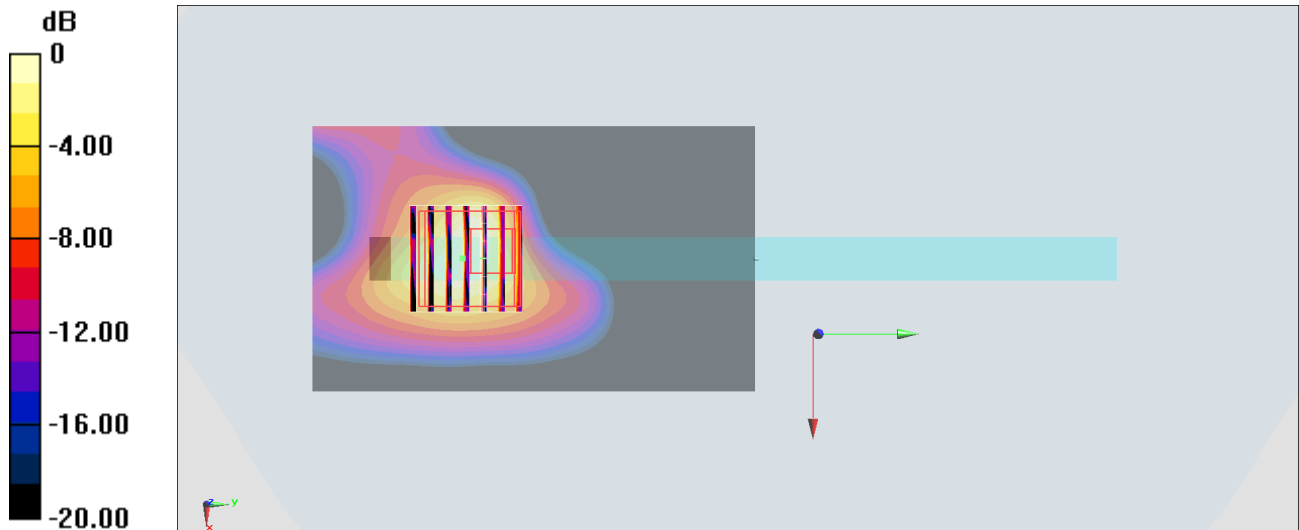

0 dB = 0.228 W/kg = -6.42 dBW/kg