

FCC & ISED TEST REPORT

Product Name: Active Noise Canceling True wireless headphones

Trade Mark:



or PHILIPS

Model No./HVIN: TAT3509

Add. Model No.: TAT3519, TAT3509xx/yy, TAT3519xx/yy
(xx=AA-ZZ or blank denoted different color;
yy=00-99 denoted different country destination)

Report Number: 2402069267RFC-1

Test Standards: FCC 47 CFR Part 15 Subpart C
RSS-247 Issue 3
RSS-Gen Issue 5

FCC ID: 2AR2STAT3509

IC: 24589-TAT3509

Test Result: PASS

Date of Issue: June 27, 2024

Prepared for:

MMD Hong Kong Holding Limited

Units 1208-11, 12th Floor, C-Bons International Center, 108 Wai Yip Street, Kwun Tong, Kowloon, Hong Kong

Prepared by:

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

TEL: +86-755-2823 0888

FAX: +86-755-2823 0886

Prepared by:

David Chen

David Chen
Senior Project Engineer

Reviewed by:

Henry Lu

Henry Lu
Team Leader

Approved by:

Robben Chen

Robben Chen
Assistant Manager

Date:

June 27, 2024

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

Version

| Version No. | Date | Description |
|-------------|---------------|-------------|
| V1.0 | June 27, 2024 | Original |

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com<http://www.uttlab.com>UTTR-RF-RSS247-V1.1

CONTENTS

| | |
|--|-----------|
| 1. GENERAL INFORMATION | 5 |
| 1.1 CLIENT INFORMATION | 5 |
| 1.2 EUT INFORMATION | 5 |
| 1.2.1 GENERAL DESCRIPTION OF EUT | 5 |
| 1.2.2 DESCRIPTION OF ACCESSORIES | 5 |
| 1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD | 6 |
| 1.4 OTHER INFORMATION..... | 6 |
| 1.5 DESCRIPTION OF SUPPORT UNITS | 6 |
| 1.6 TEST LOCATION..... | 7 |
| 1.7 TEST FACILITY..... | 7 |
| 1.8 DEVIATION FROM STANDARDS | 7 |
| 1.9 ABNORMALITIES FROM STANDARD CONDITIONS..... | 7 |
| 1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER | 7 |
| 1.11 MEASUREMENT UNCERTAINTY | 8 |
| 2. TEST SUMMARY | 9 |
| 3. EQUIPMENT LIST | 10 |
| 4. TEST CONFIGURATION | 11 |
| 4.1 ENVIRONMENTAL CONDITIONS FOR TESTING..... | 11 |
| 4.1.1 NORMAL OR EXTREME TEST CONDITIONS | 11 |
| 4.1.2 RECORD OF NORMAL ENVIRONMENT..... | 11 |
| 4.2 TEST CHANNELS | 11 |
| 4.3 EUT TEST STATUS | 12 |
| 4.4 PRE-SCAN..... | 12 |
| PRE-SCAN UNDER ALL PACKETS AT MIDDLE CHANNEL..... | 12 |
| 4.4.1 WORST-CASE DATA PACKETS | 12 |
| 4.4.2 TESTED CHANNEL DETAIL..... | 13 |
| 4.5 TEST SETUP | 14 |
| 4.5.1 FOR RADIATED EMISSIONS TEST SETUP | 14 |
| 4.5.2 FOR CONDUCTED EMISSIONS TEST SETUP | 15 |
| 4.5.3 FOR CONDUCTED RF TEST SETUP | 16 |
| 4.6 SYSTEM TEST CONFIGURATION | 16 |
| 4.7 DUTY CYCLE | 17 |
| 5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION | 19 |
| 5.1 REFERENCE DOCUMENTS FOR TESTING | 19 |
| 5.2 ANTENNA REQUIREMENT | 19 |
| 5.3 CONDUCTED PEAK OUTPUT POWER..... | 20 |
| 5.4 20 dB BANDWIDTH & OCCUPIED BANDWIDTH..... | 22 |
| 5.5 CARRIER FREQUENCIES SEPARATION..... | 23 |
| 5.6 NUMBER OF HOPPING CHANNEL | 24 |
| 5.7 DWELL TIME..... | 25 |
| 5.8 CONDUCTED OUT OF BAND EMISSION | 26 |
| 5.9 RADIATED SPURIOUS EMISSIONS..... | 27 |
| 5.10 BAND EDGE MEASUREMENTS (RADIATED)..... | 34 |
| APPENDIX A RF TEST DATA_ FOR LEFT EARBUD | 39 |
| A.1 99% BANDWIDTH | 39 |
| A.2 20dB BANDWIDTH..... | 41 |
| A.3 CARRIER FREQUENCIES SEPARATION | 43 |
| A.4 CONDUCTED OUT OF BAND EMISSION..... | 44 |
| A.5 DWELL TIME..... | 49 |
| A.6 NUMBER OF HOPPING CHANNEL..... | 56 |
| APPENDIX B RF TEST DATA_ FOR RIGHT EARBUD | 57 |

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

| | | |
|--|-------------------------------------|----|
| B.1 | 99% BANDWIDTH | 57 |
| B.2 | 20DB BANDWIDTH..... | 59 |
| B.3 | CARRIER FREQUENCIES SEPARATION..... | 61 |
| B.4 | CONDUCTED OUT OF BAND EMISSION..... | 62 |
| B.5 | DWELL TIME..... | 67 |
| B.6 | NUMBER OF HOPPING CHANNEL | 74 |
| APPENDIX 1 PHOTOS OF TEST SETUP | | 75 |
| APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS..... | | 75 |




1. GENERAL INFORMATION

1.1 CLIENT INFORMATION

| | |
|---------------------------------|--|
| Applicant: | MMD Hong Kong Holding Limited |
| Address of Applicant: | Units 1208-11,12th Floor,C-Bons International Center, 108 Wai Yip Street, Kwun Tong, Kowloon,Hong Kong |
| Manufacturer: | MMD Hong Kong Holding Limited |
| Address of Manufacturer: | Units 1208-11,12th Floor,C-Bons International Center, 108 Wai Yip Street, Kwun Tong, Kowloon,Hong Kong |

1.2 EUT INFORMATION

1.2.1 General Description of EUT

| | | |
|---|---|---------------|
| Product Name: | Active Noise Canceling True wireless headphones | |
| Model No. /HVIN: | TAT3509 | |
| Add. Model No.: | TAT3519,TAT3509xx/yy, TAT3519xx/yy (xx=AA-ZZ or blank denoted different color; yy=00-99 denoted different country destination) | |
| Trade Mark: |  or PHILIPS | |
| DUT Stage: | Production Unit | |
| EUT Supports Function: (Provided by the customer) | 2.4 GHz ISM Band: | Bluetooth 5.3 |
| Software Version: | V1.013 (Provided by the customer) | |
| Hardware Version: | V02 (Provided by the customer) | |
| Sample Received Date: | February 1, 2024 | |
| Sample Tested Date: | March 20, 2024 to May 18, 2024 | |
| Note: | 1. The additional model TAT3519,TAT3509xx/yy, TAT3519xx/yy (xx=AA-ZZ or blank denoted different color; yy=00-99 denoted different country destination) is identical with the test model TAT3509 except the model number for marketing purpose. 2. The ISED certification is only for the main model. | |

1.2.2 Description of Accessories

| Cable | |
|---------------------|----------------------------|
| Description: | USB Type-C Plug Cable |
| Cable Type: | Unshielded without ferrite |
| Length: | 0.2 Meter |

| Battery (Charging Box) | |
|--------------------------------|----------------------------------|
| Model No.: | HT432043S |
| Battery Type: | Lithium-ion Rechargeable Battery |
| Rated Voltage: | 3.6 Vdc |
| Limited Charge Voltage: | 4.2 Vdc |
| Rated Capacity: | 1.512Wh |

| Battery (Earbuds) | |
|--------------------------------|----------------------------------|
| Model No.: | HT1160H |
| Battery Type: | Lithium-ion Rechargeable Battery |
| Rated Voltage: | 3.85 Vdc |
| Limited Charge Voltage: | 4.4 Vdc |

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD

| | |
|--|--|
| Frequency Band: | 2400 MHz to 2483.5 MHz |
| Frequency Range: | 2402 MHz to 2480 MHz |
| Bluetooth Version: | Bluetooth BR + EDR |
| Modulation Technique: | Frequency Hopping Spread Spectrum(FHSS) |
| Type of Modulation: | GFSK, $\pi/4$ DQPSK, 8DPSK |
| Number of Channels: | 79 |
| Channel Separation: | 1 MHz |
| Hopping Channel Type: | Adaptive Frequency Hopping Systems |
| Antenna Type: | BT Antenna |
| Antenna Gain: (Provided by the customer) | Left earbud: -0.2 dBi Right earbud: -0.28 dBi |
| Maximum Conducted Peak Power: | Left earbud: 1.84 dBm Right earbud: 4.99 dBm |
| Normal Test Voltage: | 3.85 Vdc |

1.4 OTHER INFORMATION

| Operation Frequency Each of Channel | |
|--|-----------------------------------|
| $f = 2402 + k \text{ MHz}, k = 0, \dots, 78$ | |
| Note: | |
| f | is the operating frequency (MHz); |
| k | is the operating channel. |

| Modulation Configure | | | |
|----------------------|--------|-------------|-------------|
| Modulation | Packet | Packet Type | Packet Size |
| GFSK | 1-DH1 | 4 | 27 |
| | 1-DH3 | 11 | 183 |
| | 1-DH5 | 15 | 339 |
| $\pi/4$ DQPSK | 2-DH1 | 20 | 54 |
| | 2-DH3 | 26 | 367 |
| | 2-DH5 | 30 | 679 |
| 8DPSK | 3-DH1 | 24 | 83 |
| | 3-DH3 | 27 | 552 |
| | 3-DH5 | 31 | 1021 |

1.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested with associated equipment below.

1) Support Equipment

| Description | Manufacturer | Model No. | Serial Number | Supplied by |
|-------------|--------------|--------------|---------------|-------------|
| Notebook | DELL | Latitude3400 | 16238087894 | UnionTrust |
| Mouse | DELL | MS111 | CN-011D3V-738 | UnionTrust |

2) Support Cable

| Cable No. | Description | Connector | Length | Supplied by |
|-----------|---------------|-----------|------------|-------------|
| 1 | Antenna Cable | SMA | 0.10 Meter | UnionTrust |

1.6 TEST LOCATION

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Telephone: +86 (0) 755 2823 0888

Fax: +86 (0) 755 2823 0886

1.7 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L9069

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

A2LA-Lab Certificate No.: 4312.01

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

ISED Wireless Device Testing Laboratories

CAB identifier: CN0032

FCC Accredited Lab.

Designation Number: CN1194

Test Firm Registration Number: 259480

1.8 DEVIATION FROM STANDARDS

None.

1.9 ABNORMALITIES FROM STANDARD CONDITIONS

None.

1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER

None.

1.11 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

| No. | Item | Measurement Uncertainty |
|-----|-----------------------------------|--------------------------|
| 1 | Conducted emission 9KHz-150KHz | ±3.2 dB |
| 2 | Conducted emission 150KHz-30MHz | ±2.7 dB |
| 3 | Radiated emission 9KHz-30MHz | ± 4.7 dB |
| 4 | Radiated emission 30MHz-1GHz | ± 4.6 dB |
| 5 | Radiated emission 1GHz-18GHz | ± 4.4 dB |
| 6 | Radiated emission 18GHz-26GHz | ± 4.6 dB |
| 7 | Radiated emission 26GHz-40GHz | ± 4.6 dB |
| 8 | RF Power, Conducted | ± 0.69 dB |
| 9 | Transmission Time | ± 0.19 % |
| 10 | Occupied Bandwidth | ± 1.86 % |
| 11 | Power Spectral Density, conducted | ± 0.6 dB |
| 12 | Radio Frequency | ± 6.5 x 10 ⁻⁸ |
| 13 | Conducted out of band emission | ± 2.7 dB |

2. TEST SUMMARY

| FCC 47 CFR Part 15 Subpart C Test Cases | | | |
|---|--|---|------------------------|
| Test Item | Test Requirement | Test Method | Result |
| Antenna Requirement | FCC 47 CFR Part 15 Subpart C Section 15.203/15.247 (c) RSS-Gen Issue 5, Section 6.8 | N/A | PASS |
| AC Power Line Conducted Emission | FCC 47 CFR Part 15 Subpart C Section 15.207 RSS-Gen Issue 5, Section 8.8 | ANSI C63.10-2013 Section 6.2 | N/A ^(Note2) |
| Conducted Peak Output Power | FCC 47 CFR Part 15 Subpart C Section 15.247 (b)(1) RSS-247 Issue 3, Section 5.4(b) | ANSI C63.10-2013 Section 7.8.5 | PASS |
| 20 dB Bandwidth | FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(1) RSS-247 Issue 3, Section 5.1(a) | ANSI C63.10-2013 Section 6.9.2 | PASS |
| Occupied Bandwidth | RSS-Gen section 6.7 | RSS-Gen section 6.7 | PASS |
| Carrier Frequencies Separation | FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(1) RSS-247 Issue 3, Section 5.1(b) | ANSI C63.10-2013 Section 7.8.2 | PASS |
| Number of Hopping Channel | FCC 47 CFR Part 15 Subpart C Section 15.247 (b)(1) RSS-247 Issue 3, Section 5.1(d) | ANSI C63.10-2013 Section 7.8.3 | PASS |
| Dwell Time | FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(1) RSS-247 Issue 3, Section 5.1(d) | ANSI C63.10-2013 Section 7.8.4 | PASS |
| Conducted Out of Band Emission | FCC 47 CFR Part 15 Subpart C Section 15.247(d) RSS-247 Issue 3, Section 5.5 | ANSI C63.10-2013 Section 6.10.4 & Section 7.8.8 | PASS |
| Radiated Emissions | FCC 47 CFR Part 15 Subpart C Section 15.205/15.209 RSS-Gen Issue 5, Section 6.13/8.9/8.10 | ANSI C63.10-2013 Section 6.3 & 6.5 & 6.6 | PASS |
| Note: | | | |
| 1) N/A: In this whole report not applicable. | | | |
| 2) This EUT is charged by AC adapter to the battery, when charging, it doesn't transmitting while charging. | | | |

3. EQUIPMENT LIST

| Radiated Emission Test Equipment List | | | | | | |
|---------------------------------------|--|-----------------|------------|----------------------------|-------------------------|-----------------------------|
| Used | Equipment | Manufacturer | Model No. | Serial Number | Cal. date (dd mm, yyyy) | Cal. Due date (dd mm, yyyy) |
| <input checked="" type="checkbox"/> | 3m SAC | ETS-Lindgren | 3m | Euroshiedpn-C T001270-1317 | 11-Nov-2023 | 10-Nov-2026 |
| <input checked="" type="checkbox"/> | Loop Antenna | ETS-Lindgren | 6502 | 00202525 | 30-Oct-2023 | 29-Oct-2024 |
| <input checked="" type="checkbox"/> | Receiver | ROHDE & SCHWARZ | ESIB26 | 100114 | 27-Oct-2023 | 26-Oct-2024 |
| <input checked="" type="checkbox"/> | Broadband Antenna (Pre-amplifier) | ETS-Lindgren | 3142E | 00201566 | 30-Oct-2023 | 29-Oct-2024 |
| <input checked="" type="checkbox"/> | Pre-amplifier | HP | 8447F | 2805A02960 | 31-Oct-2023 | 30-Oct-2024 |
| <input checked="" type="checkbox"/> | 6dB Attenuator | Talent | RA6A5-N-18 | 18103001 | 30-Oct-2023 | 29-Oct-2024 |
| <input checked="" type="checkbox"/> | Double-Ridged Waveguide Horn Antenna (Pre-amplifier) | ETS-Lindgren | 3117-PA | 00201541 | 1-Apr-2024 | 31-Mar-2025 |
| <input checked="" type="checkbox"/> | Pre-amplifier | ETS-Lindgren | 00118385 | 00201874 | 31-Oct-2023 | 30-Oct-2024 |
| <input checked="" type="checkbox"/> | Double-Ridged Waveguide Horn Antenna (Pre-amplifier) | ETS-Lindgren | 3116C-PA | 00202652 | 30-Oct-2023 | 29-Oct-2024 |
| <input checked="" type="checkbox"/> | Pre-amplifier | ETS-Lindgren | 00118384 | 202652 | 30-Oct-2023 | 29-Oct-2024 |
| <input checked="" type="checkbox"/> | Multi device Controller | ETS-LINDGREN | 7006-001 | 00160105 | N/A | N/A |
| <input checked="" type="checkbox"/> | Test Software | Audix | e3 | Software Version: 9.160323 | | |

| Conducted RF test Equipment List | | | | | | |
|-------------------------------------|---|-----------------------|-----------|----------------------------------|-------------------------|-----------------------------|
| Used | Equipment | Manufacturer | Model No. | Serial Number | Cal. date (dd mm, yyyy) | Cal. Due date (dd mm, yyyy) |
| <input checked="" type="checkbox"/> | EXA Spectrum Analyzer | KEYSIGHT | N9010A | MY51440197 | 29-Mar-2024 | 28-Mar-2025 |
| <input checked="" type="checkbox"/> | USB Wideband Power Sensor | KEYSIGHT | U2021XA | MY55430035 | 27-Oct-2023 | 26-Oct-2024 |
| <input checked="" type="checkbox"/> | MXG X-Series RF Vector Signal Generator | KEYSIGHT | N5182B | MY51350267 | 27-Oct-2023 | 26-Oct-2024 |
| <input type="checkbox"/> | Wideband Radio Communication Tester | R&S | CMW500 | 120932 | 29-Mar-2024 | 28-Mar-2025 |
| <input checked="" type="checkbox"/> | Test Software | Automation TestSystem | ECIT | Software Version: 1.0.7515.16529 | | |

4. TEST CONFIGURATION

4.1 ENVIRONMENTAL CONDITIONS FOR TESTING

4.1.1 Normal or Extreme Test Conditions

| Environment Parameter | Selected Values During Tests | | |
|---|------------------------------|---------------------|-----------------------|
| Test Condition | Ambient | | |
| | Temperature (°C) | Voltage (V) | Relative Humidity (%) |
| NT/NV | +15 to +35 | 3.85Vdc and or 5Vdc | 20 to 75 |
| Remark: | | | |
| 1) NV: Normal Voltage; NT: Normal Temperature | | | |

4.1.2 Record of Normal Environment

| Test Item | Temperature (°C) | Relative Humidity (%) | Pressure (kPa) | Sample No. | Tested by |
|--------------------------------------|------------------|-----------------------|----------------|------------------------|------------|
| Conducted Peak Output Power | 24 | 66 | 100.2 | S202402052721-ZJA04/13 | Allen Zhou |
| 20 dB Bandwidth & Occupied Bandwidth | | | | | |
| Carrier Frequencies Separation | | | | | |
| Number of Hopping Channel | | | | | |
| Dwell Time | | | | | |
| Conducted Out of Band Emission | 21.1 | 43.0 | 100.1 | | Linson Xie |
| Radiated Emissions | 24.4 | 57.1 | 100.3 | Fire Huo | |
| Band Edge Measurement | | | | | |

4.2 TEST CHANNELS

| Mode | Tx/Rx Frequency | Test RF Channel Lists | | |
|----------------------------------|----------------------|-----------------------|------------|------------|
| | | Lowest(L) | Middle(M) | Highest(H) |
| GFSK (DH1, DH3, DH5) | 2402 MHz to 2480 MHz | Channel 0 | Channel 39 | Channel 78 |
| | | 2402 MHz | 2441 MHz | 2480 MHz |
| $\pi/4$ DQPSK (DH1, DH3, DH5) | 2402 MHz to 2480 MHz | Channel 0 | Channel 39 | Channel 78 |
| | | 2402 MHz | 2441 MHz | 2480 MHz |
| 8DPSK (DH1, DH3, DH5) | 2402 MHz to 2480 MHz | Channel 0 | Channel 39 | Channel 78 |
| | | 2402 MHz | 2441 MHz | 2480 MHz |

4.3 EUT TEST STATUS

| Type of Modulation | Tx Function | Description |
|-------------------------------|-------------|--|
| GFSK/ π /4DQPSK/ 8DPSK | 1Tx | <ol style="list-style-type: none"> 1. Keep the EUT in continuously transmitting with Modulation test single 2. Keep the EUT in continuously transmitting with Modulation test Hopping Frequency. |

| Power Setting |
|-------------------|
| Power Setting: 10 |

| Test Software |
|------------------------------------|
| Test software name: bt_tool v1.1.2 |

4.4 PRE-SCAN

Pre-scan under all packets at middle channel

For Left earbud

| Conducted Average Power (dBm) for packets | | | | | | | | | |
|---|-------|-------|-------|---------------|-------|-------|-------|-------|-------|
| Type of Modulation | GFSK | | | π /4DQPSK | | | 8DPSK | | |
| Packets | 1-DH1 | 1-DH3 | 1-DH5 | 2-DH1 | 2-DH3 | 2-DH5 | 3-DH1 | 3-DH3 | 3-DH5 |
| Power (dBm) | -4.52 | -1.22 | -0.63 | -5.18 | -2.37 | -1.81 | -5.19 | -2.36 | -1.84 |

For Right earbud

| Conducted Average Power (dBm) for packets | | | | | | | | | |
|---|-------|-------|-------|---------------|-------|-------|-------|-------|-------|
| Type of Modulation | GFSK | | | π /4DQPSK | | | 8DPSK | | |
| Packets | 1-DH1 | 1-DH3 | 1-DH5 | 2-DH1 | 2-DH3 | 2-DH5 | 3-DH1 | 3-DH3 | 3-DH5 |
| Power (dBm) | -1.35 | 1.86 | 2.55 | -2.01 | 0.69 | 1.32 | -2.03 | 0.68 | 1.30 |

4.4.1 Worst-case data packets

| Type of Modulation | Worst-case data rates |
|--------------------|-----------------------|
| GFSK | 1-DH5 |
| π /4DQPSK | 2-DH5 |
| 8DPSK | 3-DH5 |



4.4.2 Tested channel detail


Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data packets and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.

| Type of Modulation | GFSK | | | $\pi/4$ DQPSK | | | 8DPSK | | |
|--|--|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|
| Data Packets | 1-DH 1 | 1-DH 3 | 1-DH 5 | 2-DH 1 | 2-DH 3 | 2-DH 5 | 3-DH 1 | 3-DH 3 | 3-DH 5 |
| Available Channel | 0 to 78 | | | | | | | | |
| Test Item | Test channel and choose of data packets | | | | | | | | |
| AC Power Line Conducted Emission | Frequency Hopping Channel 0 to 78 <input type="checkbox"/> Link | | | | | | | | |
| Conducted Peak Output Power | Channel 0 & 39 & 78 | | | | | | | | |
| | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> |
| 20 dB Bandwidth | Channel 0 & 39 & 78 | | | | | | | | |
| | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> |
| Carrier Frequencies Separation | Frequency Hopping Channel 0 to 78 | | | | | | | | |
| | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> |
| Number of Hopping Channel | Frequency Hopping Channel 0 to 78 | | | | | | | | |
| | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> |
| Dwell Time | Channel 39 | | | | | | | | |
| | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| Conducted Out of Band Emission | Channel 0 & 39 & 78 | | | | | | | | |
| | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> |
| Radiated Emissions | Channel 0 & 39 & 78 | | | | | | | | |
| | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> |
| Band Edge Measurements (Radiated) | Channel 0 & 78 | | | | | | | | |
| | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> |
| Remark: | | | | | | | | | |
| 1. The mark "☒" means is chosen for testing; | | | | | | | | | |
| 2. The mark "☐" means is not chosen for testing. | | | | | | | | | |


4.5 TEST SETUP

4.5.1 For Radiated Emissions test setup

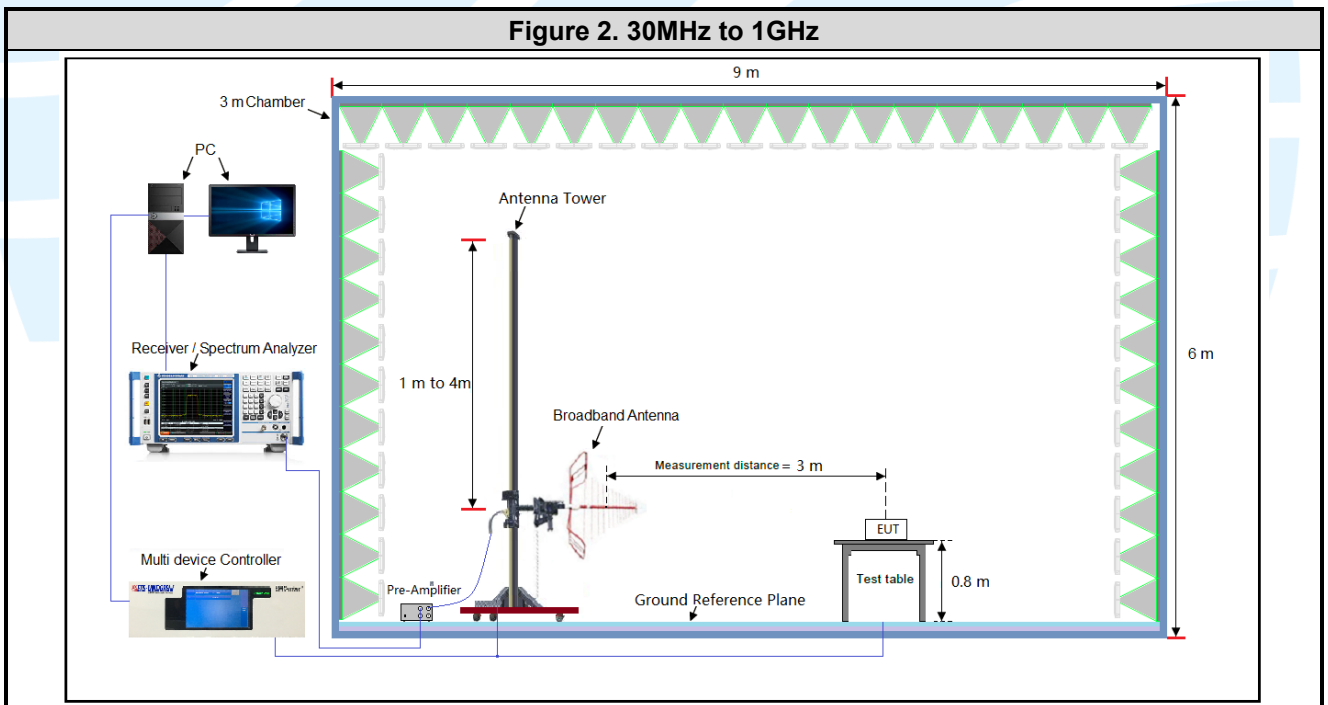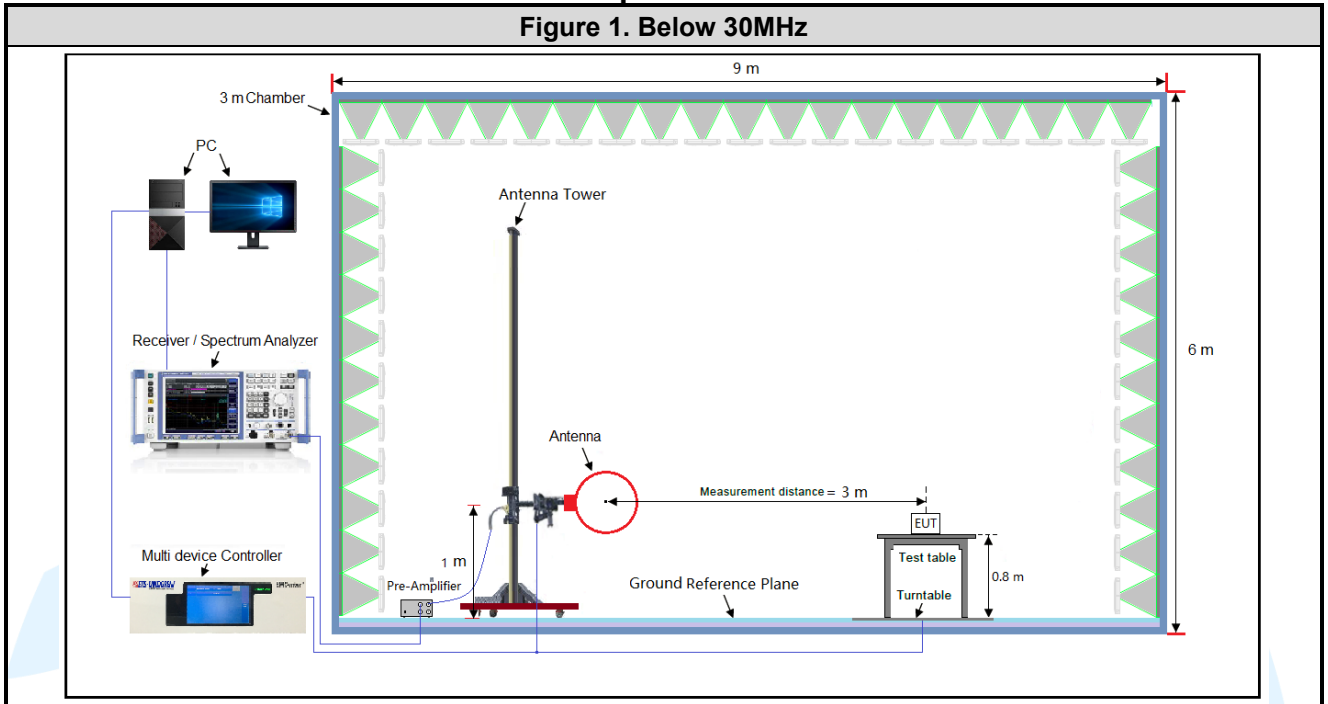


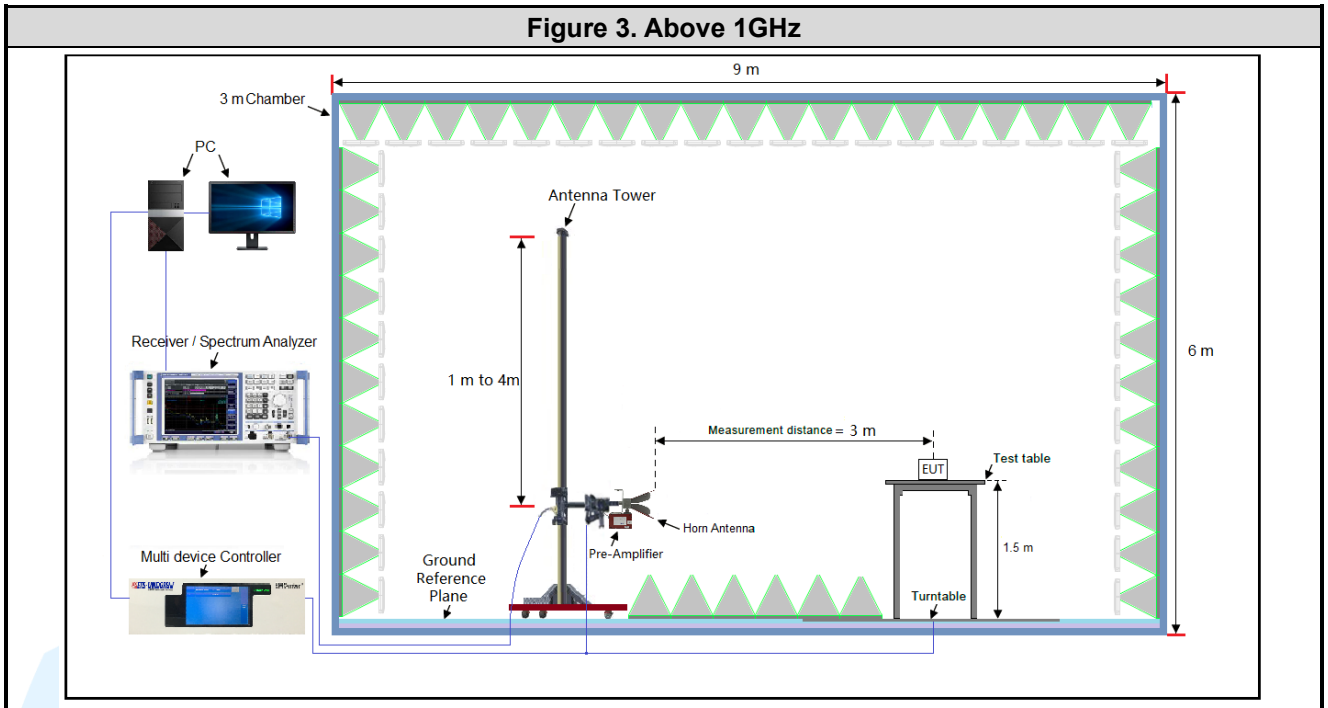

4.5.2 For Conducted Emissions test setup

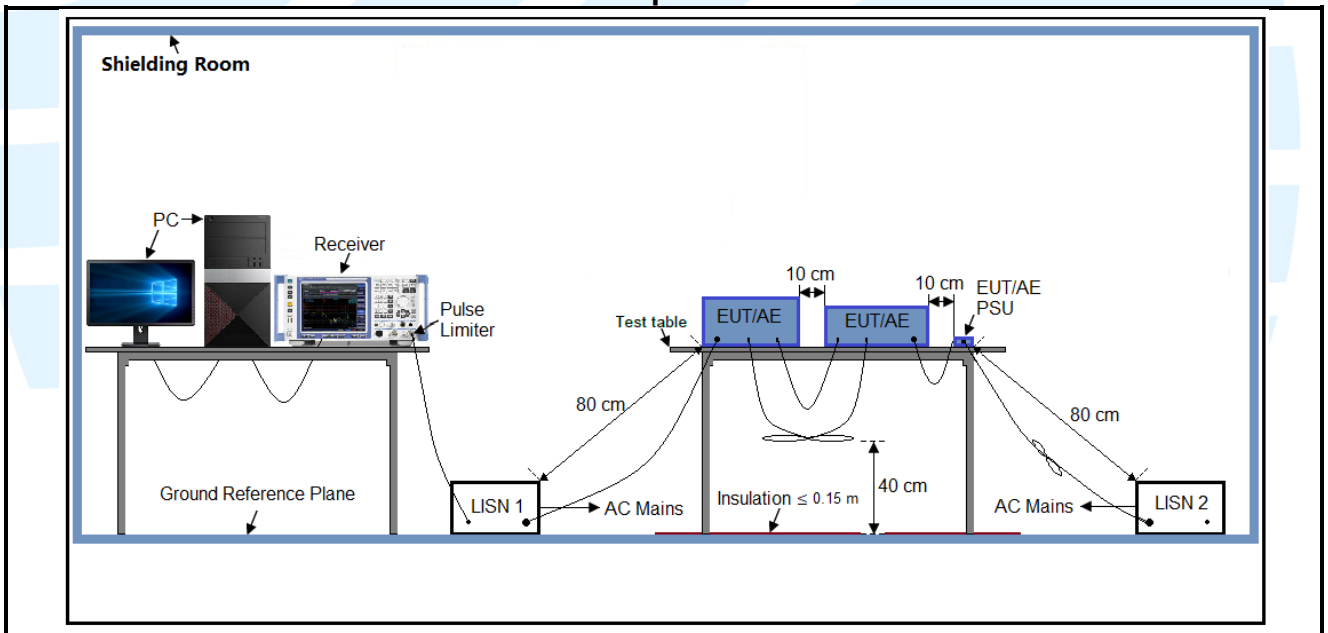

4.5.3 For Conducted RF test setup

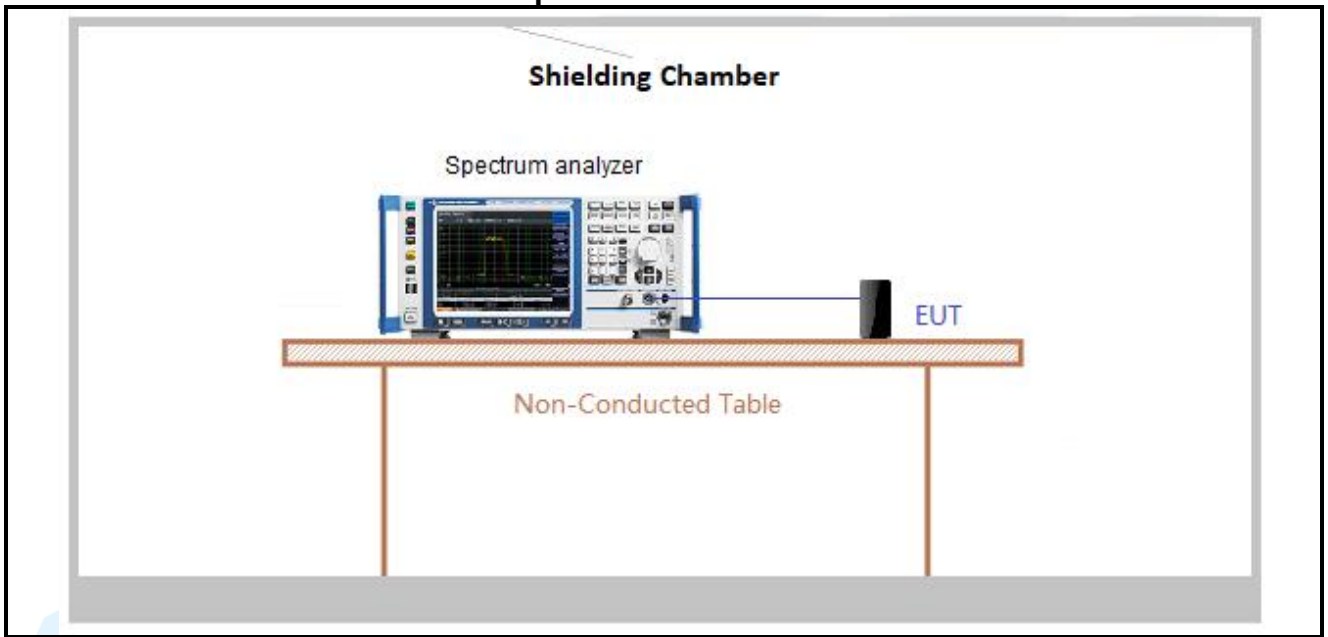

4.6 SYSTEM TEST CONFIGURATION

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, radiated emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario. It was powered by a 3.7V battery. Only the worst case data were recorded in this test report.

The signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance. Therefore, all final radiated testing was performed with the EUT in (see table below) orientation.

| Frequency | Mode | Antenna Port | Worst-case axis positioning |
|------------|------|--------------|-----------------------------|
| Above 1GHz | 1TX | Chain 0 | Y axis |

All readings are extrapolated back to the equivalent three-meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

4.7 DUTY CYCLE

Test Procedure: ANSI C63.10-2013 Clause 11.6.

Test Results


For Left earbud

| Modulation | On Time (msec) | Period (msec) | Duty Cycle (linear) | Duty Cycle (%) | Duty Cycle Factor (dB) | 1/T Minimum VBW (kHz) |
|------------|----------------|---------------|---------------------|----------------|------------------------|-----------------------|
| GFSK | 2.880 | 3.740 | 0.77 | 77.01 | 1.13 | 0.35 |

Remark:

- 1) Duty cycle= On Time/ Period;
- 2) Duty Cycle factor = 10 * log(1/ Duty cycle);
- 3) Average factor = 20 log₁₀ Duty Cycle.

The test plot as follows

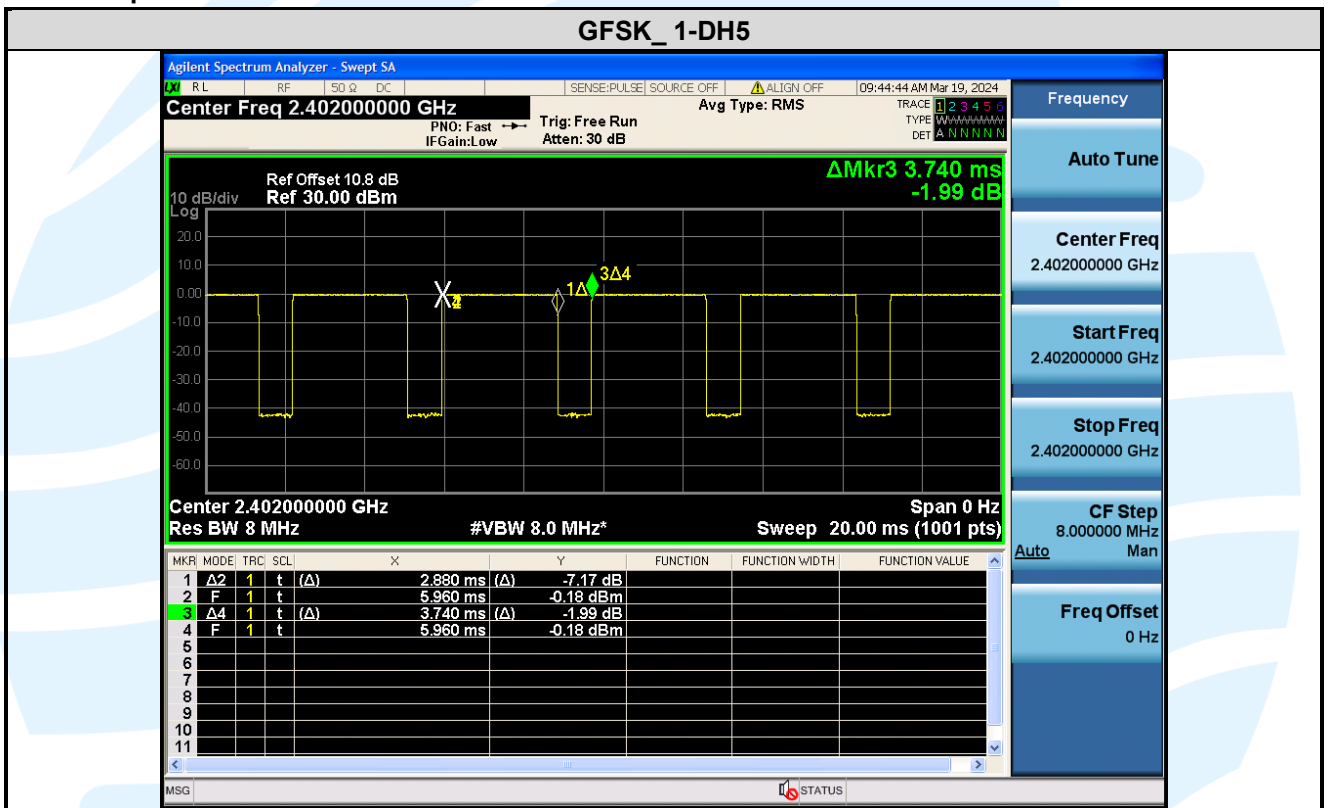


For Right earbud

| Modulation | On Time (msec) | Period (msec) | Duty Cycle (linear) | Duty Cycle (%) | Duty Cycle Factor (dB) | 1/T Minimum VBW (kHz) |
|------------|----------------|---------------|---------------------|----------------|------------------------|-----------------------|
| GFSK | 2.880 | 3.740 | 0.77 | 77.01 | 1.13 | 0.35 |

Remark:

- 1) Duty cycle= On Time/ Period;
- 2) Duty Cycle factor = 10 * log(1/ Duty cycle);
- 3) Average factor = 20 log₁₀ Duty Cycle.

The test plot as follows

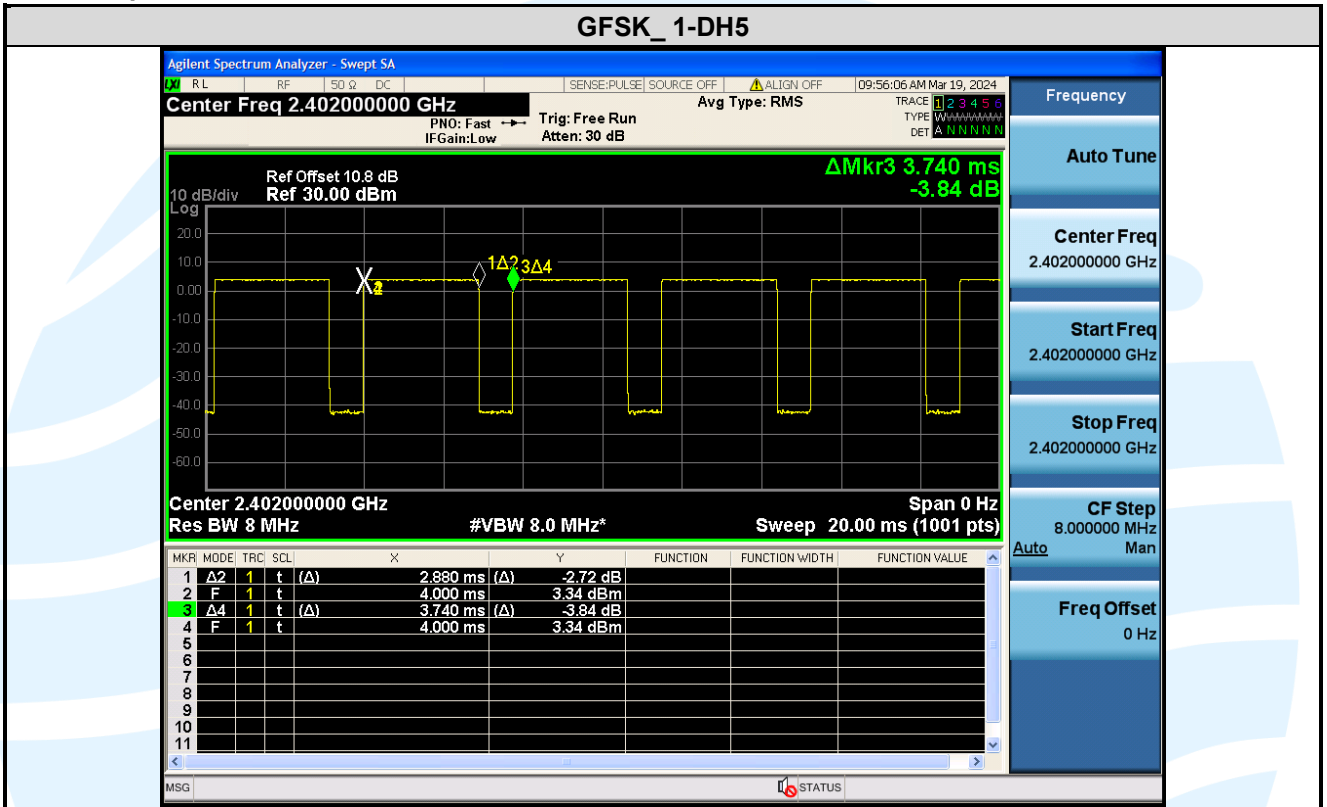

5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION

5.1 REFERENCE DOCUMENTS FOR TESTING

| No. | Identity | Document Title |
|-----|--|---|
| 1 | FCC 47 CFR Part 2 | Frequency allocations and radio treaty matters; general rules and regulations |
| 2 | FCC 47 CFR Part 15 | Radio Frequency Devices |
| 3 | RSS-247 Issue 3 | Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices |
| 4 | RSS-Gen Issue 5 | General Requirements for Compliance of Radio Apparatus |
| 5 | ANSI C63.10-2013 | American National Standard for Testing Unlicensed Wireless Devices |
| 6 | KDB 558074 D01 15.247 Meas Guidance v05r02 | Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules |

5.2 ANTENNA REQUIREMENT

| Standard Requirement |
|---|
| <p>15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> <p>RSS-Gen Issue 5, Section 6.8 requirement: According to RSS-Gen Issue 5, section 6.8, a transmitter can only be sold or operated with antennas with which it was certified. A transmitter may be certified with multiple antenna types. An antenna type comprises antennas having similar in-band and out-of-band radiation patterns.</p> |
| <p>EUT Antenna: Antenna in the interior of the equipment and no consideration of replacement. The gain of the antenna is Left earbud: -0.2dBi, Right earbud: -0.28dBi</p> |

5.3 CONDUCTED PEAK OUTPUT POWER

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.247 (b)(1)
 RSS-247 Issue 3, Section 5.4(b)

Test Method: ANSI C63.10-2013 Section 7.8.5

Limit: For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).
 FHSs shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, FHSs operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided that the systems operate with an output power no greater than 0.125 W.

Test Procedure: Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

- a) Use the following spectrum analyzer settings:
 - 1) Span: Approximately 5 x 20 dB bandwidth, centered on a hopping channel.
 - 2) RBW > 20 dB bandwidth of the emission being measured.
 - 3) VBW ≥ RBW.
 - 4) Sweep: Auto.
 - 5) Detector function: Peak.
 - 6) Trace: Max hold.
- b) Allow trace to stabilize.
- c) Use the marker-to-peak function to set the marker to the peak of the emission.
- d) The indicated level is the peak output power, after any corrections for external attenuators and cables.
- e) A plot of the test results and setup description shall be included in the test report.

Test Setup: Refer to section 4.5.3 for details.

Instruments Used: Refer to section 3 for details

Test Results: Pass

For Left earbud

| Modulation | Frequency | Max. Peak Power | Peak Power Limit | Max. ISED EIRP | ISED EIRP Limit | Max. Avg. Power | Result |
|------------|-----------|-----------------|------------------|----------------|-----------------|-----------------|--------|
| | (MHz) | (dBm) | (dBm) | (dBm) | (dBm) | (dBm) | |
| GFSK | 2402 | 0.36 | 20.97 | 0.16 | 36.02 | -1.44 | Pass |
| | 2441 | 1.12 | 20.97 | 0.92 | 36.02 | -0.63 | Pass |
| | 2480 | 1.11 | 20.97 | 0.91 | 36.02 | -0.41 | Pass |
| π/4DQPSK | 2402 | 1.10 | 20.97 | 0.9 | 36.02 | -2.76 | Pass |
| | 2441 | 1.67 | 20.97 | 1.47 | 36.02 | -1.81 | Pass |
| | 2480 | 1.55 | 20.97 | 1.35 | 36.02 | -1.45 | Pass |
| 8DPSK | 2402 | 1.28 | 20.97 | 1.08 | 36.02 | -2.75 | Pass |
| | 2441 | 1.84 | 20.97 | 1.64 | 36.02 | -1.84 | Pass |
| | 2480 | 1.66 | 20.97 | 1.45 | 36.02 | -1.45 | Pass |

Note: The maximum antenna gain is -0.2dBi less than 6dBi maximum permission antenna gain value based on 125 mW peak output power limit.

For Right earbud

| Modulation | Frequency | Max. Peak Power | Peak Power Limit | Max. ISED EIRP | ISED EIRP Limit | Max. Avg. Power | Result |
|---------------|-----------|-----------------|------------------|----------------|-----------------|-----------------|--------|
| | (MHz) | (dBm) | (dBm) | (dBm) | (dBm) | (dBm) | |
| GFSK | 2402 | 4.14 | 20.97 | 3.86 | 36.02 | 2.63 | Pass |
| | 2441 | 4.00 | 20.97 | 3.72 | 36.02 | 2.55 | Pass |
| | 2480 | 3.10 | 20.97 | 2.82 | 36.02 | 1.69 | Pass |
| π /4DQPSK | 2402 | 4.72 | 20.97 | 4.44 | 36.02 | 1.41 | Pass |
| | 2441 | 4.71 | 20.97 | 4.43 | 36.02 | 1.32 | Pass |
| | 2480 | 3.88 | 20.97 | 3.60 | 36.02 | 0.44 | Pass |
| 8DPSK | 2402 | 4.99 | 20.97 | 4.71 | 36.02 | 1.39 | Pass |
| | 2441 | 4.94 | 20.97 | 4.66 | 36.02 | 1.30 | Pass |
| | 2480 | 4.11 | 20.97 | 3.83 | 36.02 | 0.42 | Pass |

Note: The maximum antenna gain is -0.28dBi less than 6dBi maximum permission antenna gain value based on 125 mW peak output power limit.

5.4 20 DB BANDWIDTH & OCCUPIED BANDWIDTH

| | |
|--------------------------|---|
| | FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(1) |
| Test Requirement: | RSS-247 Issue 3, Section 5.1(a) RSS-Gen section 6.7 |
| Test Method: | ANSI C63.10-2013 Section 6.9.2 RSS-Gen section 6.7 |
| Limit: | None; for reporting purposes only. |
| Test Procedure: | Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer. Use the following spectrum analyzer settings: <ul style="list-style-type: none"> a) Span = approximately 2 to 5 times the OBW, centered on a hopping channel. b) RBW = 1% to 5% of the OBW. c) VBW ≥ 3 x RBW d) Sweep = auto; e) Detector function = peak f) Trace = max hold g) All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down bandwidth of the emission. |
| | Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset. |
| Test Setup: | Refer to section 4.5.3 for details. |
| Instruments Used: | Refer to section 3 for details |
| Test Mode: | Link mode |
| Test Results: | Please refer to Appendix A & B |

5.5 CARRIER FREQUENCIES SEPARATION

| | |
|--------------------------|---|
| Test Requirement: | FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(1) RSS-247 Issue 3, Section 5.1(b) |
| Test Method: | ANSI C63.10-2013 Section 7.8.2 |
| Limit: | Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. |
| Test Procedure: | Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer. Use the following spectrum analyzer settings: <ul style="list-style-type: none"> a) Span: Wide enough to capture the peaks of two adjacent channels. b) RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel. c) Video (or average) bandwidth (VBW) \geq RBW. d) Sweep: Auto. e) Detector function: Peak. f) Trace: Max hold. g) Allow the trace to stabilize. h) Use the marker-delta function to determine the separation between the peaks of the adjacent channels. <p>Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.</p> |
| Test Setup: | Refer to section 4.5.3 for details. |
| Instruments Used: | Refer to section 3 for details |
| Test Mode: | Link mode |
| Test Results: | Please refer to Appendix A & B |

5.6 NUMBER OF HOPPING CHANNEL

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.247(b)(1)
 RSS-247 Issue 3, Section 5.1(d)

Test Method: ANSI C63.10-2013 Section 7.8.3

Limit: Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.

Test Procedure: Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
 Use the following spectrum analyzer settings:

- a) Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- b) RBW < 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- c) VBW ≥ RBW.
- d) Sweep: Auto.
- e) Detector function: Peak.
- f) Trace: Max hold.
- g) Allow the trace to stabilize.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.5.3 for details.

Instruments Used: Refer to section 3 for details

Test Mode: Link mode

Test Results: Please refer to Appendix A & B

| Type of Modulation | Number of Hopping Channel |
|--------------------|---------------------------|
| GFSK | 79 |
| $\pi/4$ DQPSK | 79 |
| 8DPSK | 79 |

5.7 DWELL TIME

| | |
|--------------------------|---|
| Test Requirement: | FCC 47 CFR Part 15 Subpart C Section 15.247(a)(1) RSS-247 Issue 3, Section 5.1(d) |
| Test Method: | ANSI C63.10-2013 Section 7.8.4 |
| Limit: | Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. |
| Test Procedure: | <p>Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer. Use the following spectrum analyzer settings:</p> <ul style="list-style-type: none"> a) Span = zero span, centered on a hopping channel b) RBW shall be \leq channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel. c) Sweep = As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel. d) Detector function = peak e) Trace = max hold f) Use the marker-delta function to determine the dwell time <p>Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.</p> |
| Test Setup: | Refer to section 4.5.3 for details. |
| Instruments Used: | Refer to section 3 for details |
| Test Mode: | Link mode |
| Test Results: | Please refer to Appendix A & B |

5.8 CONDUCTED OUT OF BAND EMISSION

- Test Requirement:** FCC 47 CFR Part 15 Subpart C Section 15.247(d)
RSS-247 Issue 3, Section 5.5
- Test Method:** ANSI C63.10-2013 Section 6.10.4 & Section 7.8.8
- Limit:** In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.
- Test Procedure:** Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
Use the following spectrum analyzer settings:

Step 1: Measurement Procedure REF

- a) Set instrument center frequency to 2400 MHz or 2483.5 MHz.
- b) Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products that fall outside of the authorized band of operation.
- c) Set the RBW = 100 kHz.
- d) Set the VBW $\geq 3 \times$ RBW.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Sweep points $\geq 2 \times$ Span/RBW
- h) Trace mode = max hold.
- i) Allow the trace to stabilize.
- j) Set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge. Enable the marker-delta function, and then use the marker-to-peak function to move the marker to the peak of the in-band emission.

Step 2: Measurement Procedure OOBE

- a) Set RBW = 100 kHz.
- b) Set VBW ≥ 300 kHz.
- c) Detector = peak.
- d) Sweep = auto couple.
- e) Trace Mode = max hold.
- f) Allow trace to fully stabilize.
- g) Use the peak marker function to determine the maximum amplitude level.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

- Test Setup:** Refer to section 4.5.3 for details.
- Instruments Used:** Refer to section 3 for details
- Test Mode:** Hopping Frequencies Transmitter mode
- Test Results:** **Please refer to Appendix A & B**

5.9 RADIATED SPURIOUS EMISSIONS

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.205/15.209
RSS-Gen Issue 5, Section 6.13/8.9/8.10

Test Method: ANSI C63.10-2013 Section 6.3 & 6.5 & 6.6

Receiver Setup:

| Frequency | RBW |
|---------------------|-------------|
| 0.009 MHz-0.150 MHz | 200/300 kHz |
| 0.150 MHz -30 MHz | 9/10 kHz |
| 30 MHz-1 GHz | 100/120 kHz |
| Above 1 GHz | 1 MHz |

Limits:

Spurious Emissions

| Frequency | Field strength (microvolt/meter) | Limit (dBµV/m) | Remark | Measurement distance (m) |
|---------------------|----------------------------------|-----------------|------------|--------------------------|
| 0.009 MHz-0.490 MHz | 2400/F(kHz) | -- | -- | 300 |
| 0.490 MHz-1.705 MHz | 24000/F(kHz) | -- | -- | 30 |
| 1.705 MHz-30 MHz | 30 | -- | -- | 30 |
| 30 MHz-88 MHz | 100 | 40.0 | Quasi-peak | 3 |
| 88 MHz-216 MHz | 150 | 43.5 | Quasi-peak | 3 |
| 216 MHz-960 MHz | 200 | 46.0 | Quasi-peak | 3 |
| 960MHz-1GHz | 500 | 54.0 | Quasi-peak | 3 |
| Above 1 GHz | 500 | 54.0 | Average | 3 |

Remark:

- The lower limit shall apply at the transition frequencies.
- Emission level (dBuV/m) = 20 log Emission level (uV/m).
- For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

Test Setup: Refer to section 4.5.1 for details.

Test Procedures:

1. From 30 MHz to 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

2. Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

- 2) Test the EUT in the lowest channel ,middle channel, the Highest channel
- 3) The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the Y axis positioning which it is worse case.
- 4) Repeat above procedures until all frequencies measured was complete.

Equipment Used: Refer to section 3 for details.

Test Result: Pass

The measurement data as follows:

Radiated Emission Test Data (9 KHz ~ 30 MHz):


The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

For Left earbud


Radiated Emission Test Data (30 MHz ~ 1 GHz):

Worst-Case Configuration

Horizontal

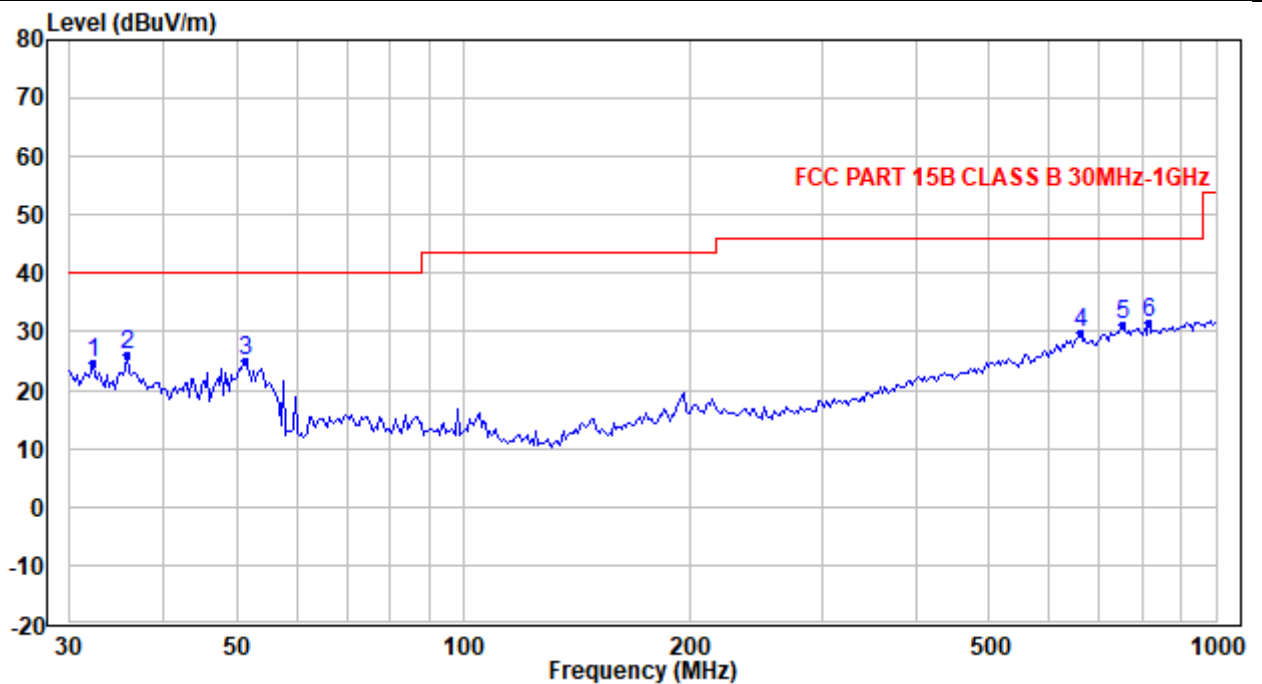

| No. | Frequency (MHz) | Reading (dB μ V/m) | Correction factor (dB/m) | Result (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Detector |
|-----|-----------------|------------------------|--------------------------|-----------------------|----------------------|-------------|----------|
| 1 | 32.184 | 31.02 | -6.18 | 24.84 | 40.00 | -15.16 | QP |
| 2 | 35.762 | 32.68 | -6.73 | 25.95 | 40.00 | -14.05 | QP |
| 3 | 51.176 | 39.02 | -14.01 | 25.01 | 40.00 | -14.99 | QP |
| 4 | 660.602 | 29.29 | 0.43 | 29.72 | 46.00 | -16.28 | QP |
| 5 | 749.676 | 29.11 | 2.08 | 31.19 | 46.00 | -14.81 | QP |
| 6 | 815.635 | 28.23 | 3.45 | 31.68 | 46.00 | -14.32 | QP |

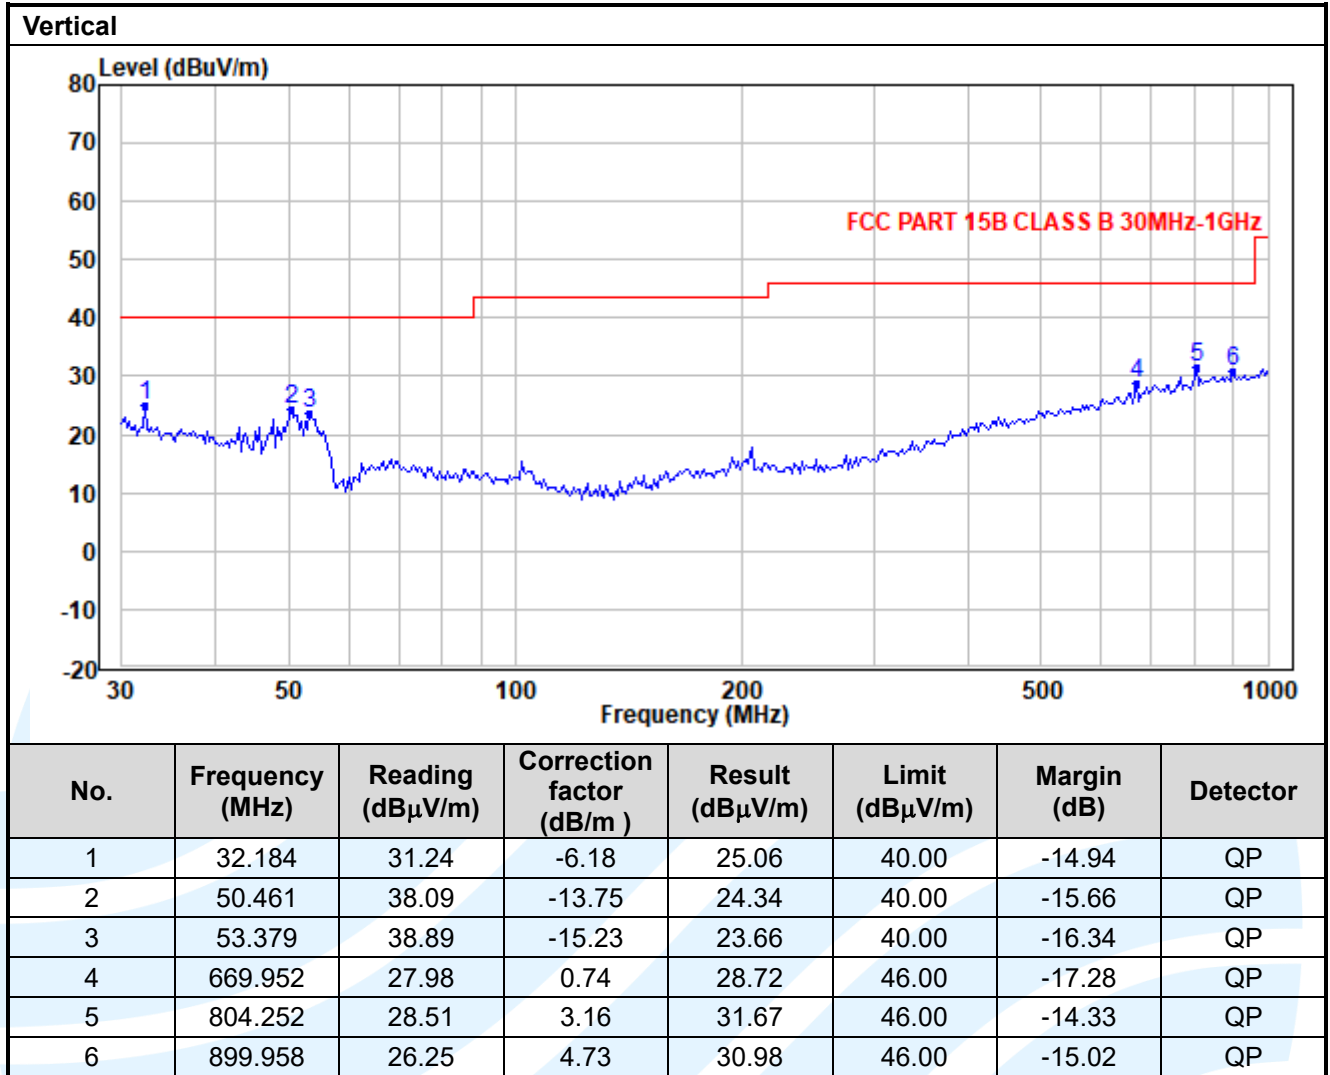

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com


<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

For Right Earbuds

Radiated Emission Test Data (30 MHz ~ 1 GHz):
Worst-Case Configuration

Horizontal

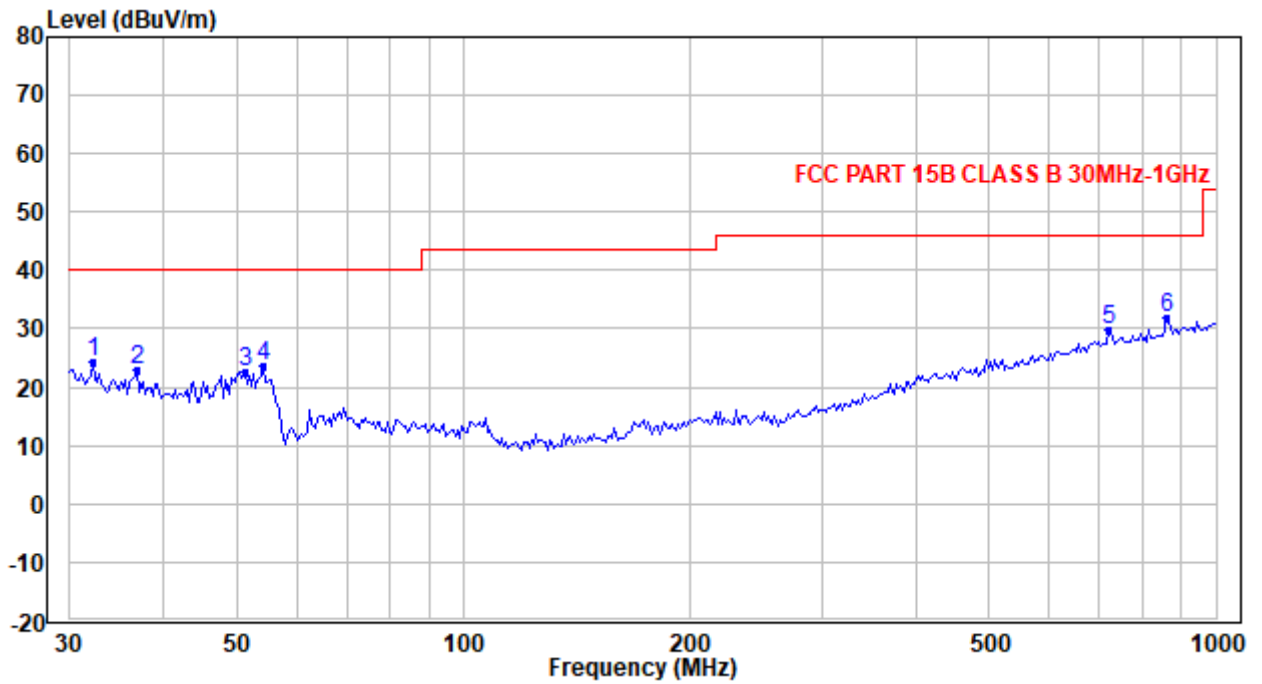

| No. | Frequency (MHz) | Reading (dB μ V/m) | Correction factor (dB/m) | Result (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Detector |
|-----|-----------------|------------------------|--------------------------|-----------------------|----------------------|-------------|----------|
| 1 | 32.184 | 30.60 | -6.18 | 24.42 | 40.00 | -15.58 | QP |
| 2 | 36.781 | 29.90 | -6.93 | 22.97 | 40.00 | -17.03 | QP |
| 3 | 51.176 | 36.61 | -14.01 | 22.60 | 40.00 | -17.40 | QP |
| 4 | 54.135 | 39.43 | -15.87 | 23.56 | 40.00 | -16.44 | QP |
| 5 | 718.725 | 27.77 | 1.92 | 29.69 | 46.00 | -16.31 | QP |
| 6 | 862.802 | 27.62 | 4.15 | 31.77 | 46.00 | -14.23 | QP |

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

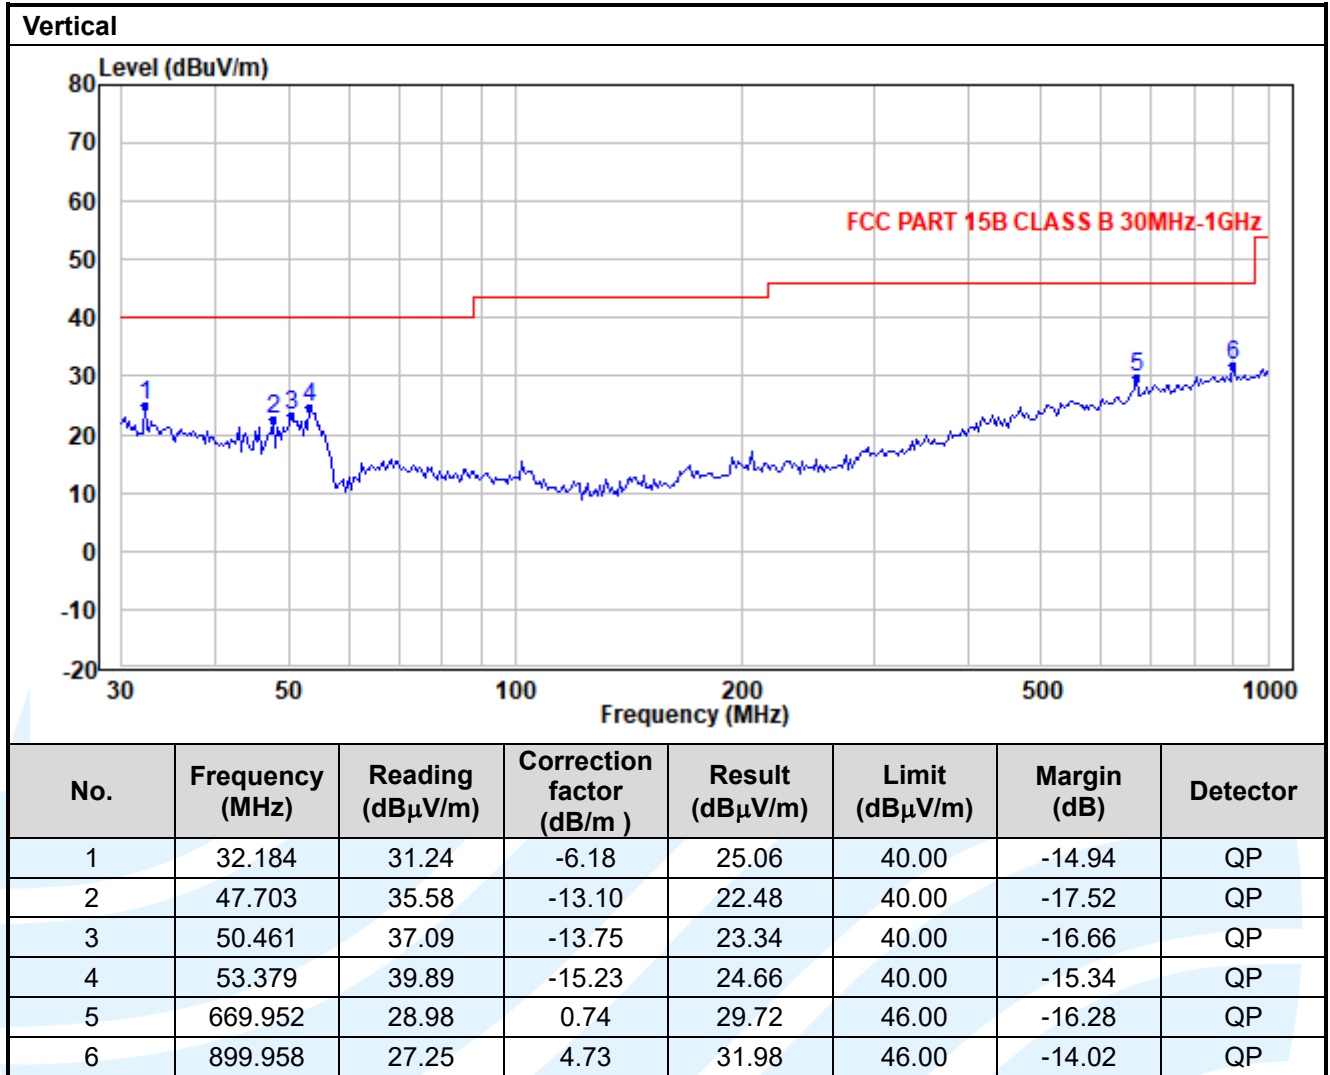

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

For Left earbud

| Radiated Emission Test Data (Above 1GHz): | | | | | | | | |
|---|-----------------|----------------|--------------------------|-----------------|----------------|-------------|----------|-----------------|
| Lowest Channel: | | | | | | | | |
| No. | Frequency (MHz) | Reading (dBµV) | Correction factor (dB/m) | Result (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Detector | Antenna Polaxis |
| 1 | 4804 | 35.56 | -2.08 | 33.48 | 54.00 | -20.52 | Average | Horizontal |
| 2 | 4804 | 47.24 | -2.08 | 45.16 | 74.00 | -28.84 | Peak | Horizontal |
| 3 | 7206 | 35.29 | 1.30 | 36.59 | 54.00 | -17.41 | Average | Horizontal |
| 4 | 7206 | 48.01 | 1.30 | 49.31 | 74.00 | -24.69 | Peak | Horizontal |
| 5 | 4804 | 34.18 | -2.08 | 32.10 | 54.00 | -21.90 | Average | Vertical |
| 6 | 4804 | 45.06 | -2.08 | 42.98 | 74.00 | -31.02 | Peak | Vertical |
| 7 | 7206 | 35.16 | 1.30 | 36.46 | 54.00 | -17.54 | Average | Vertical |
| 8 | 7206 | 47.13 | 1.30 | 48.43 | 74.00 | -25.57 | Peak | Vertical |
| Middle Channel: | | | | | | | | |
| 1 | 4882 | 35.54 | -2.05 | 33.49 | 54.00 | -20.51 | Average | Horizontal |
| 2 | 4882 | 47.65 | -2.05 | 45.60 | 74.00 | -28.40 | Peak | Horizontal |
| 3 | 7323 | 35.29 | 1.31 | 36.60 | 54.00 | -17.40 | Average | Horizontal |
| 4 | 7323 | 47.79 | 1.31 | 49.10 | 74.00 | -24.90 | Peak | Horizontal |
| 5 | 4882 | 34.54 | -2.05 | 32.49 | 54.00 | -21.51 | Average | Vertical |
| 6 | 4882 | 46.81 | -2.05 | 44.76 | 74.00 | -29.24 | Peak | Vertical |
| 7 | 7323 | 35.17 | 1.31 | 36.48 | 54.00 | -17.52 | Average | Vertical |
| 8 | 7323 | 47.20 | 1.31 | 48.51 | 74.00 | -25.49 | Peak | Vertical |
| Highest Channel: | | | | | | | | |
| 1 | 4960 | 35.56 | -2.02 | 33.54 | 54.00 | -20.46 | Average | Horizontal |
| 2 | 4960 | 47.15 | -2.02 | 45.13 | 74.00 | -28.87 | Peak | Horizontal |
| 3 | 7440 | 35.17 | 1.32 | 36.49 | 54.00 | -17.51 | Average | Horizontal |
| 4 | 7440 | 47.73 | 1.32 | 49.05 | 74.00 | -24.95 | Peak | Horizontal |
| 5 | 4960 | 35.73 | -2.02 | 33.71 | 54.00 | -20.29 | Average | Vertical |
| 6 | 4960 | 48.52 | -2.02 | 46.50 | 74.00 | -27.50 | Peak | Vertical |
| 7 | 7440 | 34.94 | 1.32 | 36.26 | 54.00 | -17.74 | Average | Vertical |
| 8 | 7440 | 46.62 | 1.32 | 47.94 | 74.00 | -26.06 | Peak | Vertical |

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

For Right Earbuds

| Radiated Emission Test Data (Above 1GHz): | | | | | | | | |
|---|-----------------|----------------|--------------------------|-----------------|----------------|-------------|----------|-----------------|
| Lowest Channel: | | | | | | | | |
| No. | Frequency (MHz) | Reading (dBµV) | Correction factor (dB/m) | Result (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Detector | Antenna Polaxis |
| 1 | 4804 | 35.71 | -2.08 | 33.63 | 54.00 | -20.37 | Average | Horizontal |
| 2 | 4804 | 47.20 | -2.08 | 45.12 | 74.00 | -28.88 | Peak | Horizontal |
| 3 | 7206 | 35.36 | 1.30 | 36.66 | 54.00 | -17.34 | Average | Horizontal |
| 4 | 7206 | 47.77 | 1.30 | 49.07 | 74.00 | -24.93 | Peak | Horizontal |
| 5 | 4804 | 35.59 | -2.08 | 33.51 | 54.00 | -20.49 | Average | Vertical |
| 6 | 4804 | 46.88 | -2.08 | 44.80 | 74.00 | -29.20 | Peak | Vertical |
| 7 | 7206 | 34.98 | 1.30 | 36.28 | 54.00 | -17.72 | Average | Vertical |
| 8 | 7206 | 47.01 | 1.30 | 48.31 | 74.00 | -25.69 | Peak | Vertical |
| Middle Channel: | | | | | | | | |
| 1 | 4882 | 35.54 | -2.05 | 33.49 | 54.00 | -20.51 | Average | Horizontal |
| 2 | 4882 | 46.63 | -2.05 | 44.58 | 74.00 | -29.42 | Peak | Horizontal |
| 3 | 7323 | 35.41 | 1.31 | 36.72 | 54.00 | -17.28 | Average | Horizontal |
| 4 | 7323 | 47.47 | 1.31 | 48.78 | 74.00 | -25.22 | Peak | Horizontal |
| 5 | 4882 | 35.57 | -2.05 | 33.52 | 54.00 | -20.48 | Average | Vertical |
| 6 | 4882 | 47.13 | -2.05 | 45.08 | 74.00 | -28.92 | Peak | Vertical |
| 7 | 7323 | 35.12 | 1.31 | 36.43 | 54.00 | -17.57 | Average | Vertical |
| 8 | 7323 | 47.63 | 1.31 | 48.94 | 74.00 | -25.06 | Peak | Vertical |
| Highest Channel: | | | | | | | | |
| 1 | 4960 | 35.39 | -2.02 | 33.37 | 54.00 | -20.63 | Average | Horizontal |
| 2 | 4960 | 46.59 | -2.02 | 44.57 | 74.00 | -29.43 | Peak | Horizontal |
| 3 | 7440 | 34.99 | 1.32 | 36.31 | 54.00 | -17.69 | Average | Horizontal |
| 4 | 7440 | 47.88 | 1.32 | 49.20 | 74.00 | -24.80 | Peak | Horizontal |
| 5 | 4960 | 35.46 | -2.02 | 33.44 | 54.00 | -20.56 | Average | Vertical |
| 6 | 4960 | 47.22 | -2.02 | 45.20 | 74.00 | -28.80 | Peak | Vertical |
| 7 | 7440 | 34.70 | 1.32 | 36.02 | 54.00 | -17.98 | Average | Vertical |
| 8 | 7440 | 46.93 | 1.32 | 48.25 | 74.00 | -25.75 | Peak | Vertical |

Remark:

1. Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Result – Limit

5.10 BAND EDGE MEASUREMENTS (RADIATED)

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.205/15.209
RSS-247 Issue 3, Section 5.5

Test Method: ANSI C63.10-2013 Section 6.10.5

Limits:

Radiated emissions which fall in the restricted bands, as defined in section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a).

| Frequency | Limit (dBµV/m @3m) | Remark |
|-----------------|--------------------|------------------|
| 30 MHz-88 MHz | 40.0 | Quasi-peak Value |
| 88 MHz-216 MHz | 43.5 | Quasi-peak Value |
| 216 MHz-960 MHz | 46.0 | Quasi-peak Value |
| 960 MHz-1 GHz | 54.0 | Quasi-peak Value |
| Above 1 GHz | 54.0 | Average Value |
| | 74.0 | Peak Value |

Test Setup: Refer to section 4.5.1 for details.

Test Procedures:

Radiated band edge measurements at 2390 MHz and 2483.5 MHz were made with the unit transmitting in the low end of the channel range and the high end closest to the restricted bands respectively. The emissions were made on the 966 Semi-Chamber. Use (resolution bandwidth (RBW) = 1 MHz, video bandwidth (VBW) = 3 MHz for peak levels and RBW = 1 MHz and VBW = 10 Hz or 1/T for average levels).



1. Use radiated spurious emission test procedure described in clause 5.10. The transmitter output (antenna port) was connected to the test receiver.
2. Set the PK and AV limit line.
3. Record the fundamental emission and emissions out of the band-edge.
4. Determine band-edge compliance as required.

Equipment Used: Refer to section 3 for details.

Test Result: Pass

The measurement data as follows:

For Left Earbuds

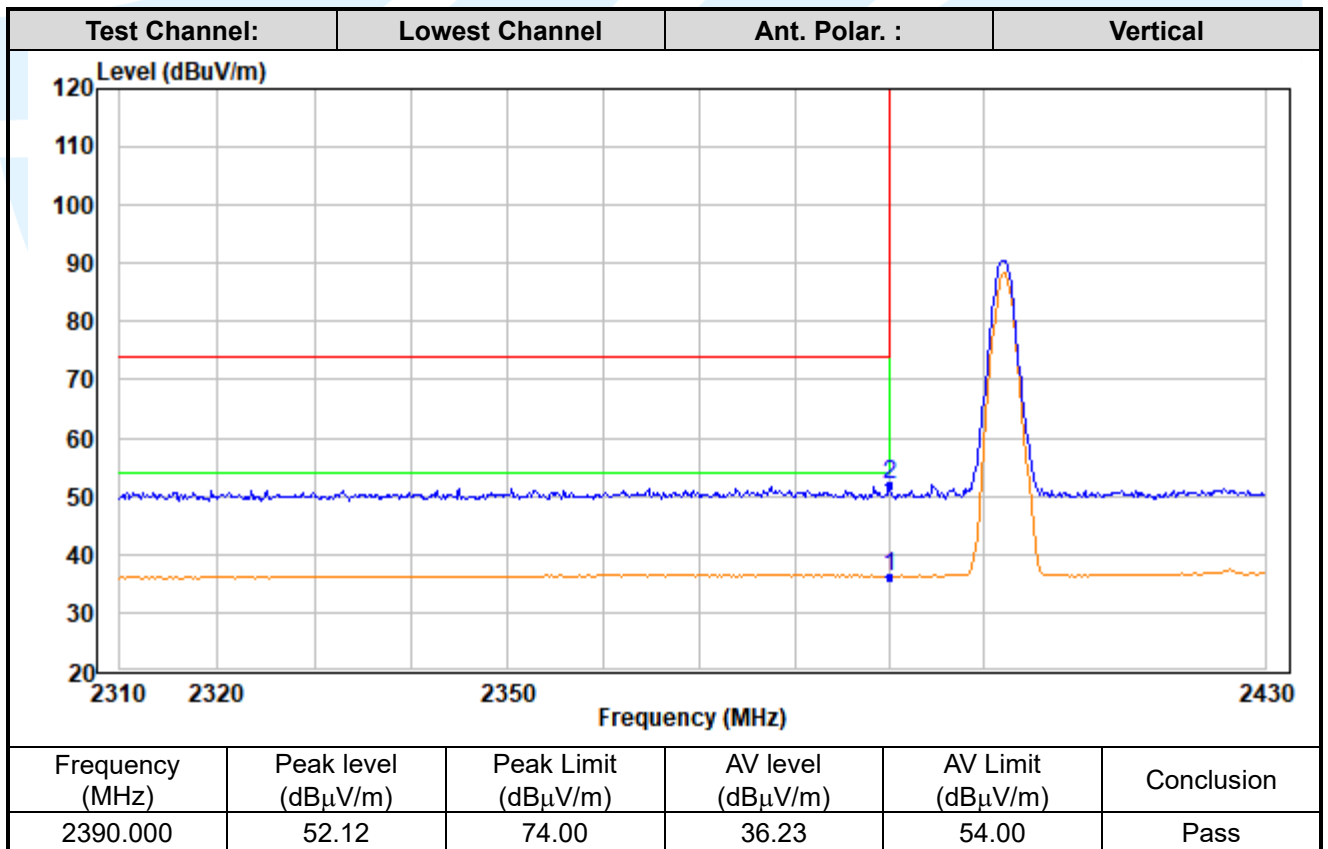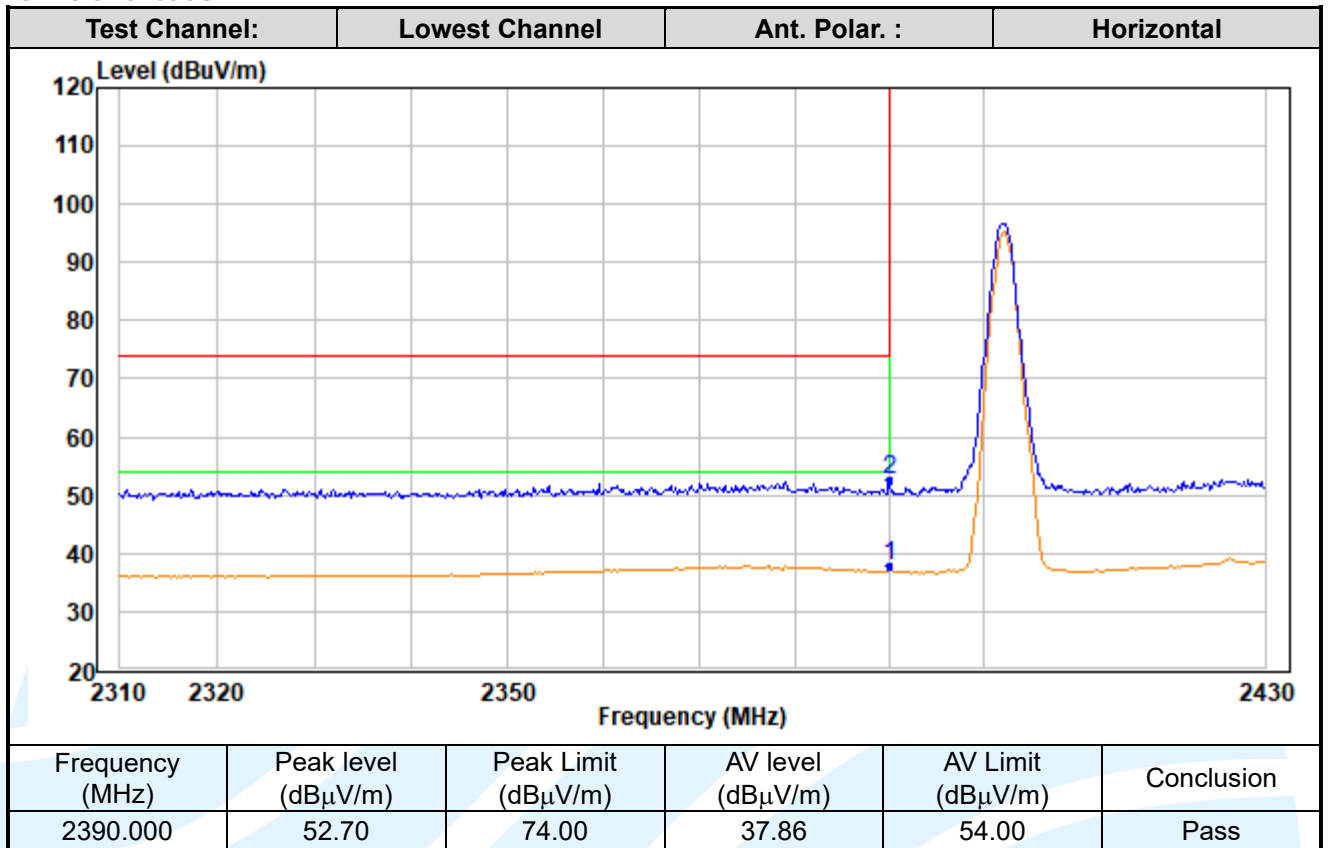

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China



Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

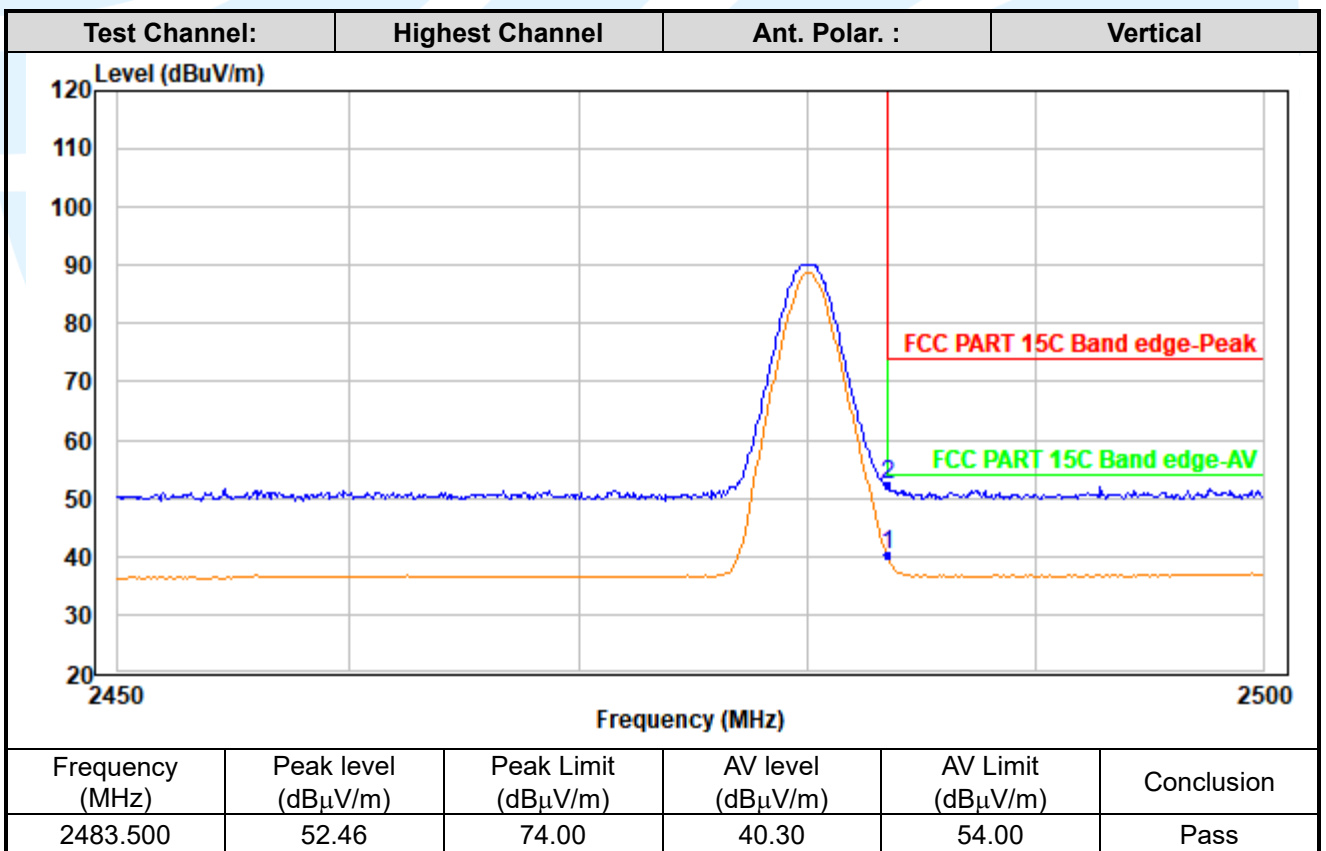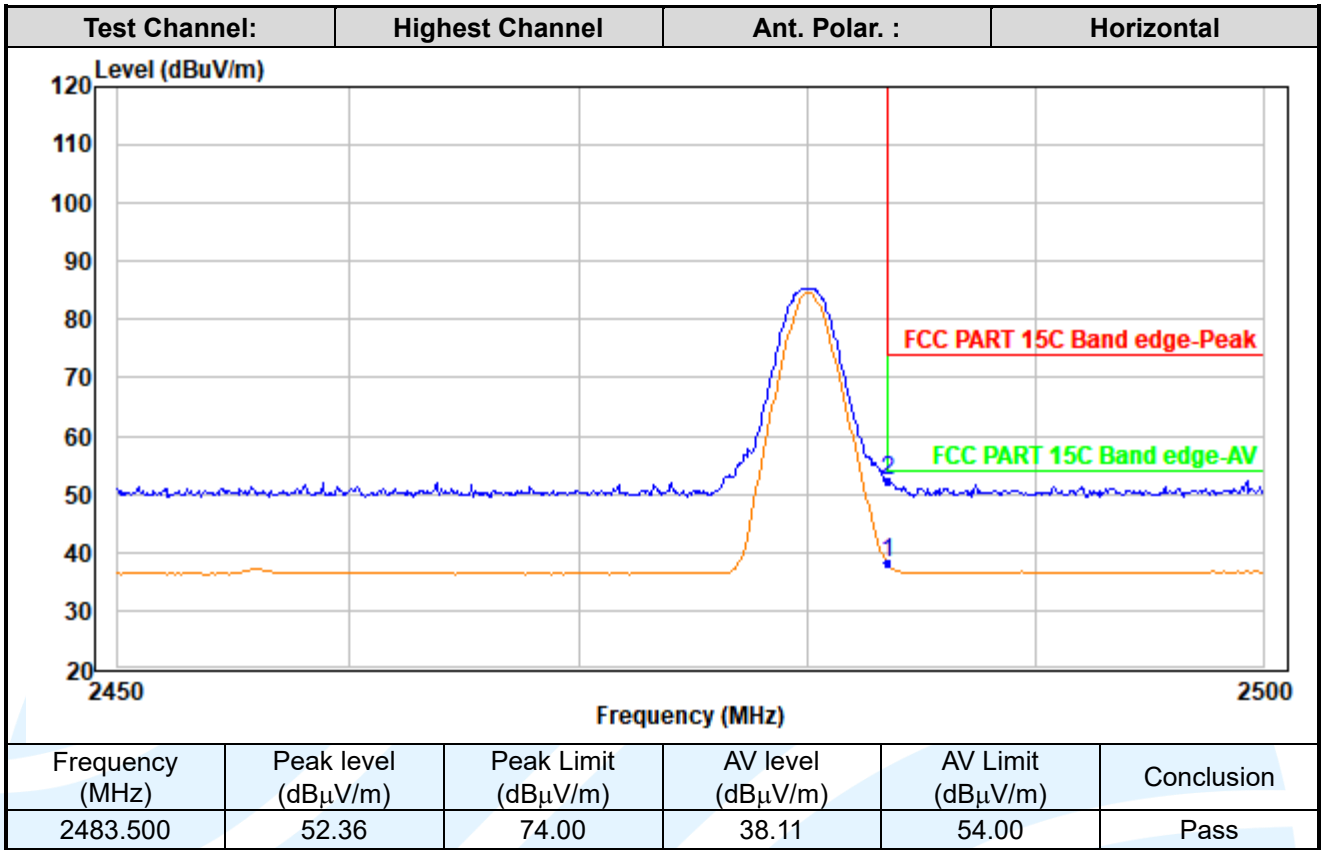

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888



Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

For Right Earbuds

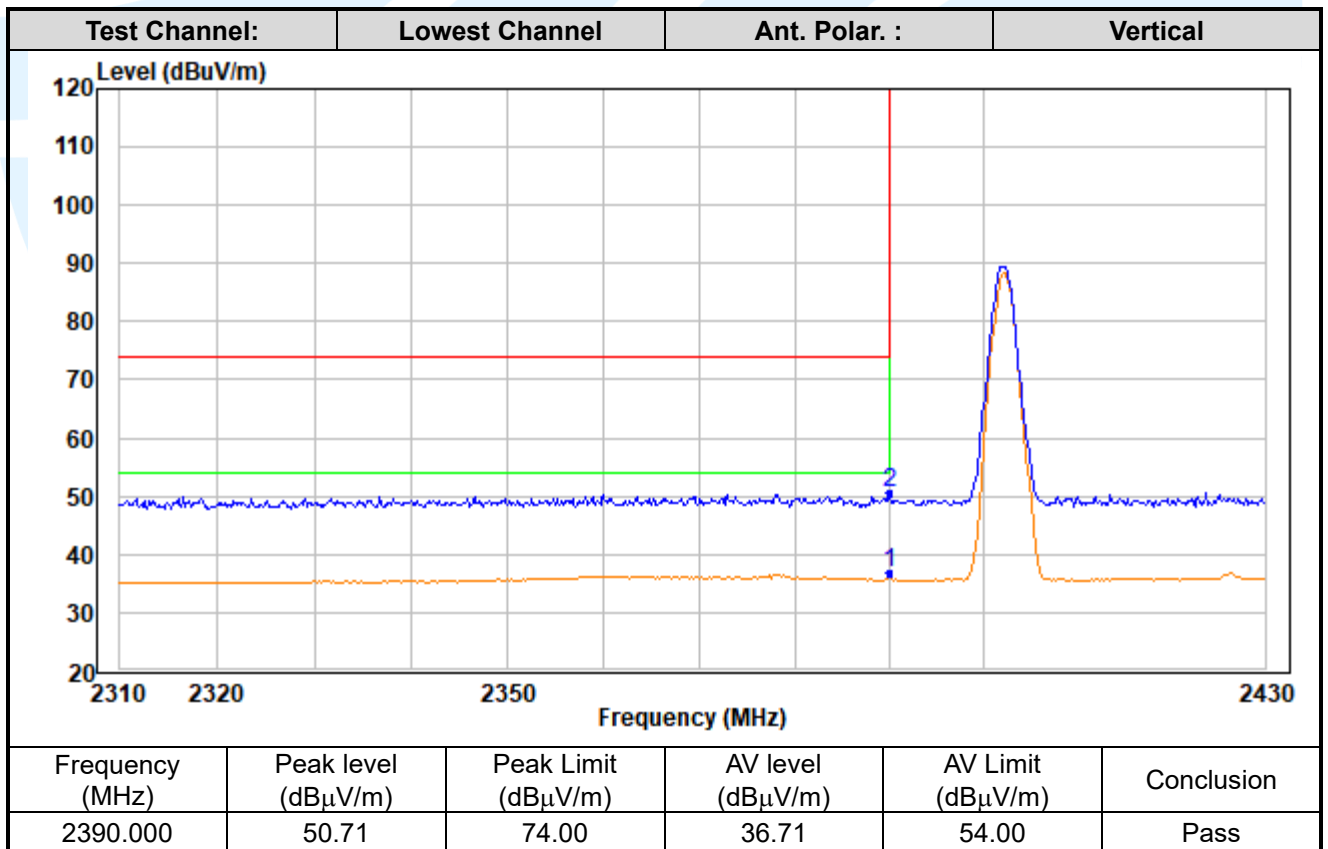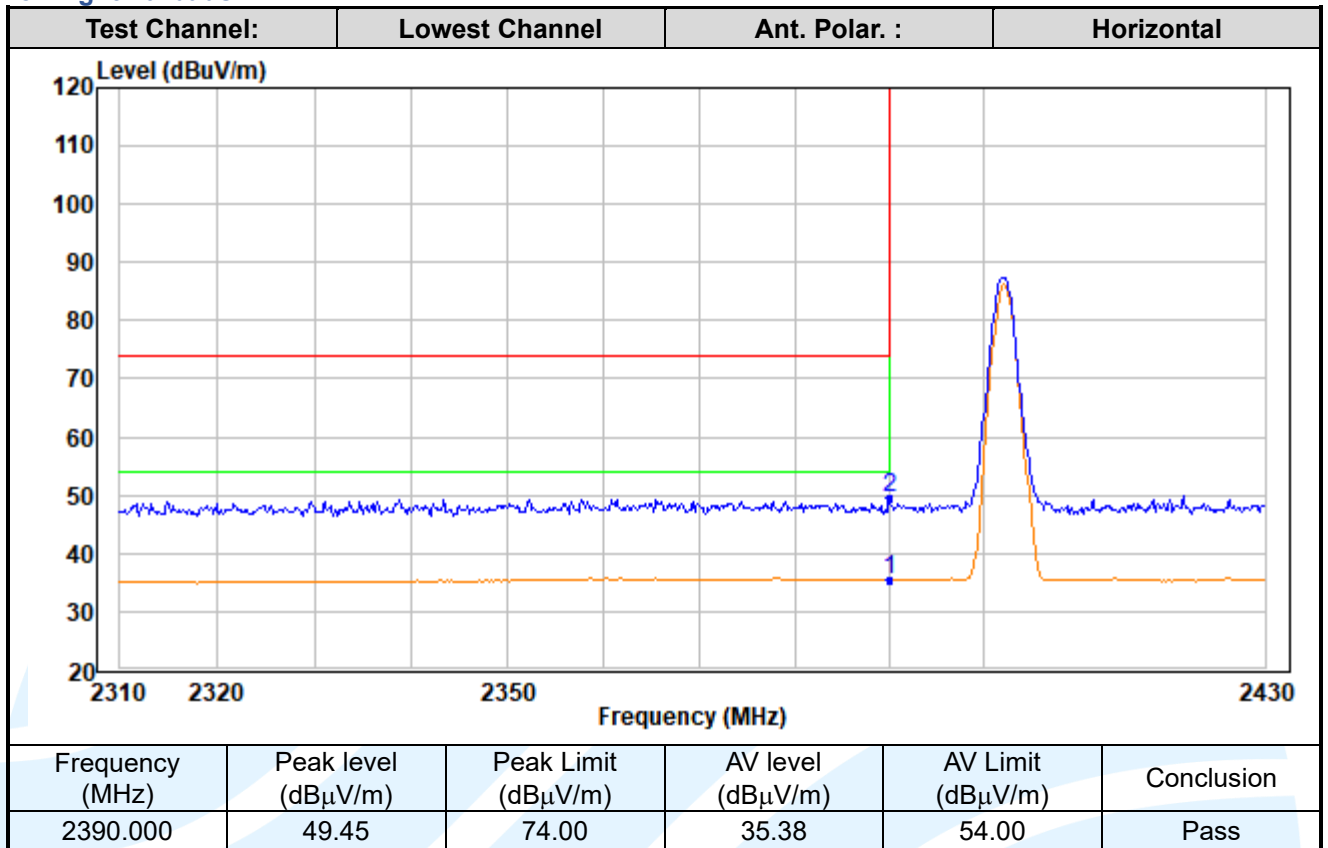

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China



Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

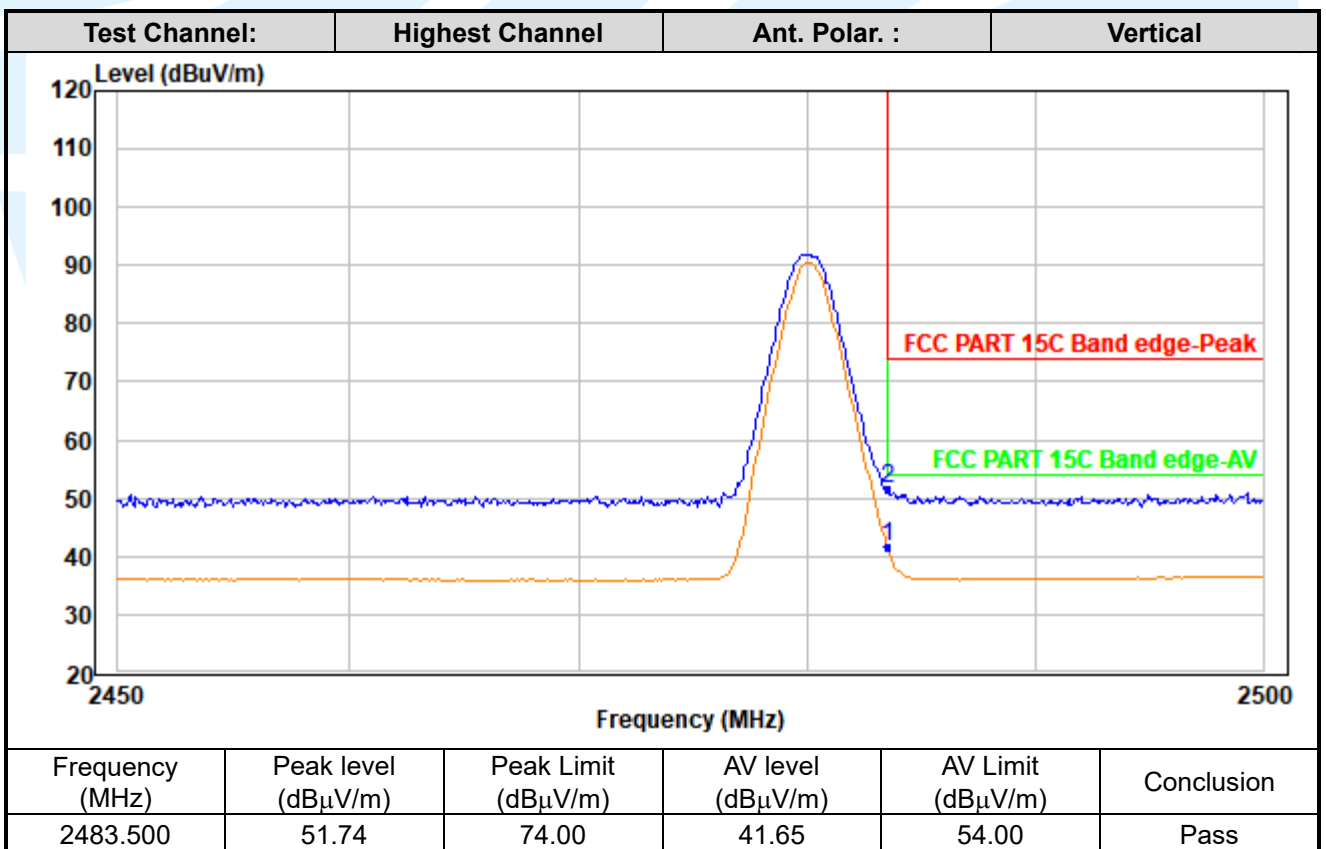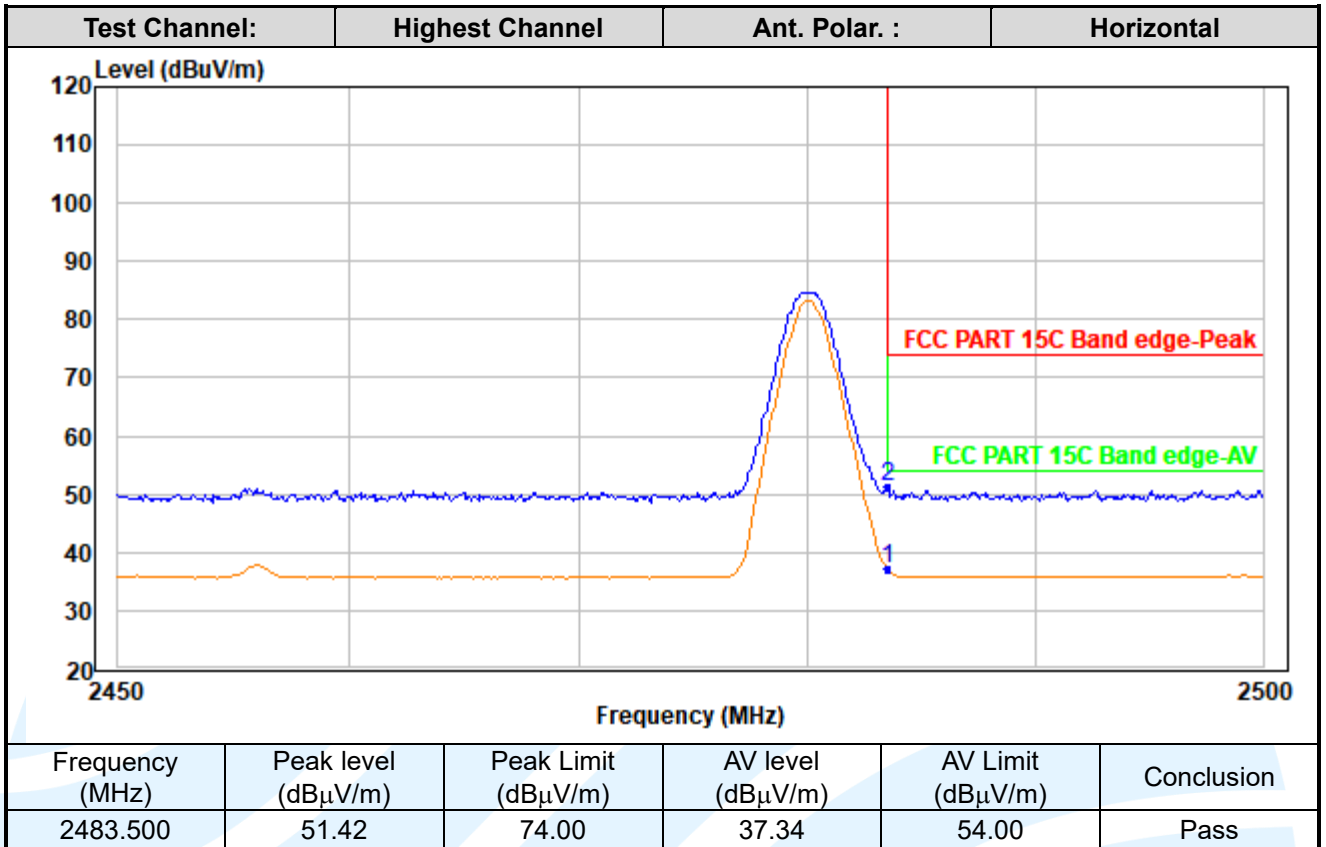

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1


APPENDIX A RF TEST DATA_ FOR LEFT EARBUD

A.1 99% BANDWIDTH


| Modulation | Channel | 99% BW (MHz) |
|---------------|---------|--------------|
| GFSK | 0 | 0.85823 |
| | 39 | 0.88213 |
| | 78 | 0.89493 |
| $\pi/4$ DQPSK | 0 | 1.1947 |
| | 39 | 1.2106 |
| | 78 | 1.2286 |
| 8DPSK | 0 | 1.1967 |
| | 39 | 1.2211 |
| | 78 | 1.2268 |

Test Graphs




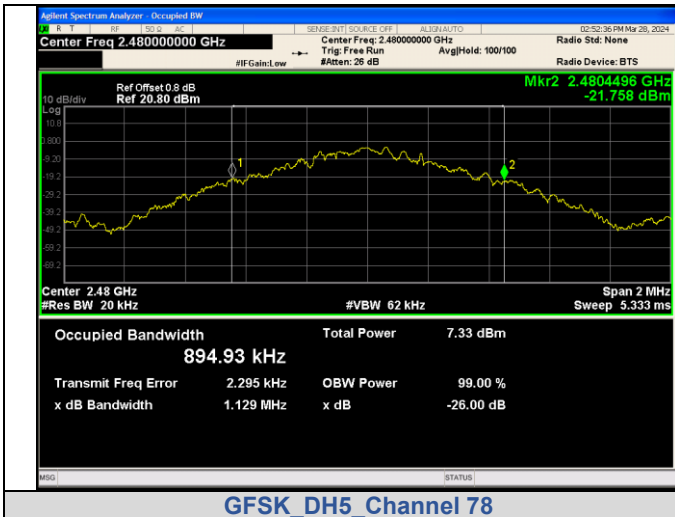


GFSK_DH5_Channel 78

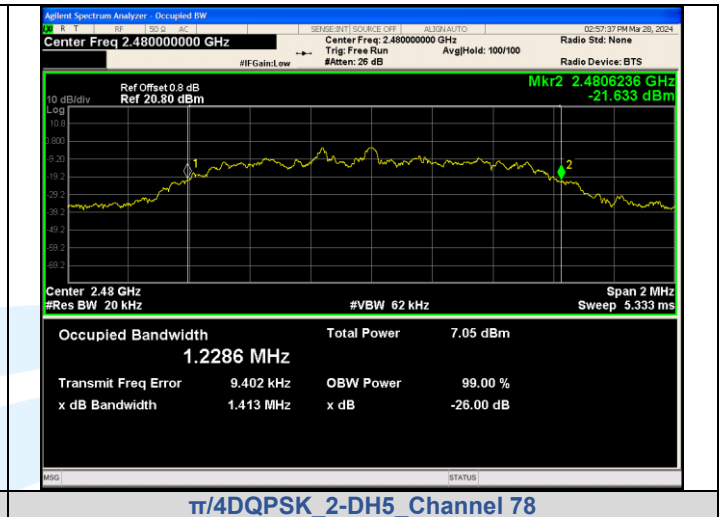


$\pi/4$ DQPSK_2-DH5_Channel 78

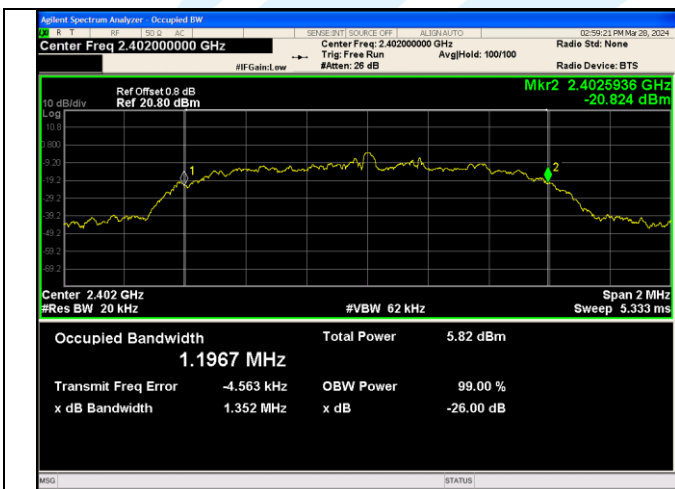

8DPSK_3-DH5_Channel 0

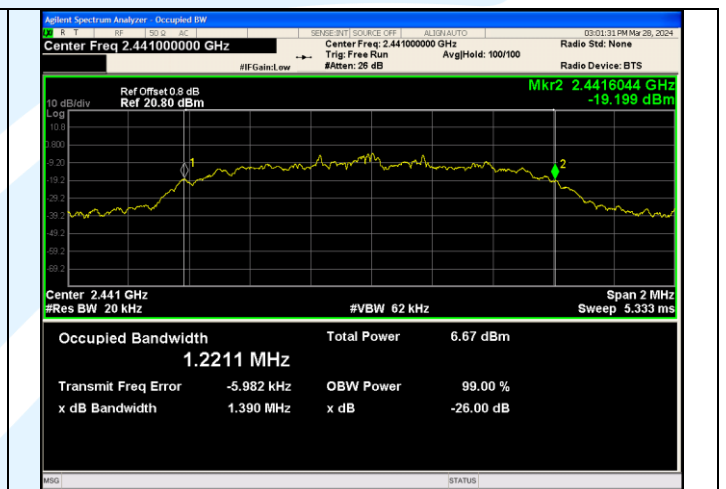

8DPSK_3-DH5_Channel 39

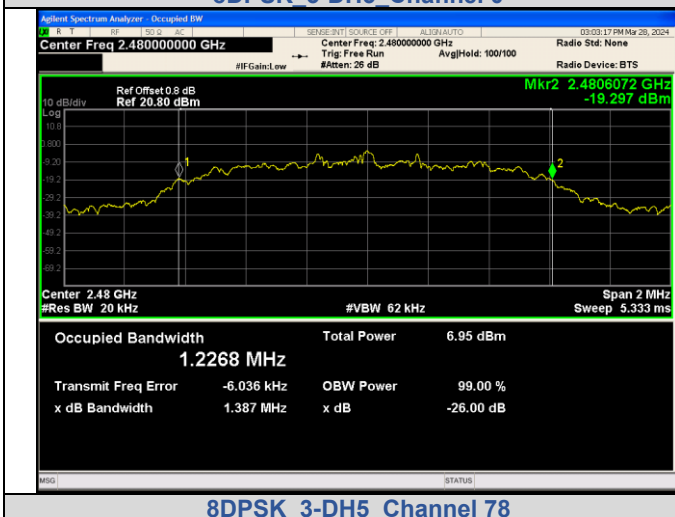


8DPSK_3-DH5_Channel 78

A.2 20DB BANDWIDTH


| Modulation | Channel | Center Frequency (MHz) | 20 dB Bandwidth (MHz) |
|---------------|---------|------------------------|-----------------------|
| GFSK | 0 | 2402 MHz | 0.9523 |
| | 39 | 2441 MHz | 0.9538 |
| | 78 | 2480 MHz | 1.011 |
| π /4DQPSK | 0 | 2402 MHz | 1.281 |
| | 39 | 2441 MHz | 1.307 |
| | 78 | 2480 MHz | 1.339 |
| 8DPSK | 0 | 2402 MHz | 1.293 |
| | 39 | 2441 MHz | 1.298 |
| | 78 | 2480 MHz | 1.299 |

Test Graphs




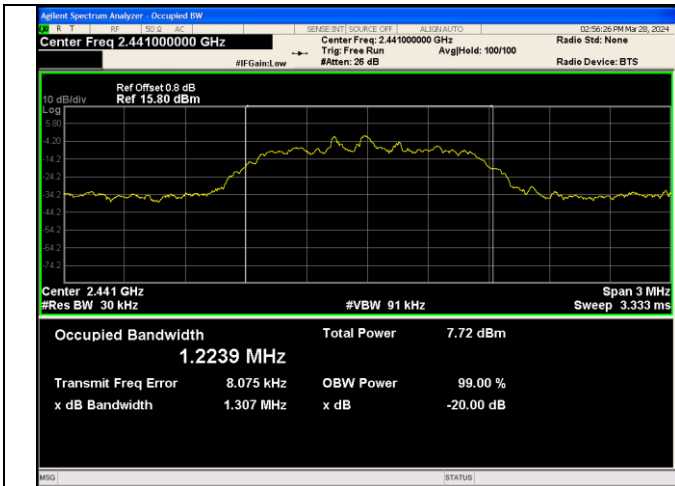


$\pi/4$ DQPSK 2-DH5 Channel 39

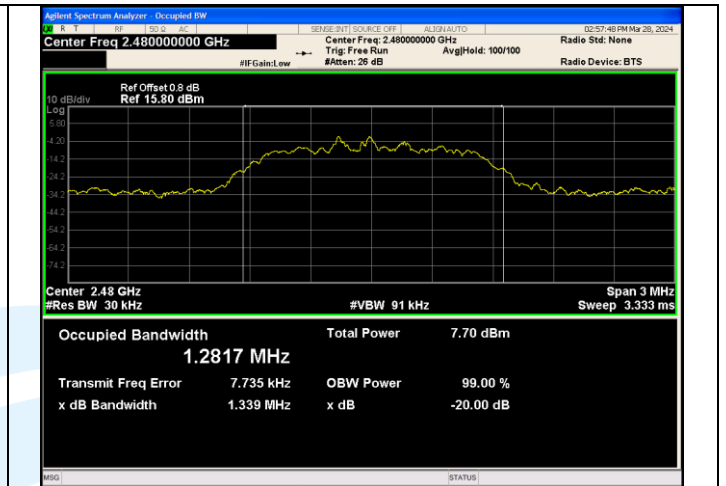


$\pi/4$ DQPSK 2-DH5 Channel 78

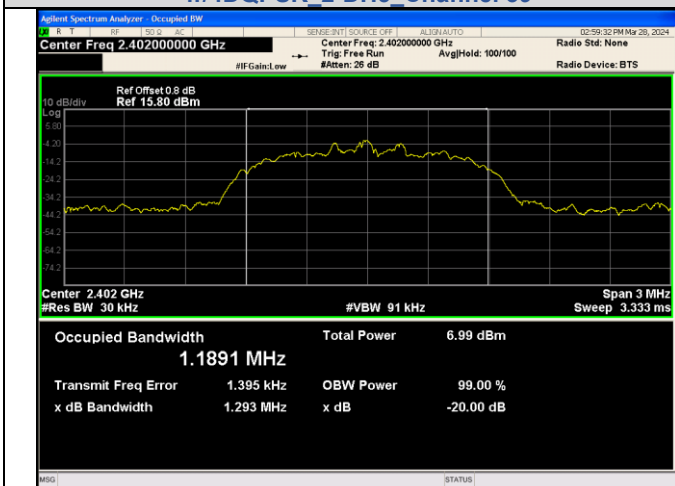

8DPSK 3-DH5 Channel 0

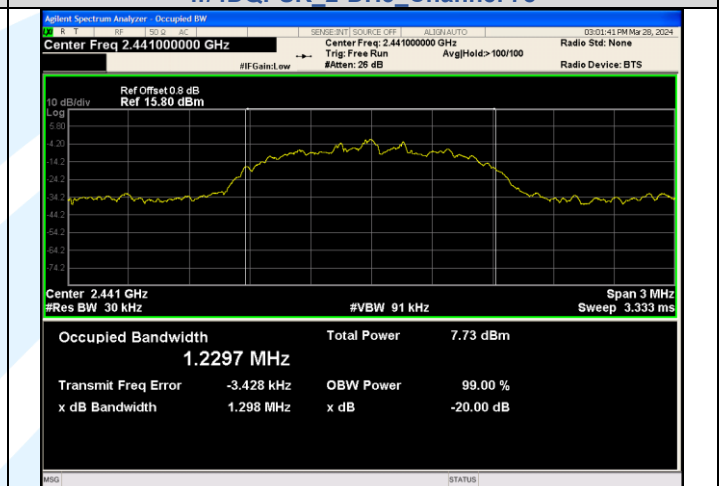

8DPSK 3-DH5 Channel 39

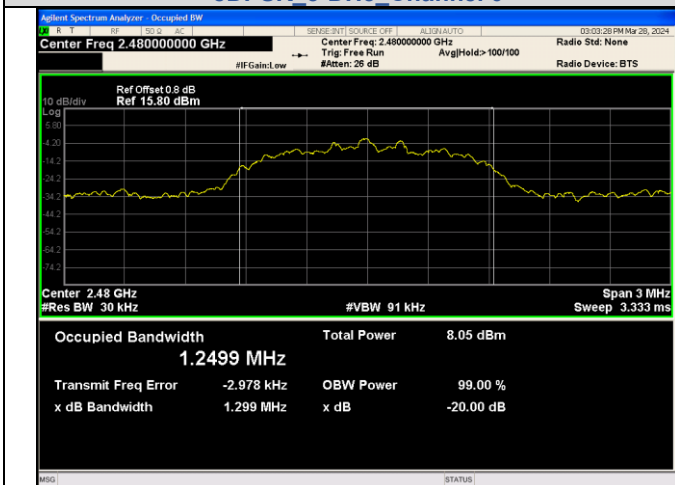


8DPSK 3-DH5 Channel 78

A.3 CARRIER FREQUENCIES SEPARATION

| Modulation | Packet | Left Center frequency (MHz) | Right Center frequency (MHz) | Hopping Frequency Separation (MHz) | Limit (MHz) | Result |
|---------------|--------|-----------------------------|------------------------------|------------------------------------|-------------|--------|
| GFSK | DH5 | 2439.9811 | 2441.1632 | 1 | 0.635 | PASS |
| $\pi/4$ DQPSK | 2-DH5 | 2439.8668 | 2440.8383 | 0.9715 | 0.854 | PASS |
| 8DPSK | 3-DH5 | 2440.159 | 2441.1704 | 1.0114 | 0.862 | PASS |

Test Graphs

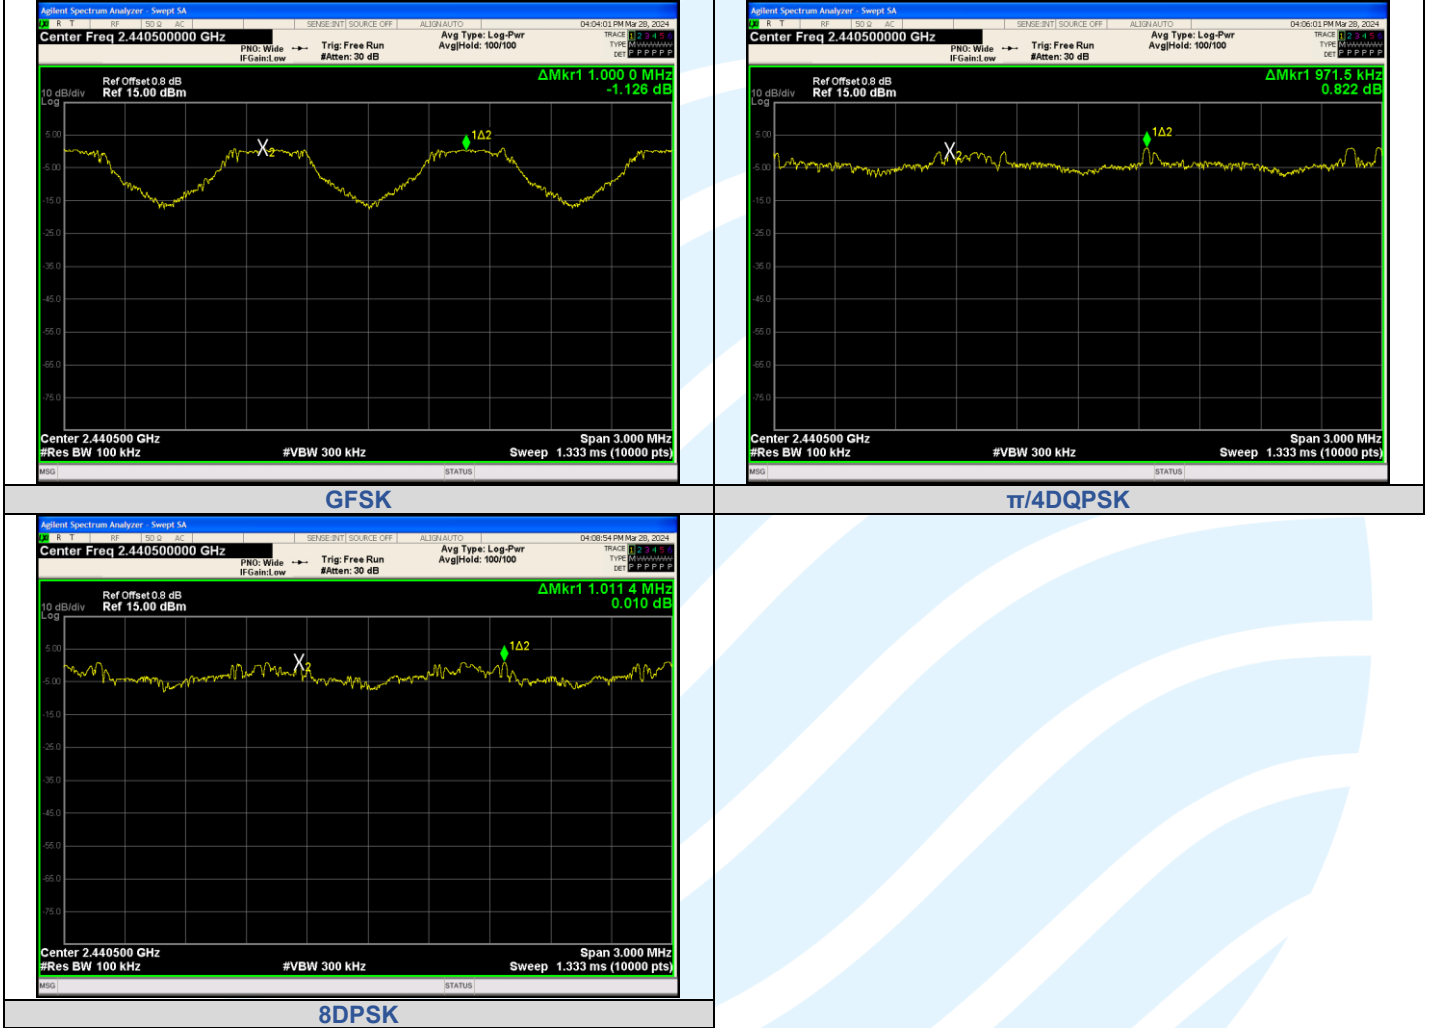

A.4 CONDUCTED OUT OF BAND EMISSION


Non-Hopping

| Modulation | Packet | Channel | OOB Emission Frequency (MHz) | OOB Emission Level (dBm) | Limit (dBm) | Over Limit (dB) | Result |
|------------|--------|---------|------------------------------|--------------------------|-------------|-----------------|---------|
| GFSK | DH5 | 0 | 2400.00 | -52.072 | -19.55 | -32.522 | PASS |
| | | | 4803.76 | -48.643 | -19.55 | -29.093 | PASS |
| | | 39 | 4881.79 | -45.167 | -19.02 | -26.147 | PASS |
| | | | 78 | 2483.50 | -60.106 | -18.98 | -41.126 |
| π/4DQPSK | 2-DH5 | 0 | 2400.00 | -49.380 | -19.75 | -29.630 | PASS |
| | | | 4803.76 | -51.806 | -19.75 | -32.056 | PASS |
| | | 39 | 4881.79 | -44.190 | -19.15 | -25.040 | PASS |
| | | | 78 | 2483.50 | -52.191 | -18.93 | -33.261 |
| 8DPSK | 3-DH5 | 0 | 2400.00 | -49.159 | -19.71 | -29.449 | PASS |
| | | | 24444.4 | -52.554 | -19.71 | -32.844 | PASS |
| | | 39 | 4882.42 | -50.102 | -19.32 | -30.782 | PASS |
| | | | 78 | 2483.50 | -52.577 | -18.93 | -33.647 |
| | | | 4959.83 | -49.840 | -18.93 | -30.910 | PASS |


Hopping

| Modulation | Packet | Channel | OOB Emission Frequency (MHz) | OOB Emission Level (dBm) | Limit (dBm) | Over Limit (dB) | Result |
|------------|--------|---------|------------------------------|--------------------------|-------------|-----------------|--------|
| GFSK | DH5 | Hopping | 2400.00 | -55.118 | -19.57 | -35.548 | PASS |
| | | | 2483.50 | -58.378 | -19.12 | -39.258 | PASS |
| π/4DQPSK | 2-DH5 | | 2400.00 | -49.778 | -19.52 | -30.258 | PASS |
| | | | 2483.50 | -55.292 | -19.16 | -36.132 | PASS |
| 8DPSK | 3-DH5 | | 2400.00 | -50.013 | -19.54 | -30.473 | PASS |
| | | | 2483.50 | -53.685 | -19.01 | -34.675 | PASS |


Test Graphs

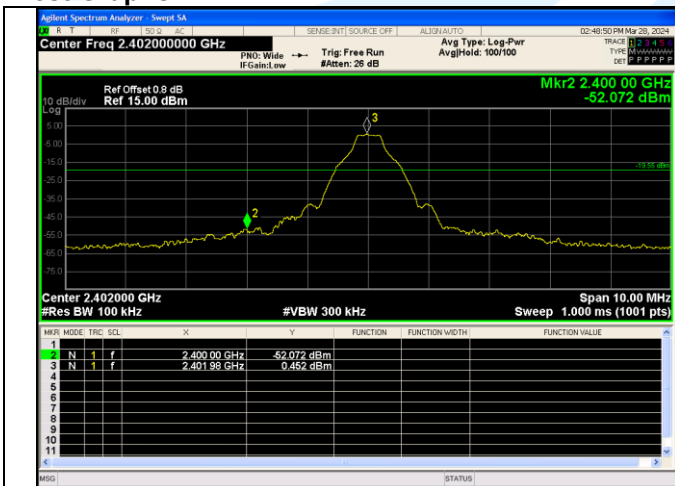


Out Of Band Emission
GFSK_DH5_Channel 0

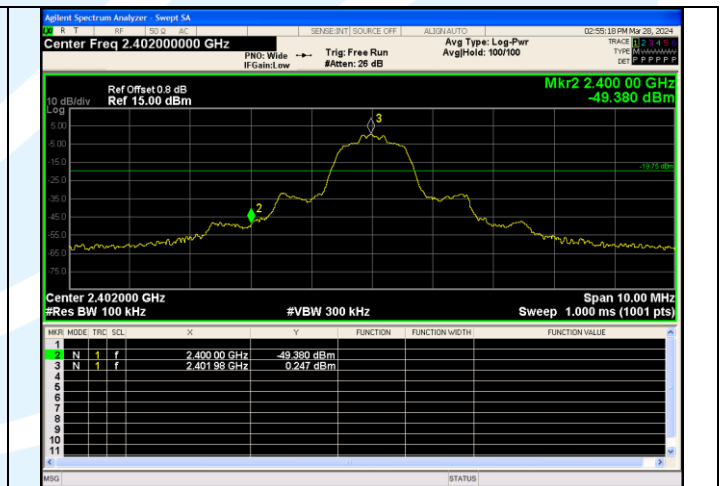


Out Of Band Emission
π/4DQPSK_2-DH5_Channel 0

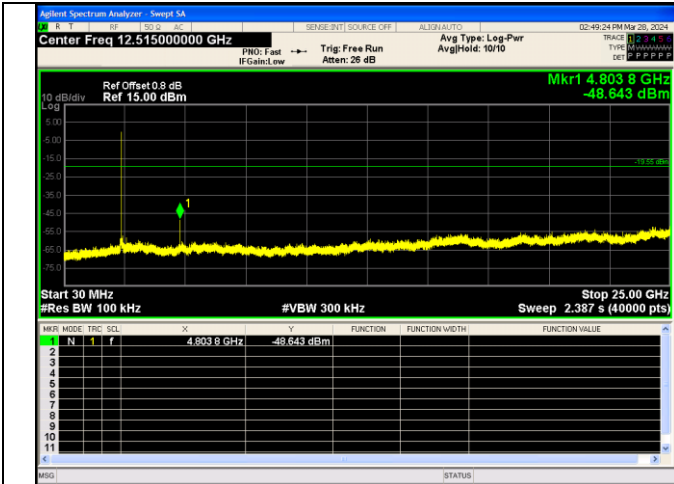


**Spurious Emission
GFSK DH5 Channel 0**

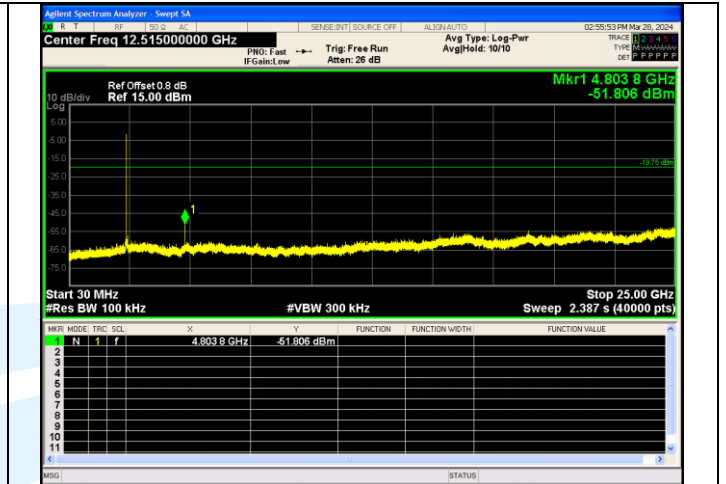


**Spurious Emission
π/4DQPSK 2-DH5 Channel 0**

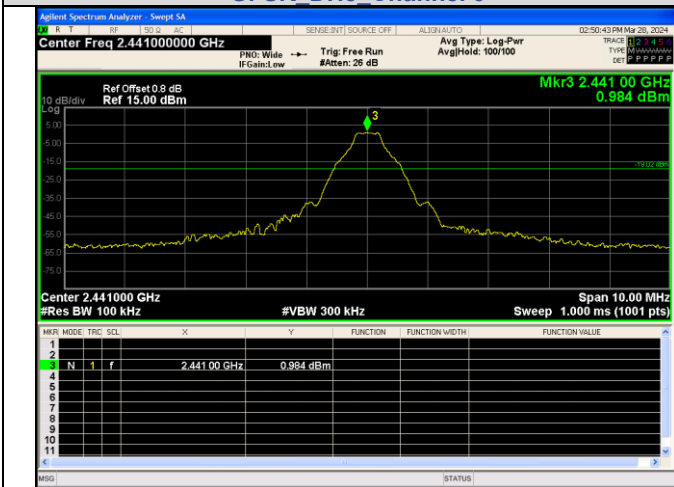


**Out Of Band Emission
GFSK DH5 Channel 39**

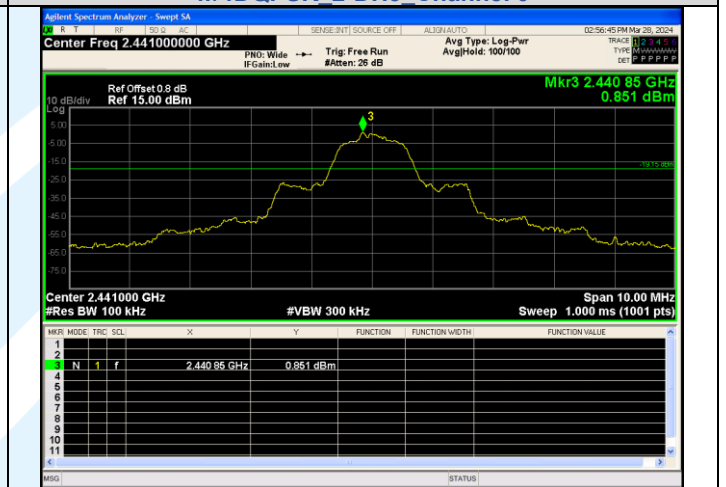


**Out Of Band Emission
π/4DQPSK 2-DH5 Channel 39**

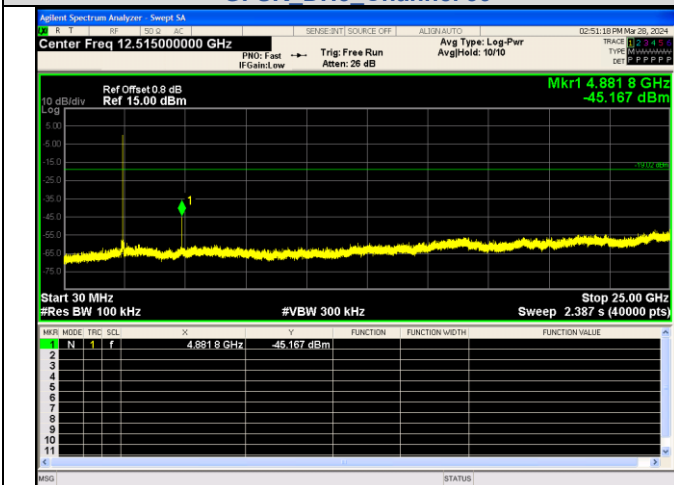


**Spurious Emissions
GFSK DH5 Channel 39**

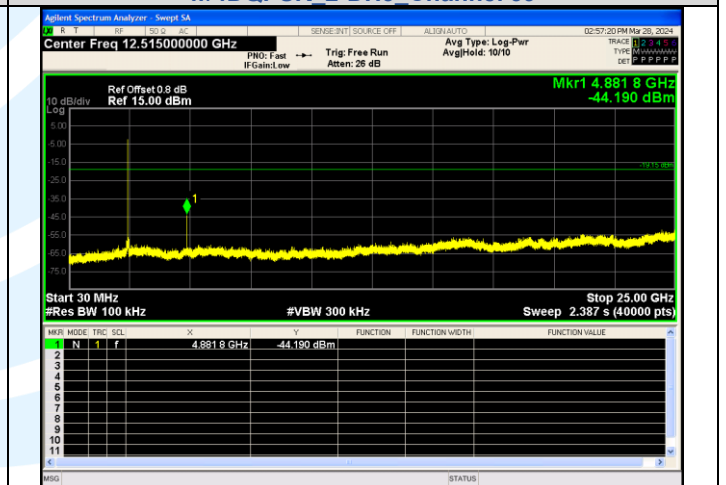


**Spurious Emissions
π/4DQPSK 2-DH5 Channel 39**

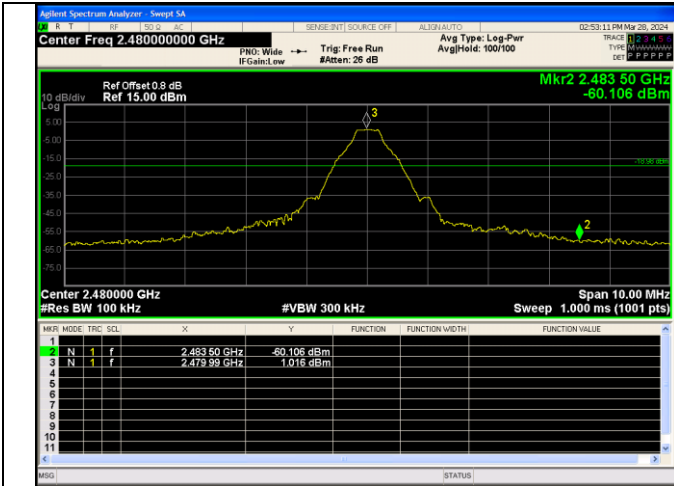


**Out Of Band Emission
GFSK DH5 Channel 78**

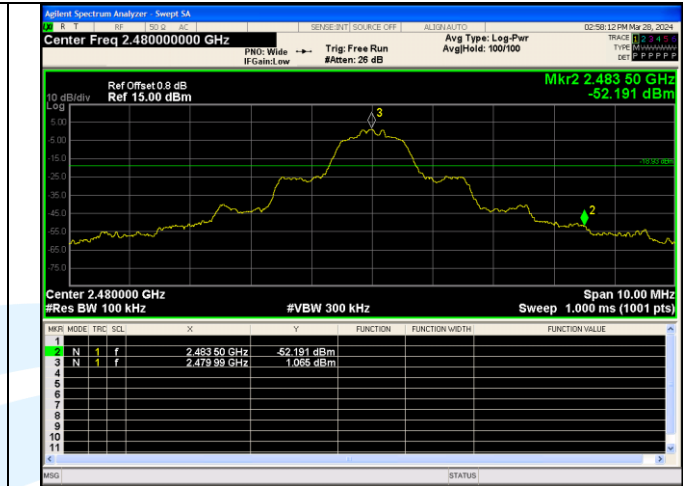


**Out Of Band Emission
 $\pi/4$ DQPSK 2-DH5 Channel 78**

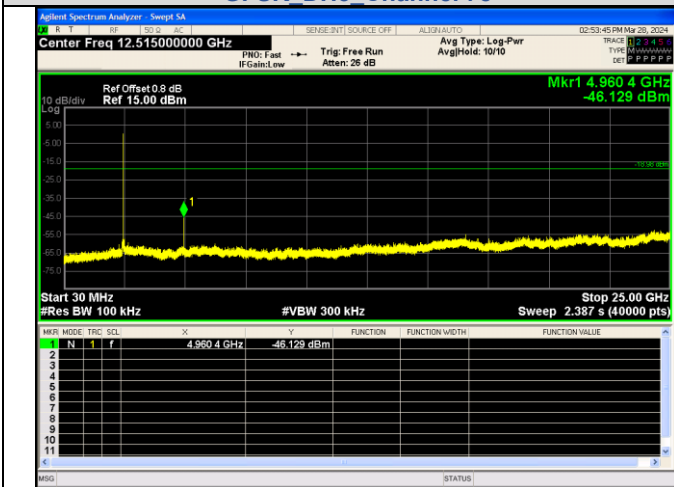


**Spurious Emission
GFSK DH5 Channel 78**

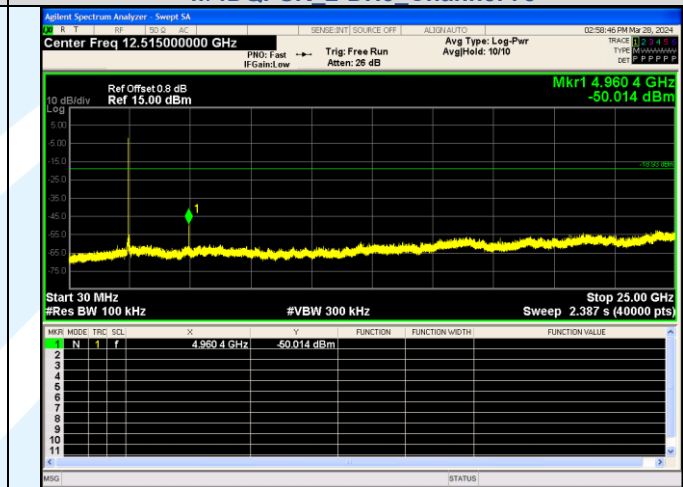


**Spurious Emission
 $\pi/4$ DQPSK 2-DH5 Channel 78**

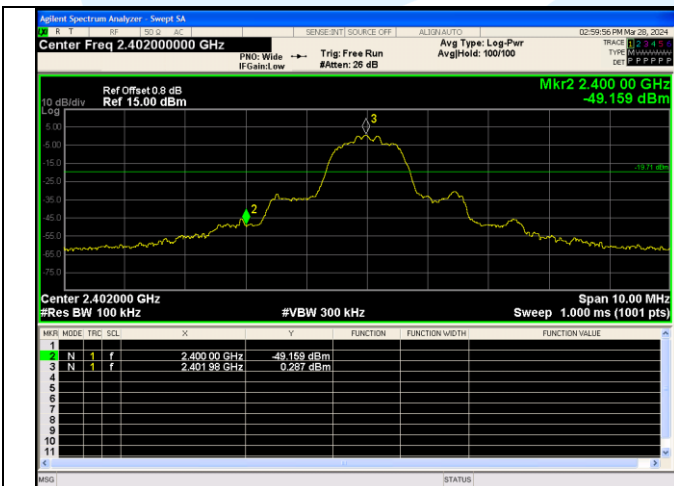


**Out Of Band Emission
8DPSK 3-DH5 Channel 0**

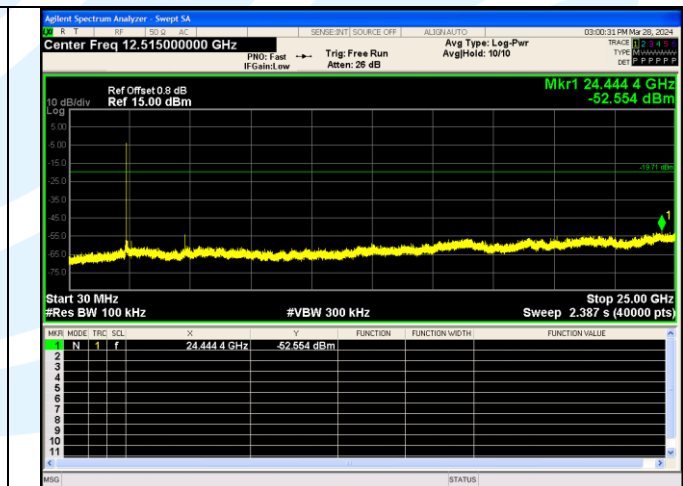


**Spurious Emission
8DPSK 3-DH5 Channel 0**

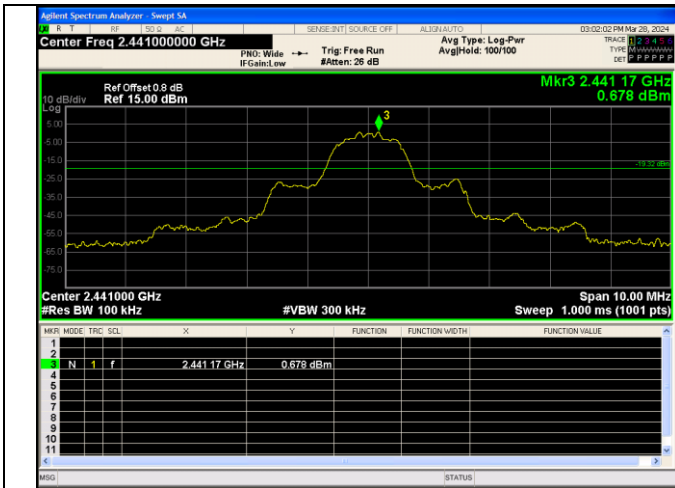


**Out Of Band Emission
8DPSK 3-DH5 Channel 39**

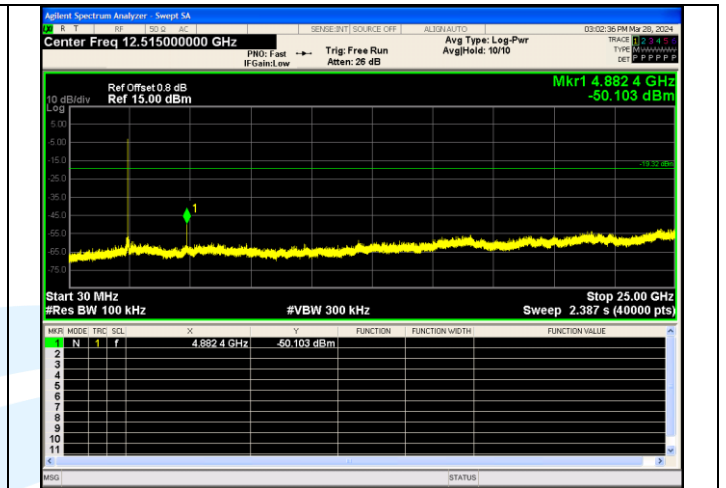


**Spurious Emissions
8DPSK 3-DH5 Channel 39**

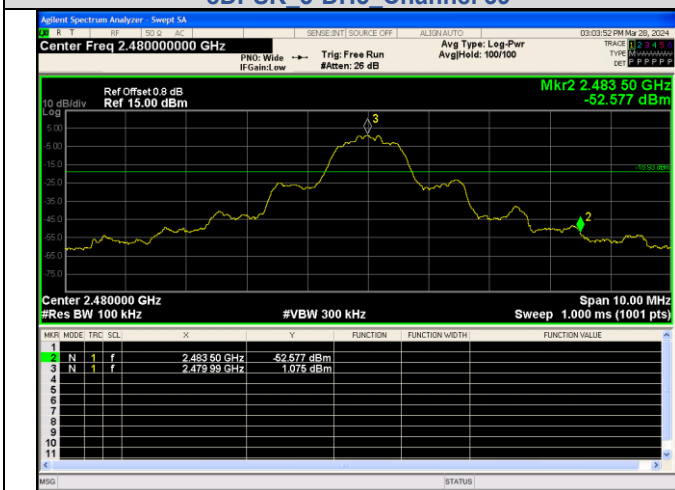


**Out Of Band Emission
8DPSK 3-DH5 Channel 78**

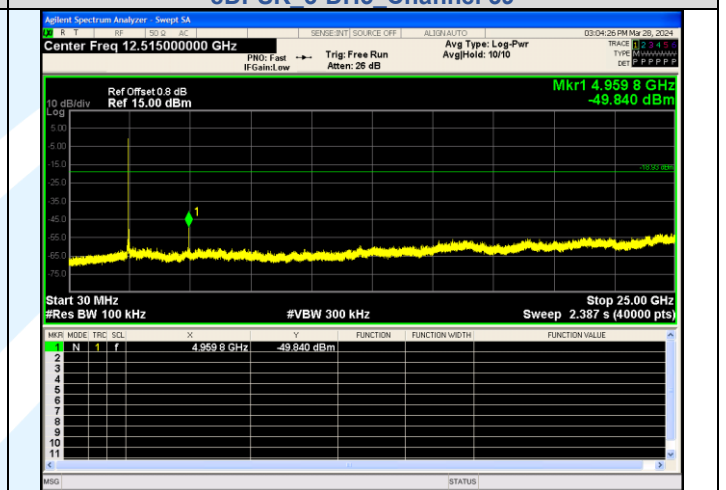


**Spurious Emission
8DPSK 3-DH5 Channel 78**

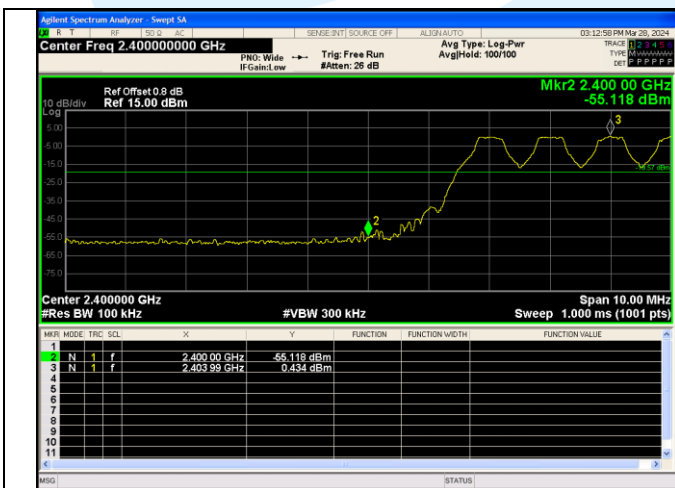


**Out Of Band Emission(Left)
GFSK DH5 Channel Hopping**

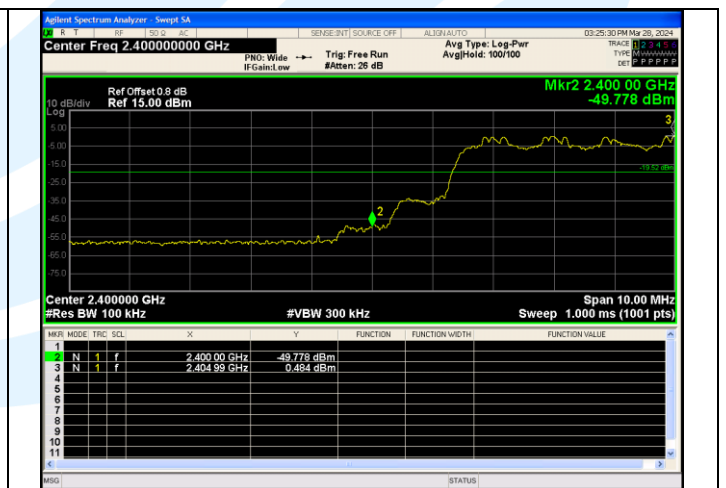


**Out Of Band Emission(Left)
 $\pi/4$ DQPSK 2-DH5 Channel Hopping**

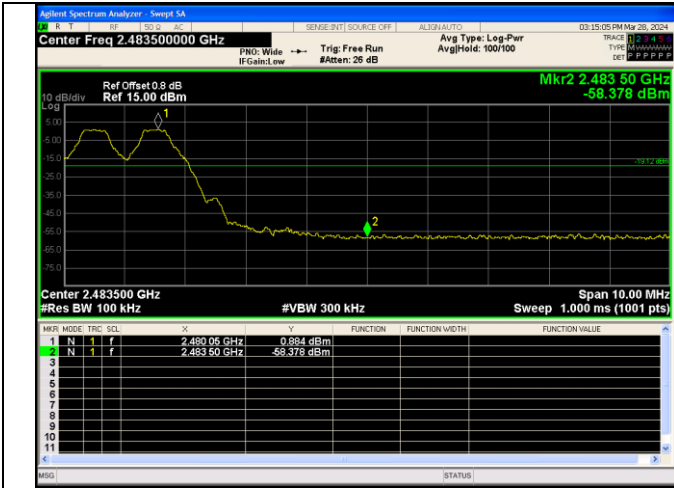


Out Of Band Emission(Right)
GFSK_DH5 Channel Hopping

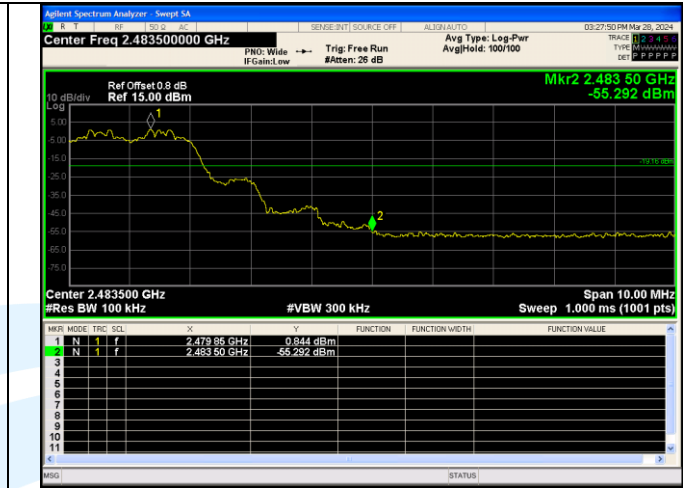

Out Of Band Emission(Right)
 $\pi/4$ DQPSK 2-DH5 Channel Hopping

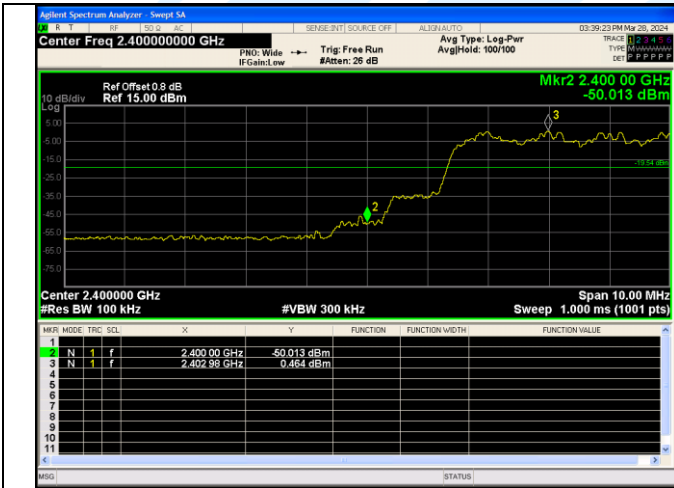

Out Of Band Emission(Left)
8DPSK 3-DH5 Channel Hopping

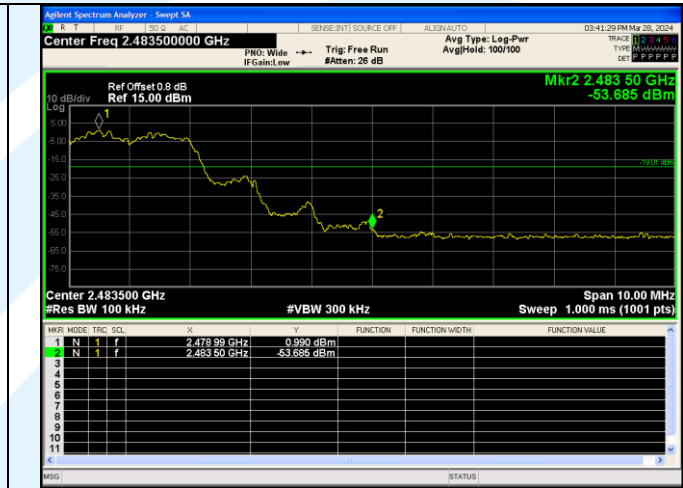


Out Of Band Emission(Right)
8DPSK 3-DH5 Channel Hopping

A.5 DWELL TIME

| Modulation | Packet | Channel | Pulse Width (ms) | Number of Pulses in 31.6 seconds | Dwell Time (ms) | Limit (ms) | Result |
|------------|--------|----------------|------------------|----------------------------------|-----------------|------------|--------|
| GFSK | DH1 | CH0 (2402MHz) | 0.3804 | 317 | 120.59 | < 400 | PASS |
| | DH1 | CH78 (2480MHz) | 0.3816 | 317 | 120.97 | | PASS |
| | DH3 | CH0 (2402MHz) | 1.632 | 164 | 267.65 | | PASS |
| | DH3 | CH78 (2480MHz) | 1.632 | 158 | 257.86 | | PASS |
| | DH5 | CH0 (2402MHz) | 2.872 | 104 | 298.69 | | PASS |
| | DH5 | CH78 (2480MHz) | 2.880 | 105 | 302.4 | | PASS |
| π/4DQPSK | 2-DH1 | CH0 (2402MHz) | 0.3900 | 316 | 123.24 | | PASS |
| | 2-DH1 | CH78 (2480MHz) | 0.3912 | 317 | 124.01 | | PASS |
| | 2-DH3 | CH0 (2402MHz) | 1.656 | 152 | 251.71 | | PASS |
| | 2-DH3 | CH78 (2480MHz) | 1.656 | 157 | 259.99 | | PASS |
| | 2-DH5 | CH0 (2402MHz) | 2.896 | 109 | 315.66 | | PASS |
| | 2-DH5 | CH78 (2480MHz) | 2.896 | 111 | 321.46 | | PASS |
| 8DPSK | 3-DH1 | CH0 (2402MHz) | 0.3900 | 319 | 124.41 | | PASS |
| | 3-DH1 | CH78 (2480MHz) | 0.3912 | 317 | 124.01 | | PASS |
| | 3-DH3 | CH0 (2402MHz) | 1.632 | 153 | 249.7 | | PASS |
| | 3-DH3 | CH78 (2480MHz) | 1.656 | 155 | 256.68 | | PASS |
| | 3-DH5 | CH0 (2402MHz) | 2.880 | 111 | 319.68 | | PASS |
| | 3-DH5 | CH78 (2480MHz) | 2.896 | 113 | 327.25 | | PASS |

Test Graphs

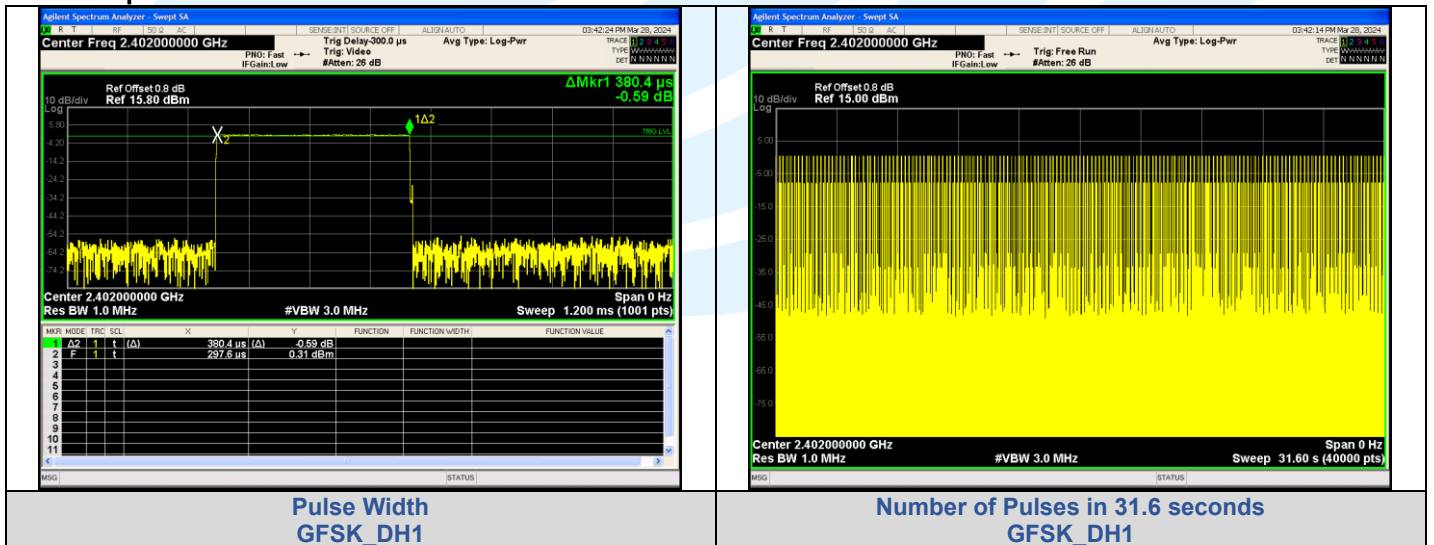

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886


E-mail: info@uttlab.com

<http://www.uttlab.com>


USTR-RF-RSS247-V1.1

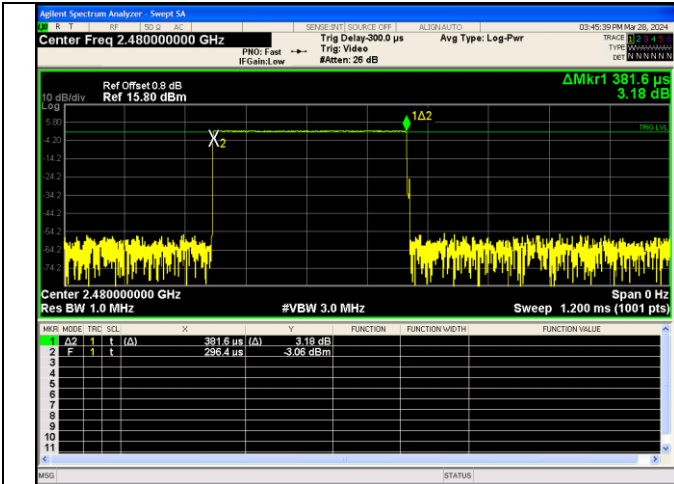


**Pulse Width
GFSK_DH1**

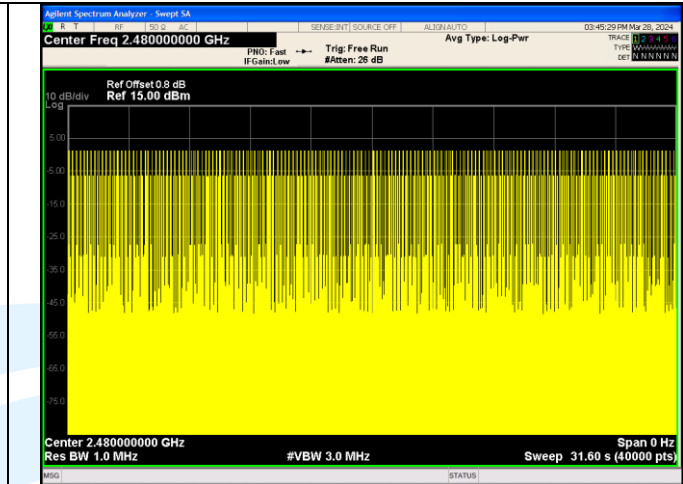


**Number of Pulses in 31.6 seconds
GFSK_DH1**

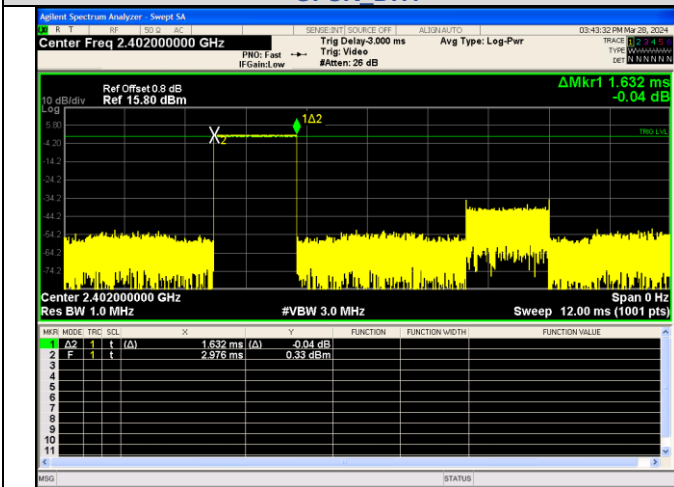


**Pulse Width
GFSK_DH3**

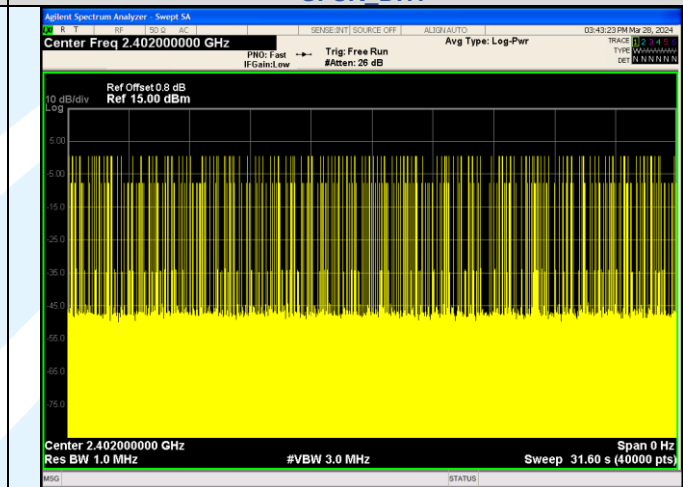

**Number of Pulses in 31.6 seconds
GFSK_DH3**

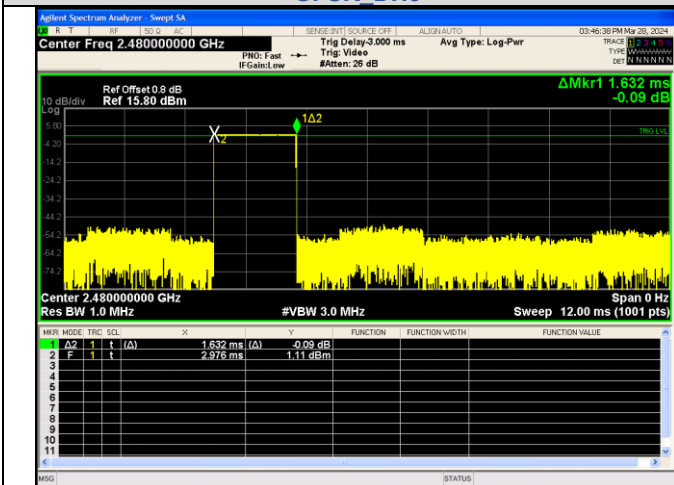

**Pulse Width
GFSK_DH3**

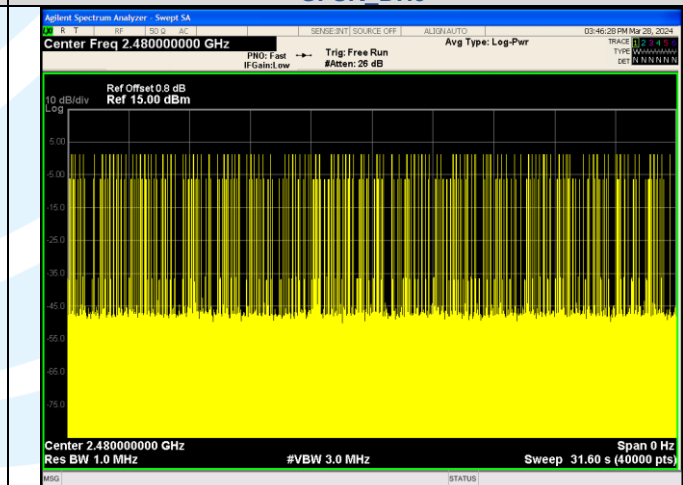

**Number of Pulses in 31.6 seconds
GFSK_DH3**