



FCC Part 15B TEST REPORT

Report No.: STS1809207E01

Issued for

Cifernet, Inc

955 Alma St, Palo Alto, CA 94301, USA

Product Name:	NAS
Brand Name:	Cifernet
Model Name:	M3
Series Model:	N/A
FCC ID:	2ARD6-M3
Test Standard:	FCC Part 15B

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, All Test Data Presented in this report is only applicable to presented Test sample.





TEST RESULT CERTIFICATION

Applicant's Name: Cifernet, Inc

Address.....: 955 Alma St, Palo Alto, CA 94301, USA

Manufacture's Name: Shenzhen Yifang Digital Technology Co., Ltd.

Address.....: YIFANG Building, No. 315, Shuang Ming Avenue, Guang Ming Street, Guang Ming District, Shenzhen, Guangdong, China

Product Description

Product Name: NAS

Brand Name.....: Cifernet

Model Name: M3

Series Model: N/A

Standards.....: FCC Part 15B

Test Procedure.....: ANSI C63.4-2014

This device described above has been tested by STS, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of STS, this document may be altered or revised by STS, personal only, and shall be noted in the revision of the document.

Date of Test.....:

Date of Performance of Tests: 25 Sep. 2018~27 Sep. 2018

Date of Issue.....: 28 Sep. 2018

Test Result: Pass

Testing Engineer :

Barry Li

(Barry Li)

Technical Manager :

Chopin. Xiao

(Chopin Xiao)

Authorized Signatory :

Vita Li

(Vita Li)





Table of Contents

1. SUMMARY OF THE TEST RESULTS	5
1.1 TEST FACTORY	5
1.2 MEASUREMENT UNCERTAINTY	5
2. GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF THE EUT	6
2.2 DESCRIPTION OF THE TEST MODES	7
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF THE SYSTEM TESTED	7
2.4 DESCRIPTION OF THE SUPPORT UNITS	8
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	9
3. EMC EMISSION TEST	10
3.1 CONDUCTED EMISSION MEASUREMENT	10
3.2 RADIATED EMISSION MEASUREMENT	14



Revision History

Rev.	Issue Date	Report No.	Effect Page	Contents
00	28 Sep. 2018	STS1809207E01	ALL	Initial Issue





1. SUMMARY OF THE TEST RESULTS

Test procedures according to the technical standards:

EMISSION			
Standard	Item	Result	Remarks
FCC 47 CFR Part 15 Subpart B	Conducted Emission	PASS	Meet Class B limit
	Radiated Emission	PASS	Meet Class B limit

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

1.1 TEST FACTORY

Company Name:	Shenzhen STS Test Services Co. Ltd.
Address:	1/F., Building B, Zhuoke Science Park, No.190, Chongqing Road, Fuyong Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	+86-755 3688 6288
Fax:	+86-755 3688 6277
Registration No.:	CNAS Registration No.: L7649; FCC Registration No.: 625569 IC Registration No.: 12108A; A2LA Certificate No.: 4338.01;

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission (9KHz-150KHz)	$\pm 2.88\text{dB}$
2	Conducted Emission (150KHz-30MHz)	$\pm 2.67\text{dB}$
3	All emissions,radiated(<30M) (9KHz-30MHz)	$\pm 2.45\text{dB}$
4	All emissions,radiated(<1G) 30MHz-200MHz	$\pm 3.73\text{dB}$
5	All emissions,radiated(<1G) 200MHz-1000MHz	$\pm 3.92\text{dB}$
6	All emissions,radiated(>1G)	$\pm 3.31\text{dB}$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	NAS
Brand Name	Cifernet
Model Name	M3
Series Model	N/A
Model Difference	N/A
Test Sample Number	180921024
Internal Frequency	1GHz
Power Source	1. Model: TAA036120030 0HU Input: AC100-240V, 1000mA, 50/60Hz Output: DC12V, 3000mA 2. Model: PS36A120K3000UD Input: AC100-240V, 1000mA, 50/60Hz Output: DC12V, 3000mA
USB Output	DC 5V, 0.5A

Note: For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.2 DESCRIPTION OF THE TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	USB disk+LAN Mode


For Conducted Test	
Final Test Mode	Description
Mode 1	USB disk+LAN Mode

For Radiated Test	
Final Test Mode	Description
Mode 1	USB disk+LAN Mode

NOTE:

1. The test modes were carried out for all operation modes. Only worst case will be show in this report.
2. We have be tested for all avaiable U.S. voltage and frequencies(For 120VAC/60Hz) for which the device is capable of operation.

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF THE SYSTEM TESTED

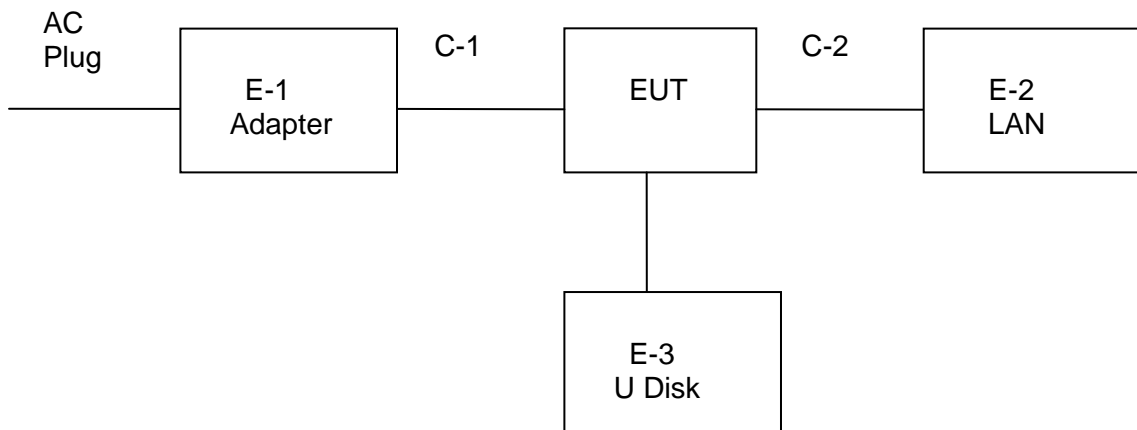



2.4 DESCRIPTION OF THE SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Accessories equipment

Item	Equipment	Mfr/Brand	Model/Type No.
E-1	Adapter	N/A	PS36A120K3000UD

Auxiliary equipment

Item	Equipment	Mfr/Brand	Model/Type No.
E-2	LAN	N/A	N/A
E-3	U Disk	PNY	M202

Cable

Item	Type	Shielded Type	Ferrite Core	Length
C-1	N/A	Unshielded	NO	110cm
C-2	N/A	Shielded	NO	95cm

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.
- (4) Both adapters has been tested, but the worst test mode is the model: PS36A120K3000UD.



2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
EMI Test Receiver	R&S	ESCI	102086	2017.10.15	2018.10.14
Bilog Antenna	TESEQ	CBL6111D	34678	2017.11.02	2018.11.01
Horn Antenna	SCHWARZB ECK	BBHA 9120D	1343	2017.10.27	2018.10.26
Spectrum Analyzer	Agilent	E4407B	MY50140340	2018.03.08	2019.03.07
Pre-mpifier(1G-18G)	Agilent	8449B	60538	2017.10.27	2018.10.26
Spectrum Analyzer	Agilent	N9020A	MY49100060	2018.03.08	2019.03.07
Pre-mpifier (0.1M-3G Hz)	EM	EM330	--	2018.03.11	2019.03.10
Horn Antenna (18-40GHz)	A-INFO	LB-180400-KF	J211020657	2018.03.11	2019.03.10

Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
EMI Test Receiver	R&S	ESPI	102086	2017.10.15	2018.10.14
LISN	R&S	ENV216	101242	2017.10.15	2018.10.14
LISN	EMCO	3810/2NM	23625	2017.10.15	2018.10.14
Absorbing Clamp	R&S	MDS-21	100668	2017.10.19	2018.10.18



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Conducted Emission Limits (dBuV)			
	Class A		Class B	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- a. The EUT was 0.8 meters from the horizontal ground plane and 0.4 meters from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

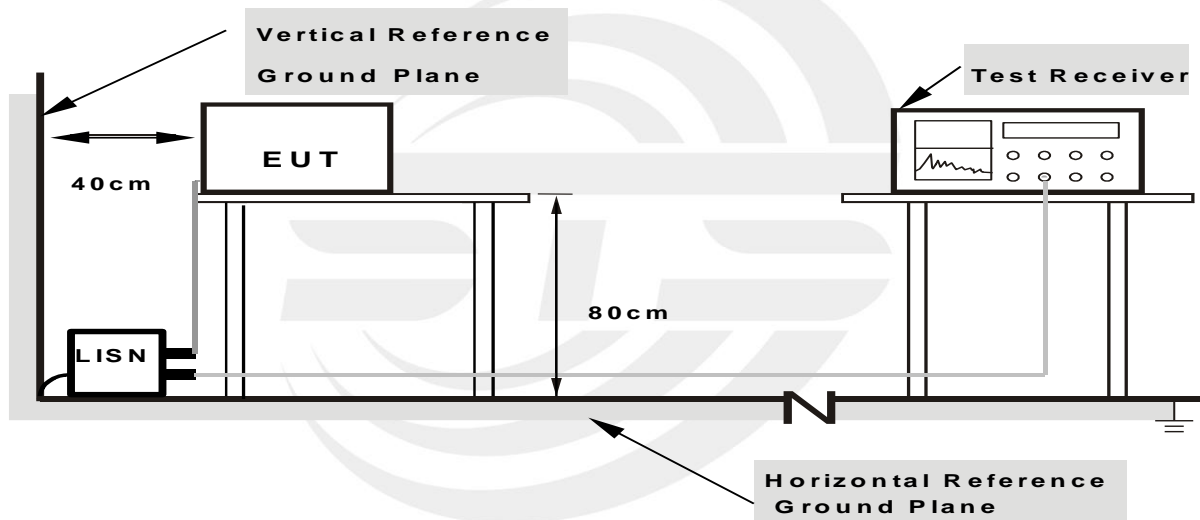

- Note: 1.Support units were connected to second LISN.**
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.




3.1.6 TEST RESULTS

Temperature:	25.6 °C	Relative Humidity:	63%
Phase:	L	Test Mode:	Mode 1
Test Voltage:	AC 120V/60Hz		

No.	Frequency (MHz)	Reading (dBUV)	Correct Factor (dB)	Result (dBUV)	Limit (dBUV)	Margin (dB)	Detector
1	0.1620	33.00	19.79	52.79	65.36	-12.57	QP
2	0.1620	16.28	19.79	36.07	55.36	-19.29	AVG
3	0.1780	31.64	19.78	51.42	64.58	-13.16	QP
4	0.1780	16.10	19.78	35.88	54.58	-18.70	AVG
5	0.5900	22.14	19.94	42.08	56.00	-13.92	QP
6	0.5900	19.43	19.94	39.37	46.00	-6.63	AVG
7	1.6580	9.86	19.79	29.65	56.00	-26.35	QP
8	1.6580	0.28	19.79	20.07	46.00	-25.93	AVG
9	3.3900	9.76	19.82	29.58	56.00	-26.42	QP
10	3.3900	-1.62	19.82	18.20	46.00	-27.80	AVG
11	13.9340	11.09	20.23	31.32	60.00	-28.68	QP
12	13.9340	2.41	20.23	22.64	50.00	-27.36	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result = Reading + Factor) – Limit
3. Factor = Cable Loss + Antenna Factor - Amplifier Gain

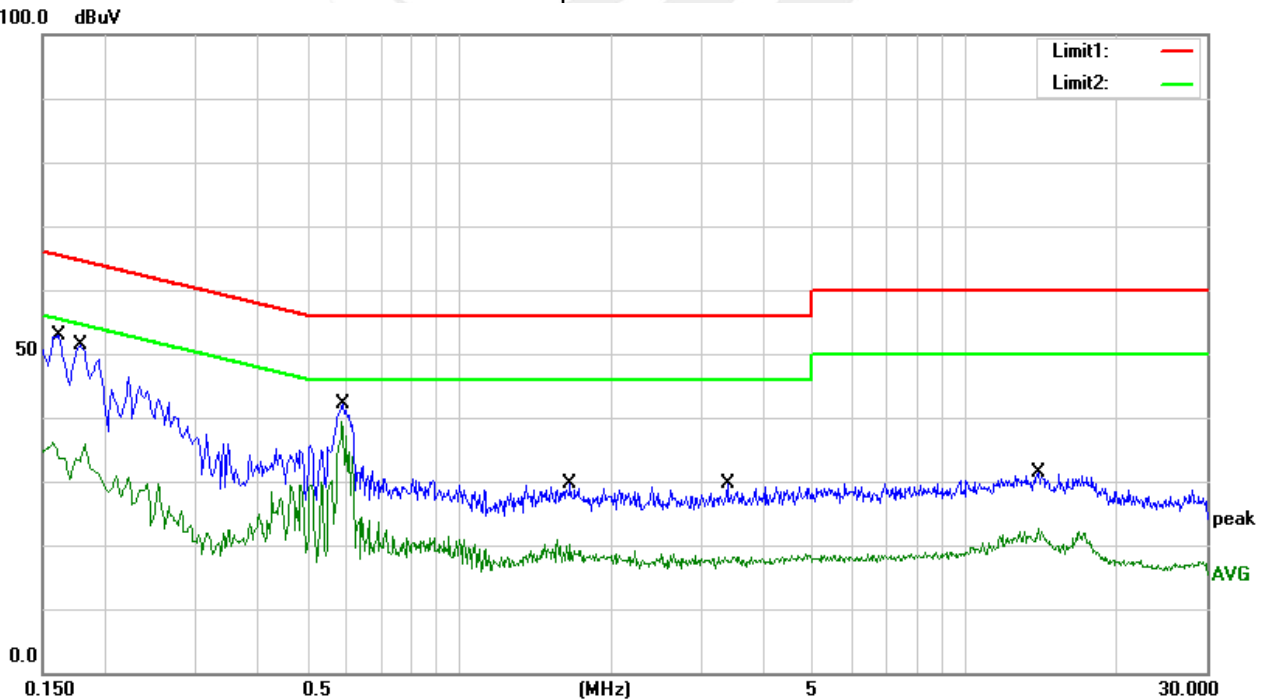




Temperature:	25.6 °C	Relative Humidity:	63%
Phase:	N	Test Mode:	Mode 1
Test Voltage:	AC 120V/60Hz		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1540	33.76	19.79	53.55	65.78	-12.23	QP
2	0.1540	15.82	19.79	35.61	55.78	-20.17	AVG
3	0.1700	31.59	19.79	51.38	64.96	-13.58	QP
4	0.1700	13.72	19.79	33.51	54.96	-21.45	AVG
5	0.5860	22.47	19.95	42.42	56.00	-13.58	QP
6	0.5860	18.57	19.95	38.52	46.00	-7.48	AVG
7	1.1940	9.73	19.80	29.53	56.00	-26.47	QP
8	1.1940	-1.52	19.80	18.28	46.00	-27.72	AVG
9	4.5780	7.27	19.85	27.12	56.00	-28.88	QP
10	4.5780	-3.24	19.85	16.61	46.00	-29.39	AVG
11	17.9420	13.13	20.37	33.50	60.00	-26.50	QP
12	17.9420	1.76	20.37	22.13	50.00	-27.87	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result =Reading + Factor)–Limit
3. Factor= Cable Loss +Antenna Factor-Amplifier Gain

100.0 dBuV

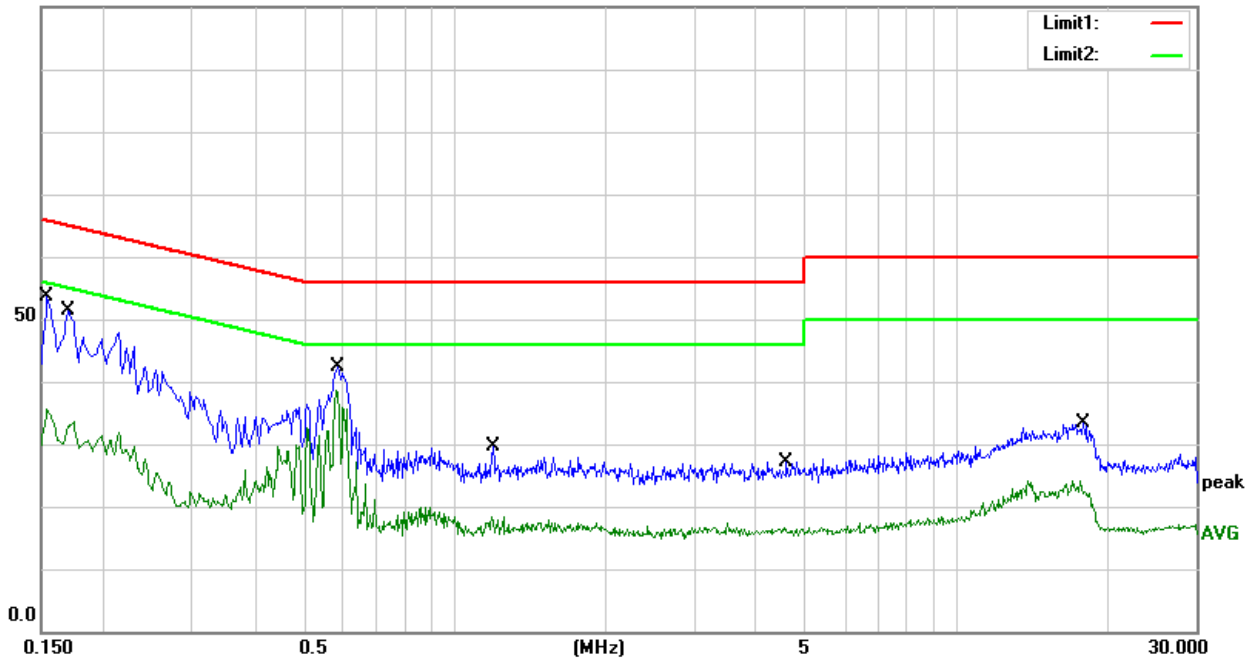

- Note: (1) The test voltage is 100-240V, both of which have assessment tests, and the worst test data is in the report.
 (2) Both adapters has been tested, but the worst test mode is the model: PS36A120K3000UD.



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 Radiated Emission Limits

In case the emission fall within the restricted band specified on 15.105(a)&109(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microrvolts/meter)	Measurement Distance (meters)
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF THE RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Class A (dBuV/m) (at 3M)		Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80	60	74	54

Note:

- (1) The limit for radiated test was performed in the following: FCC PART 15B.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

FREQUENCY RANGE OF THE RADIATED MEASUREMENT (For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower



Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	5th harmonic (Peak/AV)
RB / VB (emission in restricted band)	30MHz to 1000MHz: 120 KHz / 300 KHz Above 1000MHz: 1 MHz / 3 MHz

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	30MHz to 1000MHz: 120 KHz / 300 KHz Above 1000MHz: 1 MHz / 3 MHz

3.2.2 TEST PROCEDURE

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter semi-anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from 1 meter to 4 meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1GHz.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.


Note: Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP

(A) Radiated Emission Test-Up Frequency 30MHz~1GHz

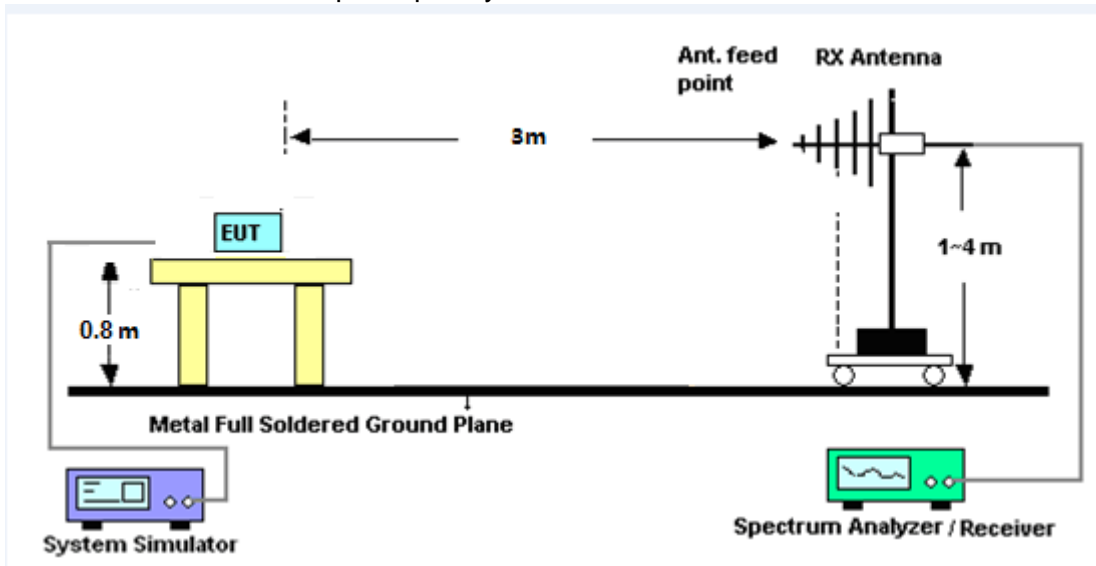

(B) Radiated Emission Test-Up Frequency Above 1GHz

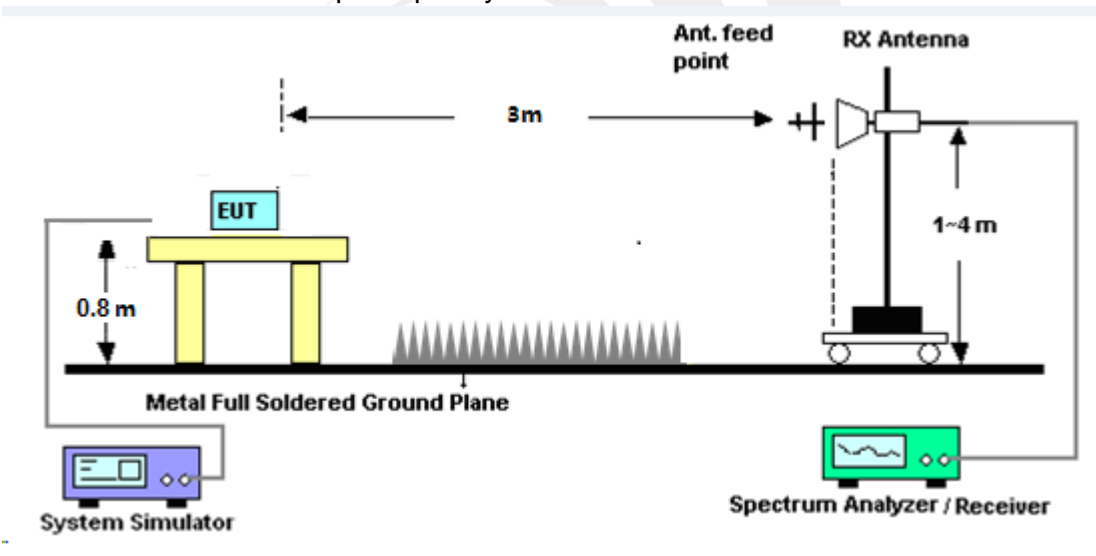

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the following during the testing.



3.2.6 TEST RESULTS


30MHz -1000MHz

Temperature:	25.3 °C	Relative Humidity:	55%
Phase:	Horizontal	Test Mode:	Mode 1
Test Voltage:	AC 120V/60Hz		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	47.1600	39.40	-20.01	19.39	40.00	-20.61	QP
2	103.4421	37.18	-18.90	18.28	43.50	-25.22	QP
3	199.9856	51.21	-20.17	31.04	43.50	-12.46	QP
4	267.5455	46.66	-15.38	31.28	46.00	-14.72	QP
5	533.8321	38.85	-7.58	31.27	46.00	-14.73	QP
6	935.5463	42.13	-0.90	41.23	46.00	-4.77	QP

Remark:

1. Margin = Result (Result =Reading + Factor)–Limit
2. Factor= Cable Loss +Antenna Factor-Amplifier Gain

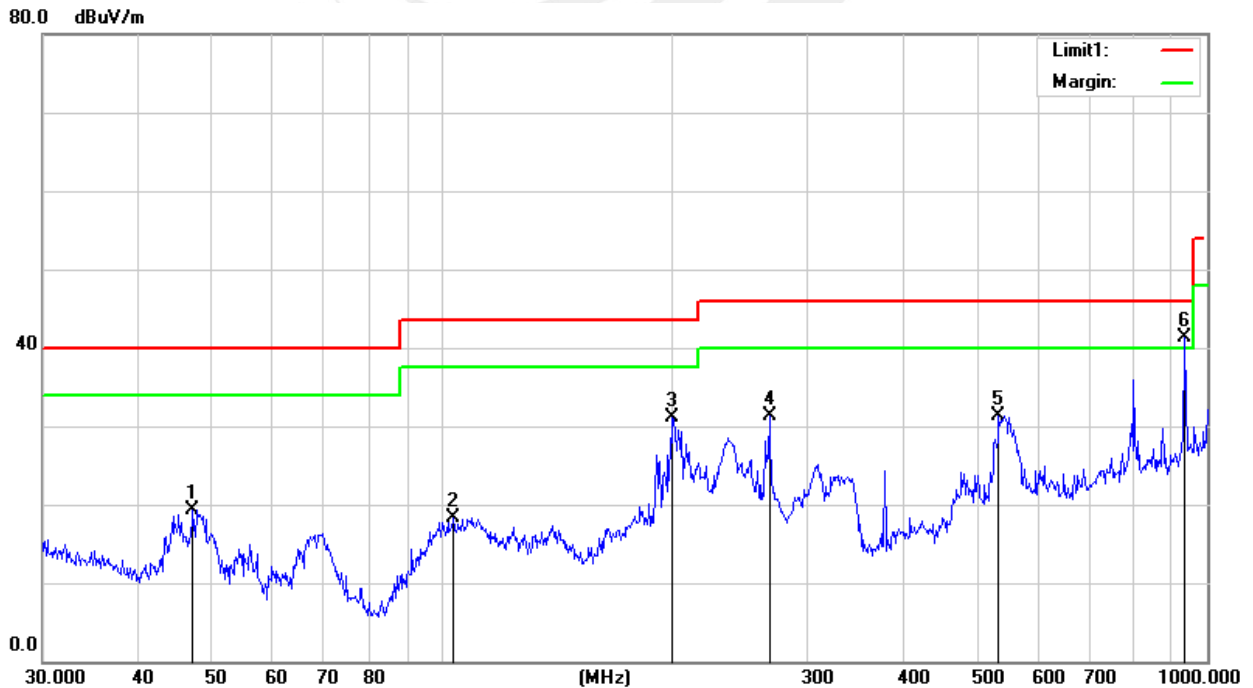




Temperature:	25.3 °C	Relative Humidity:	55%
Phase:	Vertical	Test Mode:	Mode 1
Test Voltage:	AC 120V/60Hz		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	36.6375	41.51	-14.59	26.92	40.00	-13.08	QP
2	98.4866	43.42	-19.35	24.07	43.50	-19.43	QP
3	200.6881	50.64	-20.14	30.50	43.50	-13.00	QP
4	267.5455	43.35	-15.38	27.97	46.00	-18.03	QP
5	541.3725	34.42	-6.97	27.45	46.00	-18.55	QP
6	801.7863	34.84	-3.49	31.35	46.00	-14.65	QP

Remark:

1. Margin = Result (Result =Reading + Factor)-Limit
2. Factor= Cable Loss +Antenna Factor-Amplifier Gain

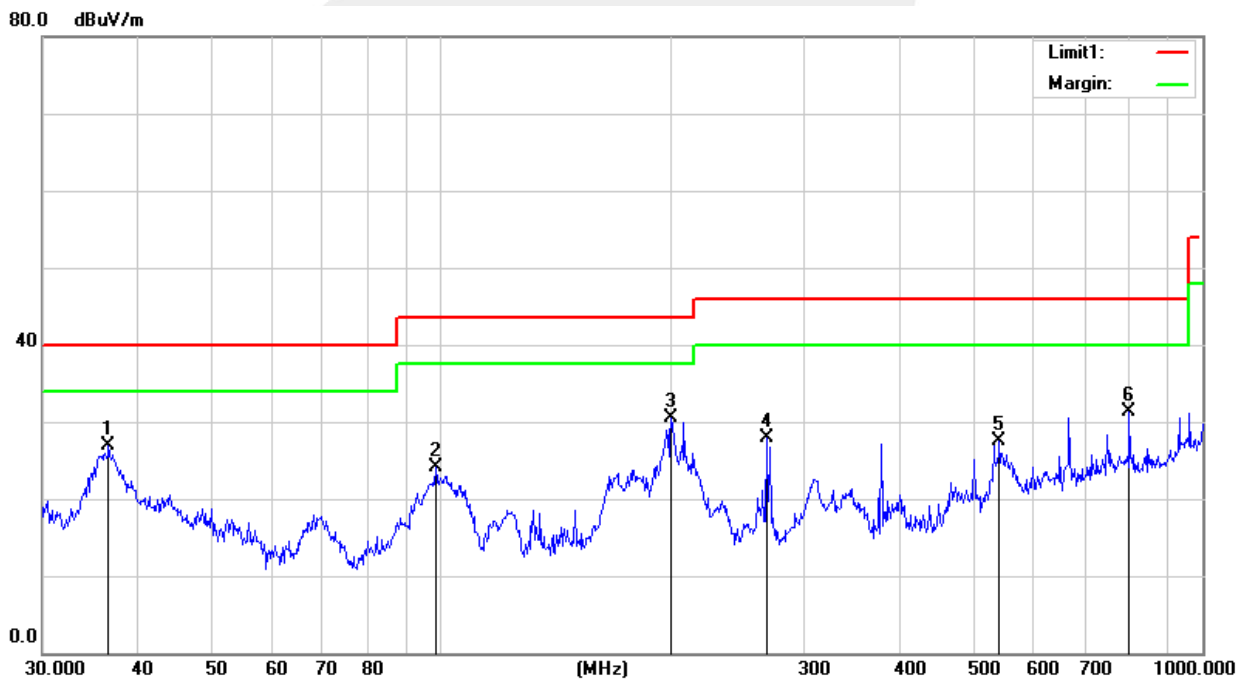

Both adapters has been tested, but the worst test mode is the model: PS36A120K3000UD.



(1 GHz to 25GHz.)

Temperature:	25 °C	Relative Humidity:	65%
Phase:	Horizontal	Test Mode:	Mode 1
Test Voltage:	AC 120V/60Hz		

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detect or	Table (o)	Height (cm)	ANT	Verdict
1**	14416.000	44.55	25.52	54.0	-9.45	AV	15.00	100	H	Pass
1	14416.000	53.28	25.52	74.0	-20.72	Peak	15.00	100	H	Pass
2**	21820.000	48.07	23.93	54.0	-5.93	AV	5.00	100	H	Pass
2	21820.000	57.16	23.93	74.0	-16.84	Peak	5.00	100	H	Pass
3**	24064.000	49.68	23.28	54.0	-4.32	AV	12.00	100	H	Pass
3	24064.000	59.22	23.28	74.0	-14.78	Peak	12.00	100	H	Pass

Remark:

- 3. Margin = Result (Result =Reading + Factor) –Limit
- 4. Factor= Cable Loss +Antenna Factor-Amplifier Gain

RE_FCC Test Case_FCC 15B 1GHz-25GHz





Temperature:	25 °C	Relative Humidity:	65%
Phase:	Vertical	Test Mode:	Mode 1
Test Voltage:	AC 120V/60Hz		

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	14620.000	43.15	24.14	54.0	-10.85	AV	10.00	100	V	Pass
1	14620.000	53.50	24.14	74.0	-20.50	Peak	10.00	100	V	Pass
2**	20619.999	47.49	23.81	54.0	-6.51	AV	1.00	100	V	Pass
2	20619.999	57.73	23.81	74.0	-16.27	Peak	1.00	100	V	Pass
3**	24028.000	49.65	23.30	54.0	-4.35	AV	6.00	100	V	Pass
3	24028.000	58.55	23.30	74.0	-15.45	Peak	6.00	100	V	Pass

Remark:

- 5. Margin = Result (Result =Reading + Factor)–Limit
- 6. Factor= Cable Loss +Antenna Factor-Amplifier Gain

RE_FCC Test Case_FCC 15B 1GHz-25GHz



*****END OF THE REPORT*****