



Shenzhen Huaxia Testing Technology Co., Ltd

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640
Fax: +86-755-26648637
Website: www.cqa-cert.com

Report Template Version: V03
Report Template Revision Date: Mar.1st, 2017

Test Report

Report No.: CQASZ20180800034E-03
Applicant: Shenzhen DophiGo IoT Technology Co., Ltd.
Address of Applicant: 16/F, Building B1, Nanshan Park, No.1001 Xueyuan Ave, Nanshan District, Shenzhen, China.
Manufacturer: Shenzhen DophiGo IoT Technology Co., Ltd.
Address of Manufacturer: 16/F, Building B1, Nanshan Park, No.1001 Xueyuan Ave, Nanshan District, Shenzhen, China.
Equipment Under Test (EUT):
Product: Smart Doorbell
All Model No.: DPH-DV-200, DPH-DV-100, DPH-DV-2XX Series, DPH-DV-3XX Series, DPH-DV-4XX Series, DPH-DV-5XX Series (XX stands for the numbers from 0~99)
Test Model No.: DPH-DV-200
Brand Name: DophiGo
FCC ID: 2ARG7-DPHDV200
Standards: 47 CFR Part 15, Subpart C
Date of Test: 2018-08-23 to 2018-09-30
Date of Issue: 2018-09-30
Test Result : PASS*

Tested By:

Daisy Qin

(Daisy Qin)

Reviewed By:

Aaron Ma

(Aaron Ma)

Approved By:

Jack Ai
(Jack Ai)



* In the configuration tested, the EUT complied with the standards specified above.

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CQA, this report can't be reproduced except in full.

1 Version

Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20180800034E-03	Rev.01	Initial report	2018-08-14

2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203	ANSI C63.10 (2013)	PASS
Field Strength of the Fundamental Signal	47 CFR Part 15, Subpart C Section 15.231 (b)	ANSI C63.10 (2013)	PASS
Spurious Emissions	47 CFR Part 15, Subpart C Section 15.231 (b)/15.209	ANSI C63.10 (2013)	PASS
20dB Bandwidth	47 CFR Part 15, Subpart C Section 15.231 (c)	ANSI C63.10 (2013)	PASS
Dwell Time	47 CFR Part 15, Subpart C Section 15.231 (a)	ANSI C63.10 (2013)	PASS

3 Contents

	Page
1 VERSION	2
2 TEST SUMMARY	3
3 CONTENTS	4
4 GENERAL INFORMATION.....	5
4.1 CLIENT INFORMATION	5
4.2 GENERAL DESCRIPTION OF EUT	5
4.3 TEST ENVIRONMENT AND MODE	6
4.4 DESCRIPTION OF SUPPORT UNITS	6
4.5 TEST LOCATION	6
4.6 TEST FACILITY	6
4.7 STATEMENT OF THE MEASUREMENT UNCERTAINTY	7
4.8 DEVIATION FROM STANDARDS	7
4.9 ABNORMALITIES FROM STANDARD CONDITIONS	7
4.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER	7
4.11 EQUIPMENT LIST	8
5 TEST RESULTS AND MEASUREMENT DATA.....	9
5.1 ANTENNA REQUIREMENT	9
5.2 CONDUCTED EMISSIONS	10
5.3 SPURIOUS EMISSIONS	14
5.3.1 Duty Cycle.....	14
5.3.2 Spurious Emissions.....	16
5.4 20dB BANDWIDTH	24
5.5 DWELL TIME	26
6 PHOTOGRAPHS - EUT TEST SETUP	28
6.1 RADIATED EMISSION.....	28
6.2 CONDUCTED EMISSION.....	29
7 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS	30

4 General Information

4.1 Client Information

Applicant:	Shenzhen DophiGo IoT Technology Co., Ltd.
Address of Applicant:	16/F, Building B1, Nanshan Park, No.1001 Xueyuan Ave, Nanshan District, Shenzhen, China.
Manufacturer:	Shenzhen DophiGo IoT Technology Co., Ltd.
Address of Manufacturer:	16/F, Building B1, Nanshan Park, No.1001 Xueyuan Ave, Nanshan District, Shenzhen, China.

4.2 General Description of EUT

Product Name:	Smart Doorbell
All Model No.:	DPH-DV-200, DPH-DV-100, DPH-DV-2XX Series, DPH-DV-3XX Series, DPH-DV-4XX Series, DPH-DV-5XX Series (XX stands for the numbers from 0~99)
Test Model No.:	DPH-DV-200
Trade Mark:	DophiGo
Hardware Version:	DPH000_E18B60_ZB_V0.3
Software Version:	dph_vdoorbell_zb_v2.1.5
Sample Type:	<input type="checkbox"/> Mobile <input type="checkbox"/> Portable <input checked="" type="checkbox"/> Fix Location
Operation Frequency:	433.92MHz
Channel Numbers:	1
Modulation Type:	ASK
Antenna Type:	Integral antenna
Antenna Gain:	0dBi
Power Supply:	lithium battery:DC3.7V, Charge by USB

Note: Using the new battery for testing.

Note:

All model: DPH-DV-200, DPH-DV-100, DPH-DV-2XX Series, DPH-DV-3XX Series, DPH-DV-4XX Series, DPH-DV-5XX Series (XX stands for the numbers from 0~99)

Only the model DPH-DV-200 was tested, since the electrical circuit design, layout, components used and internal wiring were identical for the above models, with difference being color of appearance and model name.

4.3 Test Environment and Mode

Operating Environment:	
Temperature:	24.0 °C
Humidity:	52 % RH
Atmospheric Pressure:	1008 mbar
Test mode:	
Transmitting mode:	Keep the EUT in transmitting mode with modulation.

4.4 Description of Support Units

The EUT has been tested independent unit.

4.5 Test Location

All tests were performed at:

Shenzhen Huaxia Testing Technology Co., Ltd.,

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua New District, Shenzhen, Guangdong, China

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L5785)**

CNAS has accredited Shenzhen Huaxia Testing Technology Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **ISED Registration No.: 22984-1**

The 3m Semi-anechoic chamber of Shenzhen Huaxia Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

- **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

- **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

4.7 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd.** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CQA laboratory is reported:

Test	Range	Uncertainty	Notes
Radiated Emission	Below 1GHz	$\pm 5.12\text{dB}$	(1)
Radiated Emission	Above 1GHz	$\pm 4.60\text{dB}$	(1)
Conducted Disturbance	0.15~30MHz	$\pm 3.34\text{dB}$	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

4.8 Deviation from Standards

None.

4.9 Abnormalities from Standard Conditions

None.

4.10 Other Information Requested by the Customer

None.

4.11 Equipment List


Item	Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Due Date
1	EMI Test Receiver	R&S	ESR7	CQA-005	2019/9/25
2	Spectrum analyzer	R&S	FSU26	CQA-038	2019/9/25
3	Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2019/9/25
4	Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2019/9/25
5	Loop antenna	Schwarzbeck	FMZB1516	CQA-087	2019/9/25
6	Bilog Antenna	R&S	HL562	CQA-011	2019/9/25
7	Horn Antenna	R&S	HF906	CQA-012	2019/9/25
8	Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2019/9/25
9	Coax cable (9KHz~40GHz)	CQA	RE-low-01	CQA-077	2019/9/25
10	Coax cable (9KHz~40GHz)	CQA	RE-high-02	CQA-078	2019/9/25
11	Antenna Connector	CQA	RFC-01	CQA-080	2019/9/25
12	Power divider	CQA	PWD-2533-02-SMA-79	CQA-067	2019/9/25
13	RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2019/9/25
14	EMI Test Receiver	R&S	ESPI3	CQA-005	2019/9/25
15	LISN	R&S	ENV216	CQA-003	2019/9/25
16	Coaxial cable (9KHz~300MHz)	CQA	N/A	CQA-C009	2019/9/25

Note:

The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.


5 Test results and Measurement Data

5.1 Antenna Requirement

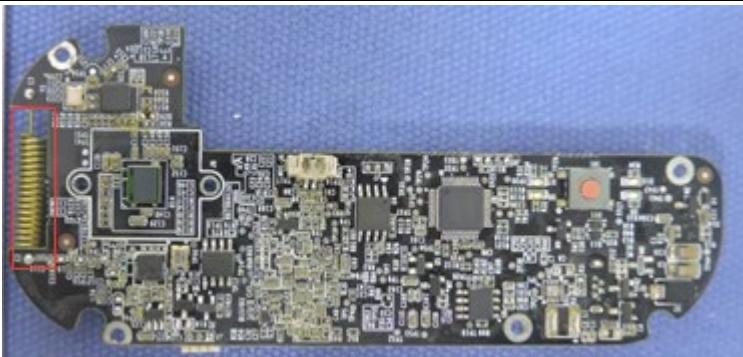Standard requirement:	47 CFR Part 15C Section 15.203
<p>15.203 requirement:</p> <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p>	
EUT Antenna:	
The antenna is integral antenna. The best case gain of the antenna is 0dBi.	

5.2 Conducted Emissions


Test Requirement:	47 CFR Part 15C Section 15.207		
Test Method:	ANSI C63.10: 2009		
Test Frequency Range:	150kHz to 30MHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test Procedure:	<ol style="list-style-type: none"> 1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane. 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2009 on conducted measurement. 		

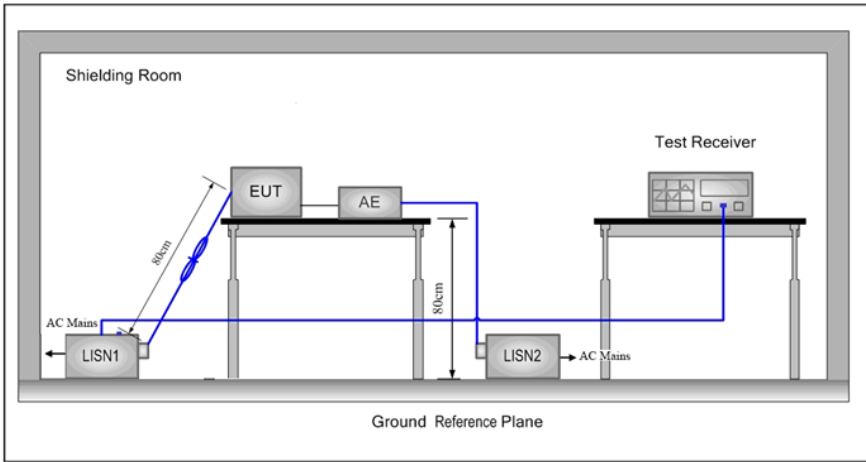Test Setup:	 <p>The diagram illustrates the test setup within a Shielding Room. It shows an EUT (Equipment Under Test) and an AE (Antenna) connected by a cable. A Test Receiver is positioned to receive signals from the AE. LISN1 (Line Impedance Stabilization Network) is connected to the AC Mains and the EUT. LISN2 is connected to the AE and the AC Mains. The distance between the EUT and the Test Receiver is 80cm. The distance between the AE and the Test Receiver is 80cm. The ground reference plane is indicated.</p>
Test Mode:	<p>Transmitting with GFSK modulation. Charge + Transmitting mode.</p>
Test Results:	<p>Pass</p>

Measurement Data

Live line:

90.0 dBuV

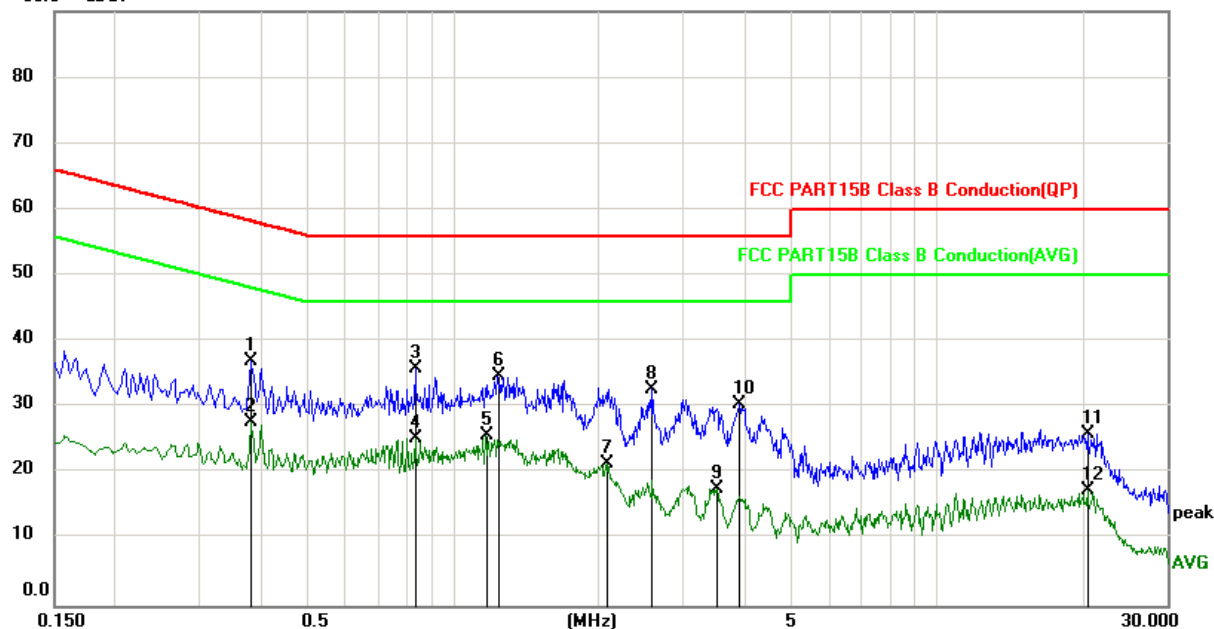


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.3820	27.27	9.74	37.01	58.24	-21.23	peak	
2		0.3820	17.96	9.74	27.70	48.24	-20.54	AVG	
3	*	0.8380	26.07	9.74	35.81	56.00	-20.19	peak	
4		0.8380	15.56	9.74	25.30	46.00	-20.70	AVG	
5		1.1700	16.01	9.75	25.76	46.00	-20.24	AVG	
6		1.2420	25.05	9.75	34.80	56.00	-21.20	peak	
7		2.0820	11.74	9.76	21.50	46.00	-24.50	AVG	
8		2.5860	22.95	9.77	32.72	56.00	-23.28	peak	
9		3.5140	7.97	9.77	17.74	46.00	-28.26	AVG	
10		3.9140	20.80	9.78	30.58	56.00	-25.42	peak	
11		20.5700	16.17	9.89	26.06	60.00	-33.94	peak	
12		20.5700	7.48	9.89	17.37	50.00	-32.63	AVG	

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral line:

90.0 dBuV

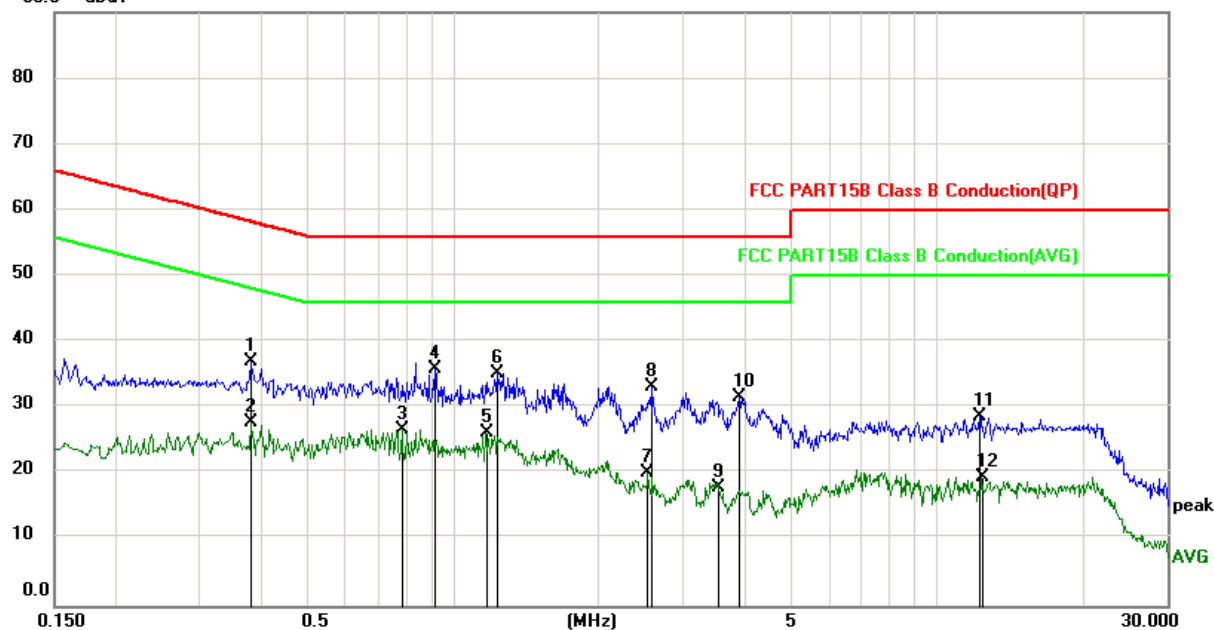


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.3810	27.27	9.74	37.01	58.26	-21.25	peak	
2		0.3810	17.96	9.74	27.70	48.26	-20.56	AVG	
3	*	0.7832	17.02	9.74	26.76	46.00	-19.24	AVG	
4		0.9183	26.23	9.75	35.98	56.00	-20.02	peak	
5		1.1654	16.51	9.75	26.26	46.00	-19.74	AVG	
6		1.2357	25.55	9.75	35.30	56.00	-20.70	peak	
7		2.5266	10.31	9.77	20.08	46.00	-25.92	AVG	
8		2.5807	23.45	9.77	33.22	56.00	-22.78	peak	
9		3.5466	8.02	9.78	17.80	46.00	-28.20	AVG	
10		3.9014	21.80	9.78	31.58	56.00	-24.42	peak	
11		12.2530	18.92	9.82	28.74	60.00	-31.26	peak	
12		12.3834	9.62	9.82	19.44	50.00	-30.56	AVG	

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

5.3 Spurious Emissions

5.3.1 Duty Cycle

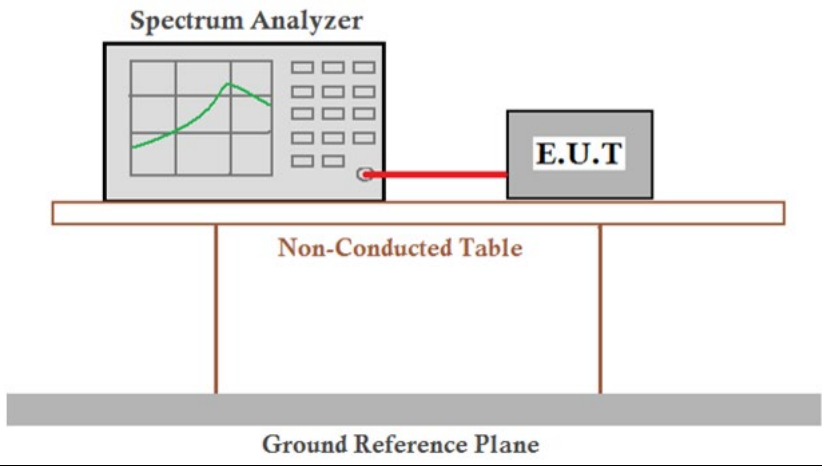Test Requirement:	47 CFR Part 15C Section 15.35 (c)
Test Method:	ANSI C63.10:2013
Test Setup:	
Limit:	N/A
Test Mode:	Transmitting mode
Instruments Used:	Refer to section 4.11 for details
Test Results:	Pass

Duty cycle numbers	T period (ms)	T on time (ms)	Duty cycle
3	22.678	13.701	0.604

Note: T on time= 4.567x3=13.701ms,

Duty cycle=T on time / T period

5.3.2 Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.231(b) and 15.209				
Test Method:	ANSI C63.10: 2013				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
Peak		1MHz	10Hz	Average	
Limit: (Spurious Emissions)	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.					
Limit: (Field strength of the fundamental signal)		Frequency	Limit (dBuV/m @3m)	Remark	
		433.92MHz	80.8	Average Value	
			100.8	Peak Value	
Test Procedure:	a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.				

	<p>Note: For the radiated emission test above 1GHz:</p> <p>Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.</p> <ol style="list-style-type: none"> The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. The radiation measurements are performed in X, Y, Z axis positioning. And found the Z axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
Test Setup:	

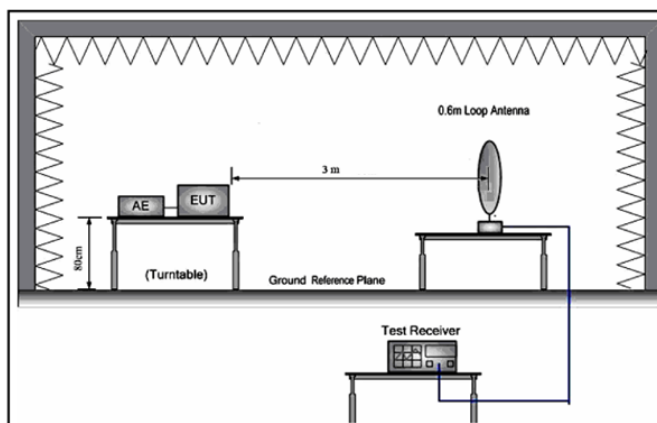


Figure 1. Below 30MHz

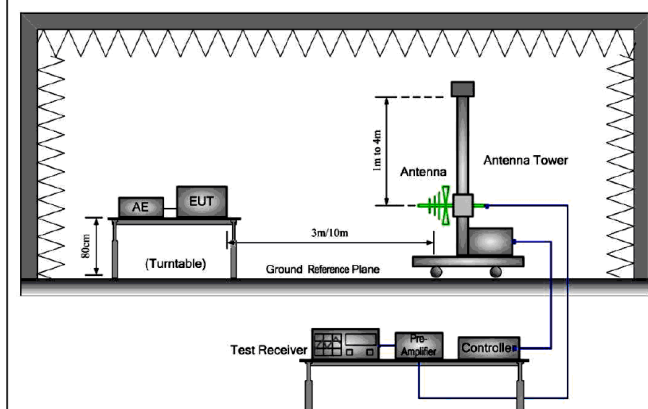


Figure 2. 30MHz to 1GHz

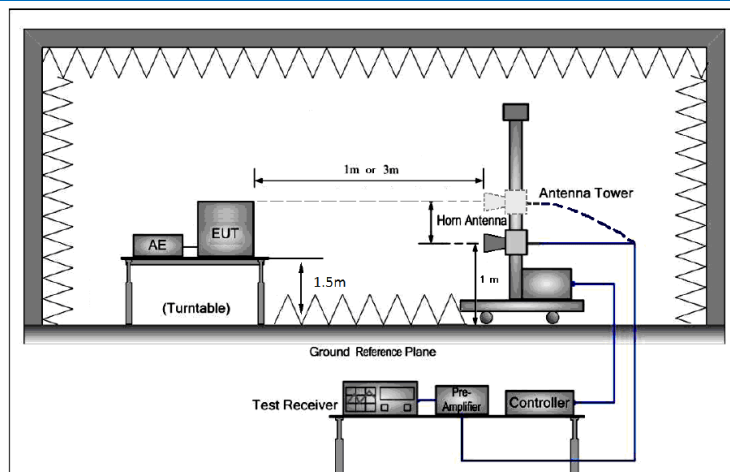


Figure 3. Above 1 GHz

Test Mode:	Transmitting mode
Instruments Used:	Refer to section 4.11 for details
Test Results:	Pass

Measurement Data

5.3.2.1 Field Strength Of The Fundamental Signal

Average value:	
Calculate Formula:	Average value=Peak value + PDCF
	PDCF=20 log(Duty cycle)
	Duty cycle= T on time / T period
Test data:	T on time =13.701ms
	T period =22.678ms
	PDCF= -4.38

Antenna polarization: Horizontal						
Frequency (MHz)	Read Level (dBuV)	Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
433.92	63.14	15.16	78.30	108.8	-30.5	Peak
433.92	-	-	73.92	80.8	-6.88	Average

Antenna polarization: Vertical						
Frequency (MHz)	Read Level (dBuV)	Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
433.92	55.08	15.16	70.24	108.8	-38.56	Peak
433.92	-	-	65.86	80.8	-14.94	Average

Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

5.3.2.2 Spurious Emissions


9KHz-30MHz

9 kHz~30 MHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement

The measurements with active loop antenna were greater than 20dB below the limit, so the test data were not recorded in the test report.


Below 1GHz (30MHz-1GHz)

Horizontal

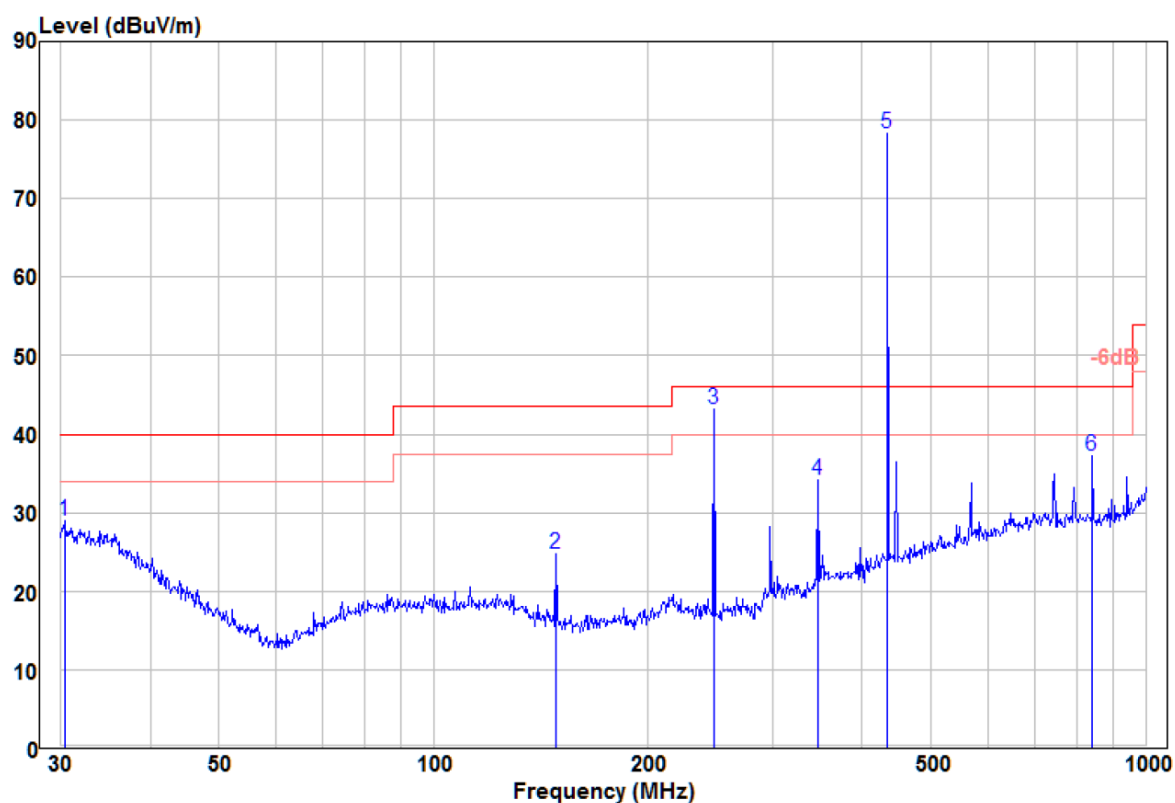

	Freq	Read Level	Ant Factor	Cable Loss	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dB	dB/m	dBuV/m	dBuV/m	dB		
1	30.32	10.13	18.57	0.31	18.88	29.01	40.00	-10.99	Peak	HORIZONTAL
2	148.44	16.36	7.80	0.57	8.37	24.73	43.50	-18.77	Peak	HORIZONTAL
3 !	247.68	34.10	8.38	0.73	9.11	43.21	46.00	-2.79	Peak	HORIZONTAL
4	346.81	20.77	12.41	0.90	13.31	34.08	46.00	-11.92	Peak	HORIZONTAL
5 pp	434.07	63.14	14.12	1.04	15.16	78.30	46.00	32.30	Peak	HORIZONTAL
6	842.13	16.81	18.95	1.55	20.50	37.31	46.00	-8.69	Peak	HORIZONTAL


Vertical

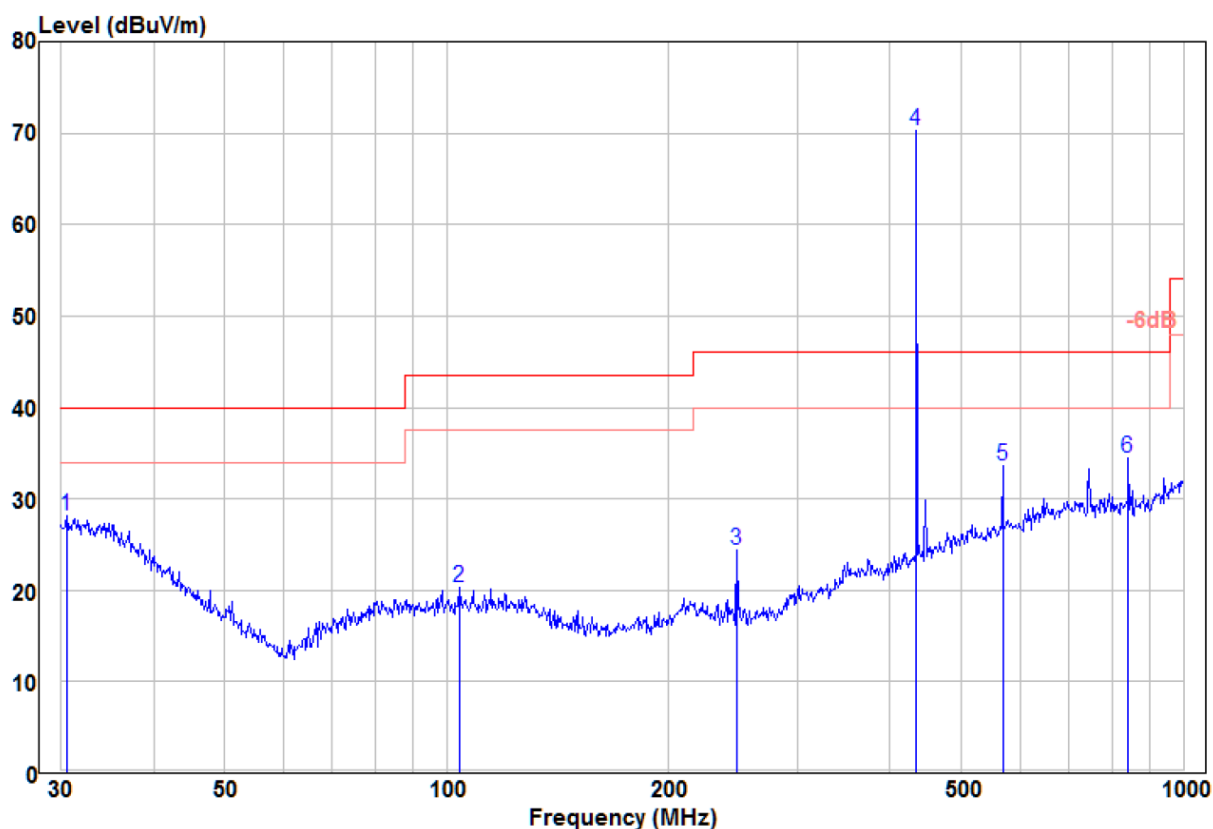

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	30.53	9.22	18.87	28.09	40.00	-11.91	Peak	VERTICAL
2	104.17	9.85	10.43	20.28	43.50	-23.22	Peak	VERTICAL
3	247.68	15.29	9.11	24.40	46.00	-21.60	Peak	VERTICAL
4 pp	434.07	55.08	15.16	70.24	46.00	24.24	Peak	VERTICAL
5	568.61	15.83	17.73	33.56	46.00	-12.44	Peak	VERTICAL
6	842.13	14.03	20.50	34.53	46.00	-11.47	Peak	VERTICAL


Above 1GHz(1GHz-5GHz)

Horizontal

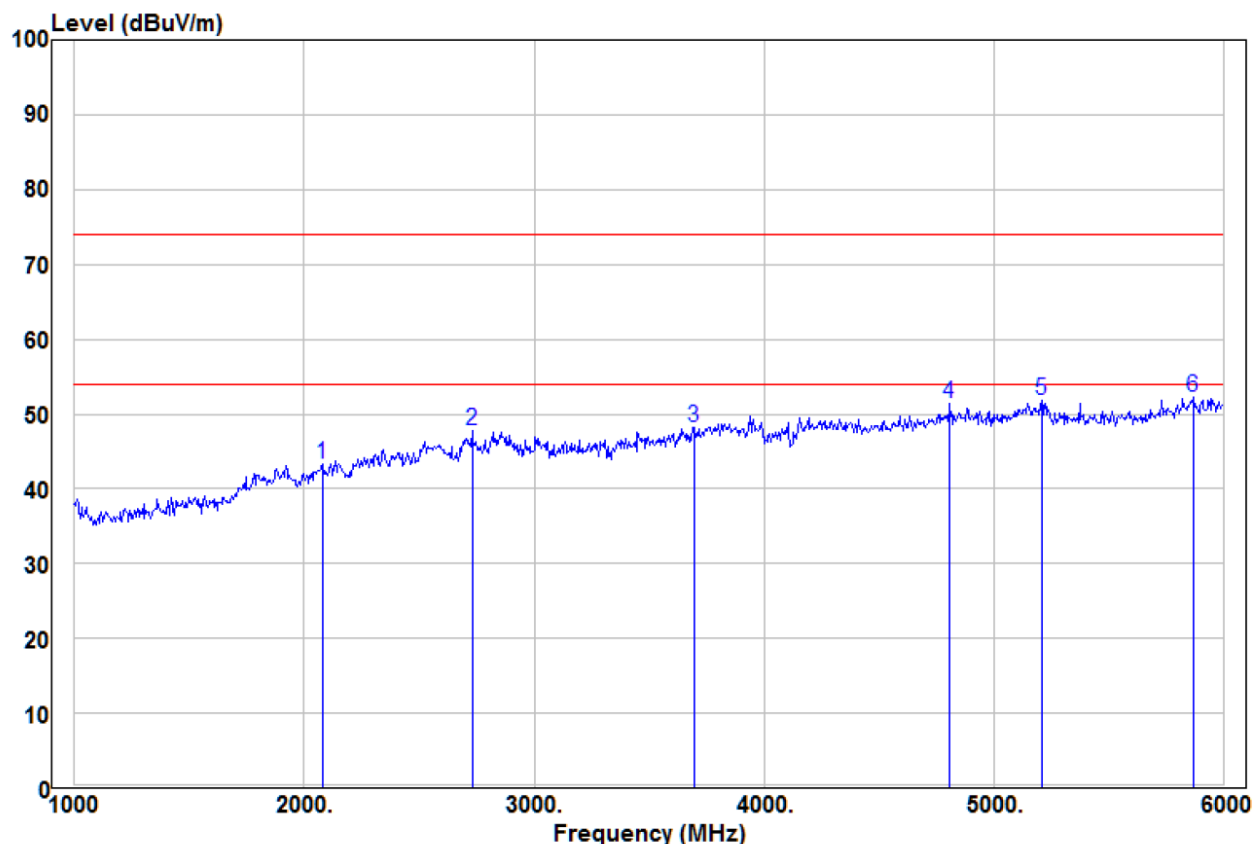

	Read Freq	Ant Level	Ant Factor	Cable Loss	Cable Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dB	dB/m	dBuV/m	dBuV/m	dB		
1	2080.00	53.26	27.57	0.00	-10.02	43.24	74.00	-30.76	Peak	HORIZONTAL
2	2730.00	57.07	28.90	0.00	-9.40	47.67	74.00	-26.33	Peak	HORIZONTAL
3	3700.00	53.66	32.25	0.00	-5.45	48.21	74.00	-25.79	Peak	HORIZONTAL
4	4810.00	55.68	32.93	0.00	-4.32	51.36	74.00	-22.64	Peak	HORIZONTAL
5	5210.00	54.75	33.94	0.00	-2.93	51.82	74.00	-22.18	Peak	HORIZONTAL
6 pp	5870.00	54.40	34.89	0.00	-2.23	52.17	74.00	-21.83	Peak	HORIZONTAL

Vertical:

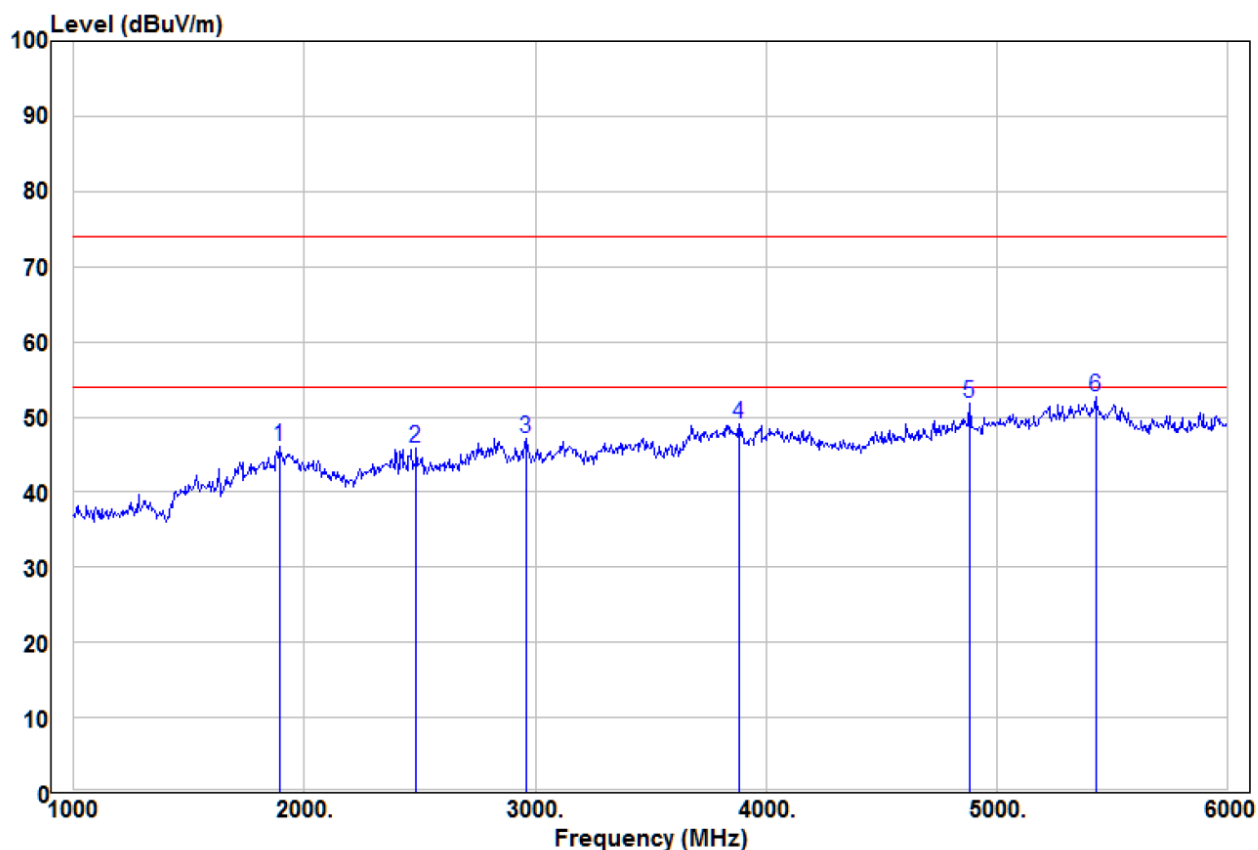


	Freq	Read Level	Ant Factor	Cable Loss	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dB	dB/m	dBuV/m	dBuV/m	dB		
1	1890.00	53.46	28.04	0.00	-7.48	45.98	74.00	-28.02	Peak	VERTICAL
2	2485.00	55.01	28.90	0.00	-9.26	45.75	74.00	-28.25	Peak	VERTICAL
3	2965.00	55.29	30.14	0.00	-8.09	47.20	74.00	-26.80	Peak	VERTICAL
4	3885.00	54.09	32.70	0.00	-4.98	49.11	74.00	-24.89	Peak	VERTICAL
5	4885.00	55.83	33.21	0.00	-4.10	51.73	74.00	-22.27	Peak	VERTICAL
6 pp	5430.00	55.92	34.40	0.00	-3.33	52.59	74.00	-21.41	Peak	VERTICAL

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 2) The disturbance above 5GHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.
- 3) As shown in this section, for frequencies above 1GHz, the field the strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted aver average limits. Specified above by more than 20dB under any condition of modulation. So, only the peak measurements were show in the report.


5.4 20dB Bandwidth

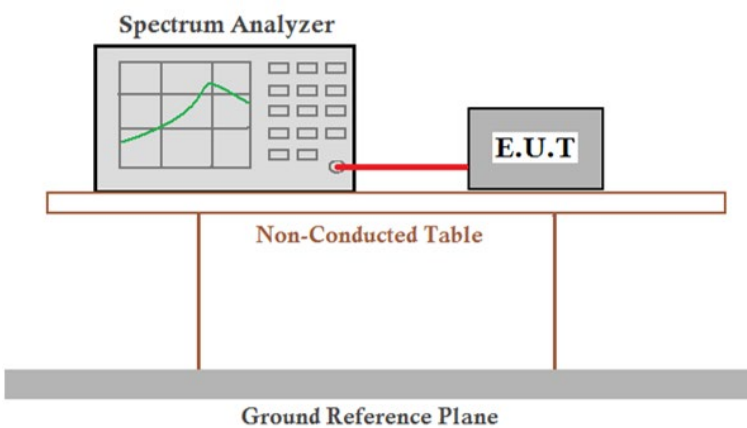Test Requirement:	47 CFR Part 15C Section 15.231 (c)
Test Method:	ANSI C63.10:2013
Limit:	The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.
Test Setup:	
Test Mode:	Transmitting mode
Instruments Used:	Refer to section 4.11 for details
Test Results:	Pass


Measurement Data

20dB bandwidth (MHz)	Limit (MHz)	Results
0.133	1.0849	PASS

Test plot as follows:

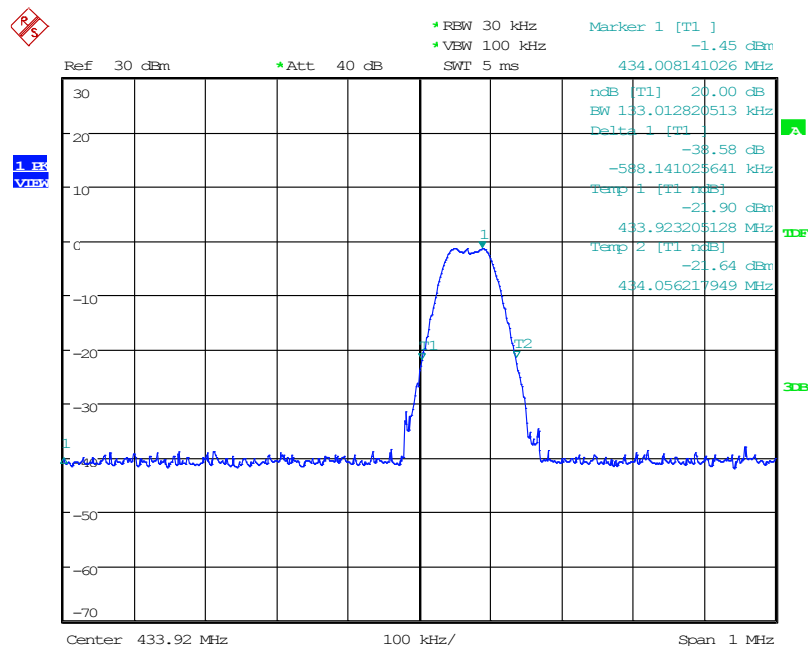

5.5 Dwell time

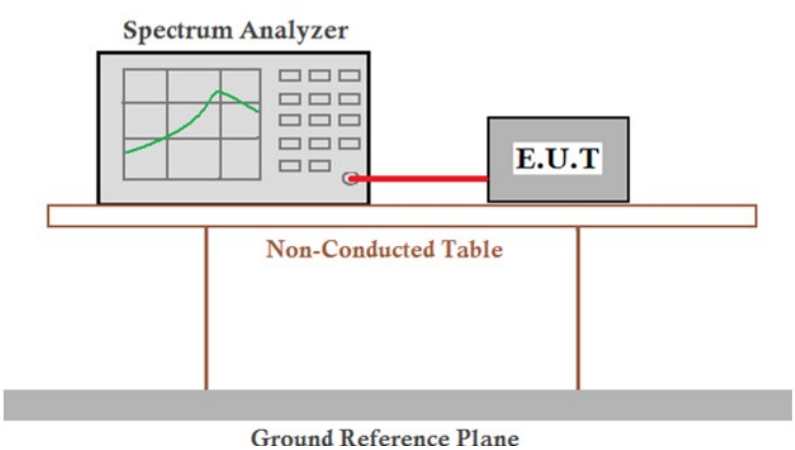Test Requirement:	47 CFR Part 15C Section 15.231 (a)
Test Method:	ANSI C63.10:2013
Test Setup:	
Test Mode:	Transmitting mode
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass

Requirements:

1. Regulation 15.231 (a) The provisions of this Section are restricted to periodic operation within the band 40.66~40.70 MHz and above 70 MHz. Except as shown in paragraph (e) of this Section, the intentional radiator is restricted to the transmission of a control signal such as those used with alarm systems, door openers, remote switches, etc. Radio control of toys is not permitted. Continuous transmissions, such as voice or video, and data transmissions are not permitted. The prohibition against data transmissions does not preclude the use of recognition codes. Those codes are used to identify the sensor that is activated or to identify the particular component as being part of the system.

Result:

The EUT is a remote switch without audio or video transmitted.


The EUT meets the requirements of this section.

2. Regulation 15.231 (a1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

Result:

Test item	Limit (MHz)	Results
Transmitting time	$\leq 5S$	0.6899S

Test plot as follows:

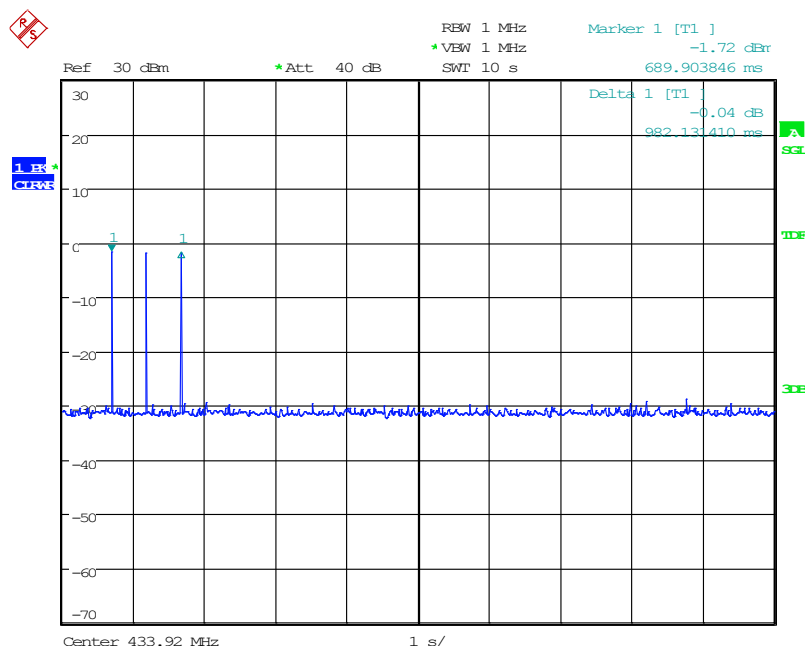

3. Regulation 15.231 (a2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.

Result:

The EUT does not have automatic transmission.

4. Regulation 15.231 (a3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions to determine system integrity of transmitters used in security or safety applications are allowed if the periodic rate of transmission does not exceed one transmission of not more than one second duration per hour for each transmitter.

Result:

The EUT does not employ periodic transmission.

5. Regulation 15.231 (a4) Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition.


Result:

This section is not applicable to the EUT.


6 Photographs - EUT Test Setup

6.1 Radiated Emission

30MHz~1GHz:

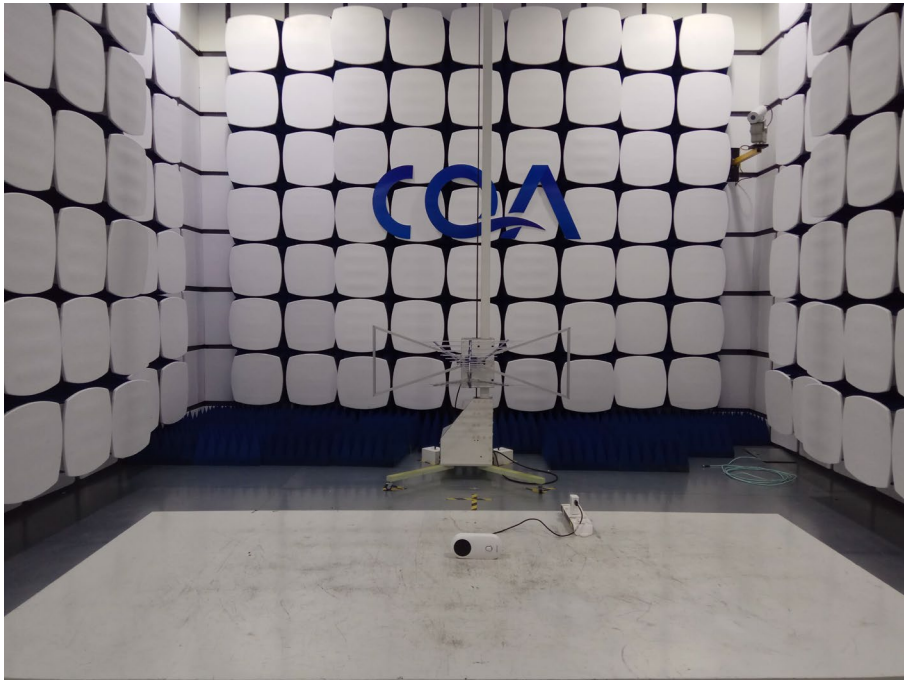

Above 1GHz:

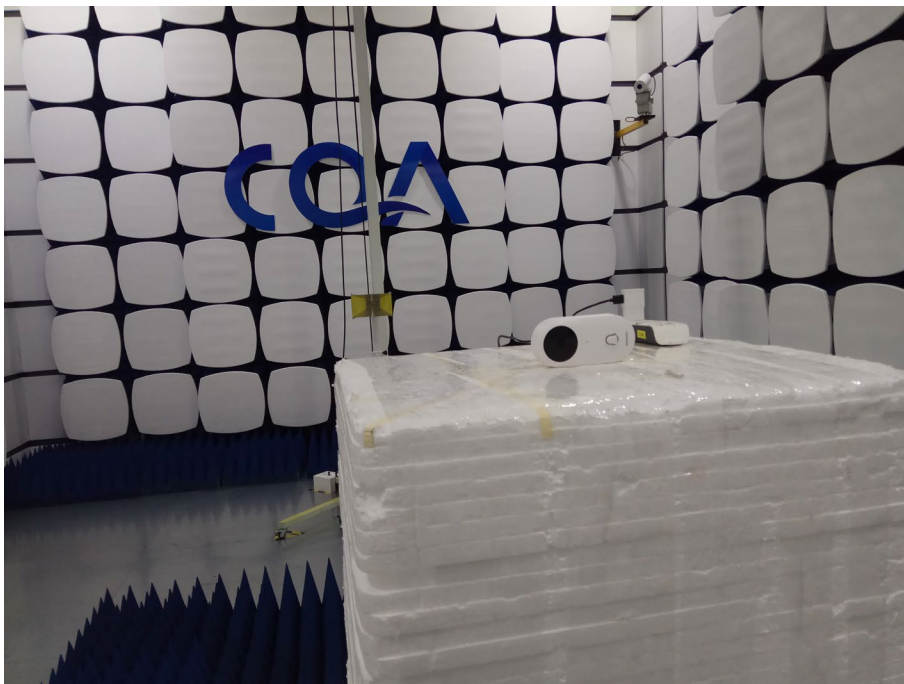

6.2 Conducted Emission



7 Photographs - EUT Constructional Details

