



Shenzhen GUOREN Certification Technology Service Co., Ltd.

101#, Building K & Building T, The Second Industrial Zone, Jiazitang Community,
Fenghuang Street, Guangming District, Shenzhen, China


FCC PART 15 SUBPART CTEST REPORT

FCC PART 15.236

Report Reference No......: **GRCTR210702002-01**

FCC ID.....: **2ARN3-WMX-20**

Compiled by
(position+printedname+signature)....: Testing Engineer Jimmy Wang



Supervised by
(position+printedname+signature).....: Project Engineer Kelley Zhang



Approved by
(position+printedname+signature).....: Manager Sam Wang



Date of issue.....: Aug. 02, 2021

Representative Laboratory Name .: **Shenzhen GUOREN Certification Technology Service Co., Ltd.**

Address.....: 101#, Building K & Building T, The Second Industrial Zone,
Jiazitang Community, Fenghuang Street, Guangming District,
Shenzhen, China

Applicant's name.....: **Shenzhen Jiayz photo industrial ., Ltd**

Address: A16 Building,Intelligent Terminal Industrial Park of Silicon Valley
Power, Guanlan, Longhua District, Shenzhen, China

Test specification

Standard: **FCC Part 15.236**

Shenzhen GUOREN Certification Technology Service Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen GUOREN Certification Technology Service Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen GUOREN Certification Technology Service Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description

Trade Mark: **MOVO**

Manufacturer: Shenzhen Jiayz photo industrial ., Ltd

Model/Type reference.....: **WMX-20**

Listed Models: **WMX-20 DUO,WMX-20-SP,WMX-20 TXLR,WMX-20 TH**

Modulation Type: **DQPSK**

Operation Frequency.....: Transmitter A:556.710-575.980MHz
Transmitter B:576.390-595.660MHz

Rating: **DC 3.0V From Battery**

Result.....: **PASS**

TEST REPORT

Test Report No. : GRCTR210702002-01	Aug. 02, 2021 Date of issue
--	--------------------------------

Equipment under Test : Wireless Microphone

Model /Type : WMX-20

Listed Models : WMX-20 DUO,WMX-20-SP,WMX-20 TXLR,WMX-20 TH

Model Declaration : PCB board, structure and internal of these model(s) are the same, So no additional models were tested.

Applicant : **Shenzhen Jiayz photo industrial ., Ltd**

Address : A16 Building,Intelligent Terminal Industrial Park of Silicon Valley Power, Guanlan, Longhua District, Shenzhen, China

Manufacturer : **Shenzhen Jiayz photo industrial ., Ltd**

Address : A16 Building,Intelligent Terminal Industrial Park of Silicon Valley Power, Guanlan, Longhua District, Shenzhen, China

Test Result:	PASS
---------------------	-------------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1	<u>TEST STANDARDS</u>	<u>4</u>
2	<u>SUMMARY</u>	<u>5</u>
2.1	General Remarks	5
2.2	Product Description	5
2.3	Test Sample	5
2.4	Equipment Under Test	5
2.5	Short description of the Equipment under Test (EUT)	5
2.6	EUT operation mode	6
2.7	Block Diagram of Test Setup	6
2.8	Related Submittal(s) / Grant (s)	7
2.9	Modifications	7
3	<u>TEST ENVIRONMENT</u>	<u>8</u>
3.1	Address of the test laboratory	8
3.2	Test Facility	8
3.3	Environmental conditions	8
3.4	Summary of measurement results	8
3.5	Statement of the measurement uncertainty	9
3.6	Equipments Used during the Test	9
4	<u>TEST CONDITIONS AND RESULTS</u>	<u>11</u>
4.1	AC Power Conducted Emission	11
4.2	Maximum Output Power	12
4.3	Occupied Bandwidth	14
4.4	Necessary Bandwidth	17
4.5	Transmitter spurious emissions	24
4.6	Frequency Stability	27
5	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>30</u>
6	<u>PHOTOS OF THE EUT</u>	<u>31</u>

1 TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.236](#): Operation of wireless Wireless Microphones in the bands 54-72 MHz, 76-88 MHz, 174-216 MHz, 470-608 MHz and 614-698 MHz.

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

2 SUMMARY

2.1 General Remarks

Date of receipt of test sample	:	Jul. 20, 2021
Testing commenced on	:	Jul. 20, 2021
Testing concluded on	:	Aug. 02, 2021

2.2 Product Description

Product Name:	Wireless Microphone
Model/Type reference:	WMX-20
Power supply:	DC 3V from battery
Hardware version:	V1.0
Software version:	V1.0
Testing sample ID:	GRCTR210702002-01-1# (Engineer sample), GRCTR210702002-01-2#(Normal sample)
Wireless Microphone	
Frequency:	Transmitter A:556.710-575.980MHz Transmitter B:576.390-595.660MHz
Channel number	Transmitter A:48 channels Transmitter B:48 channels
Modulation Type:	DQPSK
Antenna type:	External Antenna
Antenna gain:	2.0dBi

Note: For more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.3 Test Sample

The application provides 2 samples to meet requirement.

Sample Number	Description
GRCTR210702002-01#	Engineer sample – continuous transmit
GRCTR210702002-01#	Normal sample – Intermittent transmit

2.4 Equipment Under Test

Power supply system utilised

Power supply voltage	:	<input type="radio"/> 230V/ 50 Hz	<input type="radio"/> 120V/60Hz
		<input type="radio"/> 12 V DC	<input type="radio"/> 24 V DC
		<input checked="" type="radio"/> Other (specified in blank below)	

DC 3.0V from battery

2.5 Short description of the Equipment under Test (EUT)

This is a Wireless Microphone.

For more details, refer to the user's manual of the EUT.

2.6 EUT operation mode

The EUT has been tested under typical operating condition. The EUT will staying in continuous transmitting when switch to the specific test frequency.

Operation Frequency:

TransmitterA:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	556.710	13	561.640	25	566.550	37	571.470
2	557.120	14	562.040	26	566.960	38	571.880
3	557.530	15	562.450	27	567.370	39	572.290
4	557.940	16	562.860	28	567.780	40	572.700
5	558.350	17	563.270	29	568.190	41	573.110
6	558.760	18	563.680	30	568.600	42	573.520
7	559.170	19	564.090	31	569.010	43	573.930
8	559.580	20	564.500	32	569.420	44	574.340
9	559.990	21	564.910	33	569.830	45	574.750
10	560.400	22	565.320	34	570.240	46	575.160
11	560.810	23	565.730	35	570.650	47	575.570
12	561.220	24	566.140	36	571.060	48	575.980


TransmitterB:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	576.390	13	581.310	25	586.230	37	591.150
2	576.800	14	581.720	26	586.640	38	591.560
3	577.210	15	582.130	27	587.050	39	591.970
4	577.620	16	582.540	28	587.460	40	592.380
5	578.030	17	582.950	29	587.870	41	592.790
6	578.440	18	583.360	30	588.280	42	593.200
7	578.850	19	583.770	31	588.690	43	593.610
8	579.260	20	584.180	32	589.100	44	594.020
9	579.670	21	584.590	33	589.510	45	594.430
10	580.080	22	585.000	34	589.920	46	594.840
11	580.490	23	585.410	35	590.330	47	595.250
12	580.900	24	585.820	36	590.740	48	595.660

Testing Frequency

TransmitterA		TransmitterB	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	556.710	1	576.390
24	556.140	24	585.820
48	575.980	48	595.660

2.7 Block Diagram of Test Setup



2.8 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for the device filing to comply with Section 15.236 of the FCC Part 15, Subpart C Rules.

2.9 Modifications

No modifications were implemented to meet testing criteria.

3 TEST ENVIRONMENT

3.1 Address of the test laboratory

Shenzhen GUOREN Certification Technology Service Co., Ltd.

101#, Building K & Building T, The Second Industrial Zone, Jiazitang Community, Fenghuang Street, Guangming District, Shenzhen, China

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 920798

Designation Number: CN1304

Shenzhen GUOREN Certification Technology Service Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA-Lab Cert. No.: 6202.01

Shenzhen GUOREN Certification Technology Service Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010.

3.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

3.4 Summary of measurement results

Test Specification clause	Test case	Test result
§15.236(d)	RF Power Output	Compliant
§15.236(f)(2)	Occupied Bandwidth	Compliant
§15.236(g)	Necessary Bandwidth	Compliant
§15.236(g)	Spurious emissions	Compliant
§15.236(f)(3)	Frequency Stability	Compliant
§15.207	Conducted Emissions	N/A

Remark:

1. The measurement uncertainty is not included in the test result.
2. We tested all test mode and recorded worst case in report

3.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 2 " and is documented in the Shenzhen GUOREN Certification Technology Service Co., Ltd.quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen GUOREN Certification Technology Service Co., Ltd.:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10 dB	(1)
Radiated Emission	1~18GHz	4.32 dB	(1)
Radiated Emission	18-40GHz	5.54 dB	(1)
Conducted Disturbance	0.15~30MHz	3.12 dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.6 Equipments Used during the Test


Test Equipment	Manufacturer	Model No.	Equipment No.	Calibration Date	Calibration Due Date
LISN	R&S	ENV216	GRCTEE009	2020/11/3	2021/11/2
LISN	R&S	ENV216	GRCTEE010	2020/11/3	2021/11/2
EMI Test Receiver	R&S	ESPI	GRCTEE017	2020/11/3	2021/11/2
EMI Test Receiver	R&S	ESCI	GRCTEE008	2020/11/3	2021/11/2
Spectrum Analyzer	Agilent	N9020A	GRCTEE002	2020/11/3	2021/11/2
Spectrum Analyzer	R&S	FSP	GRCTEE003	2020/11/19	2021/11/18
Vector Signal generator	Agilent	N5181A	GRCTEE007	2020/11/3	2021/11/2
Analog Signal Generator	R&S	SML03	GRCTEE006	2020/11/3	2021/11/2
Universal Radio Communication	CMW500	R&S	GRCTEE001	2020/11/3	2021/11/2
Climate Chamber	QIYA	LCD-9530	GRCTES016	2020/11/1	2021/10/31
Ultra-Broadband Antenna	Schwarzbeck	VULB9163	GRCTEE018	2020/10/25	2023/10/24
Horn Antenna	Schwarzbeck	BBHA 9120D	GRCTEE019	2020/10/25	2023/10/24
Loop Antenna	Zhinan	ZN30900C	GRCTEE020	2020/10/25	2023/10/24
Horn Antenna	Beijing Hangwei Dayang	OBH100400	GRCTEE049	2021/1/18	2024/1/17
Amplifier	Schwarzbeck	BBV 9745	GRCTEE021	2021/1/18	2022/1/17
Amplifier	Taiwan chengyi	EMC051845B	GRCTEE022	2020/11/19	2021/11/18
Temperature/Humidity Meter	Huaguan	HG-308	GRCTES037	2020/11/1	2021/10/31
Directional coupler	NARDA	4226-10	GRCTEE004	2020/11/3	2021/11/2

High-Pass Filter	XingBo	XBLBQ-GTA18	GRCTEE053	2020/11/3	2021/11/2
High-Pass Filter	XingBo	XBLBQ-GTA27	GRCTEE054	2020/11/3	2021/11/2
Automated filter bank	Tonscend	JS0806-F	GRCTEE055	2020/11/3	2021/11/2
EMI Test Software	ROHDE & SCHWARZ	ESK1-V1.71	GRCTEE060	N/A	N/A
EMI Test Software	Fera	EZ-EMC	GRCTEE061	N/A	N/A

4 TEST CONDITIONS AND RESULTS

4.1 AC Power Conducted Emission

TEST CONFIGURATION

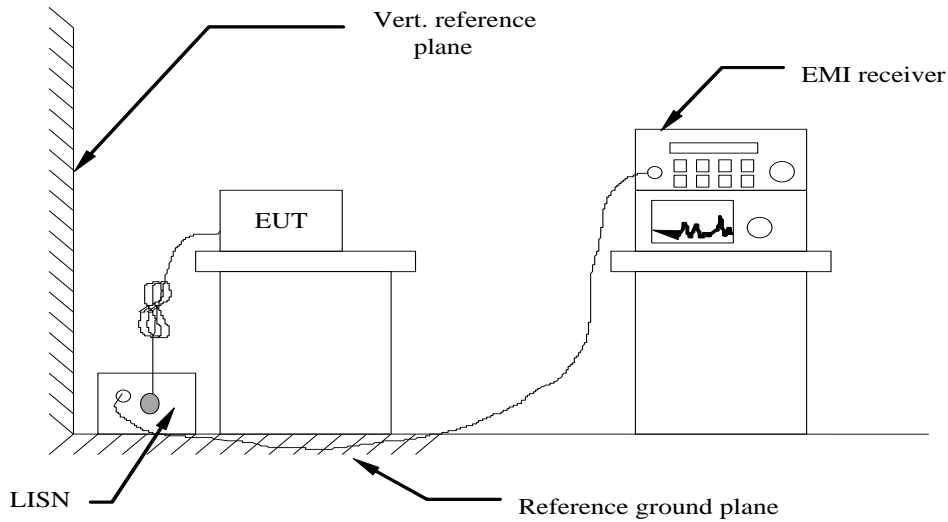

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2013
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013
- 4 The EUT received DC12V power from adapter, the adapter received AC120V/60Hz and AC 240V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST RESULTS

Not applicable.

4.2 Maximum Output Power

Limit

The maximum radiated power shall not exceed the following values:


- (1) In the bands allocated and assigned for broadcast television and in the 600 MHz service band: 50 mW EIRP
- (2) In the 600 MHz guard band and the 600 MHz duplex gap: 20 mW EIRP.

Test Procedure

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all test transmit frequencies were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as (P_r).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
5. An amplifier may be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (P_{cl}), the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test. The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} + P_{Ag} - P_{cl} + G_a$$
6. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
7. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.

Test Configuration

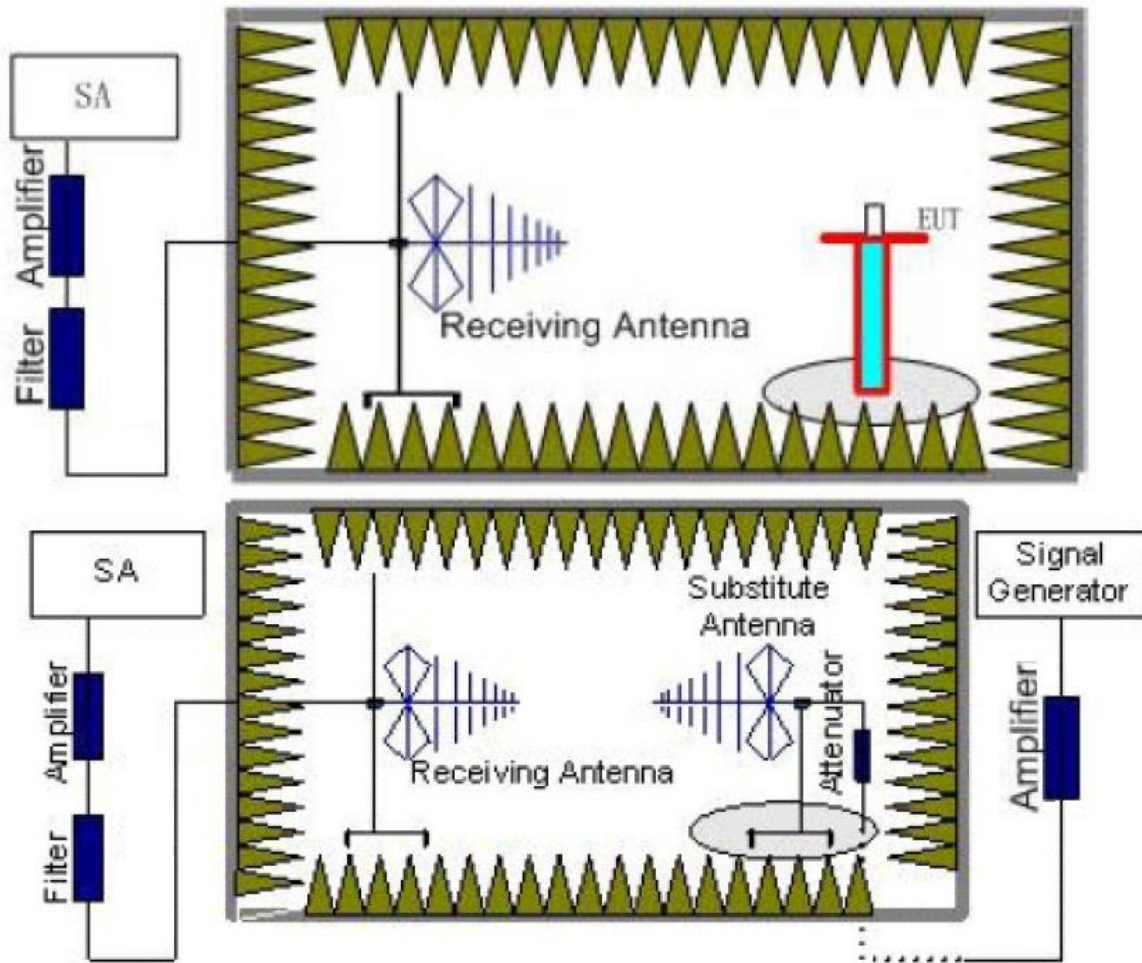

Test Results

Remark;

The field strength of radiation emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The data show in this report only with the worst case setup. After exploratory measurement the worst case of Z axis and receiver antenna at vertical polarization was reported.

Transmit A:

Test Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dBi)	P _{Ag} (dB)	EIRP (dBm)	EIRP (mW)	FCC Limit (mW)	Polarization
566.710	-27.59	1.75	8.01	26.62	5.29	3.381	50	V
566.140	-28.12	1.75	8.01	26.62	4.76	2.992	50	V
566.980	-28.38	1.75	8.01	26.62	4.5	2.818	50	V

Transmit B

Test Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dBi)	P _{Ag} (dB)	EIRP (dBm)	EIRP (mW)	FCC Limit (mW)	Polarization
576.390	-26.32	1.75	8.01	26.62	6.56	4.529	50	V
585.820	-27.19	1.75	8.01	26.62	5.69	3.707	50	V
595.660	-27.26	1.75	8.01	26.62	5.62	3.648	50	V

Remark: $EIRP = P_{Mea}(dBm) + P_{Ag}(dB) - P_{cl}(dB) + G_a(dBi)$

4.3 Occupied Bandwidth


Limit

One or more adjacent 25 kHz segments within the assignable frequencies may be combined to form a channel whose maximum bandwidth shall not exceed 200 kHz. The operating bandwidth shall not exceed 200 kHz.

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 3 KHz RBW and 10 KHz VBW.

Test Configuration




Test Results

Modulation	Frequency (MHz)	99% OBW (KHz)	Limit (KHz)	Result
DQPSK	556.710	65.512	200	Pass
DQPSK	566.140	61.046	200	Pass
DQPSK	575.980	62.420	200	Pass

Modulation	Frequency (MHz)	99% OBW (KHz)	Limit (KHz)	Result
DQPSK	576.390	62.213	200	Pass
DQPSK	585.820	62.307	200	Pass
DQPSK	595.660	60.955	200	Pass

Transmit A

Plots of Occupied Bandwidth

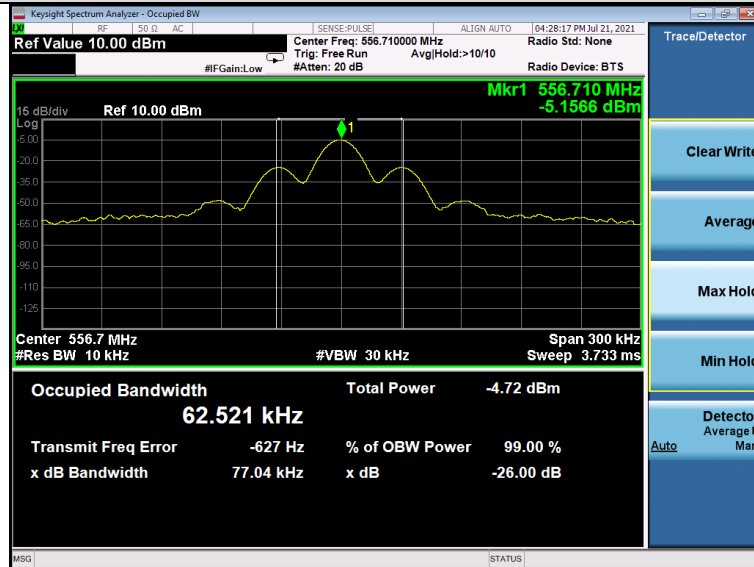

556.710 MHz




566.140 MHz




575.980 MHz

Transmit B

Plots of Occupied Bandwidth

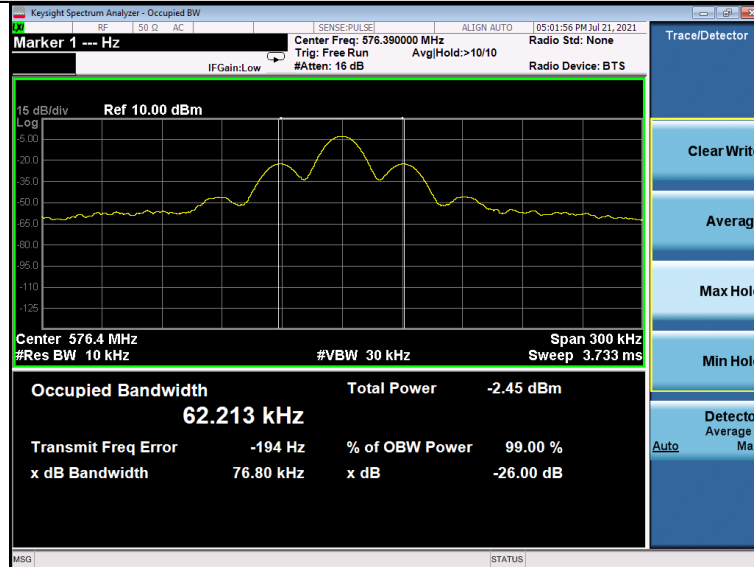

576.390 MHz

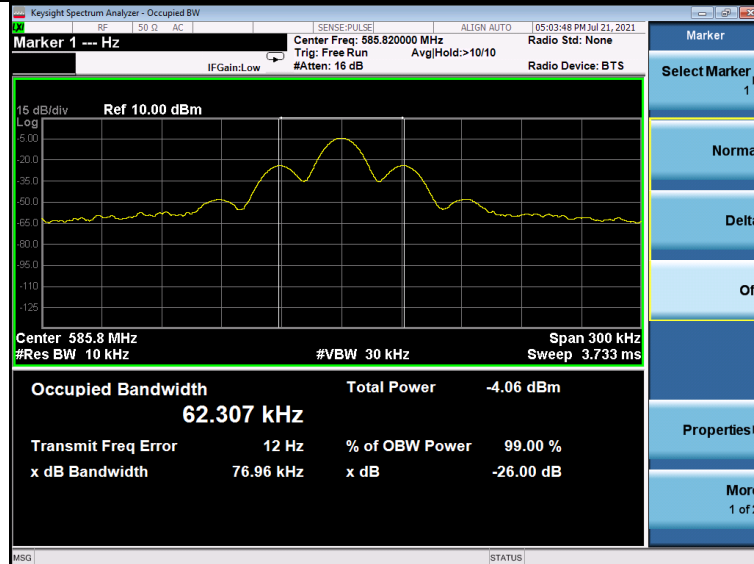

585.820 MHz




595.660 MHz

4.4 Necessary Bandwidth

LIMIT

Emissions within the band from one megahertz below to one megahertz above the carrier frequency shall comply with the emission mask in §8.3 of ETSI EN 300 422-1 V1.4.2 (2011-08) as below:


The transmitter output spectrum shall be within the mask defined in figure below where B is the declared channel bandwidth

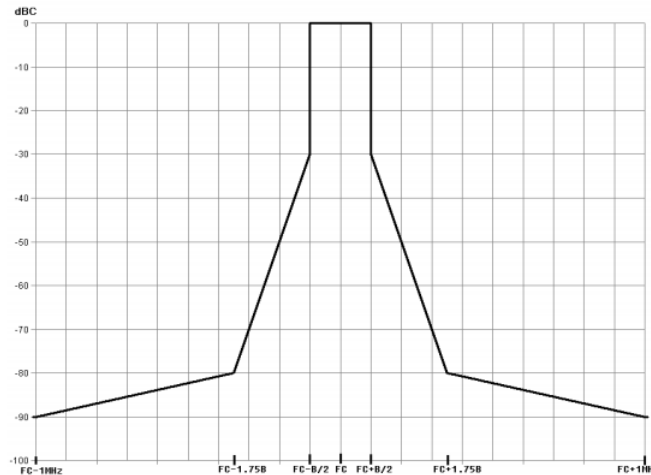

TEST PROCEDURE

1. With the Low Frequency (LF) audio signal generator set to 500 Hz, the audio input level to the EUT shall be Adjusted to 8 dB below the limiting threshold (-8dB limit) as declared by the manufacturer.
2. The corresponding audio output level from the demodulator shall be measured and recorded.
3. The input impedance of the noise meter shall be sufficiently high to avoid more than 0.1 dB changes in input level when the meter is switched between input and output.
4. The audio input level shall be increased by 20 dB, i.e. to 12 dB (lim), and the corresponding change in output level shall be measured.
5. It shall be checked that the audio output level has increased by ≤ 10 dB.
6. If the step 5 is not met, the initial audio input level shall be increased from -8 dB (lim) in 1 dB steps until the above condition is fulfilled, and the input level recorded in the test report. This level replaces the value derived from the manufacturer’s declaration and is defined as -8dB (lim).
7. Measure the input level at the transmitter required to give +12 dB (lim) and record the EUT output level test plots by the spectrum analyzer.
8. The transmitter RF output spectrum shall be measured, using a spectrum analyser with the following settings:
 - centre frequency: fc: Transmitter (Tx) nominal frequency;
 - dispersion (Span): fc - 1 MHz to fc + 1 MHz;
 - Resolution BandWidth (RBW): 1 kHz;
 - Video BandWidth (VBW): 1 kHz;
 - detector: Peak hold.

TEST CONFIGURATION

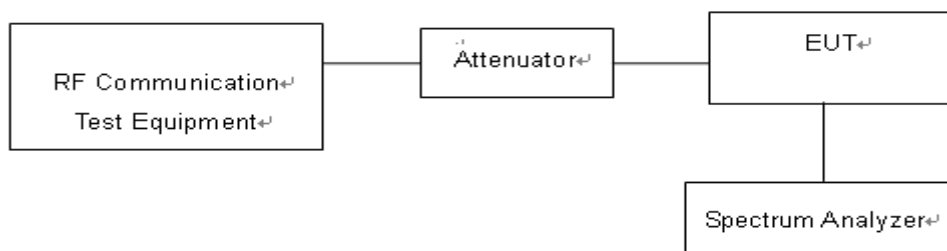


TEST RESULTS



Note:

	Bandwidth(B)	B/2	0.35B
Manufacturer declare	200 KHz	100KHz	70KHz

Transmit A:


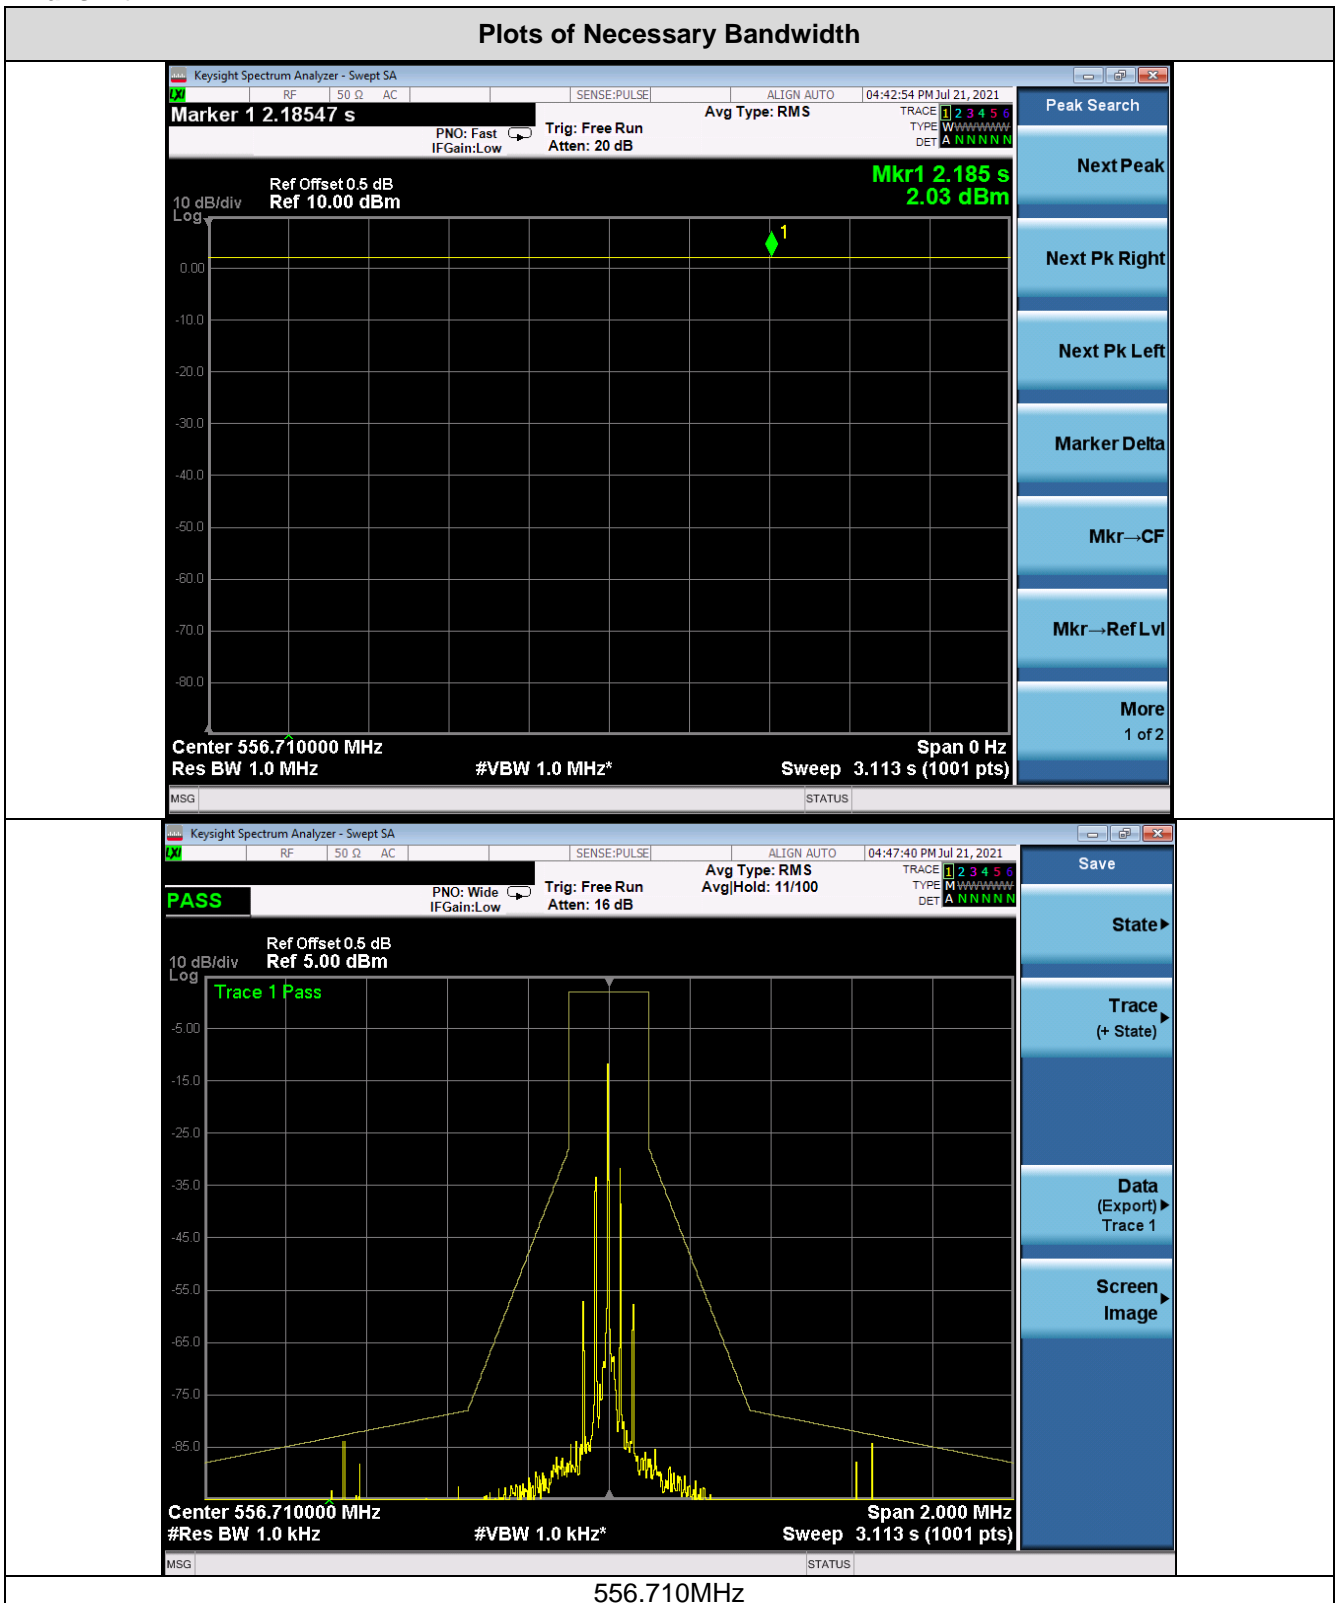


Plots of Necessary Bandwidth

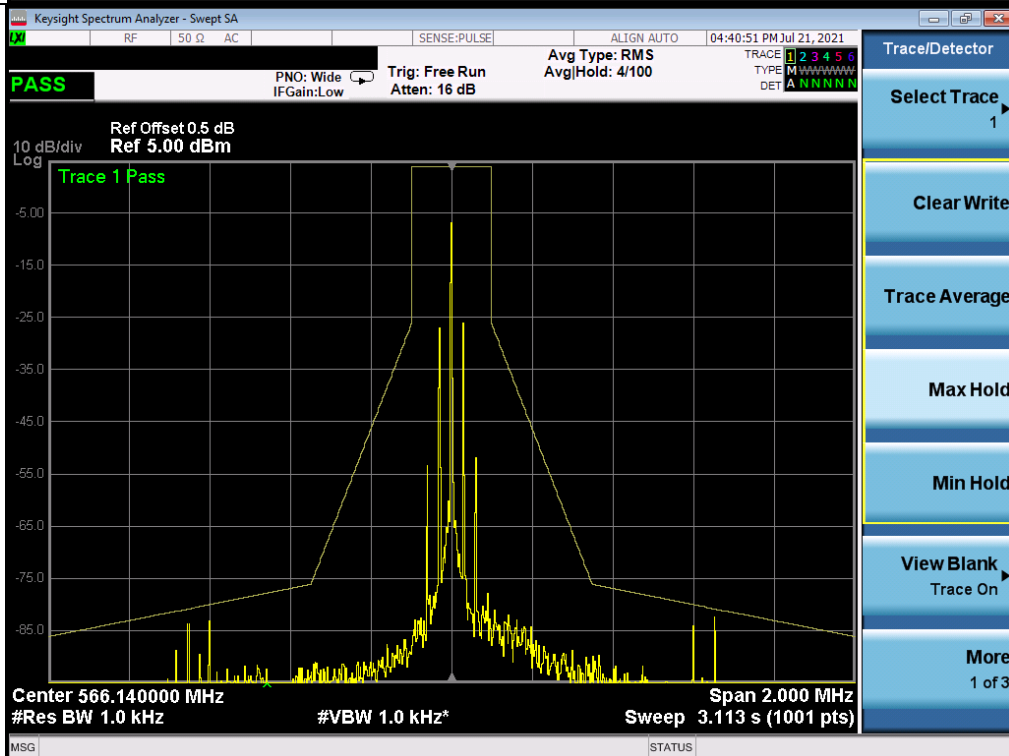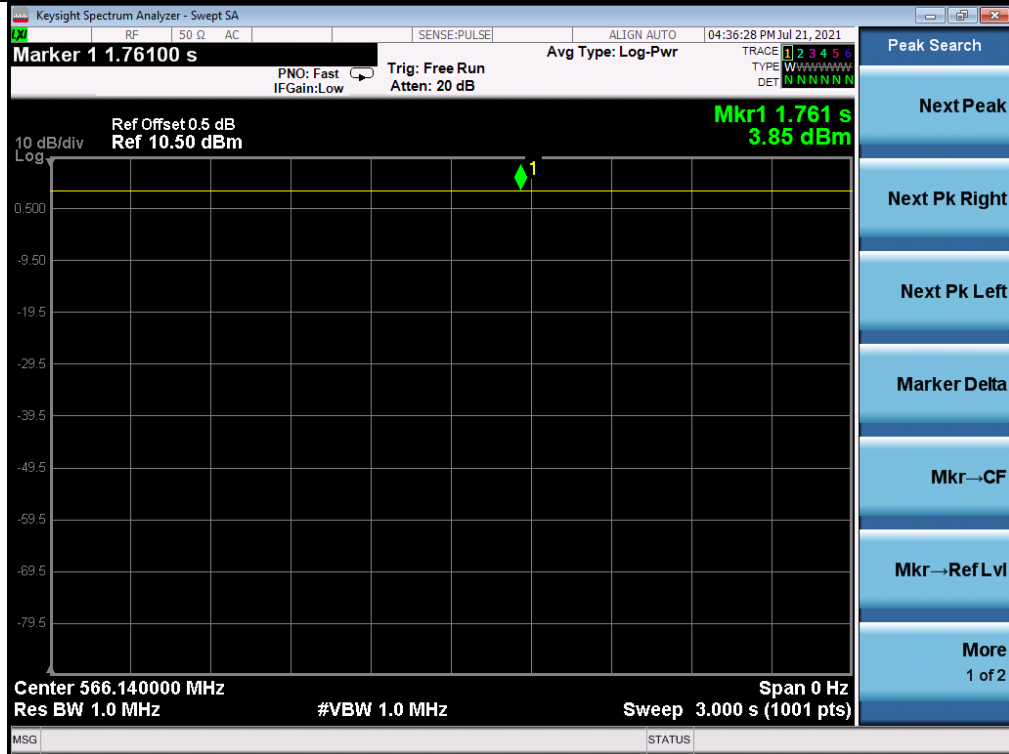

566.140MHz



Plots of Necessary Bandwidth

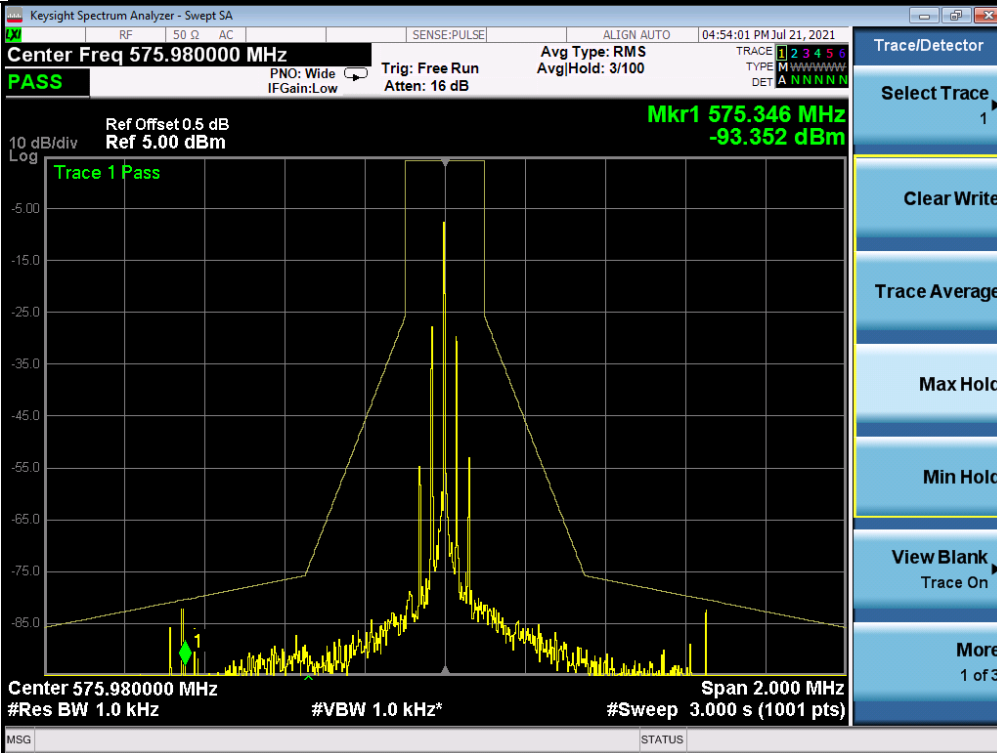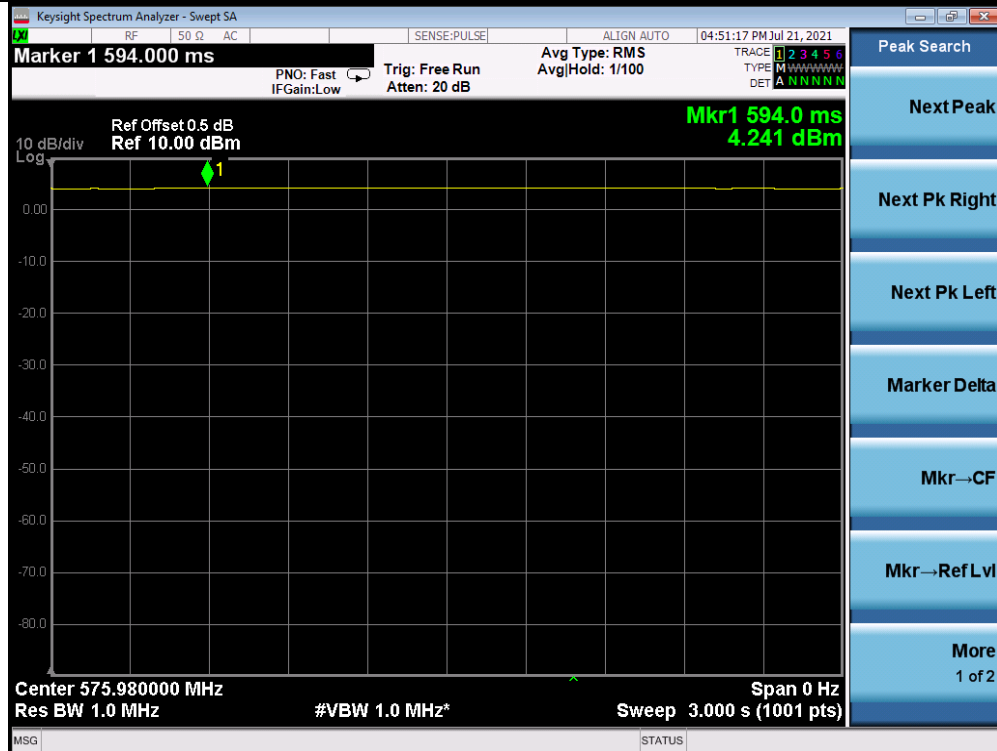

575.980MHz



Transmit B:

Plots of Necessary Bandwidth

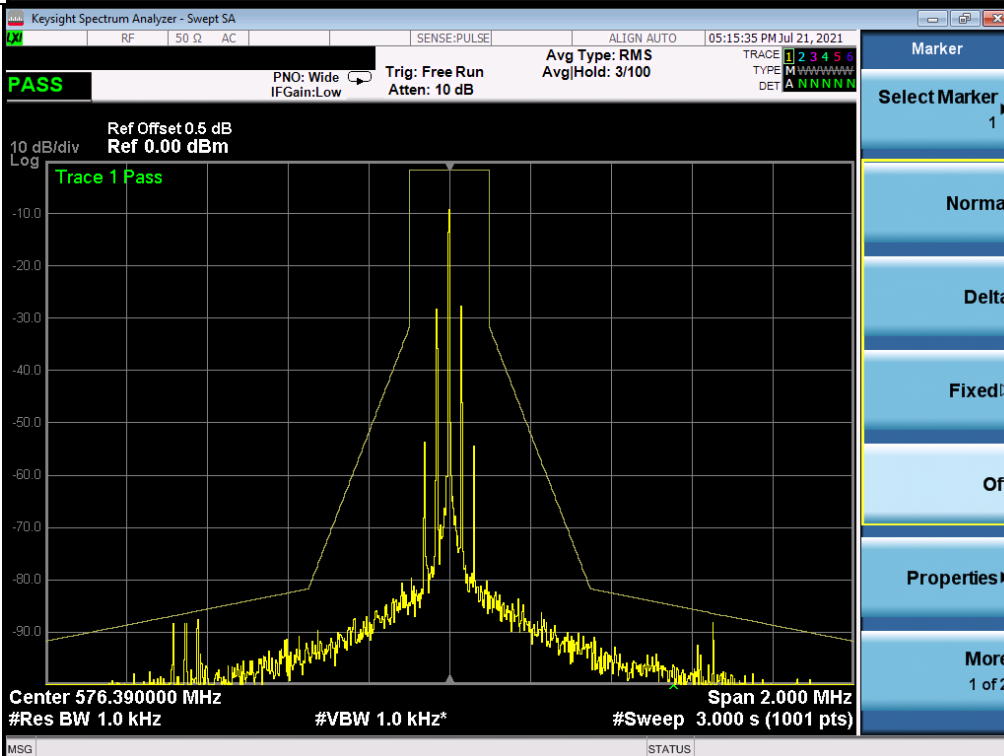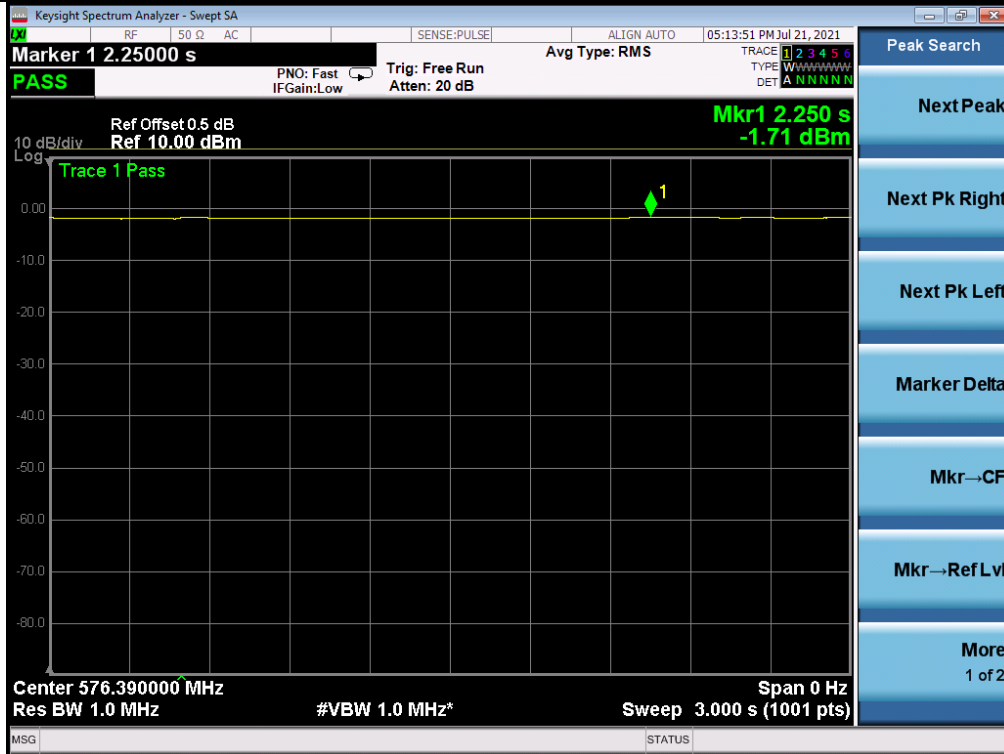



576.390MHz

Plots of Necessary Bandwidth

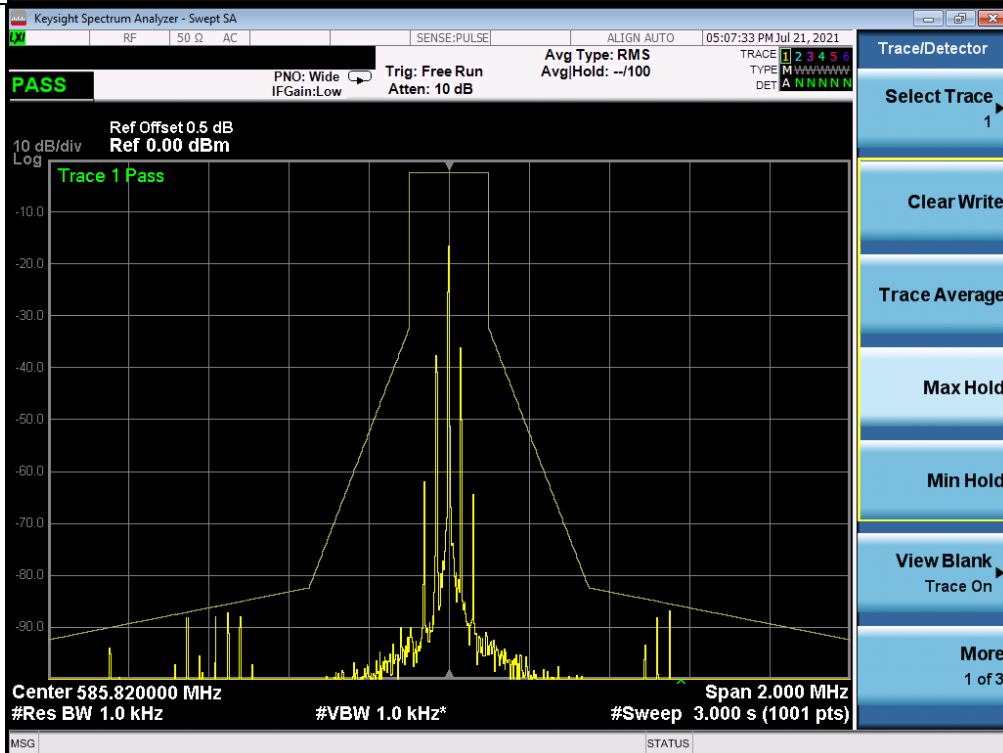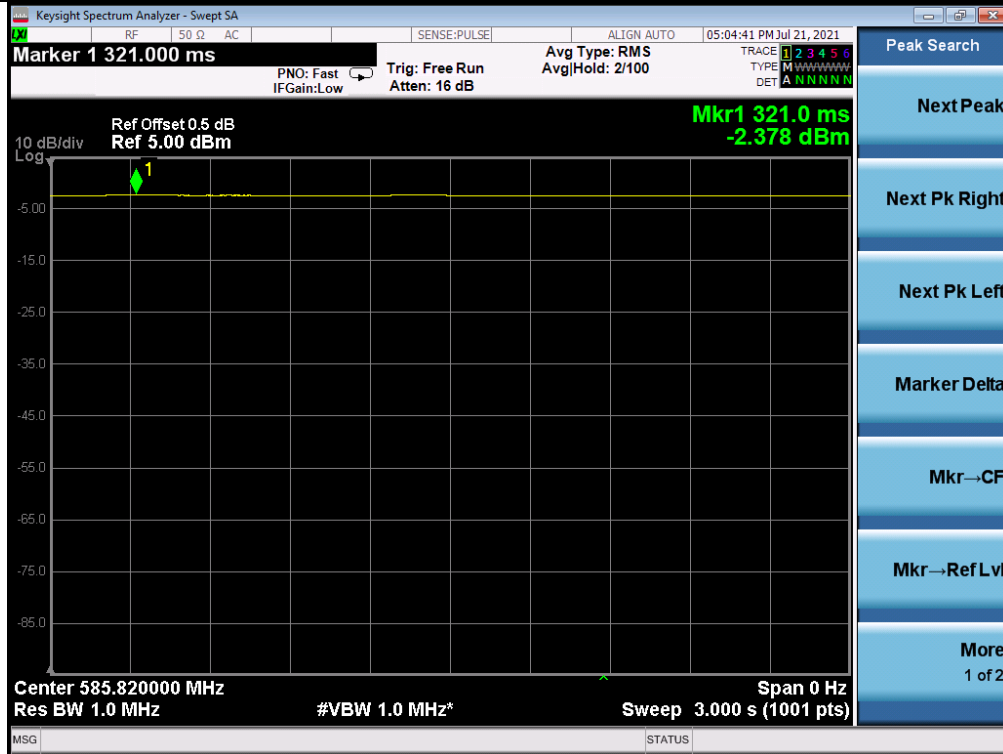

585.820MHz

Plots of Necessary Bandwidth

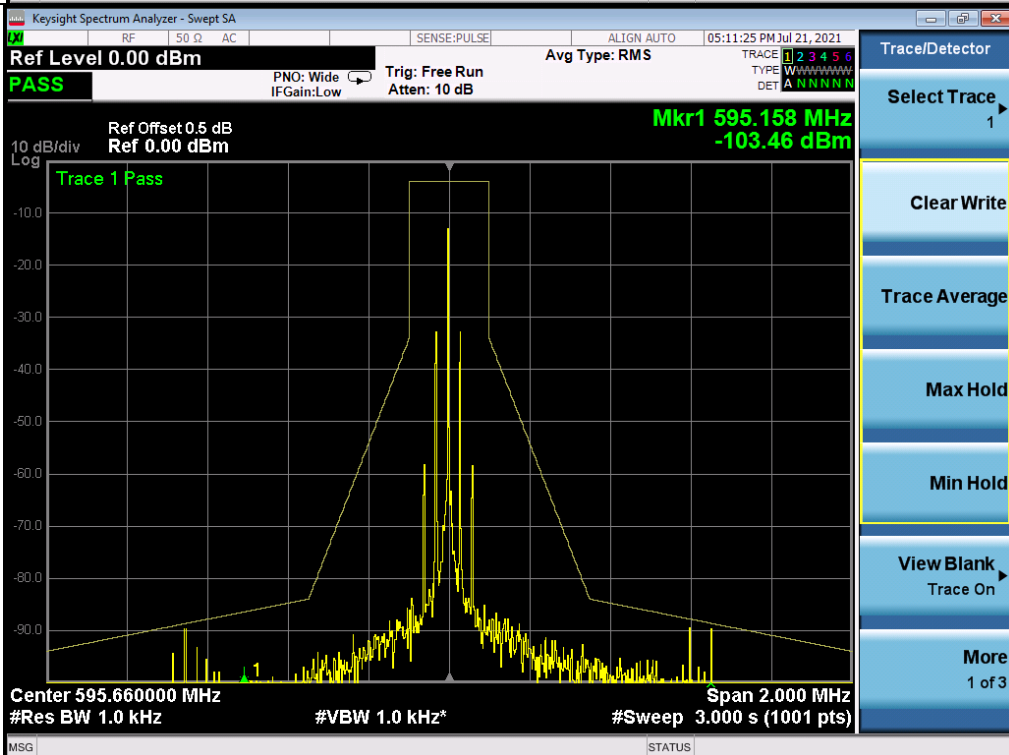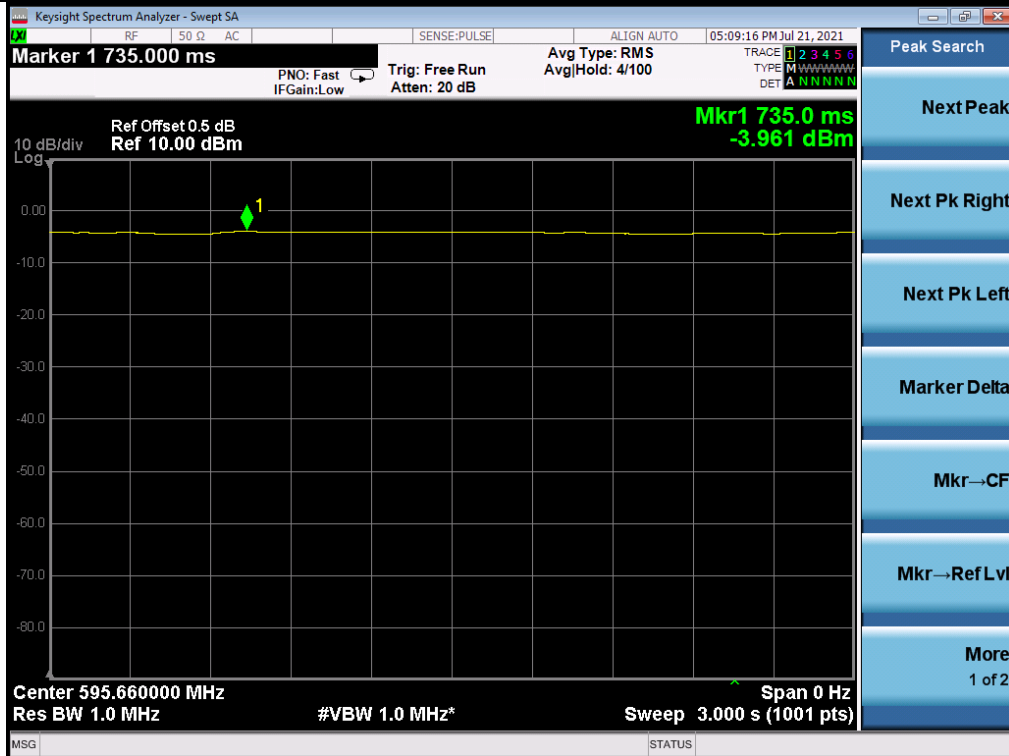

595.660MHz

4.5 Transmitter spurious emissions


Limit

Spurious emissions are emissions outside the frequency range(s) of the equipment. The power of the spurious emissions shall not exceed the limits of table as below:

State	Frequency		
	47 MHz to 74 MHz 87,5 MHz to 137 MHz 174 MHz to 230 MHz 470 MHz to 862 MHz	Other Frequencies below 1 000 MHz	Frequencies above 1 000 MHz
Operation	4 nW	250 nW	1 μW
Standby	2 nW	2 nW	20 nW

Test Configuration

Effective Radiated Power measurement (30 MHz to 12.75 GHz)

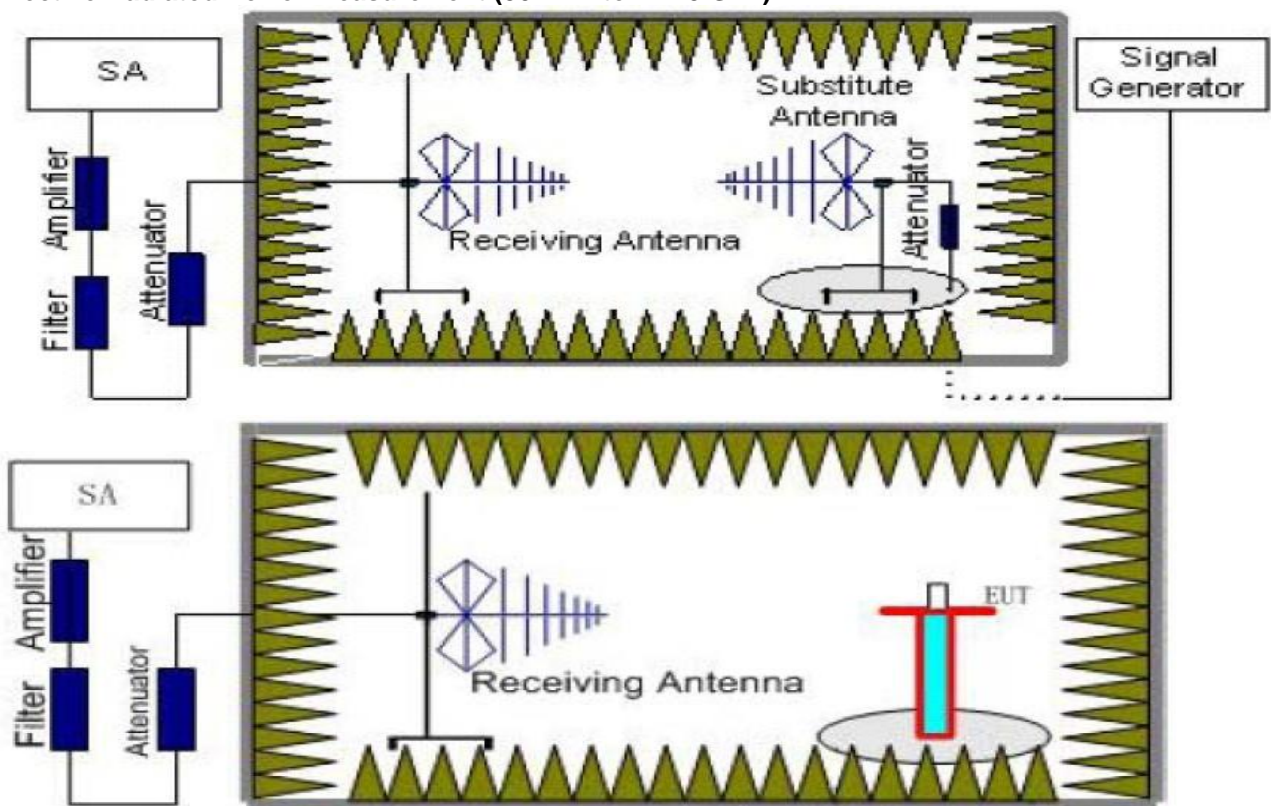

TEST PROCEDURE

1. The EUT was placed on a turntable with 1.5m height.
2. The test distance between the receiving antenna and the EUT is 3 meter, while the receiving (test) antenna is kept at 1.5 meter height.
3. Set EUT in continuous transmitting with maximum output power at test frequency.
4. The table was rotated from 0 to 360 degree to search the highest radiated emission.
5. Repeat step 3 to 4 for each polarization and test channel to find the worst emission level.
6. The results obtained are compared to the limits in order to prove compliance with the requirement.

TEST RESULTS

The test frequency range from 25MHz to 4GHz and recorded worst at below:
Transmit A:

Test mode: Tx (556.710MHz)					
Frequency (MHz)	Pol./Ant	Measurement EIRP (dBm)	Limit (dBm)	Margin (dB)	Result
408.00	V	-46.99	-36	10.99	PASS
612.00	V	-58.21	-54	4.21	
1113.42	V	-33.53	-30	3.53	
1670.13	V	-38.17	-30	8.17	
--	V	--	--	--	
408.00	H	-47.42	-36	11.42	
612.00	H	-58.83	-54	4.83	
1113.42	H	-35.85	-30	5.85	
1670.13	H	-38.17	-30	8.17	
--	H	--	--	--	

Test mode: Tx (566.140MHz)					
Frequency (MHz)	Pol./Ant	Measurement EIRP (dBm)	Limit (dBm)	Margin (dB)	Result
420.00	V	-45.94	-36	9.94	PASS
630.00	V	-58.22	-54	4.22	
1132.28	V	-34.85	-30	4.85	
1698.42	V	-38.76	-30	8.76	
--	V	--	--	--	
420.00	H	-46.04	-36	10.04	
630.00	H	-58.67	-54	4.67	
1132.28	H	-35.68	-30	5.68	
1698.42	H	-39.45	-30	9.45	
--	H	--	--	--	

Test mode: Tx (575.980MHz)					
Frequency (MHz)	Pol./Ant	Measurement EIRP (dBm)	Limit (dBm)	Margin (dB)	Result
430.00	V	-47.46	-36	11.46	PASS
645.00	V	-59.09	-54	5.09	
1151.96	V	-34.20	-30	4.20	
1727.94	V	-38.41	-30	8.41	
--	V	--	--	--	
430.00	H	-47.92	-36	11.92	
645.00	H	-57.75	-54	3.75	
1151.96	H	-35.14	-30	5.14	
1727.94	H	-40.48	-30	10.48	
--	H	--	--	--	

Transmit B:

Test mode: Tx (576.390MHz)					
Frequency (MHz)	Pol./Ant	Measurement EIRP (dBm)	Limit (dBm)	Margin (dB)	Result
408.00	V	-45.95	-36	9.95	PASS
612.00	V	-57.57	-54	3.57	
1152.78	V	-33.32	-30	3.32	
1729.17	V	-38.51	-30	8.51	
--	V	--	--	--	
408.00	H	-48.21	-36	12.21	
612.00	H	-59.18	-54	5.18	
1152.78	H	-36.87	-30	6.87	
1729.17	H	-41.43	-30	11.43	
--	H	--	--	--	

Test mode: Tx (585.820MHz)					
Frequency (MHz)	Pol./Ant	Measurement EIRP (dBm)	Limit (dBm)	Margin (dB)	Result
420.00	V	-46.97	-36	10.97	PASS
630.00	V	-57.59	-54	3.59	
1171.64	V	-35.52	-30	5.52	
1757.46	V	-39.92	-30	9.92	
--	V	--	--	--	
420.00	H	-46.86	-36	10.86	
630.00	H	-58.29	-54	4.29	
1171.64	H	-33.52	-30	3.52	
1757.46	H	-38.60	-30	8.60	
--	H	--	--	--	

Test mode: Tx (595.660MHz)					
Frequency (MHz)	Pol./Ant	Measurement EIRP (dBm)	Limit (dBm)	Margin (dB)	Result
430.00	V	-47.66	-36	11.66	PASS
645.00	V	-58.51	-54	4.51	
1191.32	V	-33.80	-30	3.80	
1786.98	V	-38.07	-30	8.07	
--	V	--	--	--	
430.00	H	-47.74	-36	11.74	
645.00	H	-58.41	-54	4.41	
1191.32	H	-34.79	-30	4.79	
1786.98	H	-39.95	-30	9.95	
--	H	--	--	--	

Remark:

1. The test frequency range from 25MHz to 4GHz, RBW/VBW: 100 KHz/300KHz below 1GHz, RBW/VBW: 1000 KHz/3000KHz above 1GHz.
2. "--"Other emission levels were very low against the limit and not reported.
3. Margin=Limit-Measurement

4.6 Frequency Stability

Limit

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.005\%$ of the operating frequency over a temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. Battery operated equipment shall be tested using a new battery.

Test Procedure


a) Frequency stability versus environmental temperature

1. Setup as Test Configuration for frequencies measured at ambient temperature if it is within 15°C to 25°C . Otherwise, an environmental chamber set for a temperature of 20°C shall be used.
2. Turn on EUT and set SA center frequency to the right frequency needs to be measured. Then set SA RBW to 3 kHz, VBW to 10kHz and frequency span to 500 kHz. Record this frequency to be a reference.
3. Set the temperature of chamber to 50°C . Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
4. Repeat step 2 with a 10°C decreased per stage until the lowest temperature -20°C is measured, record all measurement frequencies.

b) Frequency stability versus input voltage

1. Setup as Test Configuration for frequencies measured at ambient temperature if it is within 15°C to 25°C . Otherwise, an environmental chamber set for a temperature of 20°C shall be used. Install new batteries in the EUT.
2. Set SA center frequency to the right frequency needs to be measured. Then set SA RBW to 3kHz, VBW to 10kHz and frequency span to 500 kHz. Record this frequency to be a reference.
3. For non hand carried, battery operated device, supply the EUT primary voltage with 85 and 115 percent of the nominal value and record the frequency.

Test Configuration

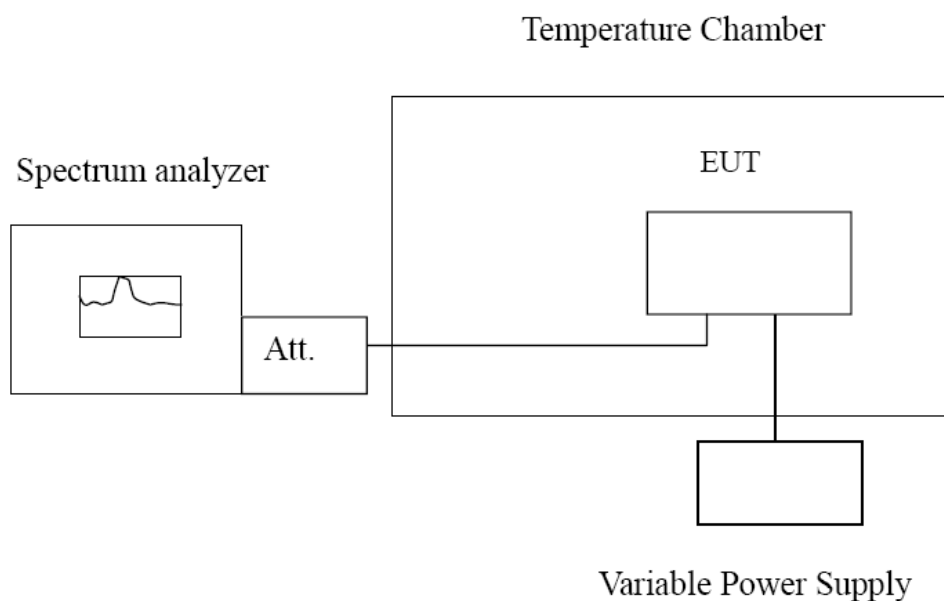

Test Results

Transmit A

Reference Frequency: 566.710MHz					
Voltage (V)	Temperature (°C)	Frequency error (MHz)	Frequency Tolerance (%)	Limit (%)	Result
3.0	-20	0.00058	0.000104%	±0.005	PASS
	-10	0.00073	0.000131%		
	0	0.00069	0.000124%		
	10	0.00058	0.000104%		
	20	0.00073	0.000131%		
	30	0.00069	0.000124%		
	40	0.00085	0.000153%		
	50	0.00073	0.000131%		
3.45	20	0.00087	0.000156%		
2.55	20	0.00069	0.000124%		

Reference Frequency: 566.140MHz					
Voltage (V)	Temperature (°C)	Frequency error (MHz)	Frequency Tolerance (%)	Limit (%)	Result
3.0	-20	0.00089	0.000157%	±0.005	PASS
	-10	0.00066	0.000117%		
	0	0.00083	0.000147%		
	10	0.00079	0.000140%		
	20	0.00085	0.000150%		
	30	0.00095	0.000168%		
	40	0.00069	0.000122%		
	50	0.00058	0.000102%		
3.45	20	0.00075	0.000132%		
2.55	20	0.00066	0.000117%		

Reference Frequency: 575.980MHz					
Voltage (V)	Temperature (°C)	Frequency error (MHz)	Frequency Tolerance (%)	Limit (%)	Result
3.0	-20	0.00076	0.000132%	±0.005	PASS
	-10	0.00089	0.000155%		
	0	0.00085	0.000148%		
	10	0.00067	0.000116%		
	20	0.00068	0.000118%		
	30	0.00075	0.000130%		
	40	0.00072	0.000125%		
	50	0.00089	0.000155%		
3.45	20	0.00084	0.000146%		
2.55	20	0.00075	0.000130%		



Transmit B

Reference Frequency: 576.390MHz					
Voltage (V)	Temperature (°C)	Frequency error (MHz)	Frequency Tolerance (%)	Limit (%)	Result
3.0	-20	0.00087	0.000151%	±0.005	PASS
	-10	0.00075	0.000130%		
	0	0.00087	0.000151%		
	10	0.00099	0.000172%		
	20	0.00087	0.000151%		
	30	0.00095	0.000165%		
	40	0.00087	0.000151%		
50	0.00069	0.000120%			
3.45	20	0.00074	0.000128%		
2.55	20	0.00076	0.000132%		



Reference Frequency: 585.820MHz					
Voltage (V)	Temperature (°C)	Frequency error (MHz)	Frequency Tolerance (%)	Limit (%)	Result
3.0	-20	0.00084	0.000143%	±0.005	PASS
	-10	0.00075	0.000128%		
	0	0.00094	0.000160%		
	10	0.00065	0.000111%		
	20	0.00074	0.000126%		
	30	0.00083	0.000142%		
	40	0.00076	0.000130%		
50	0.00066	0.000113%			
3.45	20	0.00091	0.000155%		
2.55	20	0.00082	0.000140%		

Reference Frequency: 595.660MHz					
Voltage (V)	Temperature (°C)	Frequency error (MHz)	Frequency Tolerance (%)	Limit (%)	Result
3.0	-20	0.00086	0.000147%	±0.005	PASS
	-10	0.00091	0.000155%		
	0	0.00074	0.000126%		
	10	0.00066	0.000113%		
	20	0.00097	0.000166%		
	30	0.00084	0.000143%		
	40	0.00078	0.000133%		
50	0.00081	0.000138%			
3.45	20	0.00085	0.000145%		
2.55	20	0.00069	0.000118%		



5 Test Setup Photos of the EUT


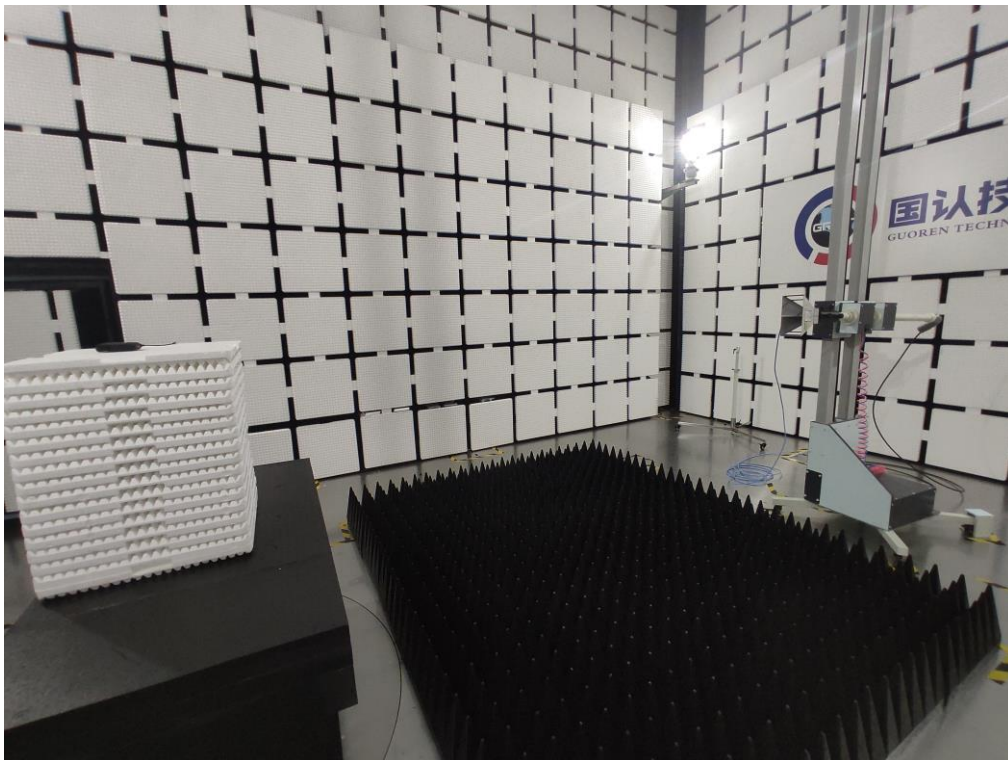
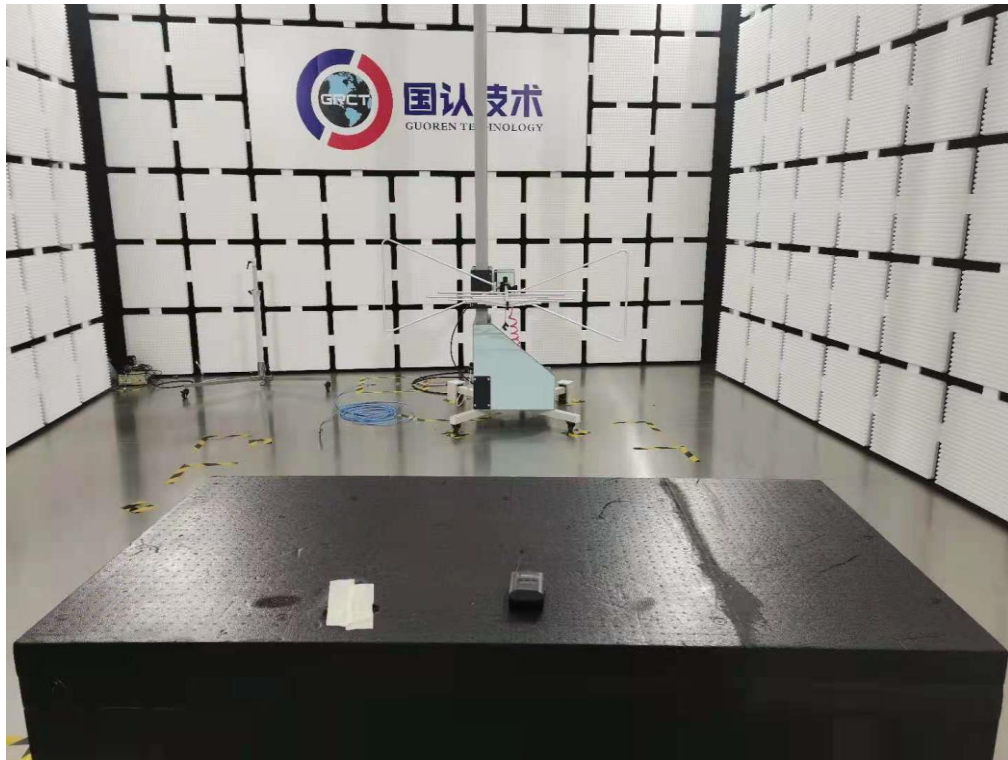


6 Photos of the EUT

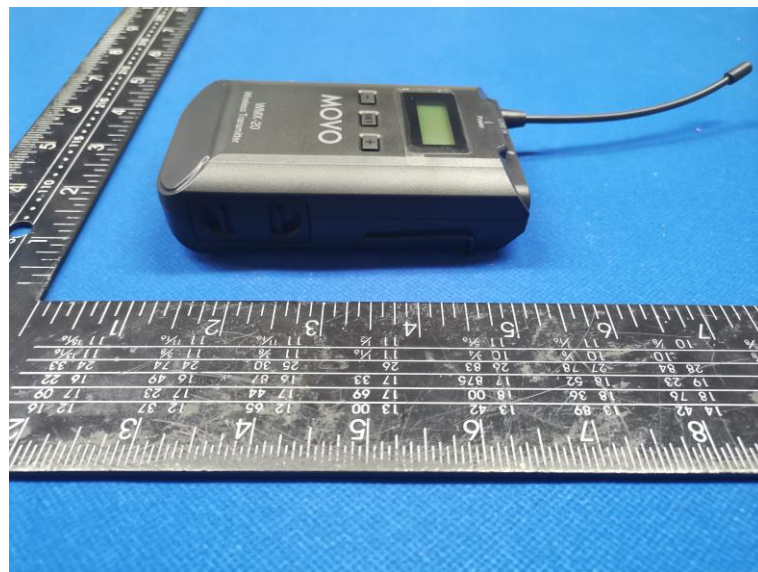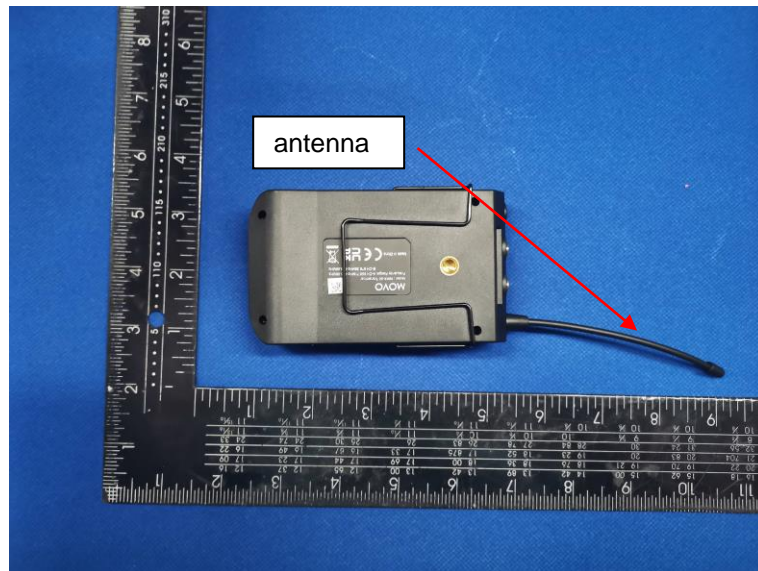



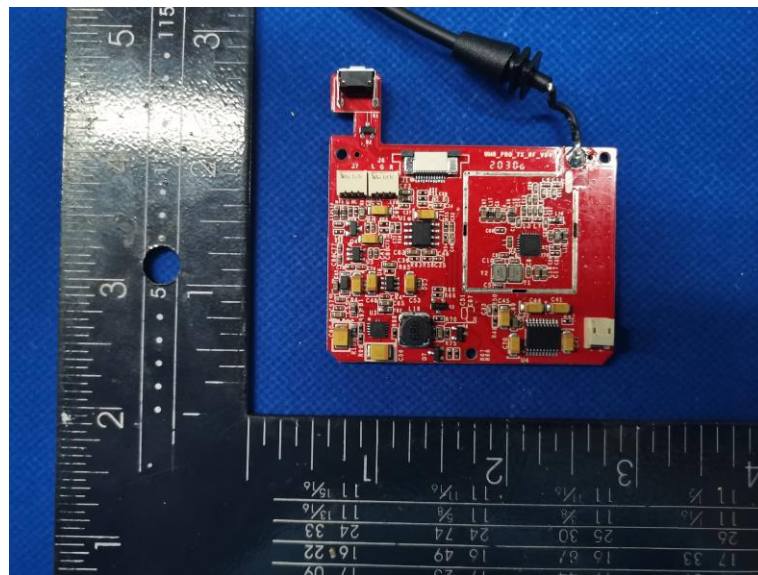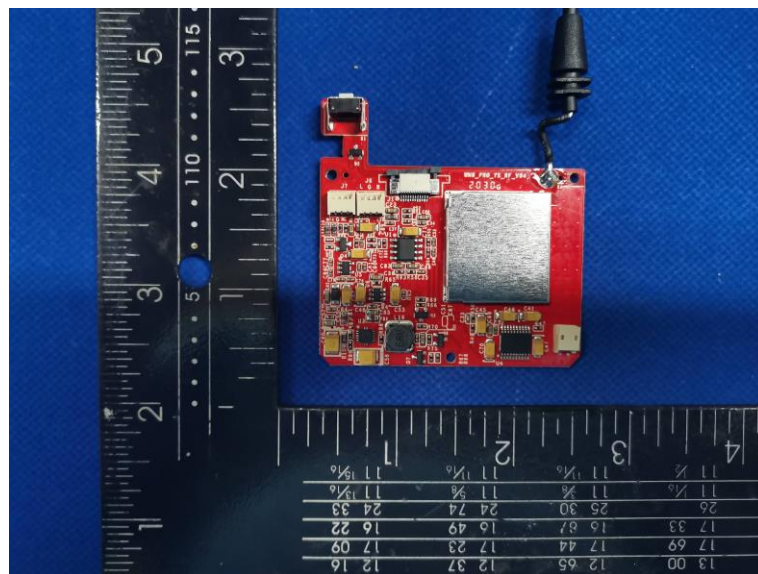

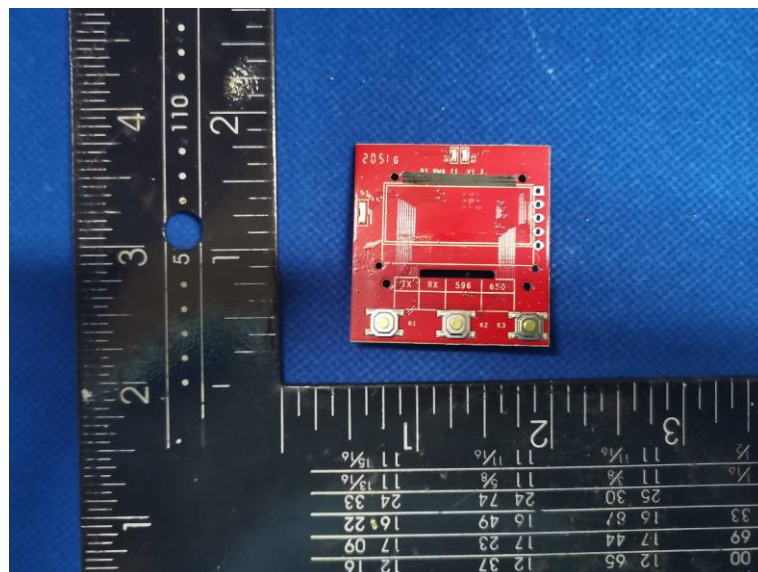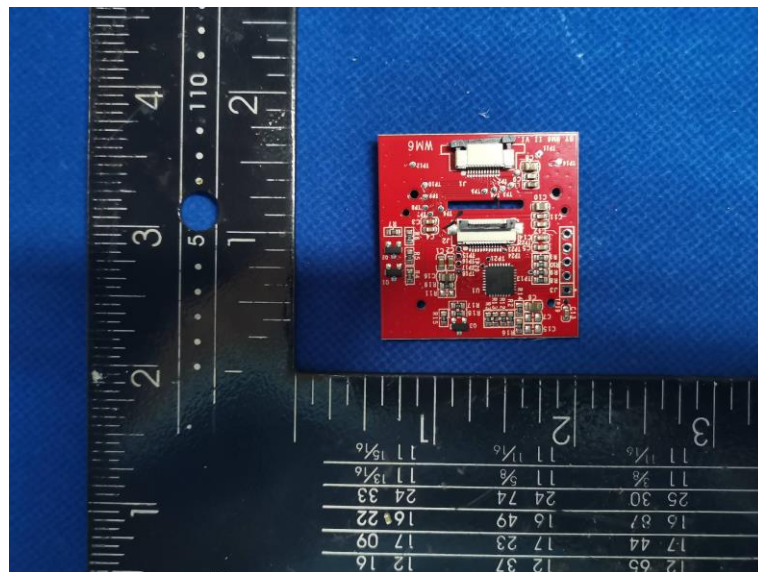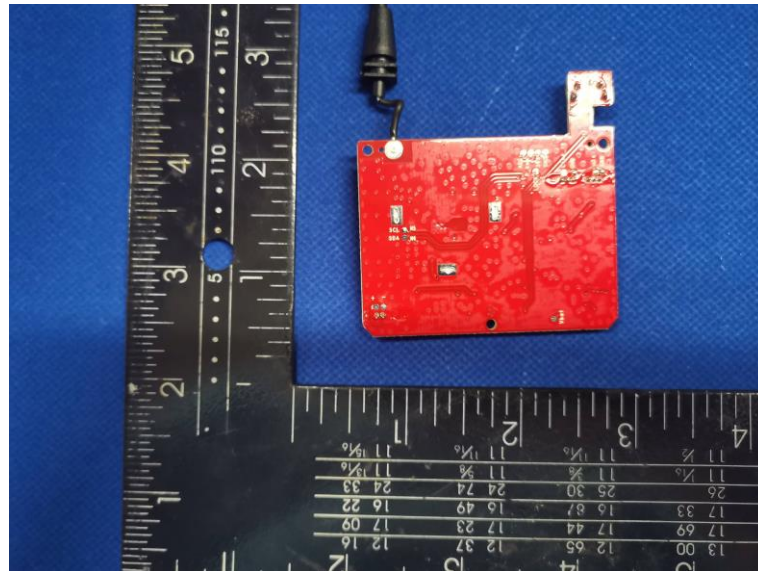

***** End of Report *****