


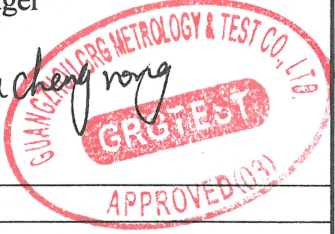


TEST REPORT

Verified Code:628842

Report No.:	E202008101990-12	Application No.:	E202008101990
Client:	BY TECHDESIGN S.L.		
Address:	Calle Thomas Edison 5, Arganda del Rey Madrid, 28500, Spain		
Sample Description:	Access Control System - RF readers		
Model:	42520		
Test Specification:	FCC 47 CFR Part 15 Subpart C		
Receipt Date:	2020-08-12		
Test Date:	2020-09-08 to 2020-09-08		
Issue Date:	2020-12-21		
Test Result:	Pass		
Prepared By: Test Engineer	Reviewed By: Technical Manager	Approved By: Manager	
		 	
Other Aspects:			
Note: Note			
Abbreviations: ok / P = passed; fail / F = failed; n.a. / N = not applicable;			
The test result in this test report refers exclusively to the presented test sample. This report shall not be reproduced except in full, without the written approval of GRGT.			

DIRECTIONS OF TEST

- 1. This station carries out test task according to the national regulation of verifications which can be traced to National Primary Standards and BIPM.**
- 2. The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test result without the written permission of the test laboratory.**
- 3. If there is any objection concerning the test, the client should inform the laboratory within 15 days from the date of receiving the test report.**

TABLE OF CONTENTS

1. TEST RESULT SUMMARY.....	4
2. GENERAL DESCRIPTION OF EUT	5
2.1. APPLICANT	5
2.2. MANUFACTURER	5
2.3. FACTORY	5
2.4. BASIC DESCRIPTION OF EQUIPMENT UNDER TEST	5
2.5. TEST OPERATION MODE	7
2.6. LOCAL SUPPORTIVE.....	7
3. LABORATORY AND ACCREDITATIONS	8
3.1. LABORATORY	8
3.2. ACCREDITATIONS	8
3.3. MEASUREMENT UNCERTAINTY	8
4. LIST OF USED TEST EQUIPMENT AT GRGT	9
5. CONDUCTED EMISSION MEASUREMENT.....	10
5.1. LIMITS.....	10
5.2. TEST PROCEDURES.....	10
5.3. TEST SETUP	11
5.4. DATA SAMPLE	11
5.5. TEST RESULTS	12
6. RADIATED SPURIOUS EMISSIONS	14
6.1. LIMITS.....	14
6.2. TEST PROCEDURES (PLEASE REFER TO MEASUREMENT STANDARD).....	14
6.3. TEST SETUP	18
6.4. DATA SAMPLE	19
6.5. TEST RESULTS	20
7. 6DB BANDWIDTH.....	29
7.1. LIMITS.....	29
7.2. TEST PROCEDURES.....	29
7.3. TEST SETUP	29
7.4. TEST RESULTS	30
8. MAXIMUM PEAK OUTPUT POWER	32
8.1. LIMITS.....	32
8.2. TEST PROCEDURES.....	32
8.3. TEST SETUP	32
8.4. TEST RESULTS	32
9. POWER SPECTRAL DENSITY	33
9.1. LIMITS.....	33
9.2. TEST PROCEDURES.....	33
9.3. TEST SETUP	33
9.4. TEST RESULTS	34
10. CONDUCTED BAND EDGES AND SPURIOUS EMISSIONS.....	36
10.1. LIMITS.....	36
10.2. TEST PROCEDURES.....	36
10.3. TEST SETUP	36
10.4. TEST RESULTS	37
11. RESTRICTED BANDS OF OPERATION.....	40
11.1. LIMITS.....	40
11.2. TEST PROCEDURES.....	40

11.3.	TEST SETUP	41
11.4.	TEST RESULTS	42

1. TEST RESULT SUMMARY

Technical Requirements		
FCC Part 15 Subpart C KDB 558074 D01: DTS measurement guidance v0502		
Limit / Severity	Item	Result
§15.207	Conducted emission AC power port	Pass
§15.247(b)(1)	Conducted output power for FHSS	N/A
§15.247(b)(3)	Conducted output power for DTS	Pass
§15.247(e)	Power spectral density	Pass
§15.247(a)(2)	6dB bandwidth	Pass
§15.247(a)(1)	20dB Occupied bandwidth	N/A
--	99% Occupied Bandwidth	N/A
§15.247(a)(1)	Carrier frequency separation	N/A
§15.247(a)(1)(iii)	Number of hopping frequencies	N/A
§15.247(a)(1)(iii)	Dwell Time	N/A
§15.247(d)	Spurious RF conducted emissions	Pass
§15.247(d)	Band edge	Pass
§15.247(d) & §15.209 & §15.205	Spurious radiated emissions for transmitter	Pass
§15.203	Antenna requirement	Pass

The EUT has one antenna. The antenna is internal antenna.

The max gain of antenna is 2.5dBi.which accordance 15.203.is considered sufficient to comply with the provisions of this section.

2. GENERAL DESCRIPTION OF EUT

2.1. APPLICANT

Name: BY TECHDESIGN S.L.
 Address: Calle Thomas Edison 5, Arganda del Rey Madrid, 28500, Spain

2.2. MANUFACTURER

Name: BY TECHDESIGN S.L.
 Address: Calle Thomas Edison 5, Arganda del Rey Madrid, 28500, Spain

2.3. FACTORY

Name : BY TECHDESIGN S.L.
 Address : Calle Thomas Edison 5, Arganda del Rey Madrid, 28500, Spain

2.4. BASIC DESCRIPTION OF EQUIPMENT UNDER TEST

Equipment: Access Control System - RF readers

Model No.: 42520

Adding Model: 42491, 42537, 42538, 42539, 42490

Type	Power supply and input /output	Difference
Golf	SDU or SDU+ for NÜO Golf: Input: 24VDC, 2.0W	All models are same included the hardware and software, except of the exterior's color and the model name.

Trade Name:  **nüo**

FCC ID: 2ARQ3-MTA42520

Power supply: SDU or SDU+ for NÜO Golf: Input: 24VDC, 2.0W

Frequency Range: 2402 ~ 2480MHz

Transmit Power: 1.09dBm

Modulation type: GFSK for 1Mbps

Channel space: 2MHz

Antenna Specification: Internal antenna 2.5dBi gain (Max.)

Temperature Range: -0 °C ~ +50 °C

Hardware Version: SWM0505_BYV3_boot_01_00_05_00_app_02_00_05_00_release_115.byfw

Software Version: SWM0505_BYV3_boot_01_00_05_00_app_02_00_05_00_release_115.byfw
Sample No: 0001, 0002
Note: /

2.5. TEST OPERATION MODE

Test Item	Mode No.	Description of the modes
Conducted Emission	1	Continuously Transmitting
Radiated Emission	1	Continuously Transmitting (CH0, CH19, CH39)

2.6. LOCAL SUPPORTIVE

Name of Equipment	Manufacturer	Model	Serial Number	Note
Notebook	LENOVO	TianYi 310-14ISK	MP18DLC6	/
DC power	Long wei	PS-305DM	180704473	/
Cable				
AC cable	/	/	/	Unshielded, 1.00m
DC cable	/	/	/	Shielded, 1.80m

Test software:

Software version	Test level
nRFgo Studio	/

3. LABORATORY AND ACCREDITATIONS

3.1. LABORATORY

The tests & measurements refer to this report were performed by Shenzhen EMC Laboratory of Guangzhou GRG Metrology & Test Co., Ltd.

Add : Address: No.1301 Guanguang Road Xinlan Community, Guanlan Street,
Longhua District Shenzhen, 518110, People's Republic of China

P.C. : 518000

Tel : 0755-61180008

Fax : 0755-61180008

3.2. ACCREDITATIONS

A2LA	Certificate Number 2861.01
------	----------------------------

3.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement		Frequency	Uncertainty
Radiated Emission	Horizontal	30MHz~1000MHz	4.3dB
		1GHz~18GHz	5.6dB
	Vertical	30MHz~1000MHz	4.3dB
		1GHz~18GHz	5.6dB
Conduction Emission		9 kHz ~ 150 kHz	2.8 dB
		150 kHz ~ 10 MHz	2.8 dB
		10 MHz ~ 30 MHz	2.2 dB

This uncertainty represents an expanded uncertainty factor of $k=2$.

4. LIST OF USED TEST EQUIPMENT AT GRGT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Conducted Emissions				
EMI TEST RECEIVER	R&S	ESCI	100783	2020/11/27
LISN(EUT)	R&S	ENV216	101543	2021/03/24
Test S/W	EZ	CCS-3A1-CE	/	/
Radiated Spurious Emission& Restricted bands of operation				
EMI TEST RECEIVER	R&S	ESPI	100529	2020/12/08
Spectrum Analyzer	Agilent	N9010A	MY52221469	2020/11/18
Bilog Antenna	Schwarzbeck	VULB 9163	01279	2021/03/14
Horn Antenna	Schwarzbeck	BBHA 9120D(1201)	02143	2020/12/28
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	BBHA 9170-497	2020/11/30
Amplifier	Tonscend	TAP9E6343	AP20E806065	2021/06/28
Amplifier	Tonscend	TAP01018048	AP20E8060075	2021/06/28
Amplifier	Tonscend	TAP037030	AP20E8060081	2021/06/28
Test S/W	Tonscend	JS36-RE/2.5.1.5		
6 dB Bandwidth				
Spectrum Analyzer	Agilent	N9010A	MY52221469	2020/11/18
Peak/AV Output Power				
Pulse Power Sentor	Agilent	MA2411B	1126150	2021/04/13
Power Meter	Anritsu	ML2495A	1204003	2021/04/13
Conducted band edges and Spurious Emission				
Spectrum Analyzer	Agilent	N9010A	MY52221469	2020/11/18
Peak Output Spectral Density Measurement				
Spectrum Analyzer	Agilent	N9010A	MY52221469	2020/11/18

5. CONDUCTED EMISSION MEASUREMENT

5.1. LIMITS

Frequency range	Limits (dB μ V)	
	Quasi-peak	Average
150kHz ~ 0.5MHz	66~56	56~46
0.5 MHz ~ 5 MHz	56	46
5 MHz ~ 30 MHz	60	50

NOTE: (1) The lower limit shall apply at the transition frequencies.

(2) The limit decreases in line with the logarithm of the frequency in the range of 150 kHz to 0.5MHz.

5.2. TEST PROCEDURES

Procedure of Preliminary Test

Test procedures follow ANSI C63.4:2014.

For measurement of the disturbance voltage the equipment under test (EUT) is connected to the power supply mains and any other extended network via one or more artificial network(s). An EUT, whether intended to be grounded or not, and which is to be used on a table is configured as follows:

- Either the bottom or the rear of the EUT shall be at a controlled distance of 40 cm from a reference ground plane. This ground plane is normally the wall or floor of a shielded room. It may also be a grounded metal plane of at least 2 m by 2 m. This is physically accomplished as follows:

- 1) place the EUT on a table of non-conducting material which is at least 80 cm high. Place the EUT so that it is 40 cm from the wall of the shielded room, or
- 2) place the EUT on a table of non-conducting material which is 40 cm high so that the bottom of the EUT is 40 cm above the ground plane;

- All other conductive surfaces of the EUT shall be at least 80 cm from the reference ground plane;

- The EUT are placed on the floor that one side of the housings is 40 cm from the vertical reference ground plane and other metallic parts;

- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth forming a bundle 30 cm to 40 cm long, hanging approximately in the middle between the ground plane and the table.


- I/O cables that are connected to a peripheral shall be bundled in the centre. The end of the cable may be terminated if required using correct terminating impedance. The total length shall not exceed 1 m.

The test mode(s) described in Item 2.4 were scanned during the preliminary test. After the preliminary scan, we found the test mode described in Item 2.4 producing the highest emission level. The EUT configuration and cable configuration of the above highest emission levels were recorded for reference of the final test.

Procedure of Final Test

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test. A scan was taken on both power lines, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. The test data of the worst-case condition(s) was recorded.

5.3. TEST SETUP

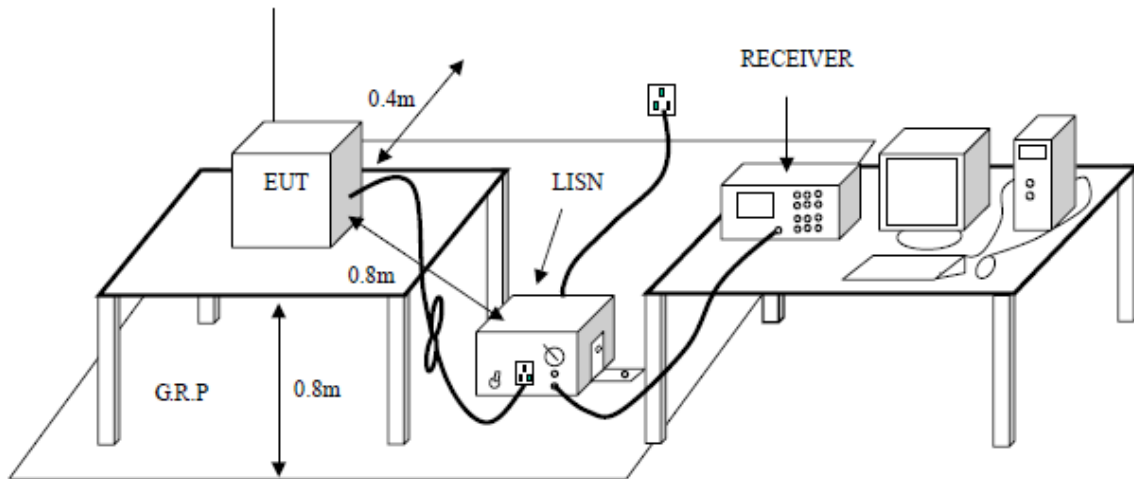

5.4. DATA SAMPLE


Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
X.XXXX	32.69	25.65	11.52	44.21	37.17	65.78	55.79	-21.57	-18.62	Pass

Factor = Insertion loss of LISN + Cable Loss
 Result = Quasi-peak Reading/ Average Reading + Factor
 Limit =Limit stated in standard
 Margin = Result (dBuV) – Limit (dBuV)

5.5. TEST RESULTS

Model No.	42520	RBW,VBW	9 kHz
Environmental Conditions	25.5°C/44%RH/101.7kPa	Test Mode	Mode 1
Tested By	WuJunLin	Line	L
Tested Date	2020/08/18	Test Voltage	AC120V/60Hz

(The chart below shows the highest readings taken from the final data.)

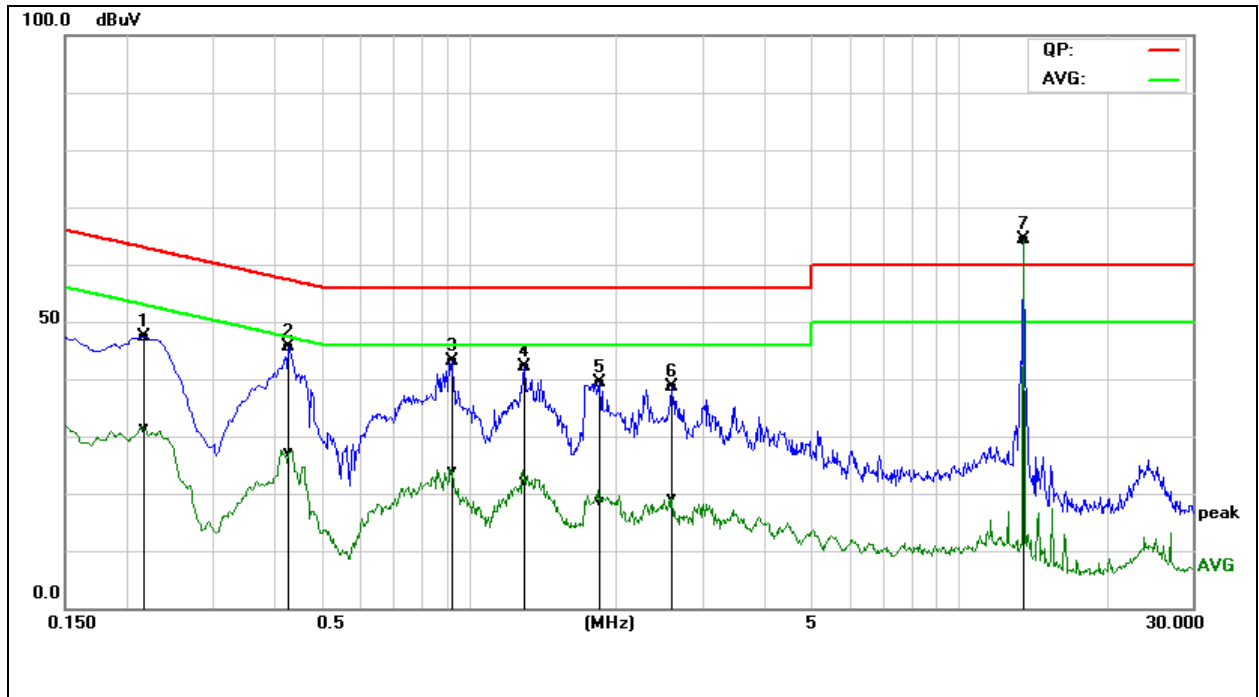


No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1	0.2180	37.78	21.64	9.67	47.45	31.31	62.89	52.89	-15.44	-21.58	Pass
2	0.4300	35.94	17.39	9.67	45.61	27.06	57.25	47.25	-11.64	-20.19	Pass
3	0.9260	33.35	14.21	9.70	43.05	23.91	56.00	46.00	-12.95	-22.09	Pass
4	1.2980	32.31	12.54	9.71	42.02	22.25	56.00	46.00	-13.98	-23.75	Pass
5	1.8540	29.67	8.79	9.73	39.40	18.52	56.00	46.00	-16.60	-27.48	Pass
6	2.6020	28.86	9.29	9.75	38.61	19.04	56.00	46.00	-17.39	-26.96	Pass
7*	13.5620	54.42	54.29	9.89	64.31	64.18	60.00	50.00	4.31	14.18	Note ²

- Note:**
1. L = Live Line
 2. The multiple of fundamental frequency's limit is not limited.
 3. 13.5620MHz is the fundamental of NFC, Its limit is controlled to the standard of Radio frequency.

Model No.	42520	RBW,VBW	9 kHz
Environmental Conditions	25.5°C/44%RH/101.7kPa	Test Mode	Mode 1
Tested By	WuJunLin	Line	N
Tested Date	2020/08/18	Test Voltage	AC120V/60Hz

(The chart below shows the highest readings taken from the final data.)

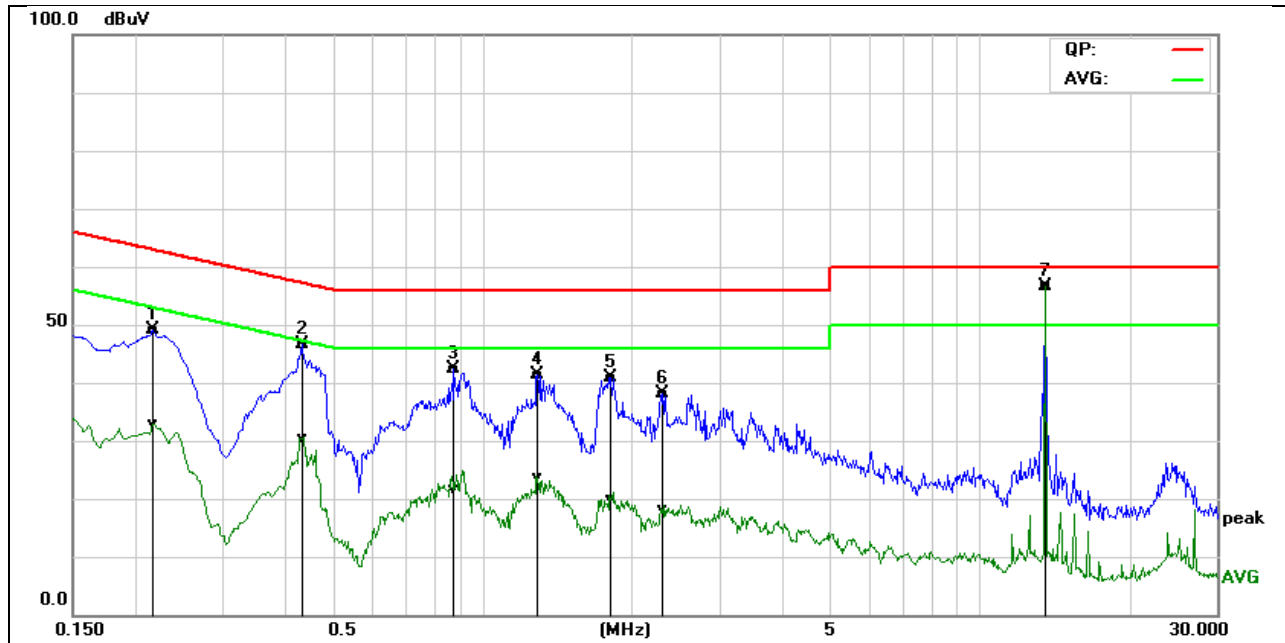

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1	0.2180	39.34	23.28	9.67	49.01	32.95	62.89	52.89	-13.88	-19.94	Pass
2	0.4340	37.04	20.64	9.67	46.71	30.31	57.18	47.18	-10.47	-16.87	Pass
3	0.8780	32.71	12.05	9.69	42.40	21.74	56.00	46.00	-13.60	-24.26	Pass
4	1.2900	31.61	14.01	9.71	41.32	23.72	56.00	46.00	-14.68	-22.28	Pass
5	1.8180	31.19	10.07	9.73	40.92	19.80	56.00	46.00	-15.08	-26.20	Pass
6	2.3020	28.43	8.43	9.74	38.17	18.17	56.00	46.00	-17.83	-27.83	Pass
7*	13.5620	46.78	46.66	9.89	56.67	56.55	60.00	50.00	-3.33	6.55	Note ²

Note: 1. N = Neutral Line.

2. 13.5620MHz is the fundamental of NFC, Its limit is controlled to the standard of Radio frequency.

6. RADIATED SPURIOUS EMISSIONS

6.1. LIMITS

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

Frequency (MHz)	Quasi-peak($\mu\text{V}/\text{m}$)	Measurement distance(m)	Quasi-peak($\text{dB}\mu\text{V}/\text{m}$)@distance 3m
0.009-0.490	2400/F(kHz)	300	53.8~88.5
0.490-1.705	24000/F(kHz)	30	43~53.8
1.705-30.0	30	30	49.5
30 ~ 88	100	3	40
88~216	150	3	43.5
216 ~ 960	200	3	46
Above 960	500	3	54

NOTE: (1) The lower limit shall apply at the transition frequencies.

6.2. TEST PROCEDURES (please refer to measurement standard)

1) Sequence of testing 9 kHz to 30 MHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Pre measurement:

- The turntable rotates from 0 ° to 315 ° using 45 ° steps.
- The antenna height is 0.8 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

Final measurement:

- Identified emissions during the pre measurement the software maximizes by rotating the turntable position (0 ° to 360 °) and by rotating the elevation axes (0 ° to 360 °).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the pre measurement and the limit will be stored.

2) Sequence of testing 30 MHz to 1 GHz**Setup:**

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Pre measurement:

- The turntable rotates from 0 ° to 315 ° using 45 ° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

3) Sequence of testing 1 GHz to 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Pre measurement:

- The turntable rotates from 0 ° to 315 ° using 45 ° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the pre measurement with marked maximum final measurements and the limit will be stored.

4) Sequence of testing above 18 GHz**Setup:**

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.

Pre measurement:

- The antenna is moved spherical over the EUT in different polarisations of the antenna.

Final measurement:

- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

NOTE: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ($10 \log(1/\text{duty cycle})$).

6.3. TEST SETUP

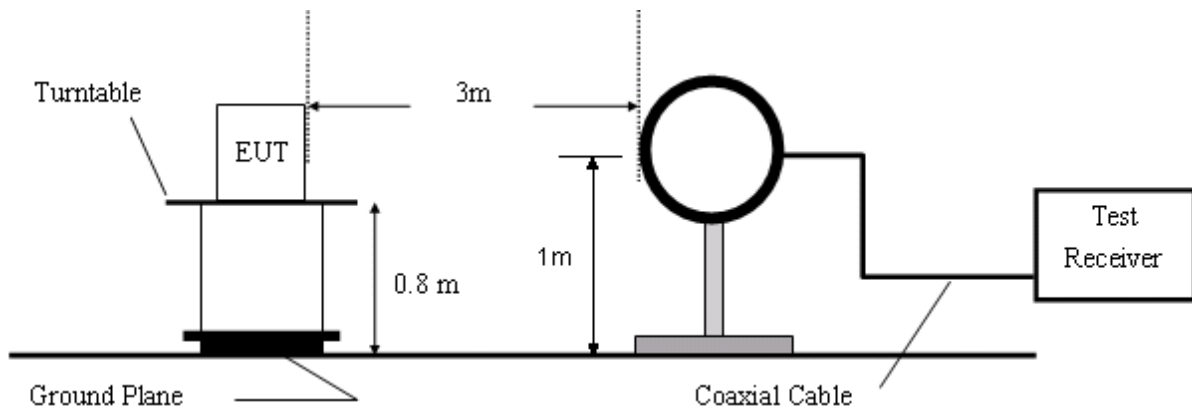


Figure 1. 9KHz to 30MHz radiated emissions test configuration

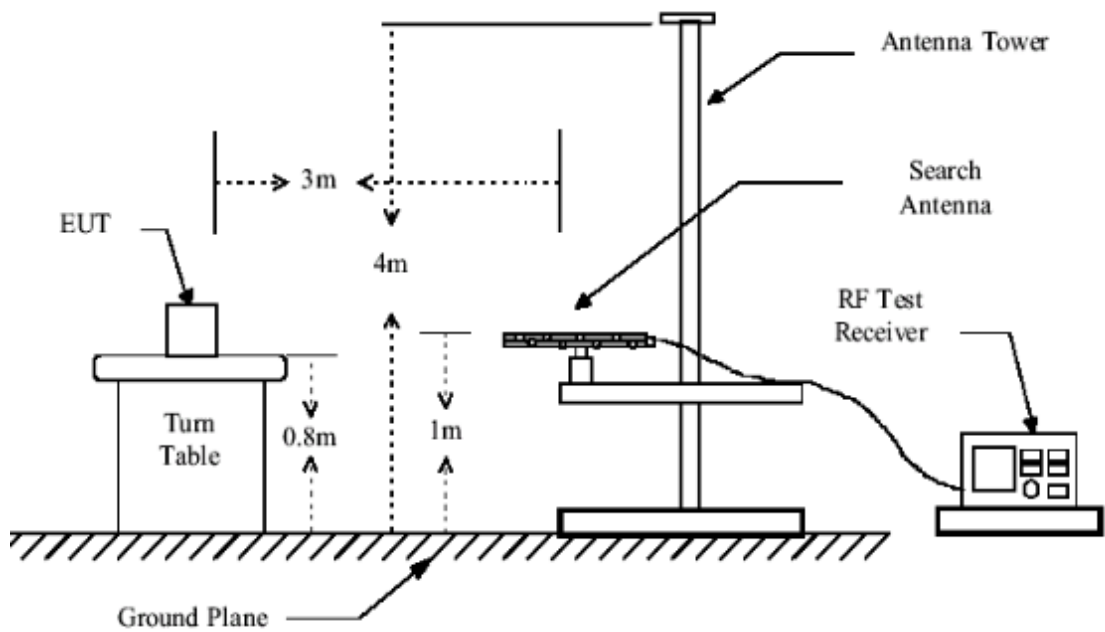


Figure 2. 30MHz to 1GHz radiated emissions test configuration

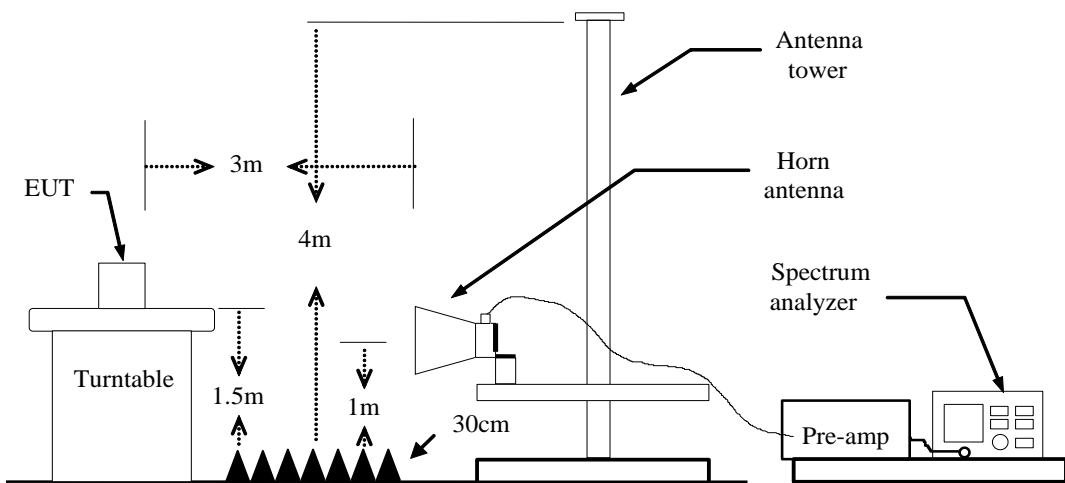


Figure 3. Above 1GHz radiated emissions test configuration

6.4. DATA SAMPLE

30MHz to 1GHz

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark	Pole
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		
xxx	xxx	37.06	-15.48	21.58	40.00	-18.42	QP	Vertical

Above 1 GHz

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark	Pole
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		
xxx	xxx	65.45	-11.12	54.33	74.00	-19.67	Peak	Vertical
xxx	xxx	63.00	-11.12	51.88	54.00	-2.12	AVG	Vertical

Frequency (MHz)	= Emission frequency in MHz
Ant.Pol. (H/V)	= Antenna polarization
Reading (dBuV)	= Uncorrected Analyzer / Receiver reading
Correction Factor (dB/m)	= Antenna factor + Cable loss – Amplifier gain
Result (dBuV/m)	= Reading (dBuV) + Correction Factor (dB/m)
Limit (dBuV/m)	= Limit stated in standard
Margin (dB)	= Remark Result (dBuV/m) – Limit (dBuV/m)
Peak	= Peak Reading
QP	= Quasi-peak Reading
AVG	= Average Reading


6.5. TEST RESULTS

30MHz to 1GHz

Mode: TX

Lowest channel (2402MHz)

Date: 2020/08/28

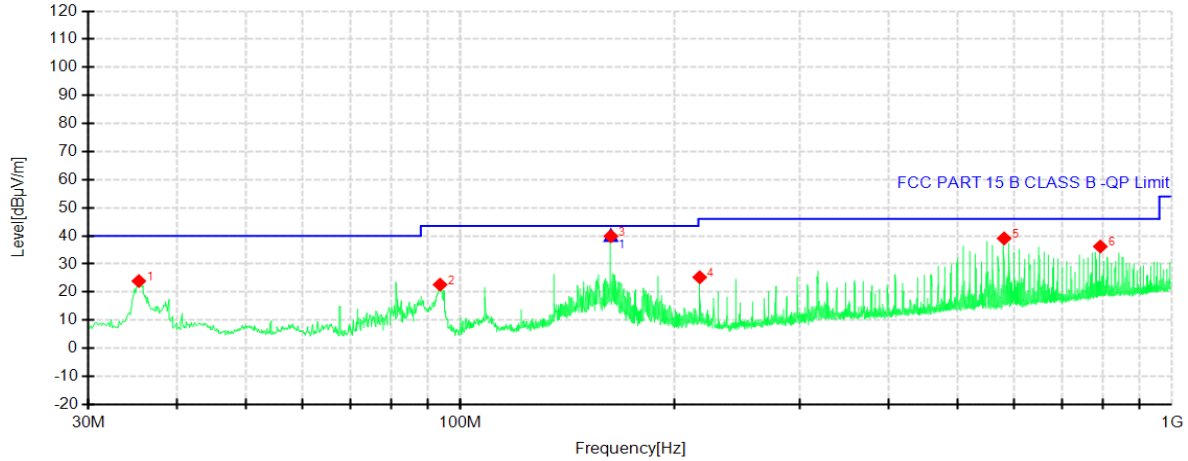

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Height [cm]	Angle [°]	Polarity
1	35.3350	54.04	23.91	-30.13	40.00	16.09	PK	100	81	Vertical
2	93.6563	54.83	22.64	-32.19	43.50	20.86	PK	200	7	Vertical
3	162.7688	67.19	39.89	-27.30	43.50	3.61	PK	100	164	Vertical
4	216.9675	54.72	25.27	-29.45	46.00	20.73	PK	100	119	Vertical
5	581.0813	59.26	39.11	-20.15	46.00	6.89	PK	100	127	Vertical
6	793.1475	52.68	36.21	-16.47	46.00	9.79	PK	100	191	Vertical

Final Data List									
NO.	Freq. [MHz]	Factor [dB]	QP Reading [dBµV/m]	QP Value [dBµV/m]	QP Limit [dBµV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	162.7493	-27.30	67.54	40.24	43.50	3.26	143	159.5	Vertical


Remark:

- 1 No emission found between lowest internal used/generated frequency to 30MHz.
- 2 Data of measurement within this frequency range in the table above the reading of PK detector are more 6dB than QP limit, therefore it's unnecessary to performed QP scan.
- 3 The IF bandwidth of Receiver between 30MHz to 1GHz was 120 kHz.

Mode: TX

Lowest channel (2402MHz)

Date: 2020/08/28

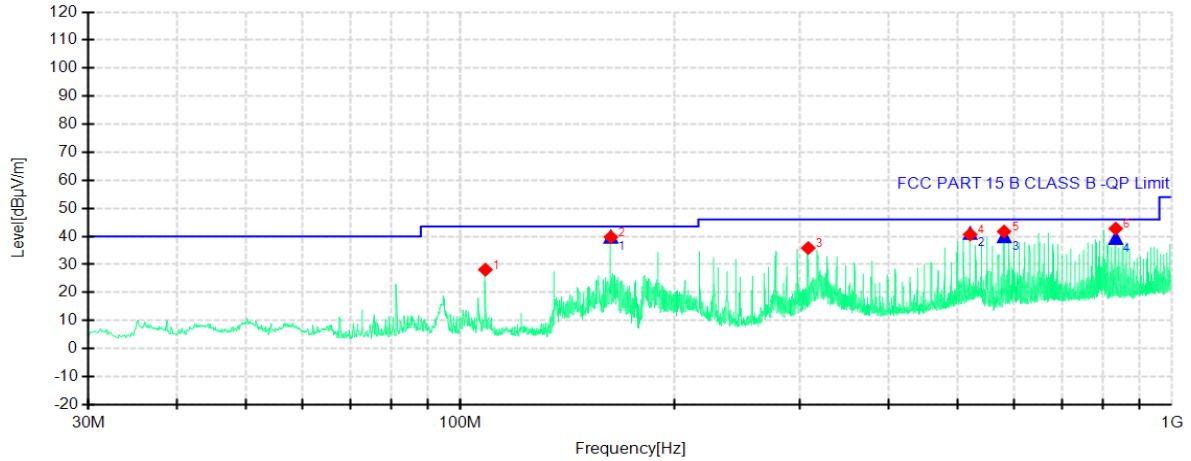

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Height [cm]	Angle [°]	Polarity
1	108.4488	58.31	28.13	-30.18	43.50	15.37	PK	200	50	Horizontal
2	162.7688	71.88	39.77	-32.11	43.50	3.73	PK	200	27	Horizontal
3	308.2688	62.19	35.85	-26.34	46.00	10.15	PK	100	150	Horizontal
4	520.4563	61.74	40.69	-21.05	46.00	5.31	PK	200	1	Horizontal
5	580.9600	61.69	41.74	-19.95	46.00	4.26	PK	100	146	Horizontal
6	833.6450	59.25	42.79	-16.46	46.00	3.21	PK	100	339	Horizontal


Final Data List									
NO.	Freq. [MHz]	Factor [dB]	QP Reading [dBµV/m]	QP Value [dBµV/m]	QP Limit [dBµV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	162.7525	-32.11	71.94	39.83	43.50	3.67	179	26.5	Horizontal
2	520.4875	-21.05	62.20	41.15	46.00	4.85	147	288.2	Horizontal
3	581.2040	-19.95	59.97	40.02	46.00	5.98	129	87.9	Horizontal
4	833.6117	-16.46	55.87	39.41	46.00	6.59	100	346.4	Horizontal

Remark:

- 1 No emission found between lowest internal used/generated frequency to 30MHz.
- 2 Data of measurement within this frequency range in the table above the reading of PK detector are more 6dB than QP limit, therefore it's unnecessary to performed QP scan.
- 3 The IF bandwidth of Receiver between 30MHz to 1GHz was 120 kHz.

Mode: TX
Middle channel (2440MHz)

Date: 2020/08/28

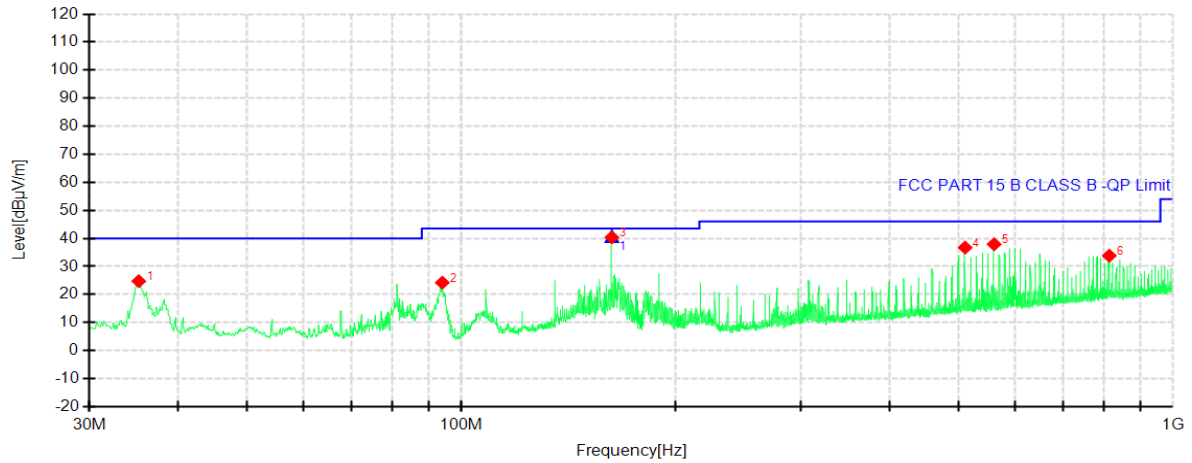

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Height [cm]	Angle [°]	Polarity
1	35.2138	54.88	24.74	-30.14	40.00	15.26	PK	100	13	Vertical
2	94.0200	56.40	24.23	-32.17	43.50	19.27	PK	200	7	Vertical
3	162.7688	67.67	40.37	-27.30	43.50	3.13	PK	200	168	Vertical
4	510.3925	58.84	36.74	-22.10	46.00	9.26	PK	100	146	Vertical
5	560.7113	58.98	37.92	-21.06	46.00	8.08	PK	100	100	Vertical
6	813.7600	49.90	33.82	-16.08	46.00	12.18	PK	100	154	Vertical


Final Data List									
NO.	Freq. [MHz]	Factor [dB]	QP Reading [dBµV/m]	QP Value [dBµV/m]	QP Limit [dBµV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	162.7525	-27.30	68.04	40.74	43.50	2.76	152	162.3	Vertical

Remark:

- 1 No emission found between lowest internal used/generated frequency to 30MHz.
- 2 Data of measurement within this frequency range in the table above the reading of PK detector are more 6dB than QP limit, therefore it's unnecessary to performed QP scan.
- 3 The IF bandwidth of Receiver between 30MHz to 1GHz was 120 kHz.

Mode: TX
Middle channel (2440MHz)

Date: 2020/08/28

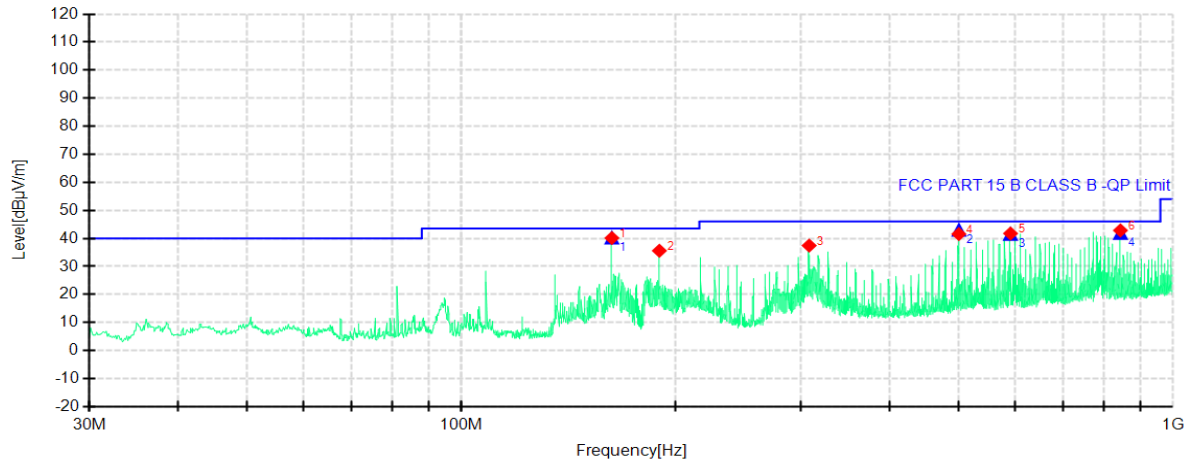

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Height [cm]	Angle [°]	Polarity
1	162.7688	72.25	40.14	-32.11	43.50	3.36	PK	200	44	Horizontal
2	189.8075	65.29	35.60	-29.69	43.50	7.90	PK	100	206	Horizontal
3	308.1475	63.78	37.44	-26.34	46.00	8.56	PK	100	232	Horizontal
4	500.2075	63.11	41.55	-21.56	46.00	4.45	PK	200	354	Horizontal
5	591.2663	61.52	41.75	-19.77	46.00	4.25	PK	100	139	Horizontal
6	843.8300	59.12	42.85	-16.27	46.00	3.15	PK	100	342	Horizontal


Final Data List									
NO.	Freq. [MHz]	Factor [dB]	QP Reading [dBµV/m]	QP Value [dBµV/m]	QP Limit [dBµV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	162.7493	-32.11	72.34	40.23	43.50	3.27	182	33.2	Horizontal
2	500.2475	-21.56	64.53	42.97	46.00	3.03	142	93.1	Horizontal
3	591.0416	-19.78	61.31	41.53	46.00	4.47	123	136.9	Horizontal
4	843.7625	-16.26	58.13	41.87	46.00	4.13	100	347.2	Horizontal

Remark:

- 1 No emission found between lowest internal used/generated frequency to 30MHz.
- 2 Data of measurement within this frequency range in the table above the reading of PK detector are more 6dB than QP limit, therefore it's unnecessary to performed QP scan.
- 3 The IF bandwidth of Receiver between 30MHz to 1GHz was 120 kHz.

Mode: TX
 Highest channel (2480MHz)

Date: 2020/08/28

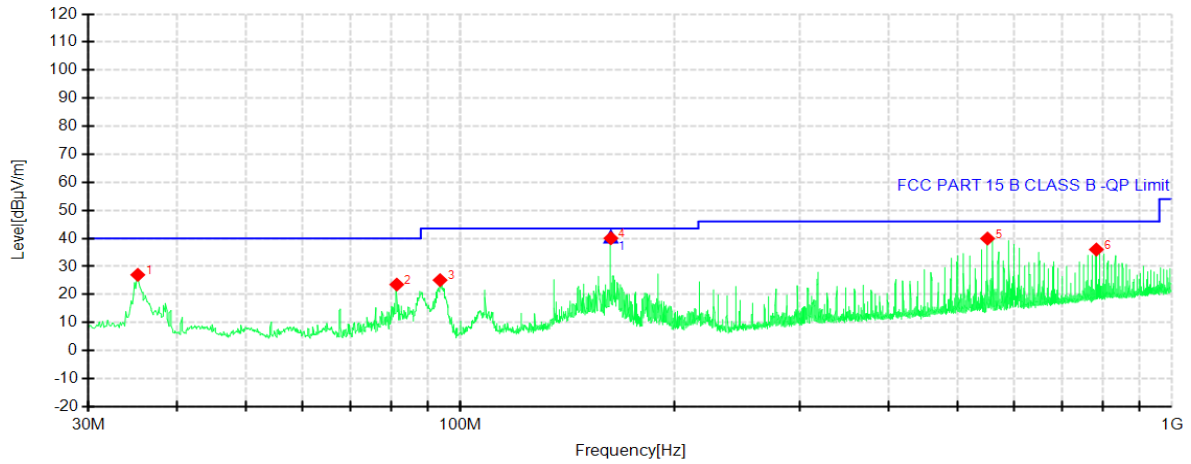

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Height [cm]	Angle [°]	Polarity
1	35.2138	57.15	27.01	-30.14	40.00	12.99	PK	100	195	Vertical
2	81.4100	56.09	23.55	-32.54	40.00	16.45	PK	200	319	Vertical
3	93.6563	57.30	25.11	-32.19	43.50	18.39	PK	200	357	Vertical
4	162.7688	67.35	40.05	-27.30	43.50	3.45	PK	200	164	Vertical
5	550.5263	61.13	39.95	-21.18	46.00	6.05	PK	100	128	Vertical
6	783.0838	52.54	36.03	-16.51	46.00	9.97	PK	100	173	Vertical


Final Data List									
NO.	Freq. [MHz]	Factor [dB]	QP Reading [dBµV/m]	QP Value [dBµV/m]	QP Limit [dBµV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	162.7460	-27.30	67.93	40.63	43.50	2.87	148	168.7	Vertical

Remark:

- 1 No emission found between lowest internal used/generated frequency to 30MHz.
- 2 Data of measurement within this frequency range in the table above the reading of PK detector are more 6dB than QP limit, therefore it's unnecessary to performed QP scan.
- 3 The IF bandwidth of Receiver between 30MHz to 1GHz was 120 kHz.

Mode: TX
 Highest channel (2480MHz)

Date: 2020/08/28

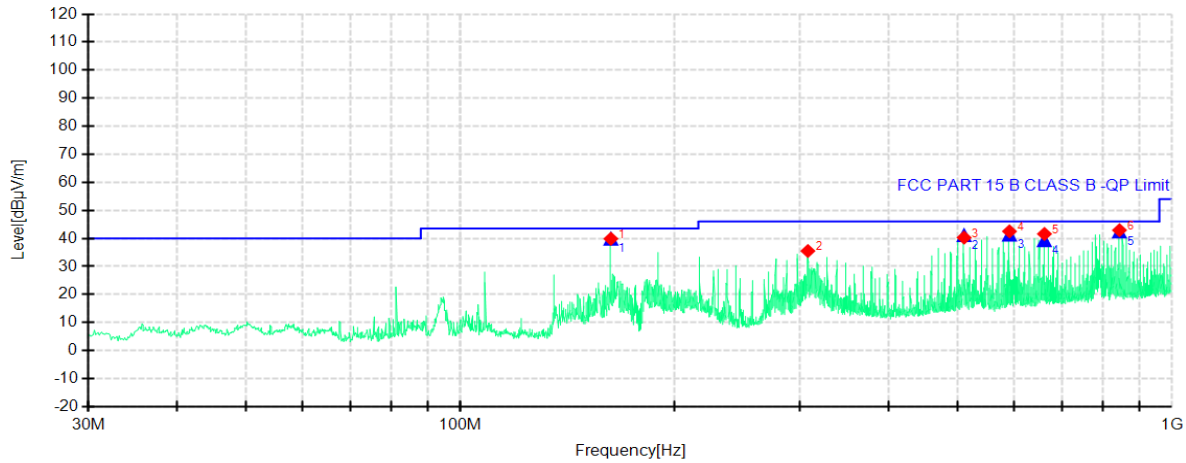

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Height [cm]	Angle [°]	Polarity
1	162.7688	71.98	39.87	-32.11	43.50	3.63	PK	200	36	Horizontal
2	307.9050	61.86	35.52	-26.34	46.00	10.48	PK	100	215	Horizontal
3	510.3925	62.19	40.29	-21.90	46.00	5.71	PK	200	0	Horizontal
4	591.1450	62.29	42.51	-19.78	46.00	3.49	PK	100	135	Horizontal
5	661.9550	60.23	41.60	-18.63	46.00	4.40	PK	100	120	Horizontal
6	843.8300	59.20	42.93	-16.27	46.00	3.07	PK	100	349	Horizontal

Final Data List									
NO.	Freq. [MHz]	Factor [dB]	QP Reading [dBµV/m]	QP Value [dBµV/m]	QP Limit [dBµV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	162.7590	-32.11	71.95	39.84	43.50	3.66	187	26.5	Horizontal
2	510.3517	-21.90	63.00	41.10	46.00	4.90	174	357	Horizontal
3	591.0268	-19.78	61.05	41.27	46.00	4.73	124	139.1	Horizontal
4	661.8491	-18.63	57.94	39.31	46.00	6.69	100	115.9	Horizontal
5	843.7625	-16.26	58.63	42.37	46.00	3.63	100	346.5	Horizontal

Remark:

- 1 No emission found between lowest internal used/generated frequency to 30MHz.
- 2 Data of measurement within this frequency range in the table above the reading of PK detector are more 6dB than QP limit, therefore it's unnecessary to performed QP scan.
- 3 The IF bandwidth of Receiver between 30MHz to 1GHz was 120 kHz.

Above 1GHz:

According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

Mode: TX

Lowest channel (2402MHz)

Date: 2020/09/02

Suspected Data List									
NO	Freq. [MHz]	PK Reading [dB μ V/m]	PK Level [dB μ V/m]	Factor [dB]	PK Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1269.7116	45.39	46.45	1.06	74.00	27.55	150	339	Vertical
2	1728.1214	42.50	45.83	3.33	74.00	28.17	150	44	Vertical
3	2401.5669	82.36	89.39	7.03	74.00	-15.39	150	242	Vertical
4	4803.3431	57.99	47.37	-10.62	74.00	26.63	150	171	Vertical
5	7043.8603	48.14	44.49	-3.65	74.00	29.51	150	289	Vertical
6	9521.1801	44.97	46.85	1.88	74.00	27.15	150	32	Vertical
7	14005.429	39.40	49.75	10.35	74.00	24.25	150	210	Vertical

Mode: TX

Lowest channel (2402 MHz)

Date: 2020/09/02

Suspected Data List									
NO	Freq. [MHz]	PK Reading [dB μ V/m]	PK Level [dB μ V/m]	Factor [dB]	PK Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1746.4577	45.29	48.72	3.43	74.00	25.28	150	173	Horizontal
2	2401.9003	83.09	90.12	7.03	74.00	-16.12	150	180	Horizontal
3	2799.9667	42.26	48.65	6.39	74.00	25.35	150	0	Horizontal
4	4804.4146	59.15	48.54	-10.61	74.00	25.46	150	240	Horizontal
5	7740.3386	46.98	45.33	-1.65	74.00	28.67	150	52	Horizontal
6	11306.307	41.00	48.25	7.25	74.00	25.75	150	111	Horizontal
7	14565.826	39.08	49.51	10.43	74.00	24.49	150	52	Horizontal

AV Final Data List									
NO	Freq. [MHz]	Factor [dB]	AV Reading [dB μ V/m]	AV Value [dB μ V/m]	AV Limit [dB μ V/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	4803.7516	-10.61	38.62	28.01	54.00	25.99	103	356.7	Horizontal

Mode: TX

Middle channel (2440MHz)

Date: 2020/09/02

Suspected Data List									
NO	Freq. [MHz]	PK Reading [dB μ V/m]	PK Level [dB μ V/m]	Factor [dB]	PK Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1368.0613	43.44	44.95	1.51	74.00	29.05	150	302	Vertical
2	1753.1255	44.41	47.88	3.47	74.00	26.12	150	173	Vertical
3	2440.2400	82.41	88.75	6.34	74.00	-14.75	150	179	Vertical
4	4879.4200	61.61	52.26	-9.35	74.00	21.74	150	245	Vertical
5	7376.0269	46.94	44.24	-2.70	74.00	29.76	150	63	Vertical
6	10255.161	43.37	47.35	3.98	74.00	26.65	150	176	Vertical
7	14003.285	40.30	50.68	10.38	74.00	23.32	150	285	Vertical

AV Final Data List									
NO	Freq. [MHz]	Factor [dB]	AV Reading [dB μ V/m]	AV Value [dB μ V/m]	AV Limit [dB μ V/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	4879.3712	-9.35	35.36	26.01	54.00	27.99	131	356.8	Vertical

Mode: TX

Middle channel (2440 MHz)

Date: 2020/09/02

Suspected Data List									
NO	Freq. [MHz]	PK Reading [dB μ V/m]	PK Level [dB μ V/m]	Factor [dB]	PK Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1821.4702	42.04	45.68	3.64	74.00	28.32	150	277	Horizontal
2	2439.9067	82.56	88.90	6.34	74.00	-14.90	150	179	Horizontal
3	4880.4915	60.94	51.60	-9.34	74.00	22.40	150	240	Horizontal
4	6777.0555	48.11	43.65	-4.46	74.00	30.35	150	340	Horizontal
5	10298.021	43.77	47.63	3.86	74.00	26.37	150	3	Horizontal
6	13458.961	39.83	48.87	9.04	74.00	25.13	150	310	Horizontal
7	15543.038	38.96	47.83	8.87	74.00	26.17	150	52	Horizontal

AV Final Data List									
NO	Freq. [MHz]	Factor [dB]	AV Reading [dB μ V/m]	AV Value [dB μ V/m]	AV Limit [dB μ V/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	4880.2475	-9.34	39.29	29.95	54.00	24.05	119	354.4	Horizontal

Mode: TX
Highest channel (2480MHz)

Date: 2020/09/02

Suspected Data List									
NO	Freq. [MHz]	PK Reading [dB μ V/m]	PK Level [dB μ V/m]	Factor [dB]	PK Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1542.7571	42.92	45.27	2.35	74.00	28.73	150	271	Vertical
2	2479.5799	82.87	88.50	5.63	74.00	-14.50	150	198	Vertical
3	4959.7828	59.30	50.50	-8.80	74.00	23.50	150	132	Vertical
4	6772.7695	47.41	42.87	-4.54	74.00	31.13	150	181	Vertical
5	8447.5320	46.75	45.98	-0.77	74.00	28.02	150	13	Vertical
6	10231.588	43.39	47.43	4.04	74.00	26.57	150	341	Vertical
7	14052.575	39.61	49.39	9.78	74.00	24.61	150	72	Vertical

AV Final Data List									
NO	Freq. [MHz]	Factor [dB]	AV Reading [dB μ V/m]	AV Value [dB μ V/m]	AV Limit [dB μ V/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	4959.7828	-8.80	36.45	27.65	54.00	26.35	150	132	Vertical

Mode: TX
Highest channel (2480MHz)

Date: 2020/09/02

Suspected Data List									
NO	Freq. [MHz]	PK Reading [dB μ V/m]	PK Level [dB μ V/m]	Factor [dB]	PK Limit [dB μ V/m]	PK Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1277.0462	44.13	45.23	1.10	74.00	28.77	150	357	Horizontal
2	1504.4174	43.55	45.85	2.30	74.00	28.15	150	202	Horizontal
3	2479.5799	82.86	88.49	5.63	74.00	-14.49	150	178	Horizontal
4	4959.7828	57.80	49.00	-8.80	74.00	25.00	150	181	Horizontal
5	6259.5185	48.24	40.98	-7.26	74.00	33.02	150	241	Horizontal
6	9894.0639	44.69	47.45	2.76	74.00	26.55	150	340	Horizontal
7	13301.450	39.91	48.32	8.41	74.00	25.68	150	360	Horizontal

AV Final Data List									
NO	Freq. [MHz]	Factor [dB]	AV Reading [dB μ V/m]	AV Value [dB μ V/m]	AV Limit [dB μ V/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	4959.7828	-8.80	35.43	26.63	54.00	27.37	150	181	Horizontal

Remark:

- 1 Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2 Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3 Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4 Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

7. 6dB BANDWIDTH


7.1. LIMITS

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

7.2. TEST PROCEDURES

- 1) Remove the antenna from the EUT, and then connect a low loss RF cable from antenna port to the spectrum analyzer.
- 2) Set resolution bandwidth (RBW) = 100kHz. Set the video bandwidth (VBW) $\geq 3 \times$ RBW. Detector = Peak. Trace mode = max hold. Sweep = auto couple. Allow the trace to stabilize, record 6dB bandwidth value.
- 3) Repeat above procedures until all frequencies measured were complete.


7.3. TEST SETUP

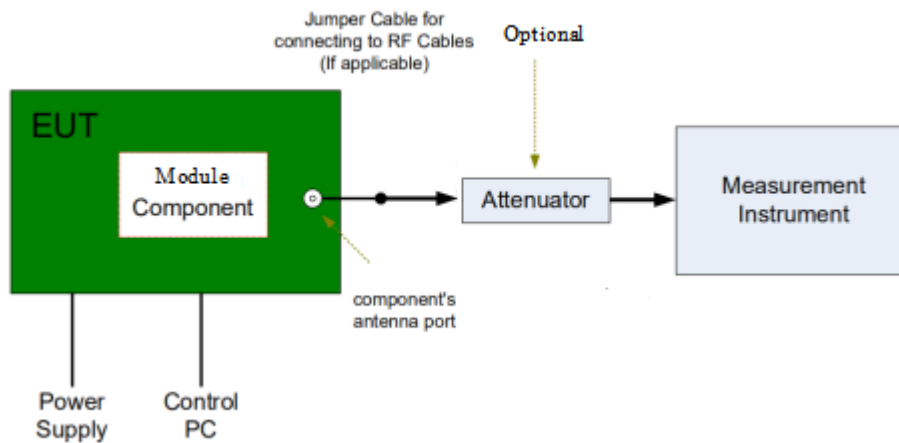


7.4. TEST RESULTS

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Lowest	2402	687.1	>500	PASS
Middle	2440	674.3		PASS
Highest	2480	667.5		PASS


Lowest channel (2402MHz)

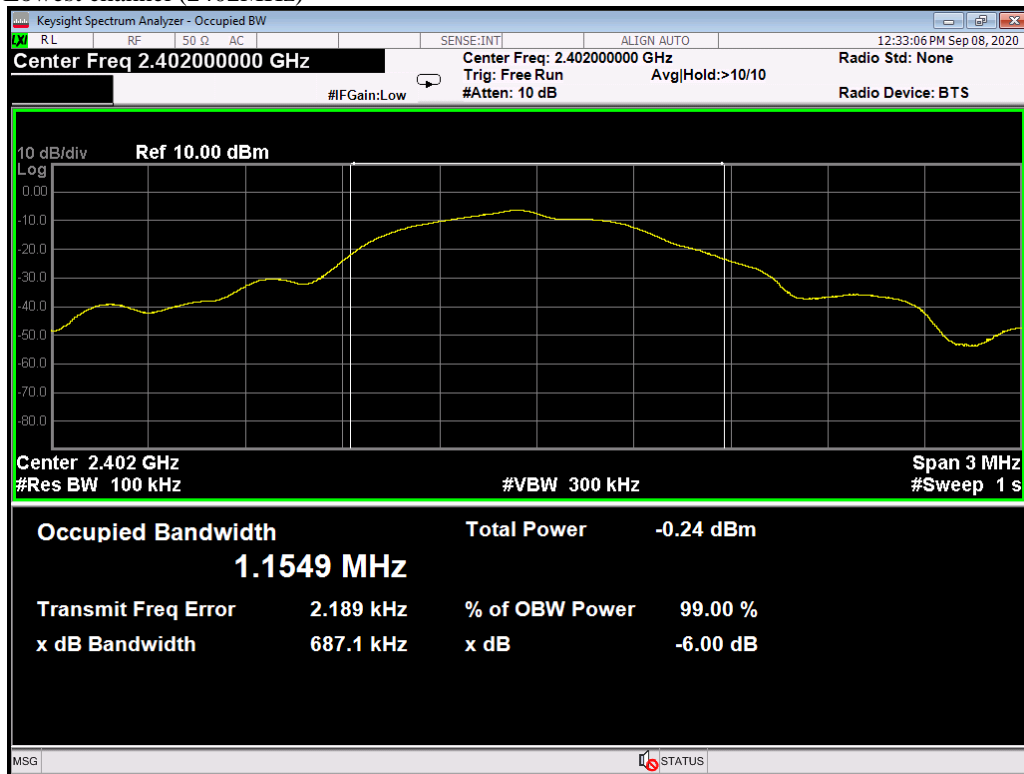

Middle channel (2440 MHz)

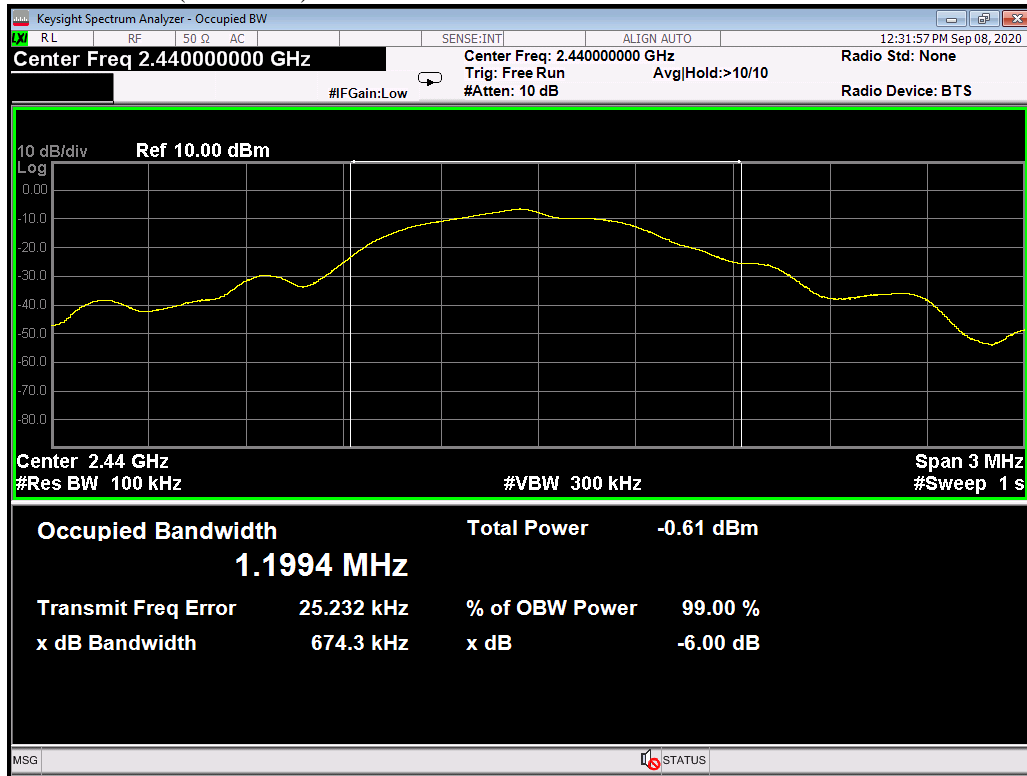

Highest channel (2480MHz)

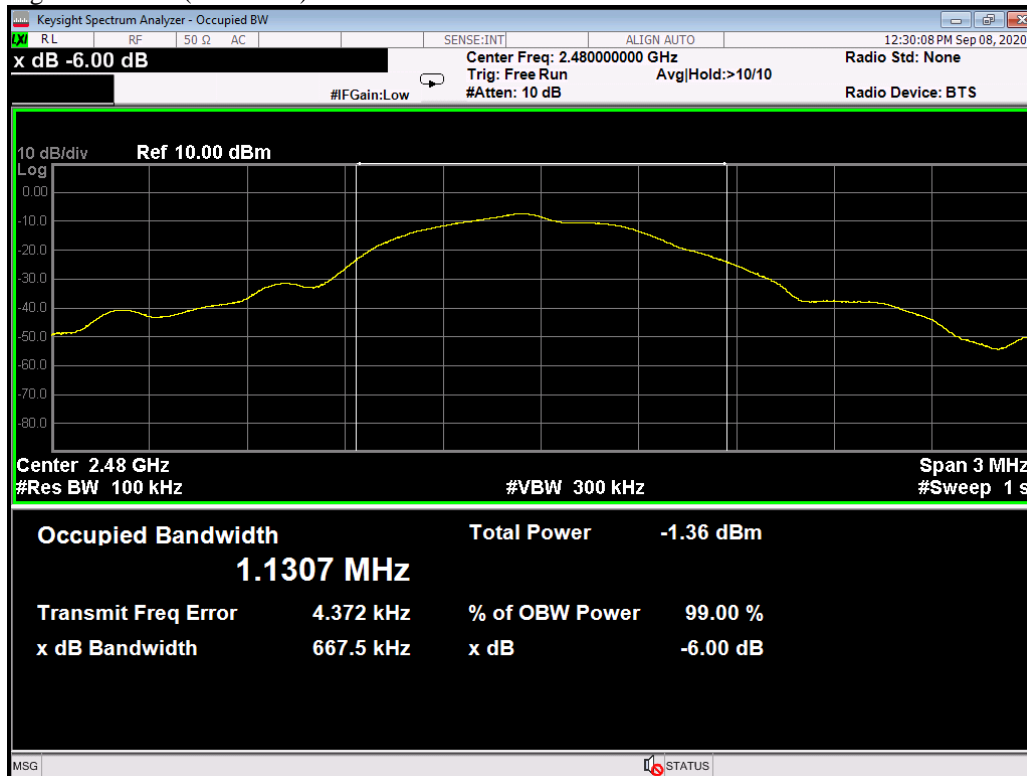

8. MAXIMUM PEAK OUTPUT POWER


8.1.LIMITS

The maximum Peak output power measurement is 1W

8.2.TEST PROCEDURES

- 1) Place the EUT on a bench and set it in transmitting mode.
- 2) Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter.

8.3.TEST SETUP

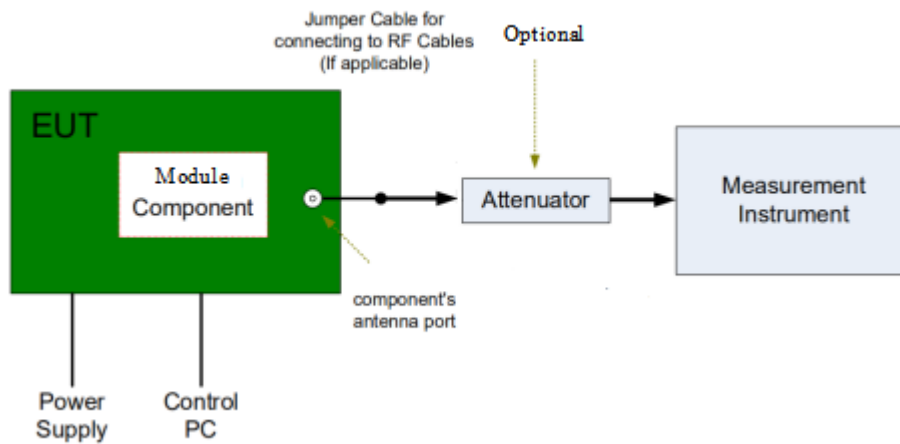

8.4.TEST RESULTS

Channel	Frequency (MHz)	Measured Channel Power (dBm)	Limit	Peak/ Average	Result
Lowest	2402	1.09	1W (30dBm)	Peak	Pass
Middle	2440	0.78			Pass
Highest	2480	0.08			Pass
Lowest	2402	-0.86		Average	Pass
Middle	2440	-1.20			Pass
Highest	2480	-2.02			Pass

9. POWER SPECTRAL DENSITY


9.1. LIMITS

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

9.2. TEST PROCEDURES

- 1) Remove the antenna from the EUT, and then connect a low loss RF cable from antenna port to the spectrum analyzer.
- 2) Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- 3) Set the analyzer span to 1.5 times the DTS bandwidth. Set the RBW = 3 kHz. Set the VBW ≥ 3 RBW. Detector = peak. Ensure that the number of measurement points in the sweep $\geq 2 \times$ span/RBW (use of a greater number of measurement points than this minimum requirement is recommended).
- 4) Repeat above procedures until all frequencies measured were complete.


9.3. TEST SETUP

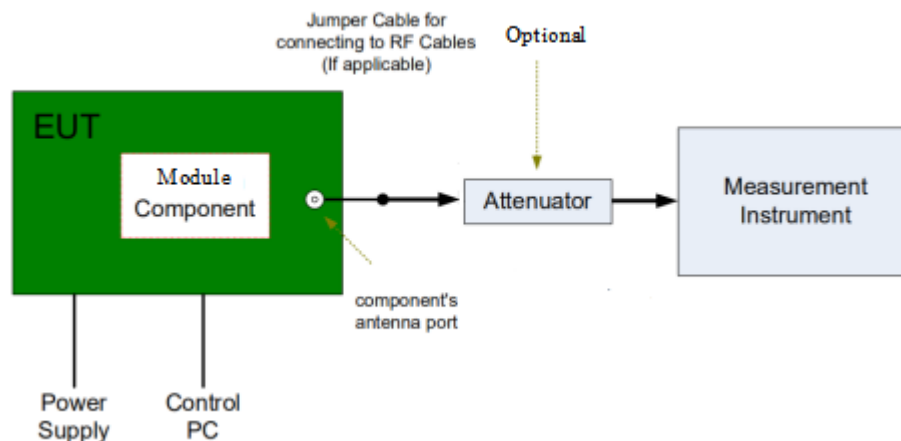


9.4. TEST RESULTS

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm/3kHz)	Test Result
Lowest	2402	-12.333	8	PASS
Middle	2440	-12.986		PASS
Highest	2480	-13.843		PASS


Lowest channel (2402MHz)

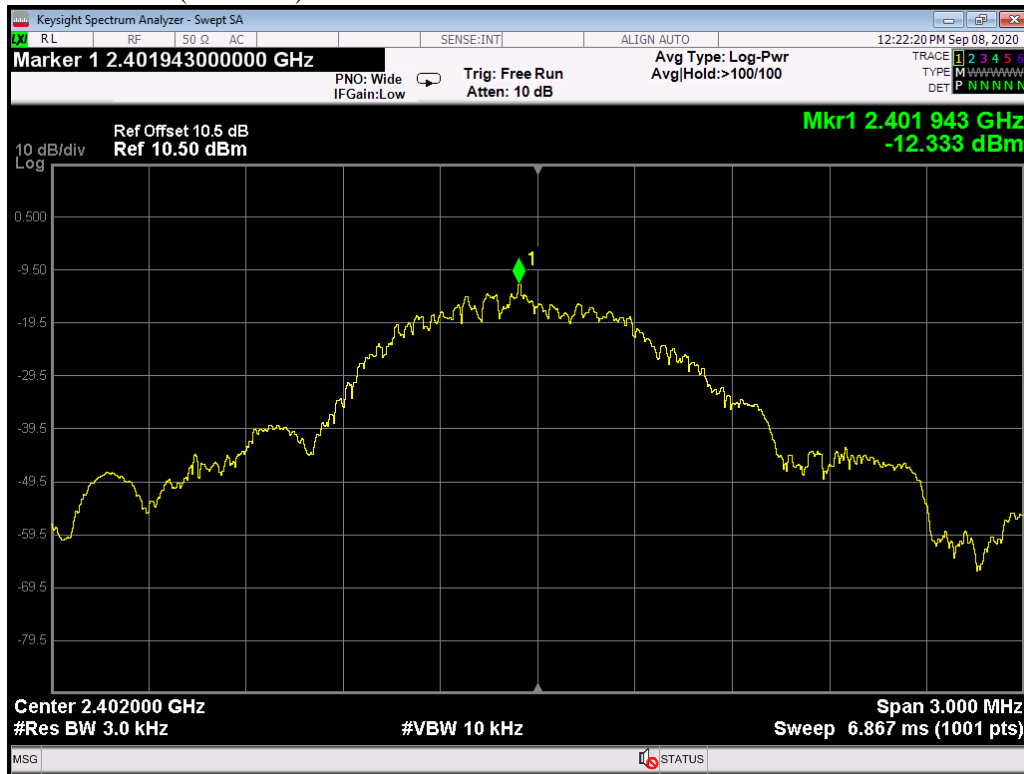

Middle channel (2440 MHz)

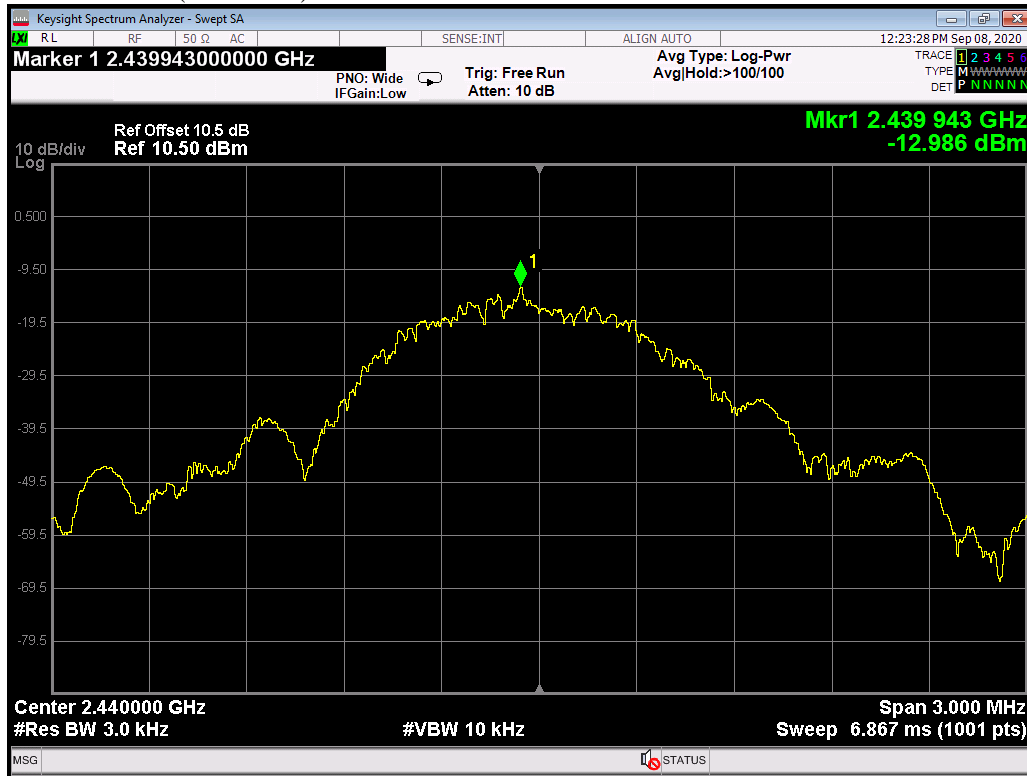

Highest channel (2480MHz)

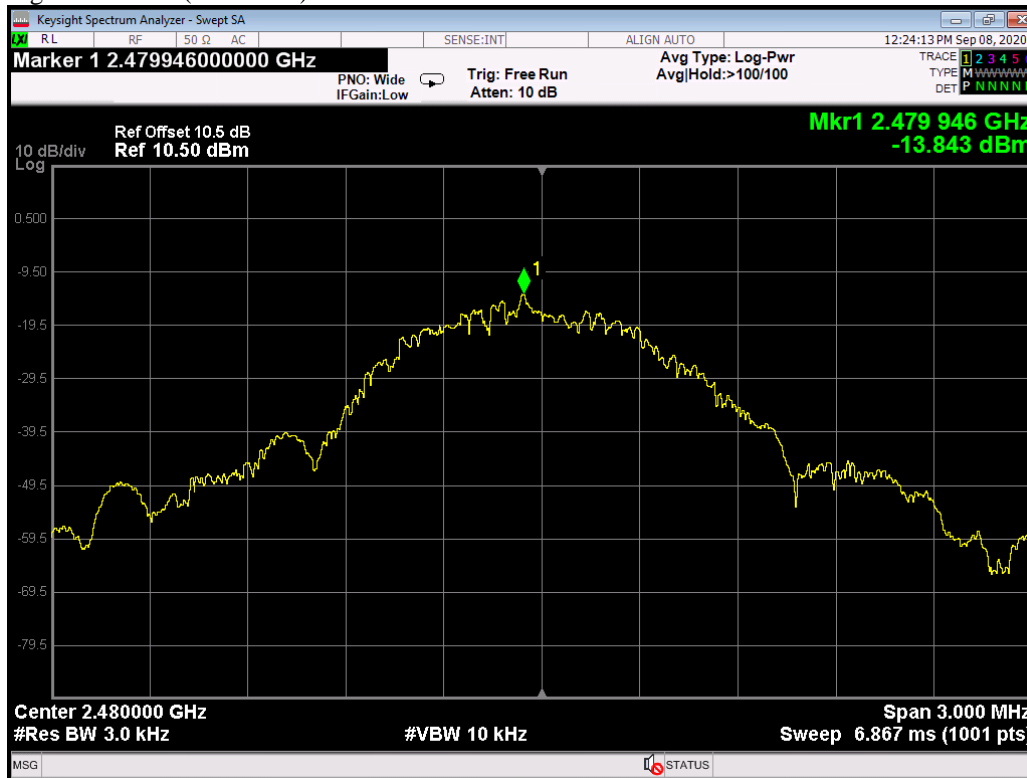

10. CONDUCTED BAND EDGES AND SPURIOUS EMISSIONS

10.1. LIMITS

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.


10.2. TEST PROCEDURES

Test procedures follow KDB 558074 D01 DTS Measurement Guidance v05r02.

Remove the antenna from the EUT and then connect a low attenuation cable from the antenna port to the spectrum.


- 1) Remove the antenna from the EUT and then connect a low attenuation cable from the antenna port to the spectrum.
- 2) Set the spectrum analyzer: RBW =100KHz; VBW =300KHz, Span = 10MHz to 26GHz; Sweep = auto; Detector Function = Peak. Trace = Max, hold.
- 3) Measure and record the results in the test report.
- 4) The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 5) Measurements are made over the 9 kHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels. No emission found between lowest internal used/generated frequency to 10MHz, it is only recorded 10MHz to 26GHz.

10.3. TEST SETUP

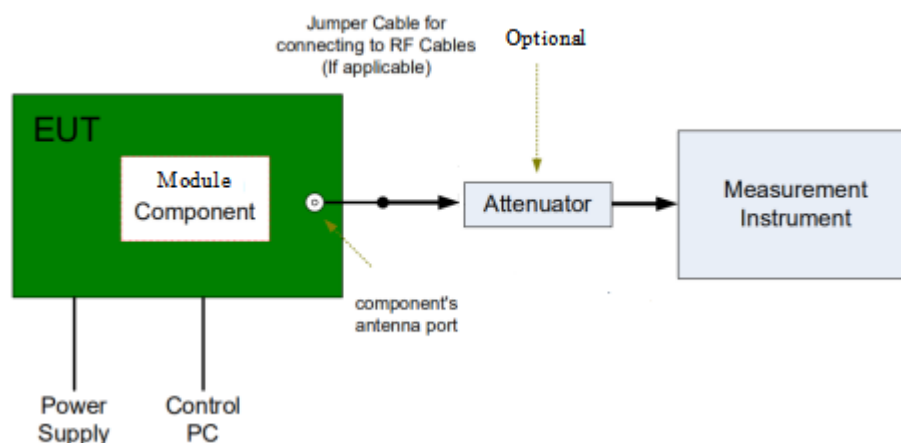


10.4. TEST RESULTS



Lowest channel (2402MHz)
0.01GHz-26.5GHz

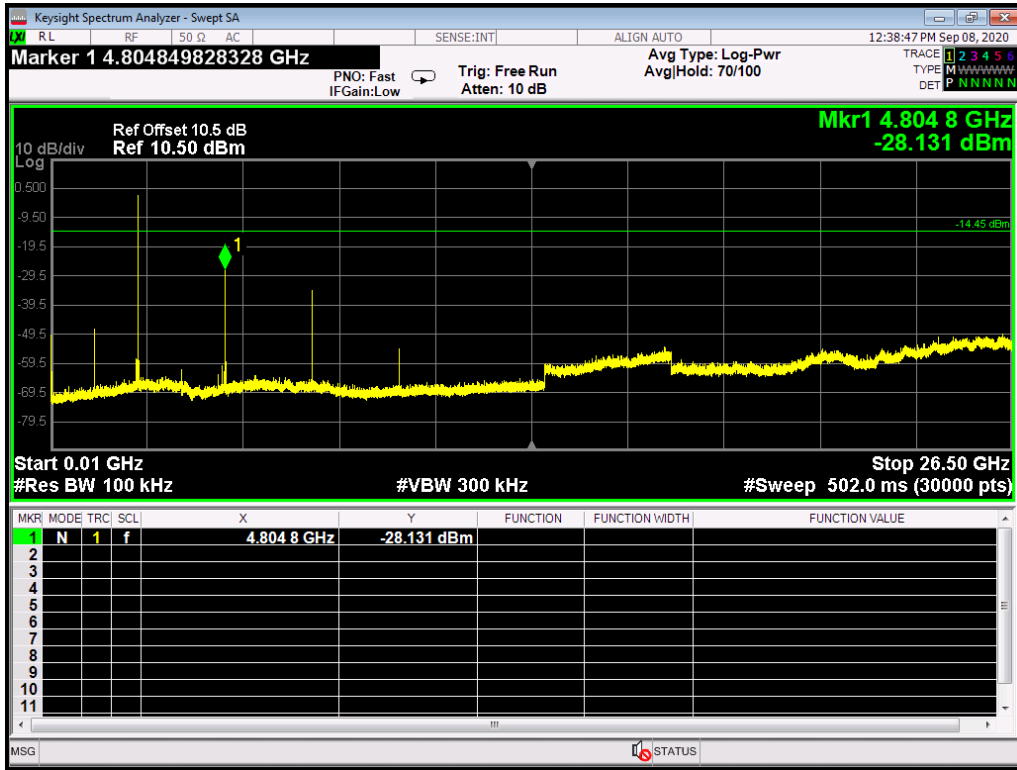


2.31GHz-2.41GHz

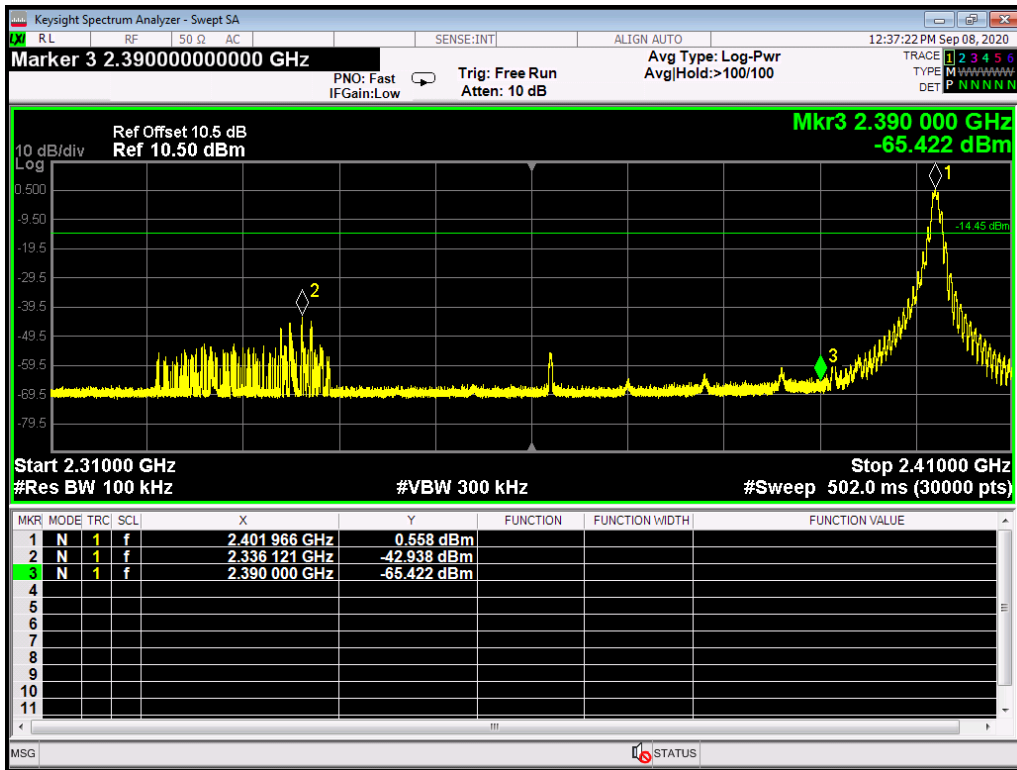


Middle channel (2440 MHz)
0.01GHz-26.5GHz

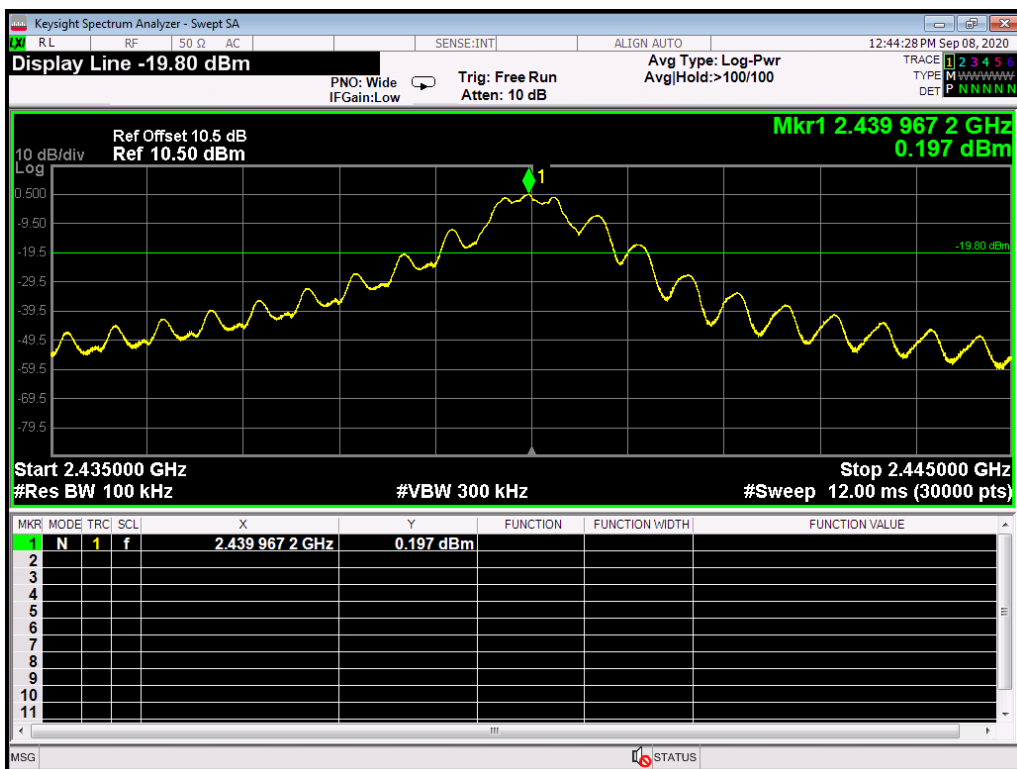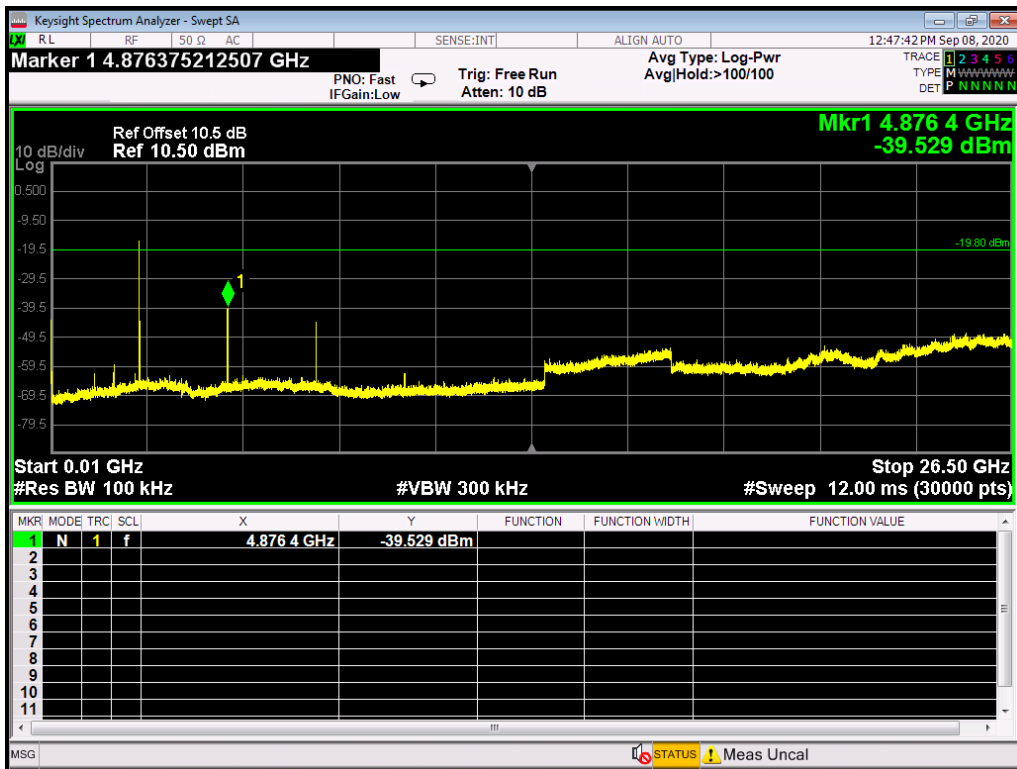

Highest channel (2480MHz)
0.01GHz-26.5GHz

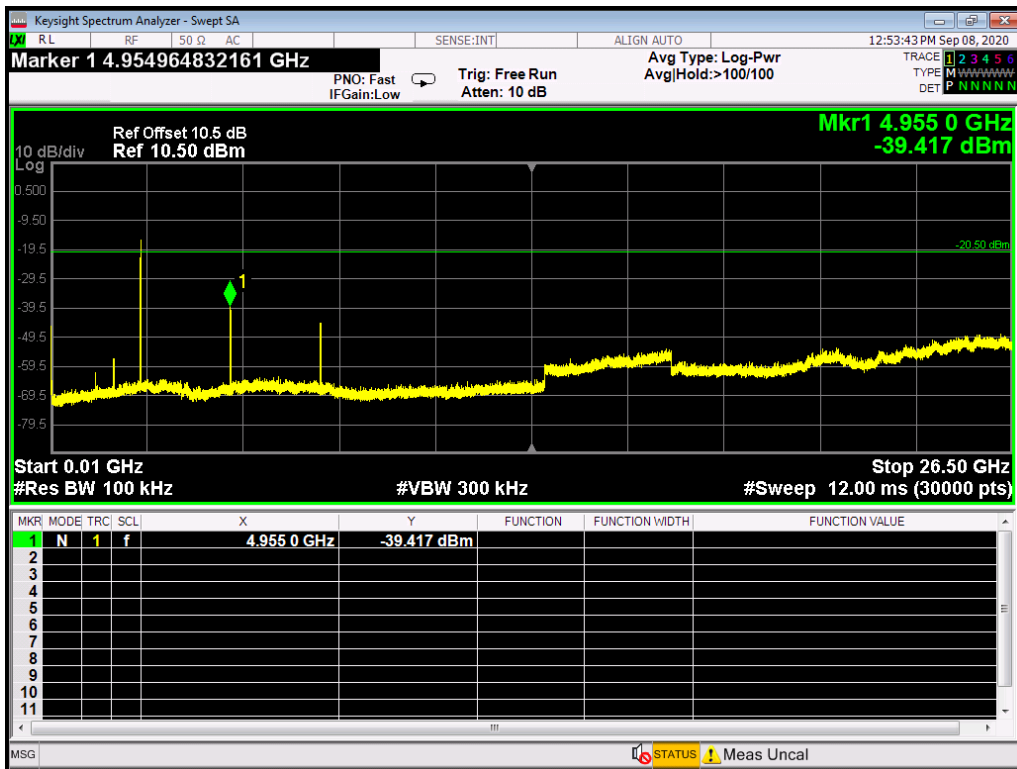

2.475GHz-2.5GHz

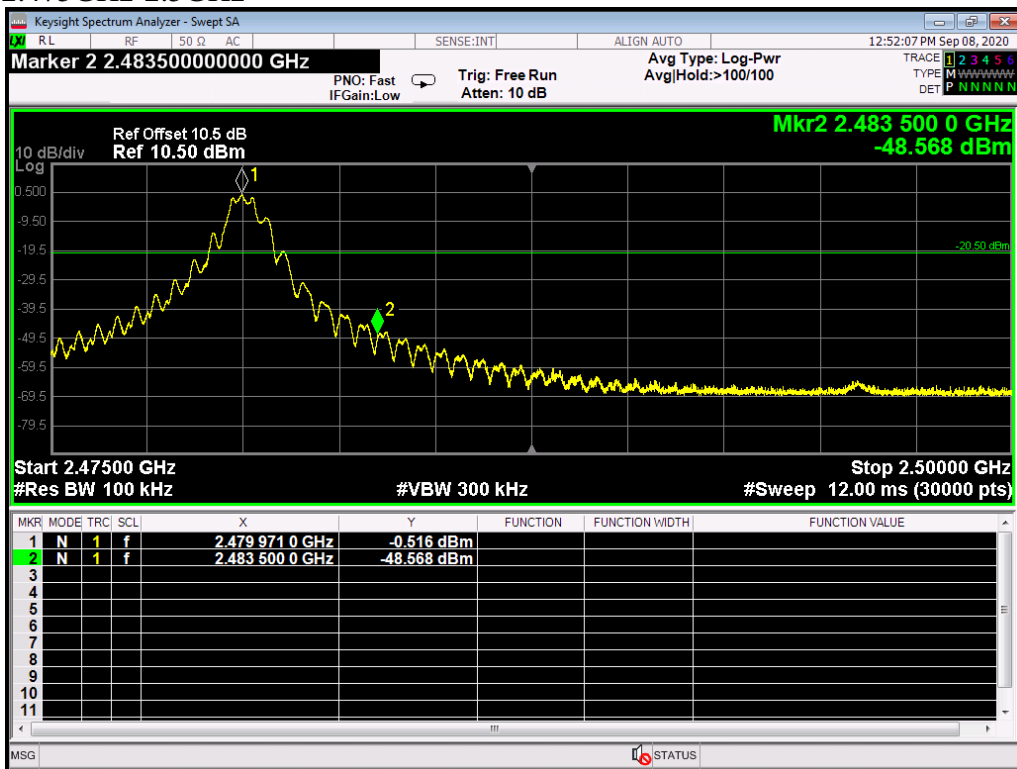

11. RESTRICTED BANDS OF OPERATION

11.1. LIMITS

Section 15.247(d) In addition, Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 -	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.69525	960 - 1240	7.25 - 7.75
4.125 - 4.128	16.80425 -	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	16.80475	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	25.5 - 25.67	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	37.5 - 38.25	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	73 - 74.6	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	74.8 - 75.2	2200 - 2300	14.47 - 14.5
8.291 - 8.294	108 - 121.94	2310 - 2390	15.35 - 16.2
8.362 - 8.366	123 - 138	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	149.9 - 150.05	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.52475 -	3260 - 3267	23.6 - 24.0
12.29 - 12.293	156.52525	3332 - 3339	31.2 - 31.8
12.51975 -	156.7 - 156.9	3345.8 - 3358	36.43 - 36.5
12.52025	162.0125 - 167.17	3600 - 4400	
12.57675 -	167.72 - 173.2		
12.57725	240 - 285		
13.36 - 13.41	322 - 335.4		

11.2. TEST PROCEDURES

Test procedures follow KDB 558074 D01 DTS Meas Guidance v03r01.

- 1) The EUT is placed on a turntable, which is 1.5m above the ground plane.
- 2) The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3) EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
- 4) Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - a) PEAK: RBW=1MHz / VBW=1MHz / Sweep=AUTO
 - b) AVERAGE: RBW=1MHz / VBW=1/T / Sweep=AUTO
- 5) Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

11.3. TEST SETUP

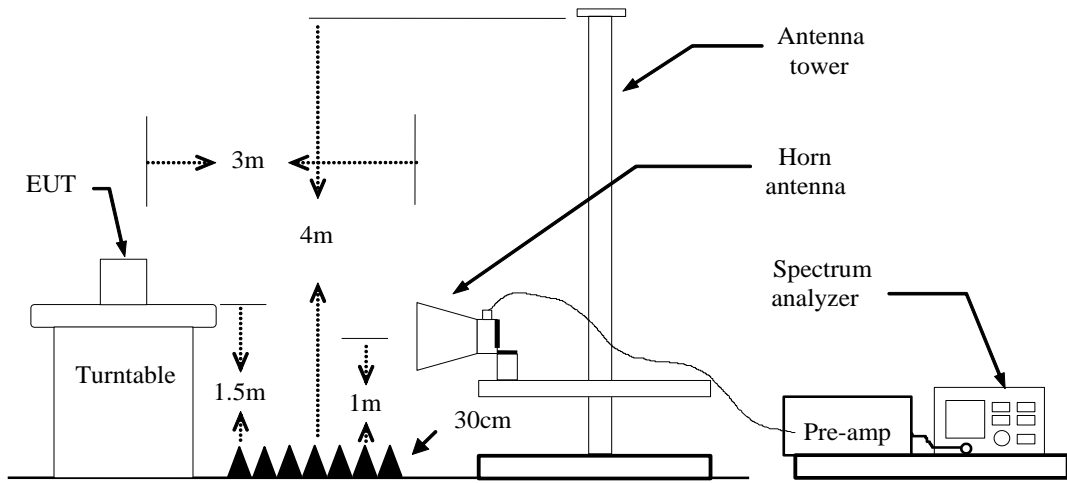


11.4. TEST RESULTS

Lowest Channel

Channel 2402MHz


Detector mode: Peak

Polarity: Horizontal

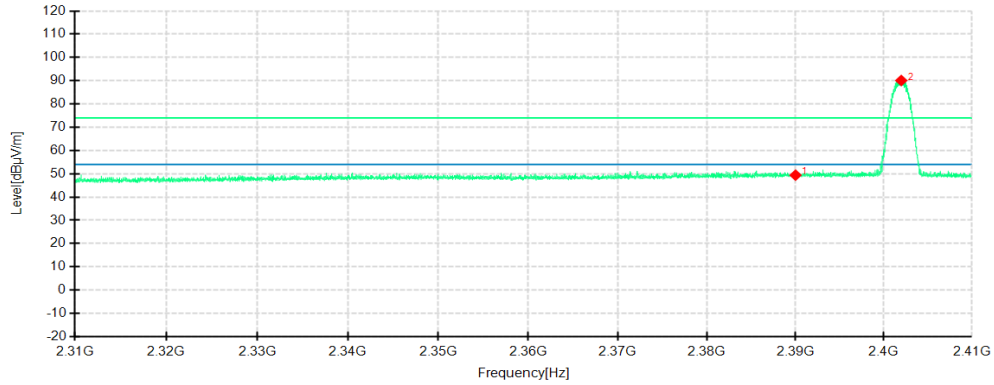

Detector mode: Peak

Polarity: Vertical

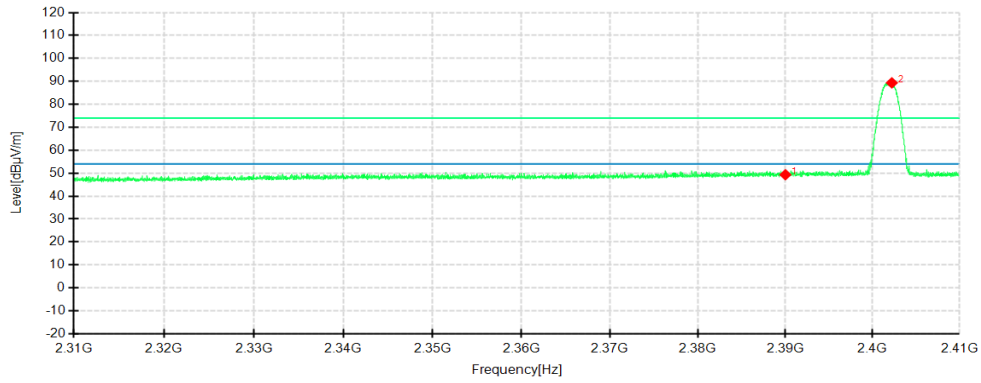


No.	Frequency MHz	Reading dBµV/m	Level dBµV/m	Factor dB	Limit dBµV/m	Margin dB	Height cm	Angle °	Pole
1	2390.0133	42.55	49.40	6.85	74.00	24.60	150	258	Horizontal
2	2401.9820	83.07	90.09	7.02	74.00	-16.09	150	178	Horizontal
1	2390.0133	42.45	49.30	6.85	74.00	24.70	150	107	Vertical
2	2402.2154	82.32	89.34	7.02	74.00	-15.34	150	206	Vertical

Lowest Channel

Channel 2402MHz


Detector mode: Average

Polarity: Horizontal

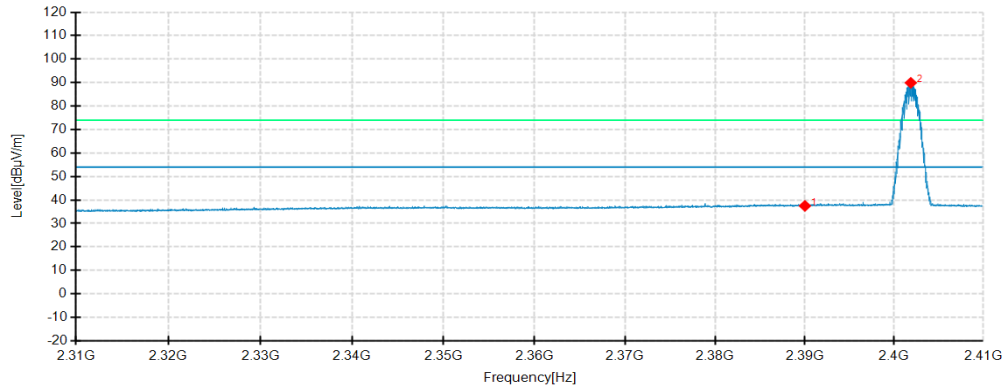

Detector mode: Average

Polarity: Vertical

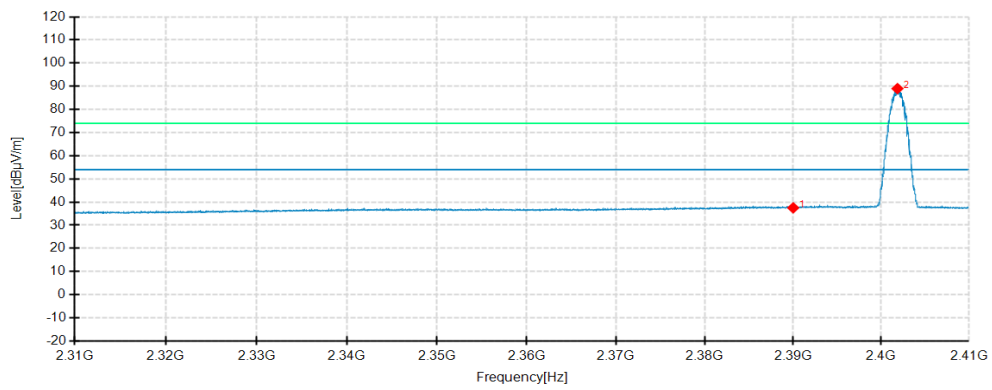


No.	Frequency MHz	Reading dBµV/m	Level dBµV/m	Factor dB	Limit dBµV/m	Margin dB	Height cm	Angle °	Pole
1	2390.0133	30.63	37.48	6.85	54.00	16.52	150	357	Horizontal
2	2401.8653	82.89	89.92	7.03	54.00	-35.92	150	179	Horizontal
1	2390.0133	30.64	37.49	6.85	54.00	16.51	150	35	Vertical
2	2401.8486	81.96	88.99	7.03	54.00	-34.99	150	250	Vertical

Highest Channel

Channel 2480MHz


Detector mode: Peak

Polarity: Horizontal

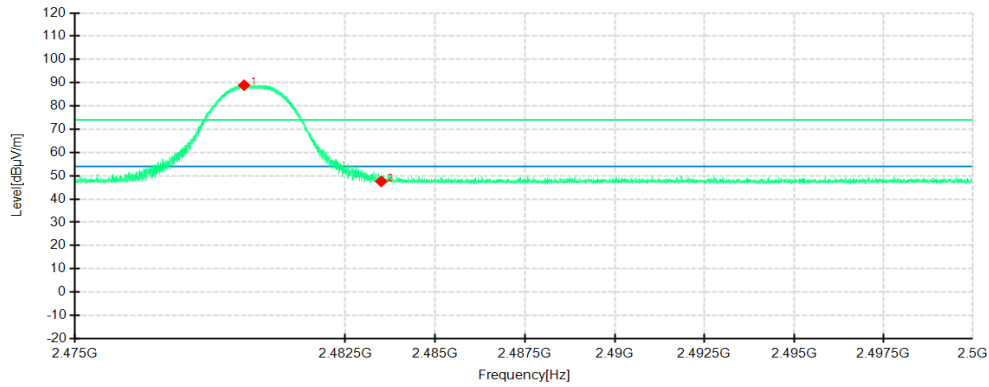

Detector mode: Peak

Polarity: Vertical

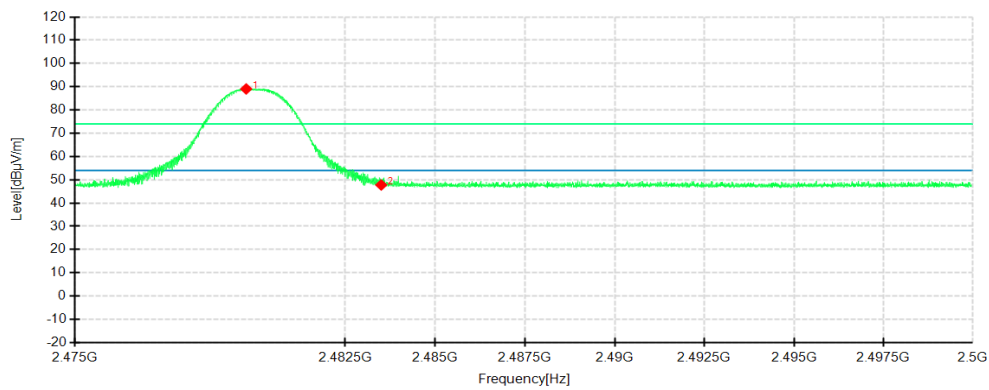


No.	Frequency MHz	Reading dBμV/m	Level dBμV/ m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole
1	2479.6924	83.30	88.93	5.63	74.00	-14.93	150	179	Horizontal
2	2483.5014	42.00	47.56	5.56	74.00	26.44	150	50	Horizontal
1	2479.7508	83.41	89.03	5.62	74.00	-15.03	150	200	Vertical
2	2483.5014	42.19	47.75	5.56	74.00	26.25	150	46	Vertical

Highest Channel

Channel 2480MHz


Detector mode: Average

Polarity: Horizontal

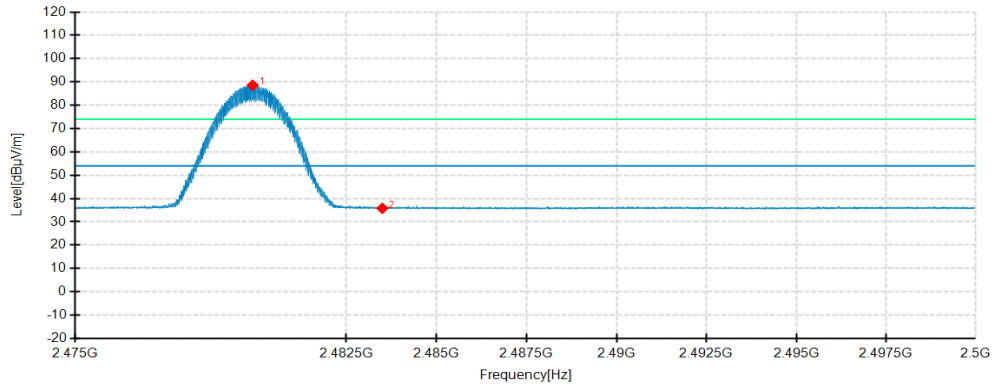

Detector mode: Average

Polarity: Vertical

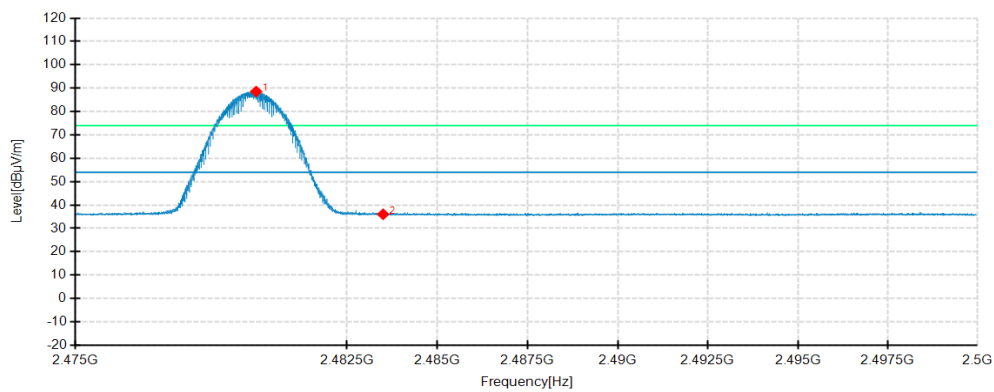

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole
1	2479.9092	82.97	88.59	5.62	54.00	-34.59	150	179	Horizontal
2	2483.5014	30.23	35.79	5.56	54.00	18.21	150	57	Horizontal
1	2479.9925	82.94	88.56	5.62	54.00	-34.56	150	199	Vertical
2	2483.5014	30.47	36.03	5.56	54.00	17.97	150	181	Vertical

Remark: Max field strength in 3m distance. No any other emission which falls in restricted bands can be detected and be reported.

-----This is the last page of the report. -----