

# FCC TEST REPORT

**Client Name** : MINISO Corporation  
**Address** : Room 2501, No. 486 Heye Square, Kangwang Middle Road, Liwan District, Guangzhou, Guangdong, China  
**Product Name** : Wireless Charger for Watch and Earphones  
**Date** : May 20, 2022

**Shenzhen Anbotek Compliance Laboratory Limited**



# Contents

- 1. General Information ..... 4
  - 1.1. Client Information ..... 4
  - 1.2. Description of Device (EUT) ..... 4
  - 1.3. Auxiliary Equipment Used During Test ..... 5
  - 1.4. Description of Test Modes ..... 5
  - 1.5. Description Of Test Setup ..... 6
  - 1.6. Test Equipment List ..... 7
  - 1.7. Measurement Uncertainty ..... 8
  - 1.8. Description of Test Facility ..... 8
- 2. Summary of Test Results ..... 9
- 3. Conducted Emission Test ..... 10
  - 3.1. Test Standard and Limit ..... 10
  - 3.2. Test Setup ..... 10
  - 3.3. Test Procedure ..... 10
  - 3.4. Test Data ..... 10
- 4. Radiation Spurious Emission ..... 15
  - 4.1. Test Standard and Limit ..... 15
  - 4.2. Test Setup ..... 15
  - 4.3. Test Procedure ..... 16
  - 4.4. Test Data ..... 16
- 5. Antenna Requirement ..... 21
  - 5.1. Test Standard and Requirement ..... 21
  - 5.2. Antenna Connected Construction ..... 21
- APPENDIX I -- TEST SETUP PHOTOGRAPH ..... 22
- APPENDIX II -- EXTERNAL PHOTOGRAPH ..... 24
- APPENDIX III -- INTERNAL PHOTOGRAPH ..... 28



# TEST REPORT

**Applicant** : MINISO Corporation  
**Manufacturer** : China Etech Groups Ltd  
**Product Name** : Wireless Charger for Watch and Earphones  
**Model No.** : E-QI-20619-A-1  
**Trade Mark** : MINISO  
**Rating(s)** : Input: DC 5V/3A  
Wireless output: 5W  
**Test Standard(s)** : **FCC Part15 Subpart C, Paragraph 15.209**  
**Test Method(s)** : **ANSI C63.10: 2020**

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.


Date of Receipt

Jan. 06, 2022


Date of Test

Jan. 06~May 17, 2022

Prepared By

  
(TuTu Hong)

Approved &amp; Authorized Signer

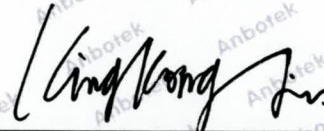  
(Kingkong Jin)**Shenzhen Anbotek Compliance Laboratory Limited**

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com

Code: AB-RF-05-a



Hotline

400-003-0500

www.anbotek.com

## 1. General Information

### 1.1. Client Information

Applicant	:	MINISO Corporation
Address	:	Room 2501, No. 486 Heye Square, Kangwang Middle Road, Liwan District, Guangzhou, Guangdong, China
Manufacturer	:	China Etech Groups Ltd
Address	:	16/F, Block C, 2nd Phase of Central Avenue, Haihong Industrial Area, Xixiang Road, Baoan District, Shenzhen, China
Factory	:	China Etech Groups Ltd
Address	:	16/F, Block C, 2nd Phase of Central Avenue, Haihong Industrial Area, Xixiang Road, Baoan District, Shenzhen, China

### 1.2. Description of Device (EUT)

Product Name	:	Wireless Charger for Watch and Earphones	
Model No.	:	E-QI-20619-A-1	
Trade Mark	:	MINISO	
Test Power Supply	:	AC 120V, 60Hz for adapter/AC 240V, 60Hz for adapter	
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)	
Product Description	:	Operation Frequency:	110.1-205kHz
		Modulation Type:	FSK
		Antenna Type:	Inductive loop coil Antenna
		Antenna Gain(Peak):	0 dBi (Provided by customer)

**Remark:** 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



### 1.3. Auxiliary Equipment Used During Test

Adapter	:	M/N: A2023 Input: AC 100-240V 0.7A 50-60Hz USB1 Output: DC 5V 2.4A USB2 Output: DC 5V 2.4A
Wireless charging load	:	Manufacturer: Shenzhen Ouju Technology Co., Ltd. M/N: CD2577 Power: 5W/7.5W/10W/15W Last Cal.: Oct. 26, 2020 Cal. Interval: 1 Year

### 1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Wireless charger mode



For Conducted Emission	
Final Test Mode	Description
Mode 1	Wireless charger mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	Wireless charger mode

Note: (1)Test channel is 0.1215MHz.

(2) All the situation(full load, half load and empty load) has been tested,only the worst situation (full load 5W) was recorded in the report.

**1.5. Description Of Test Setup**

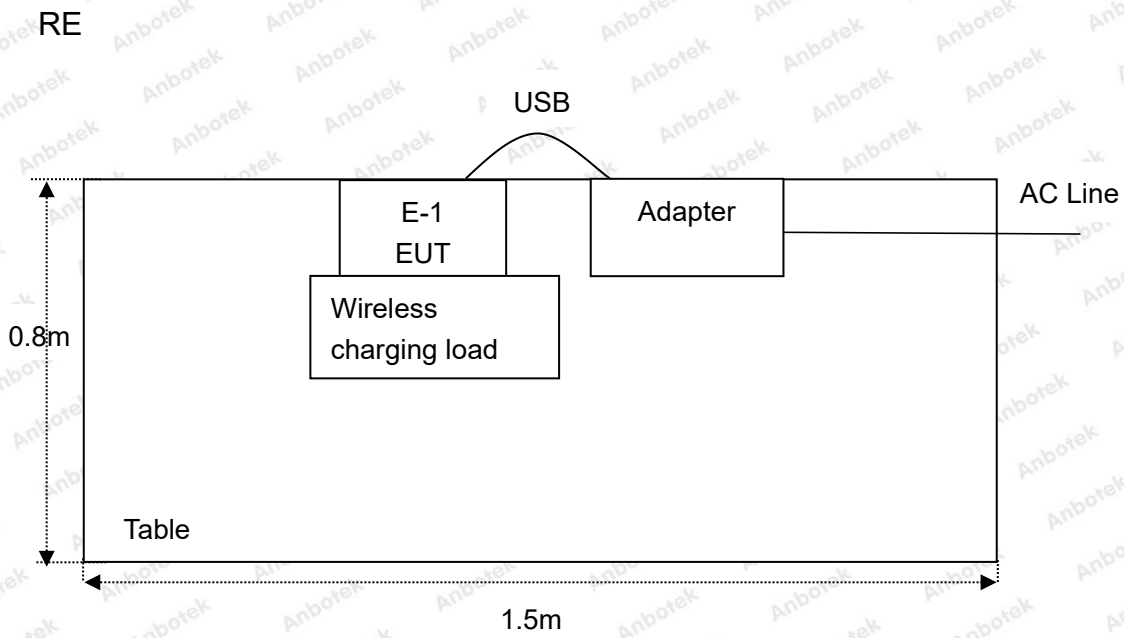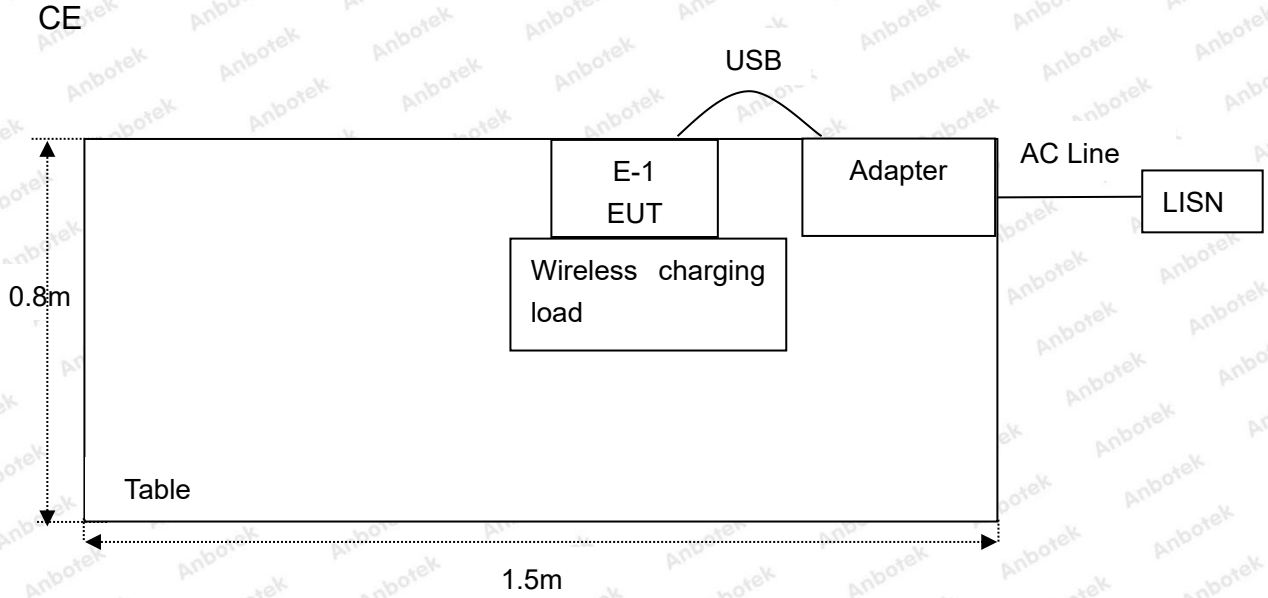

## 1.6. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Three Phase V-type Artificial Power Network	CYBERTEK	EM5040DT	E215040DT001	Jul 05, 2021	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Oct. 22, 2021	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESR26	101481	Oct. 22, 2021	1 Year
4.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Oct. 22, 2021	1 Year
5.	MAX Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 22, 2021	1 Year
6.	Preamplifier	SKET Electronic	BK1G18G30 D	KD17503	Oct. 22, 2021	1 Year
7.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Oct. 22, 2021	2 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Oct. 22, 2021	2 Year
9.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Oct. 22, 2021	2 Year
10.	Horn Antenna	A-INFO	LB-180400-K F	J211060628	Oct. 22, 2021	2 Year
11.	Pre-amplifier	SONOMA	310N	186860	Oct. 22, 2021	1 Year
12.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
13.	RF Test Control System	YIHENG	YH3000	2017430	Oct. 22, 2021	1 Year
14.	Power Sensor	DAER	RPR3006W	15I00041SN045	Oct. 22, 2021	1 Year
15.	Power Sensor	DAER	RPR3006W	15I00041SN046	Oct. 22, 2021	1 Year
16.	MXA Spectrum Analysis	KEYSIGHT	N9020A	MY53280032	Oct. 22, 2021	1 Year
17.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Oct. 22, 2021	1 Year
18.	Signal Generator	Agilent	E4421B	MY41000743	Oct. 22, 2021	1 Year
19.	DC Power Supply	IVYTECH	IV3605	1804D360510	Oct. 22, 2021	1 Year
20.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80 B	N/A	Oct. 22, 2021	1 Year



### 1.7. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 3.9 dB (Horizontal)
		Ur = 3.8 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4 dB

### 1.8. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111.

#### ISED-Registration No.: 8058A

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A.

#### Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102



## 2. Summary of Test Results

Standard Section	Test Item	Result
FCC Part 15, Paragraph 15.207	Conducted Emission Test	PASS
FCC Part 15, Paragraph 15.209(a)(f)	Spurious Emission	PASS
Part 15.203	Antenna Requirement	PASS


## 3. Conducted Emission Test

### 3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50

**Remark:** (1) \*Decreasing linearly with logarithm of the frequency.  
 (2) The lower limit shall apply at the transition frequency.

### 3.2. Test Setup

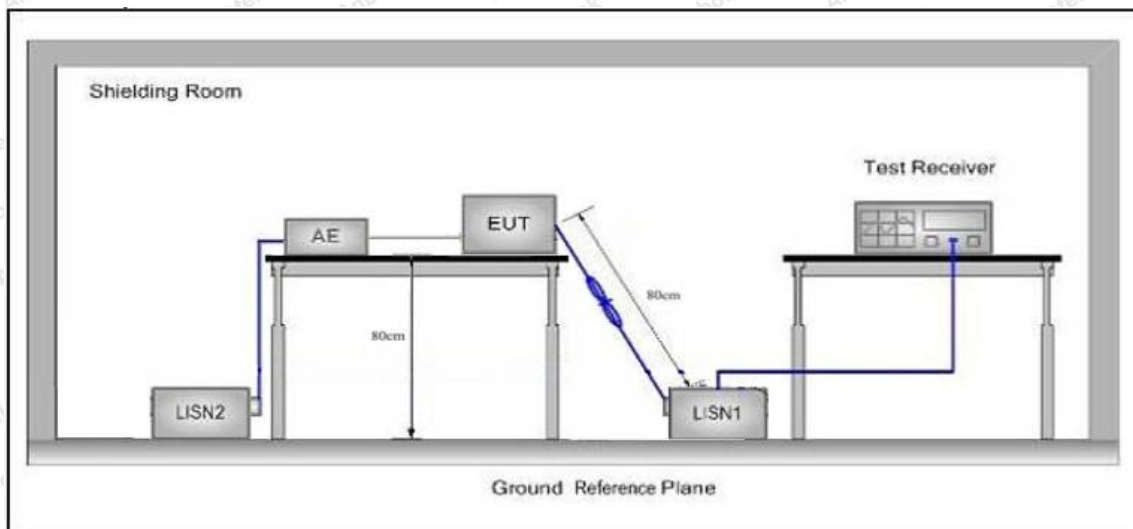

### 3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2020 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.


### 3.4. Test Data

Please to see the following pages



### Conducted Emission Test Data


Test Site: 1# Shielded Room  
 Operating Condition: Mode 1  
 Test Specification: AC 240V, 60Hz for adapter  
 Comment: Live Line  
 Tem.: 23.0°C Hum.: 48%

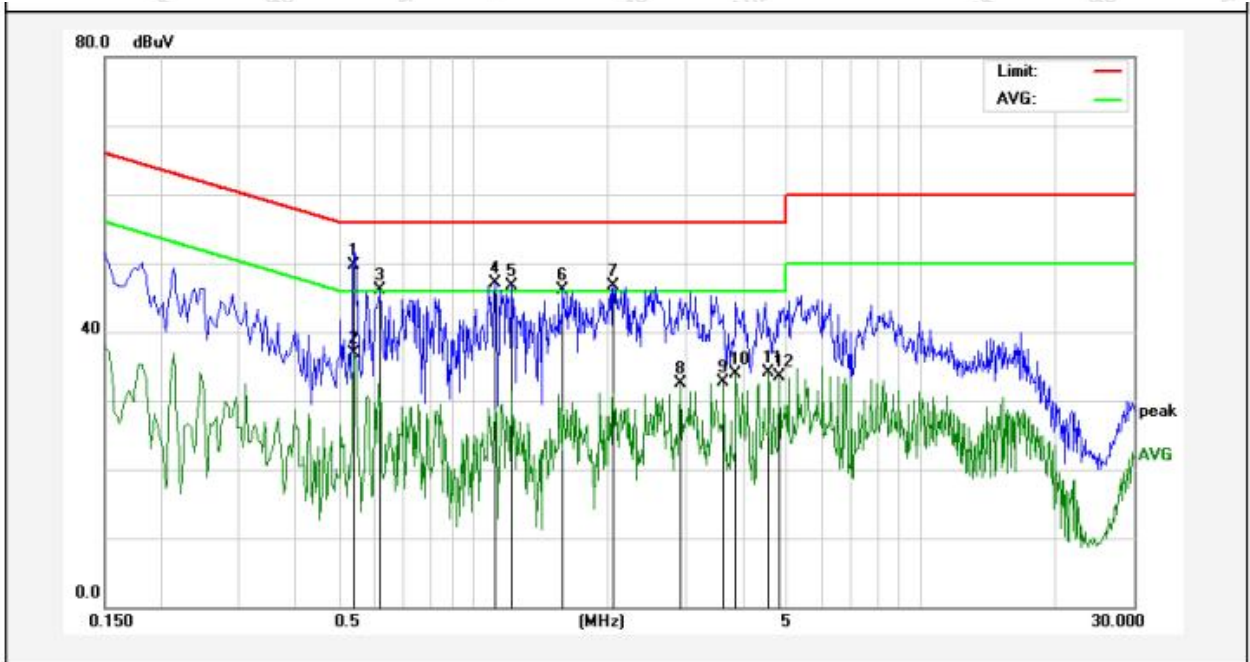

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.5420	49.54	0.15	49.69	56.00	-6.31	QP	
2	0.5420	36.76	0.15	36.91	46.00	-9.09	AVG	
3	0.6180	45.92	0.15	46.07	56.00	-9.93	QP	
4	1.1180	47.03	0.15	47.18	56.00	-8.82	QP	
5	1.2180	46.55	0.14	46.69	56.00	-9.31	QP	
6	1.5900	45.91	0.13	46.04	56.00	-9.96	QP	
7	2.0579	46.58	0.12	46.70	56.00	-9.30	QP	
8	2.9020	32.39	0.12	32.51	46.00	-13.49	AVG	
9	3.6260	32.64	0.12	32.76	46.00	-13.24	AVG	
10	3.8700	33.85	0.12	33.97	46.00	-12.03	AVG	
11	4.5939	33.95	0.11	34.06	46.00	-11.94	AVG	
12	4.8380	33.41	0.11	33.52	46.00	-12.48	AVG	

**Conducted Emission Test Data**

Test Site: 1# Shielded Room  
 Operating Condition: Mode 1  
 Test Specification: AC 240V, 60Hz for adapter  
 Comment: Neutral Line  
 Tem.: 23.0°C Hum.: 48%

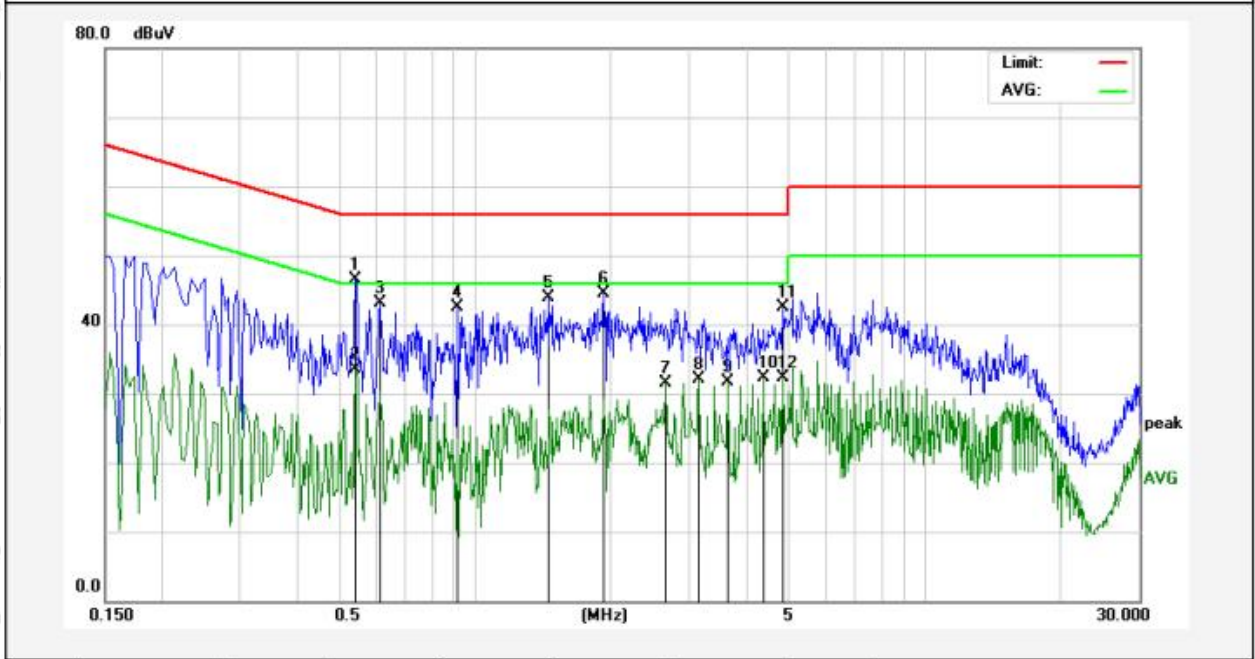


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.5420	46.33	0.15	46.48	56.00	-9.52	QP	
2	0.5420	33.44	0.15	33.59	46.00	-12.41	AVG	
3	0.6140	42.97	0.15	43.12	56.00	-12.88	QP	
4	0.9140	42.38	0.15	42.53	56.00	-13.47	QP	
5	1.4620	43.80	0.14	43.94	56.00	-12.06	QP	
6	1.9340	44.37	0.12	44.49	56.00	-11.51	QP	
7	2.6580	31.29	0.12	31.41	46.00	-14.59	AVG	
8	3.1420	32.04	0.12	32.16	46.00	-13.84	AVG	
9	3.6540	31.49	0.12	31.61	46.00	-14.39	AVG	
10	4.3820	32.24	0.11	32.35	46.00	-13.65	AVG	
11	4.8340	42.41	0.11	42.52	56.00	-13.48	QP	
12	4.8340	32.15	0.11	32.26	46.00	-13.74	AVG	



### Conducted Emission Test Data


Test Site: 1# Shielded Room  
 Operating Condition: Mode 1  
 Test Specification: AC 120V, 60Hz for adapter  
 Comment: Live Line  
 Tem.: 23.0°C Hum.: 48%

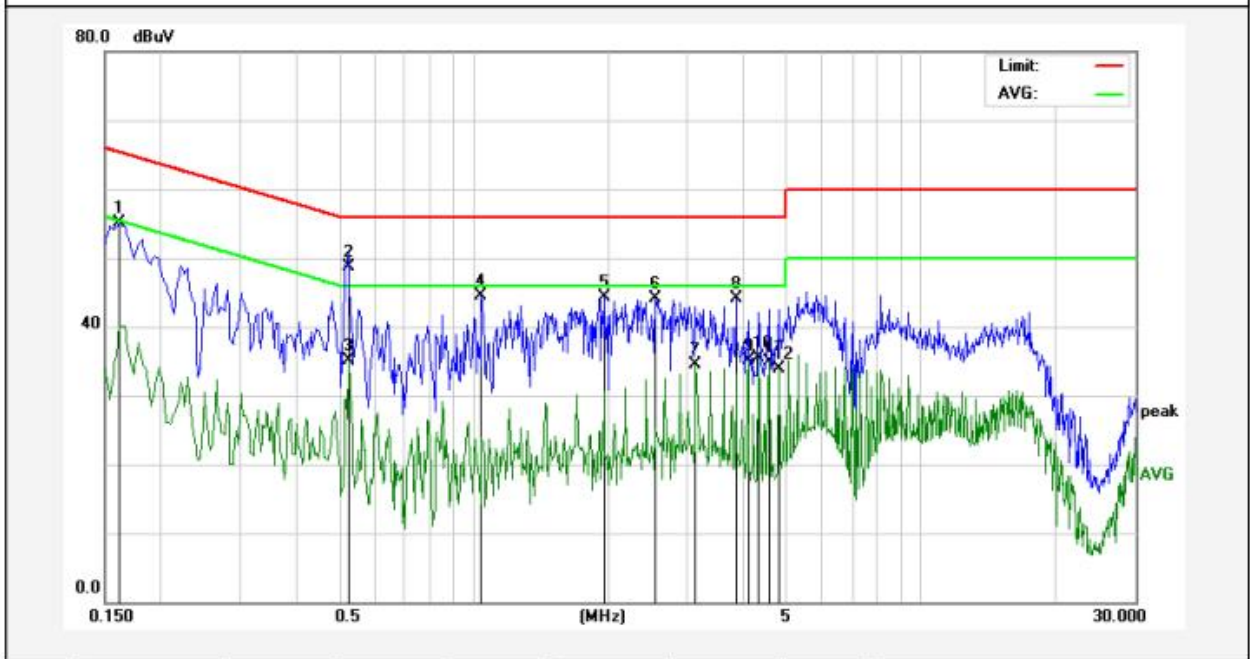

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1620	54.98	0.12	55.10	65.36	-10.26	QP	
2	0.5260	48.65	0.15	48.80	56.00	-7.20	QP	
3	0.5260	34.87	0.15	35.02	46.00	-10.98	AVG	
4	1.0420	44.27	0.15	44.42	56.00	-11.58	QP	
5	1.9540	44.18	0.12	44.30	56.00	-11.70	QP	
6	2.5500	44.02	0.12	44.14	56.00	-11.86	QP	
7	3.1300	34.34	0.12	34.46	46.00	-11.54	AVG	
8	3.8540	43.92	0.12	44.04	56.00	-11.96	QP	
9	4.0939	34.99	0.11	35.10	46.00	-10.90	AVG	
10	4.3340	35.31	0.11	35.42	46.00	-10.58	AVG	
11	4.5739	34.88	0.11	34.99	46.00	-11.01	AVG	
12	4.8180	33.81	0.11	33.92	46.00	-12.08	AVG	

**Conducted Emission Test Data**

Test Site: 1# Shielded Room  
 Operating Condition: Mode 1  
 Test Specification: AC 120V, 60Hz for adapter  
 Comment: Neutral Line  
 Tem.: 23.0°C Hum.: 48%

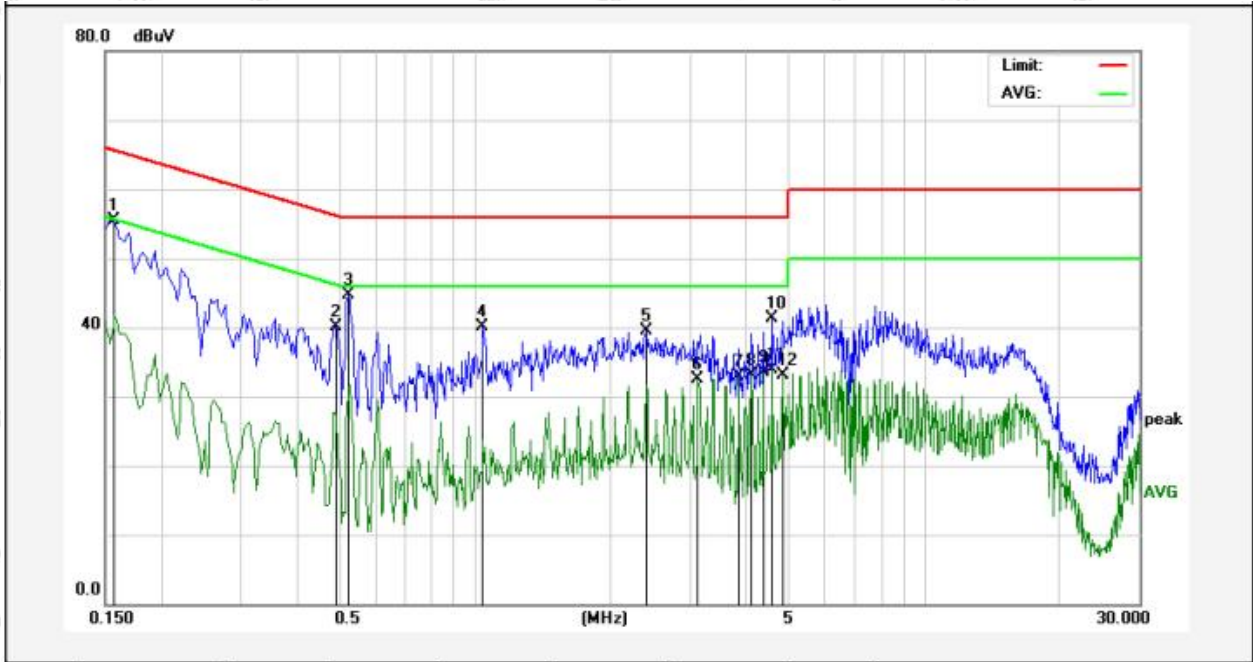

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1580	55.31	0.12	55.43	65.56	-10.13	QP	
2	0.4900	40.05	0.15	40.20	56.17	-15.97	QP	
3	0.5220	44.58	0.15	44.73	56.00	-11.27	QP	
4	1.0420	39.93	0.15	40.08	56.00	-15.92	QP	
5	2.3980	39.29	0.12	39.41	56.00	-16.59	QP	
6	3.1380	32.37	0.12	32.49	46.00	-13.51	AVG	
7	3.8620	32.77	0.12	32.89	46.00	-13.11	AVG	
8	4.1339	32.91	0.11	33.02	46.00	-12.98	AVG	
9	4.3778	33.48	0.11	33.59	46.00	-12.41	AVG	
10	4.5858	41.20	0.11	41.31	56.00	-14.69	QP	
11	4.5858	33.86	0.11	33.97	46.00	-12.03	AVG	
12	4.8259	32.95	0.11	33.06	46.00	-12.94	AVG	



## 4. Radiation Spurious Emission

### 4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
-		74.0	Peak	3	

**Remark:**

- (1)The lower limit shall apply at the transition frequency.
- (2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

### 4.2. Test Setup

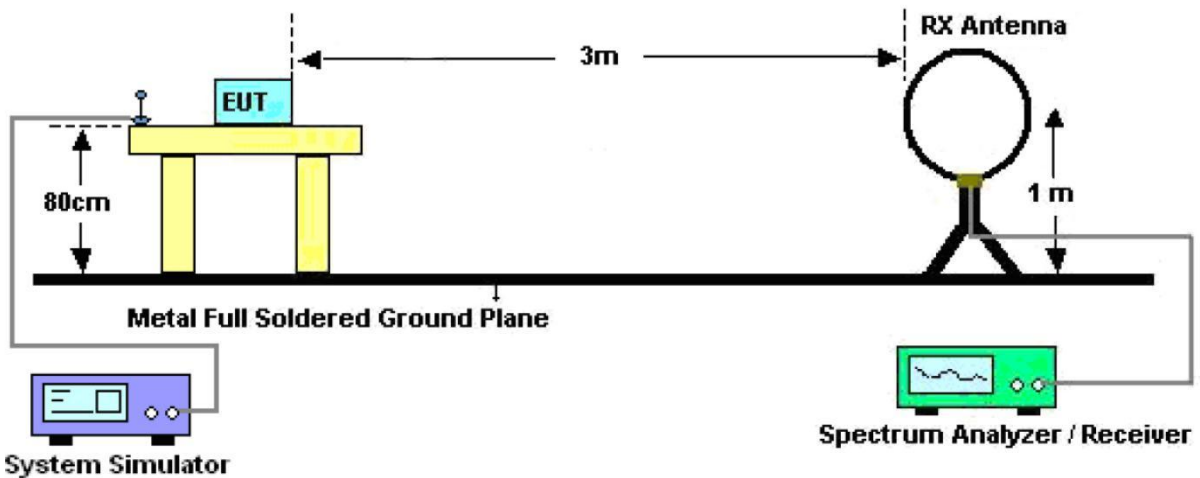


Figure 1. Below 30MHz

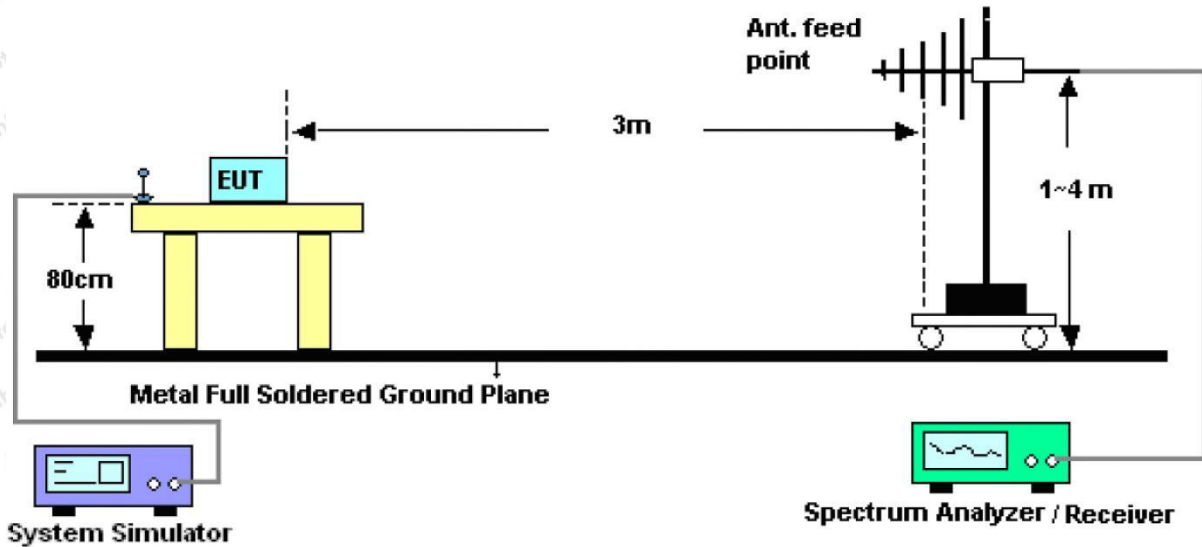


Figure 2. 30MHz to 1GHz

### 4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9\*6\*6 Chamber. The device is evaluated in xyz orientation.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9kHz, VBW = 30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

### 4.4. Test Data

**PASS**


Note: The data is in TX mode, and this is the worst mode.




**Test Results**

(Between 9KHz – 30MHz)

**Standard:** FCC PART15 C \_3m      **Power Source:** AC 120V, 60Hz for adapter  
**Test item:** Radiation Test      **Temp.(C)/Hum.(%RH):** 22.4°C/49%RH  
**Test Mode:** Mode 1      **Distance:** 3m

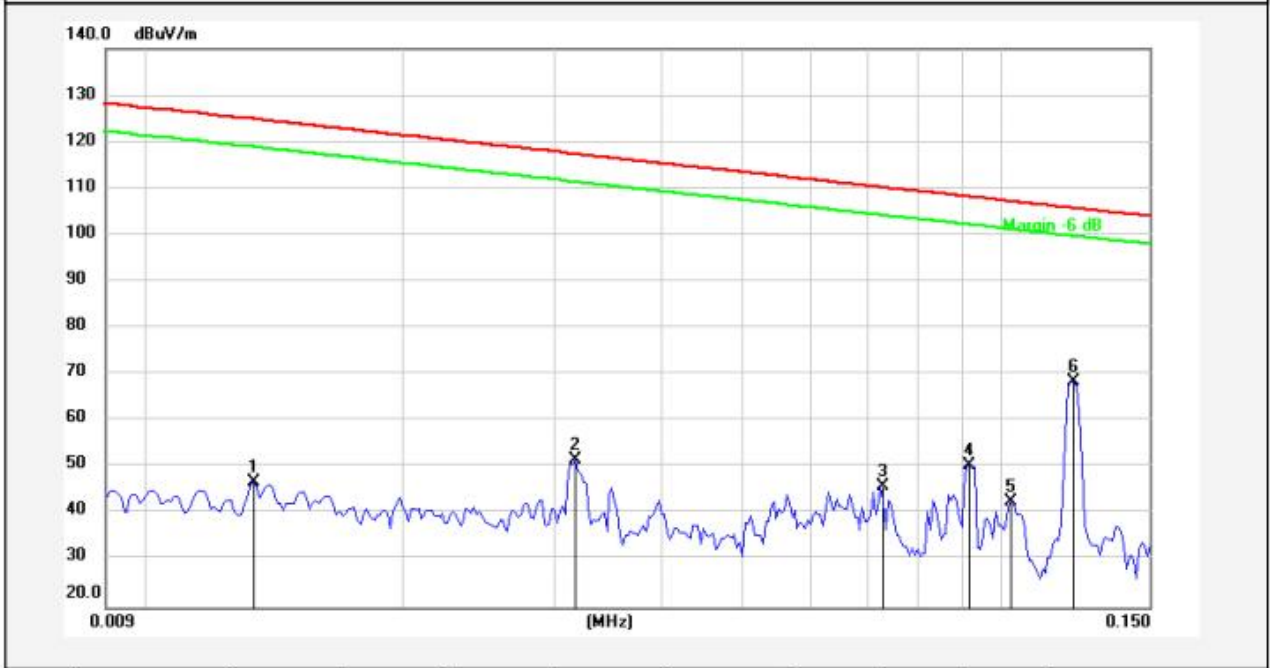

No.	Freq. (MHz)	Reading (dBuV)	Factor ()	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	0.0134	26.66	20.16	46.82	124.87	-78.05	QP			
2	0.0319	31.02	20.56	51.58	117.38	-65.80	QP			
3	0.0727	25.63	20.37	46.00	110.27	-64.27	QP			
4	0.0923	30.17	20.33	50.50	108.21	-57.71	QP			
5	0.1033	22.32	20.29	42.61	107.24	-64.63	QP			
6	0.1215	48.20	20.34	68.54	105.84	-37.30	QP			

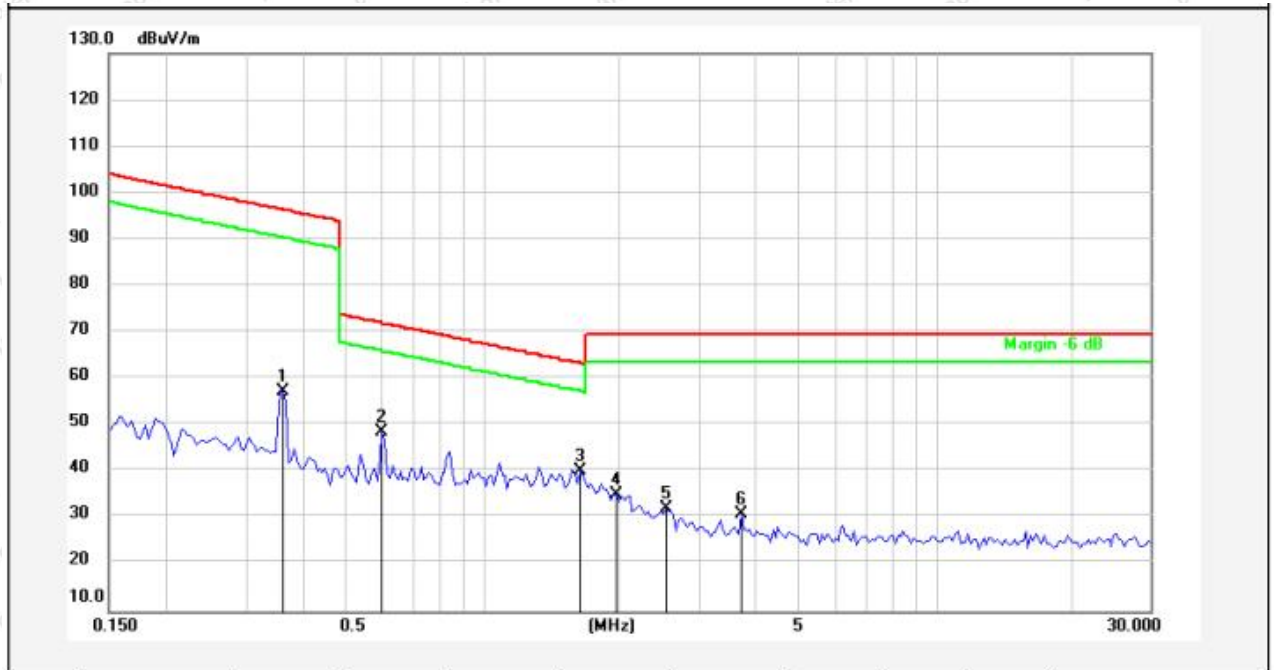


No.	Freq. (MHz)	Reading (dBuV)	Factor ()	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	0.3642	36.96	20.28	57.24	96.37	-39.13	QP			
2	0.6027	28.31	20.27	48.58	72.01	-23.43	QP			
3	1.6493	19.90	20.27	40.17	63.29	-23.12	QP			
4	1.9593	14.68	20.28	34.96	69.50	-34.54	QP			
5	2.5535	11.62	20.29	31.91	69.50	-37.59	QP			
6	3.7494	10.43	20.35	30.78	69.50	-38.72	QP			

**Remark:** According to FCC PART 15.209 (d), the emission limits for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, Radiated emission limits in these three bands are based on measurements employing an average detector.



(Between 30MHz –1000 MHz)

<b>Standard:</b>	<b>FCC PART15 C _3m</b>	<b>Polarization:</b>	<b>Horizontal</b>
<b>Test item:</b>	<b>Radiation Test</b>	<b>Power Source:</b>	<b>AC 120V, 60Hz for adapter</b>
<b>Test Mode:</b>	<b>Mode 1</b>	<b>Temp.(C)/Hum.(%RH):</b>	<b>23.4°C/50%RH</b>
<b>Distance:</b>	<b>3m</b>		

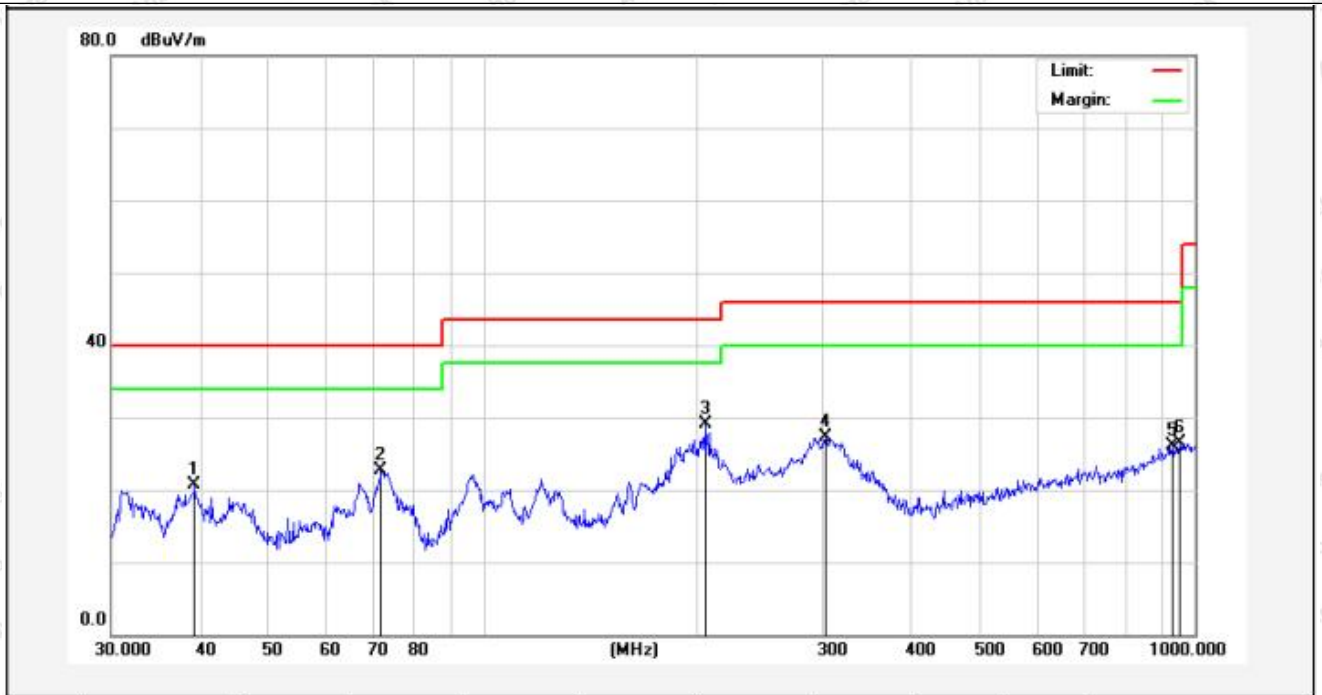

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	39.2991	37.16	-16.37	20.79	40.00	-19.21	QP			
2	71.8320	44.84	-22.16	22.68	40.00	-17.32	QP			
3	204.9551	51.38	-22.24	29.14	43.50	-14.36	QP			
4	302.4812	44.37	-17.11	27.26	46.00	-18.74	QP			
5	929.0082	32.05	-5.88	26.17	46.00	-19.83	QP			
6	952.0937	32.08	-5.61	26.47	46.00	-19.53	QP			

**Standard:** FCC PART15 C\_3m      **Polarization:** Vertical  
**Test item:** Radiation Test      **Power Source:** AC 120V, 60Hz for adapter  
**Test Mode:** Mode 1      **Temp.(C)/Hum.(%RH):** 23.4°C/50%RH  
**Distance:** 3m



No.	Freq. (MHz)	Reading (dBUV)	Factor (dB/m)	Result (dBUV/m)	Limit (dBUV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	45.0583	44.71	-15.06	29.65	40.00	-10.35	QP			
2	72.8466	49.58	-19.92	29.66	40.00	-10.34	QP			
3	86.2001	38.12	-18.31	19.81	40.00	-20.19	QP			
4	872.1832	32.20	-6.93	25.27	46.00	-20.73	QP			
5	929.0082	31.88	-5.88	26.00	46.00	-20.00	QP			
6	958.7943	32.01	-5.49	26.52	46.00	-19.48	QP			



## 5. Antenna Requirement

### 5.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203
Requirement	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 5.2. Antenna Connected Construction

The antenna is a Inductive loop coil Antenna which permanently attached, and the best case gain of the antenna is 0 dBi. It complies with the standard requirement.

## APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Conducted Emission Measurement

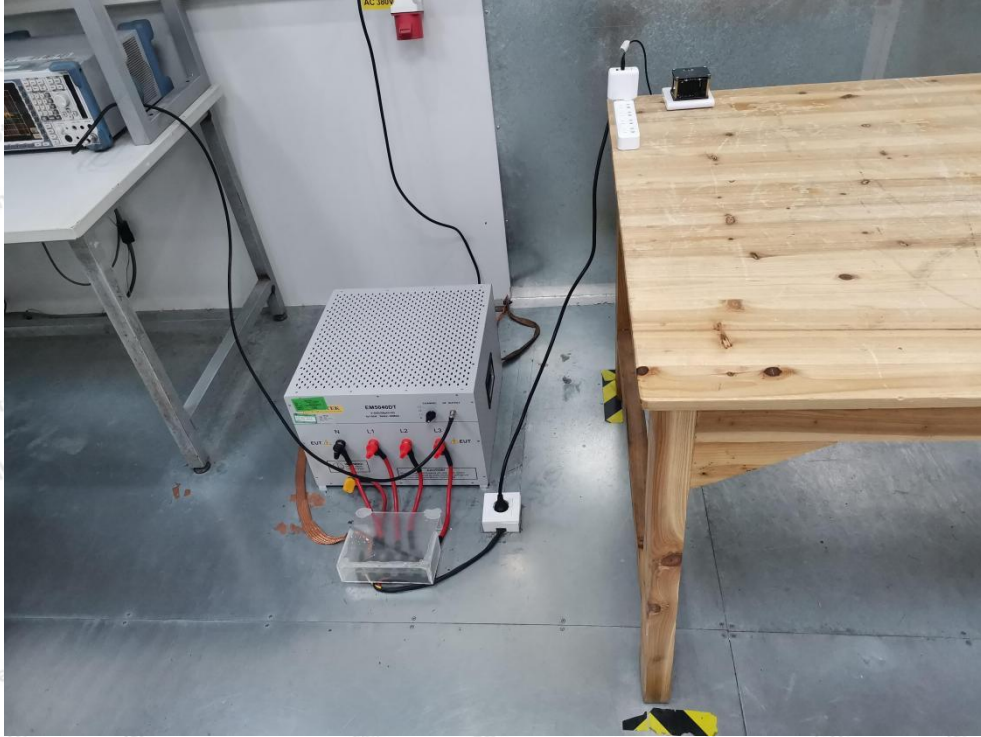


Photo of Radiation Emission Test










## APPENDIX II -- EXTERNAL PHOTOGRAPH






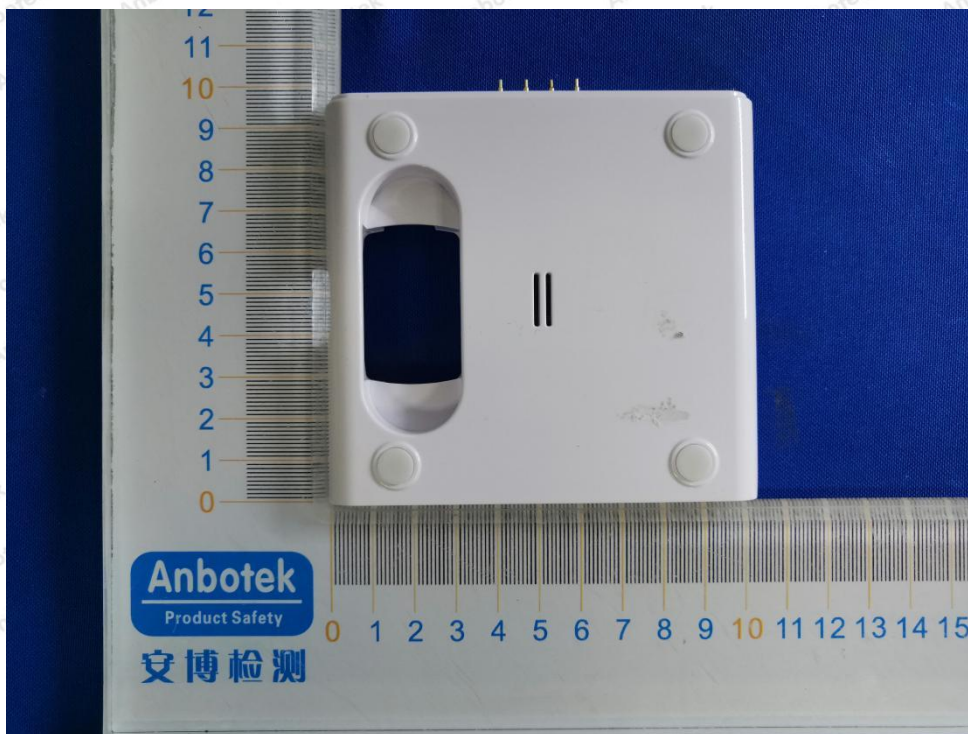


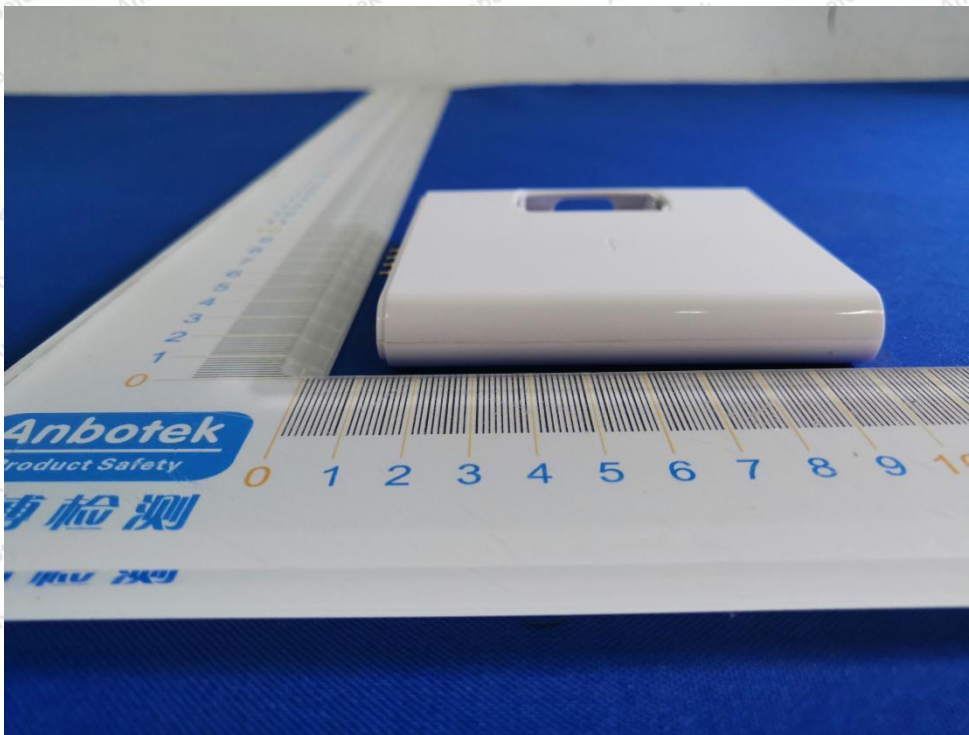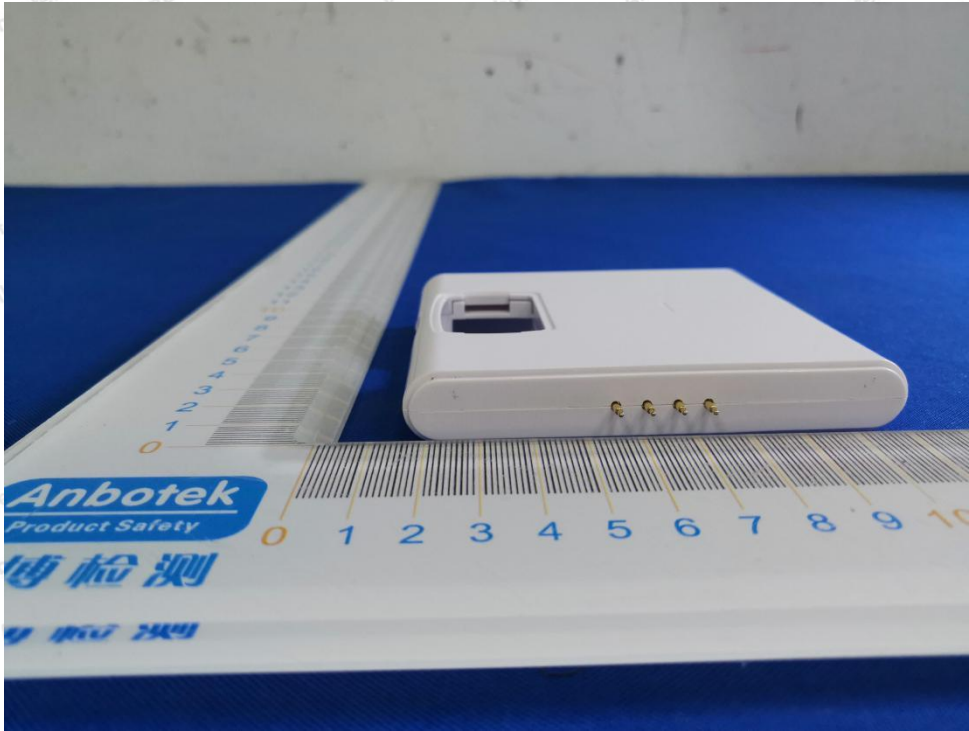




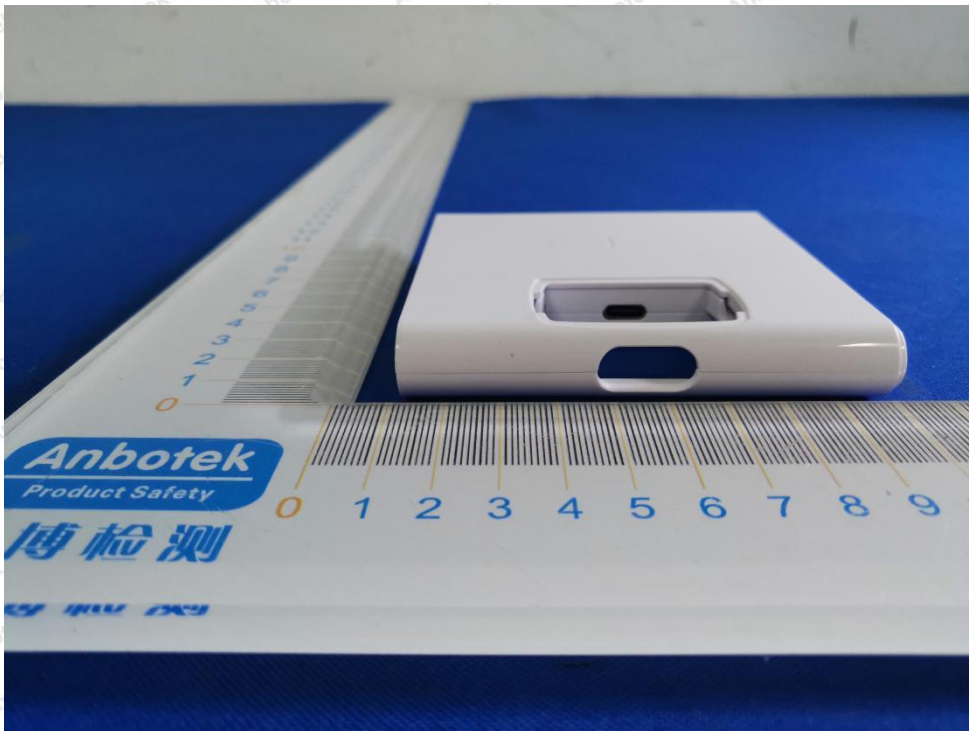



### APPENDIX III -- INTERNAL PHOTOGRAPH

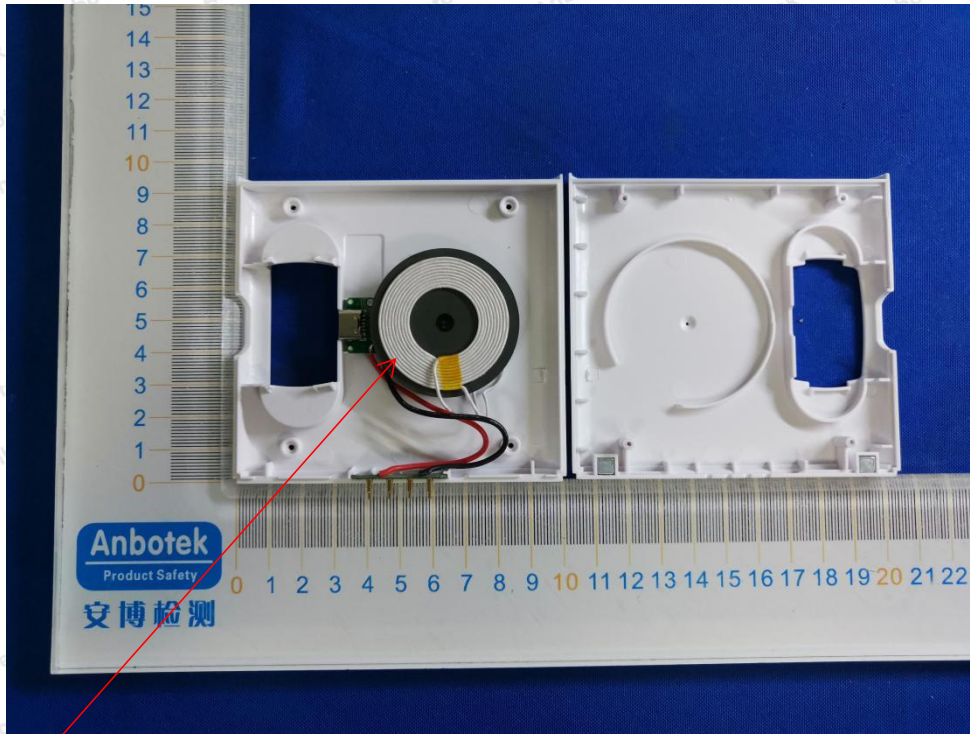


ANT

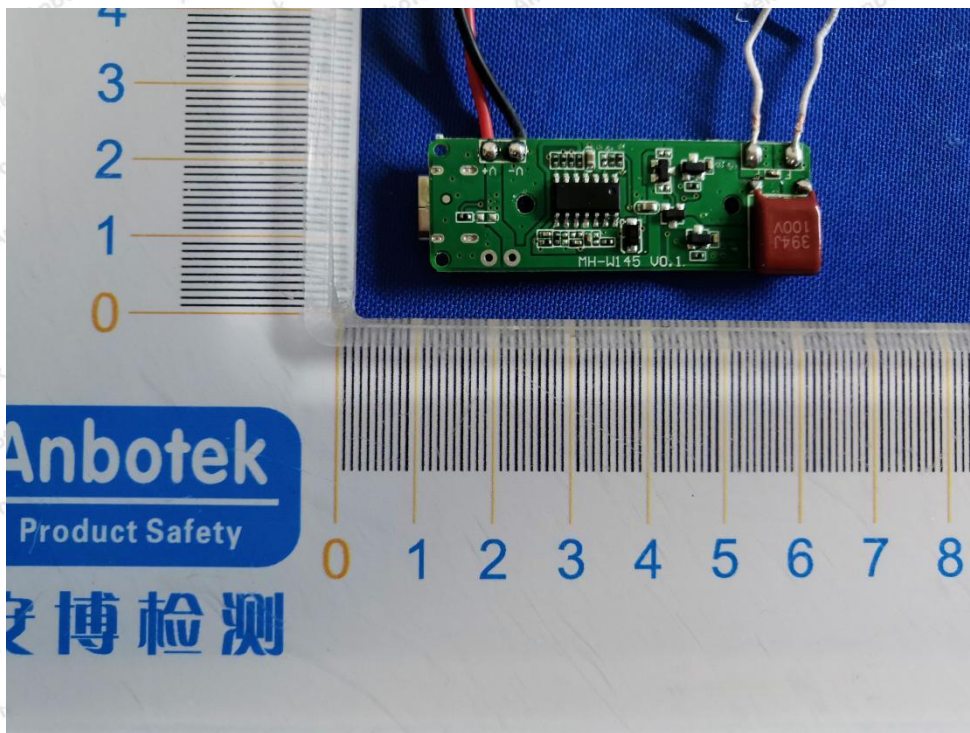



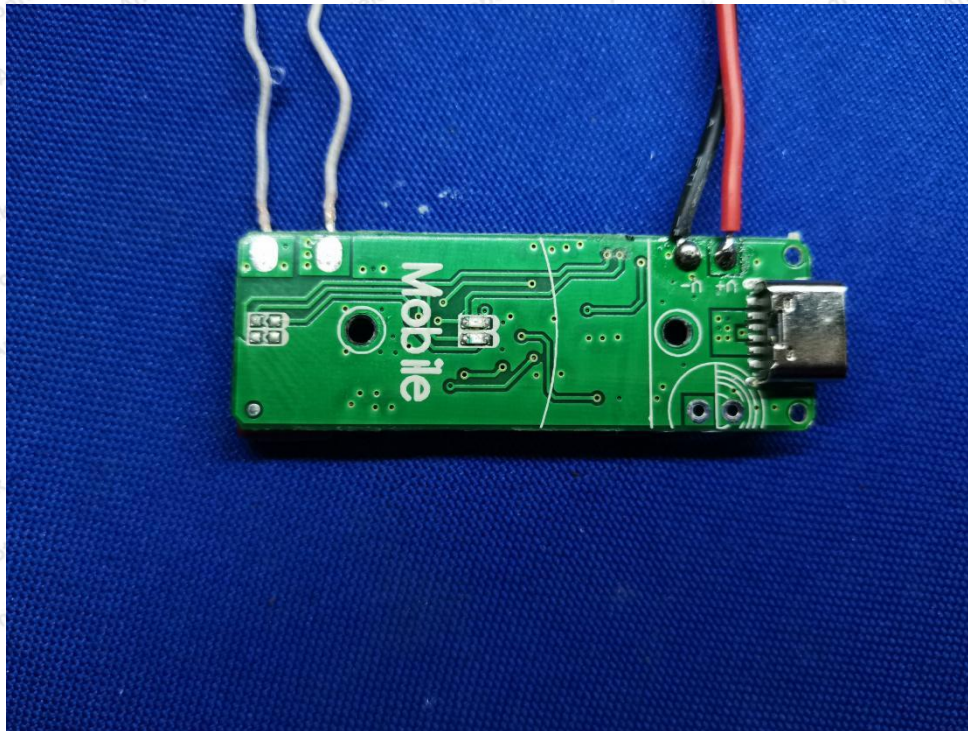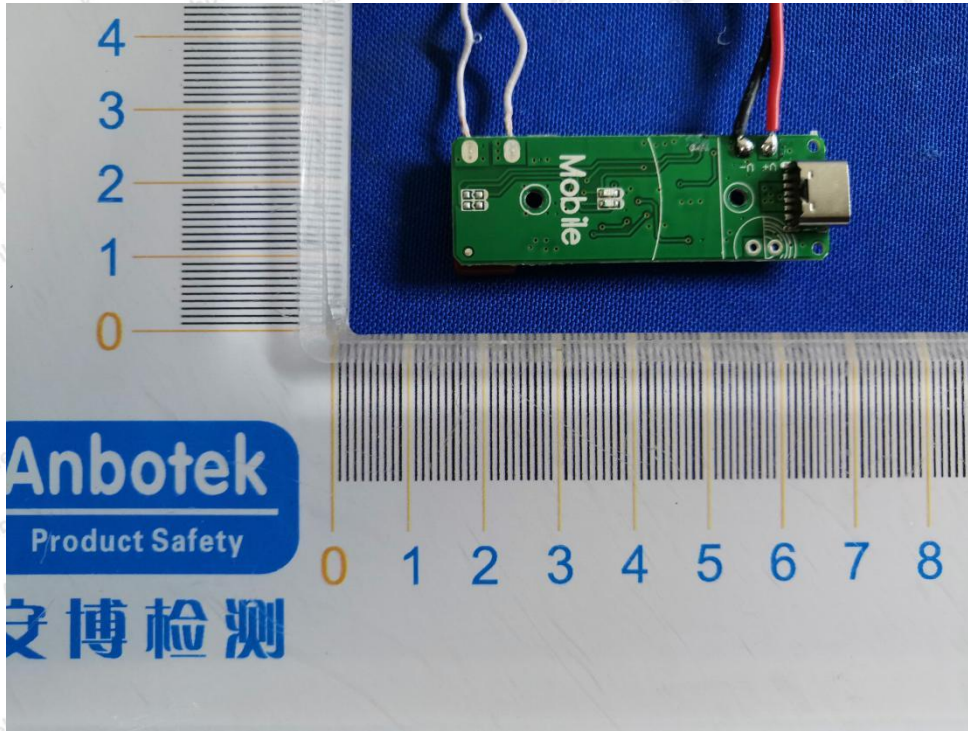



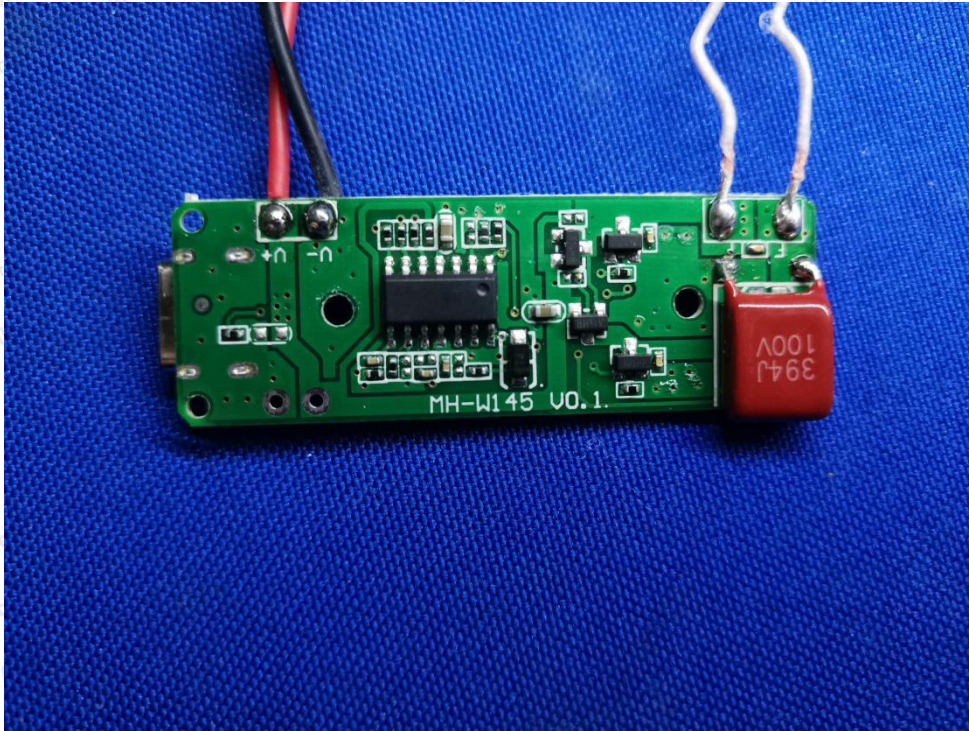

----- End of Report -----