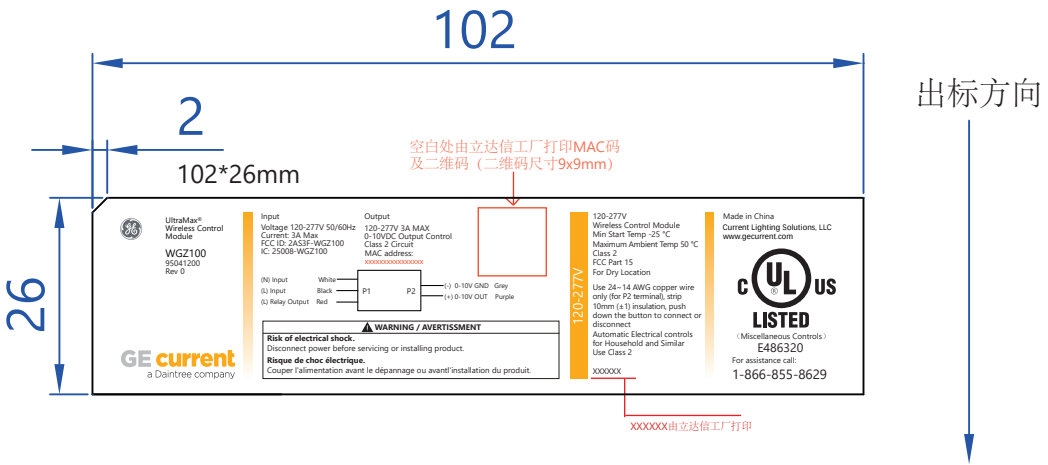
102
2
102*26mm
26
出标方向
空白处由立达信工厂打印MAC码
及二维码（二维码尺寸9x9mm）
UltraMax®
Wireless Control
Module
WGZ100
95041200
Rev 0
Input
Voltage 120-277V 50/60Hz
Current: 3A Max
FCC ID: 2AS3F-WGZ100
IC: 25008-WGZ100
Output
120-277V 3A MAX
0-10VDC Output Control
Class 2 Circuit
MAC address:
xxxxxxxxxxxxxx
(N) Input White
(L) Input Black
(L) Relay Output Red
P1
P2
(-) 0-10V GND Grey
(+) 0-10V OUT Purple
WARNING / AVERTISSMENT
Risk of electrical shock.
Disconnect power before servicing or installing product.
Risque de choc électrique.
Couper l'alimentation avant le dépannage ou avantl'installation du produit.
120-277V
120-277V
Wireless Control Module
Min Start Temp -25 °C
Maximum Ambient Temp 50 °C
Class 2
FCC Part 15
For Dry Location
Use 24~14 AWG copper wire only (for P2 terminal), strip 10mm (±1) insulation, push down the button to connect or disconnect
Automatic Electrical controls for Household and Similar
Use Class 2
XXXXXX
Made in China
Current Lighting Solutions, LLC
www.gecurrent.com
C UL US
LISTED
（Miscellaneous Controls）
E486320
For assistance call:
1-866-855-8629
GE current
a Daintree company
XXXXXX由立达信工厂打印