

FCC Test Report

Client Name : GuangDong Substanbo Technology Co.,Ltd.

Address : 2508, Building 4, Tianan Cloud Park Phase II,Bantian
Street, Longgang District, Shenzhen, China 518100

Product Name : Projector

Date : Mar. 17, 2021



Shenzhen Anbotech Compliance Laboratory Limited

* Approved *



Contents

1. General Information.....	5
1.1. Client Information.....	5
1.2. Description of Device (EUT).....	5
1.3. Auxiliary Equipment Used During Test.....	6
1.4. Description of Test Modes.....	6
1.5. List of channels.....	7
1.6. Description Of Test Setup.....	8
1.7. Test Equipment List.....	9
1.8. Measurement Uncertainty.....	10
1.9. Description of Test Facility.....	10
2. Summary of Test Results.....	11
3. Conducted Emission Test.....	12
3.1. Test Standard and Limit.....	12
3.2. Test Setup.....	12
3.3. Test Procedure.....	12
3.4. Test Data.....	12
4. Radiation Spurious Emission and Band Edge.....	17
4.1. Test Standard and Limit.....	17
4.2. Test Setup.....	17
4.3. Test Procedure.....	18
4.4. Test Data.....	19
5. Maximum Peak Output Power Test.....	40
5.1. Test Standard and Limit.....	40
5.2. Test Setup.....	40
5.3. Test Procedure.....	40
5.4. Test Data.....	40
6. Occupy Bandwidth Test.....	44
6.1. Test Standard.....	44
6.2. Test Setup.....	44
6.3. Test Procedure.....	44
6.4. Test Data.....	44
7. Power Spectral Density Test.....	74
7.1. Test Standard and Limit.....	74
7.2. Test Setup.....	74
7.3. Test Procedure.....	74
7.4. Test Data.....	74
8. Antenna Requirement.....	92
8.1. Test Standard and Requirement.....	92
8.2. Antenna Connected Construction.....	92



9. Frequency Stability.....	93
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	94
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	96
APPENDIX III -- INTERNAL PHOTOGRAPH.....	96



TEST REPORT

Applicant : GuangDong Substanbo Technology Co.,Ltd.
Manufacturer : GuangDong Substanbo Technology Co.,Ltd.
Product Name : Projector
Model No. : Magic 421 Max, Magic 421, Magic 421 Pro
Trade Mark : Bomaker/ Urikar
Rating(s) : Input: 100-240V~50/60Hz 1.8A; Output: DC 20V/3.6A

Test Standard(s) : FCC Part15 Subpart E, Paragraph 15.407
ANSI C63.10: 2013,

Test Method(s) : KDB 789033 D02 General UNII Test Procedures New Rules v02r01
KDB 662911 D01 Multiple Transmitter Output v02r01

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart E requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt

Jan. 25, 2021

Date of Test

Jan. 25~Mar. 15, 2021

Prepared By

Ella Liang

(Engineer / Ella Liang)

Reviewer

Bibo Zhang

(Supervisor / Bibo Zhang)

Approved & Authorized Signer

Kingkong Jin

(Manager / Kingkong Jin)

1. General Information

1.1. Client Information

Applicant	:	GuangDong Substanbo Technology Co.,Ltd.
Address	:	2508, Building 4, Tianan Cloud Park Phase II,Bantian Street, Longgang District, Shenzhen, China 518100
Manufacturer	:	GuangDong Substanbo Technology Co.,Ltd.
Address	:	2508, Building 4, Tianan Cloud Park Phase II,Bantian Street, Longgang District, Shenzhen, China 518100
Factory	:	GuangDong Substanbo Technology Co.,Ltd.
Address	:	2508, Building 4, Tianan Cloud Park Phase II,Bantian Street, Longgang District, Shenzhen, China 518100

1.2. Description of Device (EUT)

Product Name	:	Projector
Model No.	:	Magic 421 Max, Magic 421, Magic 421 Pro (Note: All samples are the same except the model number, so we prepare "Magic 421 Max" for test only.)
Trade Mark	:	Bomaker/ Urikar
Test Power Supply	:	AC 120V, 60Hz for Adapter / AC 240V, 60Hz for Adapter
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)
Product Description	Operation Frequency:	BT: 2402-2480MHz 2.4G WiFi: 802.11b/ g/ n(HT20): 2412-2462MHz 802.11n(HT40): 2422-2452MHz 5.1G WiFi : 5180MHz~5240MHz 5.8G WiFi : 5745MHz~5825MHz
	Number of Channel:	BT: 79 Channels 2.4G WiFi: 11 Channels for 802.11b/ g/ n(HT20) 7 Channels for 802.11n(HT40) 5.1G WiFi: 4 Channels for 802.11a 4 Channels for 802.11n(HT20) 4 Channels for 802.11ac(HT20) 2 Channels for 802.11n(HT40) 2 Channels for 802.11ac(HT40) 1 Channels for 802.11ac(HT80) 5.8G WiFi: 5 Channels for 802.11a 5 Channels for 802.11n(HT20) 5 Channels for 802.11ac(HT20) 2 Channels for 802.11n(HT40)

		2 Channels for 802.11ac(HT40)
	Modulation Type:	BT: GFSK, $\pi/4$ -DQPSK, 8-DPSK 2.4G WiFi: 802.11g/n OFDM 5.1G WiFi: OFDM with BPSK/QPSK/16QAM/64QAM/256QAM 5.8G WiFi: OFDM with BPSK/QPSK/16QAM/64QAM/256QAM
	Antenna Type:	BT: PCB antenna 2.4G WiFi/ 5G WiFi: PIFA antenna
	Antenna Gain(Peak):	BT: -0.58dBi 2.4G WiFi: 2.53dBi 5.1G WiFi ANT A: 2.07dBi; ANT B: 2.1dBi 5.8G WiFi ANT A: 1.93dBi; ANT B: 2.33dBi
	Directional Gain:	5.1G WiFi: 5.10 dBi 5.8G WiFi: 5.14dBi
Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual. 2) This report is for 5.8G WiFi only. 3) Only 802.11n(HT20), 802.11n(HT40), 802.11ac(HT20), 802.11ac(HT40), 802.11ac(HT80) support MIMO.		

1.3. Auxiliary Equipment Used During Test

N/A	
-----	--

1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Mode	Test channel	Frequency (MHz)
OFDM(802.11a/n20/ac20)	CH 149	5745MHz
	CH 157	5785MHz
	CH 165	5825MHz
OFDM(802.11n40/ac40)	CH 151	5755MHz
	CH 159	5795MHz
OFDM(802.11ac80)	CH 155	5775MHz

Note:

1. The measurements are performed at the highest, middle, lowest available channels.
2. The EUT has been tested as an independent unit. And Continual Transmitting in maximum power.
3. For the relevant Conducted Measurement, the temporary antenna connector is used during the measurement. Antenna Connector Impedance: 50Ω, Cable Loss: 1.0 dB
4. The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is more than 98%

1.5. List of channels**802.11a/n20/ac20**

Channel	Freq. (MHz)	Channel	Freq. (MHz)
149	5745	153	5765
157	5785	161	5805
165	5825		



802.11n40/ac40

Channel	Freq. (MHz)	Channel	Freq. (MHz)
151	5755	159	5795

802.11ac80

Channel	Freq. (MHz)
155	5775

1.6. Description Of Test Setup

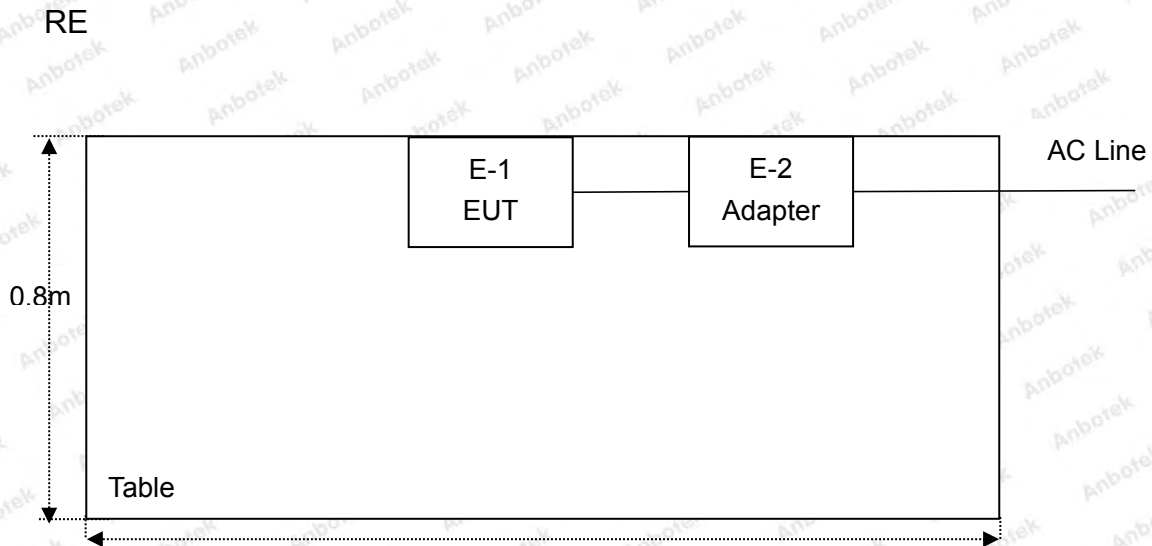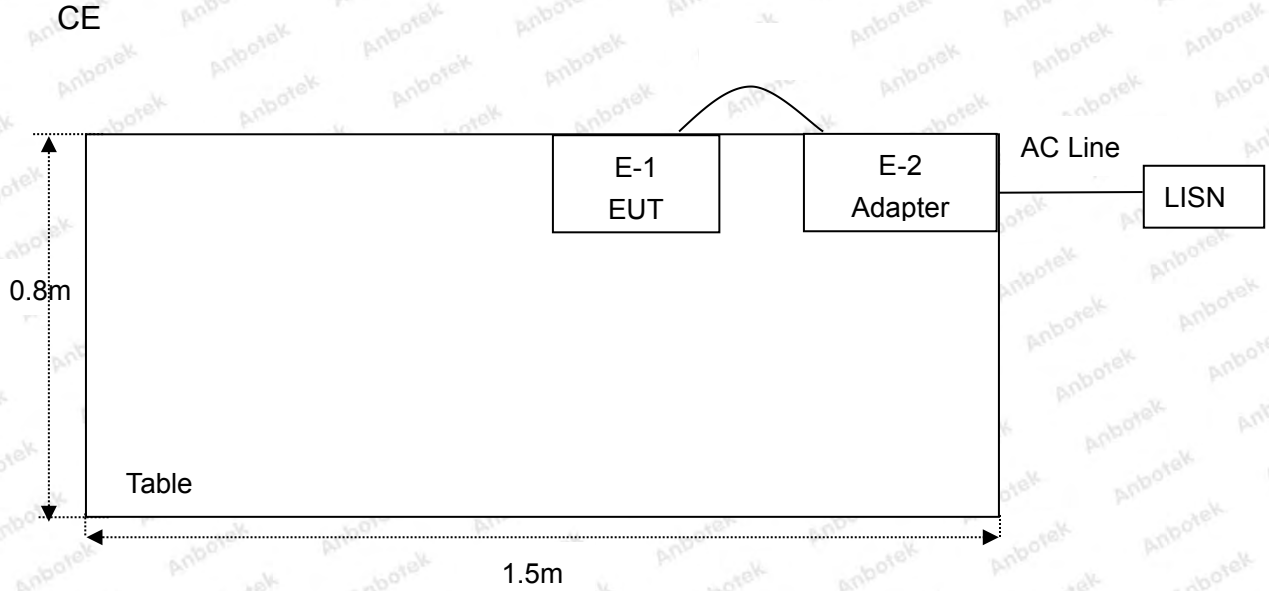

1.7. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Oct. 26, 2020	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Oct. 26, 2020	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESR26	101481	Oct. 26, 2020	1 Year
4.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Oct. 26, 2020	1 Year
5.	MAX Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 26, 2020	1 Year
6.	Preamplifier	SKET Electronic	BK1G18G30 D	KD17503	Oct. 26, 2020	1 Year
7.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Nov. 02, 2020	2 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Nov. 02, 2020	2 Year
9.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Nov. 02, 2020	2 Year
10.	Horn Antenna	A-INFO	LB-180400- KF	J211060628	Nov. 02, 2020	2 Year
11.	Pre-amplifier	SONOMA	310N	186860	Oct. 26, 2020	1 Year
12.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
13.	RF Test Control System	YIHENG	YH3000	2017430	Oct. 26, 2020	1 Year
14.	Power Sensor	DAER	RPR3006W	15100041SN045	Oct. 26, 2020	1 Year
15.	Power Sensor	DAER	RPR3006W	15100041SN046	Oct. 26, 2020	1 Year
16.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 26, 2020	1 Year
17.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Oct. 26, 2020	1 Year
18.	Signal Generator	Agilent	E4421B	MY41000743	Oct. 26, 2020	1 Year
19.	DC Power Supply	IVYTECH	IV3605	1804D360510	Oct. 26, 2020	1 Year
20.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80 B	N/A	Oct. 26, 2020	1 Year

1.8. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 3.9 dB (Horizontal)
		Ur = 3.8 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4 dB

1.9. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, September 30, 2020.

ISED-Registration No.: 8058A

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A, September 30, 2020.

Test Location

Shenzhen Anbotech Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102

2. Summary of Test Results

Standard	Test Type	Result
15.207 & 15.407	Conducted Emission	PASS
15.205/15.209	Spurious Emission	PASS
15.407(b)	Band Edge	PASS
15.407(a)(5)&15.407(e)	Occupy Bandwidth	PASS
15.407(a)(3)	Maximum Conducted Output Power	PASS
15.407(a)(1)(3)	Peak Power Spectral Density	PASS
15.203	Antenna Requirement	PASS
15.407(g)	Frequency Stability	PASS


3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207&15.407		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50

Remark: (1) *Decreasing linearly with logarithm of the frequency.
(2) The lower limit shall apply at the transition frequency.

3.2. Test Setup

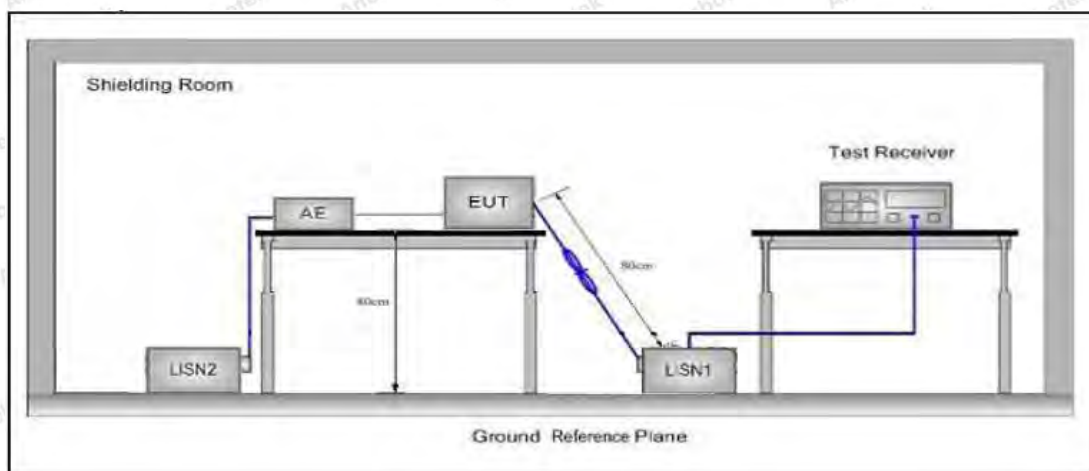

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.


The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

During the test, pre-scan all modes, and found the 802.11ac20 CH 157 for ANT A which is the worst case, only the worst case is recorded in the report.

Conducted Emission Test Data


Test Site: 1# Shielded Room
 Operating Condition: 802.11ac20 CH 157 for ANT A
 Test Specification: AC 120V, 60Hz for adapter
 Comment: Live Line
 Tem.: 22.4°C Hum.: 49%

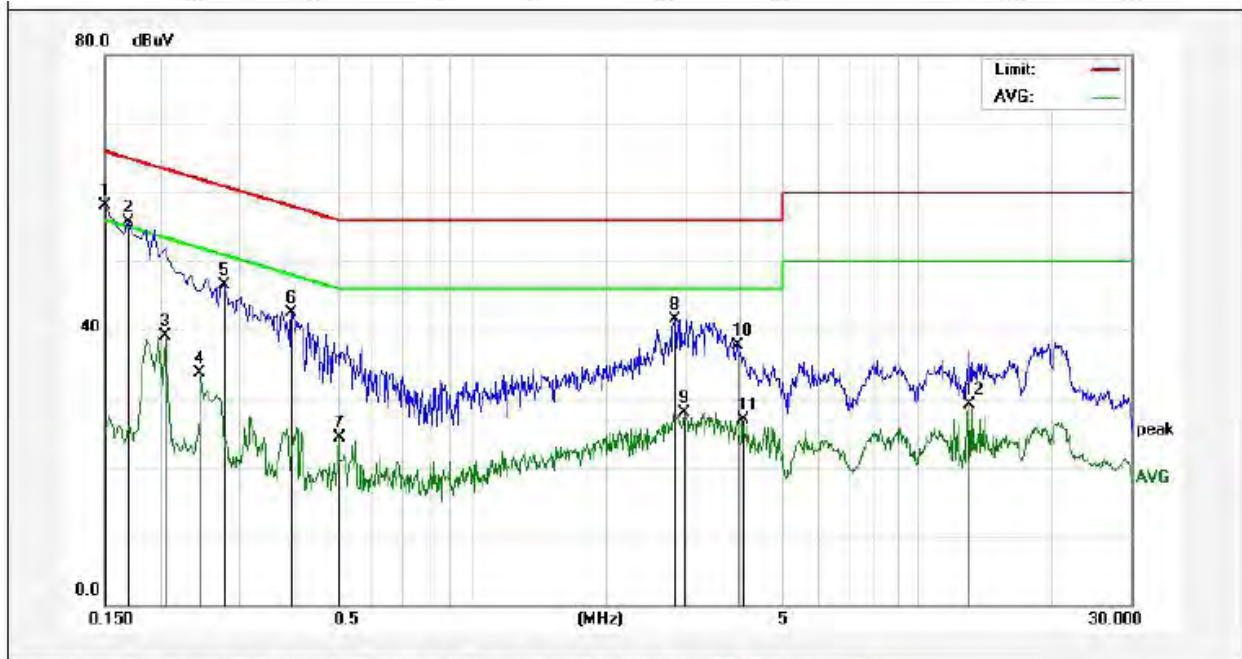

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1499	38.14	19.90	58.04	66.00	-7.96	QP	
2	0.1700	35.85	19.90	55.75	64.96	-9.21	QP	
3	0.2059	19.20	19.90	39.10	53.37	-14.27	AVG	
4	0.2459	13.81	19.89	33.70	51.89	-18.19	AVG	
5	0.2779	26.61	19.89	46.50	60.88	-14.38	QP	
6	0.3940	22.52	19.93	42.45	57.98	-15.53	QP	
7	0.5020	4.27	19.98	24.25	46.00	-21.75	AVG	
8	2.8460	21.32	20.16	41.48	56.00	-14.52	QP	
9	2.9900	7.73	20.16	27.89	46.00	-18.11	AVG	
10	3.9260	17.60	20.18	37.78	56.00	-18.22	QP	
11	4.0378	6.80	20.18	26.98	46.00	-19.02	AVG	
12	13.0379	8.91	20.29	29.20	50.00	-20.80	AVG	

Conducted Emission Test Data


Test Site: 1# Shielded Room
Operating Condition: 802.11ac20 CH 157 for ANT A
Test Specification: AC 120V, 60Hz for adapter
Comment: Neutral Line
Tem.: 22.4°C Hum.: 49%

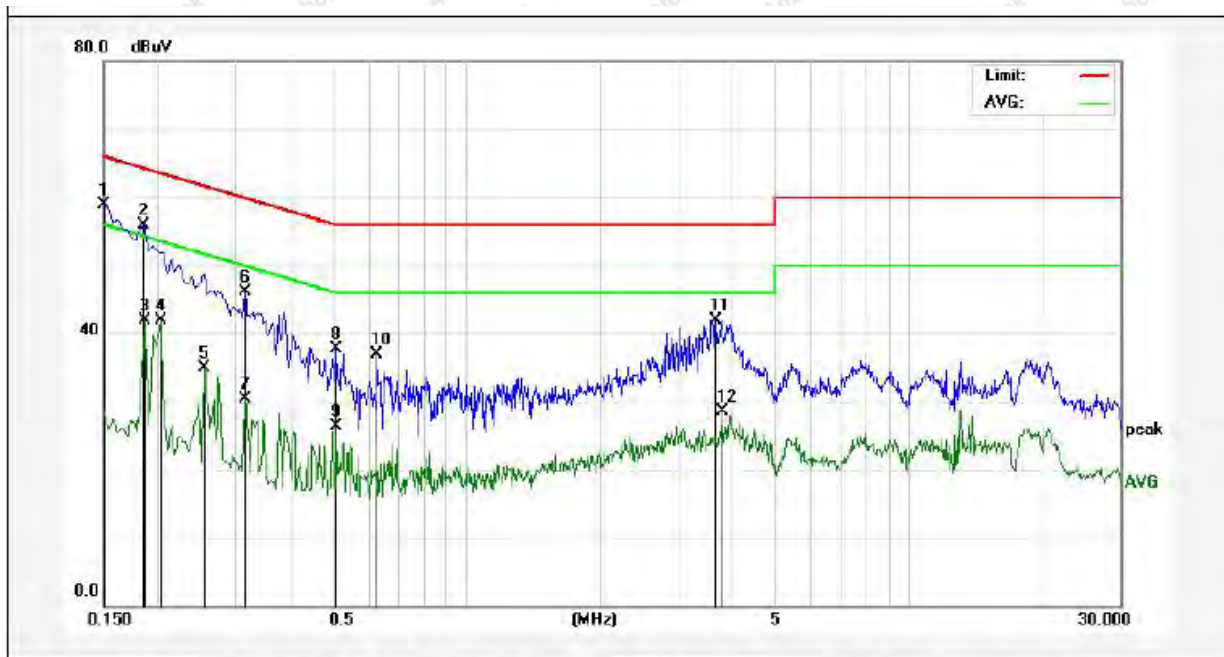

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1499	39.08	19.90	58.98	66.00	-7.02	QP	
2	0.1844	35.95	19.90	55.85	64.28	-8.43	QP	
3	0.1859	22.03	19.90	41.93	54.21	-12.28	AVG	
4	0.2020	22.00	19.90	41.90	53.52	-11.62	AVG	
5	0.2540	15.04	19.89	34.93	51.62	-16.69	AVG	
6	0.3140	26.11	19.90	46.01	59.86	-13.85	QP	
7	0.3140	10.33	19.90	30.23	49.86	-19.63	AVG	
8	0.5060	17.71	19.98	37.69	56.00	-18.31	QP	
9	0.5060	6.36	19.98	26.34	46.00	-19.66	AVG	
10	0.6260	16.93	20.02	36.95	56.00	-19.05	QP	
11	3.6579	21.80	20.17	41.97	56.00	-14.03	QP	
12	3.7620	8.33	20.18	28.51	46.00	-17.49	AVG	

Conducted Emission Test Data


Test Site: 1# Shielded Room
Operating Condition: 802.11ac20 CH 157 for ANT A
Test Specification: AC 240V, 60Hz for adapter
Comment: Live Line
Tem.: 22.4°C Hum.: 49%

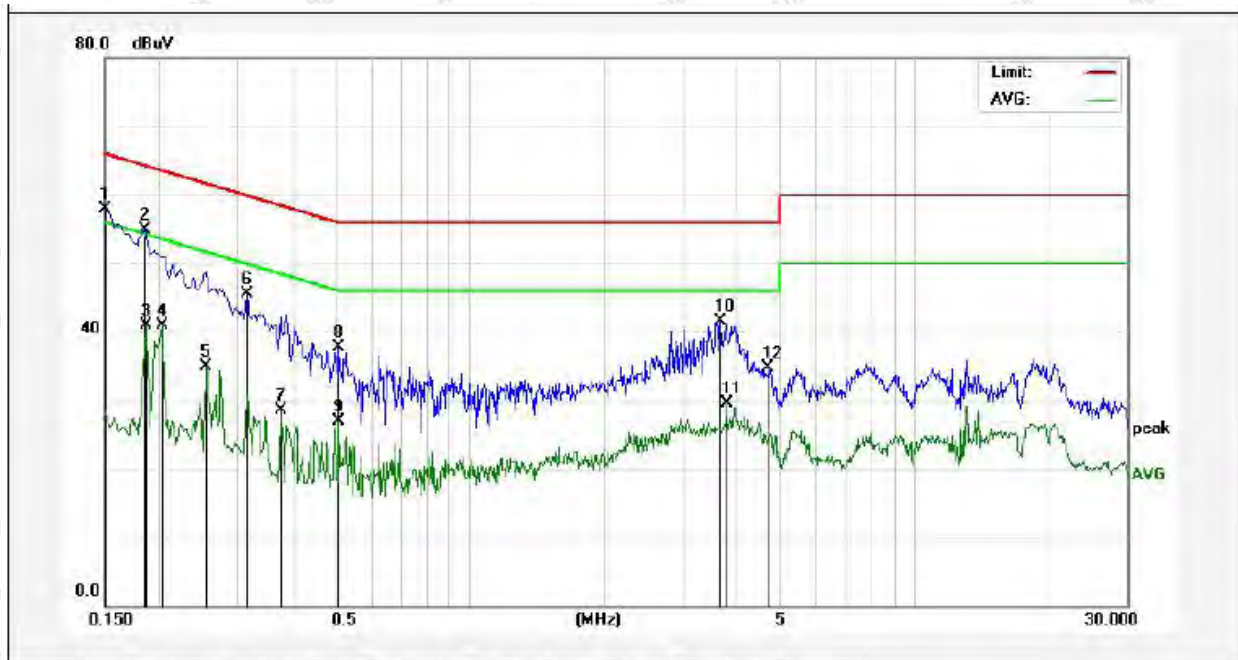

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1499	38.08	19.90	57.98	66.00	-8.02	QP	
2	0.1844	34.95	19.90	54.85	64.28	-9.43	QP	
3	0.1859	21.03	19.90	40.93	54.21	-13.28	AVG	
4	0.2020	21.00	19.90	40.90	53.52	-12.62	AVG	
5	0.2540	15.04	19.89	34.93	51.62	-16.69	AVG	
6	0.3140	25.61	19.90	45.51	59.86	-14.35	QP	
7	0.3738	8.60	19.92	28.52	48.41	-19.89	AVG	
8	0.5060	17.71	19.98	37.69	56.00	-18.31	QP	
9	0.5060	6.86	19.98	26.84	46.00	-19.16	AVG	
10	3.6579	21.30	20.17	41.47	56.00	-14.53	QP	
11	3.7620	9.33	20.18	29.51	46.00	-16.49	AVG	
12	4.6859	14.48	20.20	34.68	56.00	-21.32	QP	

Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: 802.11ac20 CH 157 for ANT A
Test Specification: AC 240V, 60Hz for adapter
Comment: Neutral Line
Tem.: 22.4°C Hum.: 49%

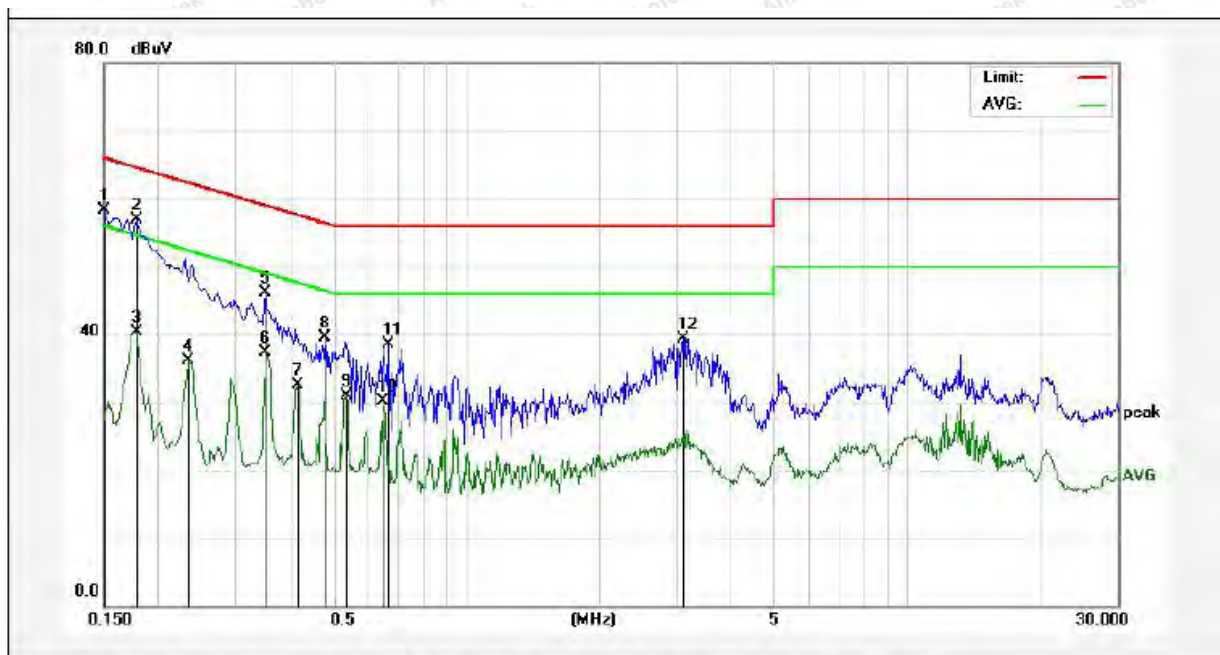

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1499	38.48	19.90	58.38	66.00	-7.62	QP	
2	0.1779	37.00	19.90	56.90	64.58	-7.68	QP	
3	0.1779	20.41	19.90	40.31	54.58	-14.27	AVG	
4	0.2340	16.28	19.89	36.17	52.30	-16.13	AVG	
5	0.3497	26.21	19.91	46.12	58.97	-12.85	QP	
6	0.3497	17.40	19.91	37.31	48.97	-11.66	AVG	
7	0.4138	12.63	19.94	32.57	47.57	-15.00	AVG	
8	0.4778	19.61	19.97	39.58	56.38	-16.80	QP	
9	0.5340	10.94	19.99	30.93	46.00	-15.07	AVG	
10	0.6460	10.10	20.02	30.12	46.00	-15.88	AVG	
11	0.6620	18.51	20.03	38.54	56.00	-17.46	QP	
12	3.0979	19.15	20.16	39.31	56.00	-16.69	QP	

4. Radiation Spurious Emission and Band Edge

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209, 15.205 and 15.407				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	68.2	Peak	3

Remark:

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

(3)Above 1GHz limit: $E[dBuV/m] = EIRP[dBm] + 95.2 = 68.2 dBuV/m$, for $EIPR[dBm] = -27dBm$.

4.2. Test Setup

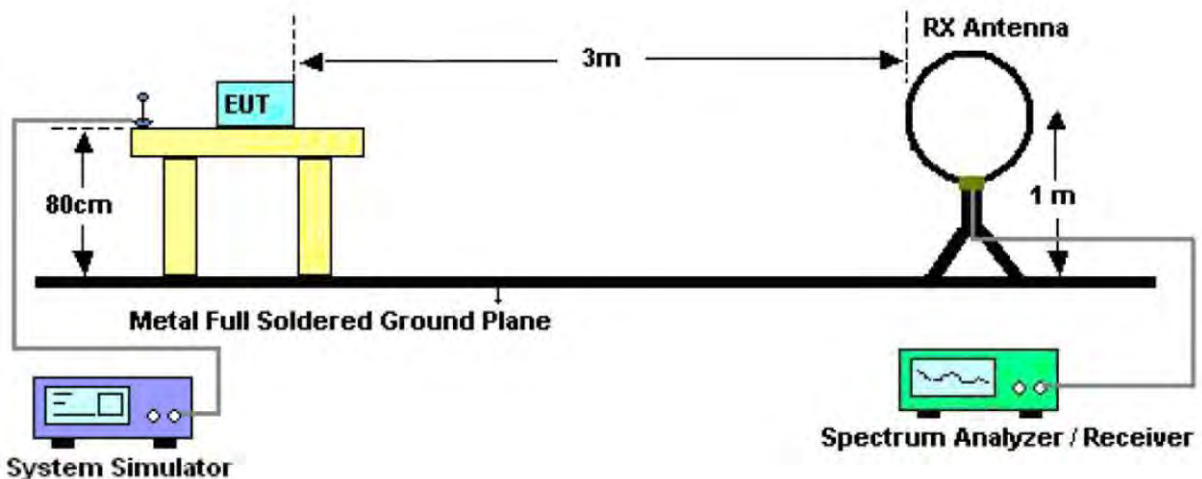


Figure 1. Below 30MHz

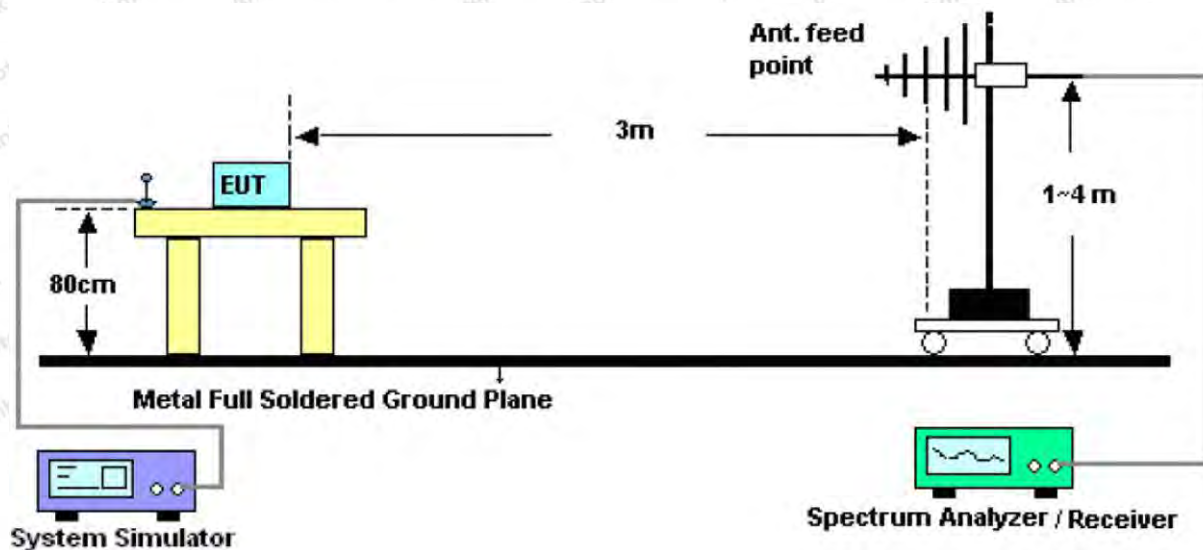


Figure 2. 30MHz to 1GHz

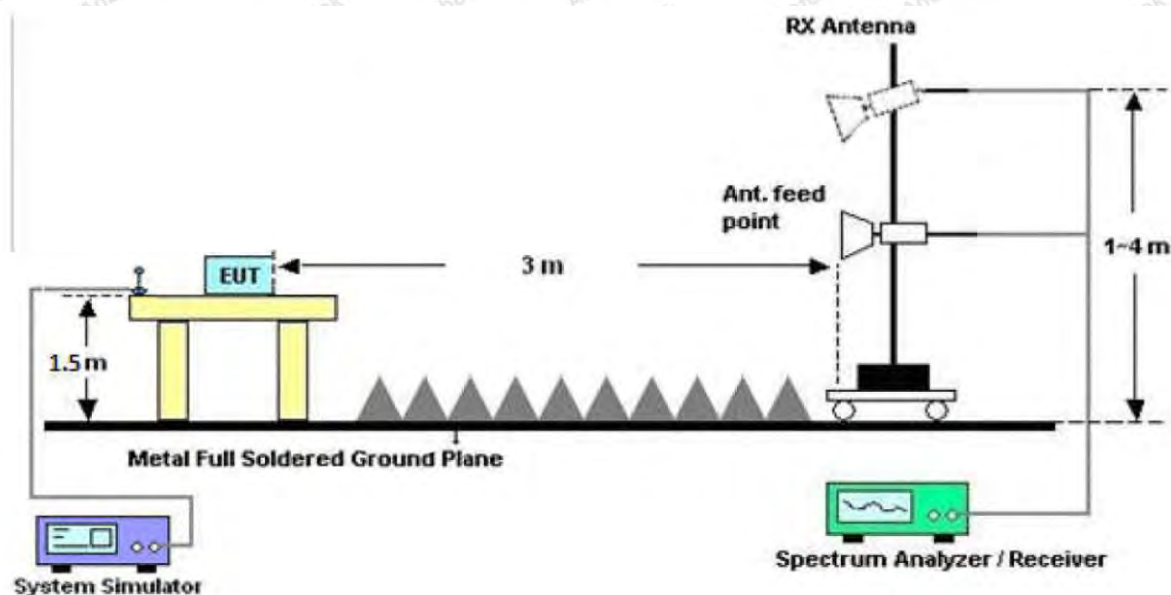


Figure 3. Above 1 GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For the radiated emission test above 1GHz:

Shenzhen Anbotech Compliance Laboratory Limited

Code:AB-RF-05-a

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotech.com



Hotline

400-003-0500

www.anbotech.com

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW = 30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For above 1GHz, Set the spectrum analyzer as:

RBW = 1MHz, VBW = 1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.

RBW = 1MHz, VBW = 10Hz, Detector= Average, Trace mode= Max hold, Sweep- auto couple.

4.4. Test Data


PASS

The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.

During the test, pre-scan all modes, and found the 802.11ac20 CH 157 for ANT A which is the worst case, only the worst case is recorded in the report.

Test Results (30~1000MHz)

Test Mode: 802.11ac20 CH 157 for ANT A
 Power Source: AC 120V, 60Hz for adapter
 Polarization: Vertical
 Temp.(°C)/Hum.(%RH): 22.1°C/51%RH

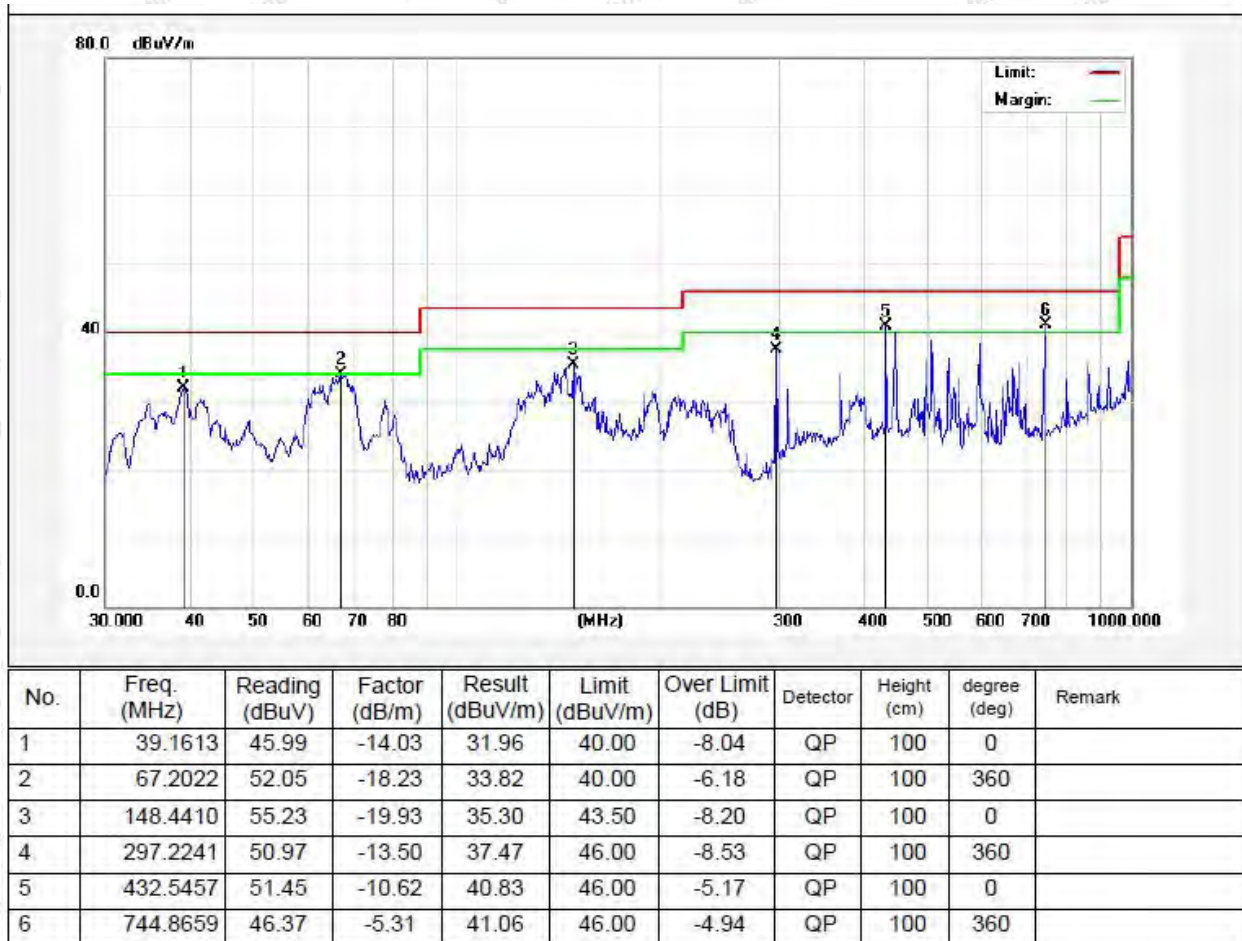

Test Results (30~1000MHz)

Test Mode: 802.11ac20 CH 157 for ANT A
Power Source: AC 120V, 60Hz for adapter
Polarization: Horizontal
Temp.(°C)/Hum.(%RH): 22.1°C/51%RH



No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	148.4410	53.02	-20.71	32.31	43.50	-11.19	QP	100	360	
2	175.0363	52.41	-21.07	31.34	43.50	-12.16	QP	100	0	
3	297.2241	55.96	-14.55	41.41	46.00	-4.59	QP	100	360	
4	446.4141	52.77	-12.12	40.65	46.00	-5.35	QP	100	0	
5	744.8659	46.68	-5.31	41.37	46.00	-4.63	QP	100	360	
6	893.8567	44.52	-1.88	42.64	46.00	-3.36	QP	100	0	

Test Results (Above 1000MHz)

ANT A:

Test mode:	IEEE 802.11ac(HT20)	Test channel:	Low CH
------------	---------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11490.00	41.32	31.98	17.08	33.91	56.47	68.20	-11.73	V
17235.00	40.84	32.65	20.03	34.85	58.67	68.20	-9.53	V
11490.00	40.61	31.98	17.08	33.91	55.76	68.20	-12.44	H
17235.00	40.80	32.65	20.03	34.85	58.63	68.20	-9.57	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11490.00	29.99	31.98	17.08	33.91	45.14	54.00	-8.86	V
17235.00	27.42	32.65	20.03	34.85	45.25	54.00	-8.75	V
11490.00	28.02	31.98	17.08	33.91	43.17	54.00	-10.83	H
17235.00	27.66	32.65	20.03	34.85	45.49	54.00	-8.51	H

Test mode:	IEEE 802.11ac(HT20)	Test channel:	Mid CH
------------	---------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11570.00	39.14	32.44	17.18	33.91	54.85	68.20	-13.35	V
17355.00	40.42	32.78	20.12	34.86	58.46	68.20	-9.74	V
11570.00	39.66	32.44	17.18	33.91	55.37	68.20	-12.83	H
17355.00	39.28	32.78	20.12	34.86	57.32	68.20	-10.88	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11570.00	29.01	32.44	17.18	33.91	44.72	54.00	-9.28	V
17355.00	28.02	32.78	20.12	34.86	46.06	54.00	-7.94	V
11570.00	28.62	32.44	17.18	33.91	44.33	54.00	-9.67	H
17355.00	29.84	32.78	20.12	34.86	47.88	54.00	-6.12	H

Test mode:	IEEE 802.11ac(HT20)	Test channel:	High CH
------------	---------------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preampl Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11650.00	41.74	32.59	18.02	33.92	58.43	68.20	-9.77	V
17475.00	40.55	32.87	20.15	34.88	58.69	68.20	-9.51	V
11650.00	40.67	32.59	18.02	33.92	57.36	68.20	-10.84	H
17475.00	40.15	32.87	20.15	34.88	58.29	68.20	-9.91	H


Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preampl Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11650.00	29.56	32.59	18.02	33.92	46.25	54.00	-7.75	V
17475.00	27.19	32.87	20.15	34.88	45.33	54.00	-8.67	V
11650.00	29.56	32.59	18.02	33.92	46.25	54.00	-7.75	H
17475.00	28.29	32.87	20.15	34.88	46.43	54.00	-7.57	H


Remark:

1. During the test, pre-scan the 802.11a,n(HT20),ac(HT20),n(HT40),ac(HT40),ac(HT80) mode, and found the 802.11ac(HT20) mode is worse case , the report only record this mode.
2. Final Level =Receiver Read level + Antenna Factor + Cable Loss–Preamplifier Factor

Band Edge test:

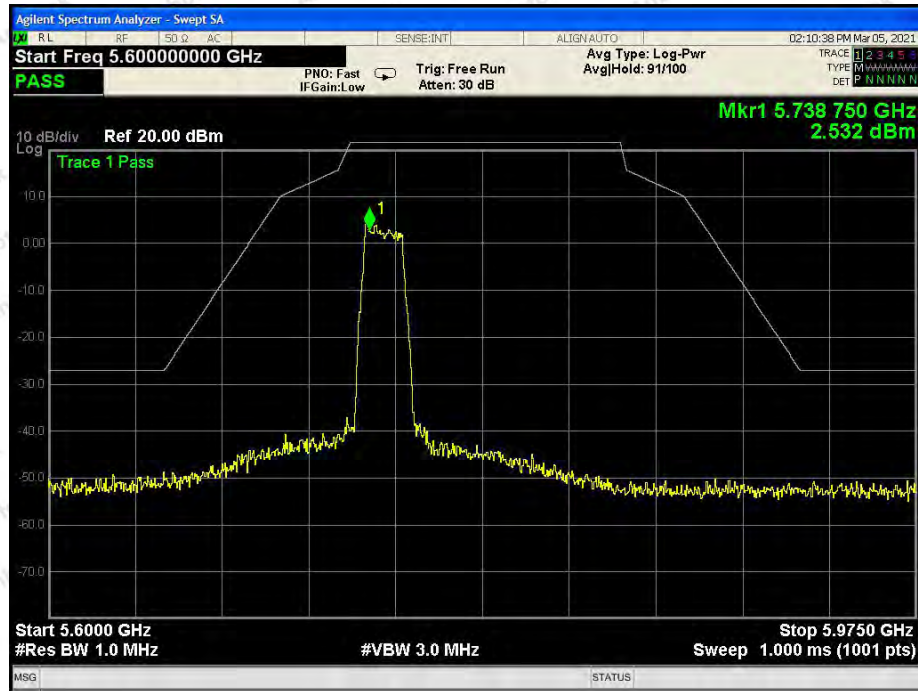


802.11a: Band Edge, Left Side

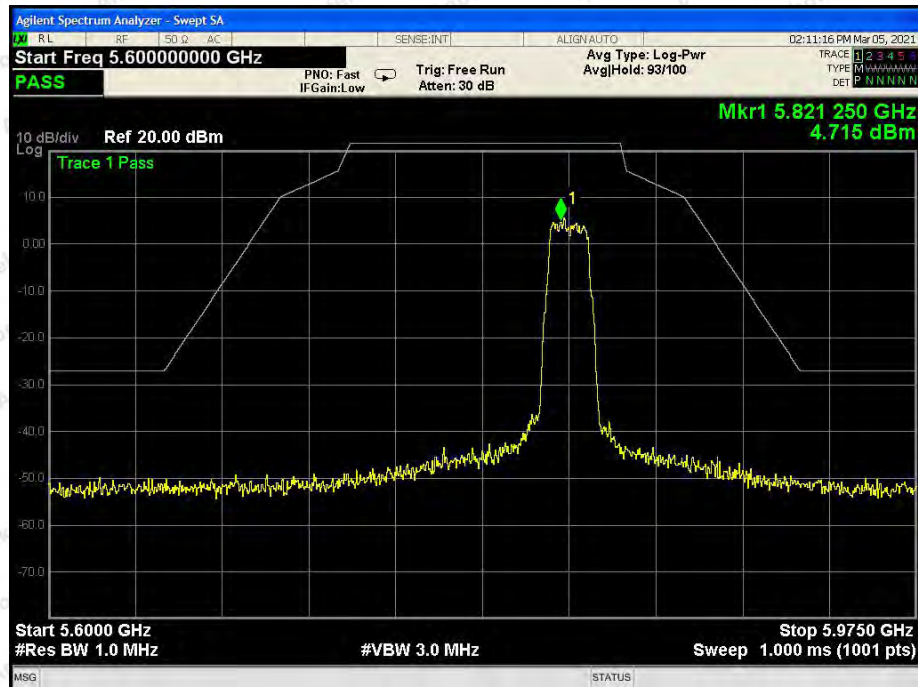


802.11a: Band Edge, Right Side




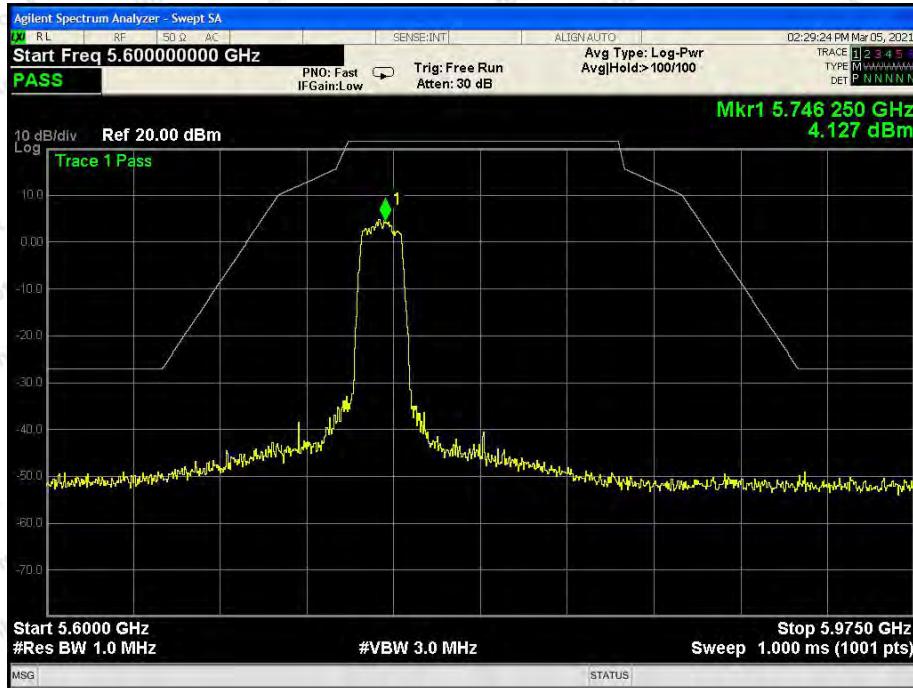


802.11n(20): Band Edge, Left Side

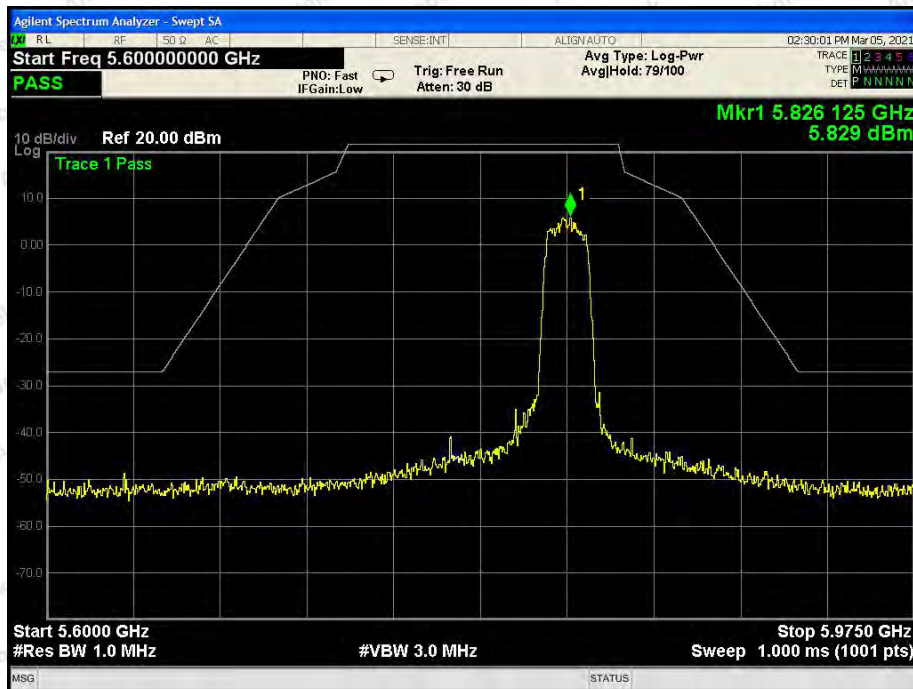


802.11n(20): Band Edge, Right Side

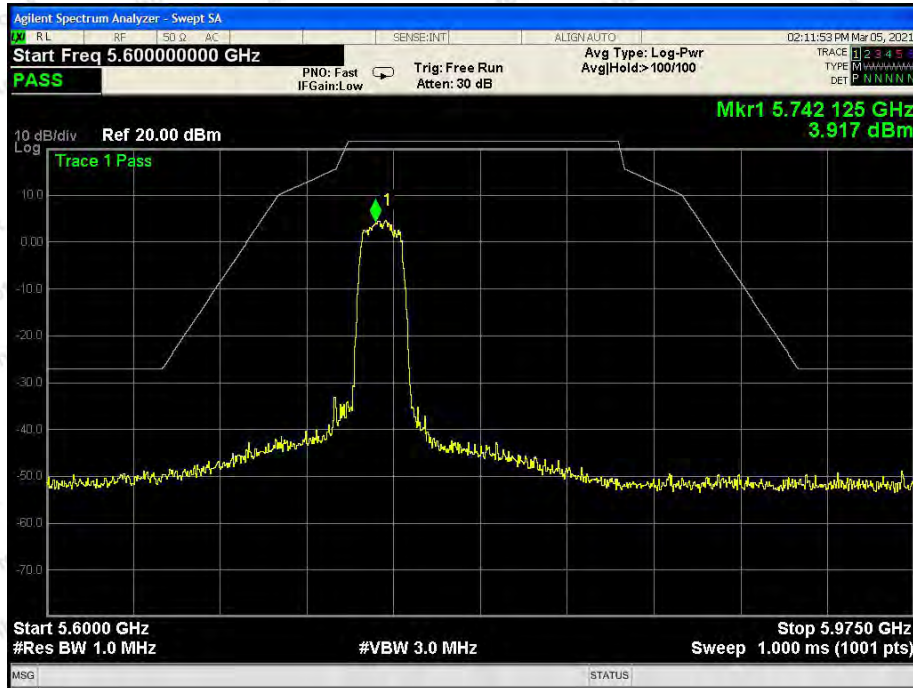


802.11ac(20): Band Edge, Left Side

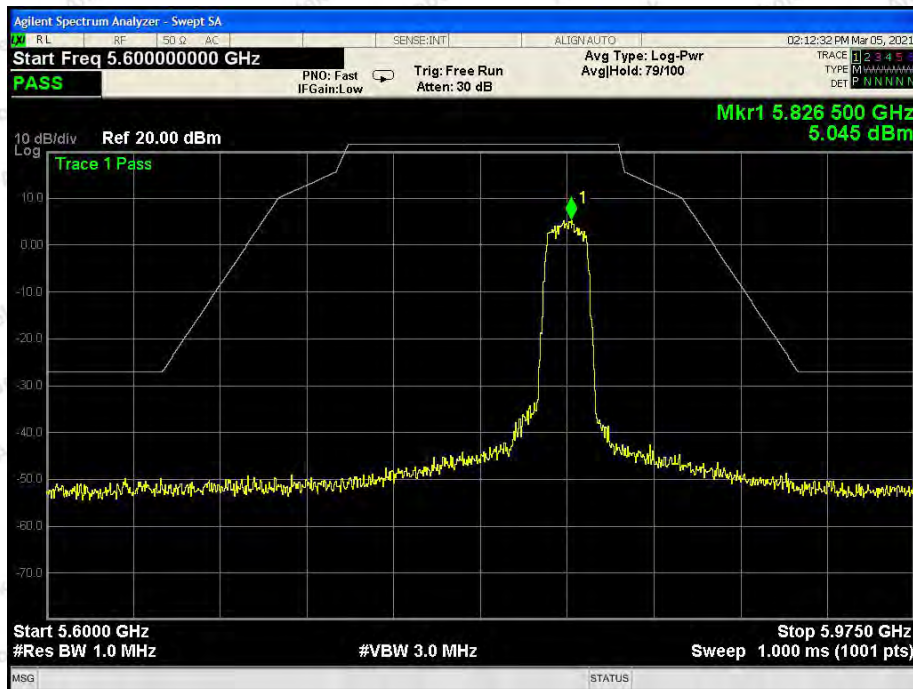

802.11ac(20): Band Edge, Right Side

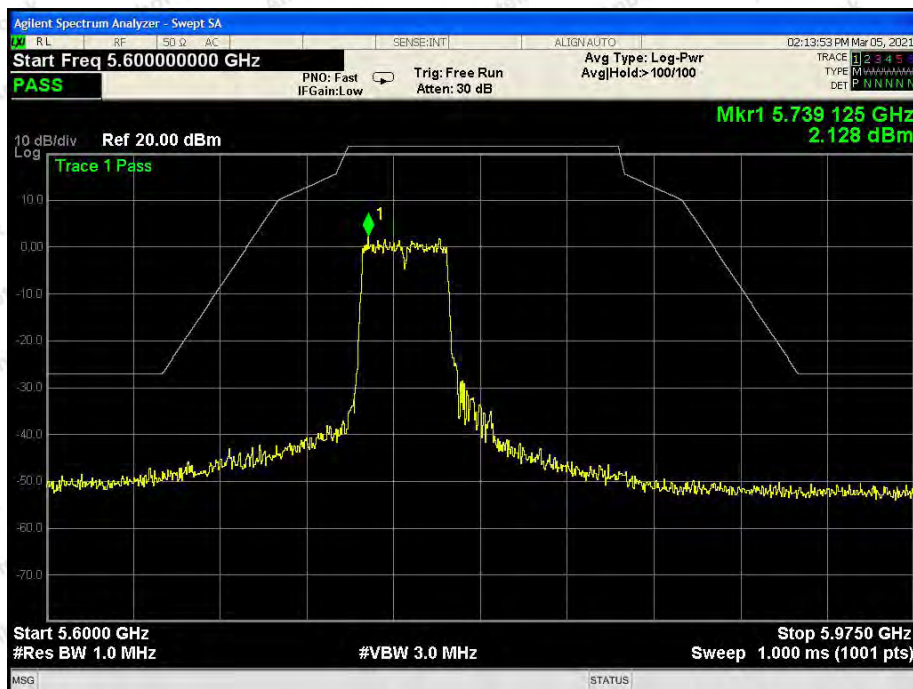


802.11n(40): Band Edge, Left Side

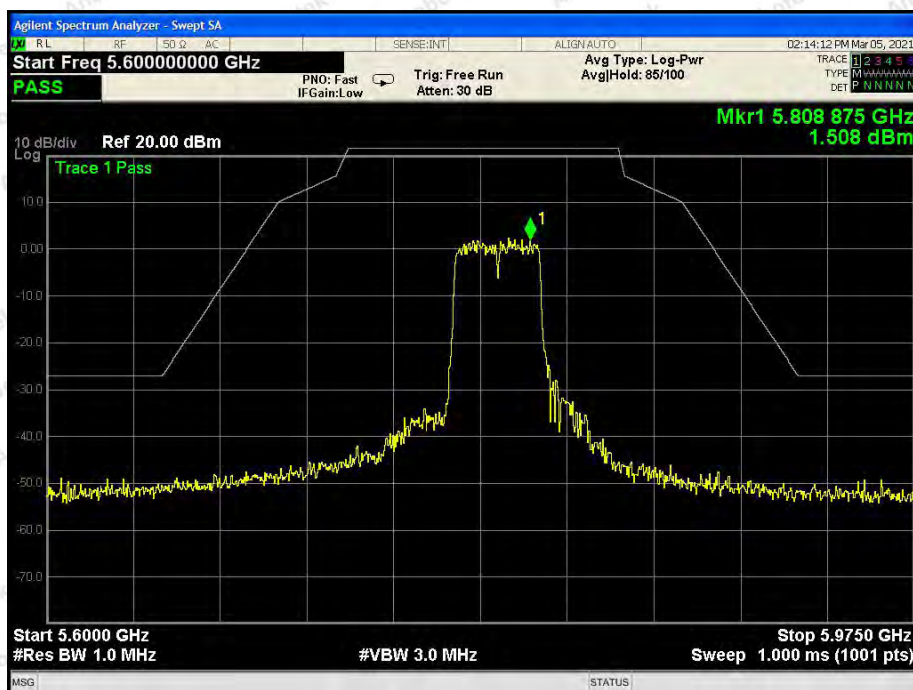

802.11n(40): Band Edge, Right Side



802.11ac(40): Band Edge, Left Side

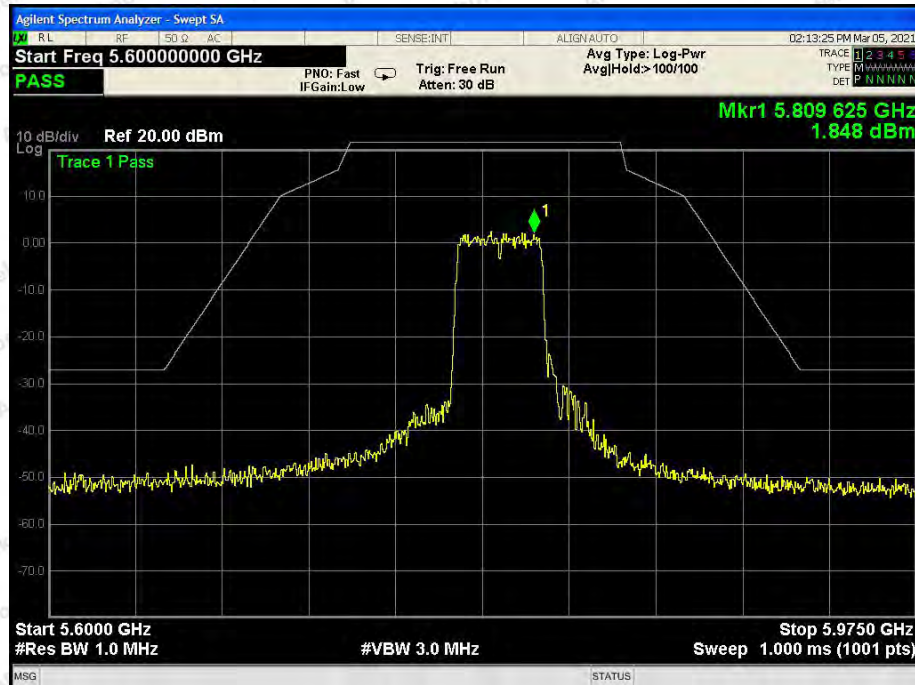

802.11ac(40): Band Edge, Right Side



802.11ac(80): Band Edge

Test Results (Above 1000MHz)

ANT B:

Test mode:	IEEE 802.11ac(HT20)	Test channel:	Low CH
------------	---------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11490.00	41.07	31.98	17.08	33.91	56.22	68.20	-11.98	V
17235.00	40.88	32.65	20.03	34.85	58.71	68.20	-9.49	V
11490.00	41.89	31.98	17.08	33.91	57.04	68.20	-11.16	H
17235.00	40.95	32.65	20.03	34.85	58.78	68.20	-9.42	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11490.00	29.06	31.98	17.08	33.91	44.21	54.00	-9.79	V
17235.00	27.87	32.65	20.03	34.85	45.70	54.00	-8.30	V
11490.00	28.36	31.98	17.08	33.91	43.51	54.00	-10.49	H
17235.00	28.87	32.65	20.03	34.85	46.70	54.00	-7.30	H

Test mode:	IEEE 802.11ac(HT20)	Test channel:	Mid CH
------------	---------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11570.00	39.75	32.44	17.18	33.91	55.46	68.20	-12.74	V
17355.00	40.23	32.78	20.12	34.86	58.27	68.20	-9.93	V
11570.00	41.03	32.44	17.18	33.91	56.74	68.20	-11.46	H
17355.00	39.08	32.78	20.12	34.86	57.12	68.20	-11.08	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11570.00	29.09	32.44	17.18	33.91	44.80	54.00	-9.20	V
17355.00	27.17	32.78	20.12	34.86	45.21	54.00	-8.79	V
11570.00	29.19	32.44	17.18	33.91	44.90	54.00	-9.10	H
17355.00	29.44	32.78	20.12	34.86	47.48	54.00	-6.52	H



Test mode:	IEEE 802.11ac(HT20)	Test channel:	High CH
------------	---------------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preampl Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11650.00	39.44	32.59	18.02	33.92	56.13	68.20	-12.07	V
17475.00	41.35	32.87	20.15	34.88	59.49	68.20	-8.71	V
11650.00	40.91	32.59	18.02	33.92	57.60	68.20	-10.60	H
17475.00	40.97	32.87	20.15	34.88	59.11	68.20	-9.09	H


Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preampl Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11650.00	28.47	32.59	18.02	33.92	45.16	54.00	-8.84	V
17475.00	29.87	32.87	20.15	34.88	48.01	54.00	-5.99	V
11650.00	28.82	32.59	18.02	33.92	45.51	54.00	-8.49	H
17475.00	29.71	32.87	20.15	34.88	47.85	54.00	-6.15	H


Remark:

1. During the test, pre-scan the 802.11a,n(HT20),ac(HT20),n(HT40),ac(HT40),ac(HT80) mode, and found the 802.11ac(HT20) mode is worse case , the report only record this mode.
2. Final Level =Receiver Read level + Antenna Factor + Cable Loss–Preamplifier Factor


Band Edge test:

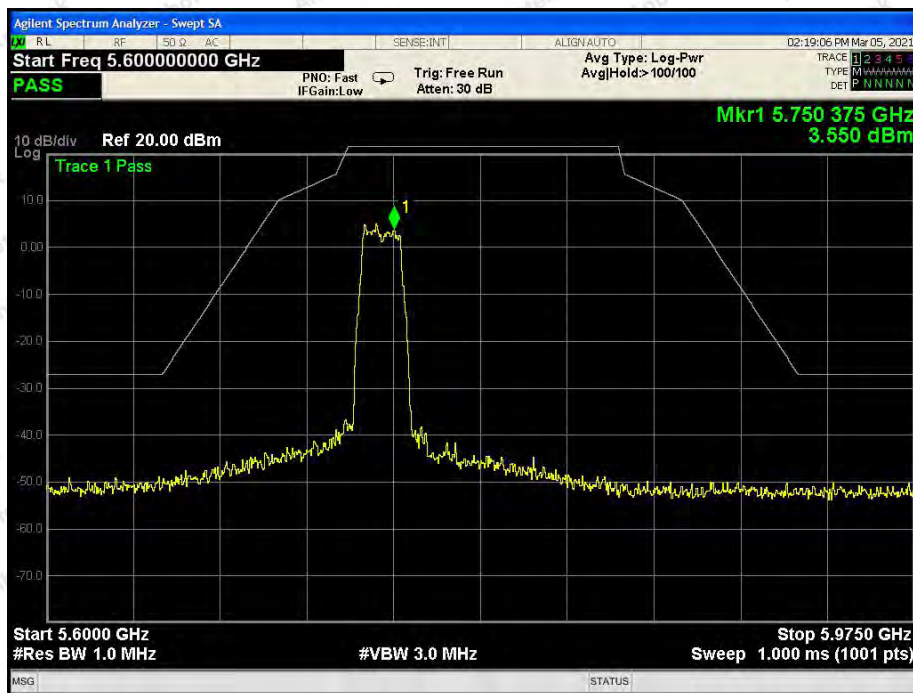


802.11a: Band Edge, Left Side

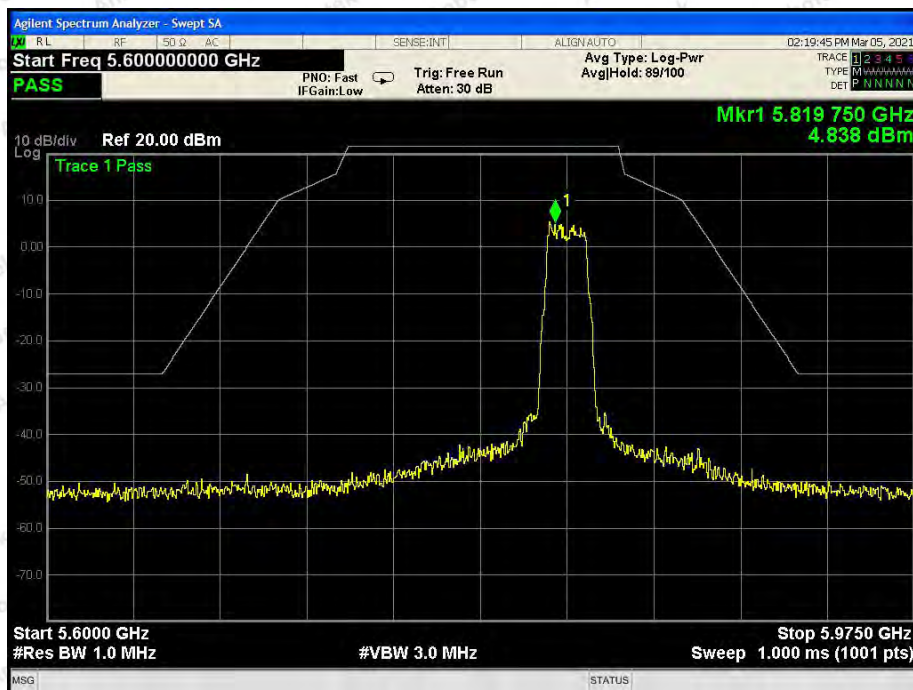


802.11a: Band Edge, Right Side

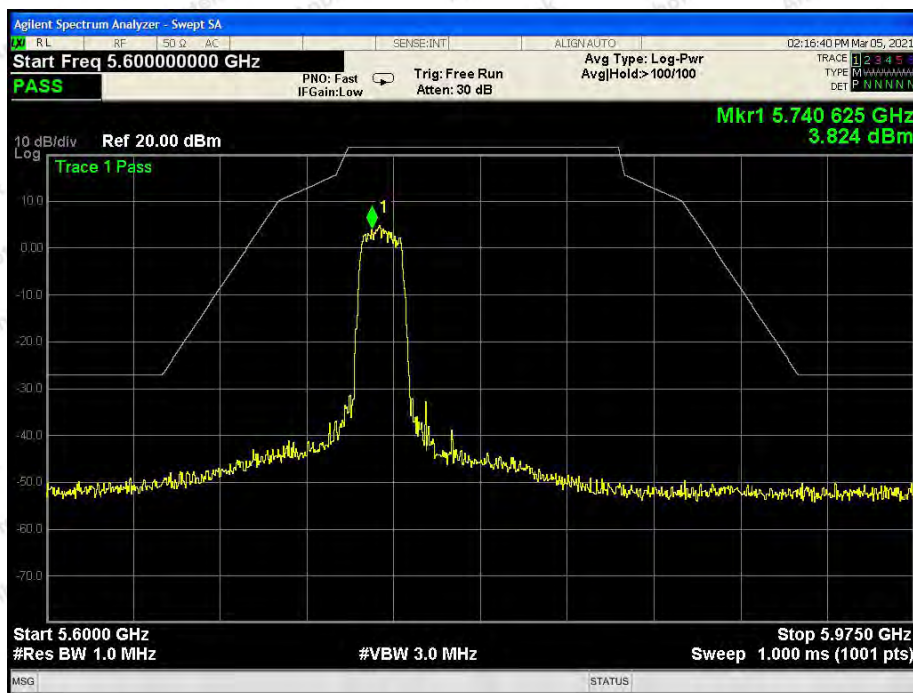


802.11n(20): Band Edge, Left Side

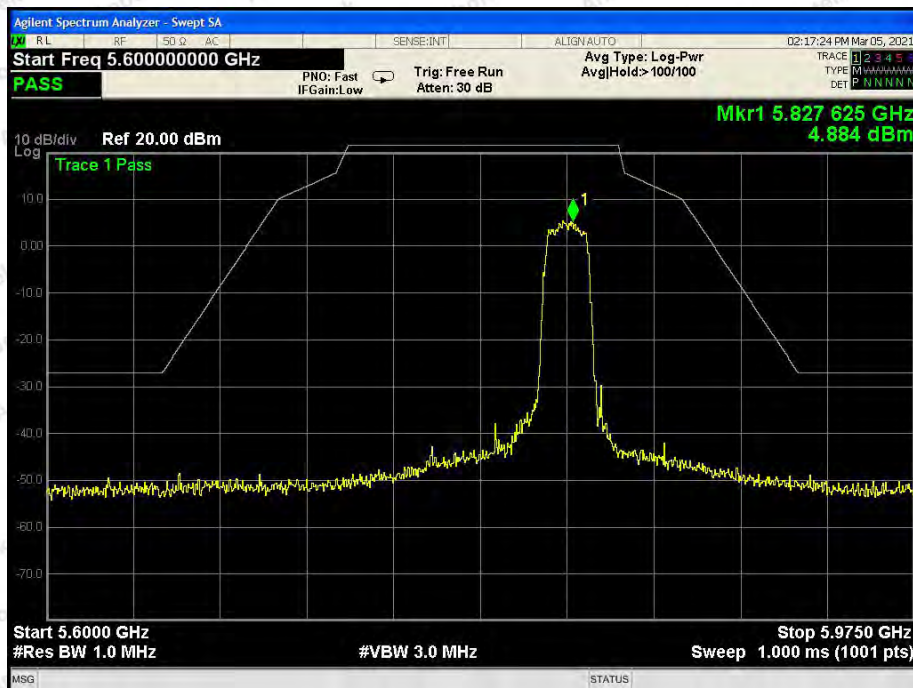


802.11n(20): Band Edge, Right Side

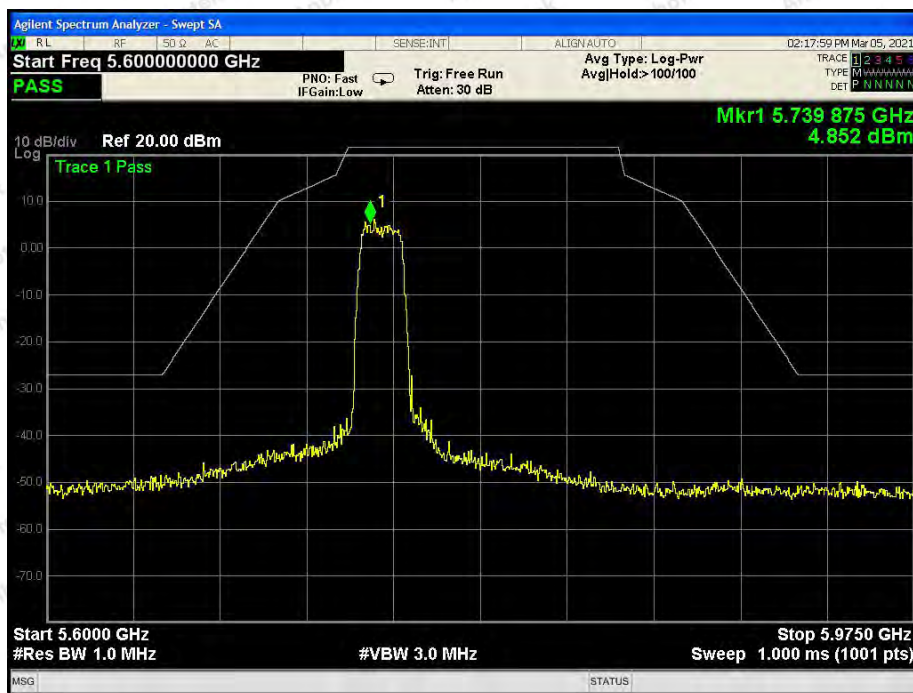


802.11ac(20): Band Edge, Left Side

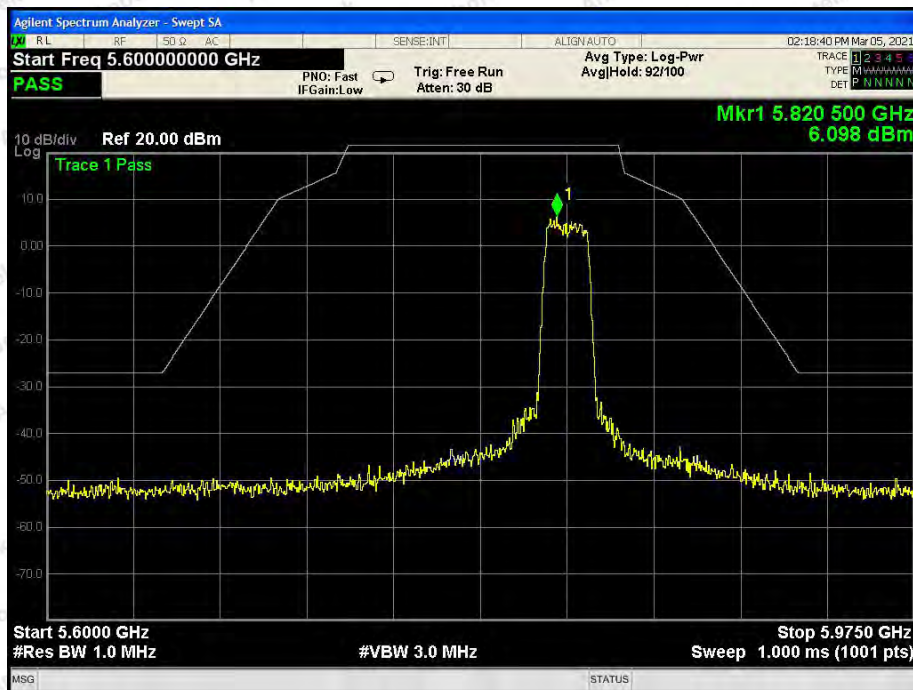


802.11ac(20): Band Edge, Right Side

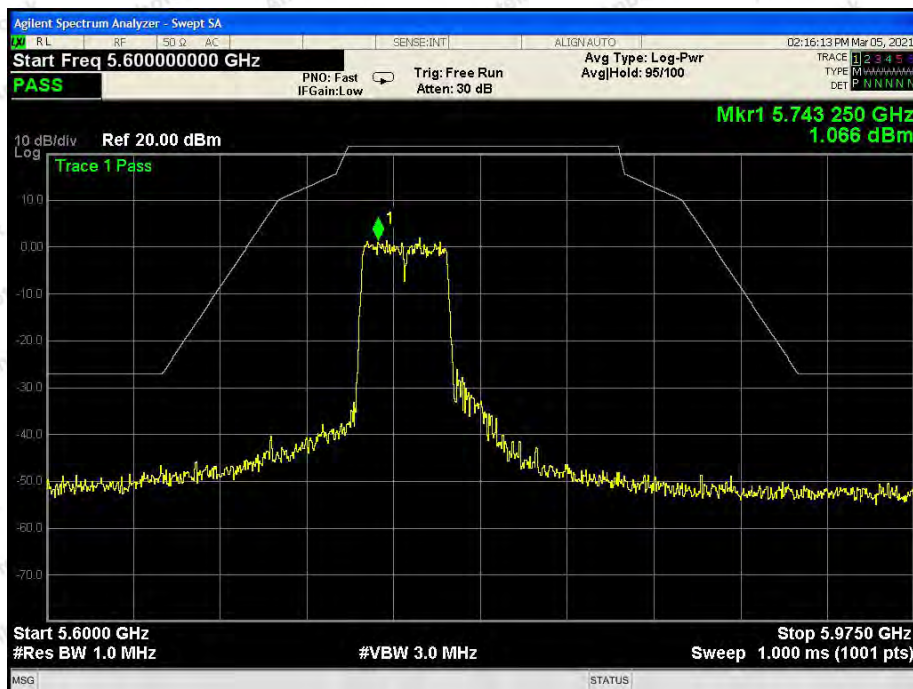


802.11n(40): Band Edge, Left Side

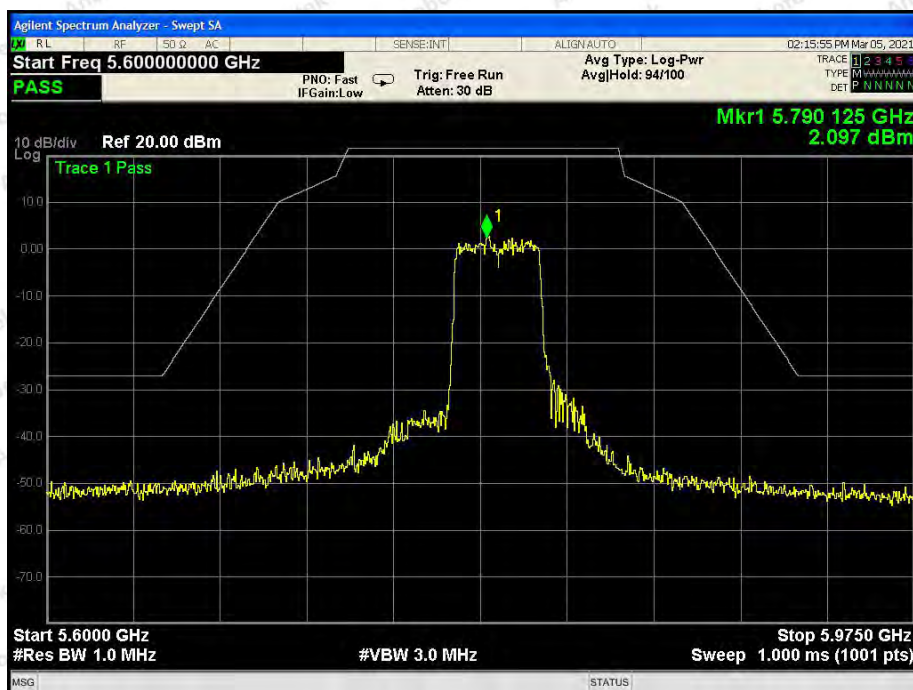

802.11n(40): Band Edge, Right Side

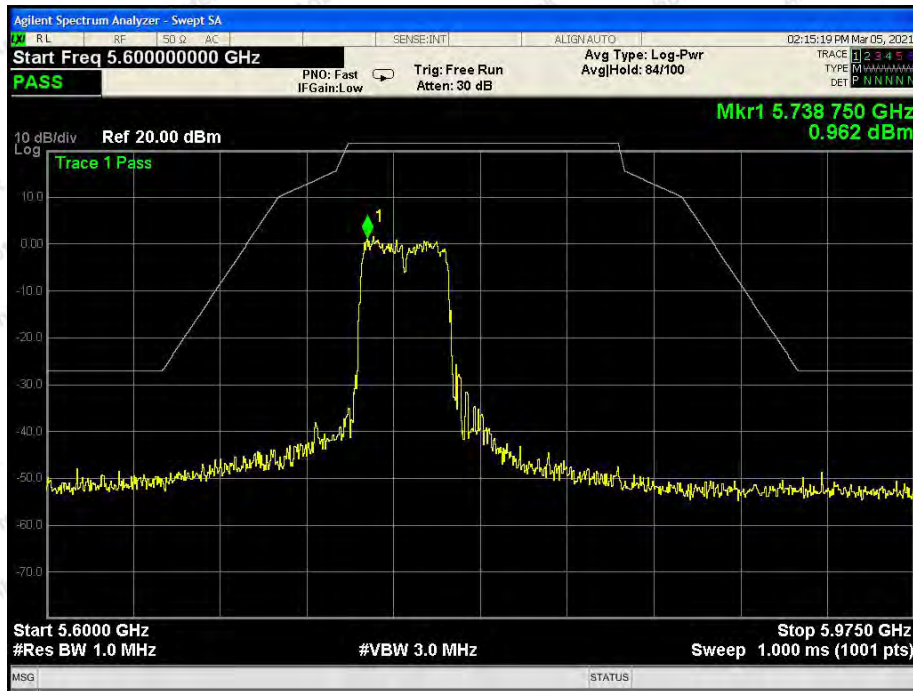

802.11ac(40): Band Edge, Left Side

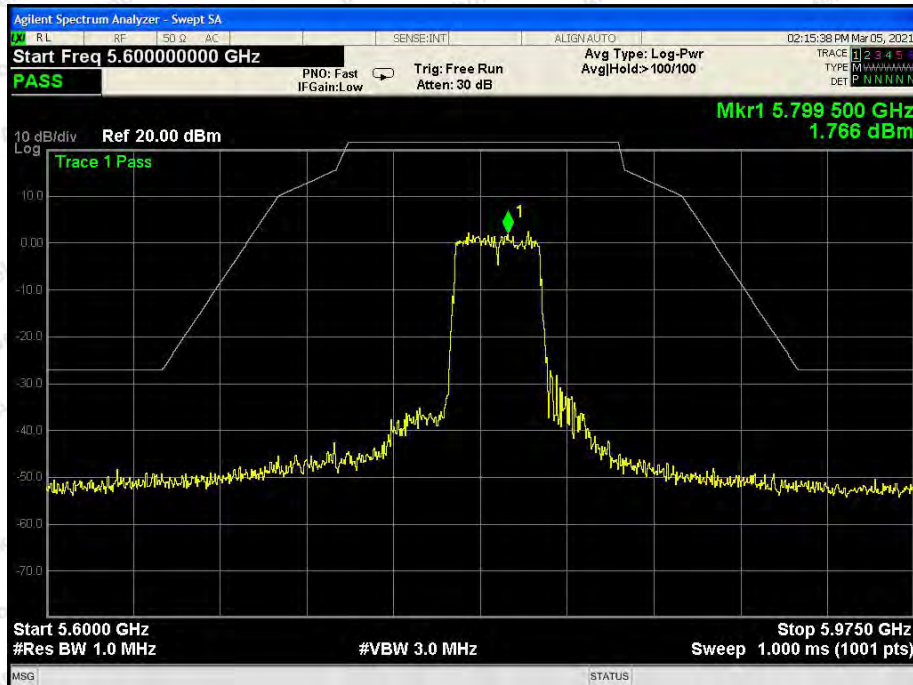

802.11ac(40): Band Edge, Right Side



802.11ac(80): Band Edge

Test Results (Above 1000MHz)

ANT A+B:

Test mode:	IEEE 802.11ac(HT20)	Test channel:	Low CH
------------	---------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11490.00	42.44	31.98	17.08	33.91	57.59	68.20	-10.61	V
17235.00	40.67	32.65	20.03	34.85	58.50	68.20	-9.70	V
11490.00	41.57	31.98	17.08	33.91	56.72	68.20	-11.48	H
17235.00	42.99	32.65	20.03	34.85	60.82	68.20	-7.38	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11490.00	29.09	31.98	17.08	33.91	44.24	54.00	-9.76	V
17235.00	29.14	32.65	20.03	34.85	46.97	54.00	-7.03	V
11490.00	30.70	31.98	17.08	33.91	45.85	54.00	-8.15	H
17235.00	28.38	32.65	20.03	34.85	46.21	54.00	-7.79	H

Test mode:	IEEE 802.11ac(HT20)	Test channel:	Mid CH
------------	---------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11570.00	40.79	32.44	17.18	33.91	56.50	68.20	-11.70	V
17355.00	40.68	32.78	20.12	34.86	58.72	68.20	-9.48	V
11570.00	41.57	32.44	17.18	33.91	57.28	68.20	-10.92	H
17355.00	42.29	32.78	20.12	34.86	60.33	68.20	-7.87	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11570.00	30.83	32.44	17.18	33.91	46.54	54.00	-7.46	V
17355.00	28.27	32.78	20.12	34.86	46.31	54.00	-7.69	V
11570.00	28.25	32.44	17.18	33.91	43.96	54.00	-10.04	H
17355.00	29.64	32.78	20.12	34.86	47.68	54.00	-6.32	H

Test mode:	IEEE 802.11ac(HT20)	Test channel:	High CH
------------	---------------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11650.00	41.54	32.59	18.02	33.92	58.23	68.20	-9.97	V
17475.00	42.22	32.87	20.15	34.88	60.36	68.20	-7.84	V
11650.00	41.59	32.59	18.02	33.92	58.28	68.20	-9.92	H
17475.00	41.88	32.87	20.15	34.88	60.02	68.20	-8.18	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11650.00	30.22	32.59	18.02	33.92	46.91	54.00	-7.09	V
17475.00	30.82	32.87	20.15	34.88	48.96	54.00	-5.04	V
11650.00	30.33	32.59	18.02	33.92	47.02	54.00	-6.98	H
17475.00	30.55	32.87	20.15	34.88	48.69	54.00	-5.31	H

Note:


1. During the test, pre-scan the 802.11a,n(HT20),ac(HT20),n(HT40),ac(HT40),ac(HT80) mode, and found the 802.11ac(HT20) mode is worse case , the report only record this mode.
2. Final Level =Receiver Read level + Antenna Factor + Cable Loss–Preamplifier Factor

5. Maximum Peak Output Power Test

5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.407 (a) (3)
Test Limit	30dBm

5.2. Test Setup



5.3. Test Procedure

1. The Transmitter output (antenna port) was connected to the power meter.
2. Turn on the EUT and power meter and then record the power value.
3. Repeat above procedures on all channels needed to be tested.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

5.4. Test Data

Test Item	:	Max. peak output power
Test Voltage	:	AC 120V, 60Hz for Adapter
Test Result	:	PASS

Test Mode	:	CH Low ~ CH High
Temperature	:	24℃
Humidity	:	55%RH

ANT A:

Mode	Channel Frequency (MHz)	Peak Power output (dBm)	Correctional Limit (dBm)	Results
802.11a	5745	14.60	30	PASS
	5785	15.32	30	PASS
	5825	15.22	30	PASS
802.11n20	5745	15.02	30	PASS
	5785	15.45	30	PASS
	5825	15.66	30	PASS
802.11ac20	5745	15.21	30	PASS
	5785	16.05	30	PASS
	5825	16.19	30	PASS
802.11n40	5755	14.58	30	PASS
	5795	15.63	30	PASS
802.11ac40	5755	14.91	30	PASS
	5795	15.44	30	PASS
802.11ac80	5775	15.17	30	PASS



ANT B:

Mode	Channel Frequency (MHz)	Peak Power output (dBm)	Correctional Limit (dBm)	Results
802.11a	5745	15.15	30	PASS
	5785	15.18	30	PASS
	5825	15.05	30	PASS
802.11n20	5745	14.30	30	PASS
	5785	15.27	30	PASS
	5825	15.15	30	PASS
802.11ac20	5745	14.84	30	PASS
	5785	15.89	30	PASS
	5825	16.04	30	PASS
802.11n40	5755	15.10	30	PASS
	5795	15.48	30	PASS
802.11ac40	5755	14.59	30	PASS
	5795	15.39	30	PASS
802.11ac80	5775	14.90	30	PASS



ANT A+B:


Mode	Channel Frequency (MHz)	Peak Power output (dBm)	Correctional Limit (dBm)	Results
802.11n20	5745	17.685	30	PASS
	5785	18.371	30	PASS
	5825	18.423	30	PASS
802.11ac20	5745	18.039	30	PASS
	5785	18.981	30	PASS
	5825	19.126	30	PASS
802.11n40	5755	17.858	30	PASS
	5795	18.566	30	PASS
802.11ac40	5755	17.763	30	PASS
	5795	18.425	30	PASS
802.11ac80	5775	18.047	30	PASS

6. Occupy Bandwidth Test

6.1. Test Standard

Test Standard	FCC Part15 C Section 15.407 (a)(5)&15.407(e)
---------------	--

6.2. Test Setup



6.3. Test Procedure

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

3. Set the spectrum analyzer as:

26 dB & 99% bandwidth

RBW = approximately 1% of the emission bandwidth;

Set the VBW > RBW;

Detector= Peak

Trace mode= Max hold.

Sweep- auto couple.

6 dB bandwidth

RBW = 100kHz;

Set the video bandwidth (VBW) ≥ 3 RBW;

Detector= Peak

Trace mode= Max hold.

Sweep- auto couple.

4. Measure the maximum width of the emission that is 26dB /6dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer.

5. Repeat until all the rest channels are investigated.

6.4. Test Data



Report No.: 18220WC10016404

FCC ID: 2AS9D-MAGIC421S

Page 45 of 96

Test Item : 6dB & 26dB BW

Test Mode : CH Low ~ CH High

Test Voltage : AC 120V, 60Hz for Adapter

Temperature : 24°C


Test Result : PASS

Humidity : 55%RH


Mode	Channel Frequency (MHz)	6dB BW(MHz)		Limit	Results
		ANT A	ANT B		
802.11a	5745	16.46	16.36	>0.5MHz	PASS
	5785	16.46	16.49		PASS
	5825	16.43	16.44		PASS
802.11n20	5745	17.59	17.59		PASS
	5785	17.59	17.59		PASS
	5825	16.88	17.60		PASS
802.11ac20	5745	17.76	17.69		PASS
	5785	17.77	17.65		PASS
	5825	17.64	17.65		PASS
802.11n40	5755	36.49	36.45		PASS
	5795	36.43	36.47		PASS
802.11ac40	5755	36.48	36.37		PASS
	5795	36.47	36.43		PASS
802.11ac80	5775	75.86	76.47		PASS

Mode	Channel Frequency (MHz)	26dB BW(MHz)		99% Bandwidth (MHz)	
		ANT A	ANT B	ANT A	ANT B
802.11a	5745	20.88	20.97	16.540	16.554
	5785	21.02	20.82	16.575	16.551
	5825	21.02	20.84	16.559	16.568
802.11n20	5745	21.42	21.41	17.827	17.810
	5785	21.44	21.35	17.829	17.768
	5825	21.21	21.20	17.792	17.787
802.11ac20	5745	21.42	21.45	17.896	17.878
	5785	21.50	21.22	17.872	17.756
	5825	21.55	21.35	17.860	17.798
802.11n40	5755	39.88	39.40	36.417	36.426
	5795	39.67	39.60	36.349	36.335
802.11ac40	5755	40.17	40.00	36.551	36.620
	5795	39.92	40.12	36.555	36.503
802.11ac80	5775	80.74	82.99	76.038	75.893

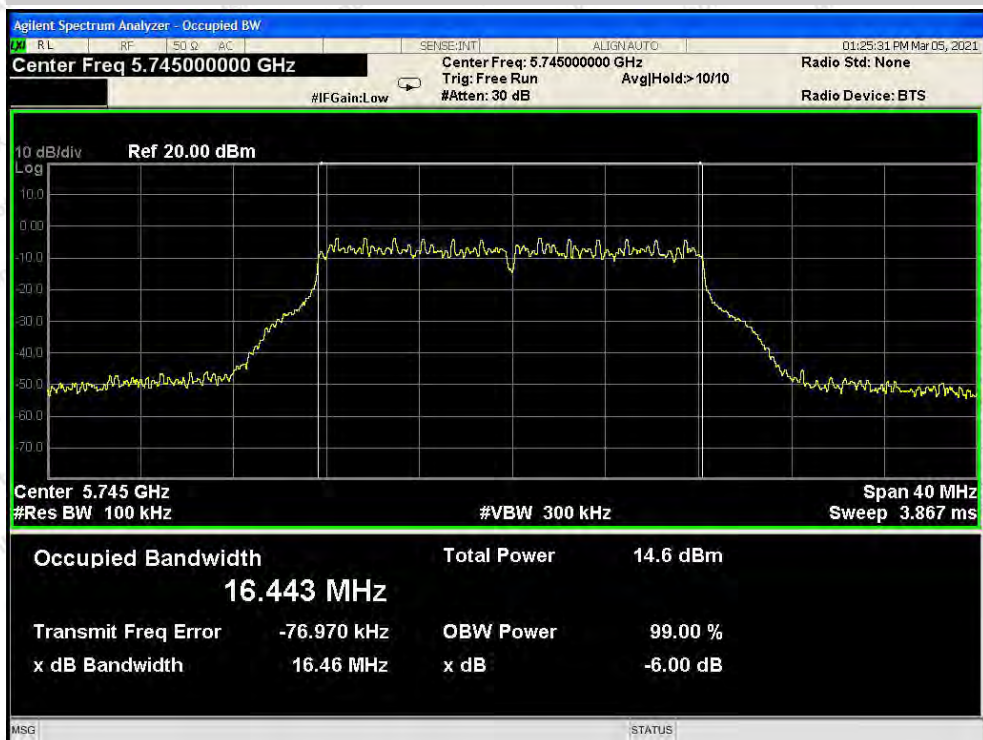


ANT A
6dB Bandwidth

Test Mode: 802.11a--Low

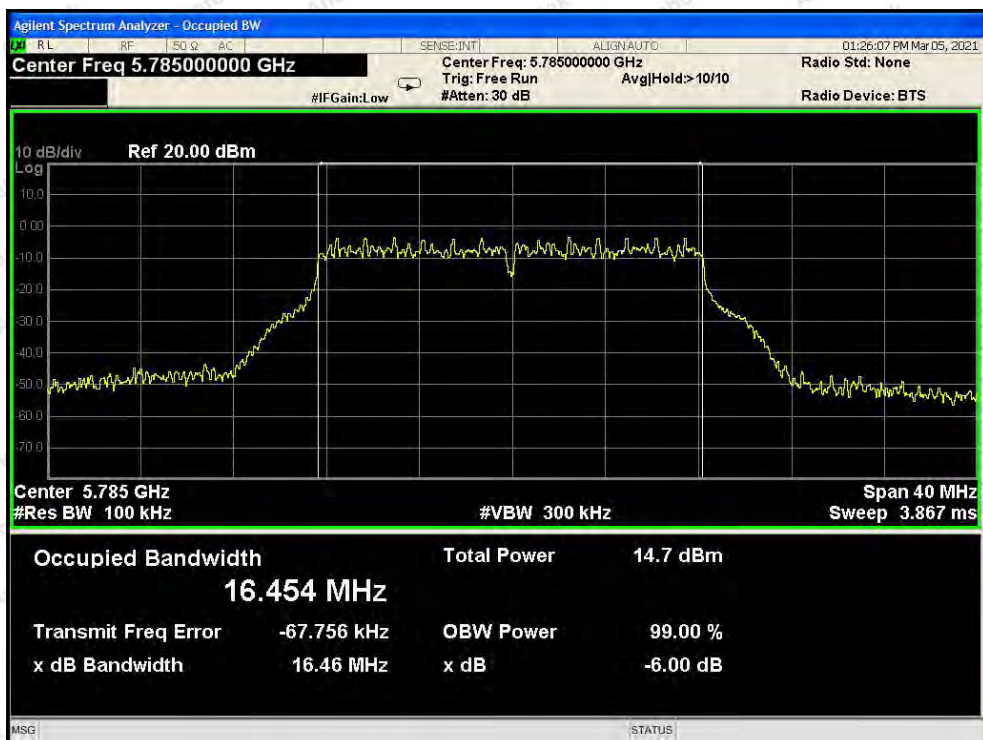

Test Mode: 802.11a---Middle

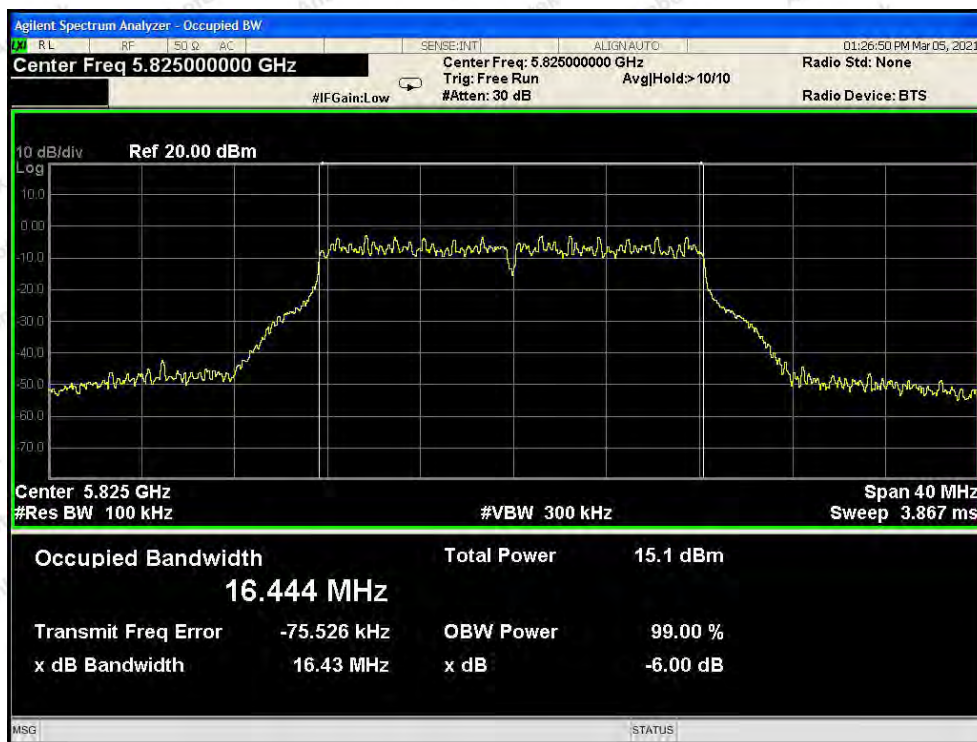


Test Mode: 802.11a---High




Test Mode: 802.11n20---Low




Test Mode: 802.11n20---Middle

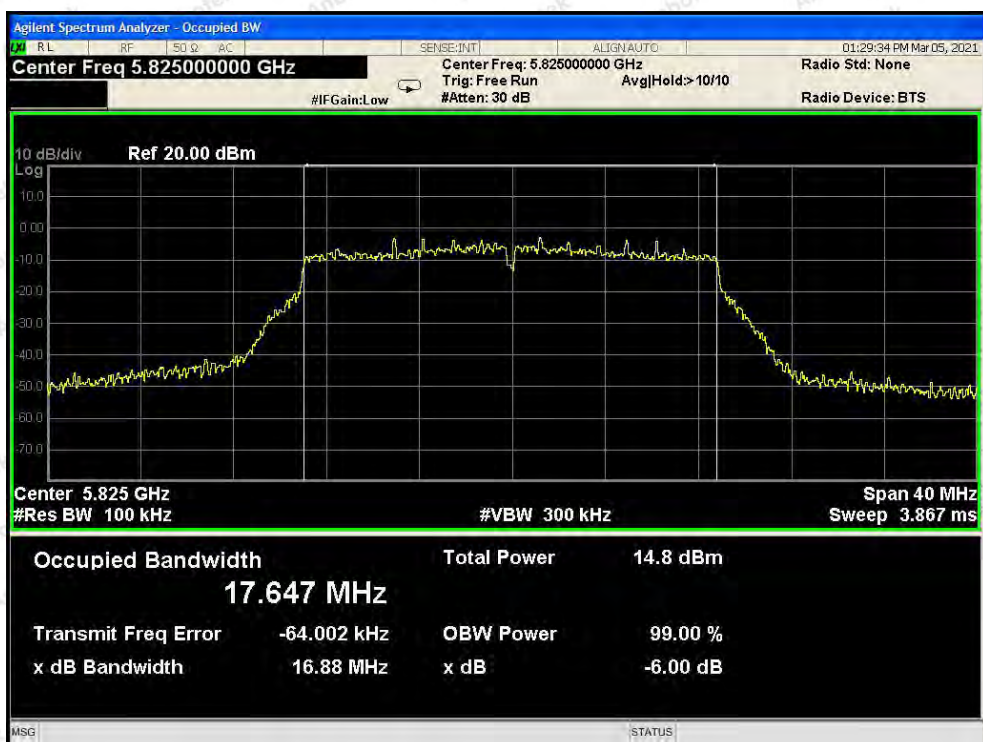


Test Mode: 802.11n20---High

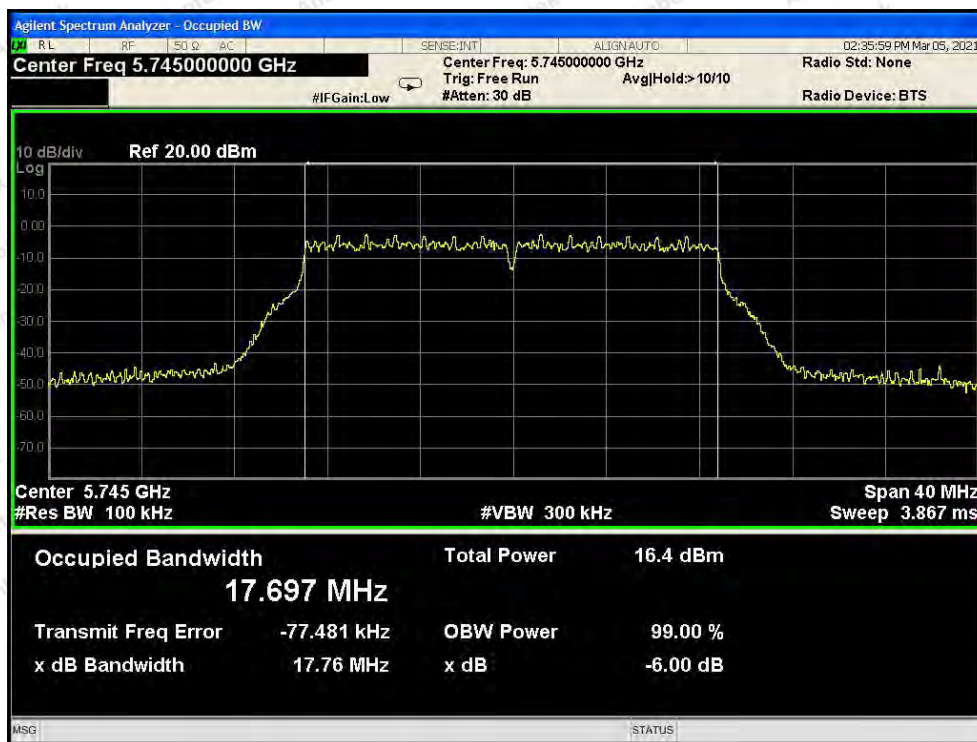


Test Mode: 802.11ac20--Low

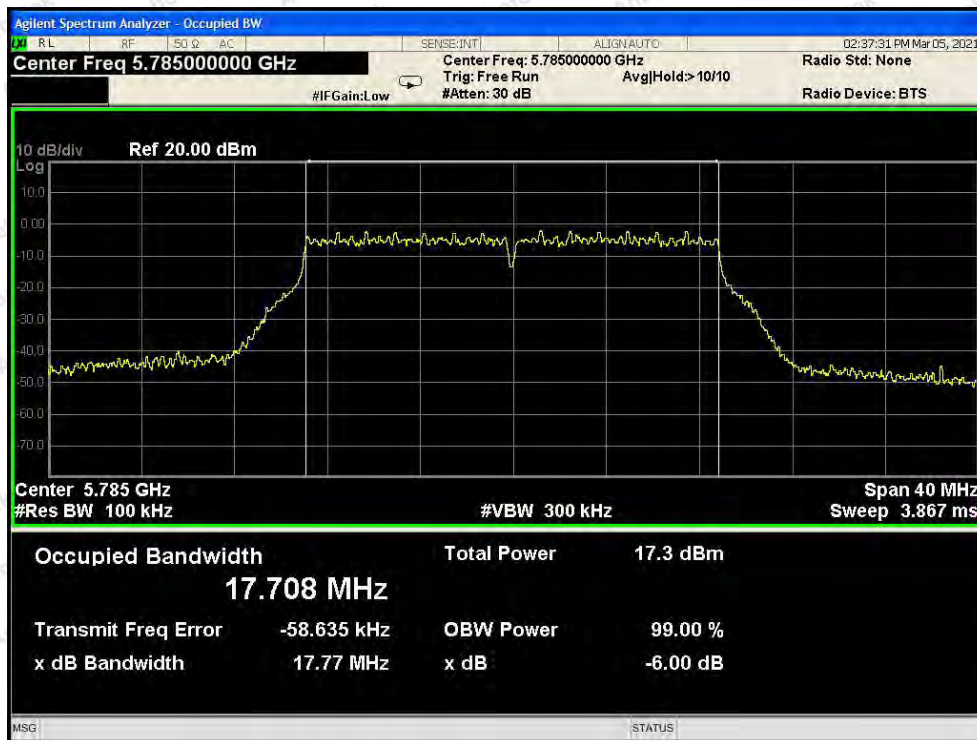


Test Mode: 802.11ac20---Middle

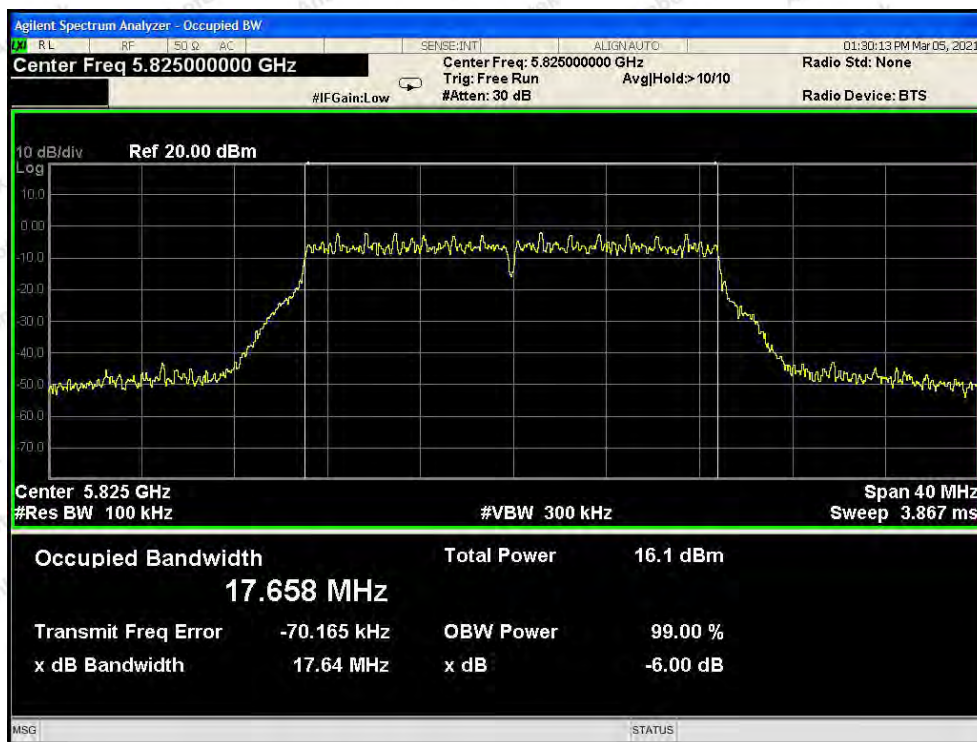


Test Mode: 802.11ac20---High

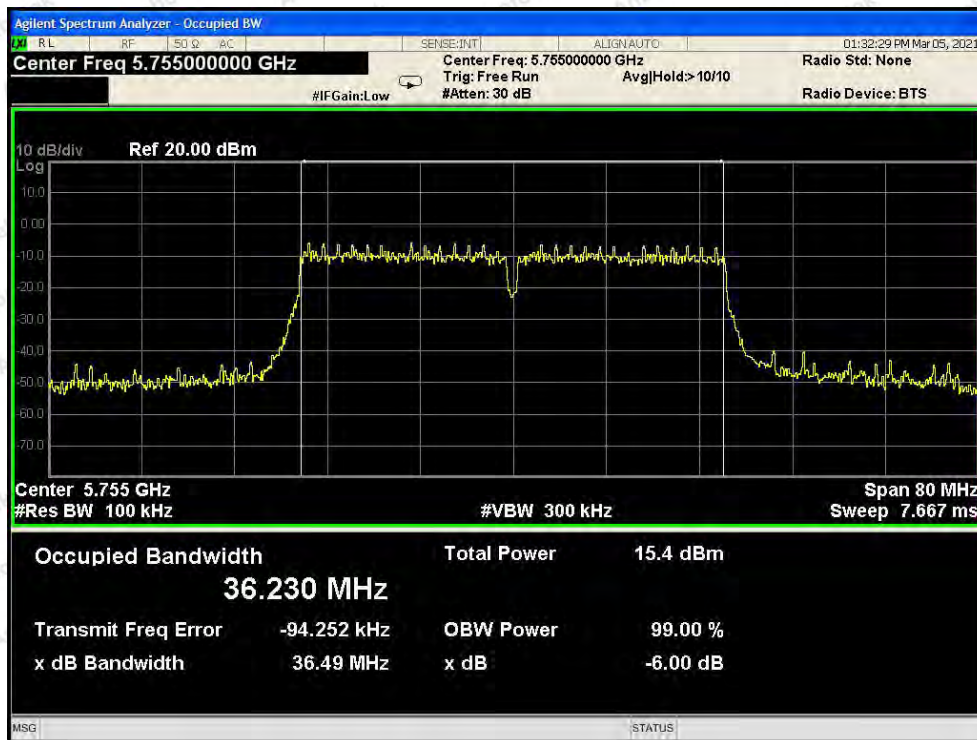


Test Mode: 802.11n40---Low

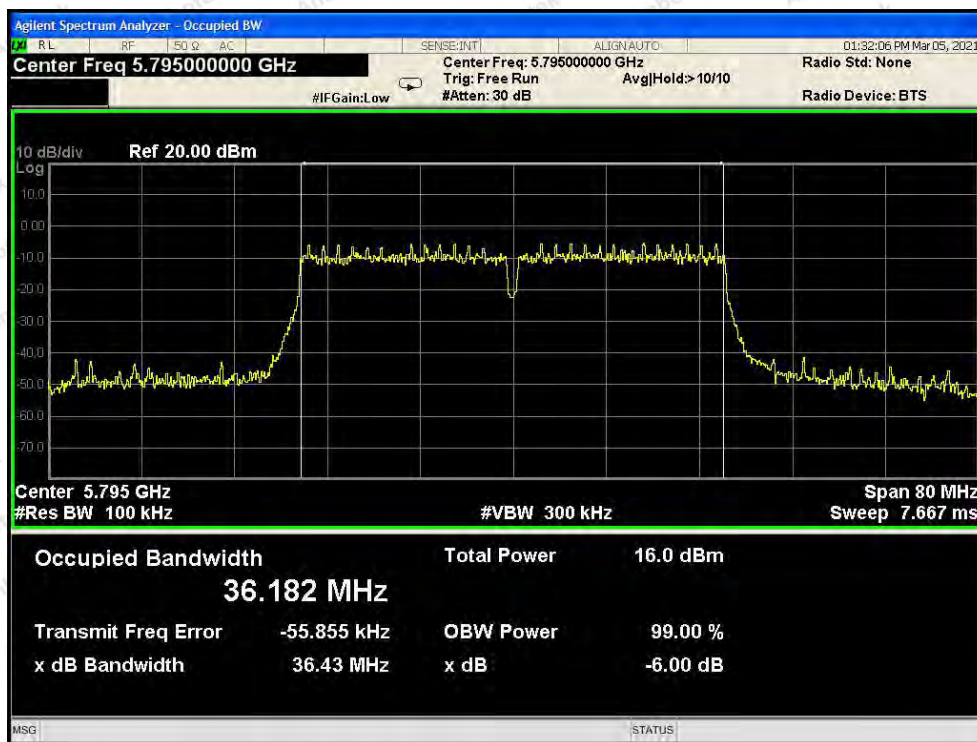


Test Mode: 802.11n40---High

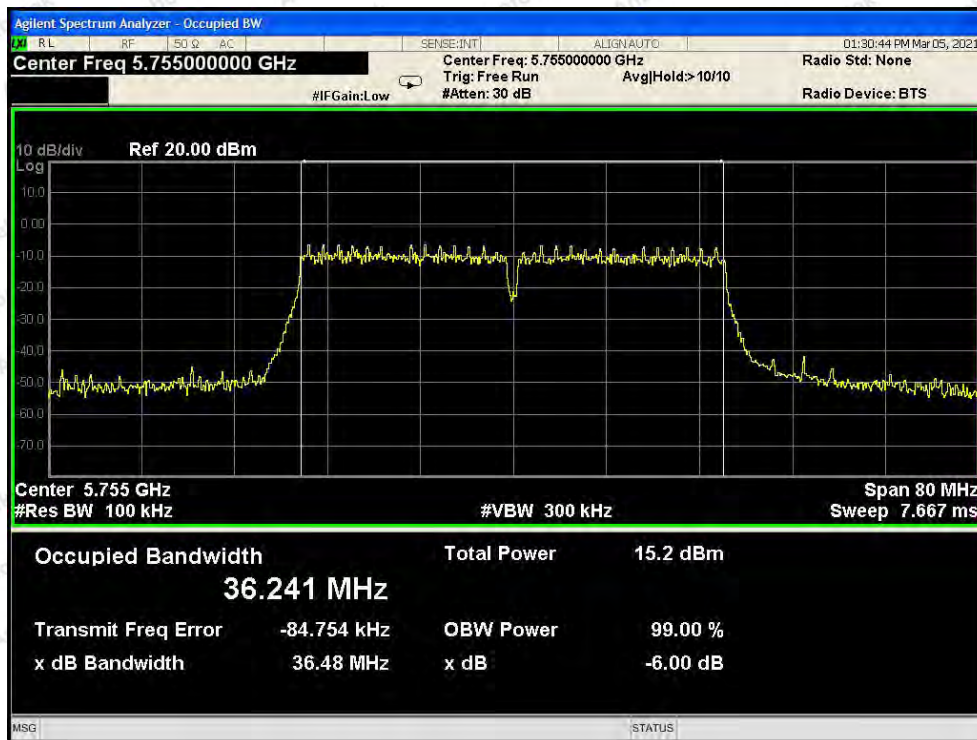

Test Mode: 802.11ac40---Low

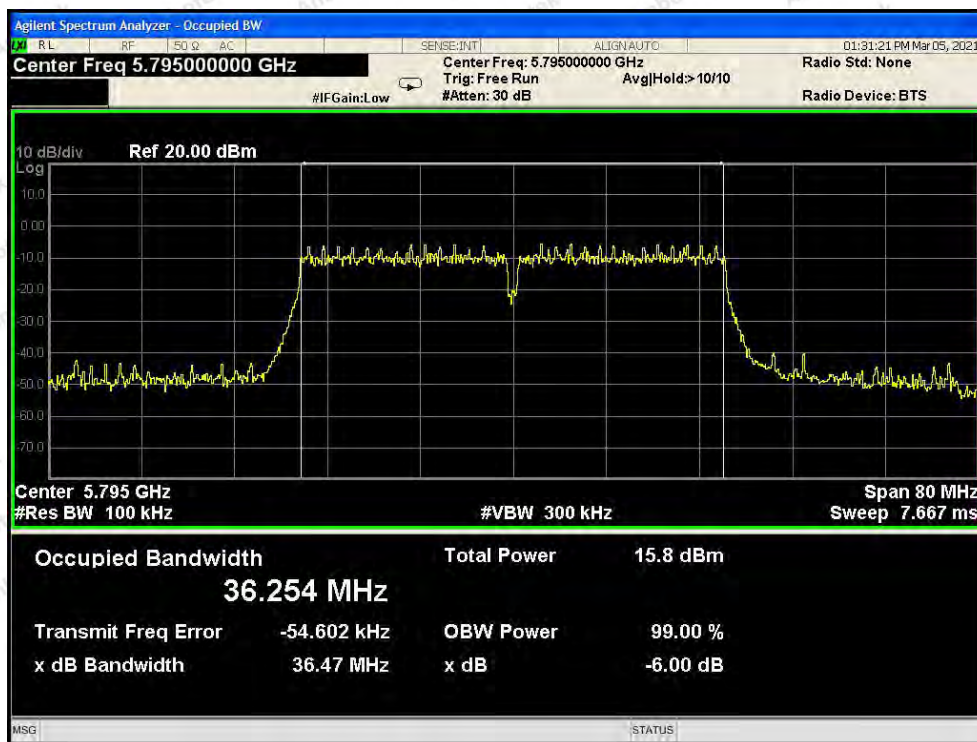


Test Mode: 802.11ac40---High

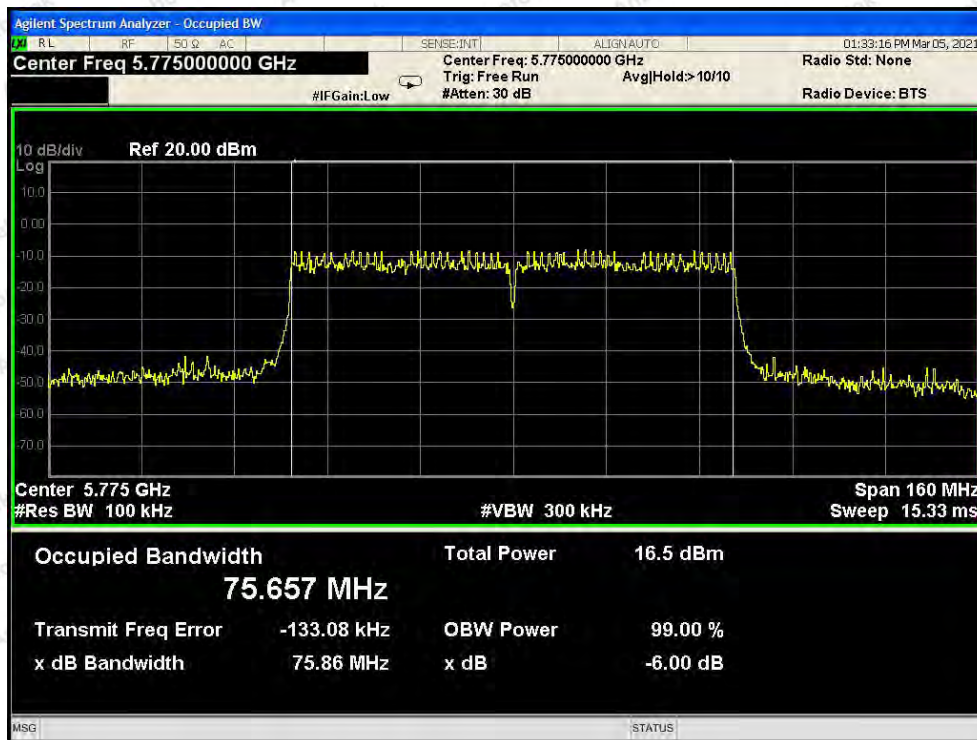

Test Mode: 802.11ac80


26dB & 99% Bandwidth

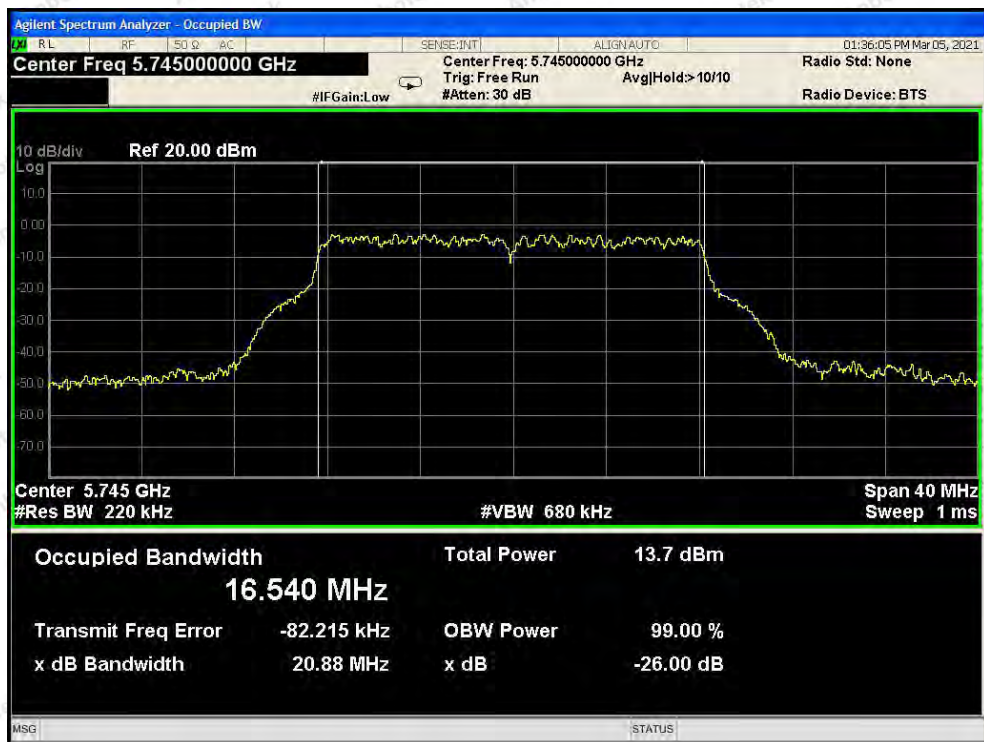


Test Mode: 802.11a--Low



Test Mode: 802.11a---Middle

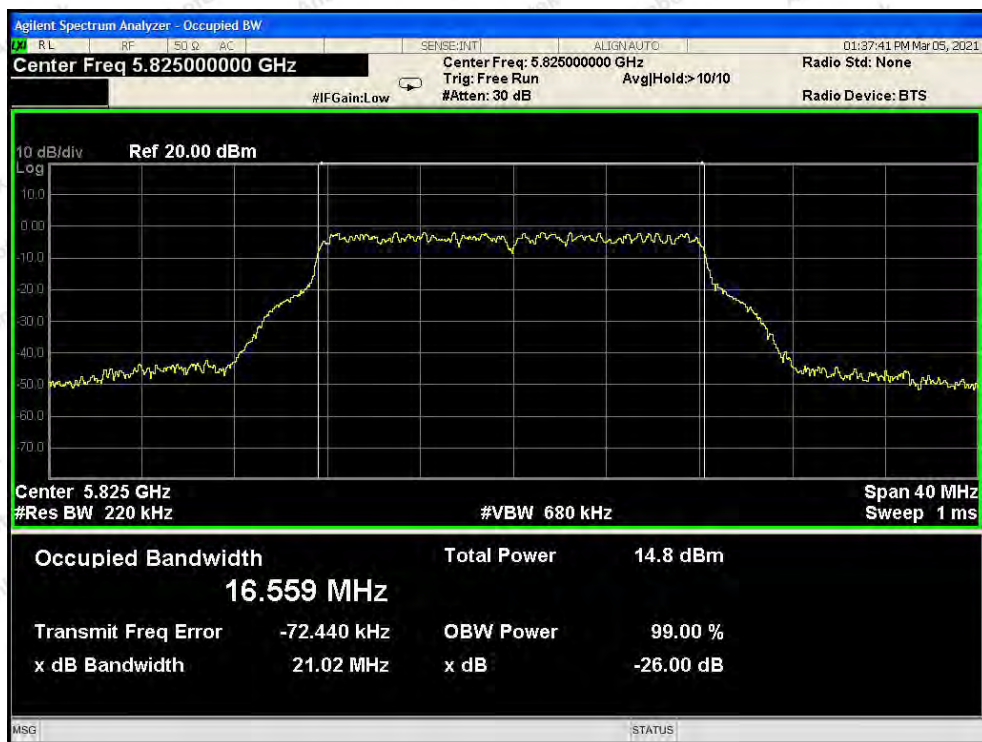


Test Mode: 802.11a---High

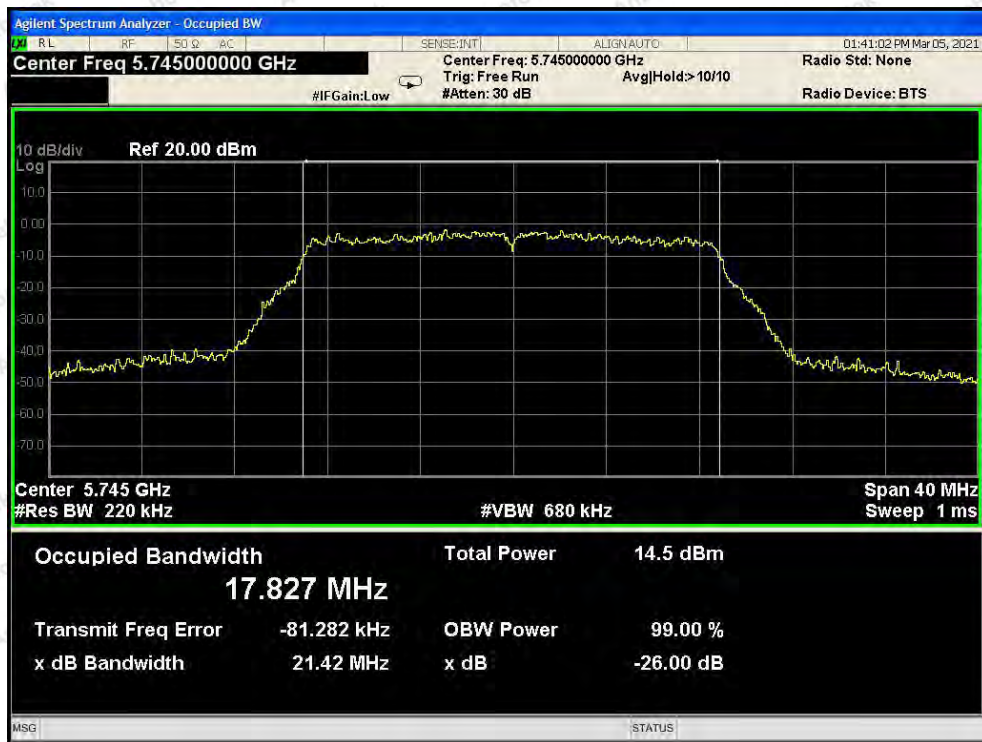


Test Mode: 802.11n20---Low




Test Mode: 802.11n20---Middle

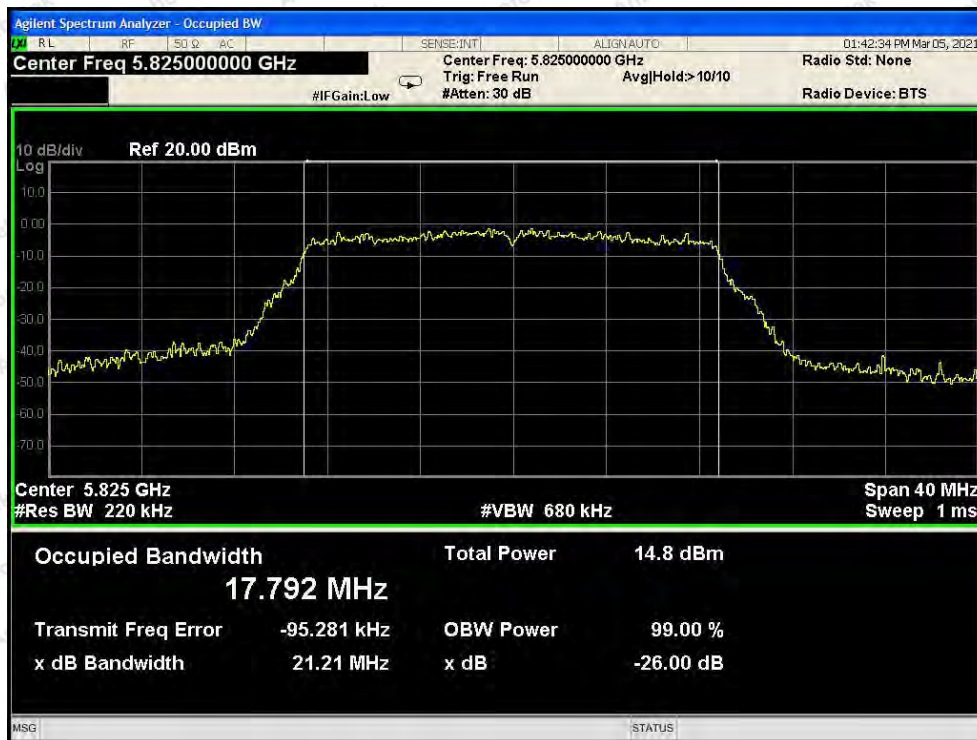


Test Mode: 802.11n20---High

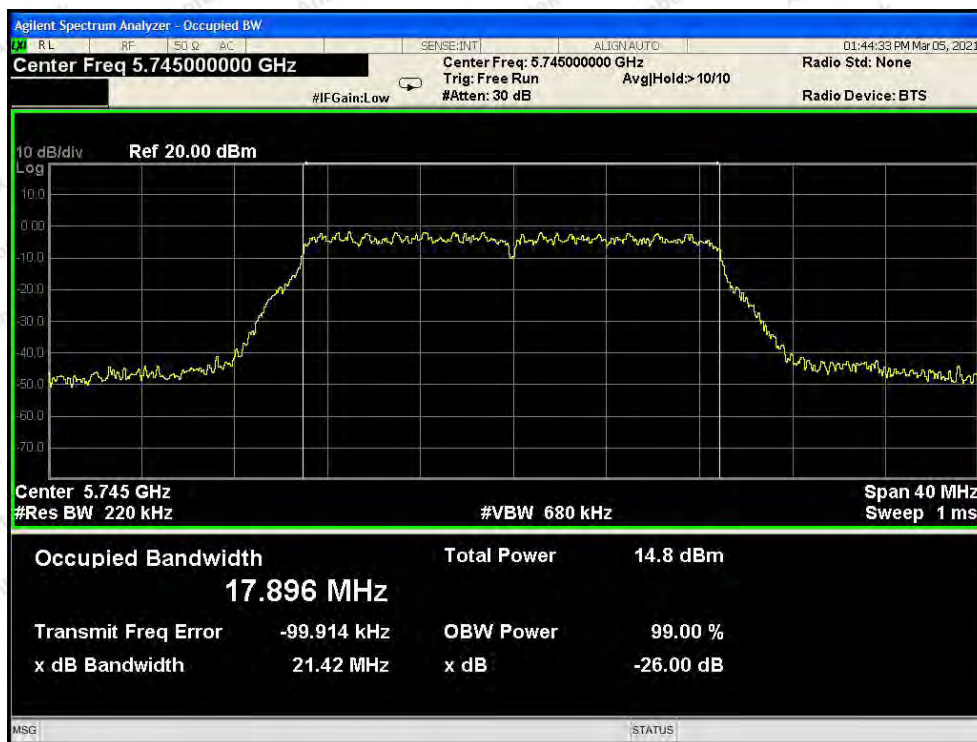

Test Mode: 802.11ac20--Low

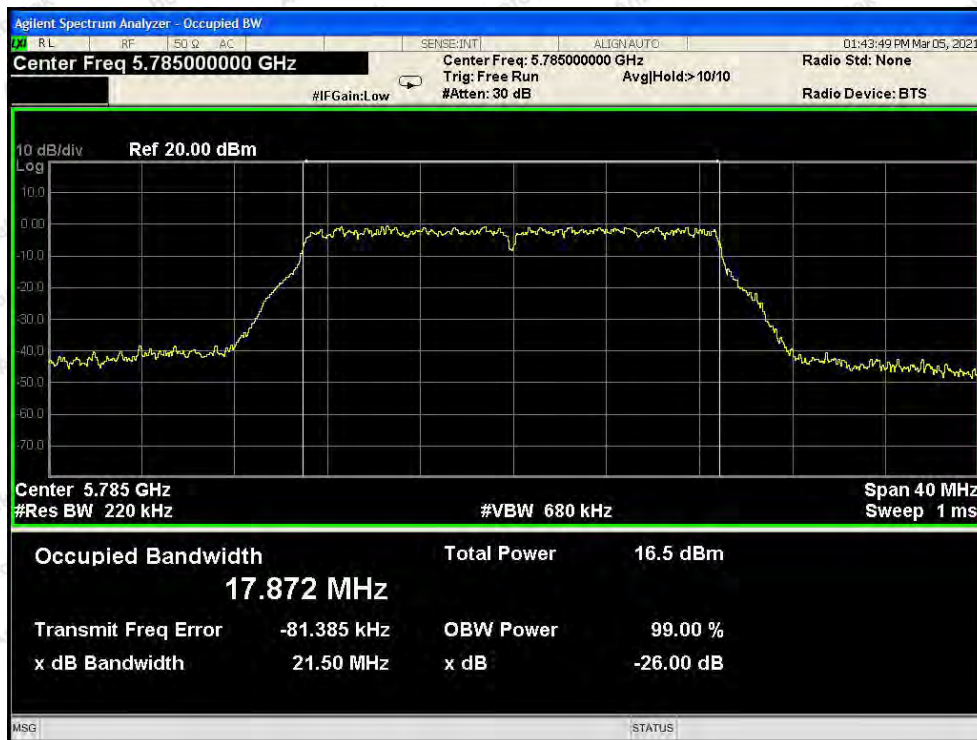


Test Mode: 802.11ac20---Middle

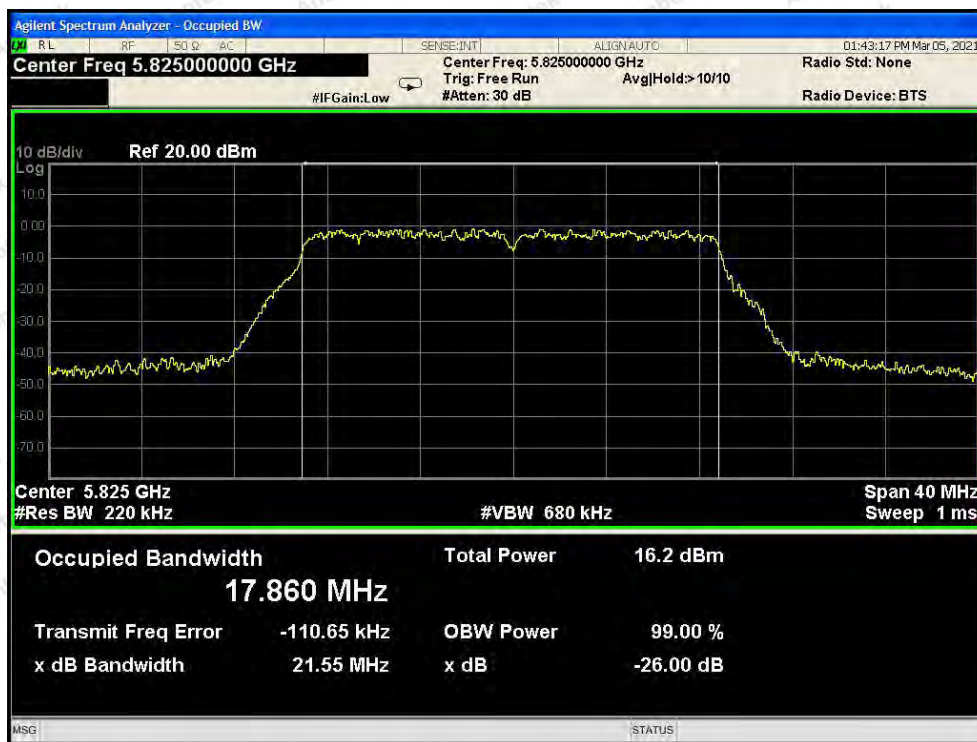

Test Mode: 802.11ac20---High




Test Mode: 802.11n40---Low

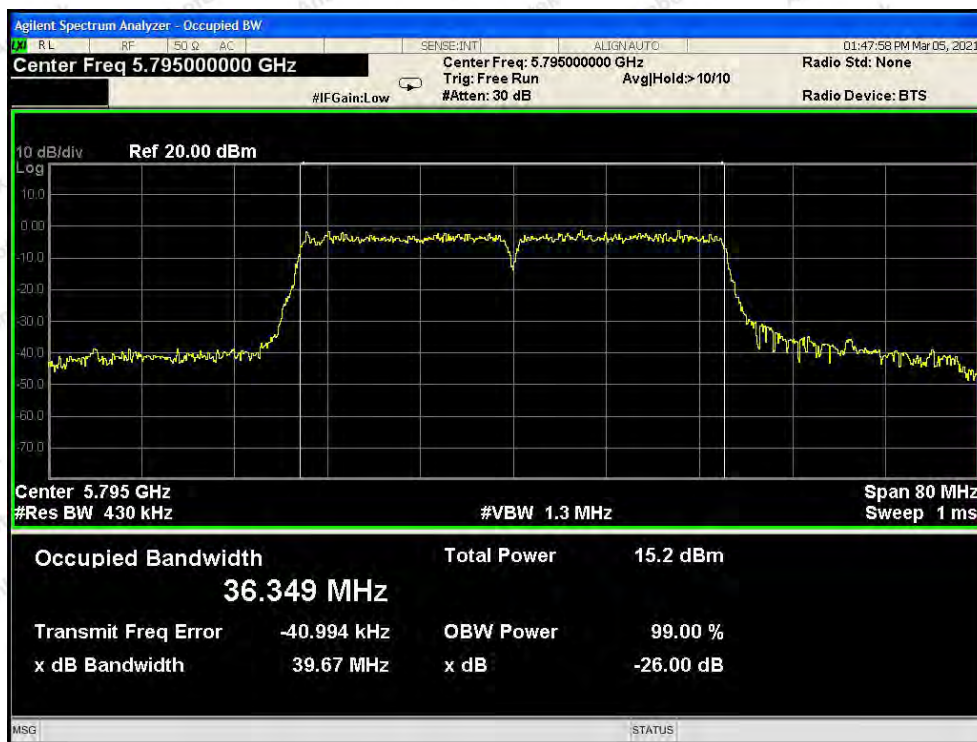

Test Mode: 802.11n40---High




Test Mode: 802.11ac40---Low

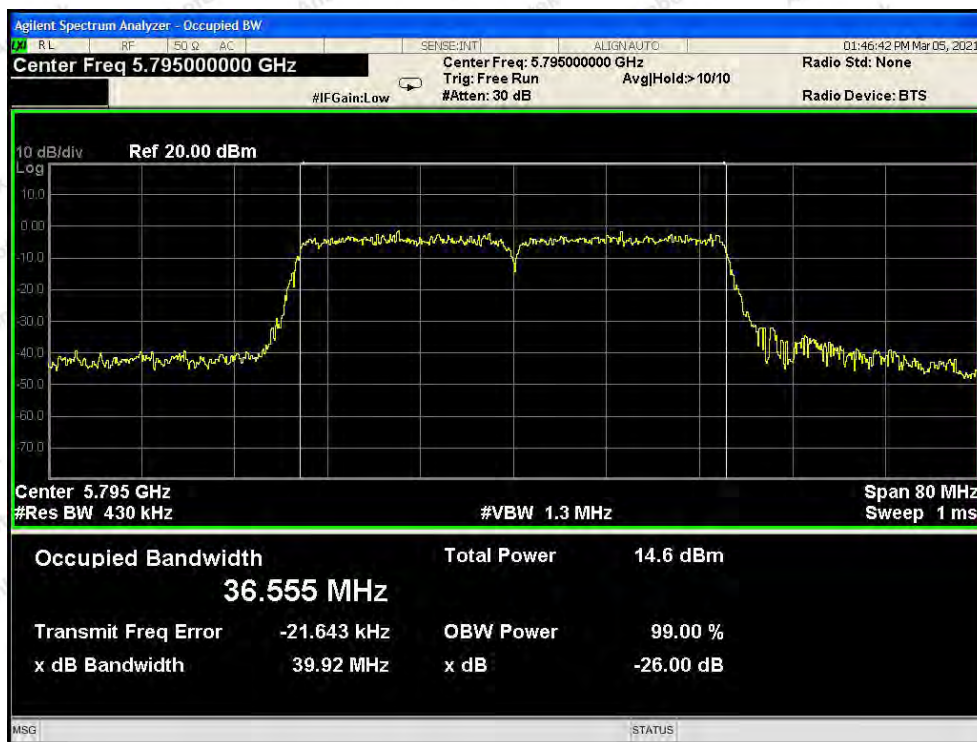


Test Mode: 802.11ac40---High



Test Mode: 802.11ac80

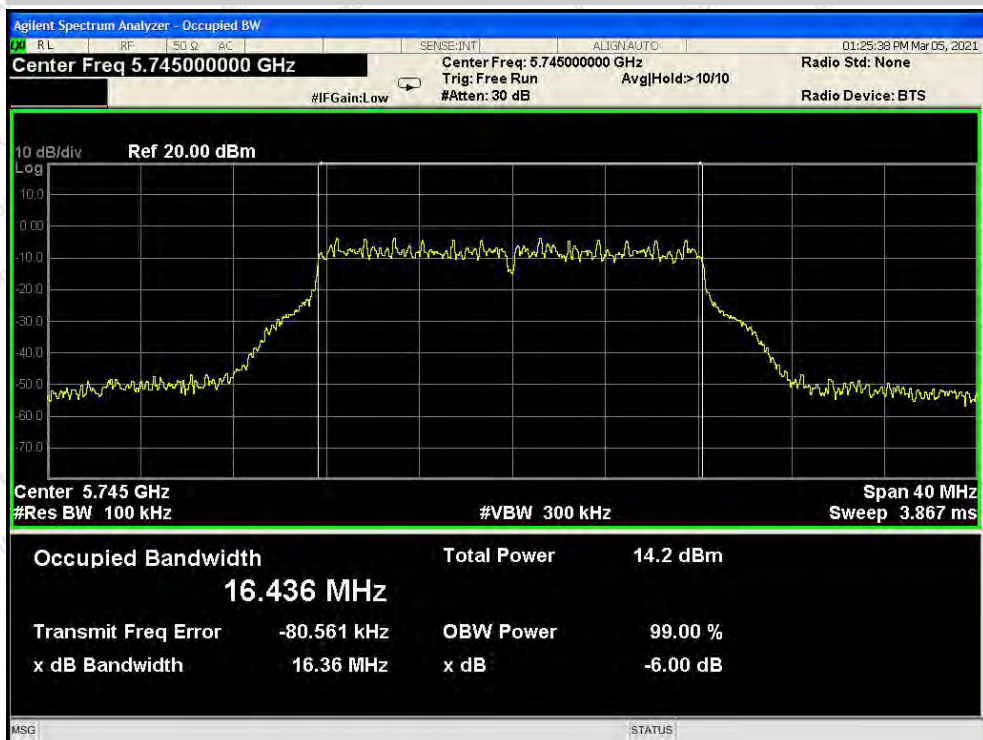
ANT B
6dB Bandwidth

Test Mode: 802.11a--Low

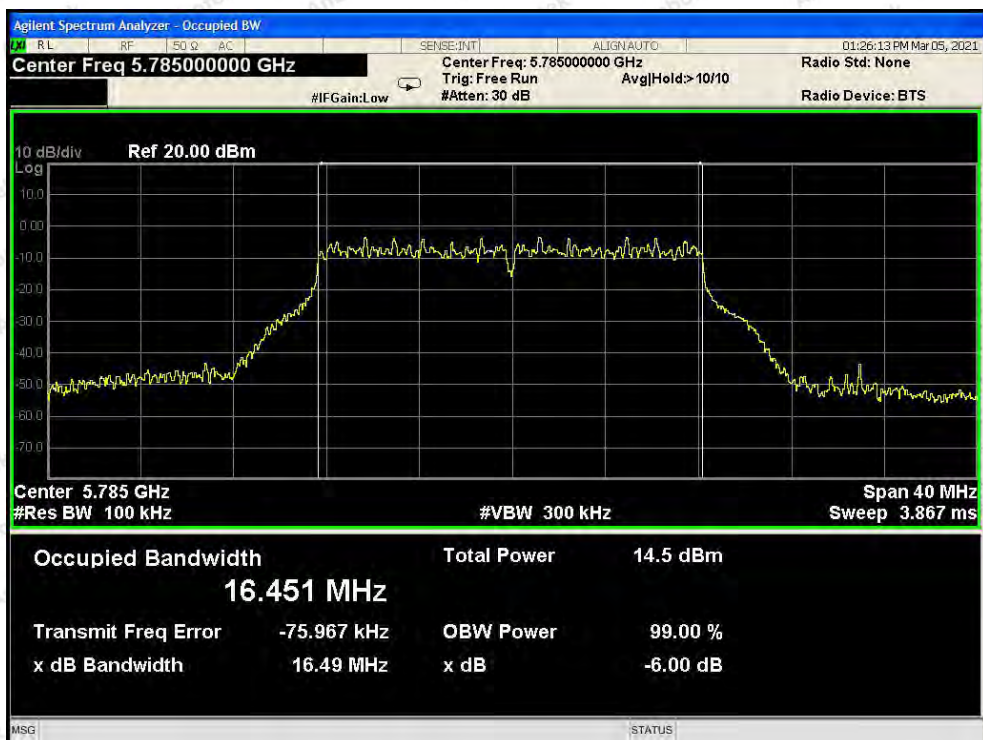

Test Mode: 802.11a---Middle



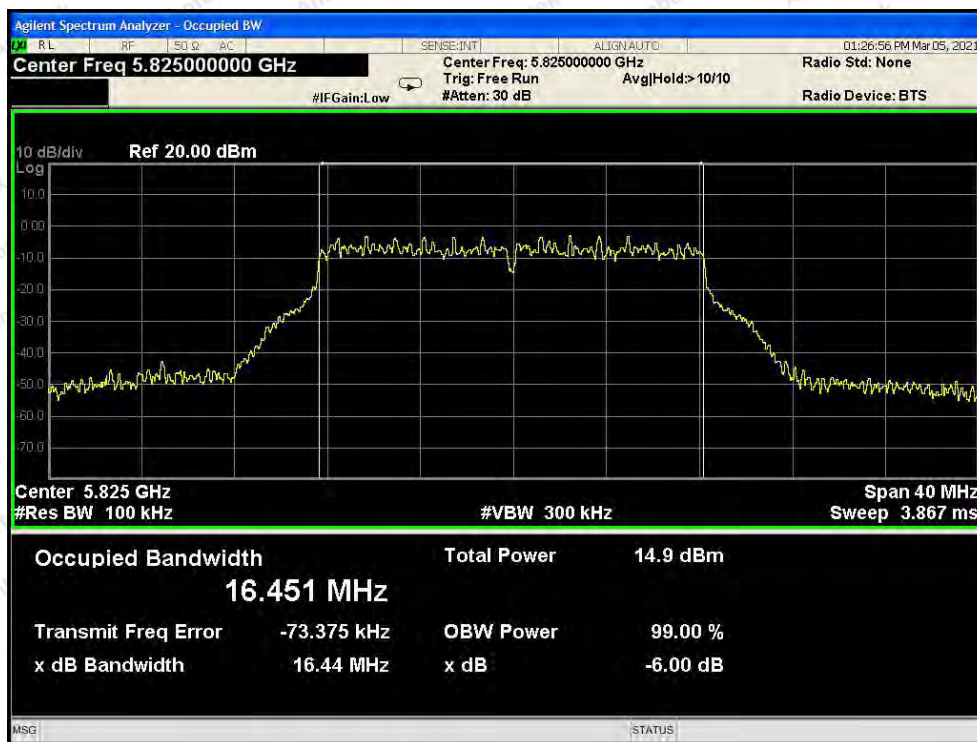

Test Mode: 802.11a---High




Test Mode: 802.11n20---Low




Test Mode: 802.11n20---Middle




Test Mode: 802.11n20---High

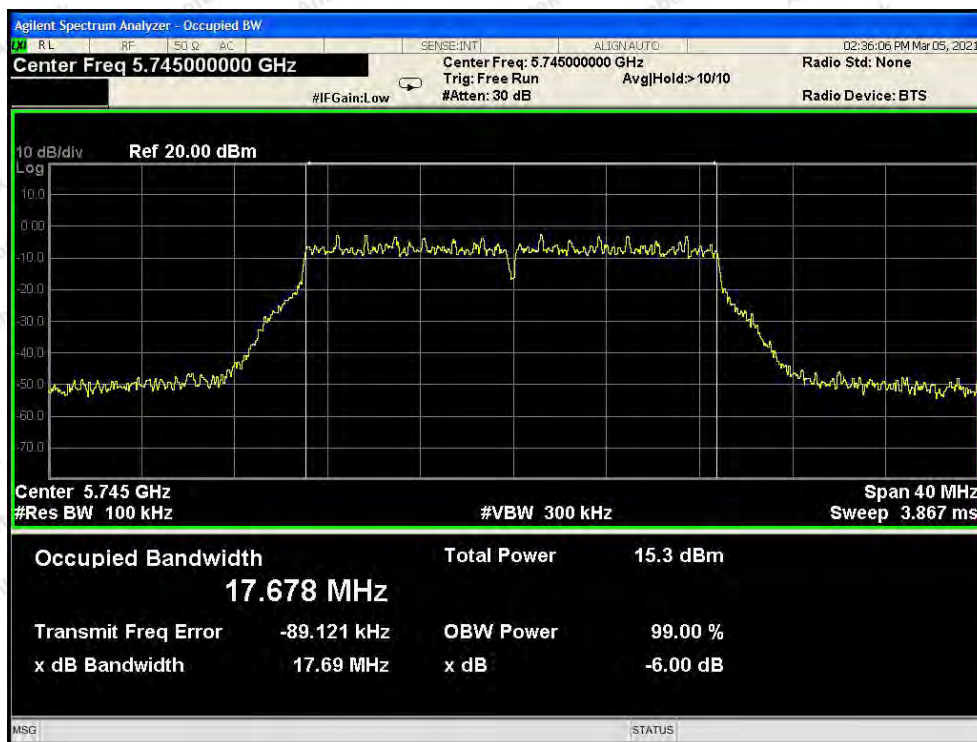


Test Mode: 802.11ac20--Low

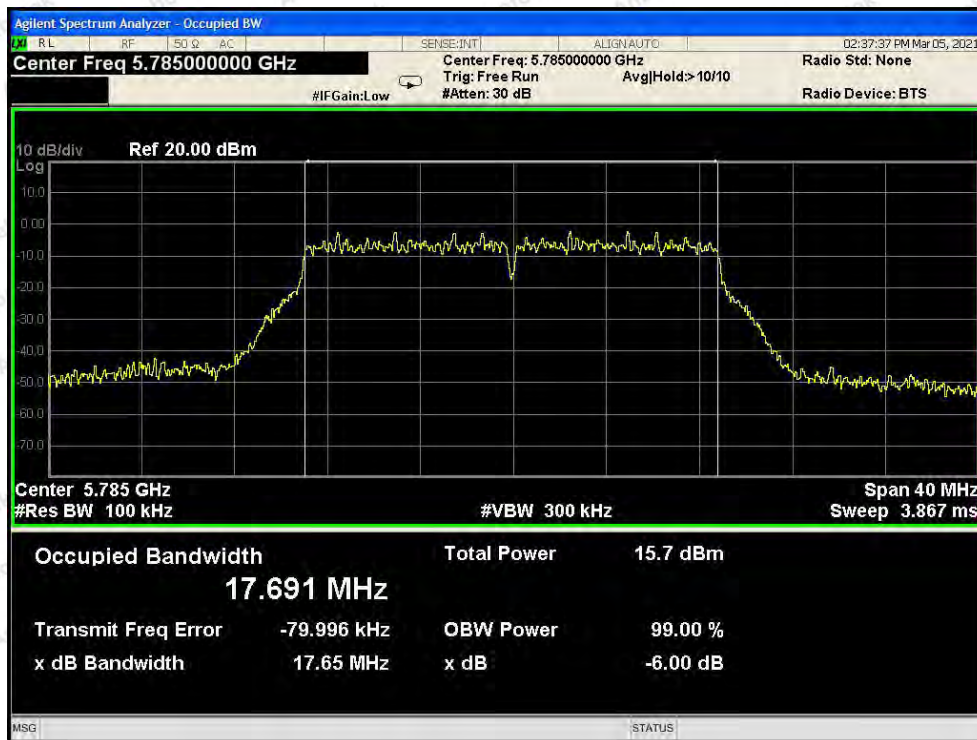


Test Mode: 802.11ac20---Middle

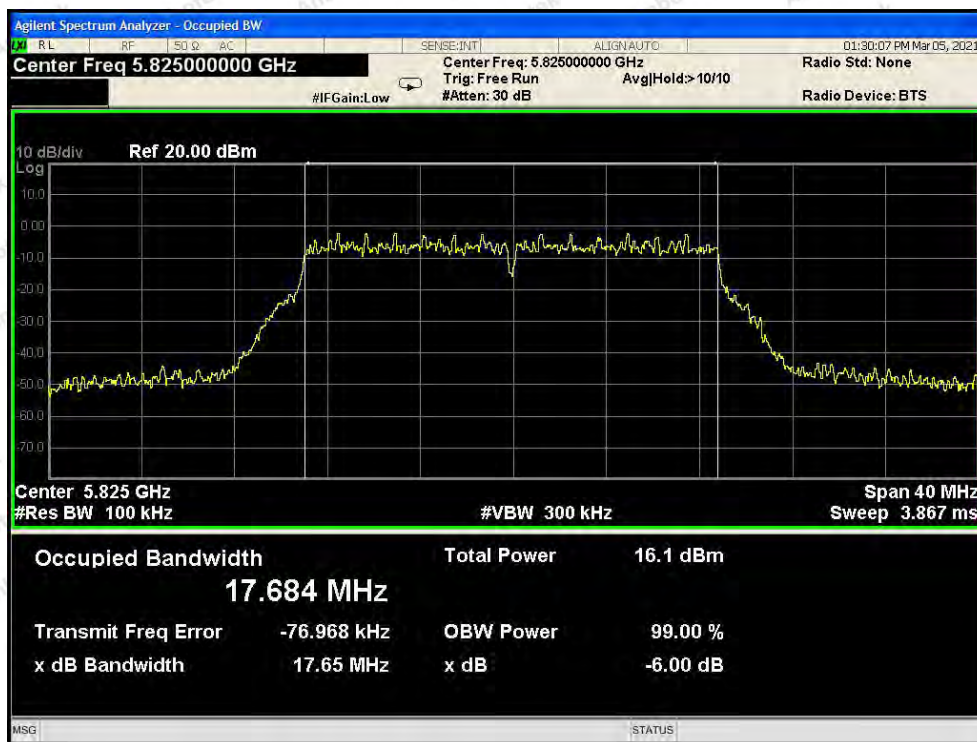


Test Mode: 802.11ac20---High

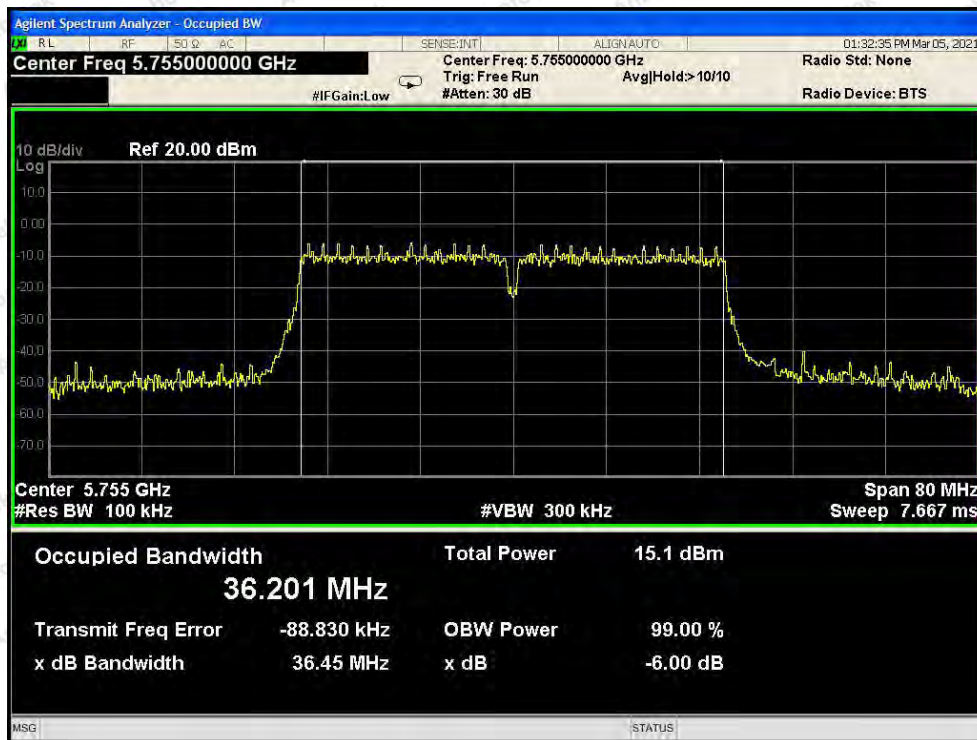


Test Mode: 802.11n40---Low

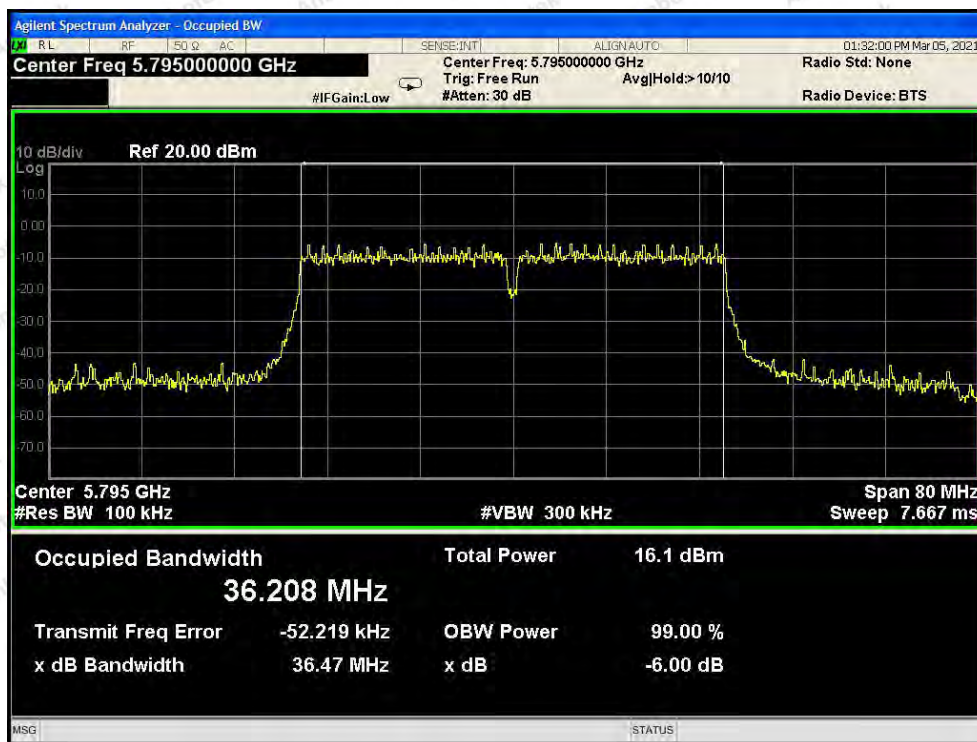


Test Mode: 802.11n40---High

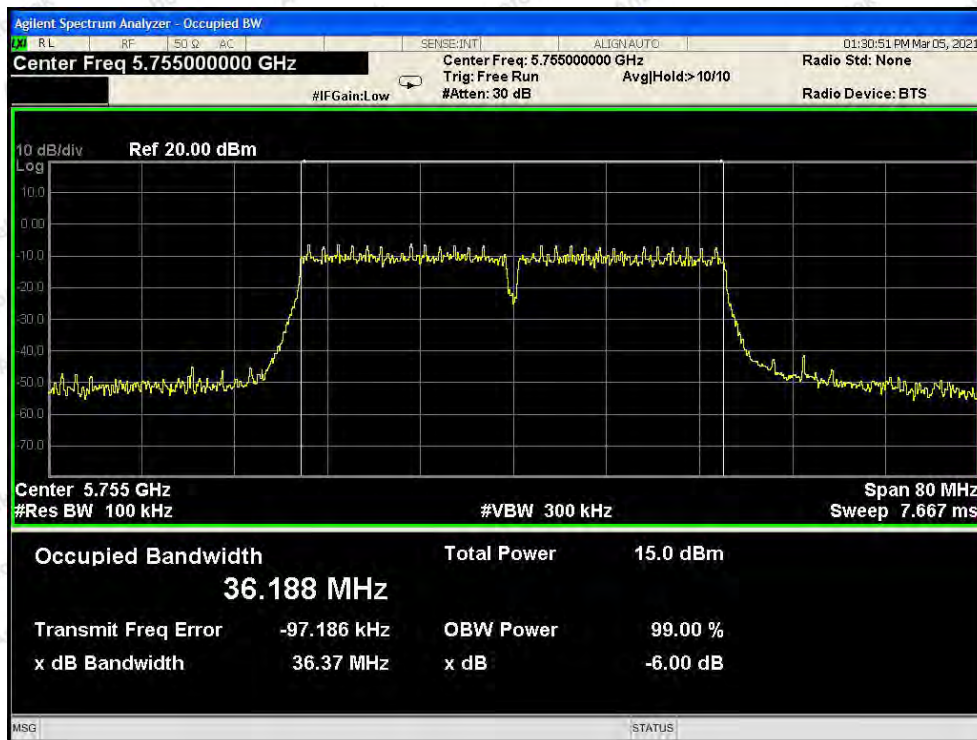


Test Mode: 802.11ac40---Low

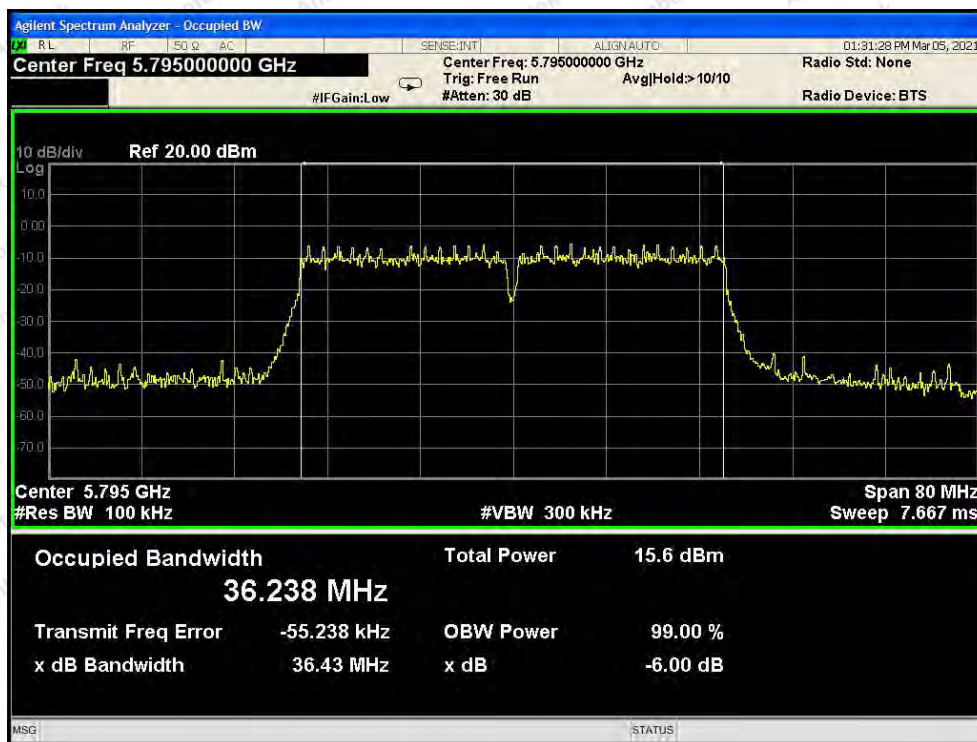


Test Mode: 802.11ac40---High

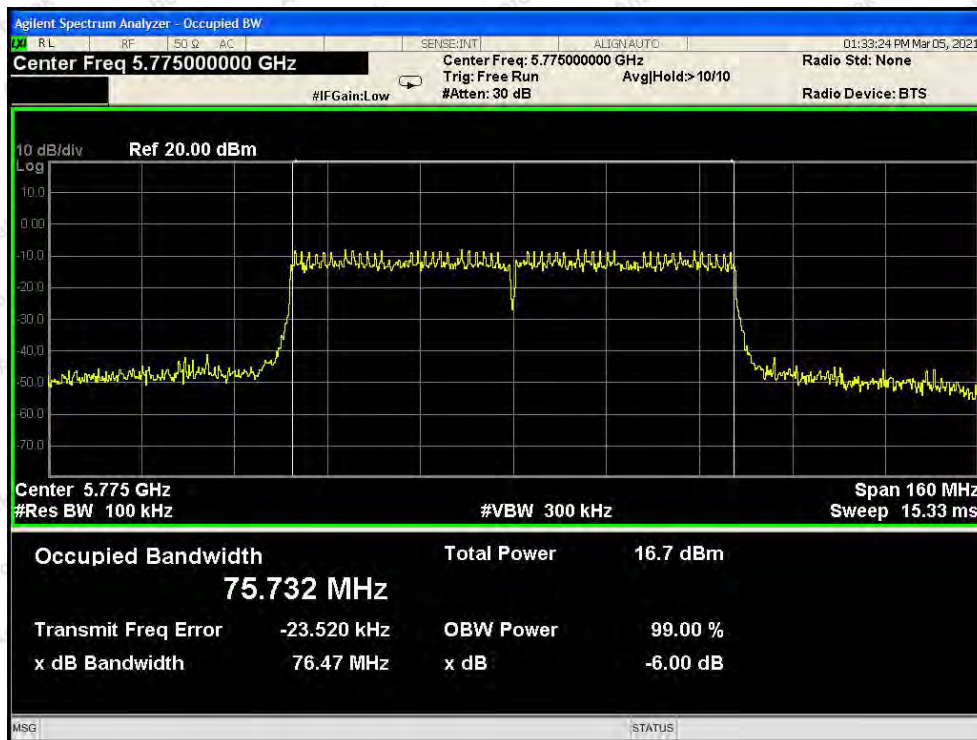


Test Mode: 802.11ac80

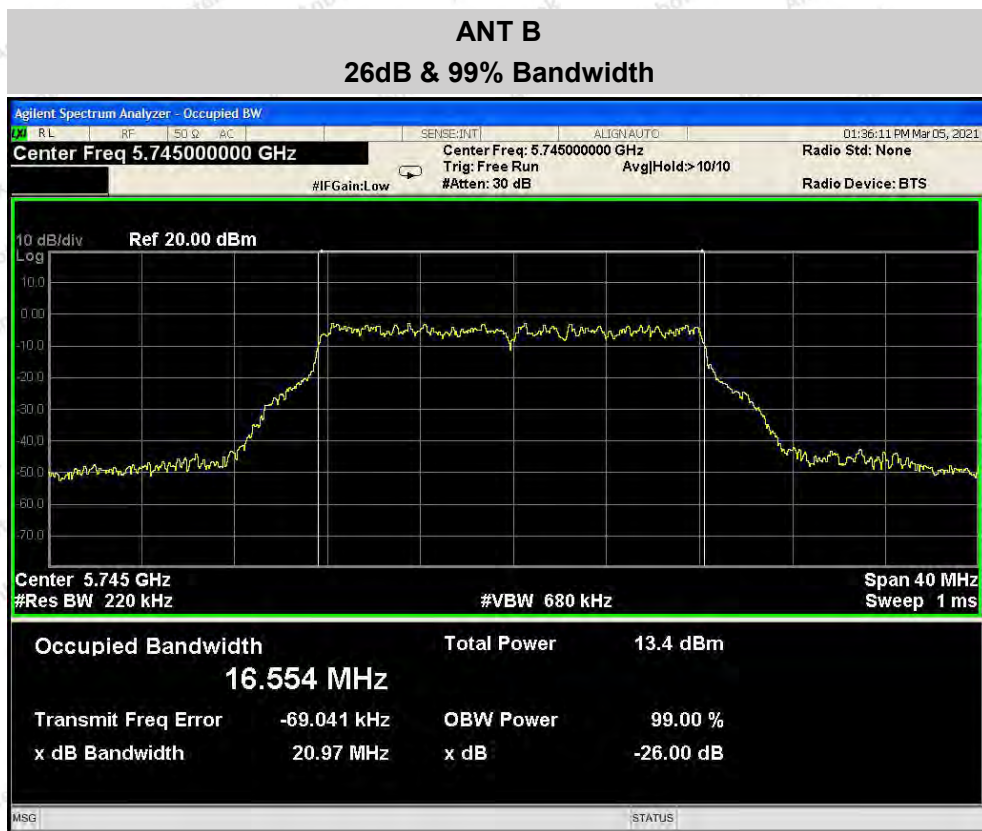


Test Mode: 802.11a--Low

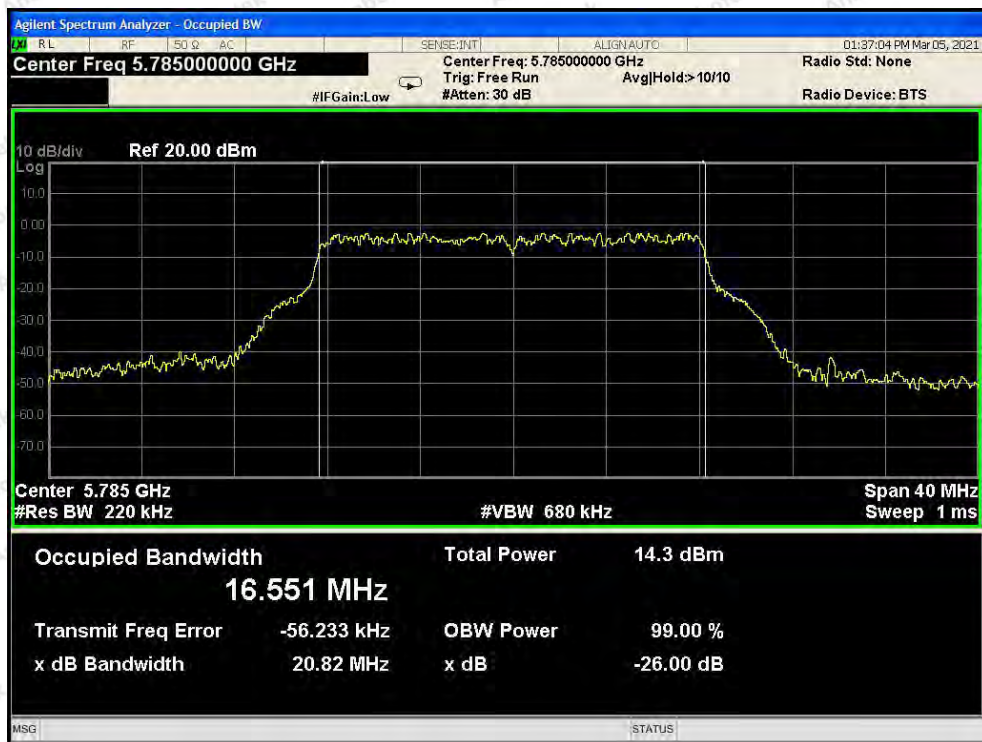


Test Mode: 802.11a---Middle

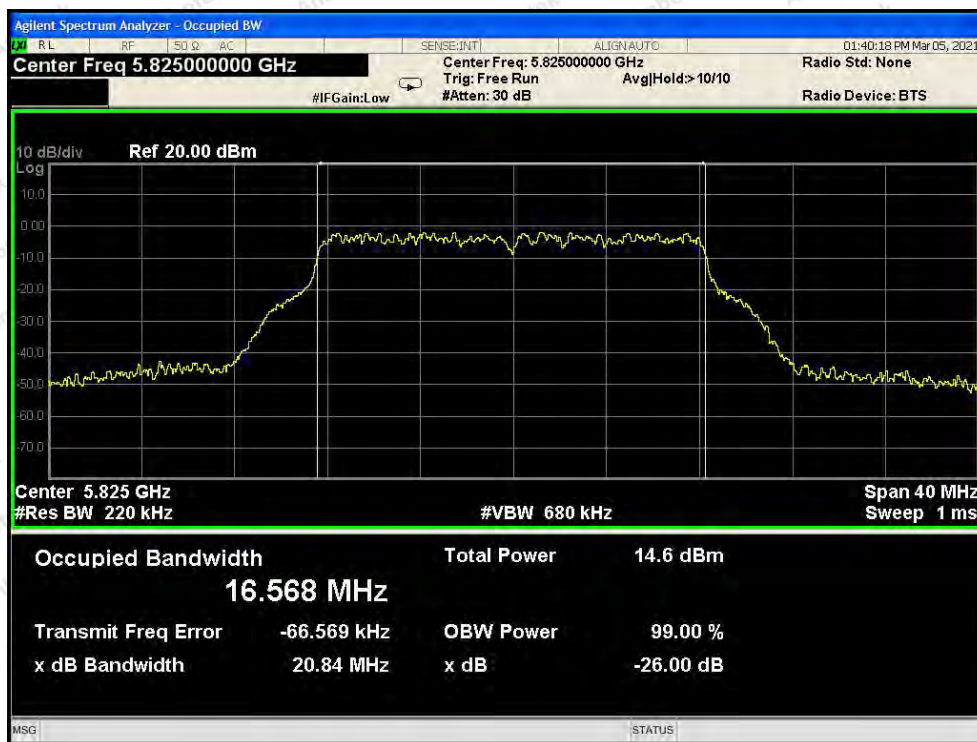

Test Mode: 802.11a---High

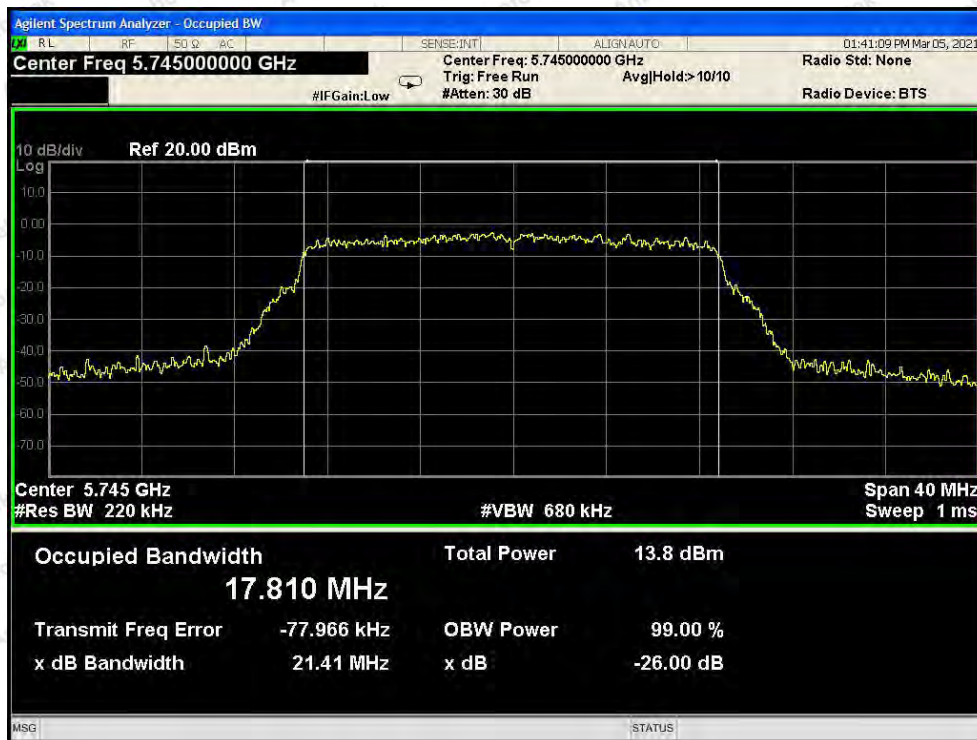


Test Mode: 802.11n20---Low

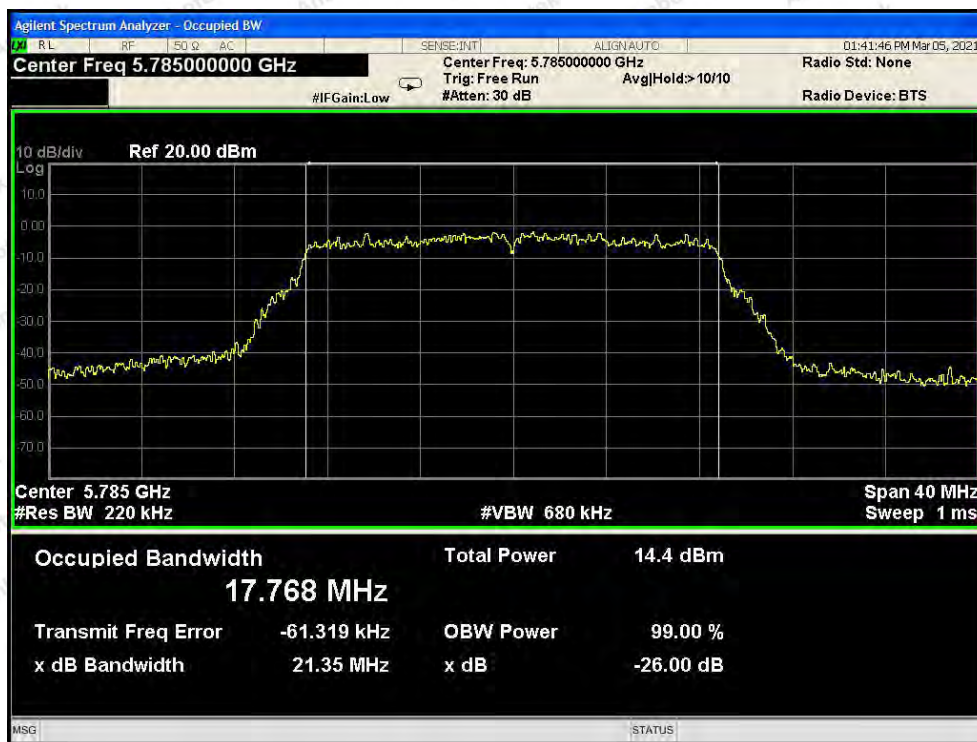


Test Mode: 802.11n20---Middle




Test Mode: 802.11n20---High

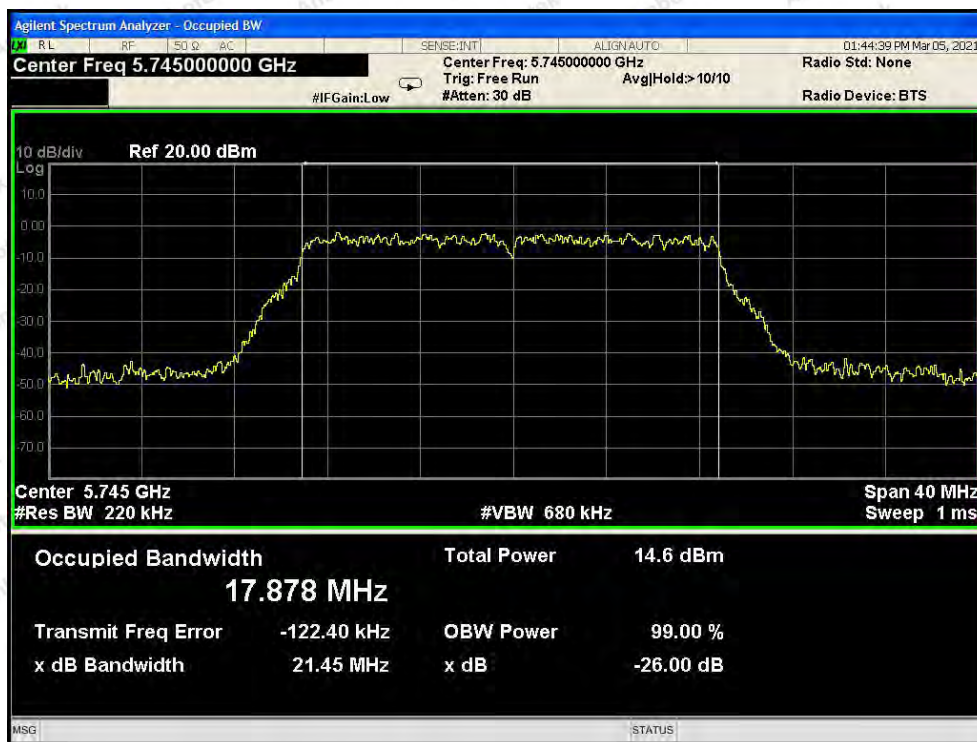


Test Mode: 802.11ac20--Low

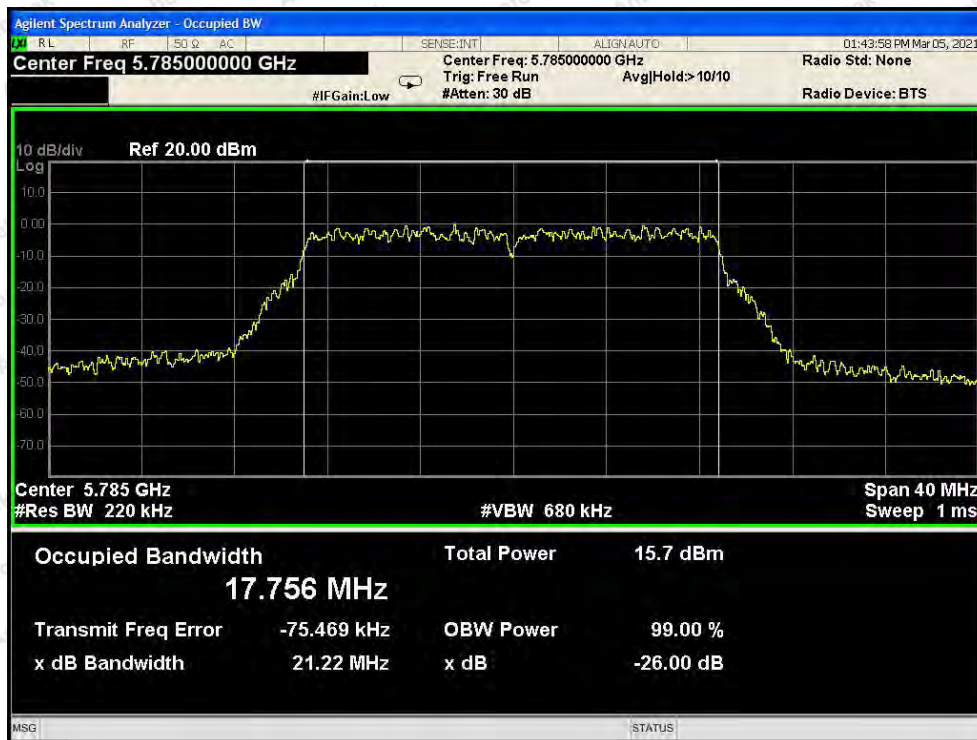


Test Mode: 802.11ac20---Middle

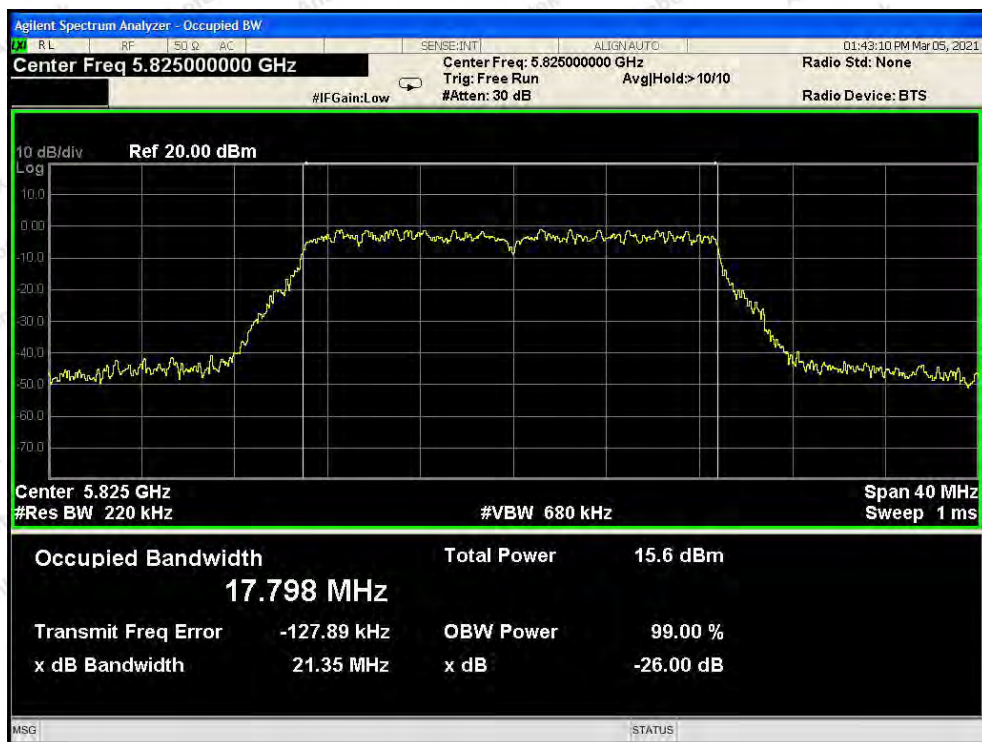

Test Mode: 802.11ac20---High

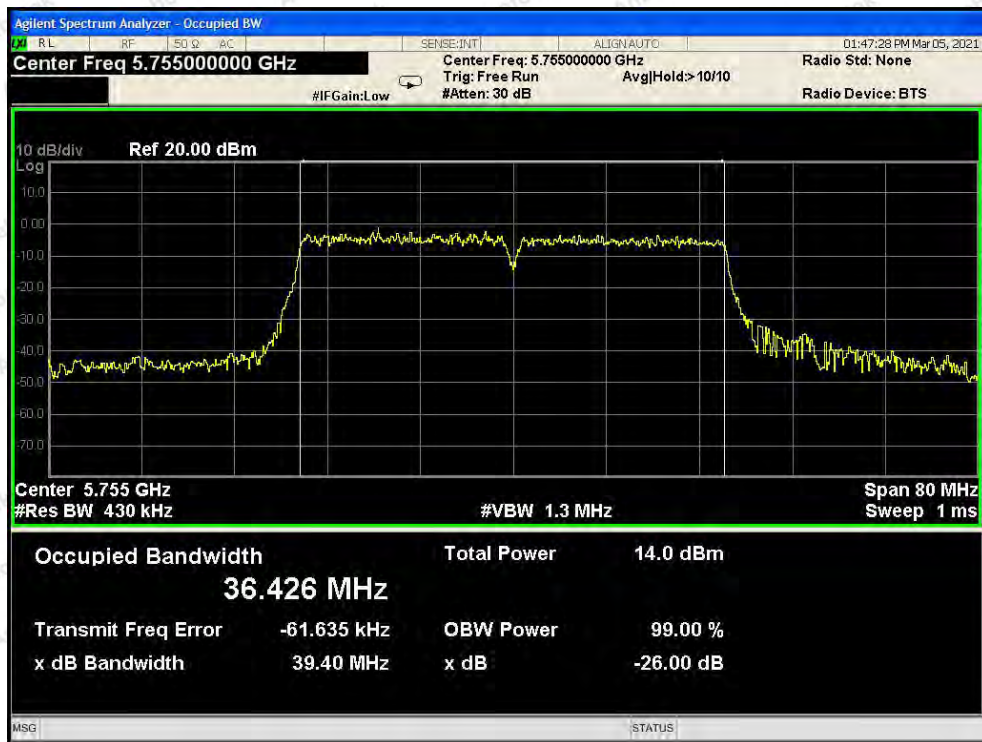


Test Mode: 802.11n40---Low

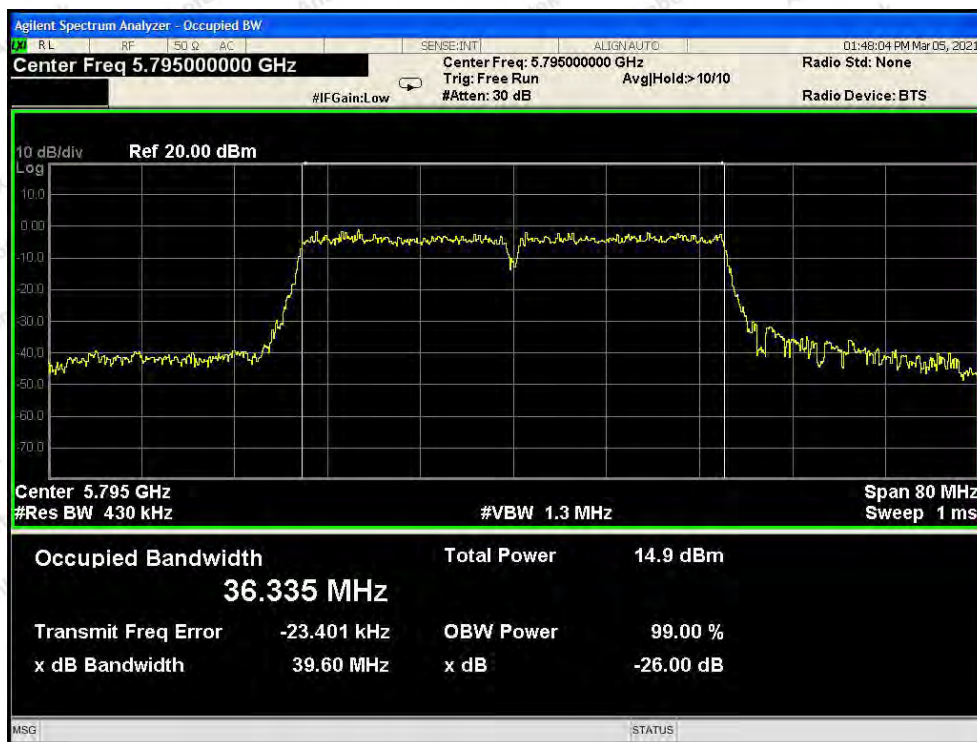


Test Mode: 802.11n40---High



Test Mode: 802.11ac40---Low

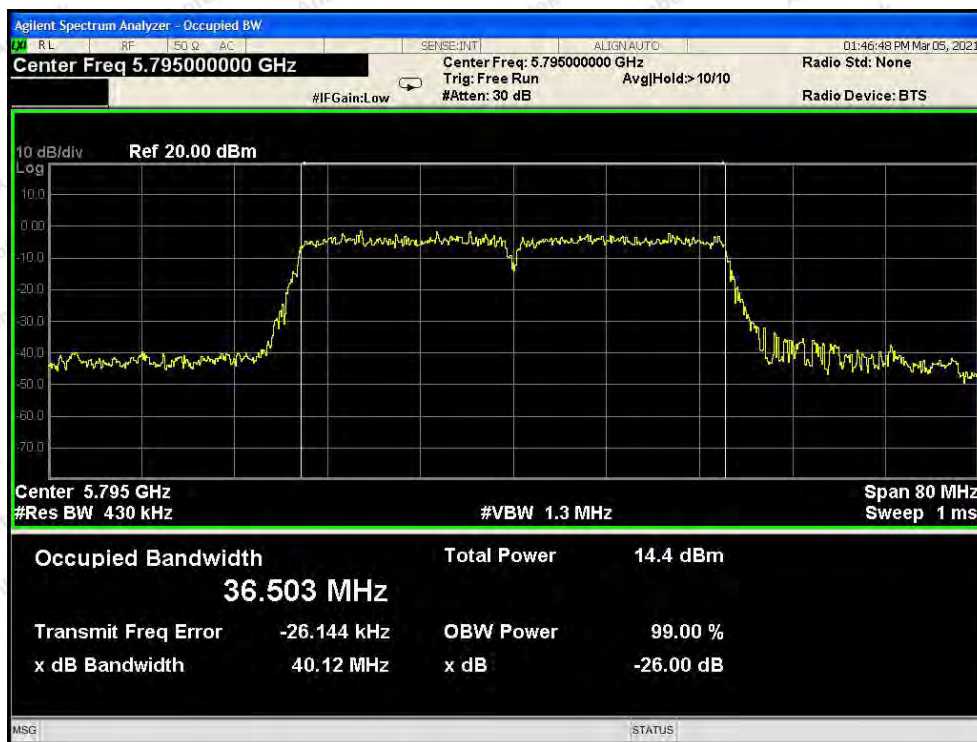

Test Mode: 802.11ac40---High

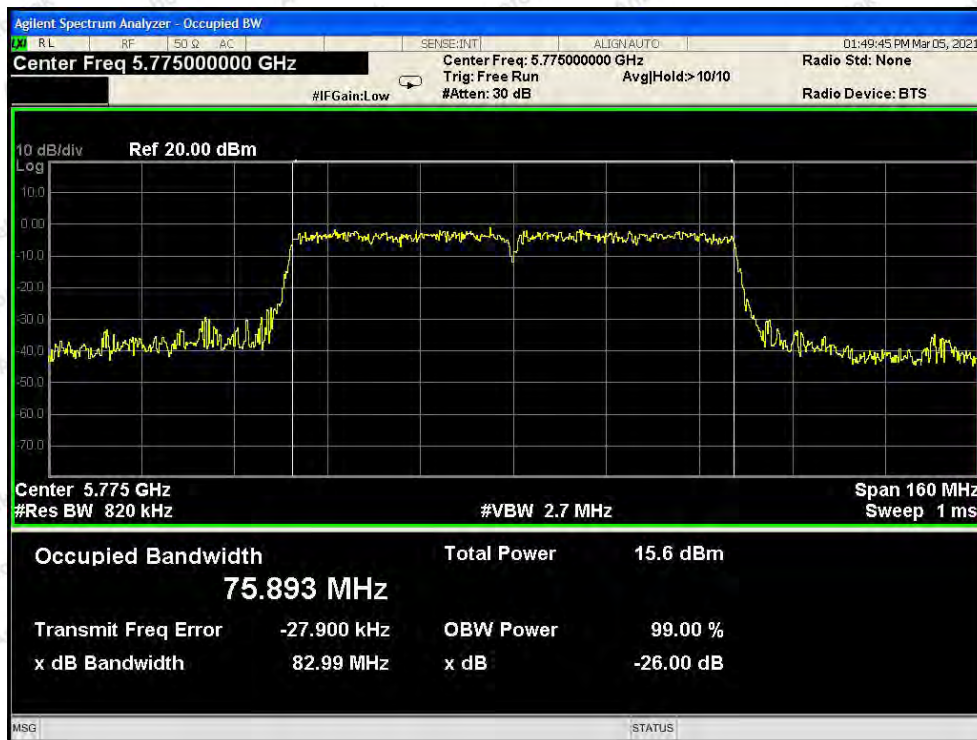


Test Mode: 802.11ac80

7. Power Spectral Density Test

7.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.407 (a) (3)
Test Limit	30 dBm/500KHz

7.2. Test Setup



7.3. Test Procedure

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz).

1. The EUT is directly connected to the spectrum analyzer;
2. Set RBW =510KHz;
3. Set VBW $\geq$ 3 RBW=2MHz;
3. Set the span to encompass the entire emissions bandwidth (EBW) of the signal;
5. Detector=RMS;
6. Sweep time= auto couple;
7. Trace mode=max. hold;

7.4. Test Data

Test Item : Power Spectral Density
 Test Voltage : AC 240V, 60Hz for adapter
 Test Result : PASS

Test Mode : CH Low ~ CH High
 Temperature : 24℃
 Humidity : 55%RH

ANT A:

Mode	Channel Frequency (MHz)	Test Power Spectral Density (dBm/510KHz)	Final Power Spectral Density (dBm/500KHz)	Limit	Results
802.11a	5745	0.694	0.608	30	PASS
	5785	1.266	1.180	30	PASS
	5825	1.496	1.410	30	PASS
802.11n20	5745	1.648	1.562	30	PASS
	5785	1.396	1.310	30	PASS
	5825	1.602	1.516	30	PASS
802.11ac20	5745	2.088	2.002	30	PASS
	5785	2.253	2.167	30	PASS
	5825	2.030	1.944	30	PASS
802.11n40	5755	-1.897	-1.983	30	PASS
	5795	-0.822	-0.908	30	PASS
802.11ac40	5755	-2.964	-3.050	30	PASS
	5795	-0.896	-0.982	30	PASS
802.11ac80	5775	-3.523	-3.609	30	PASS

Remark: Final Power Spectral Density=Test Power Spectral Density+10log10(500/510)

ANT B:


Mode	Channel Frequency (MHz)	Test Power Spectral Density (dBm/510KHz)	Final Power Spectral Density (dBm/500KHz)	Limit	Results
802.11a	5745	1.034	0.948	30	PASS
	5785	1.857	1.771	30	PASS
	5825	1.628	1.542	30	PASS
802.11n20	5745	1.594	1.508	30	PASS
	5785	1.614	1.528	30	PASS
	5825	1.560	1.474	30	PASS
802.11ac20	5745	1.715	1.629	30	PASS
	5785	2.648	2.562	30	PASS
	5825	3.242	3.156	30	PASS
802.11n40	5755	-1.944	-2.030	30	PASS
	5795	-1.273	-1.359	30	PASS
802.11ac40	5755	-2.010	-2.096	30	PASS
	5795	-0.751	-0.837	30	PASS
802.11ac80	5775	-2.084	-2.170	30	PASS

Remark: Final Power Spectral Density=Test Power Spectral Density+10log10(500/510)

ANT A+B:

Mode	Channel Frequency (MHz)	Final Power Spectral Density (dBm/510KHz)	Final Power Spectral Density (dBm/500KHz)	Limit	Results
802.11n20	5745	4.631	4.545	30	PASS
	5785	4.517	4.431	30	PASS
	5825	4.591	4.505	30	PASS
802.11ac20	5745	4.916	4.830	30	PASS
	5785	5.465	5.379	30	PASS
	5825	5.688	5.602	30	PASS
802.11n40	5755	1.090	1.004	30	PASS
	5795	1.969	1.883	30	PASS
802.11ac40	5755	0.549	0.463	30	PASS
	5795	2.187	2.101	30	PASS
802.11ac80	5775	0.266	0.180	30	PASS

Remark: Final Power Spectral Density=Test Power Spectral Density+10log10(500/510)

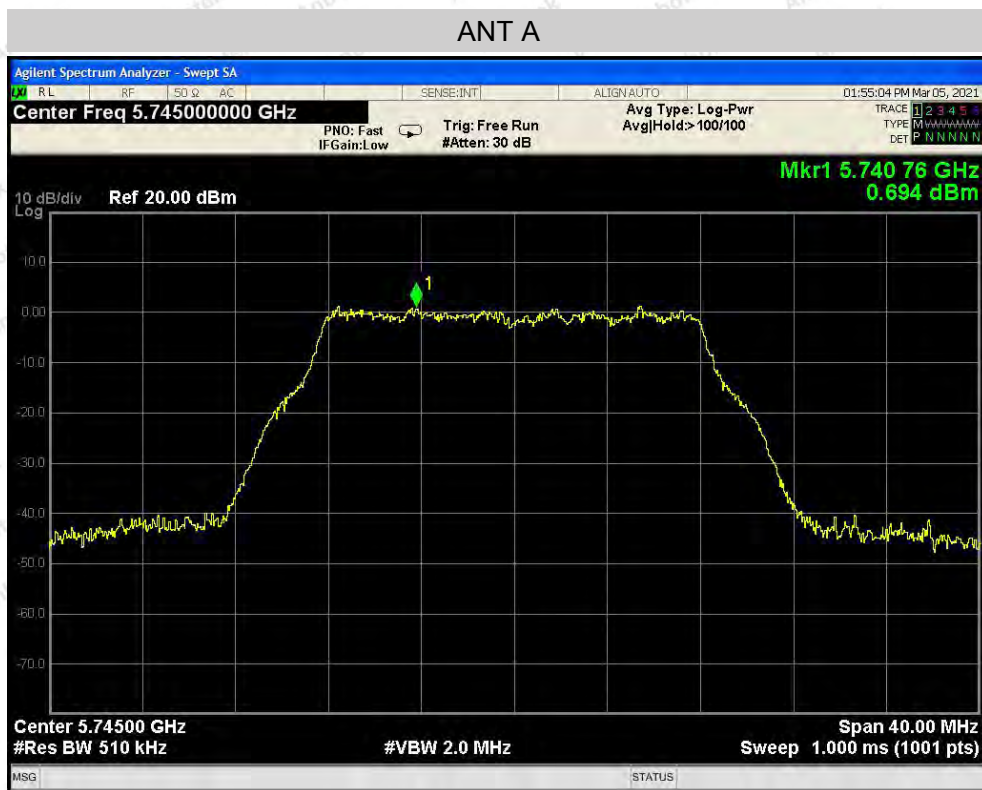

Test Mode: 802.11a--Low




Test Mode: 802.11a---Middle



Test Mode: 802.11a---High




Test Mode: 802.11n20---Low

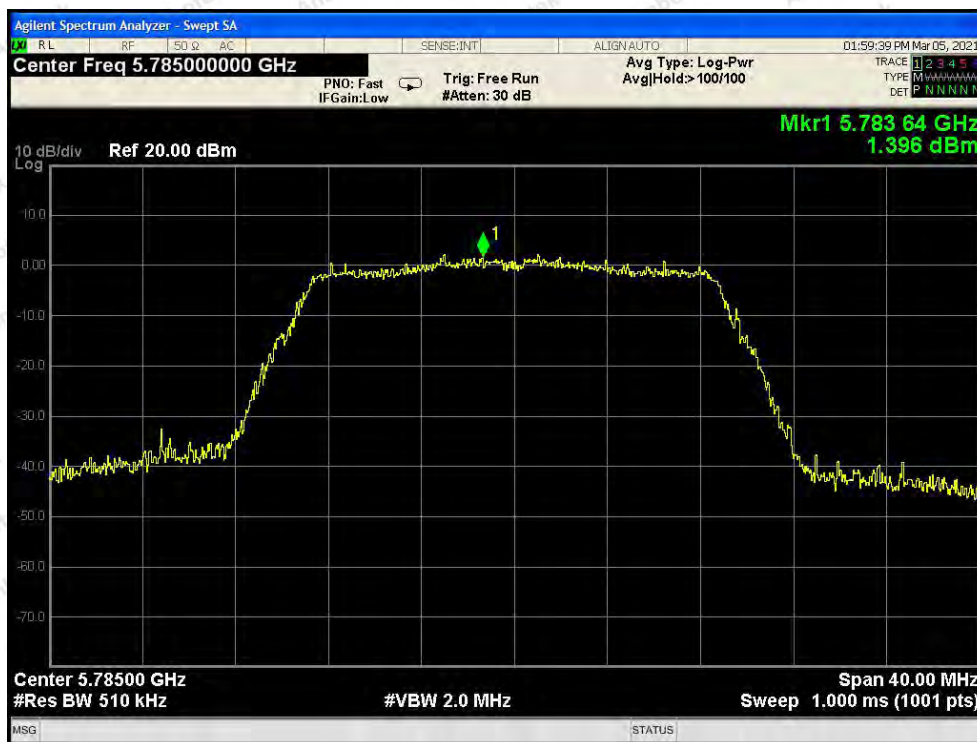


Test Mode: 802.11n20---Middle



Test Mode: 802.11n20---High

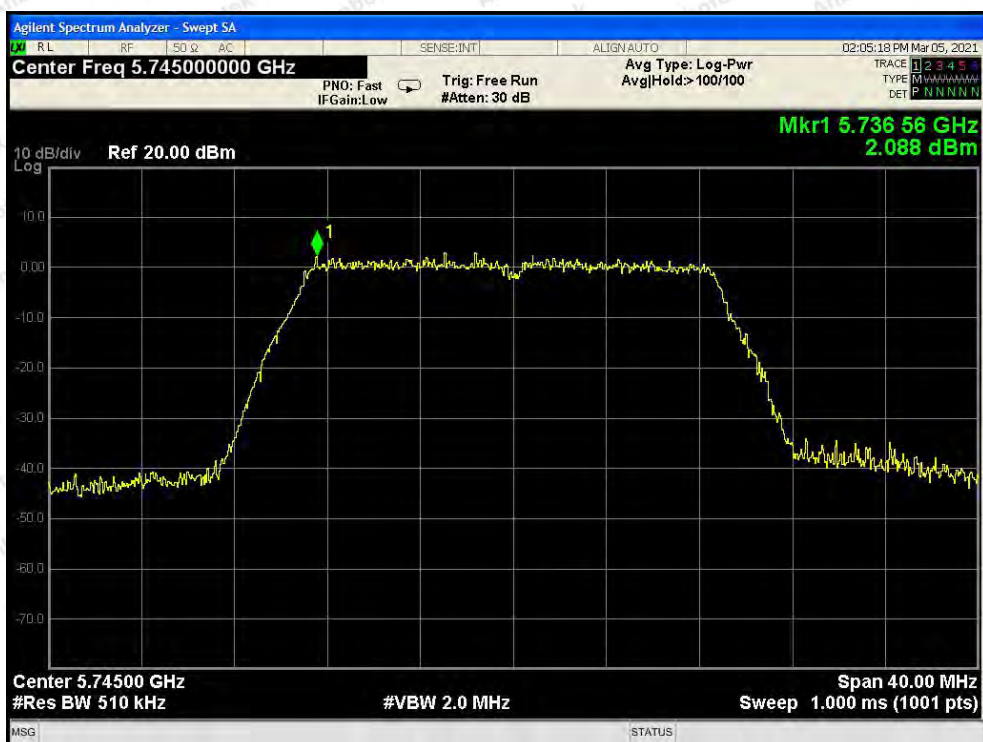

Test Mode: 802.11ac20--Low

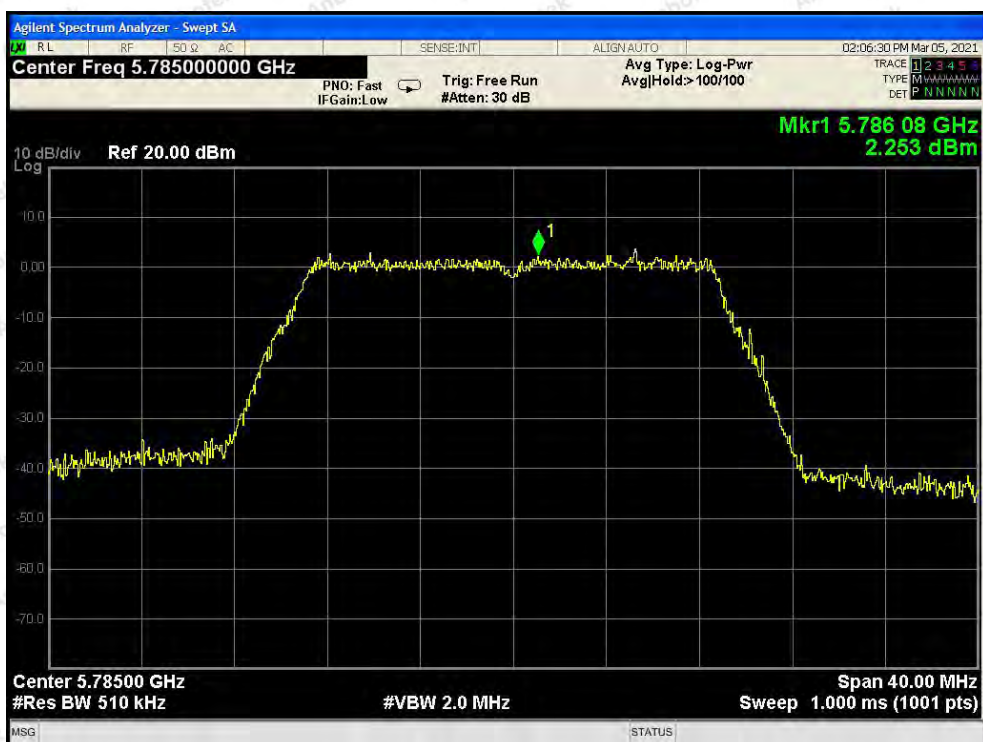

Test Mode: 802.11ac20---Middle



Test Mode: 802.11ac20---High



Test Mode: 802.11n40---Low



Test Mode: 802.11n40---High





Test Mode: 802.11ac40---Low




Test Mode: 802.11ac40---High



Test Mode: 802.11ac80

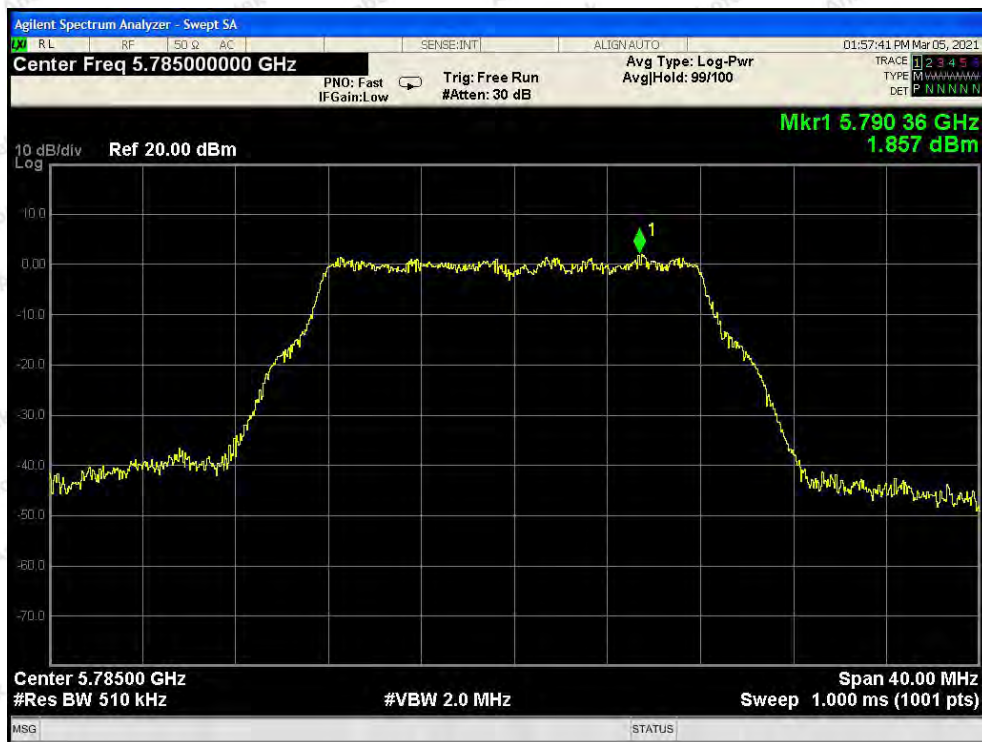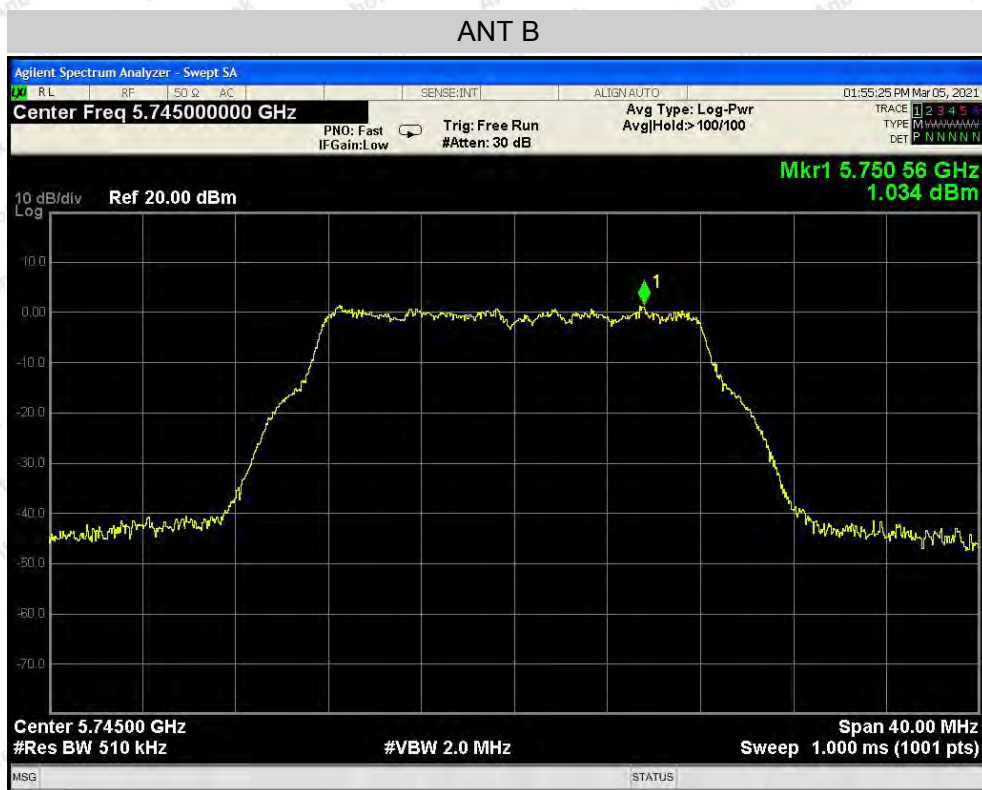

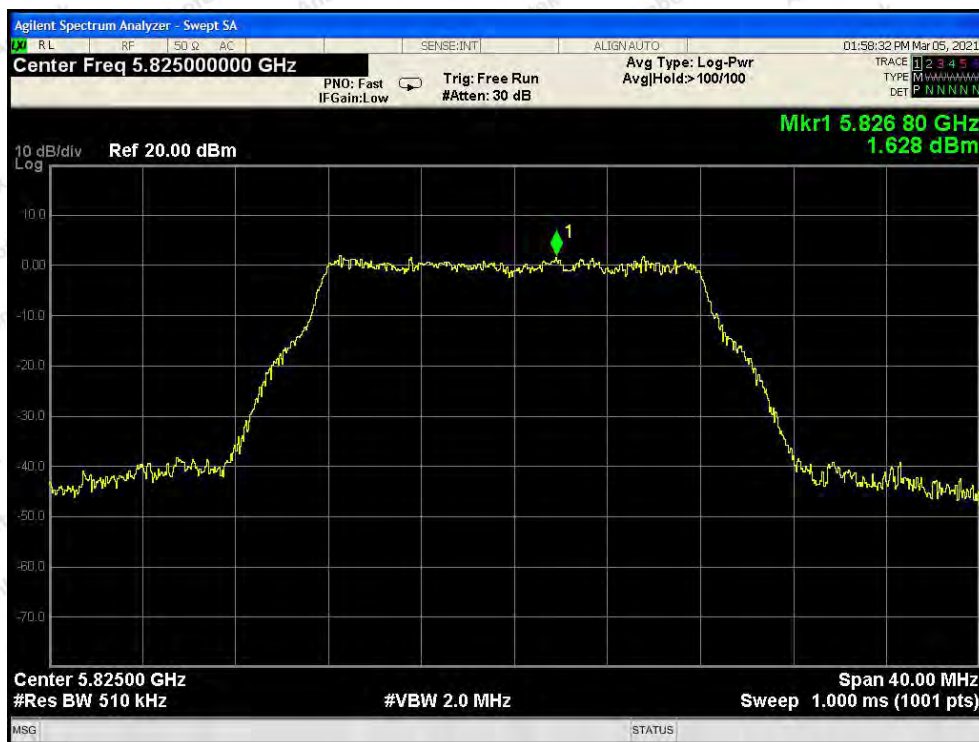

Test Mode: 802.11a---High



Test Mode: 802.11n20---Low




Test Mode: 802.11n20---Middle



Test Mode: 802.11n20---High



Test Mode: 802.11ac20--Low

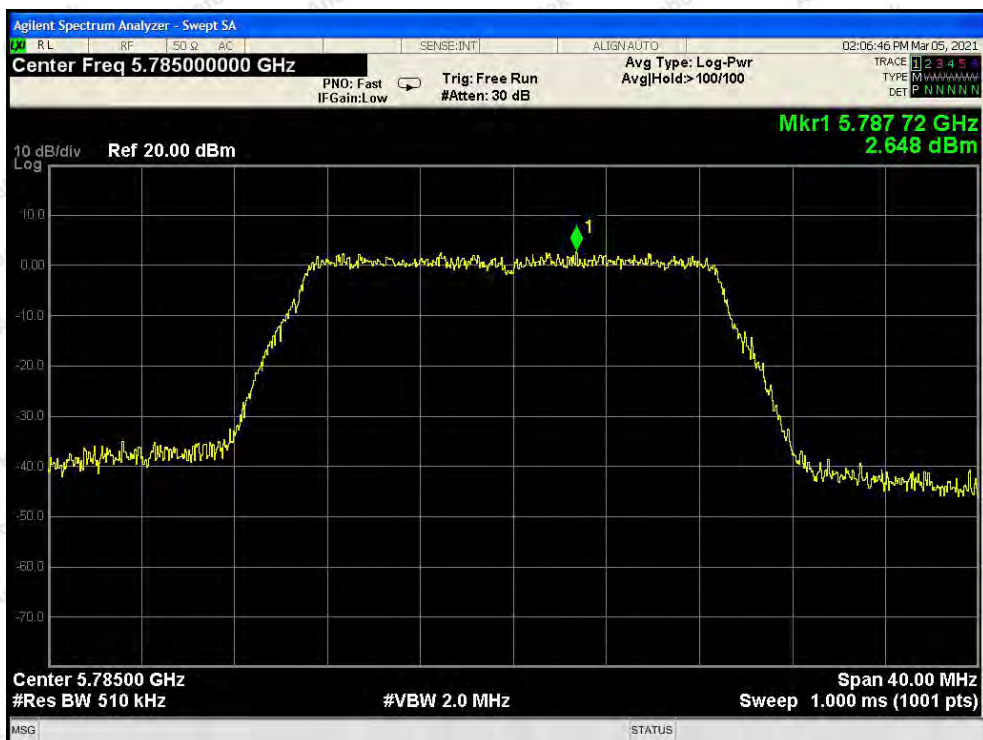

Test Mode: 802.11ac20---Middle



Test Mode: 802.11ac20---High



Test Mode: 802.11n40---Low



Test Mode: 802.11n40---High



Test Mode: 802.11ac40---Low



Test Mode: 802.11ac40---High



Test Mode: 802.11ac80

8. Antenna Requirement

8.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203 /15.407
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 2) 15.407 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

8.2. Antenna Connected Construction

The antenna is a PIFA Antenna which permanently attached, and the best case gain of the antenna is ANT A: 1.93dBi; ANT B: 2.33dBi. It complies with the standard requirement.

9. Frequency Stability

According to the manufacturer, under any normal operating conditions, the working frequency of the product is in the range of 5725-5850MHz.





APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Power Line Conducted Emission Test



Photo of Radiation Emission Test

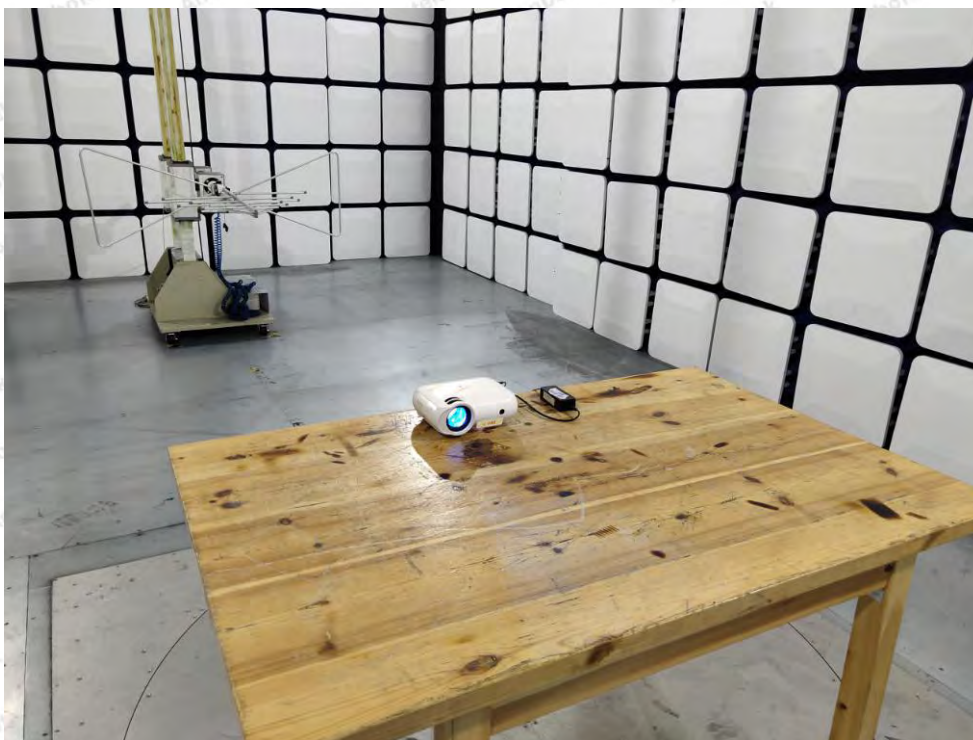

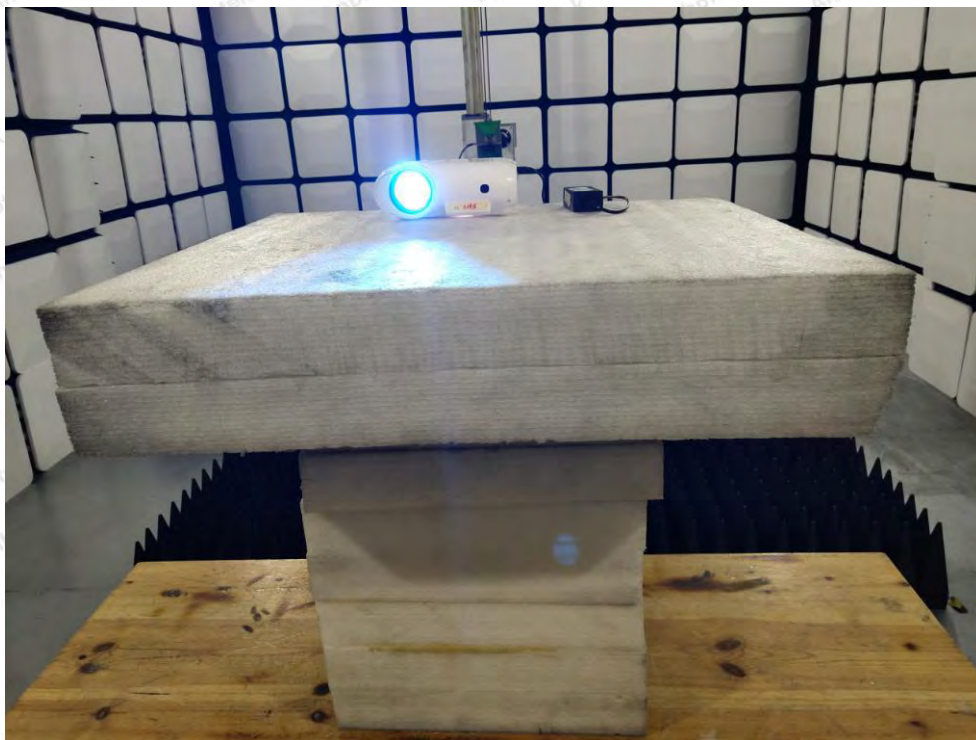

APPENDIX II -- EXTERNAL PHOTOGRAPH

Reference to the test report 18220WC10016401.

APPENDIX III -- INTERNAL PHOTOGRAPH

Reference to the test report 18220WC10016401.

-----End of Report-----

