



FCC PART 15.247
TEST REPORT

For

FUJIAN YIHE ELECTRONICS CO., LTD.

JIAN ROAD, QINXIYANG INDUSTRIAL PARK, FUAN FUJIAN CHINA

FCC ID: 2ASBG-YH9910

Report Type: Original Report	Product Name: Massage chair
Report Number: RXM190617050-00	
Report Date: 2019-10-27	
Reviewed By:	Dean Lau RF Supervisor
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. * This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “*”

TABLE OF CONTENTS

GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE.....	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY.....	4
MEASUREMENT UNCERTAINTY.....	5
TEST FACILITY.....	5
SYSTEM TEST CONFIGURATION	6
DESCRIPTION OF TEST CONFIGURATION.....	6
EUT EXERCISE SOFTWARE.....	6
EQUIPMENT MODIFICATIONS.....	6
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS.....	6
SUPPORT CABLE LIST AND DETAILS.....	6
BLOCK DIAGRAM OF TEST SETUP.....	7
SUMMARY OF TEST RESULTS	8
FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)	9
APPLICABLE STANDARD.....	9
FCC §15.203 - ANTENNA REQUIREMENT	10
APPLICABLE STANDARD.....	10
ANTENNA CONNECTOR CONSTRUCTION.....	10
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	11
APPLICABLE STANDARD.....	11
EUT SETUP.....	11
EMI TEST RECEIVER SETUP.....	11
TEST PROCEDURE.....	11
CORRECTED AMPLITUDE & MARGIN CALCULATION.....	12
TEST EQUIPMENT LIST AND DETAILS.....	12
TEST DATA.....	12
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS	15
APPLICABLE STANDARD.....	15
EUT SETUP.....	15
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP.....	16
TEST PROCEDURE.....	16
TEST EQUIPMENT LIST AND DETAILS.....	16
CORRECTED AMPLITUDE & MARGIN CALCULATION.....	17
TEST DATA.....	17
FCC §15.247(a) (1) - CHANNEL SEPARATION TEST	25
APPLICABLE STANDARD.....	25
TEST EQUIPMENT LIST AND DETAILS.....	25
TEST PROCEDURE.....	25
TEST DATA.....	25
FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING	31
APPLICABLE STANDARD.....	31
TEST PROCEDURE.....	31

TEST EQUIPMENT LIST AND DETAILS.....	31
TEST DATA	31
FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST	37
APPLICABLE STANDARD	37
TEST PROCEDURE	37
TEST EQUIPMENT LIST AND DETAILS.....	37
TEST DATA	37
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....	40
APPLICABLE STANDARD	40
TEST PROCEDURE	40
TEST EQUIPMENT LIST AND DETAILS.....	40
TEST DATA	40
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	46
APPLICABLE STANDARD	46
TEST PROCEDURE	46
TEST EQUIPMENT LIST AND DETAILS.....	46
TEST DATA	46
FCC §15.247(d) - BAND EDGES TESTING	48
APPLICABLE STANDARD	48
TEST PROCEDURE	48
TEST EQUIPMENT LIST AND DETAILS.....	48
TEST DATA	49

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:	Massage chair
EUT Model:	Osaki Pro Synergy
Multiple Model:	YH-9910
Operation Frequency:	2402-2480MHz
Modulation Type:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Rated Input Voltage:	100-125Vac
External Dimension:	1410mm(L)*740 mm(W)*1180 mm(H)
Serial Number:	190617050
EUT Received Date:	2019/6/20

Notes: Model Osaki Pro Synergy was selected for fully testing, the detailed information about the difference between Osaki Pro Synergy and model YH-9910 can be referred to the declaration letter which was stated and guaranteed by the manufacturer.

Objective

This report is prepared on behalf of FUJIAN YIHE ELECTRONICS CO., LTD. in accordance with Part 2, Subpart J, Part 15, Subparts A and C of the Federal Communications Commission's rules

The tests were performed in order to determine the Bluetooth BDR and EDR mode of EUT compliance with FCC Rules Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

No Related Submittal(s)/Grant(s)

Test Methodology

All measurements detailed in this Test Report were performed in accordance with ANSI C63.10-2013 "American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices".

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.55 dB,200M~1GHz: 5.92 dB,1G~6GHz: 4.98 dB, 6G~18GHz: 5.89 dB,18G~26.5G:5.47 dB,26.5G~40G:5.63 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in engineering mode.

EUT Exercise Software

The software: 'BK3256 RF Test_V1.3' was used during test, which was provided by manufacturer. The maximum power level was configured by the software as below table:

Test Software Version	BK3256 RF Test_V1.3		
Test Frequency	2402MHz	2441MHz	2480MHz
GFSK	7	7	7
$\pi/4$ -DQPSK	7	7	7
8DPSK	7	7	7

Equipment Modifications

No modification was made to the EUT.

Local Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
/	/	/	/

Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
/	/	/	/	/	/

Block Diagram of Test Setup

AC Line Conducted Test:

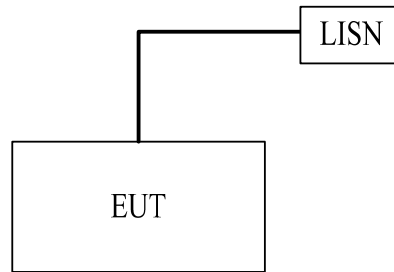

On the floor

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.247 (i) & §1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliance
FCC §15.203	Antenna requirement	Compliance
FCC §15.207(a)	AC line conducted emissions	Compliance
FCC §15.205, §15.209, §15.247(d)	Spurious emissions	Compliance
FCC §15.247(a)(1)	Channel separation	Compliance
FCC §15.247(a)(1)	20 dB bandwidth	Compliance
FCC §15.247(a)(1)(iii)	Quantity of hopping channel test	Compliance
FCC §15.247(a)(1)(iii)	Time of occupancy (dwell time)	Compliance
FCC §15.247(b)(1)	Peak output power measurement	Compliance
FCC §15.247(d)	Band edges	Compliance

FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247(i) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission’s guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculation formula:

Prediction of power density at the distance of the applicable MPE limit

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Mode	Frequency (MHz)	Antenna Gain		Conducted output power including Tune-up Tolerance		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
Bluetooth	2402-2480	0	1.00	4	2.51	20.00	0.0005	1.0

Result: The device meet FCC MPE at 20 cm distance

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has one internal antenna arrangement for BT, and the antenna gain is 0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207(a)

EUT Setup

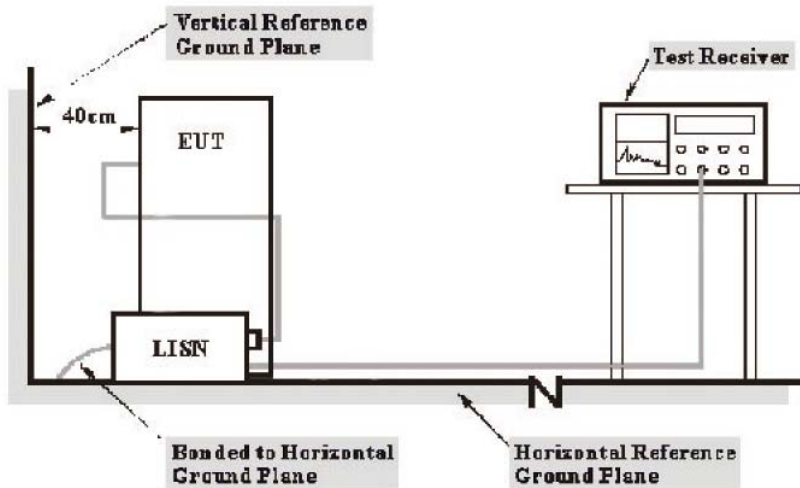

Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 30 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

Herein,

V_C : corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF : voltage division factor of AMN or ISN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-01	2018-09-05	2019-09-05
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A
R&S	Two-line V-network	ENV 216	101614	2018-12-10	2019-12-10
R&S	EMI Test Receiver	ESPI	100120	2019-05-09	2020-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data


Environmental Conditions

Temperature:	26.4 °C
Relative Humidity:	55 %
ATM Pressure:	100.2kPa
Test by:	Sky Lu
Test Date:	2019-09-03

Test Result: Compliance

Test Mode: Transmitting


AC120V, 60 Hz, Line:

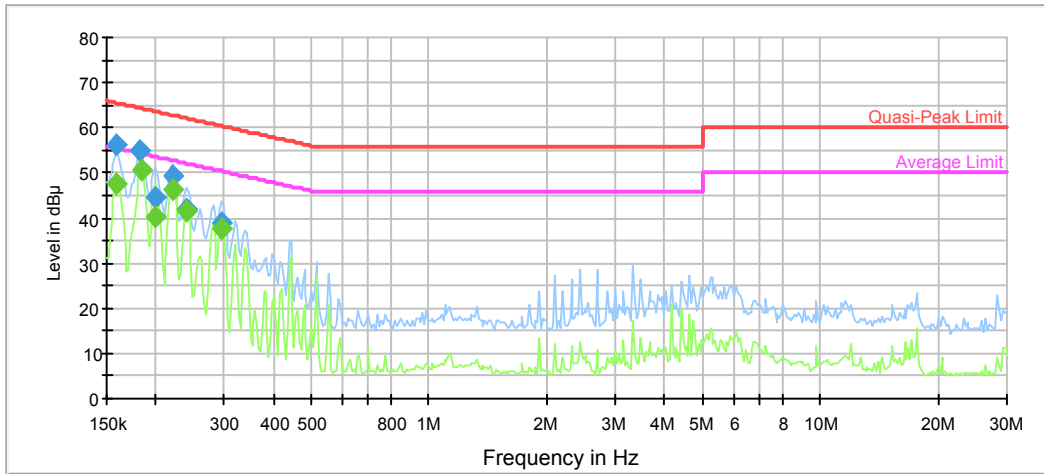

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.159228	56.1	9.000	L1	11.1	9.5	65.5
0.183029	55.1	9.000	L1	10.8	9.3	64.3
0.200176	44.4	9.000	L1	10.6	19.2	63.6
0.221119	49.1	9.000	L1	10.5	13.7	62.8
0.239440	42.1	9.000	L1	10.4	20.0	62.1
0.295084	39.1	9.000	L1	10.2	21.3	60.4

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.159228	47.7	9.000	L1	11.1	7.8	55.5
0.184859	50.5	9.000	L1	10.8	3.8	54.3
0.200176	40.4	9.000	L1	10.6	13.2	53.6
0.221119	46.2	9.000	L1	10.5	6.6	52.8
0.239440	41.3	9.000	L1	10.4	10.8	52.1
0.295084	37.5	9.000	L1	10.2	12.9	50.4

AC120V, 60 Hz, Neutral:

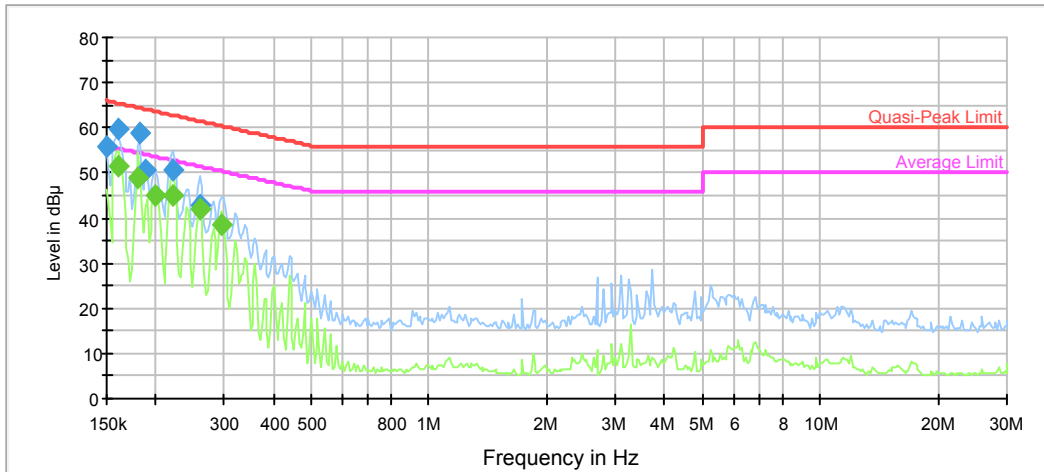

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	55.6	9.000	N	11.2	10.4	66.0
0.160820	59.5	9.000	N	11.0	5.9	65.4
0.183029	58.6	9.000	N	10.8	5.7	64.3
0.188575	50.7	9.000	N	10.7	13.4	64.1
0.221119	50.7	9.000	N	10.5	12.1	62.8
0.259279	42.8	9.000	N	10.3	18.6	61.5

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.160820	51.3	9.000	N	11.0	4.1	55.4
0.181216	48.8	9.000	N	10.8	5.7	54.4
0.200176	45.0	9.000	N	10.6	8.6	53.6
0.221119	45.0	9.000	N	10.5	7.8	52.8
0.259279	41.9	9.000	N	10.3	9.5	51.5
0.295084	38.6	9.000	N	10.2	11.8	50.4


FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

EUT Setup

Below 1GHz:

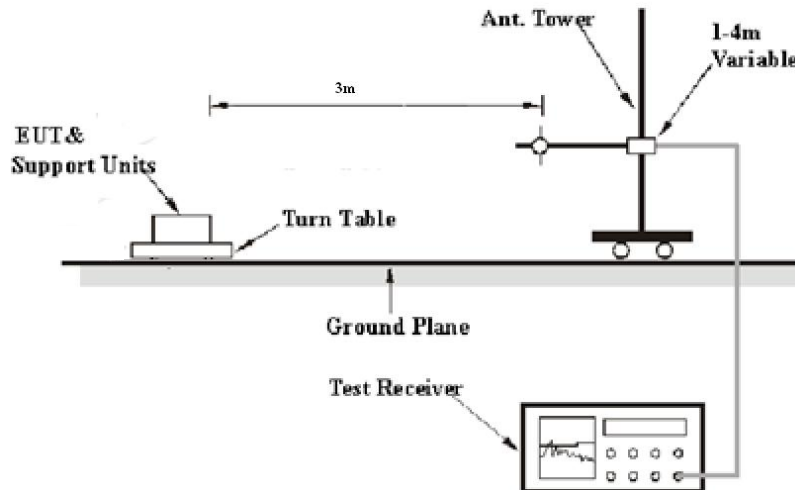

Above 1GHz:

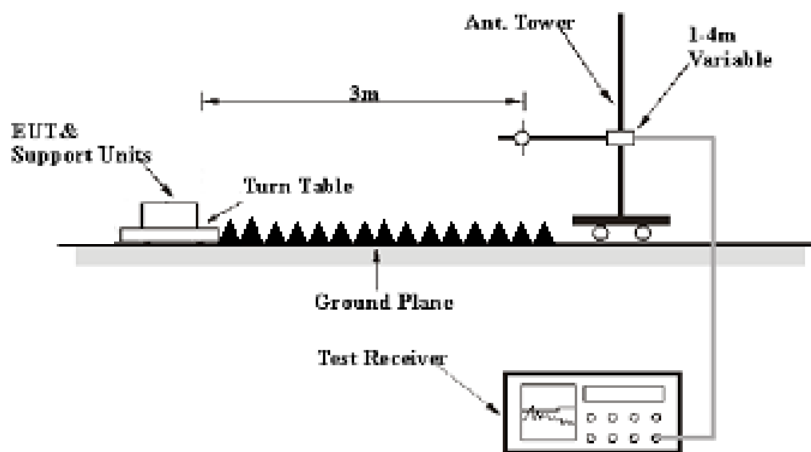

The radiated emission below 1GHz tests were performed in the 3 meters chamber A, above 1GHz tests were performed in the 3 meters chamber B, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

According to FCC public notice: DA-00-705, during the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	AV

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz - 1 GHz, peak and average detection modes for frequencies above 1 GHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESR3	102453	2019-06-26	2020-06-26
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1400-01	2019-05-06	2020-05-06
HP	Amplifier	8447D	2727A05902	2018-09-05	2019-09-05
Agilent	Spectrum Analyzer	E4440A	SG43360054	2019-05-09	2020-05-09
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2016-11-18	2019-11-18
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2018-09-05	2019-09-05
MICRO-COAX	Coaxial Cable	UFA147-1-2362- 100100	64639 231029- 001	2019-02-24	2020-02-24
MITEQ	Amplifier	AFS42-00101800- 25-S-42	2001271	2018-09-05	2019-09-05
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2019-06-27	2020-06-27
E-Microwave	Band-stop Filters	OBSF-2400-2483.5- S	OE01601525	2019-06-16	2020-06-16

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Data


Environmental Conditions

Test Items	Radiation Below 1GHz	Radiation Above 1GHz
Temperature:	25.3 °C	27.6 °C
Relative Humidity:	44 %	59 %
ATM Pressure:	99.8 kPa	100.3 kPa
Tester:	Neil Liao	Neil Liao
Test Date:	2019-09-04	2019-07-03

Test Mode: Transmitting


1) 30MHz-1GHz (BDR High channel was the worst)

Horizontal:

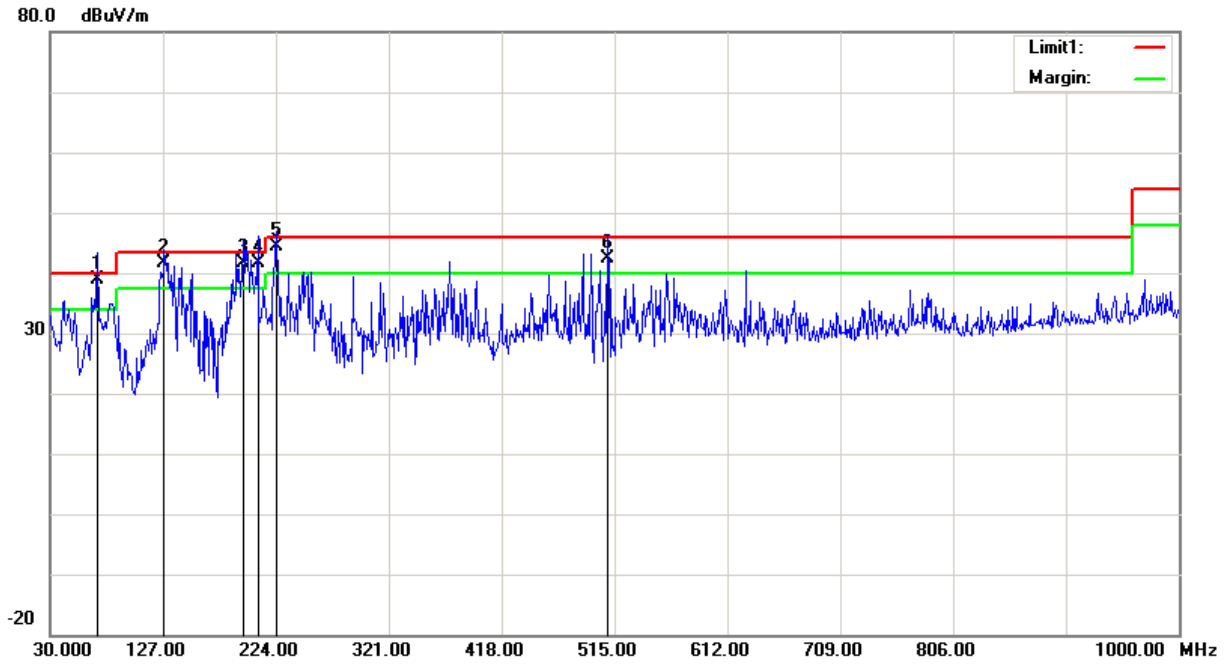

Frequency (MHz)	Receiver Reading (dBμV)	Remark	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
70.7400	49.98	QP	-11.12	38.86	40.00	1.14
127.9700	46.36	QP	-4.76	41.60	43.50	1.90
195.8700	48.33	QP	-6.60	41.73	43.50	1.77
208.4800	49.02	QP	-7.33	41.69	43.50	1.81
224.0000	51.20	QP	-6.79	44.41	46.00	1.59
509.1800	42.74	QP	-0.28	42.46	46.00	3.54

Vertical:

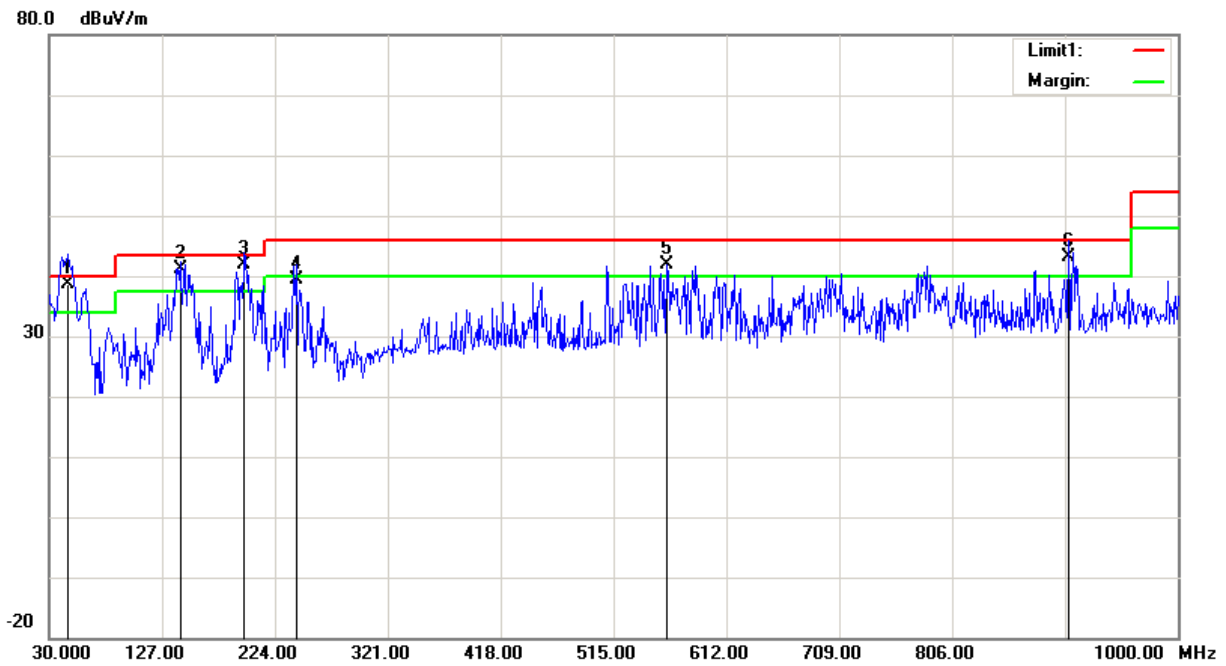

Frequency (MHz)	Receiver Reading (dBµV)	Remark	Correction Factor (dB/m)	Cord. Amp. (dBµV/m)	Limit (dBµV/m)	Margin (dB)
46.4900	48.58	QP	-9.92	38.66	40.00	1.34
142.5200	47.12	QP	-5.91	41.21	43.50	2.29
197.8100	48.16	QP	-6.26	41.90	43.50	1.60
242.4300	45.36	QP	-5.97	39.39	46.00	6.61
560.5900	41.16	QP	0.62	41.78	46.00	4.22
905.9100	42.96	QP	0.20	43.16	46.00	2.84

2)1GHz-25GHz:

BDR Mode(GFSK)

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Remark	Polar (H/V)	Factor (dB/m)					
Low Channel: 2402 MHz									
2402.00	64.00	PK	H	28.10	1.80	0.00	93.90	N/A	N/A
2402.00	53.50	AV	H	28.10	1.80	0.00	83.40	N/A	N/A
2402.00	61.41	PK	V	28.10	1.80	0.00	91.31	N/A	N/A
2402.00	50.62	AV	V	28.10	1.80	0.00	80.52	N/A	N/A
2390.00	33.47	PK	H	28.08	1.80	0.00	63.35	74.00	10.65
2390.00	14.54	AV	H	28.08	1.80	0.00	44.42	54.00	9.58
4804.00	58.04	PK	H	32.91	3.17	37.20	56.92	74.00	17.08
4804.00	46.99	AV	H	32.91	3.17	37.20	45.87	54.00	8.13
7206.00	57.04	PK	H	35.74	4.82	37.23	60.37	74.00	13.63
7206.00	44.64	AV	H	35.74	4.82	37.23	47.97	54.00	6.03
Middle Channel: 2441 MHz									
2441.00	61.96	PK	H	28.18	1.82	0.00	91.96	N/A	N/A
2441.00	51.50	AV	H	28.18	1.82	0.00	81.50	N/A	N/A
2441.00	59.65	PK	V	28.18	1.82	0.00	89.65	N/A	N/A
2441.00	48.03	AV	V	28.18	1.82	0.00	78.03	N/A	N/A
4882.00	63.28	PK	H	33.06	3.27	37.21	62.40	74.00	11.60
4882.00	52.03	AV	H	33.06	3.27	37.21	51.15	54.00	2.85
7323.00	55.78	PK	H	36.04	4.62	37.38	59.06	74.00	14.94
7323.00	43.11	AV	H	36.04	4.62	37.38	46.39	54.00	7.61
High Channel: 2480 MHz									
2480.00	60.22	PK	H	28.26	1.84	0.00	90.32	N/A	N/A
2480.00	48.82	AV	H	28.26	1.84	0.00	78.92	N/A	N/A
2480.00	58.14	PK	V	28.26	1.84	0.00	88.24	N/A	N/A
2480.00	46.33	AV	V	28.26	1.84	0.00	76.43	N/A	N/A
2483.50	37.26	PK	H	28.27	1.84	0.00	67.37	74.00	6.63
2483.50	14.59	AV	H	28.27	1.84	0.00	44.70	54.00	9.30
4960.00	64.26	PK	H	33.22	3.23	37.25	63.46	74.00	10.54
4960.00	53.01	AV	H	33.22	3.23	37.25	52.21	54.00	1.79
7440.00	53.06	PK	H	36.34	4.41	37.52	56.29	74.00	17.71
7440.00	40.44	AV	H	36.34	4.41	37.52	43.67	54.00	10.33

2EDR Mode($\pi/4$ -DQPSK)




Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Remark	Polar (H/V)	Factor (dB/m)					
Low Channel: 2402 MHz									
2402.00	63.99	PK	H	28.10	1.80	0.00	93.89	N/A	N/A
2402.00	48.57	AV	H	28.10	1.80	0.00	78.47	N/A	N/A
2402.00	61.54	PK	V	28.10	1.80	0.00	91.44	N/A	N/A
2402.00	46.33	AV	V	28.10	1.80	0.00	76.23	N/A	N/A
2390.00	25.43	PK	H	28.08	1.80	0.00	55.31	74.00	18.69
2390.00	13.97	AV	H	28.08	1.80	0.00	43.85	54.00	10.15
4804.00	60.21	PK	H	32.91	3.17	37.20	59.09	74.00	14.91
4804.00	42.35	AV	H	32.91	3.17	37.20	41.23	54.00	12.77
7206.00	58.21	PK	H	35.74	4.82	37.23	61.54	74.00	12.46
7206.00	38.96	AV	H	35.74	4.82	37.23	42.29	54.00	11.71
Middle Channel: 2441 MHz									
2441.00	62.11	PK	H	28.18	1.82	0.00	92.11	N/A	N/A
2441.00	47.52	AV	H	28.18	1.82	0.00	77.52	N/A	N/A
2441.00	60.03	PK	V	28.18	1.82	0.00	90.03	N/A	N/A
2441.00	44.97	AV	V	28.18	1.82	0.00	74.97	N/A	N/A
4882.00	63.24	PK	H	33.06	3.27	37.21	62.36	74.00	11.64
4882.00	43.21	AV	H	33.06	3.27	37.21	42.33	54.00	11.67
7323.00	58.63	PK	H	36.04	4.62	37.38	61.91	74.00	12.09
7323.00	37.55	AV	H	36.04	4.62	37.38	40.83	54.00	13.17
High Channel: 2480 MHz									
2480.00	61.33	PK	H	28.26	1.84	0.00	91.43	N/A	N/A
2480.00	45.59	AV	H	28.26	1.84	0.00	75.69	N/A	N/A
2480.00	59.45	PK	V	28.26	1.84	0.00	89.55	N/A	N/A
2480.00	43.66	AV	V	28.26	1.84	0.00	73.76	N/A	N/A
2483.50	27.53	PK	H	28.27	1.84	0.00	57.64	74.00	16.36
2483.50	16.19	AV	H	28.27	1.84	0.00	46.30	54.00	7.70
4960.00	64.21	PK	H	33.22	3.23	37.25	63.41	74.00	10.59
4960.00	43.57	AV	H	33.22	3.23	37.25	42.77	54.00	11.23
7440.00	57.52	PK	H	36.34	4.41	37.52	60.75	74.00	13.25
7440.00	38.03	AV	H	36.34	4.41	37.52	41.26	54.00	12.74

3EDR Mode(8DPSK)

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Remark	Polar (H/V)	Factor (dB/m)					
Low Channel: 2402 MHz									
2402.00	63.97	PK	H	28.10	1.80	0.00	93.87	N/A	N/A
2402.00	48.14	AV	H	28.10	1.80	0.00	78.04	N/A	N/A
2402.00	61.25	PK	V	28.10	1.80	0.00	91.15	N/A	N/A
2402.00	45.77	AV	V	28.10	1.80	0.00	75.67	N/A	N/A
2390.00	24.14	PK	H	28.08	1.80	0.00	54.02	74.00	19.98
2390.00	13.94	AV	H	28.08	1.80	0.00	43.82	54.00	10.18
4804.00	59.26	PK	H	32.91	3.17	37.20	58.14	74.00	15.86
4804.00	42.33	AV	H	32.91	3.17	37.20	41.21	54.00	12.79
7206.00	58.03	PK	H	35.74	4.82	37.23	61.36	74.00	12.64
7206.00	39.58	AV	H	35.74	4.82	37.23	42.91	54.00	11.09
Middle Channel: 2441 MHz									
2441.00	62.95	PK	H	28.18	1.82	0.00	92.95	N/A	N/A
2441.00	47.36	AV	H	28.18	1.82	0.00	77.36	N/A	N/A
2441.00	59.52	PK	V	28.18	1.82	0.00	89.52	N/A	N/A
2441.00	44.57	AV	V	28.18	1.82	0.00	74.57	N/A	N/A
4882.00	63.54	PK	H	33.06	3.27	37.21	62.66	74.00	11.34
4882.00	42.55	AV	H	33.06	3.27	37.21	41.67	54.00	12.33
7323.00	56.47	PK	H	36.04	4.62	37.38	59.75	74.00	14.25
7323.00	38.66	AV	H	36.04	4.62	37.38	41.94	54.00	12.06
High Channel: 2480 MHz									
2480.00	62.35	PK	H	28.26	1.84	0.00	92.45	N/A	N/A
2480.00	46.22	AV	H	28.26	1.84	0.00	76.32	N/A	N/A
2480.00	59.54	PK	V	28.26	1.84	0.00	89.64	N/A	N/A
2480.00	44.78	AV	V	28.26	1.84	0.00	74.88	N/A	N/A
2483.50	28.89	PK	H	28.27	1.84	0.00	59.00	74.00	15.00
2483.50	16.11	AV	H	28.27	1.84	0.00	46.22	54.00	7.78
4960.00	64.18	PK	H	33.22	3.23	37.25	63.38	74.00	10.62
4960.00	42.61	AV	H	33.22	3.23	37.25	41.81	54.00	12.19
7440.00	53.90	PK	H	36.34	4.41	37.52	57.13	74.00	16.87
7440.00	36.85	AV	H	36.34	4.41	37.52	40.08	54.00	13.92




Worst plots (GFSK High channel was the worst) Horizontal

Fundamental
Test with Band
Rejection Filter

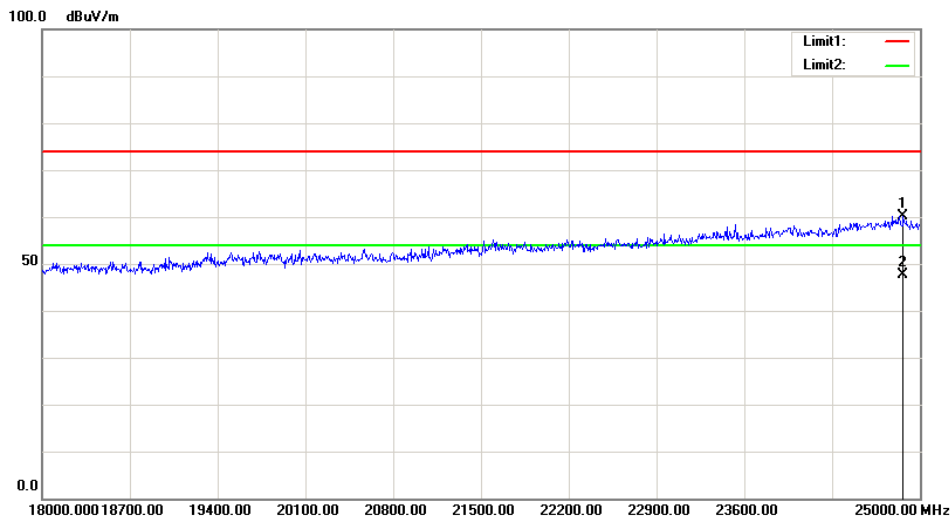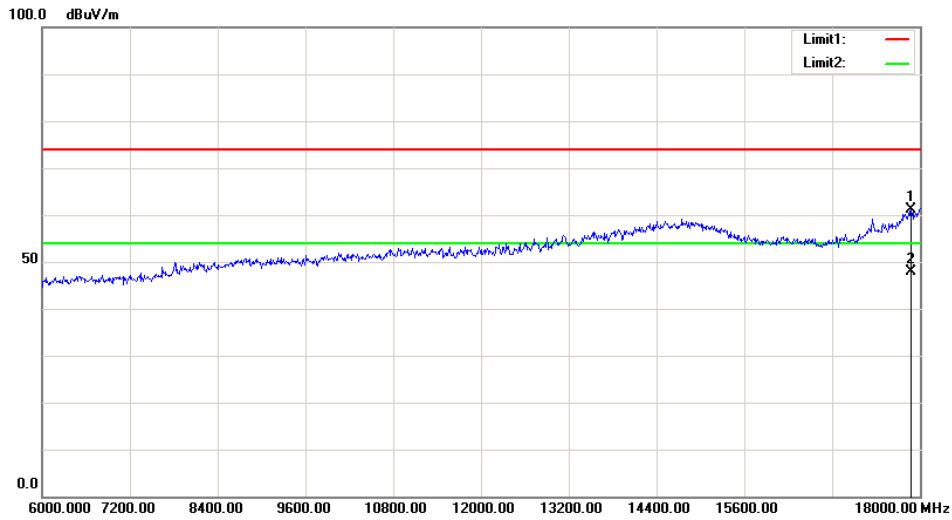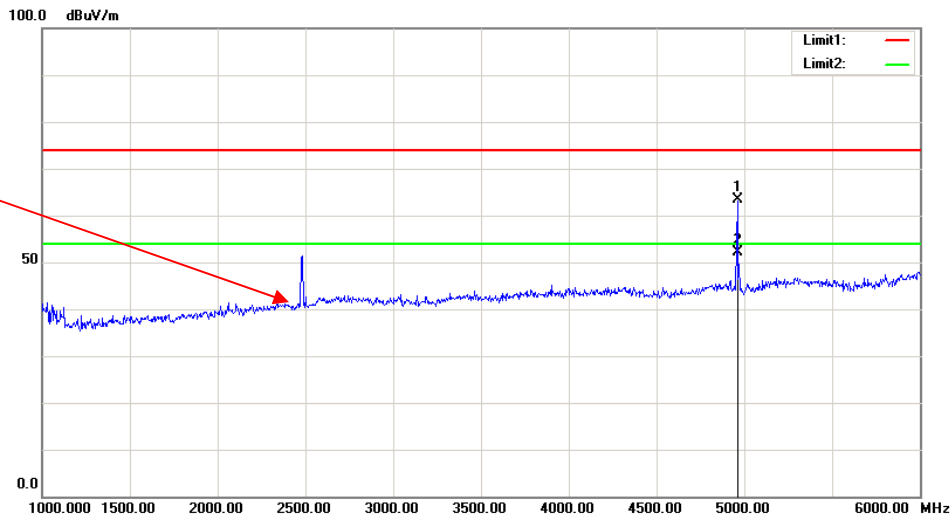

Vertical

Fundamental Test with Band Rejection Filter

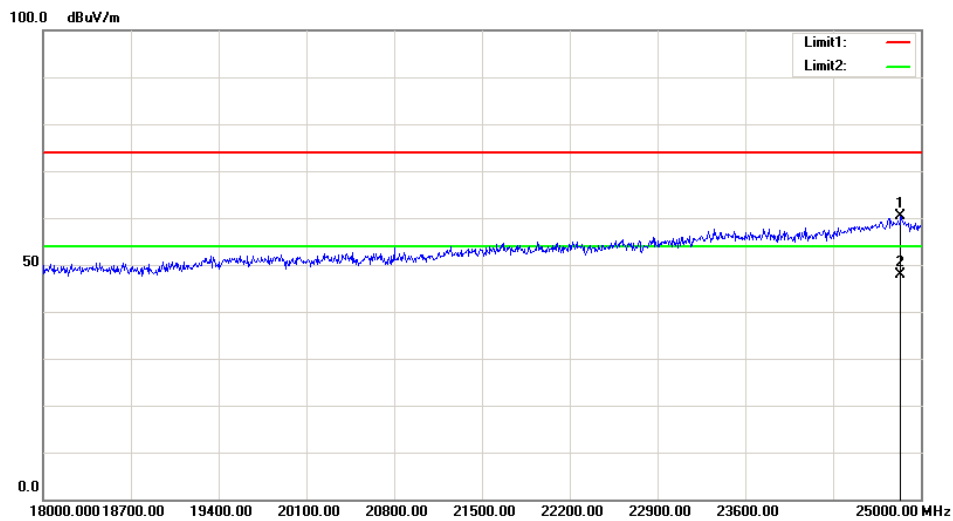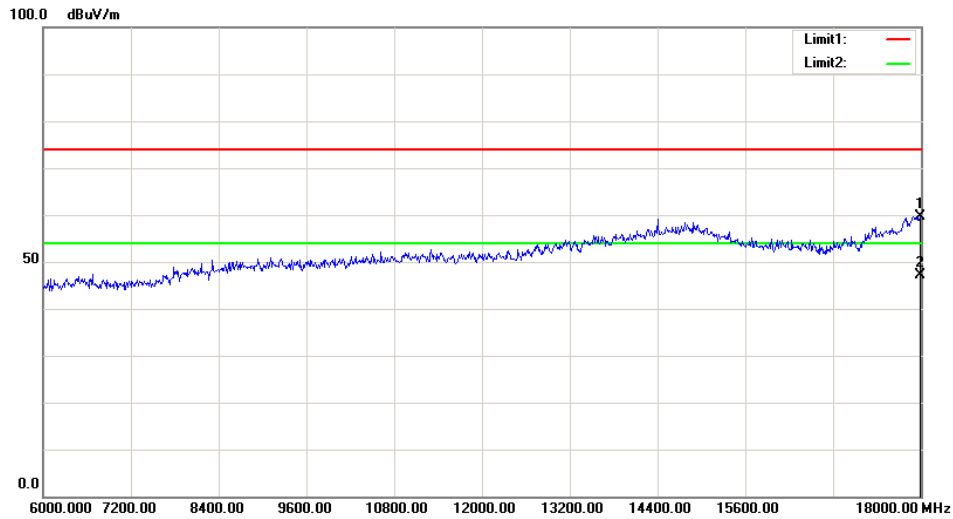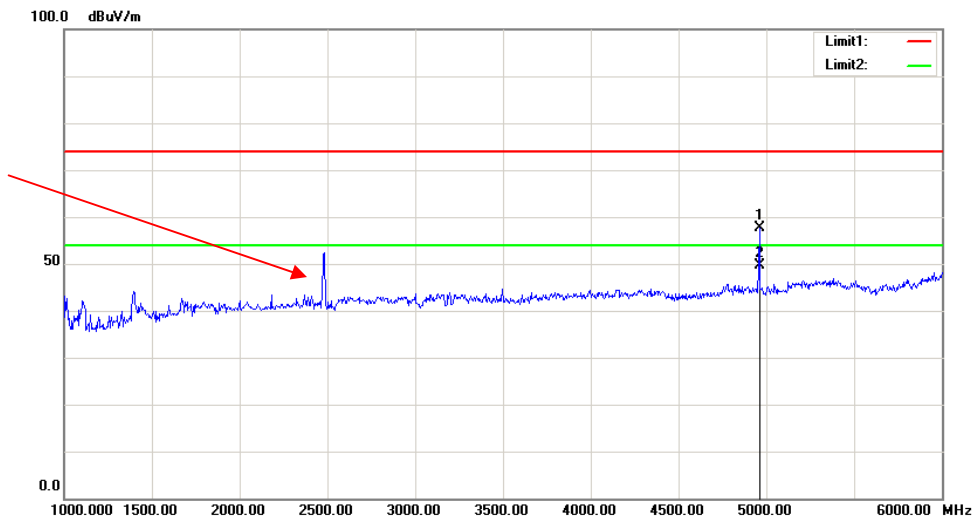

FCC §15.247(a) (1) - CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.50 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2019-05-09	2020-05-09
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 30 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace.
3. Measure the channel separation.

Test Data

Environmental Conditions

Temperature:	28.1 °C
Relative Humidity:	65 %
ATM Pressure:	100.3 kPa
Test by:	Elena Lei
Test Date:	2019-06-26

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)
BDR (GFSK)	Low	2402	1.000	0.68
	Middle	2441	1.004	0.68
	High	2480	1.000	0.68
EDR ($\pi/4$ -DQPSK)	Low	2402	1.024	0.91
	Middle	2441	1.020	0.88
	High	2480	0.988	0.88
EDR (8DPSK)	Low	2402	1.040	0.95
	Middle	2441	1.024	0.92
	High	2480	1.012	0.90


Note: Limit = $(2/3) \times 20\text{dB bandwidth}$

BDR Mode (GFSK):

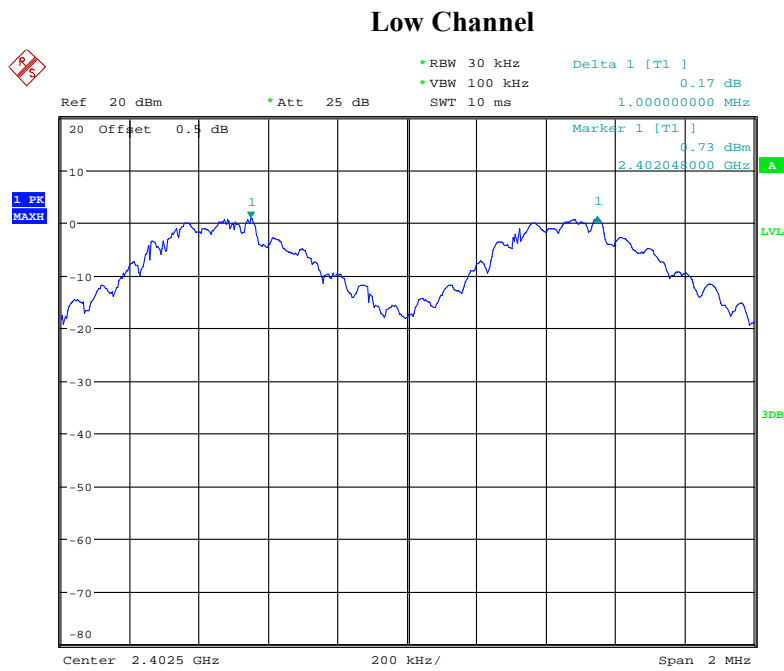


Date: 26.JUN.2019 10:19:39

Middle Channel

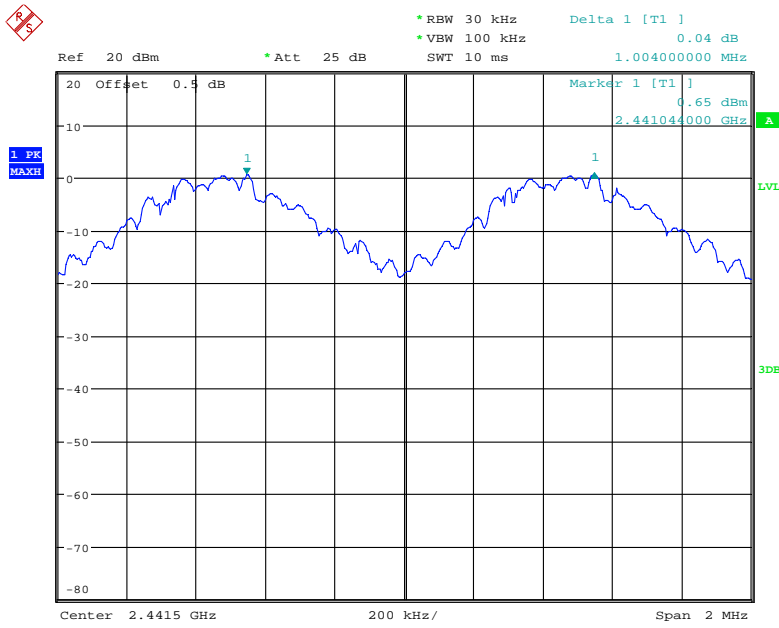

Date: 26.JUN.2019 10:20:14


High Channel

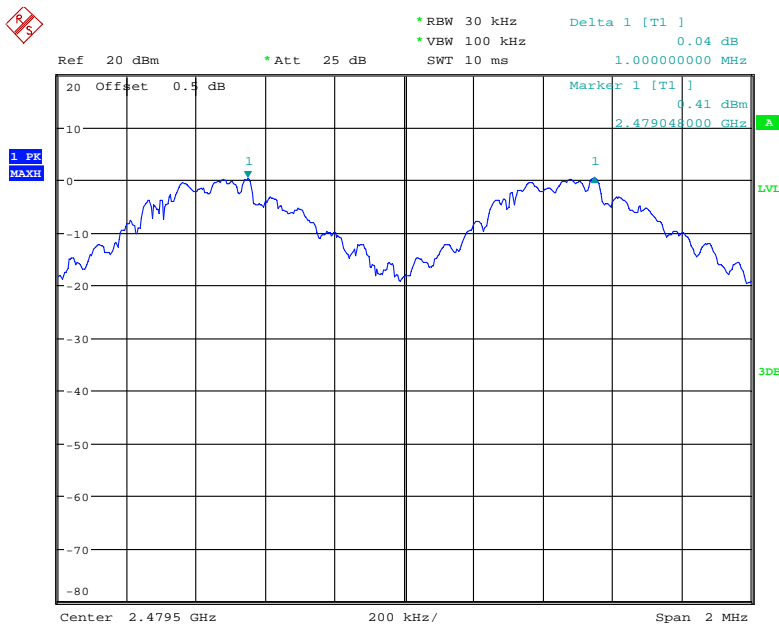

Date: 26.JUN.2019 10:20:51


EDR Mode ($\pi/4$ -DQPSK):

Low Channel

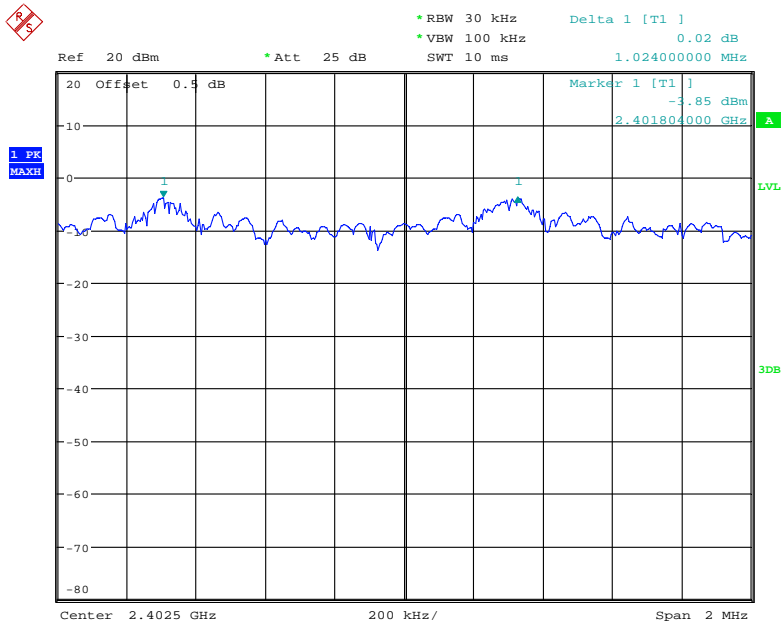


Date: 26.JUN.2019 10:22:39

Middle Channel

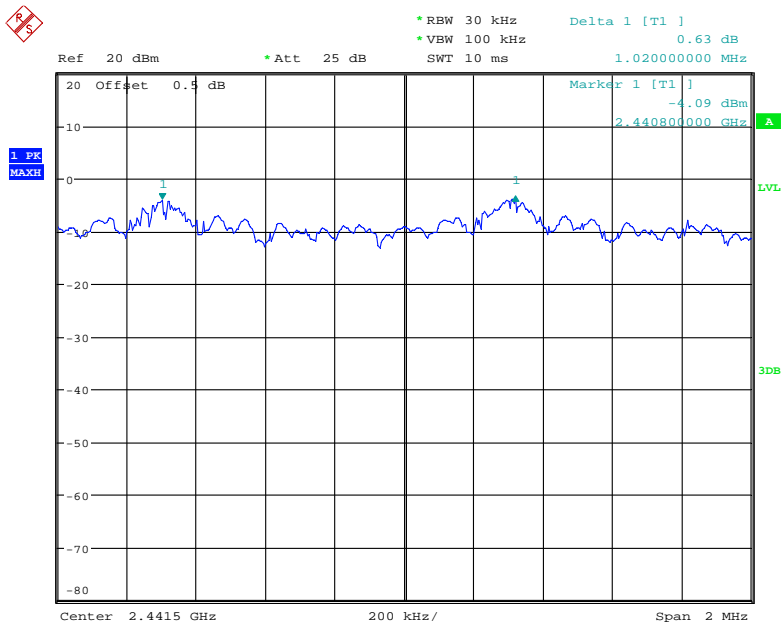

Date: 26.JUN.2019 10:23:38


High Channel

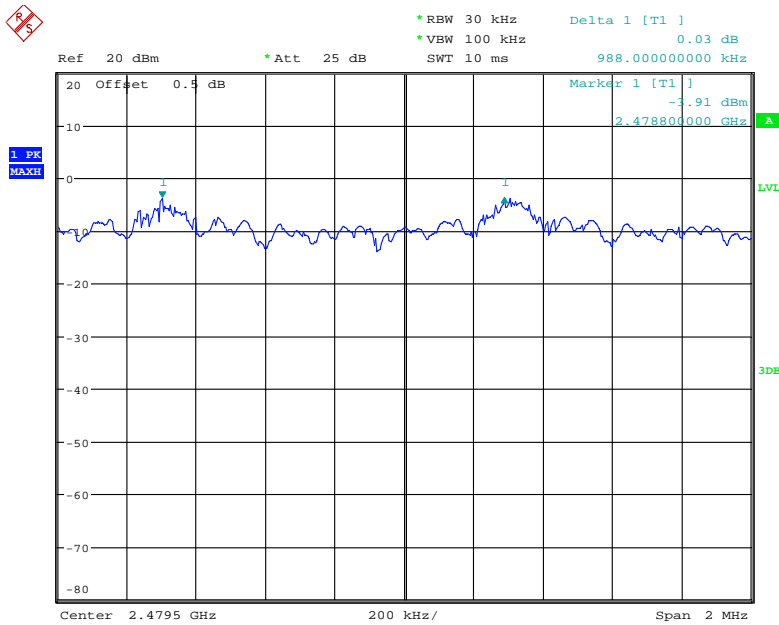

Date: 26.JUN.2019 10:24:20


EDR Mode (8DPSK):

Low Channel

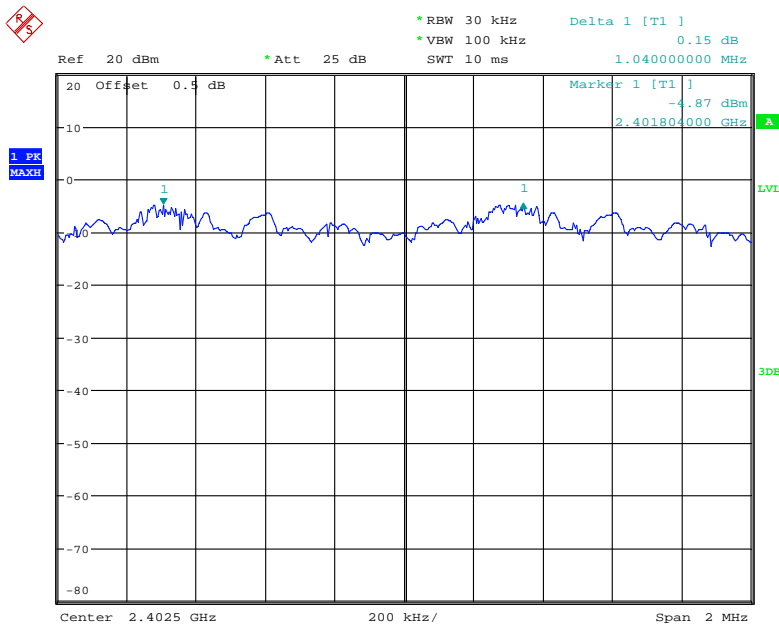


Date: 26.JUN.2019 10:25:12

Middle Channel

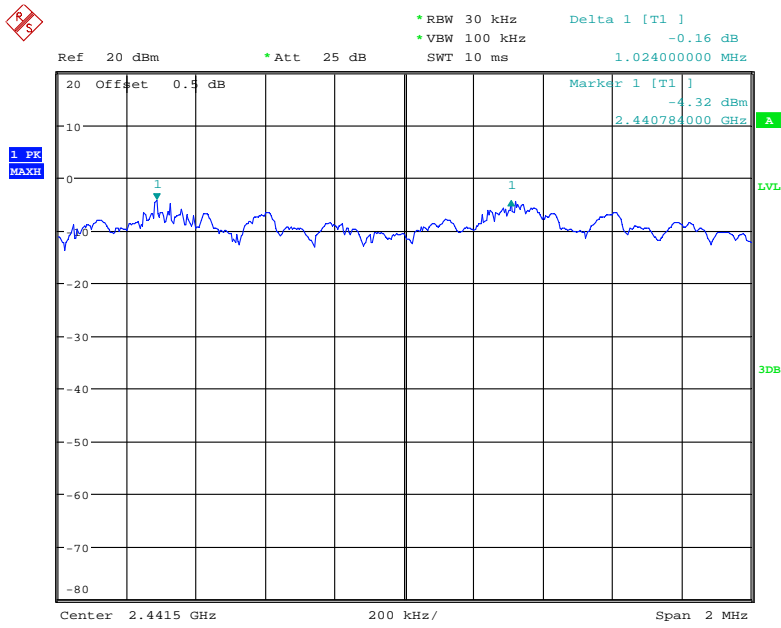

Date: 26.JUN.2019 10:25:46

High Channel

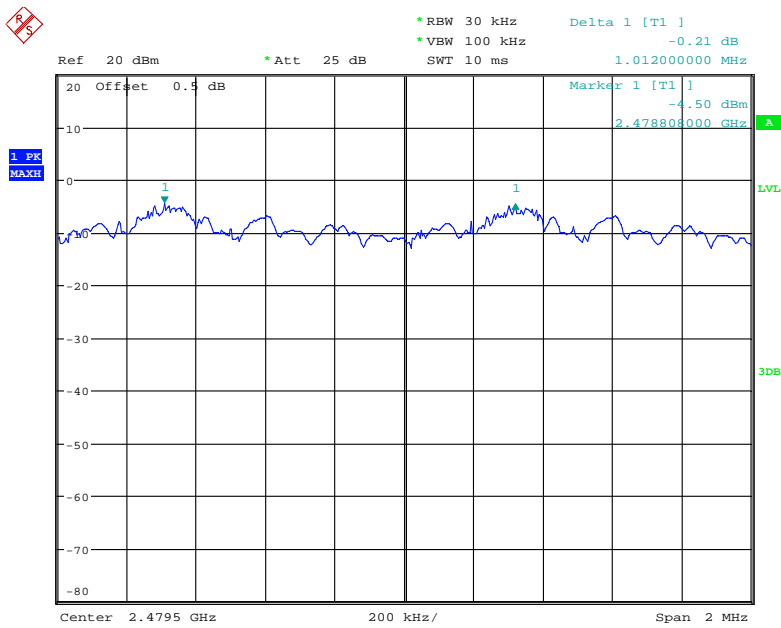

Date: 26.JUN.2019 10:26:48

FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2019-05-09	2020-05-09
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	28.1 °C
Relative Humidity:	65 %
ATM Pressure:	100.3 kPa
Test by:	Elena Lei
Test Date:	2019-06-26

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

Mode	Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
BDR Mode (GFSK)	Low	2402	1.014
	Middle	2441	1.014
	High	2480	1.018
EDR Mode ($\pi/4$ -DQPSK)	Low	2402	1.371
	Middle	2441	1.319
	High	2480	1.327
EDR Mode (8DPSK)	Low	2402	1.423
	Middle	2441	1.375
	High	2480	1.355


BDR Mode (GFSK):

Low Channel

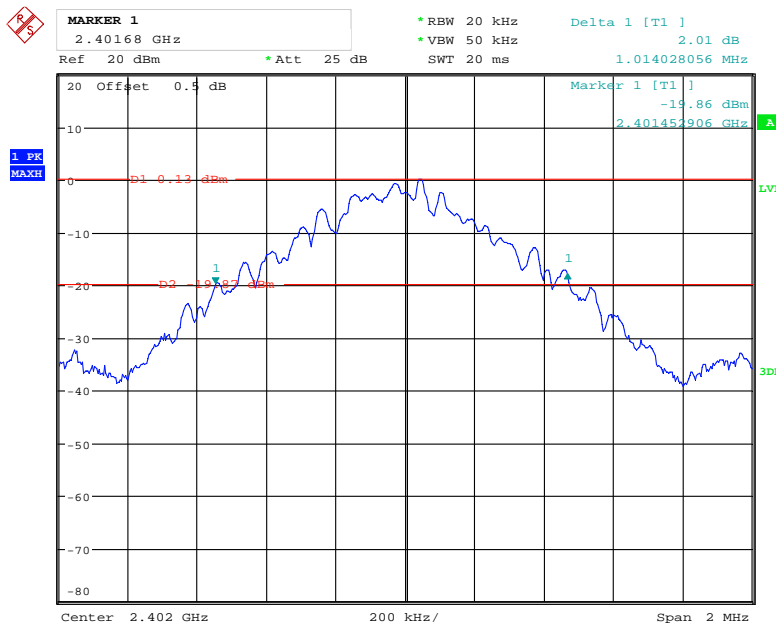


Date: 26.JUN.2019 09:33:24

Middle Channel

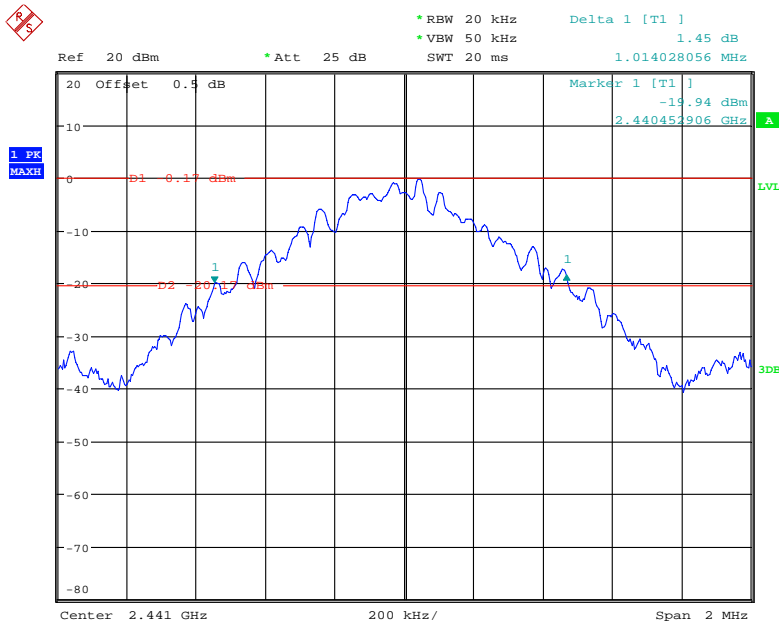

Date: 26.JUN.2019 09:35:07


High Channel

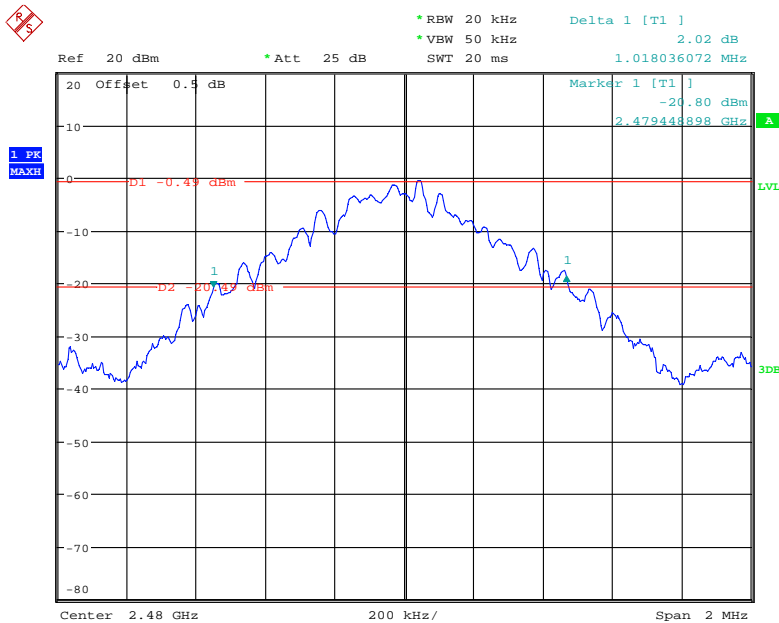

Date: 26.JUN.2019 09:37:51


EDR Mode ($\pi/4$ -DQPSK):

Low Channel

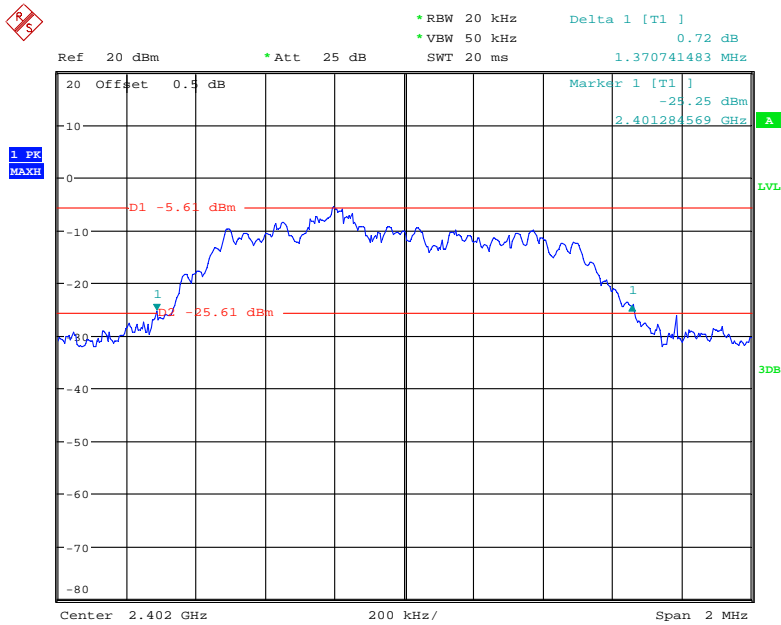


Date: 26.JUN.2019 10:03:40

Middle Channel

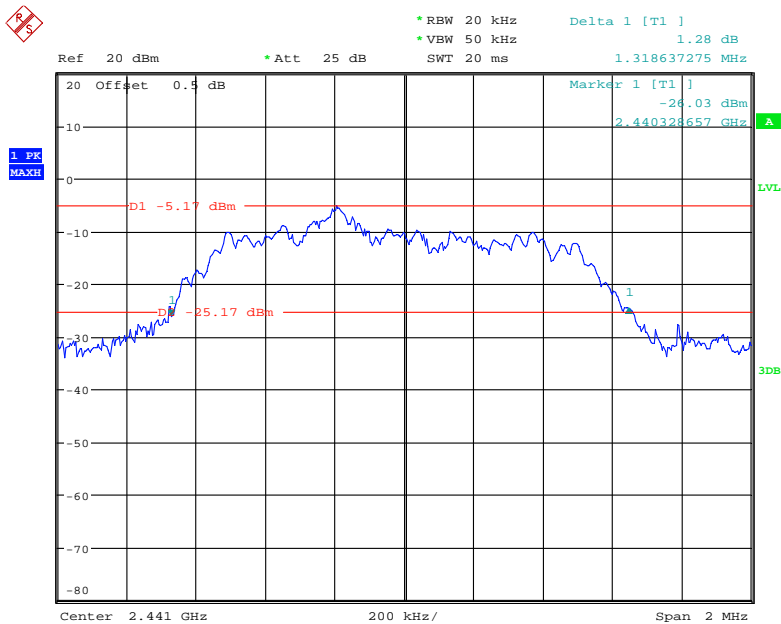

Date: 26.JUN.2019 10:06:39


High Channel

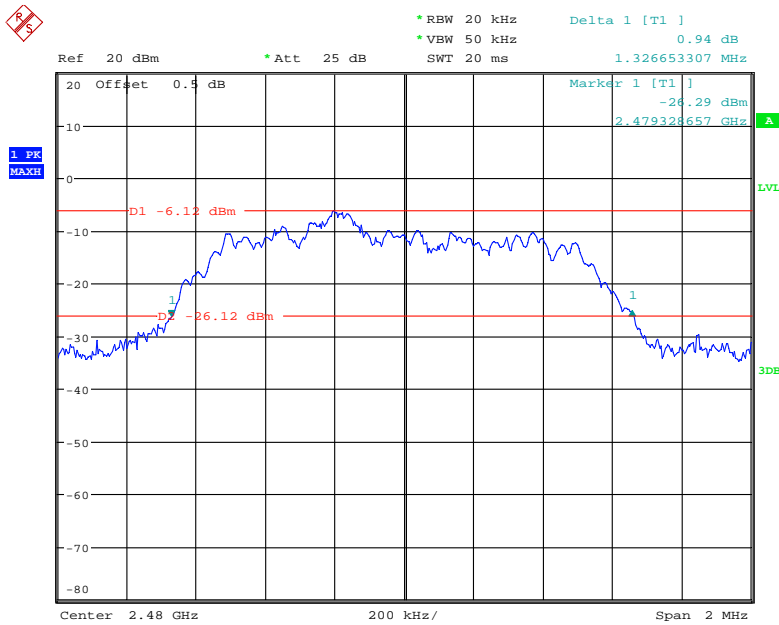

Date: 26.JUN.2019 10:08:56


EDR Mode (8DPSK):

Low Channel

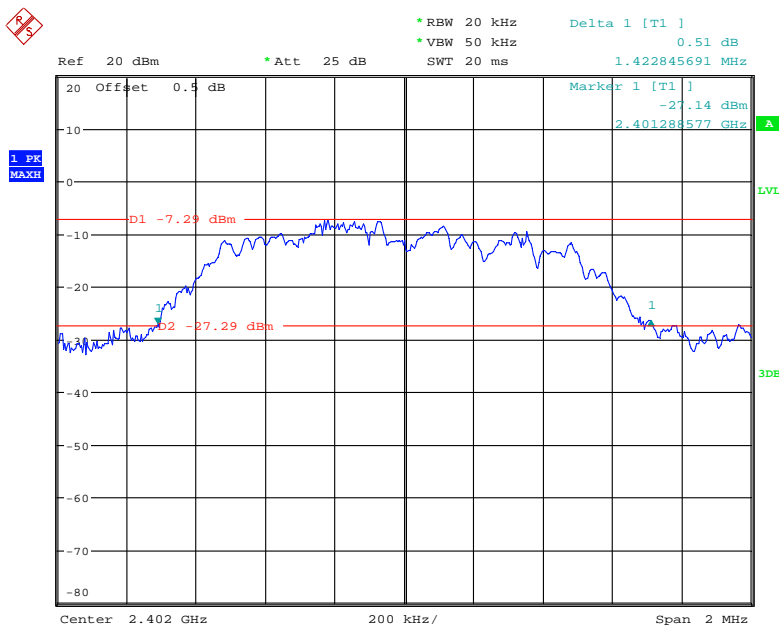


Date: 26.JUN.2019 10:16:39

Middle Channel

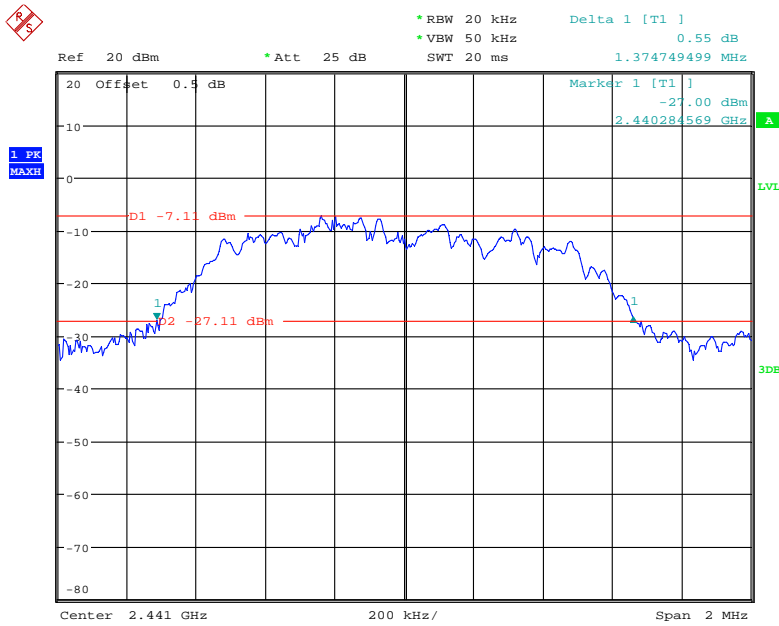

Date: 26.JUN.2019 10:14:31

High Channel

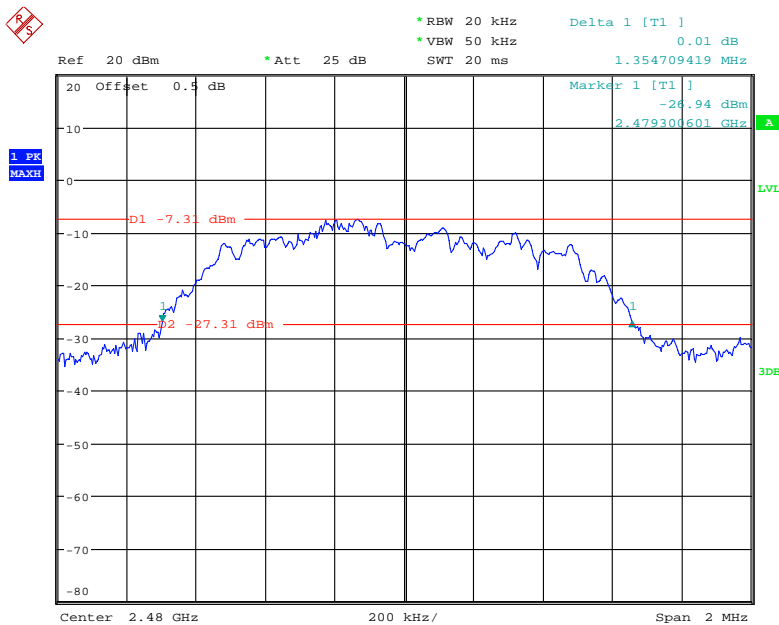

Date: 26.JUN.2019 10:11:47

FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2019-05-09	2020-05-09
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	25.1~28.1 °C
Relative Humidity:	55~65 %
ATM Pressure:	100.3~100.8 kPa
Test by:	Elena Lei
Test Date:	2019-06-26 & 2019-10-27


Test Result: Compliance.

Please refer to following tables and plots

Test Mode: Transmitting


Test mode	Frequency Range (MHz)	Number of Hopping Channel	Limit
GFSK	2400-2483.5	79	≥15
π/4-DQPSK	2400-2483.5	79	≥15
8DPSK	2400-2483.5	79	≥15

BDR Mode (GFSK)

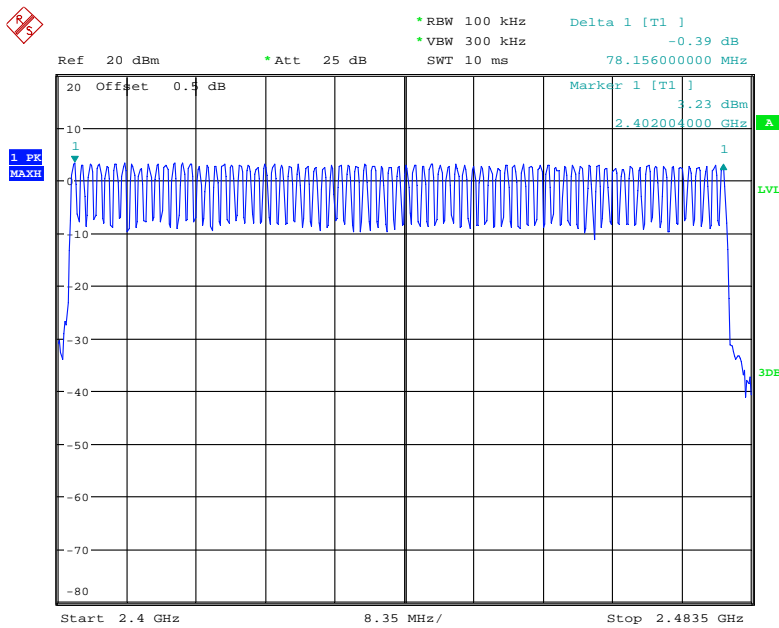


Date: 26.JUN.2019 10:30:05

EDR Mode ($\pi/4$ -DQPSK)

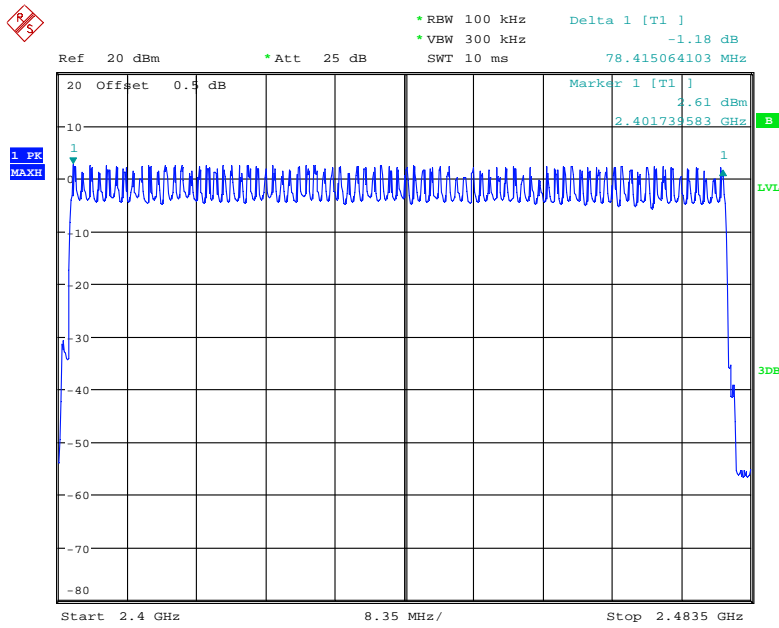

Date: 27.OCT.2019 16:06:06

EDR Mode (8DPSK)

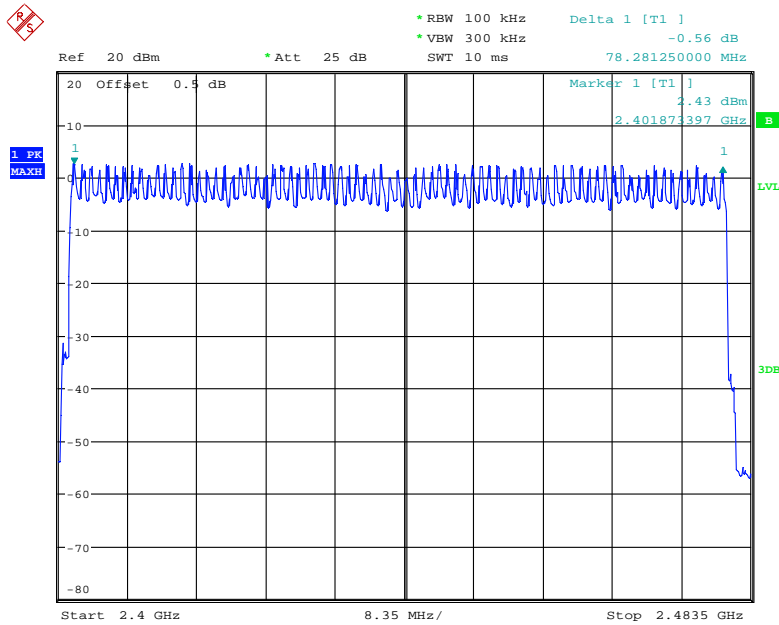

Date: 27.OCT.2019 16:10:07

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT was worked in channel hopping; the time of single pulses was tested.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2019-05-09	2020-05-09
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	28.1 °C
Relative Humidity:	65 %
ATM Pressure:	100.3 kPa
Test by:	Elena Lei
Test Date:	2019-06-26

Test Result: Compliance.

Please refer to following tables and plots


Test Mode: Transmitting

Mode	Packet type	Channel	Frequency (MHz)	Pulse width (ms)	Result (s)	Limit (s)
GFSK	DH1	Middle	2441	0.425	0.136	0.4
	DH3	Middle	2441	1.611	0.258	
	DH5	Middle	2441	2.816	0.300	
$\pi/4$ DQPSK	2DH1	Middle	2441	0.407	0.130	
	2DH3	Middle	2441	1.774	0.284	
	2DH5	Middle	2441	2.976	0.317	
8DPSK	3DH1	Middle	2441	0.425	0.136	
	3DH3	Middle	2441	1.587	0.254	
	3DH5	Middle	2441	2.786	0.297	

Note:
 DH1:Dwell time=Pulse time (ms) × (1600/2/79) ×31.6 s
 DH3:Dwell time=Pulse time (ms) × (1600/4/79) ×31.6 s
 DH5:Dwell time=Pulse time (ms) × (1600/6/79) ×31.6 s


BDR Mode (GFSK):

DH1: Middle Channel

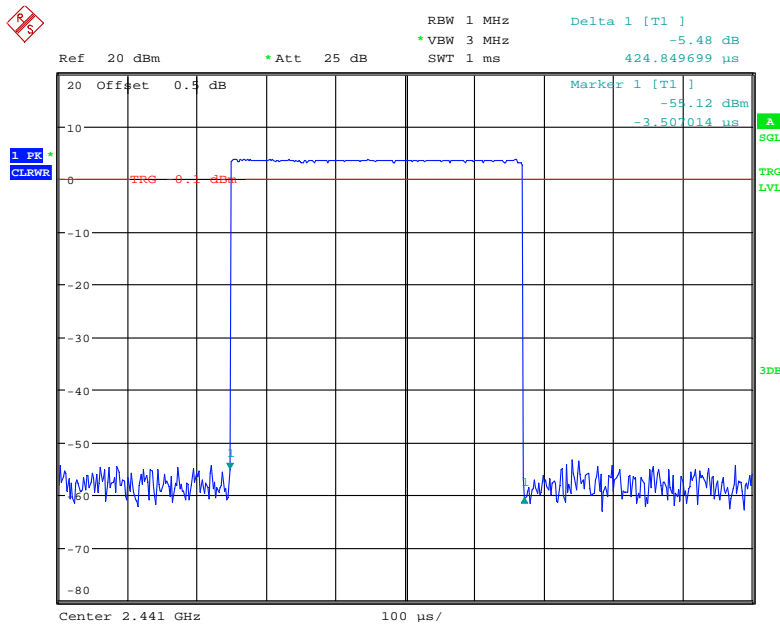


Date: 26.JUN.2019 10:45:58

DH3: Middle Channel

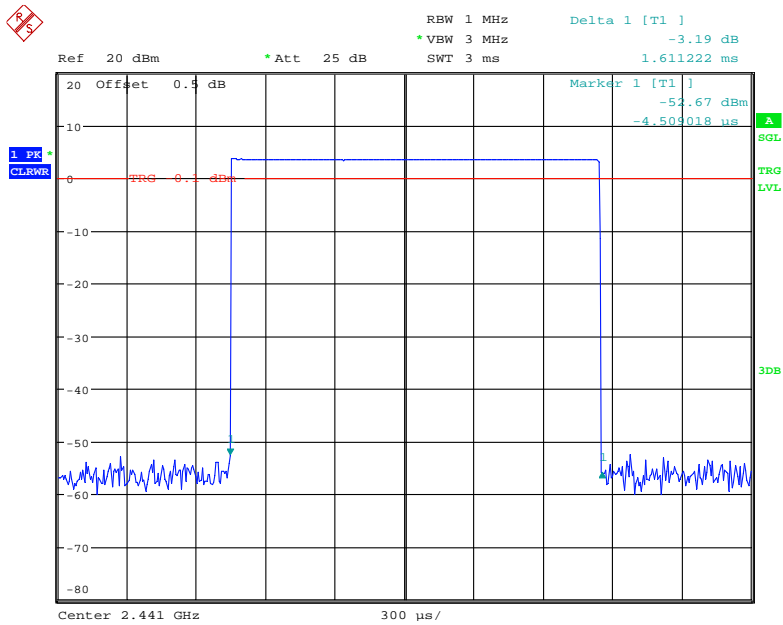

Date: 26.JUN.2019 10:46:31


DH5: Middle Channel

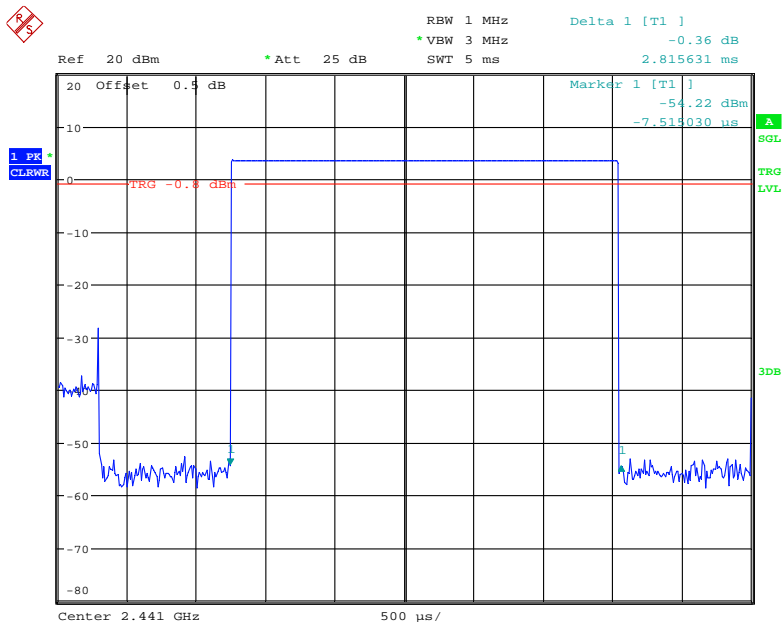

Date: 26.JUN.2019 10:47:00


EDR Mode ($\pi/4$ -DQPSK):

2DH1: Middle Channel

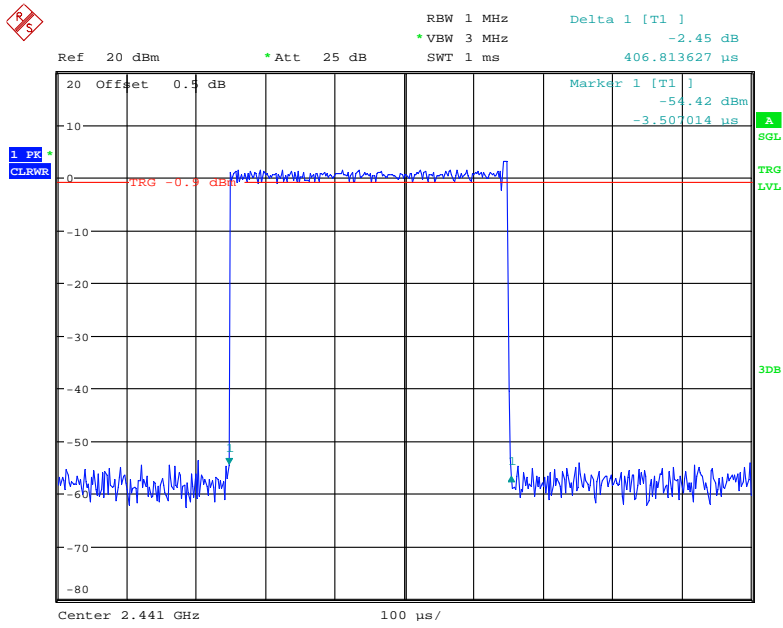


Date: 26.JUN.2019 10:40:52

2DH3: Middle Channel

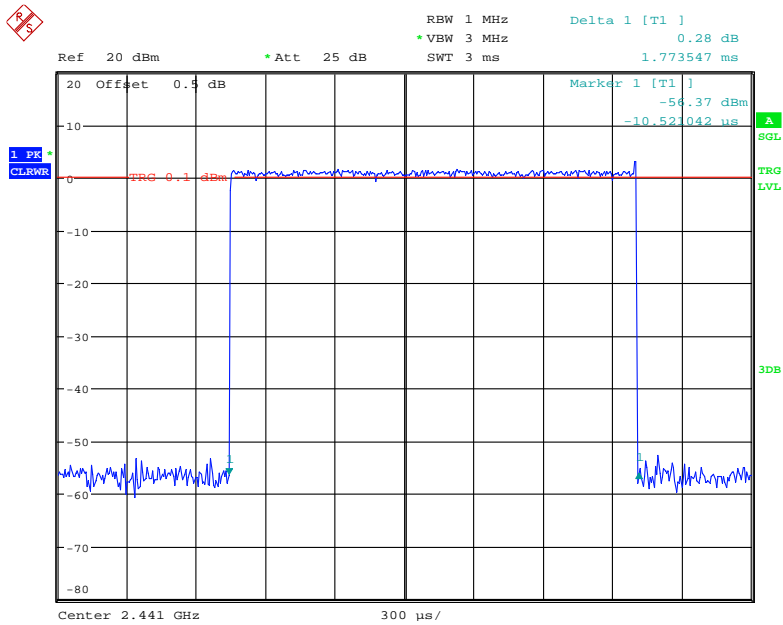

Date: 26.JUN.2019 10:41:21


2DH5: Middle Channel

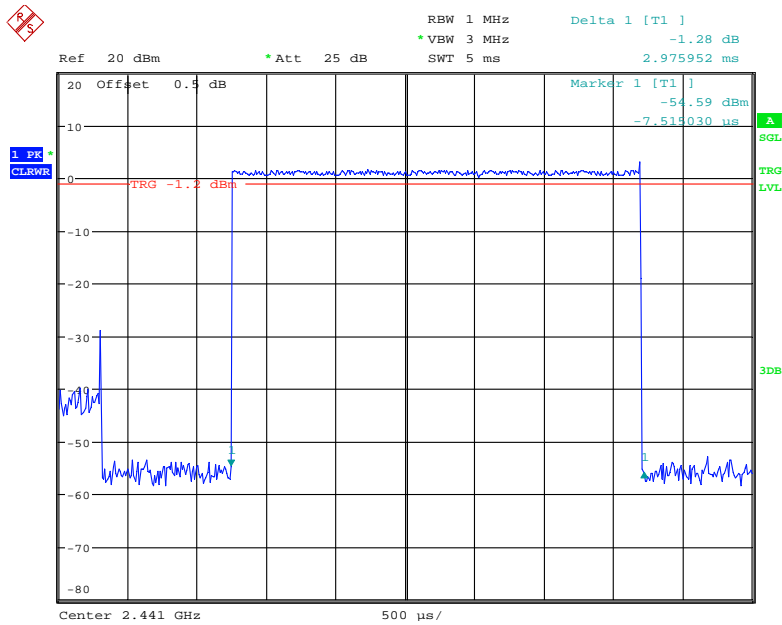

Date: 26.JUN.2019 10:41:49


EDR Mode (8DPSK):

3DH1: Middle Channel

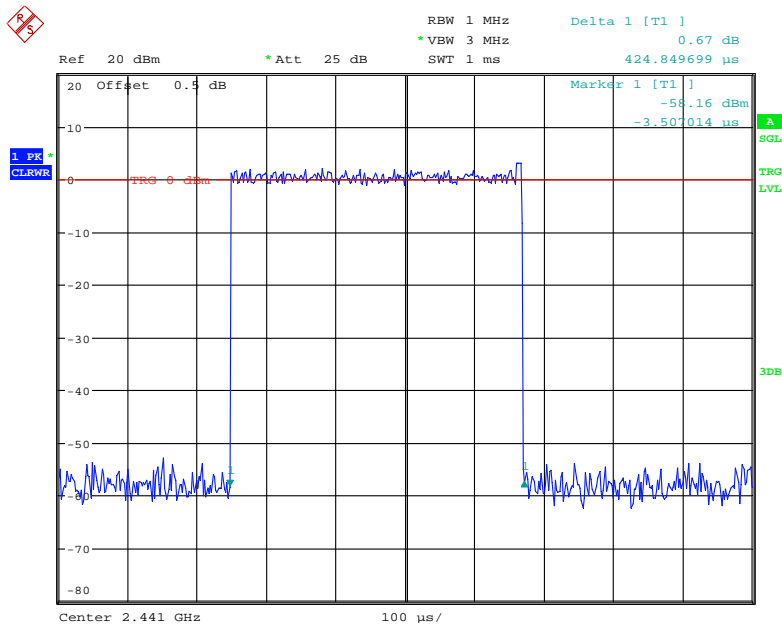


Date: 26.JUN.2019 10:40:18

3DH3: Middle Channel

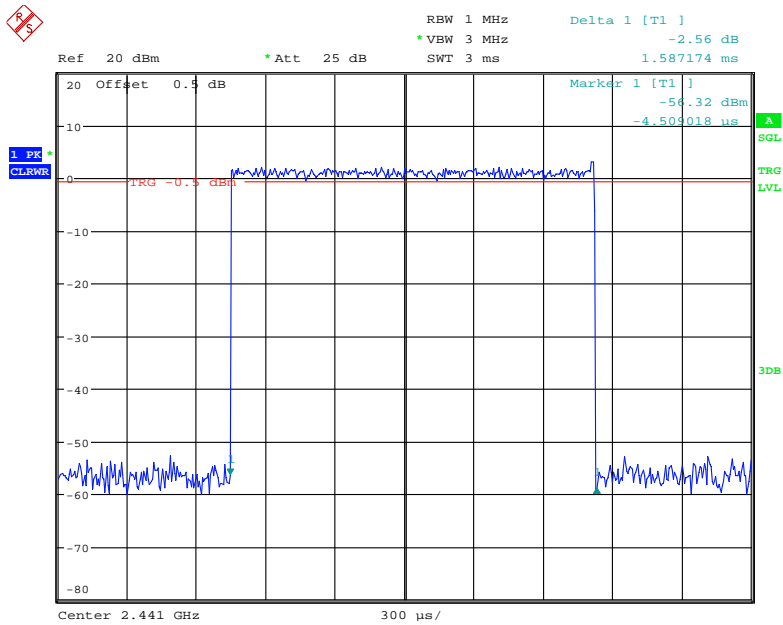

Date: 26.JUN.2019 10:39:15

3DH5: Middle Channel

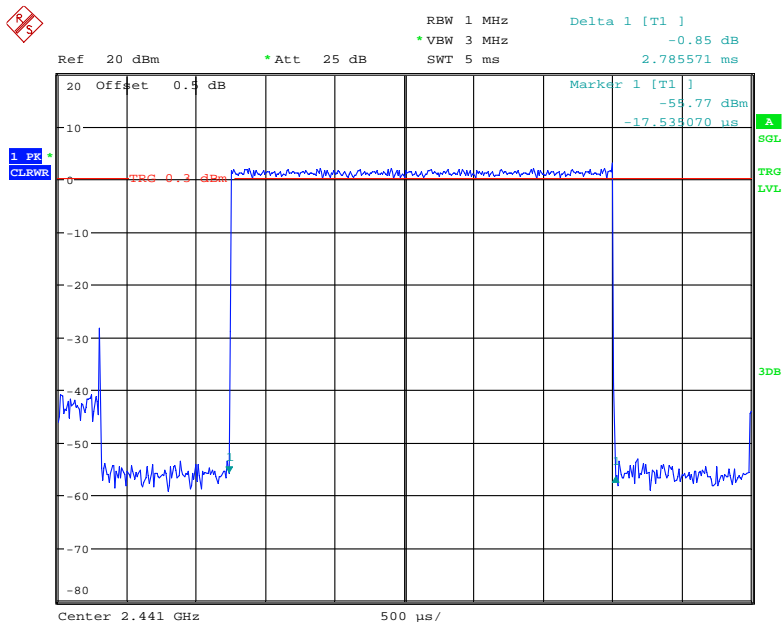

Date: 26.JUN.2019 10:39:42

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2019-05-09	2020-05-09
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	28.1 °C
Relative Humidity:	65 %
ATM Pressure:	100.3 kPa
Test by:	Elena Lei
Test Date:	2019-06-26

Test Result: Compliance.

Test Mode: Transmitting

Mode	Frequency (MHz)	Peak Conducted Output power (dBm)	Limit (dBm)
BDR Mode (GFSK)	2402	3.97	21
	2441	3.67	21
	2480	3.35	21
EDR Mode ($\pi/4$ -DQPSK)	2402	3.91	21
	2441	3.75	21
	2480	3.46	21
EDR Mode (8DPSK)	2402	3.95	21
	2441	3.73	21
	2480	3.45	21

Note: The data above was tested in conducted mode.

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW/ VBW of spectrum analyzer to 100/300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2019-05-09	2020-05-09
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data


Environmental Conditions

Temperature:	28.1 °C
Relative Humidity:	65 %
ATM Pressure:	100.3 kPa
Test by:	Elena Lei
Test Date:	2019-06-26

Test Result: Compliance


Single Channel Mode,
BDR Mode (GFSK):

Band Edge, Left Side

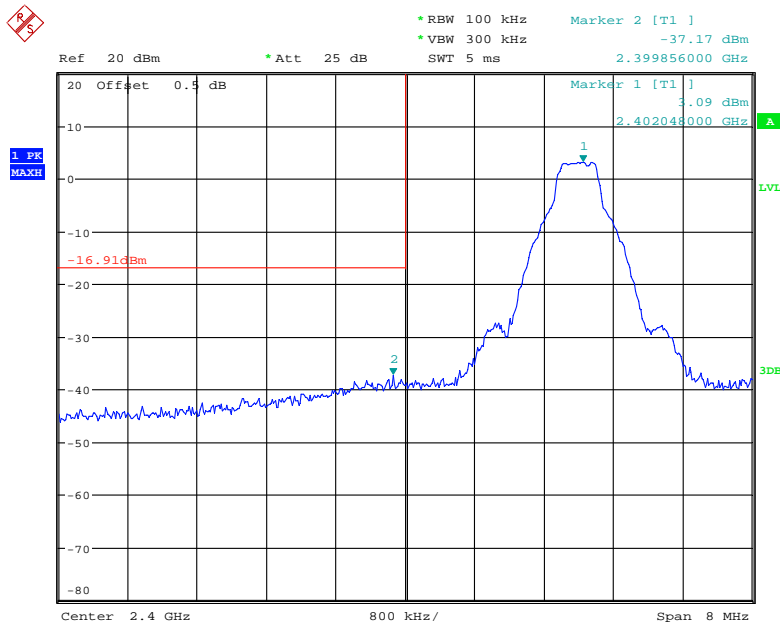

Date: 26.JUN.2019 09:34:24


Band Edge, Right Side

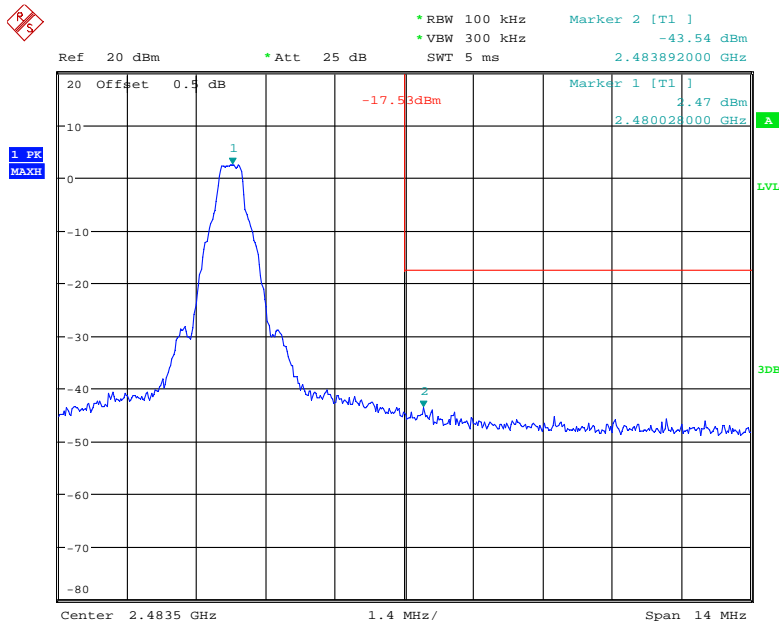

Date: 26.JUN.2019 09:38:53


EDR Mode ($\pi/4$ -DQPSK):

Band Edge, Left Side

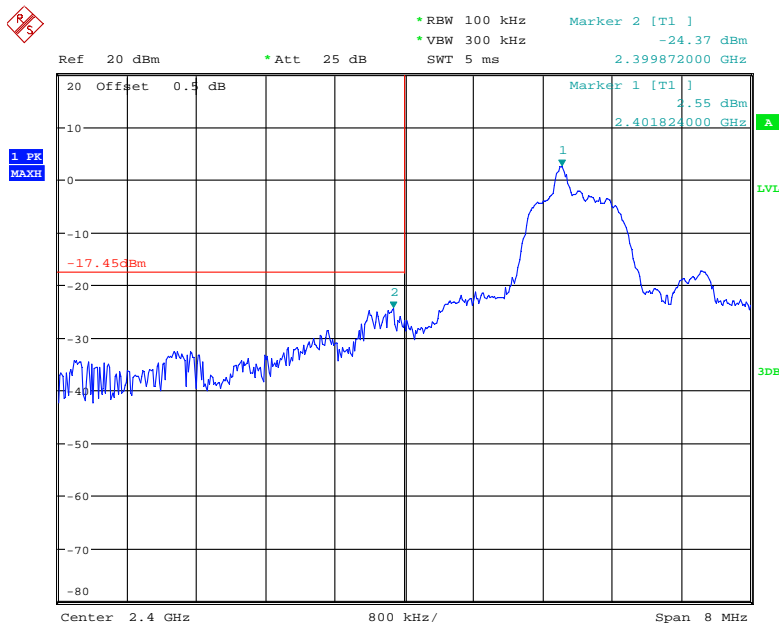

Date: 26.JUN.2019 10:05:46


Band Edge, Right Side

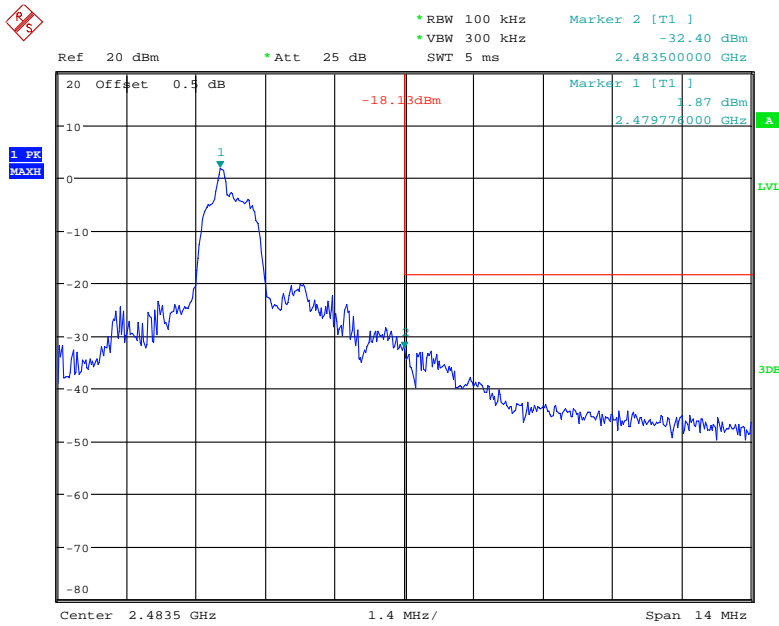

Date: 26.JUN.2019 10:11:01


EDR Mode (8DPSK):

Band Edge, Left Side

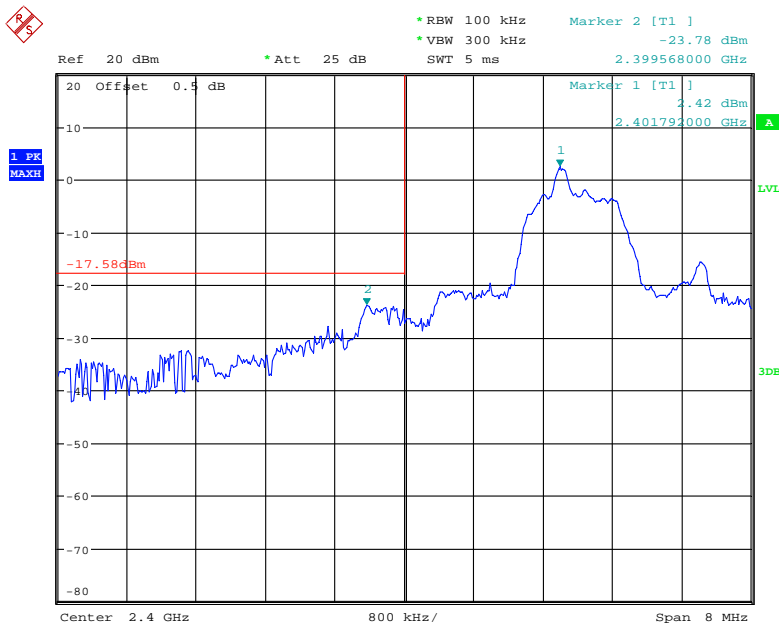

Date: 26.JUN.2019 10:18:42


Band Edge, Right Side

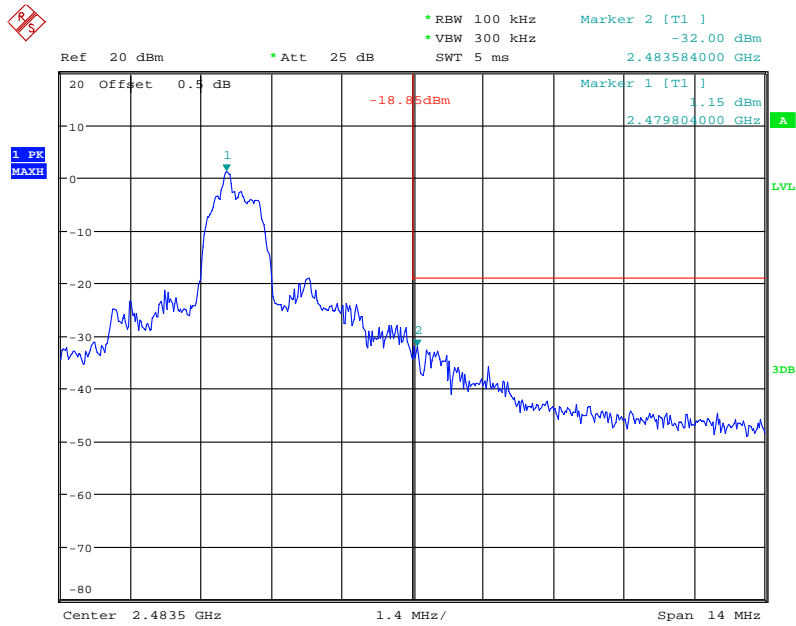

Date: 26.JUN.2019 10:13:58


*Hopping Mode,
BDR Mode (GFSK):*

Band Edge, Left Side

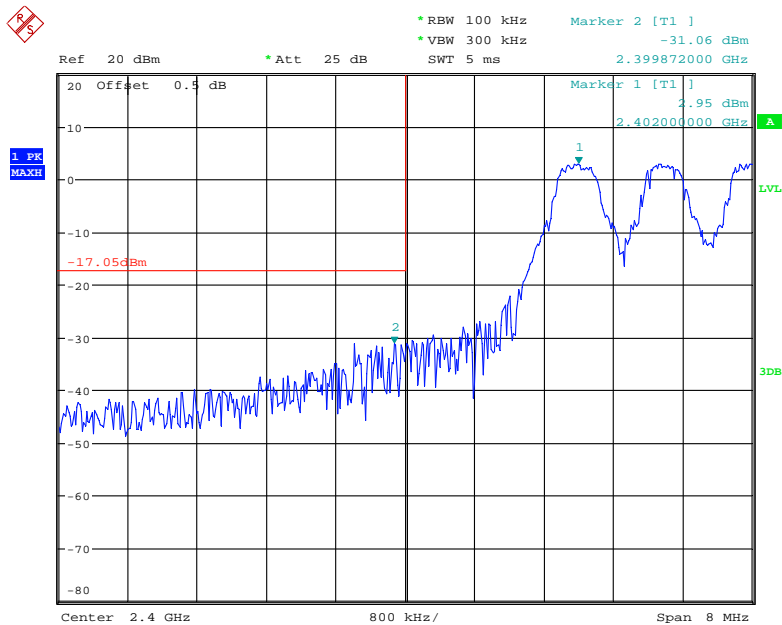

Date: 26.JUN.2019 10:49:03


Band Edge, Right Side

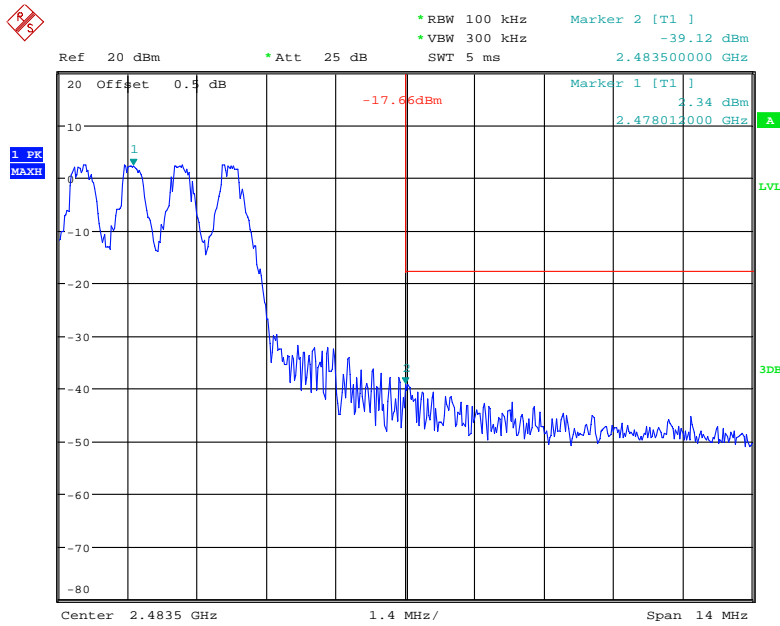

Date: 26.JUN.2019 10:52:05


EDR Mode ($\pi/4$ -DQPSK):

Band Edge, Left Side

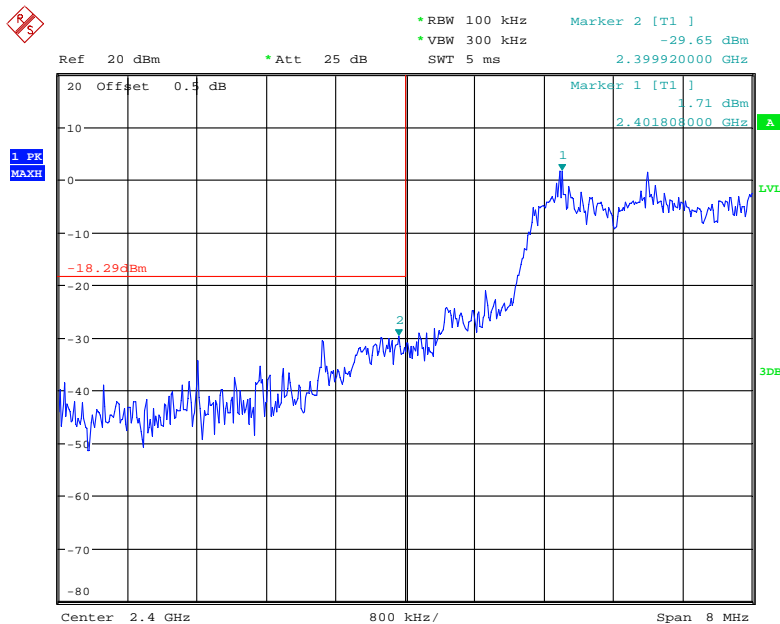

Date: 26.JUN.2019 10:54:52


Band Edge, Right Side

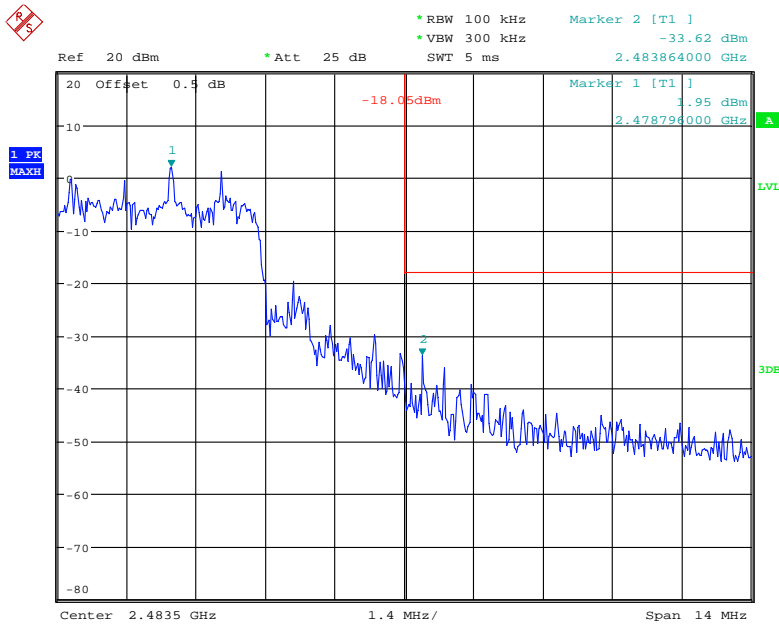

Date: 26.JUN.2019 10:53:32


EDR Mode (8DPSK):

Band Edge, Left Side

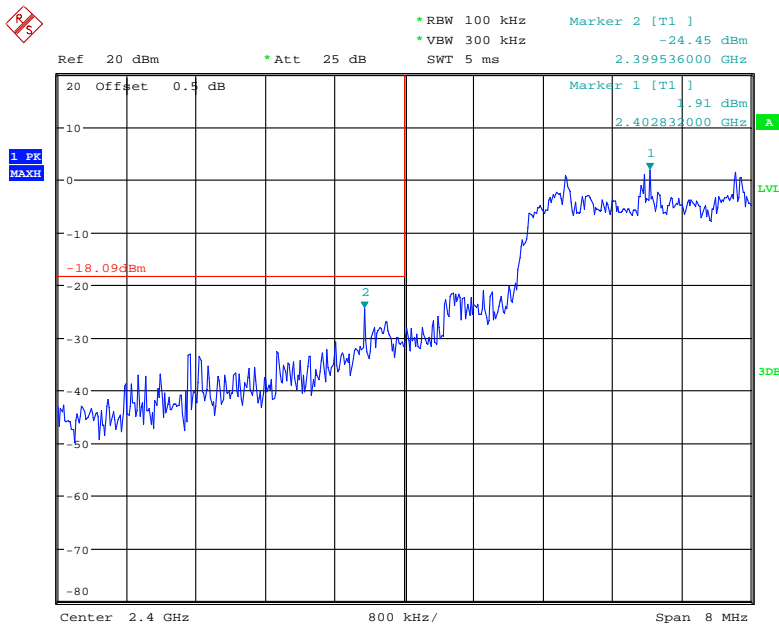

Date: 26.JUN.2019 10:58:30

Band Edge, Right Side

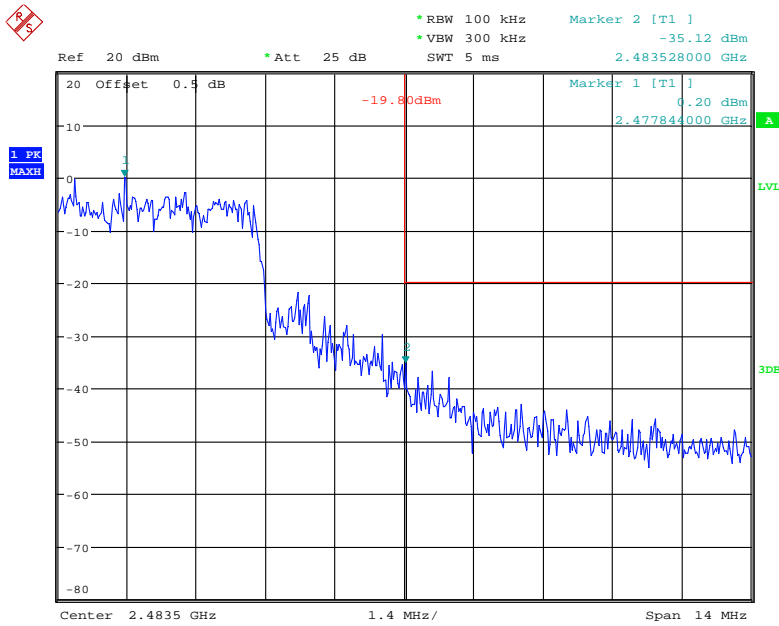

Date: 26.JUN.2019 10:59:34

***** END OF REPORT *****