



TESTING LABORATORY
CERTIFICATE #4820.01



FCC PART 15.247

TEST REPORT

For

D2G Group LLC

81 Commerce Drive , Fall River , Massachusetts , America

FCC ID:2ASCB-DGSN71

Report Type: Original Report	Product Name: Floor Standing Digital Signage
Report Number:	RSH200323050-00B
Report Date:	2020-04-22
Reviewed By:	Ivan Cao  Assistant Manager
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
DECLARATIONS.....	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	9
SUPPORT EQUIPMENT LIST AND DETAILS	9
SUPPORT CABLE LIST AND DETAILS	9
BLOCK DIAGRAM OF TEST SETUP	10
SUMMARY OF TEST RESULTS.....	11
FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	12
APPLICABLE STANDARD	12
FCC §15.203 - ANTENNA REQUIREMENT.....	13
APPLICABLE STANDARD	13
ANTENNA CONNECTOR CONSTRUCTION	13
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	14
APPLICABLE STANDARD	14
EUT SETUP.....	14
EMI TEST RECEIVER SETUP.....	14
TEST PROCEDURE	15
CORRECTED AMPLITUDE & MARGIN CALCULATION	15
TEST EQUIPMENT LIST AND DETAILS.....	15
TEST DATA	15
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	24
APPLICABLE STANDARD	24
EUT SETUP	24
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	25
TEST PROCEDURE	25
CORRECTED AMPLITUDE & MARGIN CALCULATION	25
TEST EQUIPMENT LIST AND DETAILS.....	26
TEST DATA	26
FCC §15.247(a) (2)–6 dB EMISSION BANDWIDTH.....	39
APPLICABLE STANDARD	39
TEST PROCEDURE	39
TEST EQUIPMENT LIST AND DETAILS.....	39
TEST DATA	39
FCC §15.247(b) (3) - MAXIMUM PEAK CONDUCTED OUTPUT POWER.....	47
APPLICABLE STANDARD	47
TEST PROCEDURE	47

TEST EQUIPMENT LIST AND DETAILS.....	47
TEST DATA	48
FCC §15.247(d)- 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	49
APPLICABLE STANDARD	49
TEST PROCEDURE	49
TEST EQUIPMENT LIST AND DETAILS.....	49
TEST DATA	50
FCC §15.247(e) - POWER SPECTRAL DENSITY	55
APPLICABLE STANDARD	55
TEST PROCEDURE	55
TEST EQUIPMENT LIST AND DETAILS.....	55
TEST DATA	55

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:	Floor Standing Digital Signage
EUT Model:	DGSNFSTCH55
Multiple Models:	DGSNKTCH43WH, DGSNAFNT43, DGFSTCH43E, DGSNFSTCH43, DGFSTCH55E, DGFSTCH55WHE, DGSNFSTCH55WH, DGFSNT43E, DGSNFSNT43, DGFSNT55E, DGSNFSNT55, DGAFNT43E, DGKTCH43WHE, DGKTCH43BKE, DGSNKTCH43BK
Operation Frequency:	2412-2462 MHz(802.11b/g/n ht20) 2402-2480MHz(BLE)
Maximum Peak Output Power (Conducted):	23.17 dBm(802.11b/g/n) 5.70 dBm(BLE)
Modulation Type:	DSSS, OFDM(802.11b/g/n) GFSK(BLE)
Rated Input Voltage:	AC 120V
Serial Number:	RSH200323050-RF-S1(Model: DGSNFSTCH55) RSH200323050-RF-S2(Model: DGSNFSTCH43) RSH200323050-RF-S3(Model: DGSNAFNT43) RSH200323050-RF-S4(Model: DGSNKTCH43BK)
EUT Received Date:	2020/3/25
EUT Received Status:	Good

Notes: Model DGSNFSTCH55 was selected for fully testing, and other 3 models only test AC Line Conducted Emission and Spurious Emissions below 1GHz. The detailed information about the difference between DGSNKTCH43WH, DGSNAFNT43, DGFSTCH43E, DGSNFSTCH43, DGFSTCH55E, DGFSTCH55WHE, DGSNFSTCH55WH, DGFSNT43E, DGSNFSNT43, DGFSNT55E, DGSNFSNT55, DGAFNT43E, DGKTCH43WHE, DGKTCH43BKE, DGSNKTCH43BK and model DGSNFSTCH55 can be referred to the declaration letter which was stated and guaranteed by the manufacturer.

Objective

This report is prepared on behalf of **D2G Group LLC** in accordance with Part 2, Subpart J, Part 15, Subparts A and C of the Federal Communications Commission's rules.

The tests were performed in order to determine the compliance of the EUT with FCC Rules Part 15-Subpart C, section 15.203, 15.205, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15C DSS submissions with FCC ID: 2ASCB-DGSN71.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices. And 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.55 dB, 200M~1GHz: 5.92 dB, 1G~6GHz: 4.98 dB, 6G~18GHz: 5.89 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

Declarations

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “△”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA, or any agency of the U.S. Government.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in Engineering Mode, which was provided by the manufacturer.

The device supports 802.11b/g/n ht20 and Bluetooth LE modes.

For 802.11b/g/n ht20, total 11 channels are provided:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

For 802.11b/g/n ht20 was test with channel 1, 6, 11.

The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates, bandwidths, and modulations.

For Bluetooth LE mode, 40 channels are provided for testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404
...
...
..	...	38	2478
19	2440	39	2480

EUT was tested with channel 0, 19 and 39.

EUT Exercise Software


Software `IPOP.exe` was use in test, which was provided by manufacturer. The maximum power was configured as below table, that provided by the manufacturer:

Mode	Channel	Frequency (MHz)	Data rate	Power level Setting
802.11 b	Low	2412	1 Mbps	32
	Middle	2437	1 Mbps	32
	High	2462	1 Mbps	32
802.11 g	Low	2412	6 Mbps	32
	Middle	2437	6 Mbps	32
	High	2462	6 Mbps	32
802.11n ht20	Low	2412	MCS0	32
	Middle	2437	MCS0	32
	High	2462	MCS0	32


Bluetooth LE mode was configured by the system default setting

The maximum duty cycle as following table:


Test mode	T _{on} (ms)	T _{on+off} (ms)	Duty Cycle (%)
802.11b	100	100	100
802.11g	1.397	1.439	97.08
802.11n th20	1.359	1.659	81.92
BLE	0.415	0.623	66.61

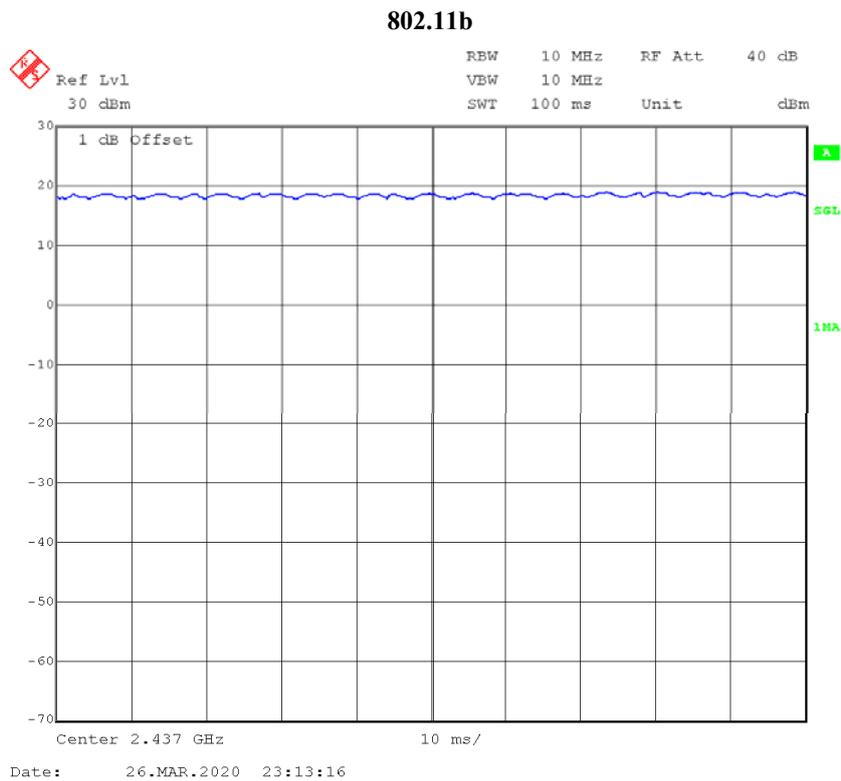


802.11g

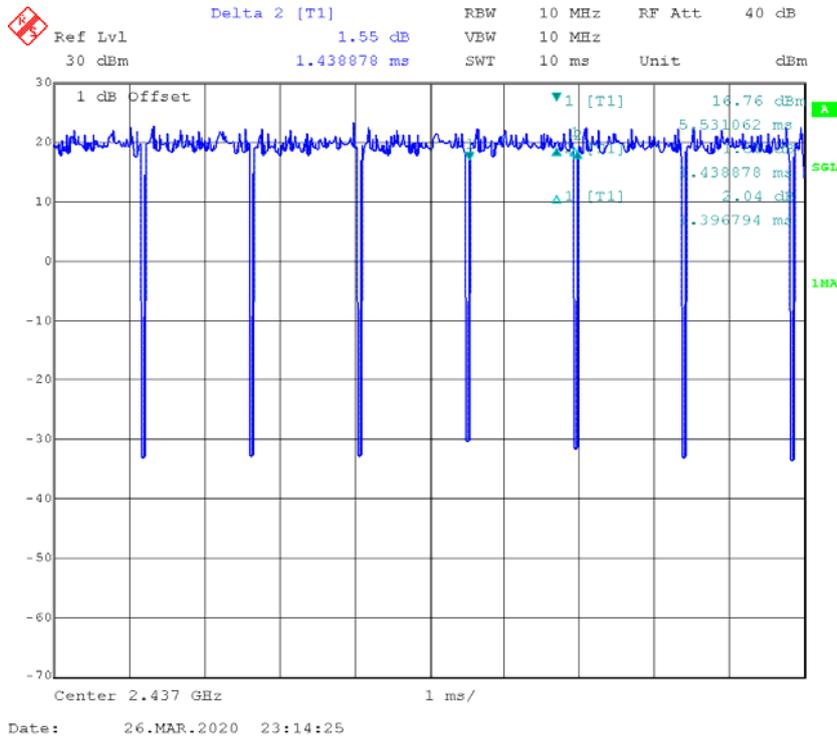

802.11n ht20

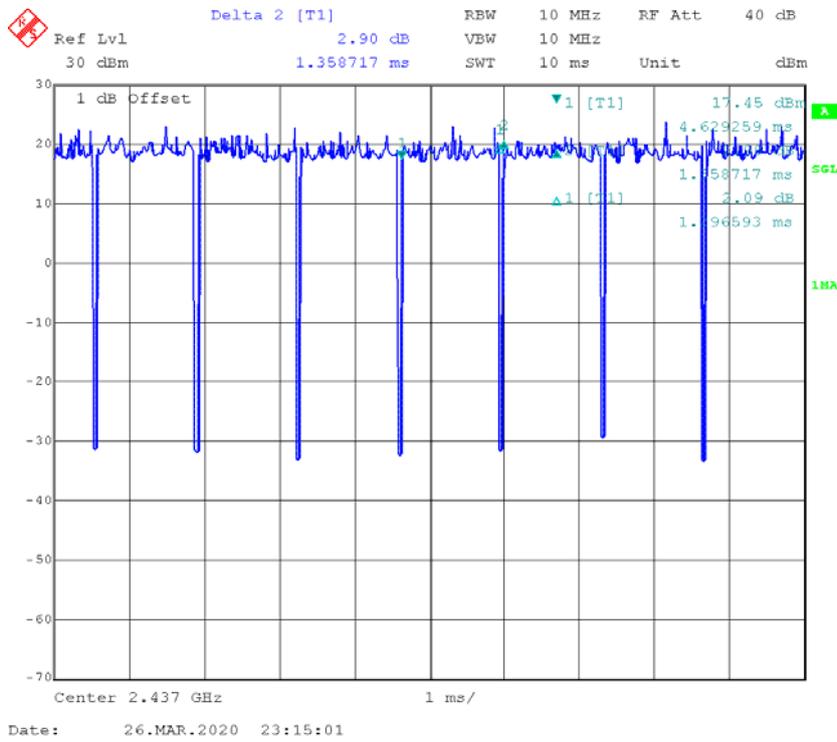

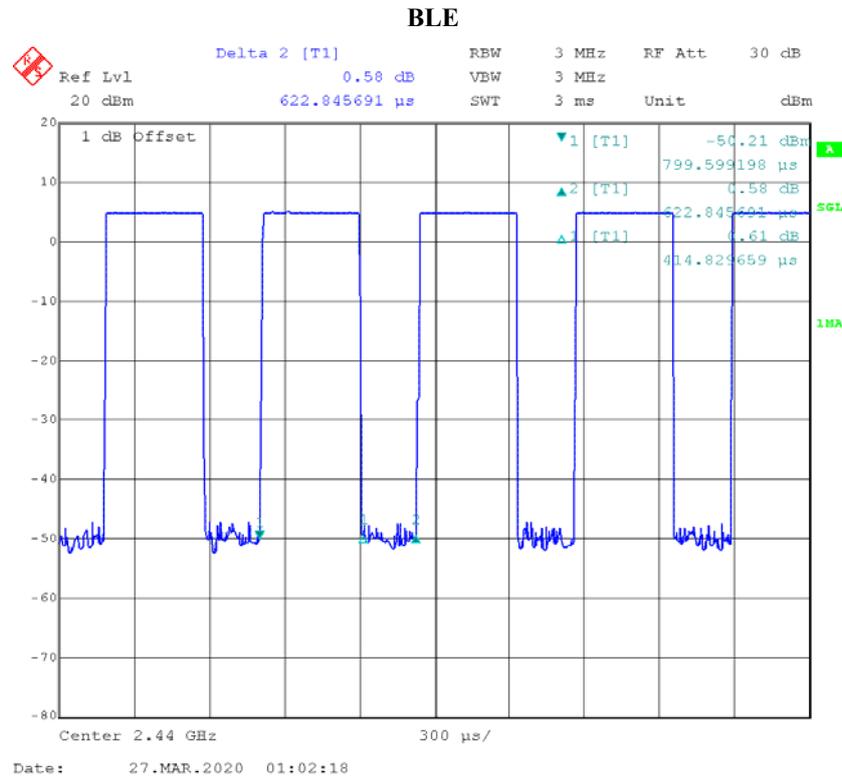

Equipment Modifications

No modification was made to the EUT.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
TOSKIBA	HDD	500G	HDD001
TOSKIBA	HDD	500G	HDD002
TOSKIBA	HDD	500G	HDD003
Lenovo	Laptop	ThinkPad E450	PF-0MR8KV 16/08
HUAWEI	Router	HG8245Q2	2102311RGB6RH1000053

Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
USB Cable	Yes	No	0.5	EUT	HDD
USB Cable	Yes	No	0.5	EUT	HDD
USB Cable	Yes	No	0.5	EUT	HDD
RJ45 Cable	Yes	No	10	EUT	Router
HDMI Cable	Yes	Yes	3.0	EUT	Laptop

Block Diagram of Test Setup

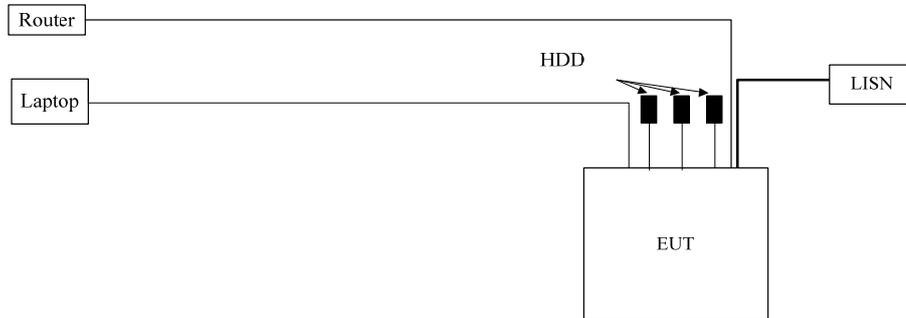

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.247 (i) & §1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Bandwidth	Compliance
§15.247(b)(3)	Maximum Conducted Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247(i) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission’s guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculation formula:

Prediction of power density at the distance of the applicable MPE limit

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Mode	Frequency (MHz)	Antenna Gain		Conducted output power including Tune-up Tolerance		Evaluation Distance (cm)	Power Density (mW/cm²)	MPE Limit (mW/cm²)
		(dBi)	(numeric)	(dBm)	(mW)			
WIFI	2412-2462	2	1.58	24	251.19	20.00	0.079	1.0
BLE	2402-2480	2	1.58	6	3.98	20.00	0.001	1.0

Note: The Bluetooth and WIFI can’t transmit Simultaneously.

Result: The device meet FCC MPE at 20 cm distance

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Antenna Connector Construction

The EUT has one External antenna arrangement, use a unique type of connector to attach to the EUT. fulfill the requirement of this section. Please refer to below information and the EUT photos:

Antenna Type	input impedance (Ohm)	Antenna Gain /Frequency Range
Dipole	50	2 dBi/2.4~2.5GHz


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207(a).

EUT Setup

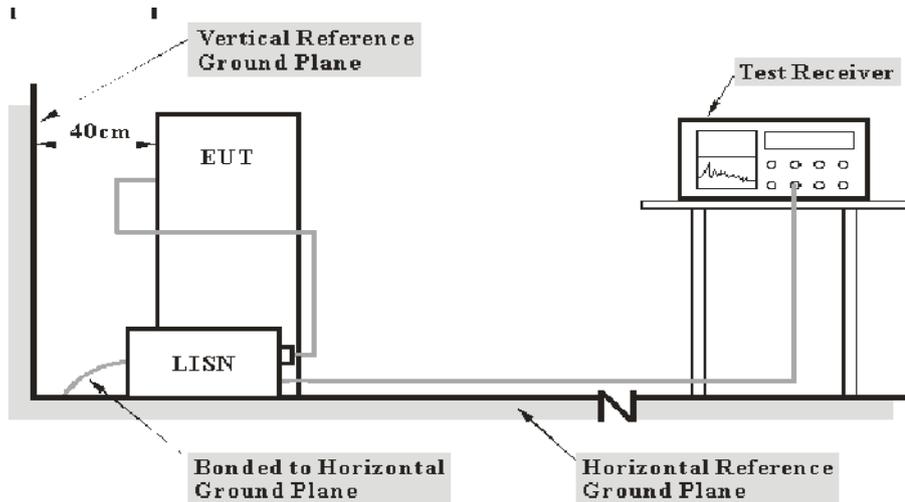

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to the main LISN with a 120 V/60 Hz AC power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

V_C (cord. Reading): corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF: voltage division factor of AMN

C_f : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-01	2019-09-05	2020-09-05
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A
R&S	Two-line V-network	ENV 216	101614	2019-09-12	2020-09-12
R&S	EMI Test Receiver	ESPI	100120	2019-05-09	2020-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data

Environmental Conditions

Temperature:	22.7°C
Relative Humidity:	68%
ATM Pressure:	101.5kPa
Tester:	Sem Xiang
Test Date:	2020-04-03

Test Mode: Transmitting(802.11b mode high channel was the worst)


Model: DGSNFSTCH55
AC120 V, 60 Hz, Line:

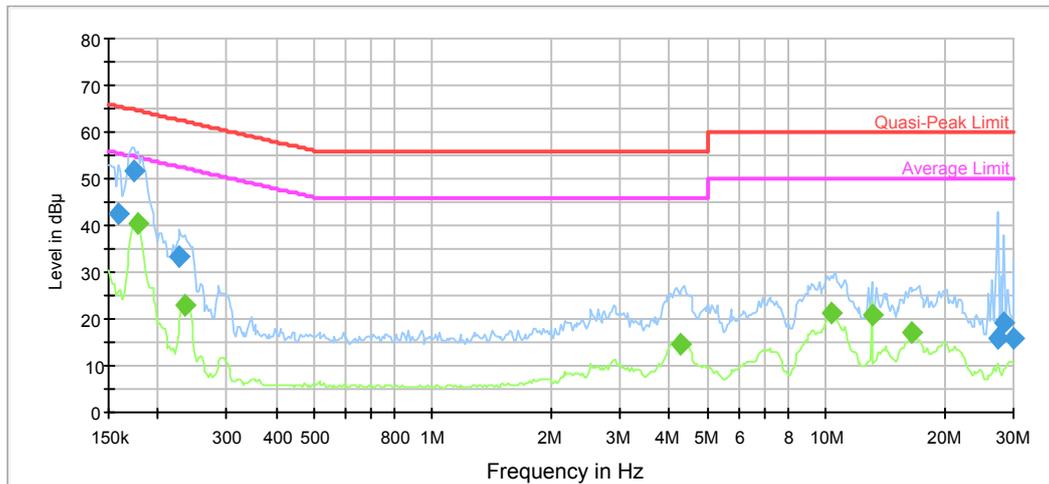

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.159228	42.6	9.000	L1	9.7	22.9	65.5
0.174145	51.9	9.000	L1	9.7	12.9	64.8
0.227819	33.2	9.000	L1	9.7	29.3	62.5
27.300465	15.8	9.000	L1	10.2	44.2	60.0
28.408973	19.1	9.000	L1	10.2	40.9	60.0
30.000000	15.8	9.000	L1	10.3	44.2	60.0

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.177646	40.6	9.000	L1	9.7	14.0	54.6
0.234722	22.8	9.000	L1	9.7	29.5	52.3
4.289380	14.4	9.000	L1	9.8	31.6	46.0
10.296163	21.0	9.000	L1	10.0	29.0	50.0
13.073395	21.0	9.000	L1	10.2	29.0	50.0
16.435388	17.2	9.000	L1	10.3	32.8	50.0

AC120 V, 60 Hz, Neutral:

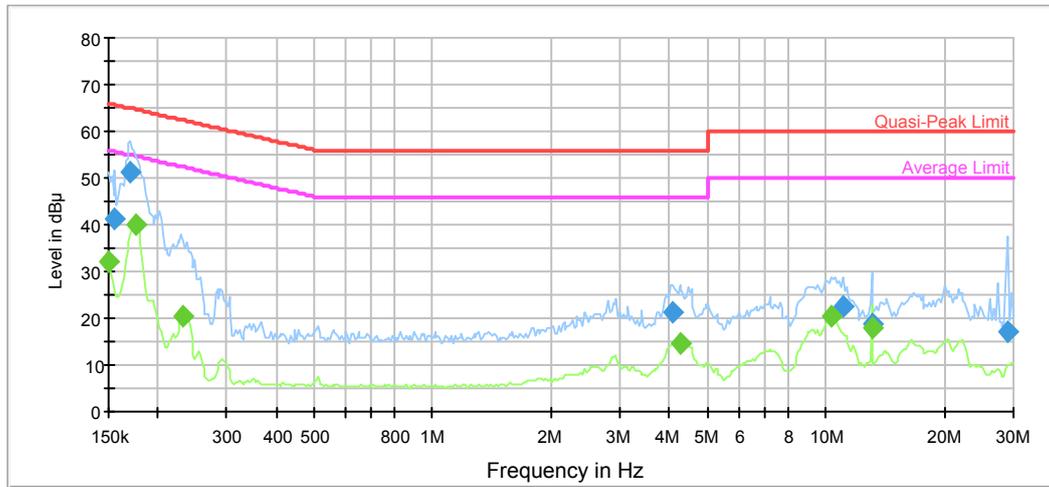


Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.156091	41.2	9.000	N	9.7	24.5	65.7
0.170714	51.2	9.000	N	9.7	13.7	64.9
4.081198	21.2	9.000	N	9.7	34.8	56.0
11.038880	22.5	9.000	N	9.8	37.5	60.0
13.073395	19.0	9.000	N	9.9	41.0	60.0
28.979993	17.2	9.000	N	10.0	42.8	60.0

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	32.1	9.000	N	9.7	23.9	56.0
0.175887	39.8	9.000	N	9.7	14.9	54.7
0.232398	20.4	9.000	N	9.7	32.0	52.4
4.246911	14.7	9.000	N	9.7	31.3	46.0
10.296163	20.5	9.000	N	9.8	29.5	50.0
13.073395	17.9	9.000	N	9.9	32.1	50.0

Model: DGSNFSTCH3


AC120 V, 60 Hz, Line:

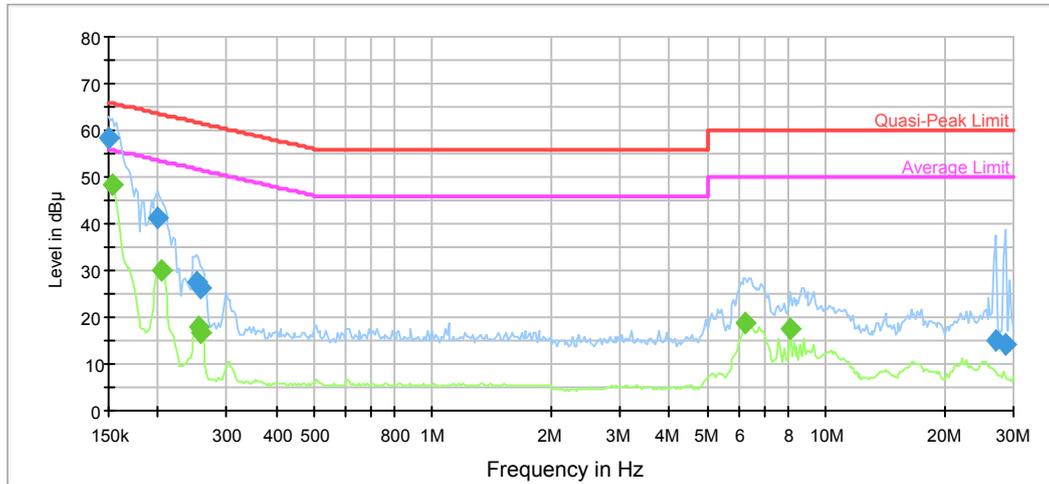

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	58.4	9.000	L1	9.7	7.6	66.0
0.200176	41.3	9.000	L1	9.7	22.3	63.6
0.251654	27.5	9.000	L1	9.7	34.2	61.7
0.256712	26.3	9.000	L1	9.7	35.2	61.5
27.030163	15.0	9.000	L1	10.2	45.0	60.0
28.693063	14.1	9.000	L1	10.2	45.9	60.0

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.153015	48.3	9.000	L1	9.7	7.5	55.8
0.204199	30.0	9.000	L1	9.7	23.5	53.4
0.254170	17.8	9.000	L1	9.7	33.8	51.6
0.256712	16.9	9.000	L1	9.7	34.6	51.5
6.260467	18.9	9.000	L1	9.9	31.1	50.0
8.108909	17.5	9.000	L1	9.9	32.5	50.0

AC120 V, 60 Hz, Neutral:

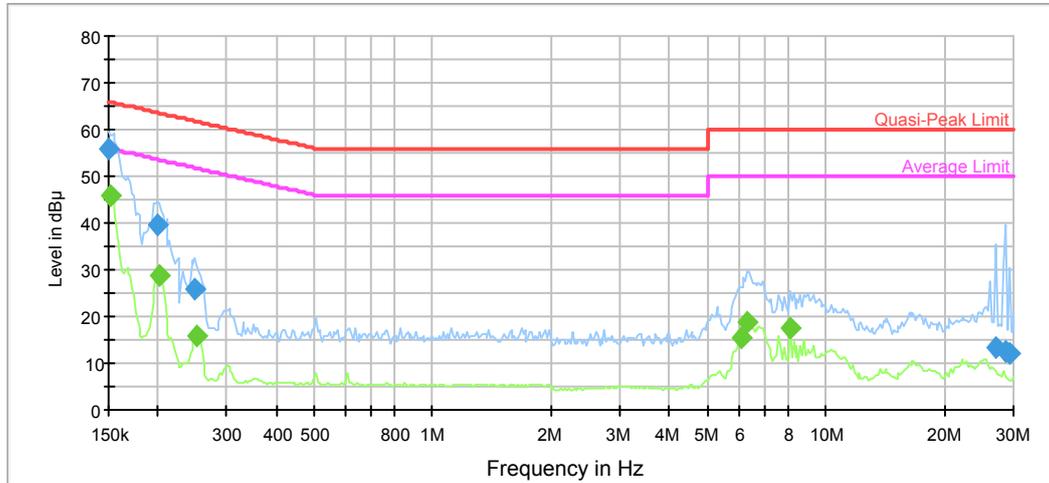


Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.150000	55.9	9.000	N	9.7	10.1	66.0
0.200176	39.5	9.000	N	9.7	24.1	63.6
0.249162	25.7	9.000	N	9.7	36.1	61.8
27.030163	13.4	9.000	N	10.0	46.6	60.0
28.693063	12.5	9.000	N	10.0	47.5	60.0
29.269793	12.0	9.000	N	10.0	48.0	60.0

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.151500	46.0	9.000	N	9.7	9.9	55.9
0.202177	28.9	9.000	N	9.7	24.6	53.5
0.251654	15.9	9.000	N	9.7	35.8	51.7
6.076347	15.4	9.000	N	9.7	34.6	50.0
6.323071	18.8	9.000	N	9.7	31.2	50.0
8.108909	17.6	9.000	N	9.7	32.4	50.0

MODEL: DGSNAFNT43


AC120 V, 60 Hz, Line:

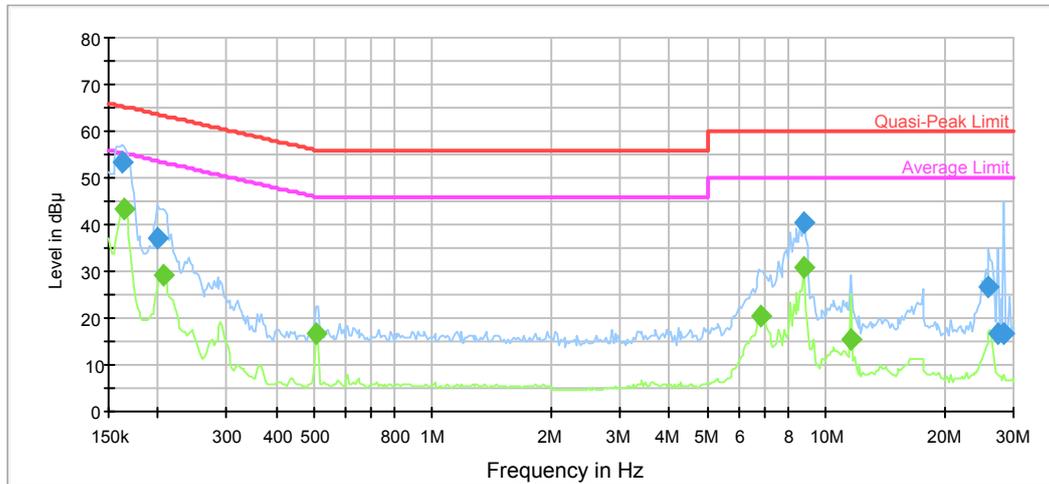

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.162429	53.2	9.000	L1	9.7	12.1	65.3
0.200176	37.3	9.000	L1	9.7	26.3	63.6
8.780787	40.5	9.000	L1	9.9	19.5	60.0
25.975455	26.7	9.000	L1	10.2	33.3	60.0
27.300465	16.5	9.000	L1	10.2	43.5	60.0
28.408973	16.6	9.000	L1	10.2	43.4	60.0

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.164053	43.2	9.000	L1	9.7	12.1	55.3
0.206241	29.0	9.000	L1	9.7	24.4	53.4
0.505009	16.6	9.000	L1	9.7	29.4	46.0
6.846980	20.6	9.000	L1	9.9	29.4	50.0
8.780787	30.8	9.000	L1	9.9	19.2	50.0
11.601974	15.5	9.000	L1	10.1	34.5	50.0

AC120 V, 60 Hz, Neutral:

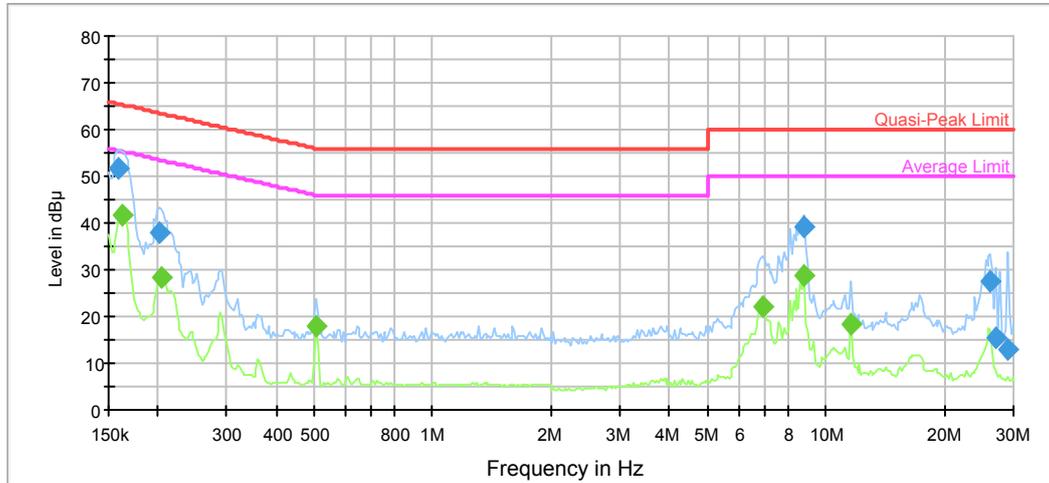


Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.159228	51.6	9.000	N	9.7	13.9	65.5
0.202177	37.9	9.000	N	9.7	25.6	63.5
8.780787	39.3	9.000	N	9.7	20.7	60.0
26.235210	27.5	9.000	N	10.0	32.5	60.0
27.030163	15.6	9.000	N	10.0	44.4	60.0
28.979993	12.8	9.000	N	10.0	47.2	60.0

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.162429	41.9	9.000	N	9.7	13.4	55.3
0.204199	28.3	9.000	N	9.7	25.1	53.4
0.505009	17.9	9.000	N	9.6	28.1	46.0
6.915450	22.0	9.000	N	9.7	28.0	50.0
8.780787	28.9	9.000	N	9.7	21.1	50.0
11.601974	18.4	9.000	N	9.8	31.6	50.0

MODEL: DGSNKTCH43BK


AC120 V, 60 Hz, Line:

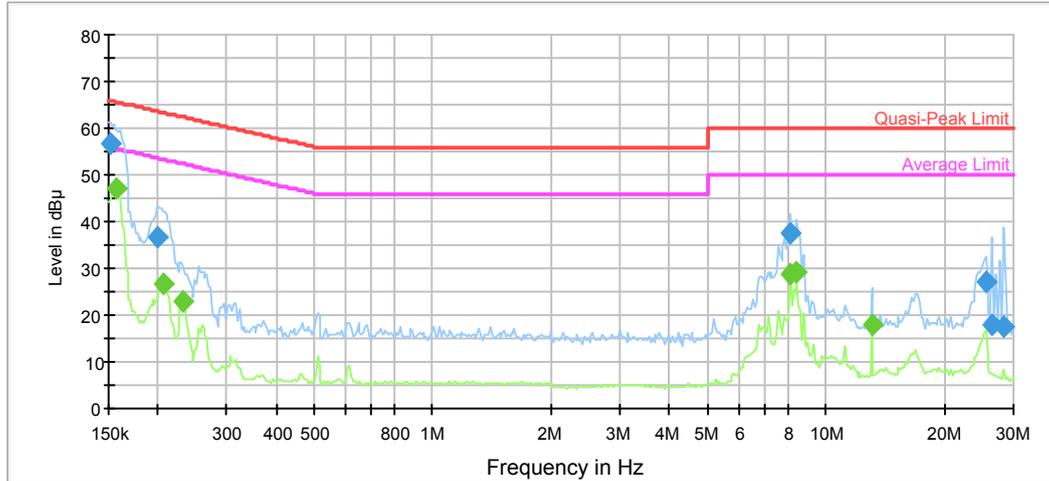

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.151500	56.6	9.000	L1	9.7	9.3	65.9
0.200176	36.5	9.000	L1	9.7	27.1	63.6
8.108909	37.5	9.000	L1	9.9	22.5	60.0
25.463636	26.9	9.000	L1	10.2	33.1	60.0
26.497562	18.1	9.000	L1	10.2	41.9	60.0
28.408973	17.3	9.000	L1	10.2	42.7	60.0

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.157652	47.0	9.000	L1	9.7	8.6	55.6
0.206241	26.6	9.000	L1	9.7	26.8	53.4
0.232398	22.9	9.000	L1	9.7	29.5	52.4
8.108909	28.7	9.000	L1	9.9	21.3	50.0
8.438163	29.2	9.000	L1	9.9	20.8	50.0
13.073395	18.1	9.000	L1	10.2	31.9	50.0

AC120 V, 60 Hz, Neutral:

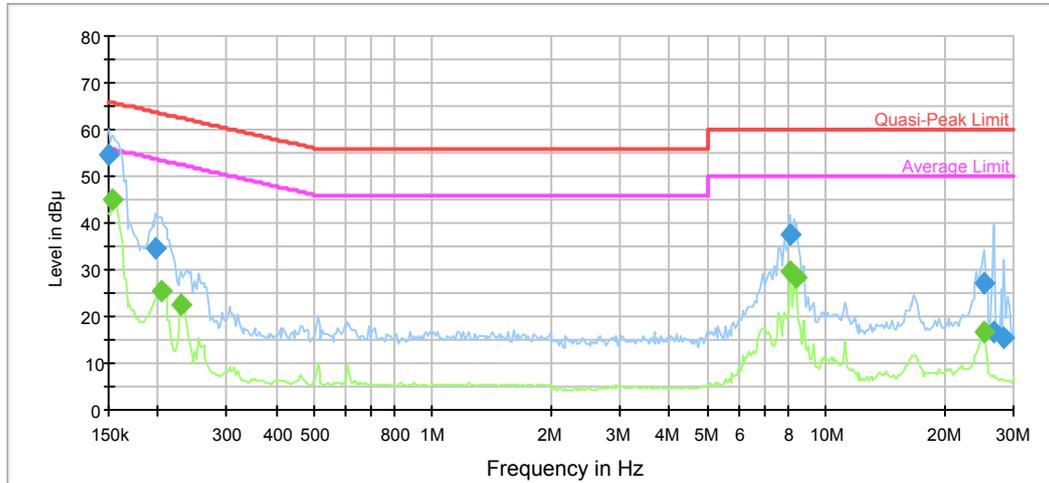

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.150000	54.5	9.000	N	9.7	11.5	66.0
0.198194	34.6	9.000	N	9.7	29.1	63.7
8.108909	37.4	9.000	N	9.7	22.6	60.0
25.211521	27.2	9.000	N	10.0	32.8	60.0
26.762538	16.5	9.000	N	10.0	43.5	60.0
28.408973	15.5	9.000	N	10.0	44.5	60.0

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.153015	44.8	9.000	N	9.7	11.0	55.8
0.204199	25.3	9.000	N	9.7	28.1	53.4
0.230097	22.7	9.000	N	9.7	29.7	52.4
8.108909	29.4	9.000	N	9.7	20.6	50.0
8.438163	28.2	9.000	N	9.7	21.8	50.0
25.211521	16.7	9.000	N	10.0	33.3	50.0


FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

EUT Setup

Below 1GHz:

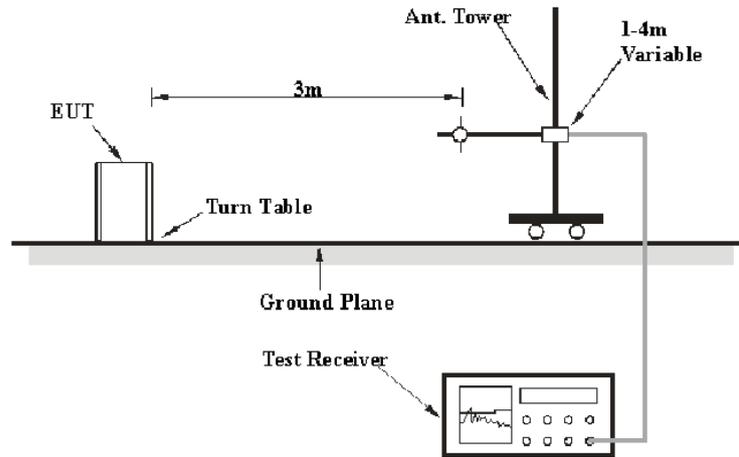

Above 1GHz:

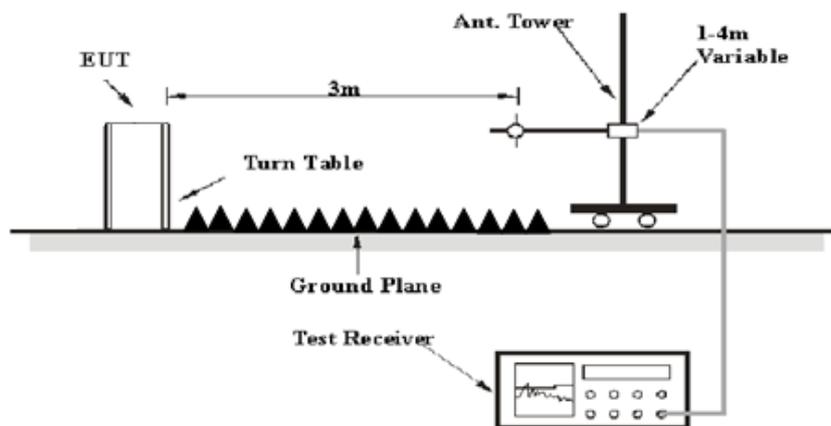

The radiated emission below 1GHz tests were performed in the 3 meters chamber test site A, above 1GHz tests were performed in the 3 meters chamber test site B, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30MHz-1000MHz:

Measurement	RBW	Video B/W	IF B/W
QP	120 kHz	300 kHz	120kHz

1GHz- 25GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
AV	>98%	1MHz	10 Hz
	<98%	1MHz	1/T

Note: T is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiation Below 1GHz					
R&S	EMI Test Receiver	ESR3	102453	2019-09-12	2020-09-12
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1400-01	2019-05-06	2020-05-06
HP	Amplifier	8447D	2727A05902	2019-09-05	2020-09-05
Radiation Above 1GHz					
Agilent	Spectrum Analyzer	E4440A	SG43360054	2019-05-09	2020-05-09
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
TDK RF	Horn Antenna	HRN-0118	130 084	2018-10-12	2021-10-12
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-02	2019-09-05	2020-09-05
Mini-Circuit	Amplifier	ZVA-213-S+	54201245	2019-09-05	2020-09-05
E-Microwave	Band-stop Filters	OBSF-2400-2483.5-S	OE01601525	2019-06-16	2020-06-16
Micro-tronics	High Pass Filter	HPM50111	S/N-G217	2019-06-16	2020-06-16

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Test Items	Radiation Below 1GHz	Radiation Above 1GHz
Temperature:	23.5°C	23.2~23.5°C
Relative Humidity:	52 %	52~54%
ATM Pressure:	101.6kPa	101~101.9 kPa
Tester:	Jalon Liu	Felix Wang
Test Date:	2020-04-16	2020-04-08~2020-04-11


Test Result: Compliance, please Refer to the following data

Test Mode: Transmitting

1) 30MHz-1GHz(802.11b_High channel was the worst)


Model: DGSNFSTCH55:

Horizontal:

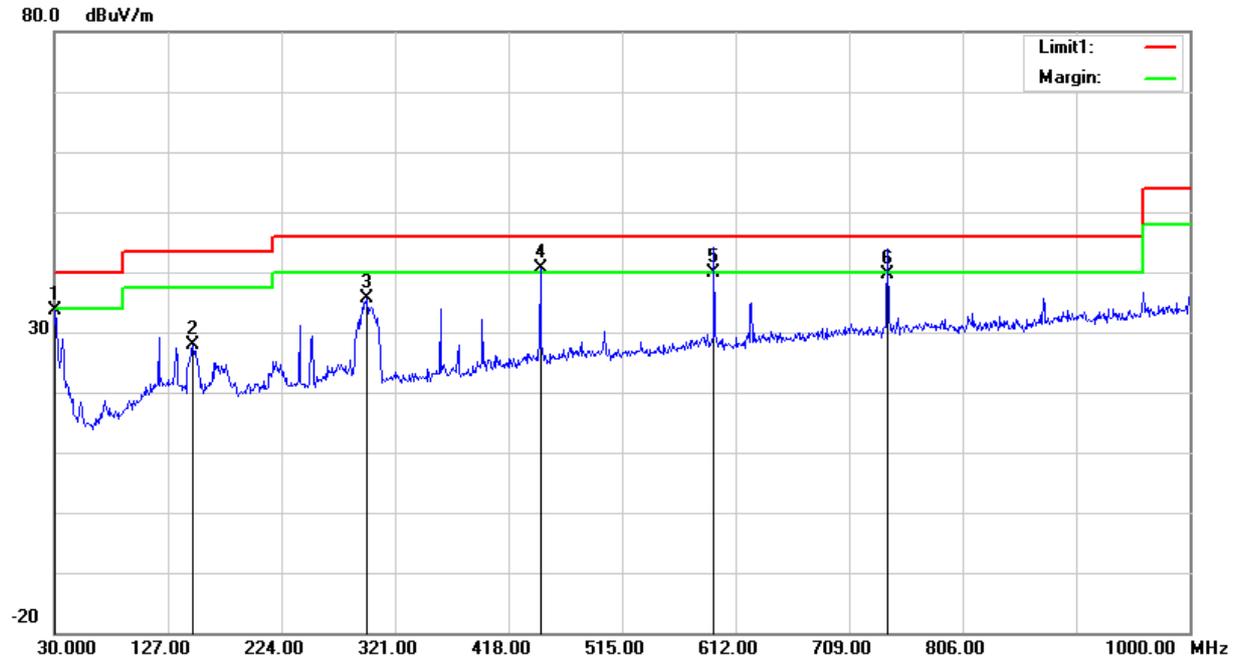

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
30.0000	31.89	peak	1.72	33.61	40.00	6.39
148.3400	33.82	peak	-6.05	27.77	43.50	15.73
296.7500	39.57	peak	-3.90	35.67	46.00	10.33
445.1600	41.75	peak	-1.14	40.61	46.00	5.39
593.5700	39.10	QP	0.86	39.96	46.00	6.04
741.9800	36.10	QP	3.46	39.56	46.00	6.44


Vertical:

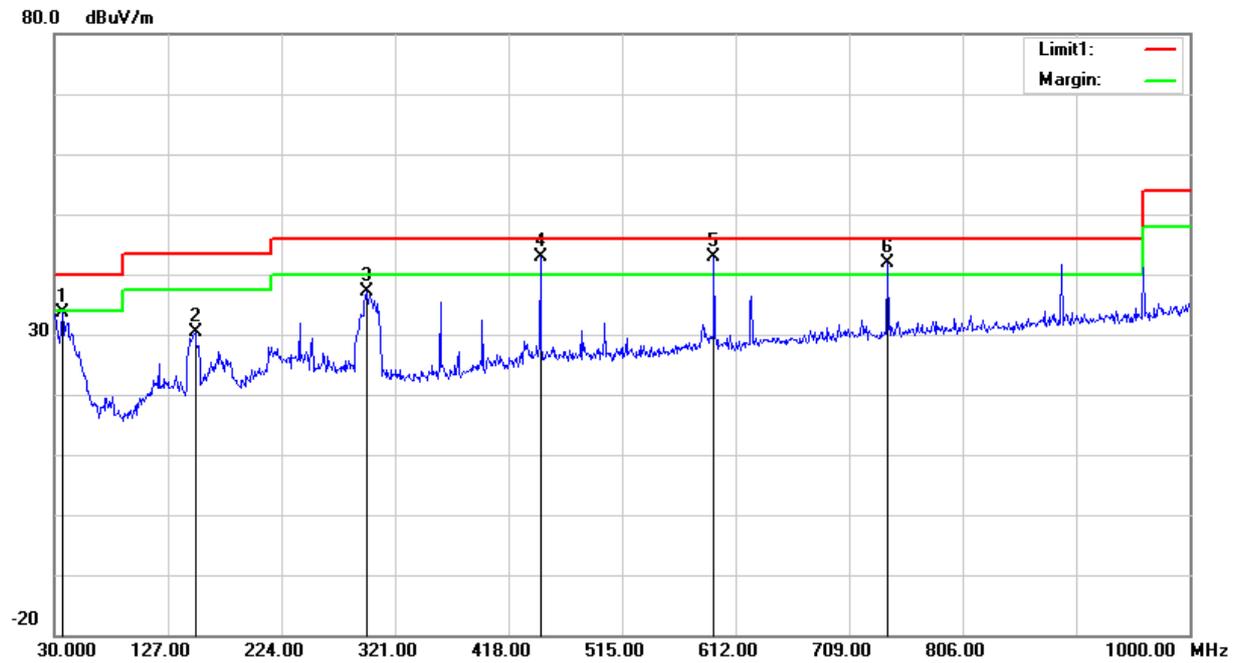

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
36.7900	36.90	peak	-3.38	33.52	40.00	6.48
150.2800	36.45	peak	-5.97	30.48	43.50	13.02
296.7500	40.99	peak	-3.90	37.09	46.00	8.91
445.1600	44.04	peak	-1.14	42.90	46.00	3.10
593.5700	41.96	peak	0.86	42.82	46.00	3.18
741.9800	38.52	peak	3.46	41.98	46.00	4.02


Model: DGSNFSTCH43

Horizontal:

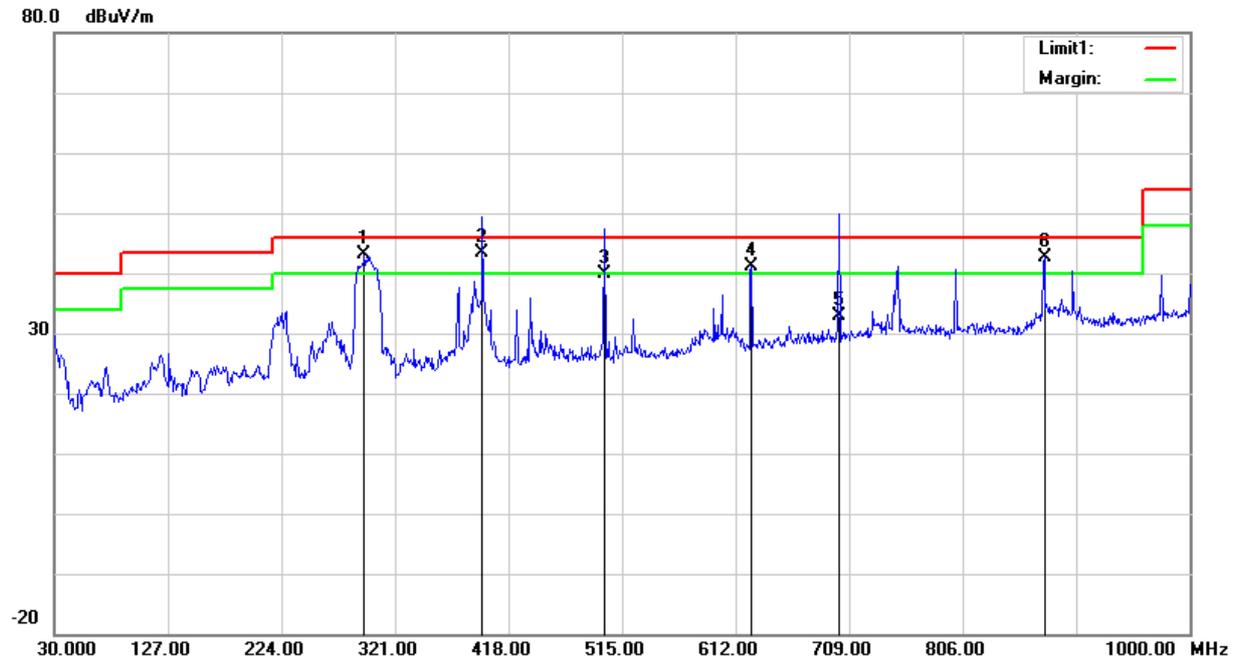

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
294.8100	47.13	peak	-3.88	43.25	46.00	2.75
395.6900	45.50	QP	-2.07	43.43	46.00	2.57
500.4500	40.20	QP	-0.32	39.88	46.00	6.12
625.5800	39.44	peak	1.79	41.23	46.00	4.77
700.2700	30.00	QP	2.96	32.96	46.00	13.04
875.8400	43.35	peak	-0.60	42.75	46.00	3.25


Vertical:

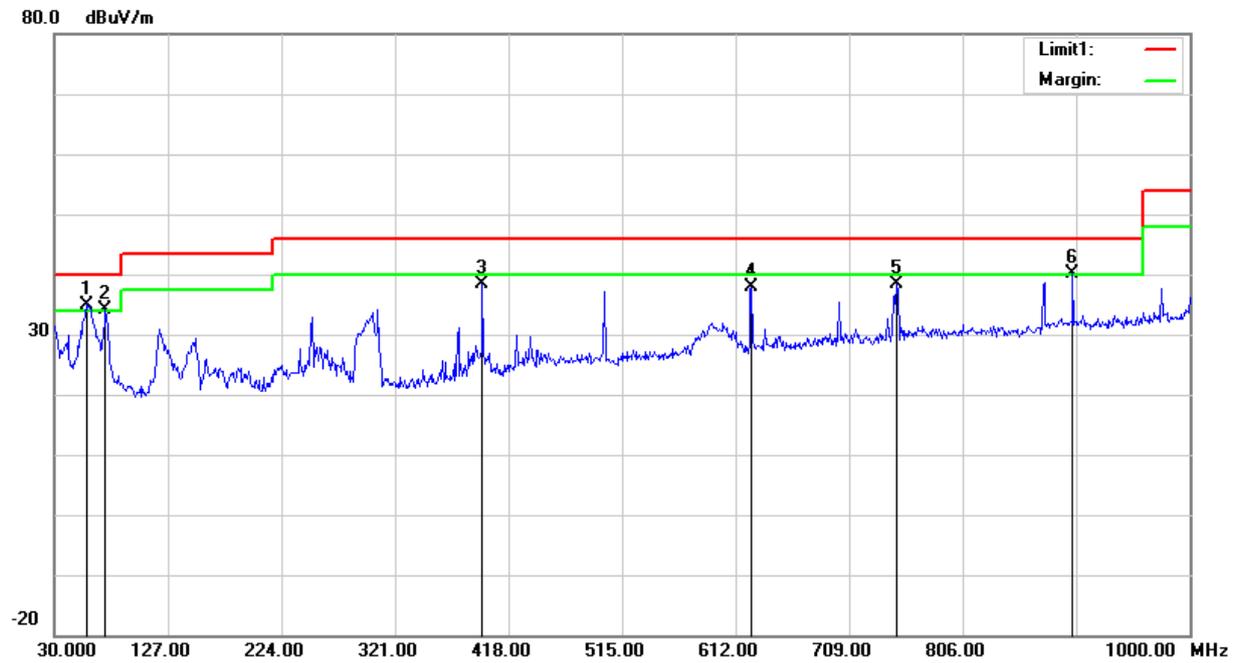

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
57.1600	47.21	peak	-12.21	35.00	40.00	5.00
73.6500	45.10	peak	-11.02	34.08	40.00	5.92
395.6900	40.51	peak	-2.07	38.44	46.00	7.56
625.5800	36.12	peak	1.79	37.91	46.00	8.09
749.7400	34.77	peak	3.62	38.39	46.00	7.61
900.0900	39.93	peak	0.12	40.05	46.00	5.95


Model: DGSNAFNT43

Horizontal:

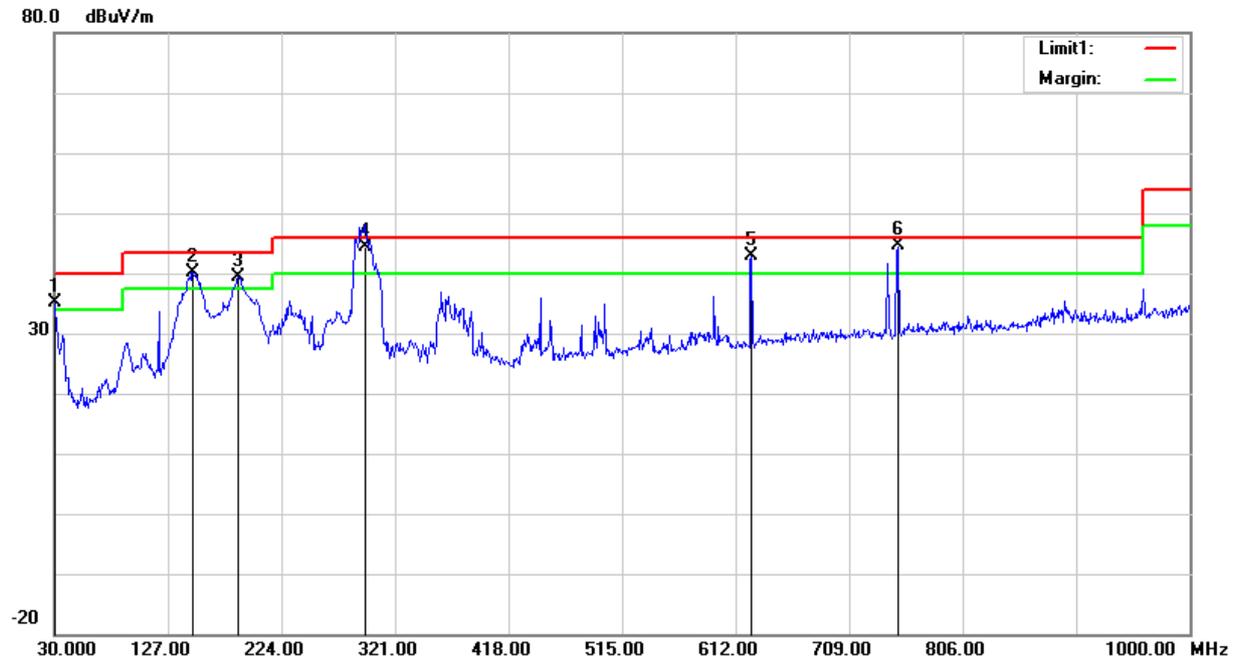


Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
30.0000	33.45	peak	1.72	35.17	40.00	4.83
148.3400	46.29	peak	-6.05	40.24	43.50	3.26
187.1400	46.63	peak	-7.29	39.34	43.50	4.16
295.7800	48.30	QP	-3.89	44.41	46.00	1.59
625.5800	41.09	peak	1.79	42.88	46.00	3.12
750.7100	40.90	QP	3.66	44.56	46.00	1.44

Vertical:

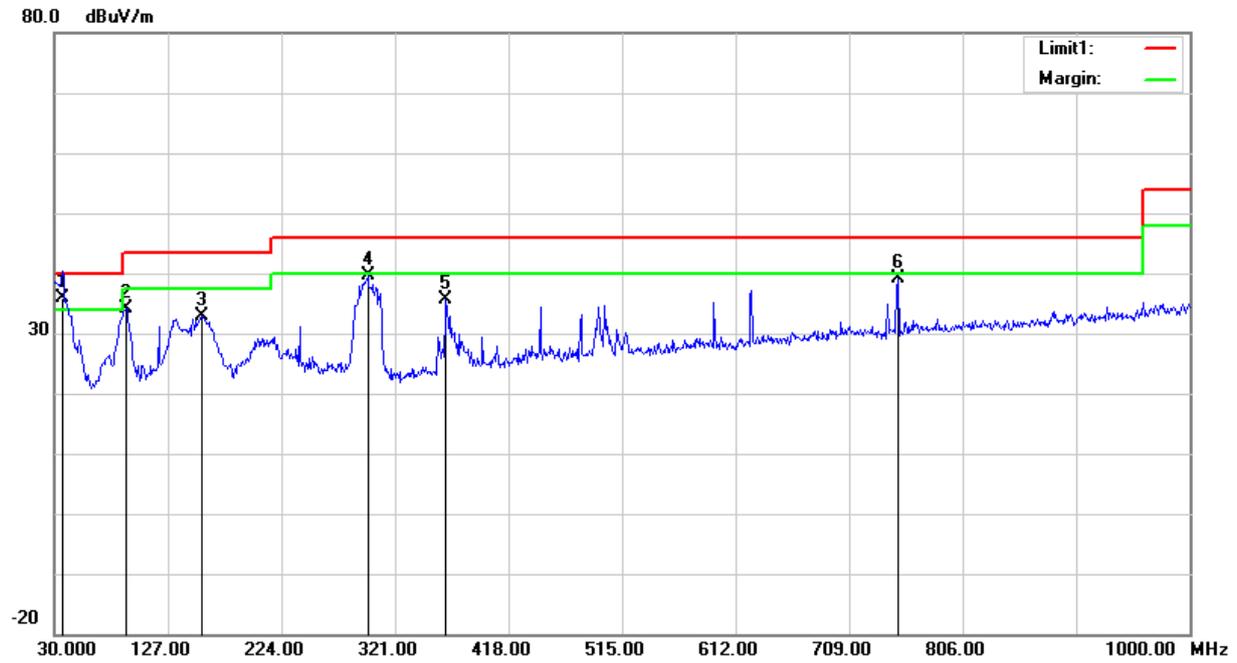


Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
36.7900	39.30	QP	-3.38	35.92	40.00	4.08
91.1100	45.13	peak	-11.09	34.04	43.50	9.46
156.1000	38.82	peak	-5.83	32.99	43.50	10.51
297.7200	43.50	peak	-3.92	39.58	46.00	6.42
364.6500	38.48	peak	-2.82	35.66	46.00	10.34
750.7100	35.44	peak	3.66	39.10	46.00	6.90

Model: DGSNKTCH43BK
Horizontal:

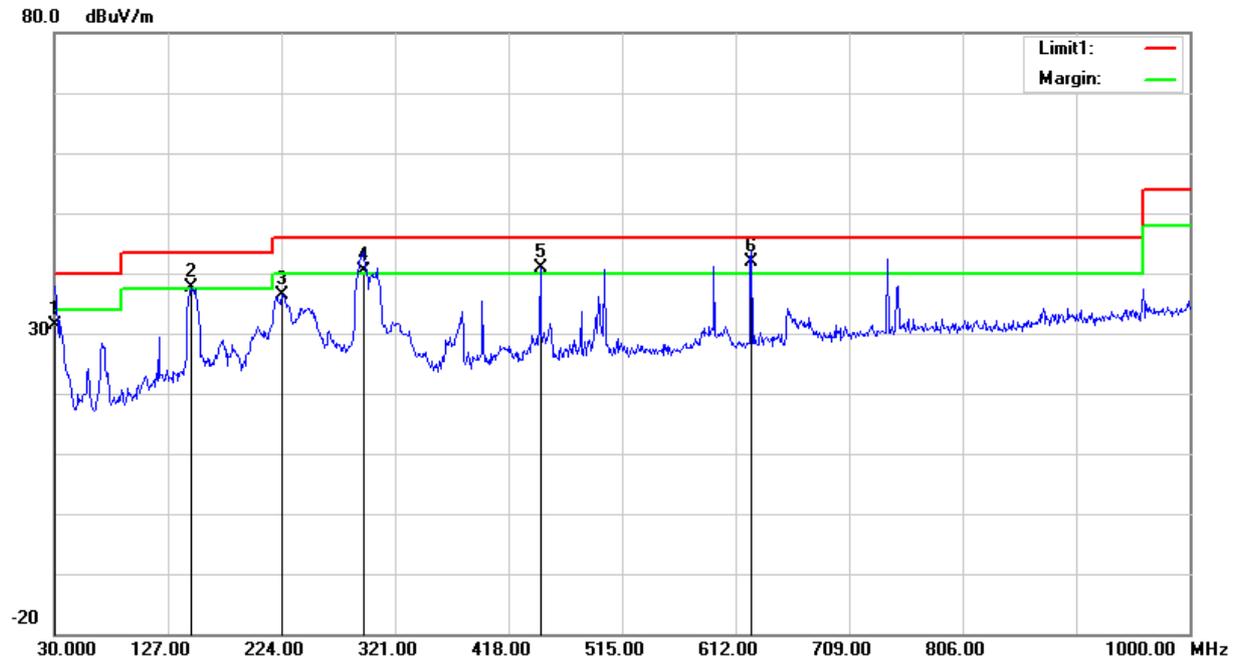

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
30.0000	29.70	QP	1.72	31.42	40.00	8.58
146.4000	43.72	peak	-6.03	37.69	43.50	5.81
224.0000	43.17	peak	-6.79	36.38	46.00	9.62
293.8400	44.40	QP	-3.90	40.50	46.00	5.50
445.1600	42.10	peak	-1.14	40.96	46.00	5.04
625.5800	40.00	QP	1.79	41.79	46.00	4.21

Vertical:

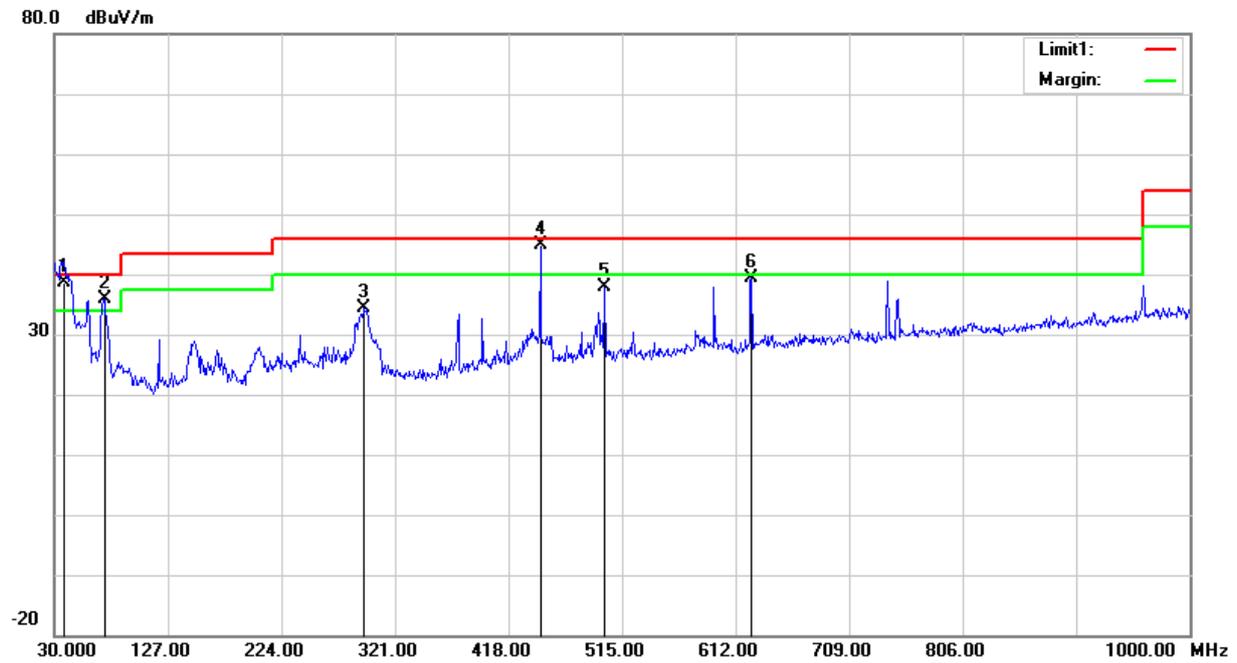

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
37.7600	42.80	QP	-4.22	38.58	40.00	1.42
72.6800	46.99	peak	-11.04	35.95	40.00	4.05
294.8100	38.23	peak	-3.88	34.35	46.00	11.65
445.1600	46.10	QP	-1.14	44.96	46.00	1.04
500.4500	38.11	peak	-0.32	37.79	46.00	8.21
625.5800	37.47	peak	1.79	39.26	46.00	6.74

2) 1-25GHz(DGSNFSTCH55 was tested):

802.11b Mode:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2390.00	26.42	PK	H	28.08	1.80	0.00	56.30	74.00	17.70
2390.00	13.38	AV	H	28.08	1.80	0.00	43.26	54.00	10.74
4824.00	36.07	PK	H	32.95	3.19	25.62	46.59	74.00	27.41
4824.00	24.34	AV	H	32.95	3.19	25.62	34.86	54.00	19.14
7236.00	35.61	PK	H	35.81	4.77	25.64	50.55	74.00	23.45
7236.00	23.87	AV	H	35.81	4.77	25.64	38.81	54.00	15.19
Middle Channel: 2437 MHz									
4874.00	36.29	PK	H	33.05	3.26	25.65	46.95	74.00	27.05
4874.00	24.54	AV	H	33.05	3.26	25.65	35.20	54.00	18.80
7311.00	36.02	PK	H	36.01	4.64	25.71	50.96	74.00	23.04
7311.00	24.18	AV	H	36.01	4.64	25.71	39.12	54.00	14.88
High Channel: 2462 MHz									
2483.50	28.84	PK	H	28.27	1.84	0.00	58.95	74.00	15.05
2483.50	15.83	AV	H	28.27	1.84	0.00	45.94	54.00	8.06
4924.00	37.28	PK	H	33.15	3.27	25.65	48.05	74.00	25.95
4924.00	29.11	AV	H	33.15	3.27	25.65	39.88	54.00	14.12
7386.00	35.95	PK	H	36.20	4.51	25.79	50.87	74.00	23.13
7386.00	24.19	AV	H	36.20	4.51	25.79	39.11	54.00	14.89

802.11g Mode:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2390.00	34.60	PK	H	28.08	1.80	0.00	64.48	74.00	9.52
2390.00	16.57	AV	H	28.08	1.80	0.00	46.45	54.00	7.55
4824.00	36.08	PK	H	32.95	3.19	25.62	46.60	74.00	27.40
4824.00	24.32	AV	H	32.95	3.19	25.62	34.84	54.00	19.16
7236.00	36.30	PK	H	35.81	4.77	25.64	51.24	74.00	22.76
7236.00	24.78	AV	H	35.81	4.77	25.64	39.72	54.00	14.28
Middle Channel: 2437 MHz									
4874.00	36.02	PK	H	33.05	3.26	25.65	46.68	74.00	27.32
4874.00	24.29	AV	H	33.05	3.26	25.65	34.95	54.00	19.05
7311.00	35.59	PK	H	36.01	4.64	25.71	50.53	74.00	23.47
7311.00	23.87	AV	H	36.01	4.64	25.71	38.81	54.00	15.19
High Channel: 2462 MHz									
2483.50	40.81	PK	H	28.27	1.84	0.00	70.92	74.00	3.08
2483.50	22.82	AV	H	28.27	1.84	0.00	52.93	54.00	1.07
4924.00	36.04	PK	H	33.15	3.27	25.65	46.81	74.00	27.19
4924.00	24.35	AV	H	33.15	3.27	25.65	35.12	54.00	18.88
7386.00	36.34	PK	H	36.20	4.51	25.79	51.26	74.00	22.74
7386.00	24.86	AV	H	36.20	4.51	25.79	39.78	54.00	14.22




802.11n ht20 Mode:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2390.00	33.60	PK	H	28.08	1.80	0.00	63.48	74.00	10.52
2390.00	16.38	AV	H	28.08	1.80	0.00	46.26	54.00	7.74
4824.00	36.38	PK	H	32.95	3.19	25.62	46.90	74.00	27.10
4824.00	24.86	AV	H	32.95	3.19	25.62	35.38	54.00	18.62
7236.00	35.85	PK	H	35.81	4.77	25.64	50.79	74.00	23.21
7236.00	24.28	AV	H	35.81	4.77	25.64	39.22	54.00	14.78
Middle Channel: 2437 MHz									
4874.00	35.93	PK	H	33.05	3.26	25.65	46.59	74.00	27.41
4874.00	24.56	AV	H	33.05	3.26	25.65	35.22	54.00	18.78
7311.00	36.03	PK	H	36.01	4.64	25.71	50.97	74.00	23.03
7311.00	24.18	AV	H	36.01	4.64	25.71	39.12	54.00	14.88
High Channel: 2462 MHz									
2483.50	43.05	PK	H	28.27	1.84	0.00	73.16	74.00	0.84
2483.50	19.88	AV	H	28.27	1.84	0.00	49.99	54.00	4.01
4924.00	37.21	PK	H	33.15	3.27	25.65	47.98	74.00	26.02
4924.00	26.45	AV	H	33.15	3.27	25.65	37.22	54.00	16.78
7386.00	36.11	PK	H	36.20	4.51	25.79	51.03	74.00	22.97
7386.00	24.52	AV	H	36.20	4.51	25.79	39.44	54.00	14.56




BLE Mode:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB/m)					
Low Channel: 2402 MHz									
2390.00	25.75	PK	V	28.08	1.80	0.00	55.63	74.00	18.37
2390.00	13.60	AV	V	28.08	1.80	0.00	43.48	54.00	10.52
4804.00	36.25	PK	V	32.91	3.17	25.60	46.73	74.00	27.27
4804.00	24.17	AV	V	32.91	3.17	25.60	34.65	54.00	19.35
7206.00	35.23	PK	V	35.74	4.82	25.60	50.19	74.00	23.81
7206.00	23.18	AV	V	35.74	4.82	25.60	38.14	54.00	15.86
Middle Channel: 2440 MHz									
4880.00	34.81	PK	V	33.06	3.27	25.66	45.48	74.00	28.52
4880.00	22.68	AV	V	33.06	3.27	25.66	33.35	54.00	20.65
7320.00	35.64	PK	V	36.03	4.62	25.72	50.57	74.00	23.43
7320.00	23.17	AV	V	36.03	4.62	25.72	38.10	54.00	15.90
High Channel: 2480 MHz									
2483.50	26.11	PK	V	28.27	1.84	0.00	56.22	74.00	17.78
2483.50	14.01	AV	V	28.27	1.84	0.00	44.12	54.00	9.88
4960.00	35.22	PK	V	33.22	3.23	25.63	46.04	74.00	27.96
4960.00	23.19	AV	V	33.22	3.23	25.63	34.01	54.00	19.99
7440.00	35.58	PK	V	36.34	4.41	25.85	50.48	74.00	23.52
7440.00	23.27	AV	V	36.34	4.41	25.85	38.17	54.00	15.83

**Test plots(802.11b mode High channel was the worst)
Horizontal:**

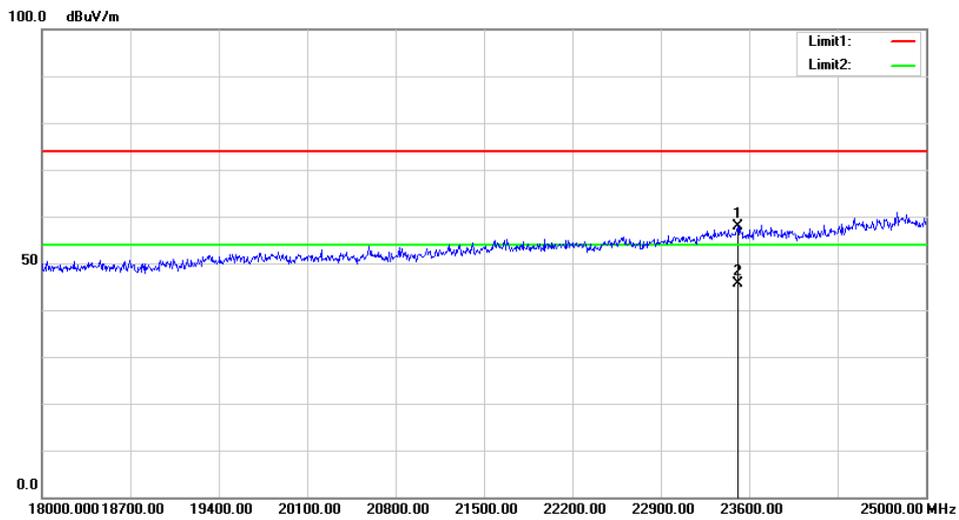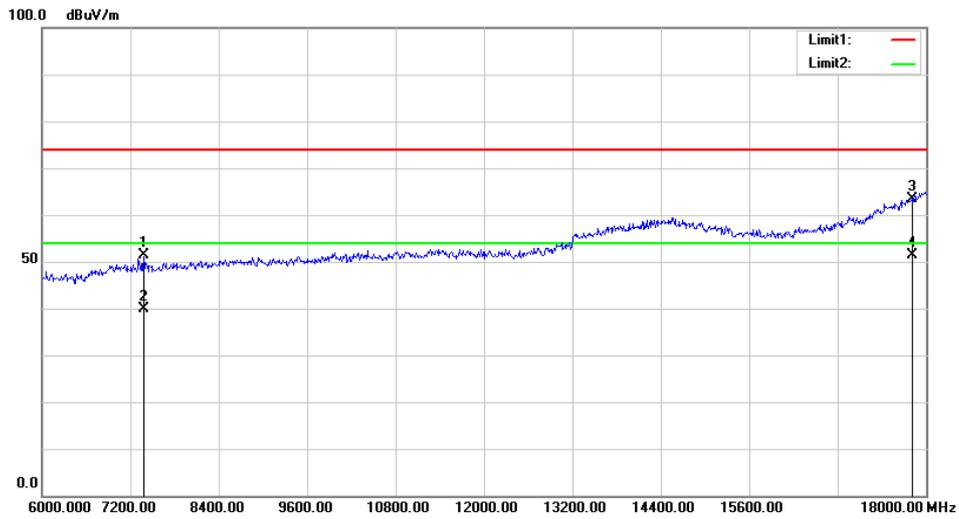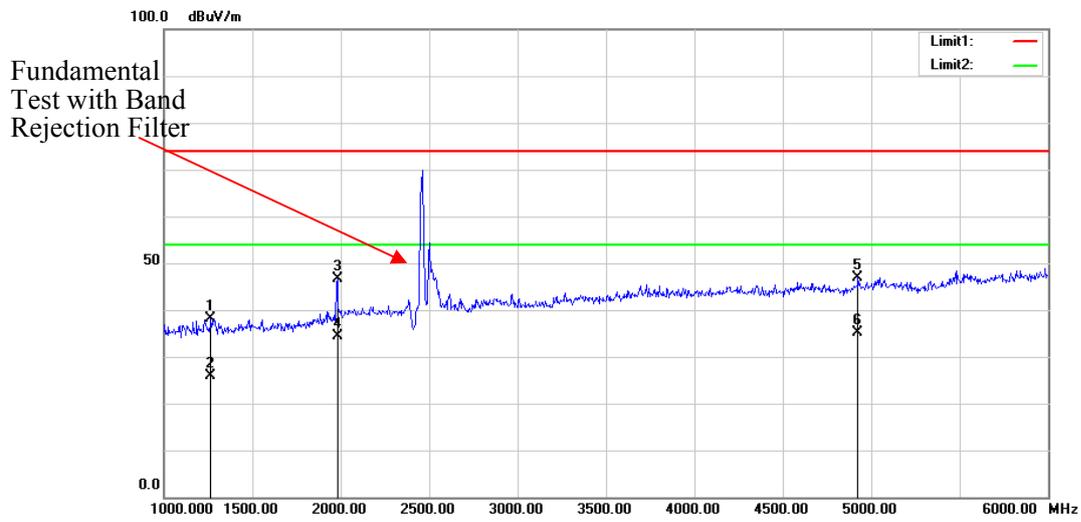

Vertical:

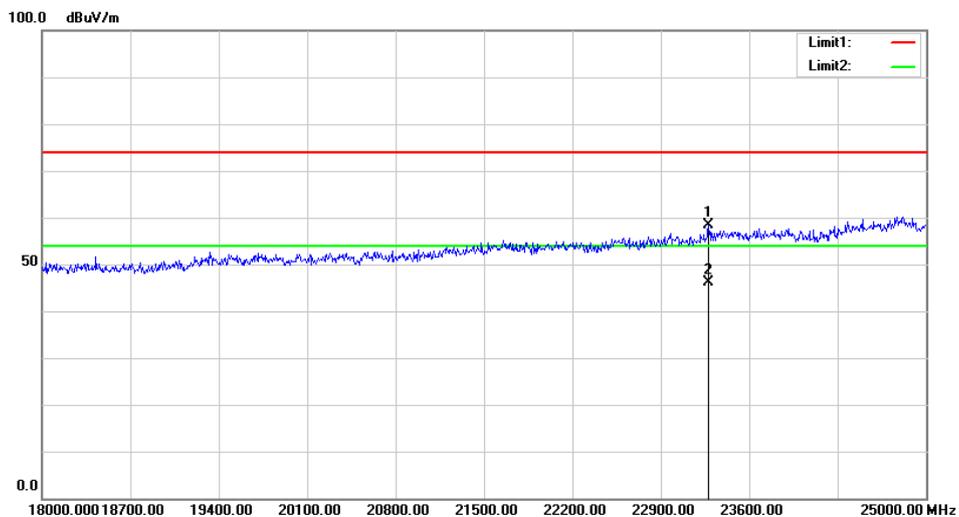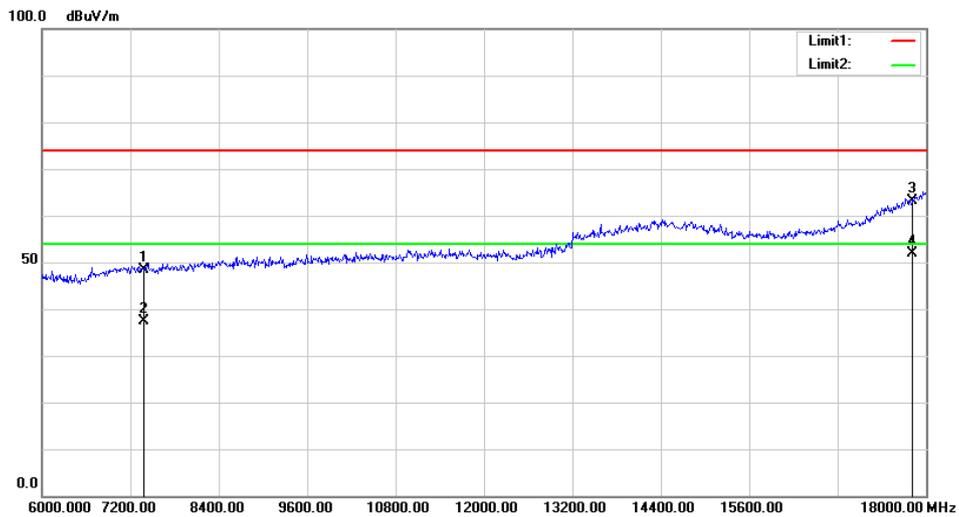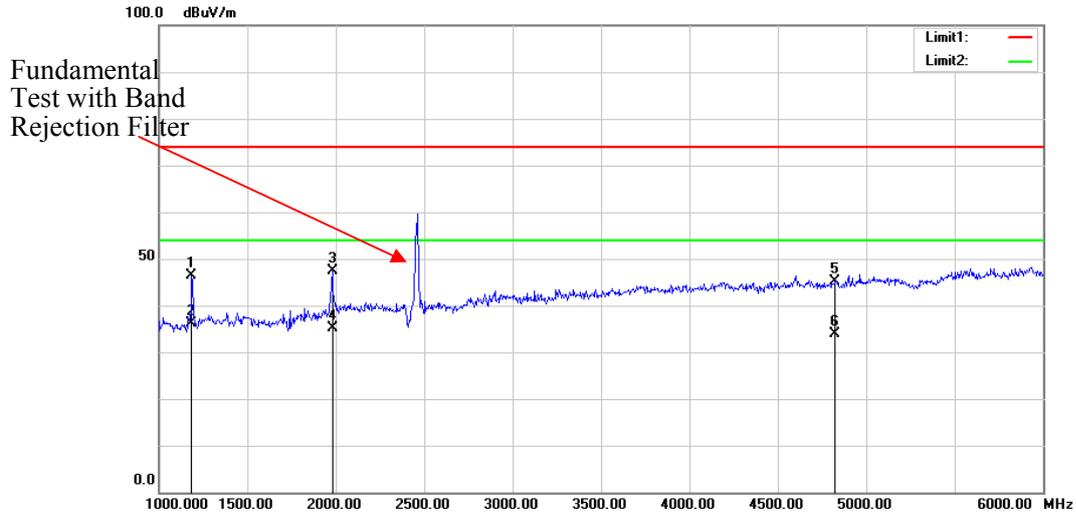

FCC §15.247(a) (2)–6 dB EMISSION BANDWIDTH


Applicable Standard

According to FCC §15.247(a) (2)

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

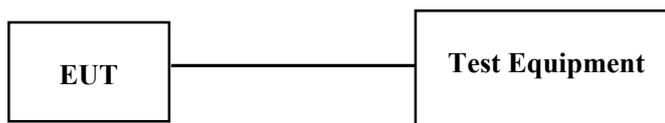

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2019-12-10	2020-12-10
Unknown	Coaxial Cable	C-SJ00-0010	C0010/04	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	24.6 °C
Relative Humidity:	51%
ATM Pressure:	101.8 kPa
Test by:	Severn Zhu
Test Date:	2020-03-27

Test Mode: Transmitting


Test Result: Compliance. Please refer to the following table and plots.

Test mode	Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)
802.11b	Low	2412	8.016	≥ 0.5
	Middle	2437	9.058	≥ 0.5
	High	2462	8.497	≥ 0.5
802.11g	Low	2412	15.952	≥ 0.5
	Middle	2437	16.273	≥ 0.5
	High	2462	15.872	≥ 0.5
802.11n ht20	Low	2412	17.154	≥ 0.5
	Middle	2437	17.395	≥ 0.5
	High	2462	16.593	≥ 0.5
BLE	Low	2402	0.737	≥ 0.5
	Middle	2440	0.745	≥ 0.5
	High	2480	0.741	≥ 0.5


802.11b Low Channel

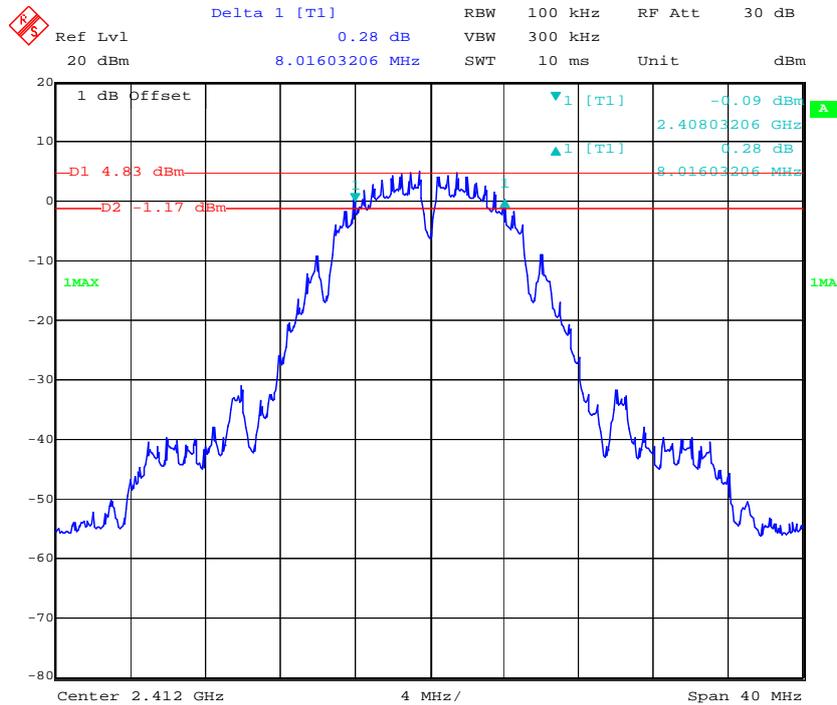


802.11b Middle Channel

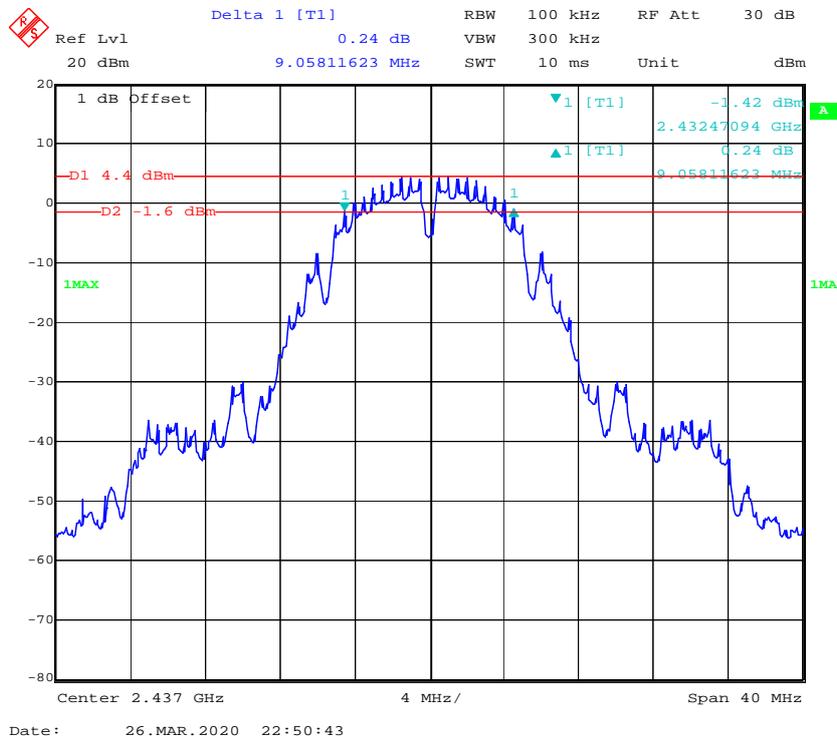


802.11b High Channel

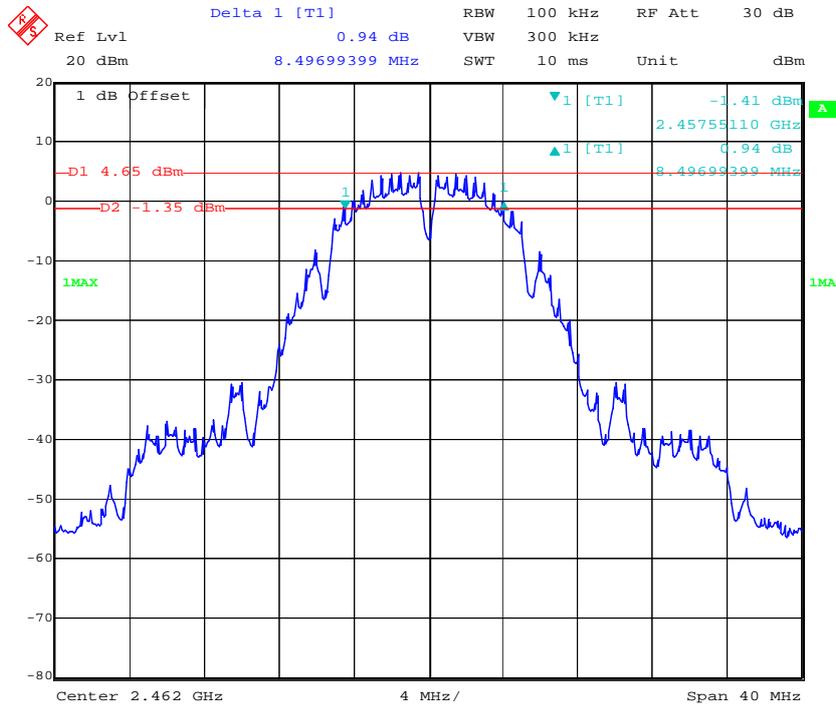

802.11g Low Channel

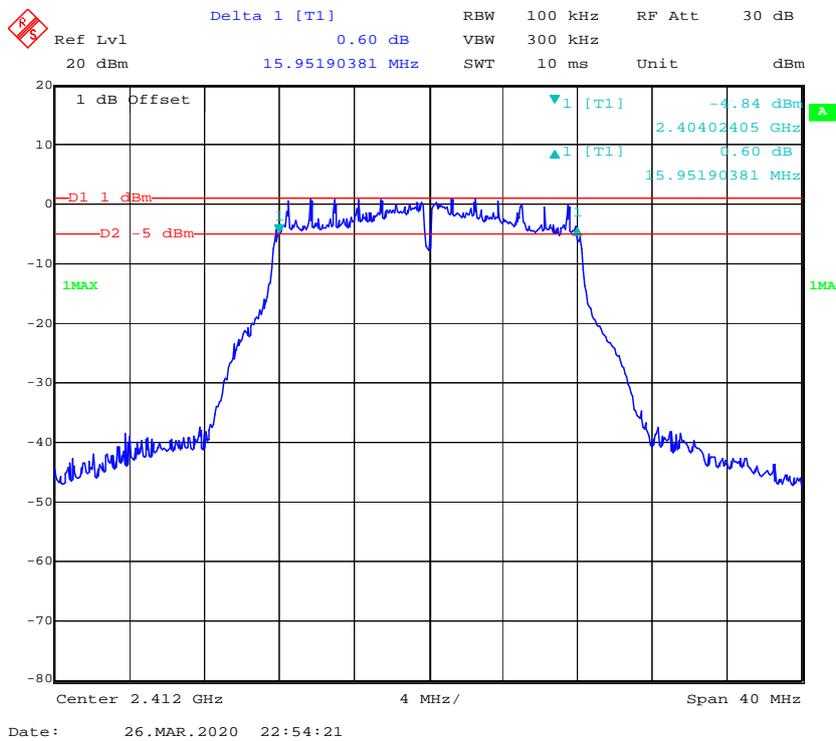


802.11g Middle Channel

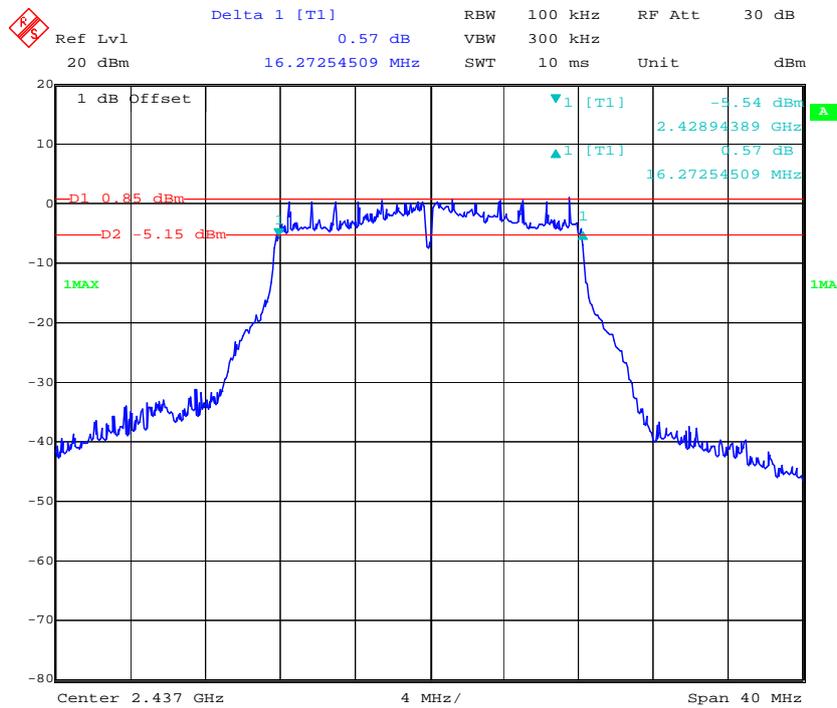


Date: 26.MAR.2020 22:56:28

802.11g High Channel

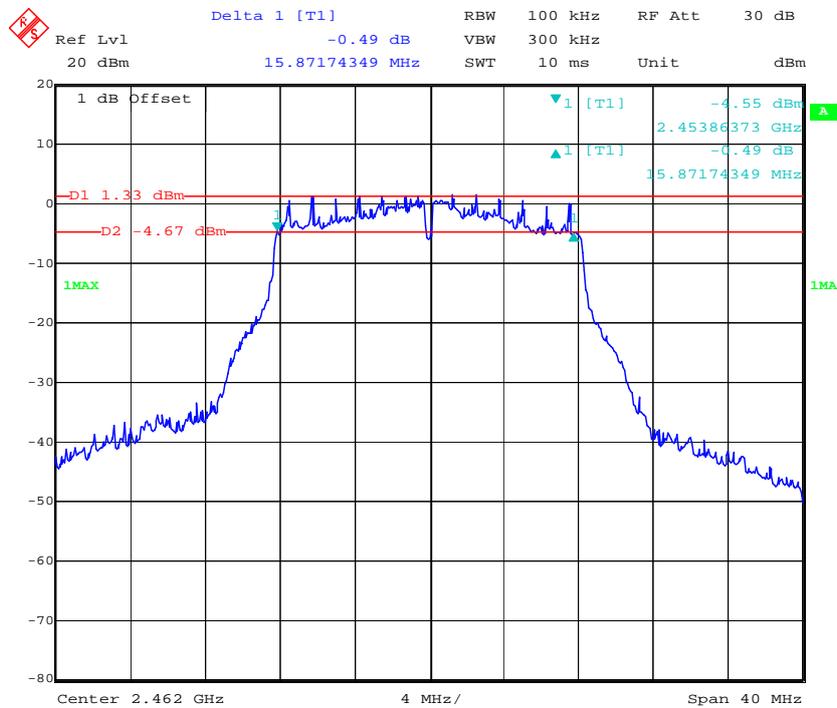


Date: 26.MAR.2020 22:58:04


802.11n ht20 Low Channel

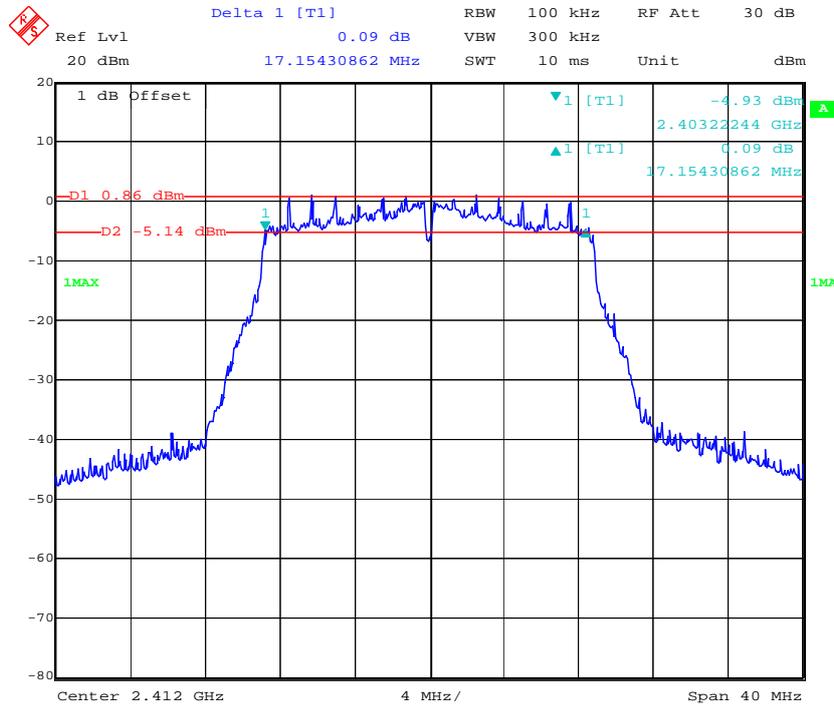


802.11n ht20 Middle Channel

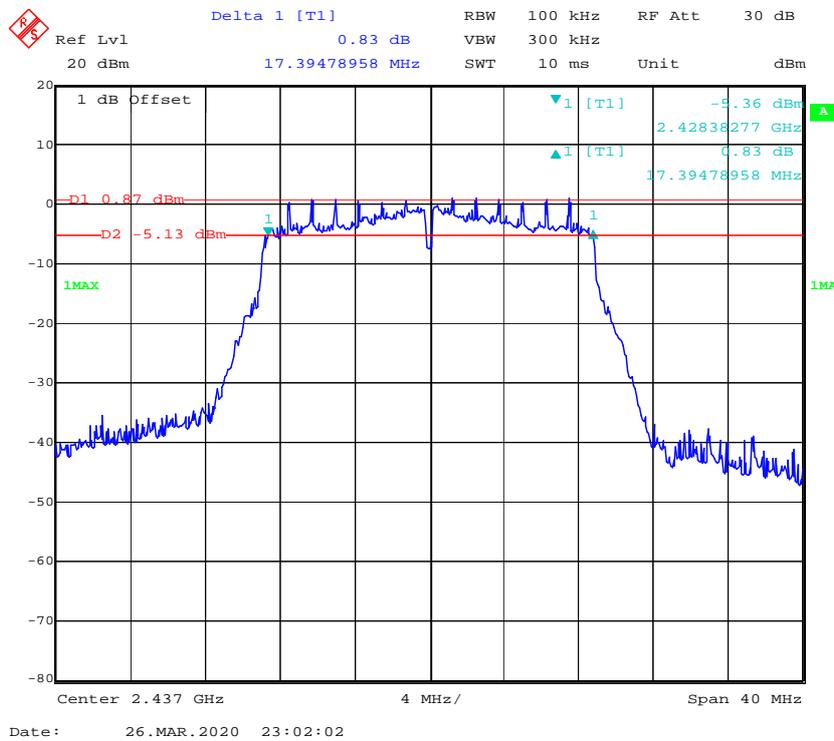

802.11n ht20 High Channel

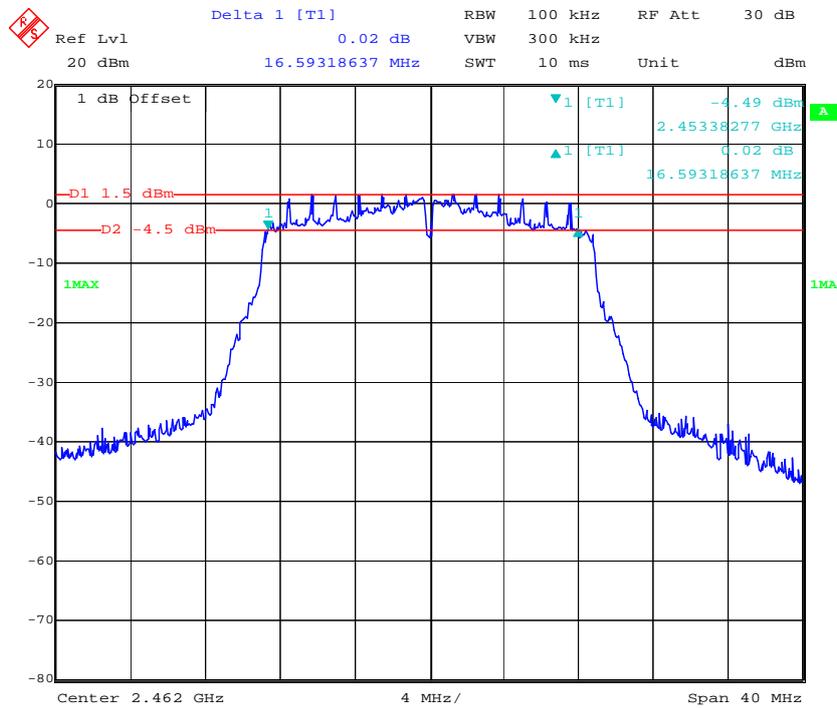

BLE Low Channel

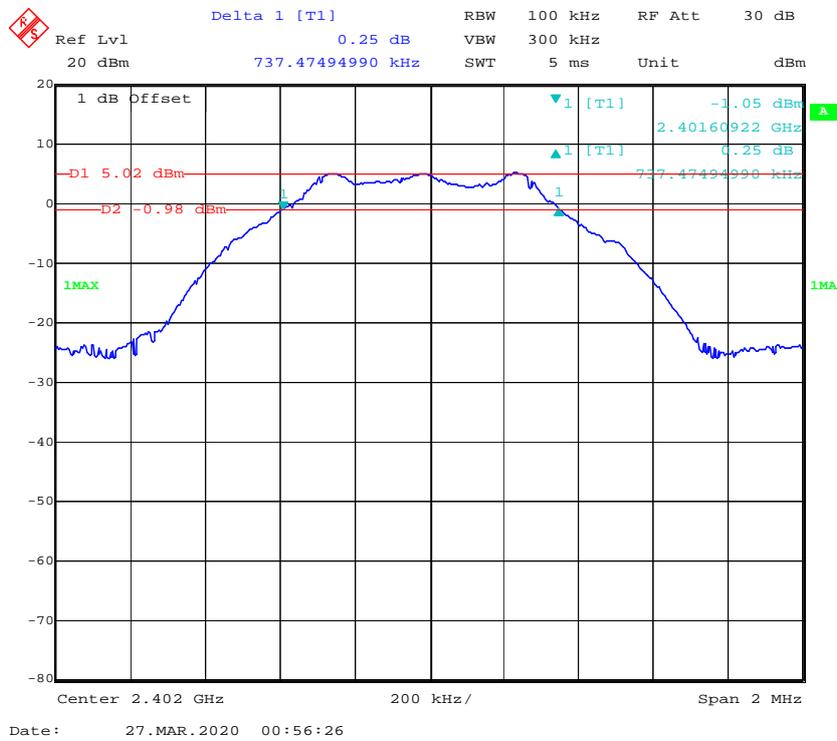


FCC §15.247(b) (3) - MAXIMUM PEAK CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to test equipment.
3. Add a correction factor to the display.
4. Set the power meter to test average output power, record the result as average power.

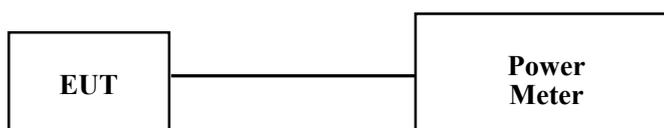

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Unknown	Coaxial Cable	C-SJ00-0010	C0010/04	Each time	N/A
E-Microwave	Coaxial Attenuators	EMCA10-5RN-6	OE01203239	Each time	N/A
Agilent	USB Wideband Power Sensor	U2022XA	MY5417006	2019-09-23	2020-09-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	24.6 °C
Relative Humidity:	51%
ATM Pressure:	101.8 kPa
Test by:	Severn Zhu
Test Date:	2020-03-27

Test Mode: Transmitting

Test Result: Compliance. Please refer to the following table.

Test mode	Frequency (MHz)	Conducted Peak Output Power (dBm)	Limit (dBm)
802.11b	2412	16.98	30
	2437	16.99	30
	2462	16.65	30
802.11g	2412	23.05	30
	2437	23.06	30
	2462	23.17	30
802.11n ht20	2412	22.89	30
	2437	22.48	30
	2462	23.17	30
BLE	2402	5.70	30
	2440	4.93	30
	2480	3.66	30

Note: The data above was tested in conducted mode.

FCC §15.247(d)– 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard

According to FCC§15.247(d):In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2019-12-10	2020-12-10
Unknown	Coaxial Cable	C-SJ00-0010	C0010/04	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data


Environmental Conditions

Temperature:	24.6 °C
Relative Humidity:	51%
ATM Pressure:	101.8 kPa
Test by:	Severn Zhu
Test Date:	2020-03-26~2020-03-27


Test mode: Transmitting

Test Result: Compliance. Please refer to following plots.

802.11b: Band Edge, Left Side

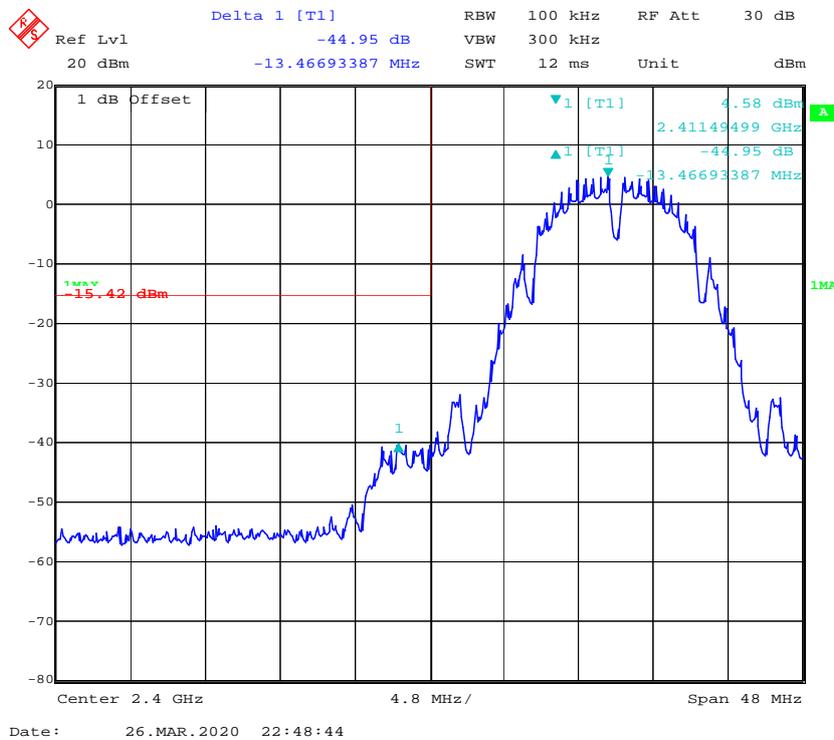


802.11g: Band Edge, Right Side

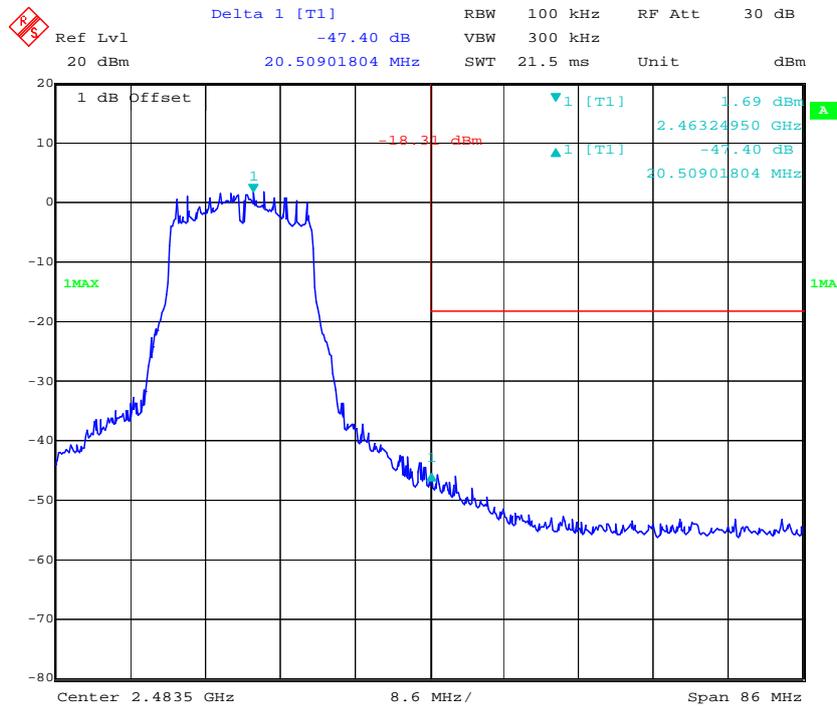


Date: 26.MAR.2020 22:59:21

802.11n ht20: Band Edge, Left Side

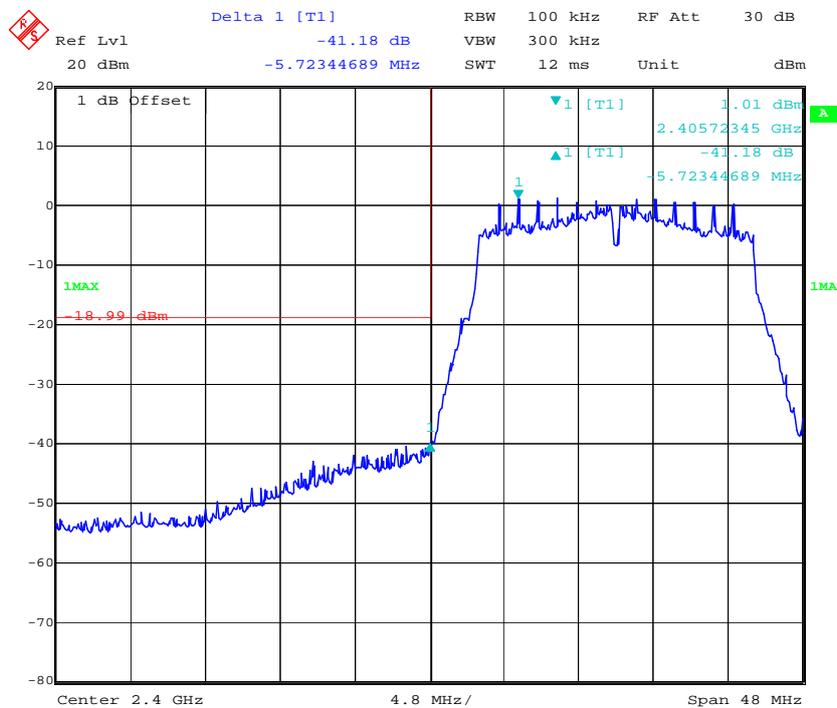


Date: 26.MAR.2020 23:01:38


802.11n ht20: Band Edge, Right Side

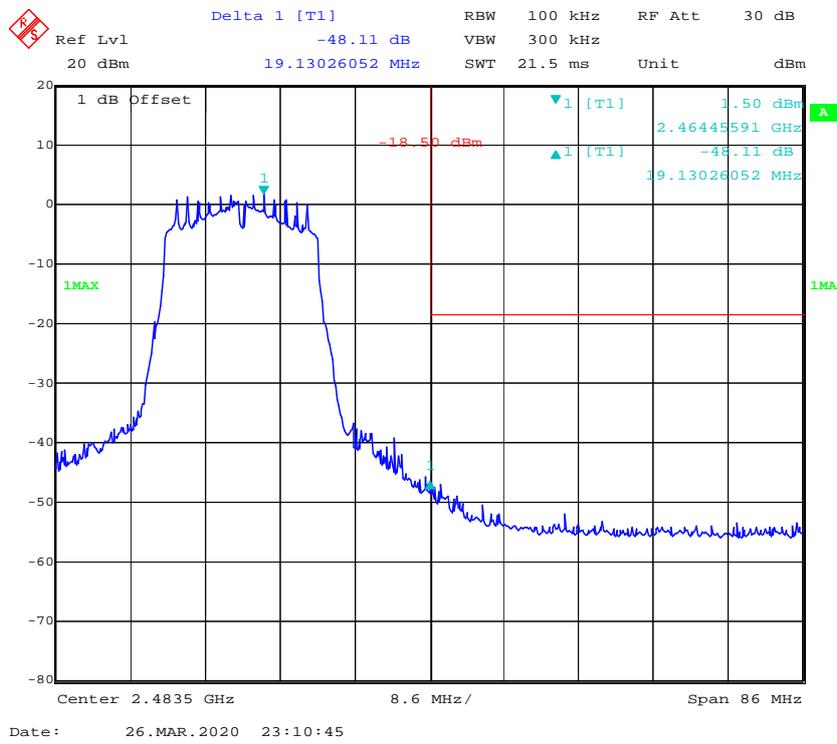

BLE Band Edge, Left Side

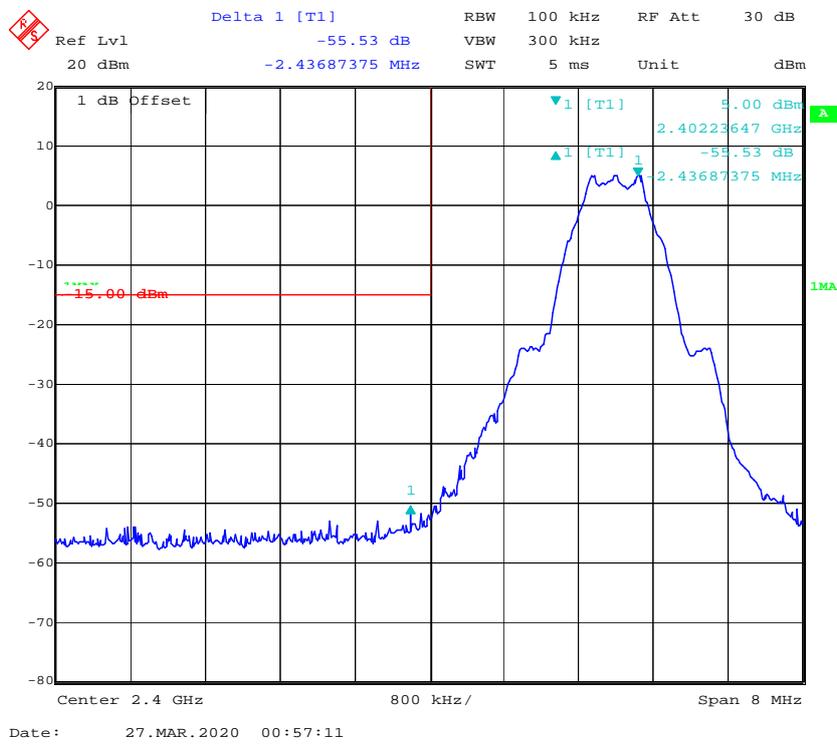

BLE Band Edge, Right Side

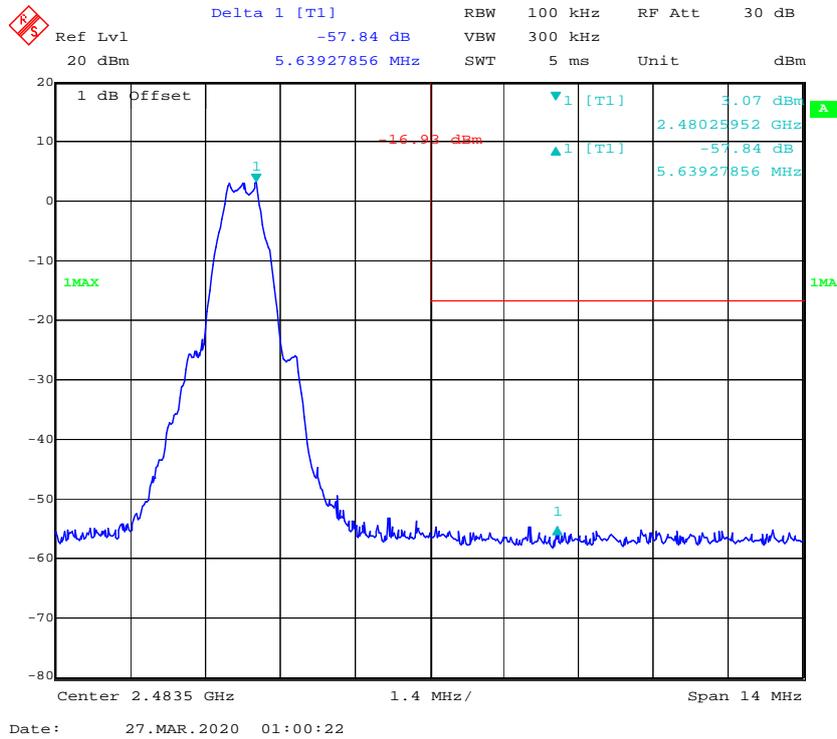

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set the RBW = 3 kHz, VBW = 10 kHz, Set the span to 1.5 times the DTS bandwidth.
4. Use the peak marker function to determine the maximum amplitude level.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2019-12-10	2020-12-10
Unknown	Coaxial Cable	C-SJ00-0010	C0010/04	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	24.6 °C
Relative Humidity:	51%
ATM Pressure:	101.8 kPa
Test by:	Severn Zhu
Test Date:	2020-03-26~2020-03-27


Test Result: Compliance

Test Mode: Transmitting


Test Result: Compliant. Please refer to the following table and plots

Test mode	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
802.11b	2412	-9.29	≤8
	2437	-9.51	≤8
	2462	-8.77	≤8
802.11g	2412	-10.51	≤8
	2437	-10.49	≤8
	2462	-10.44	≤8
802.11n ht20	2412	-11.30	≤8
	2437	-11.81	≤8
	2462	-10.95	≤8
BLE	2402	-8.74	≤8
	2440	-9.36	≤8
	2480	-10.5	≤8


Power Spectral Density, 802.11b Low Channel

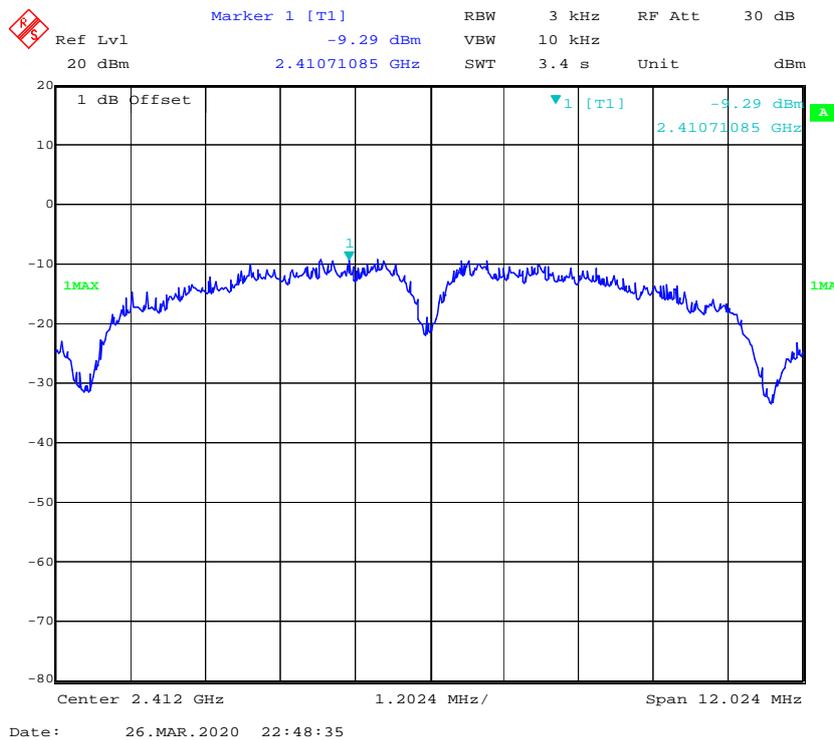


Power Spectral Density, 802.11b Middle Channel

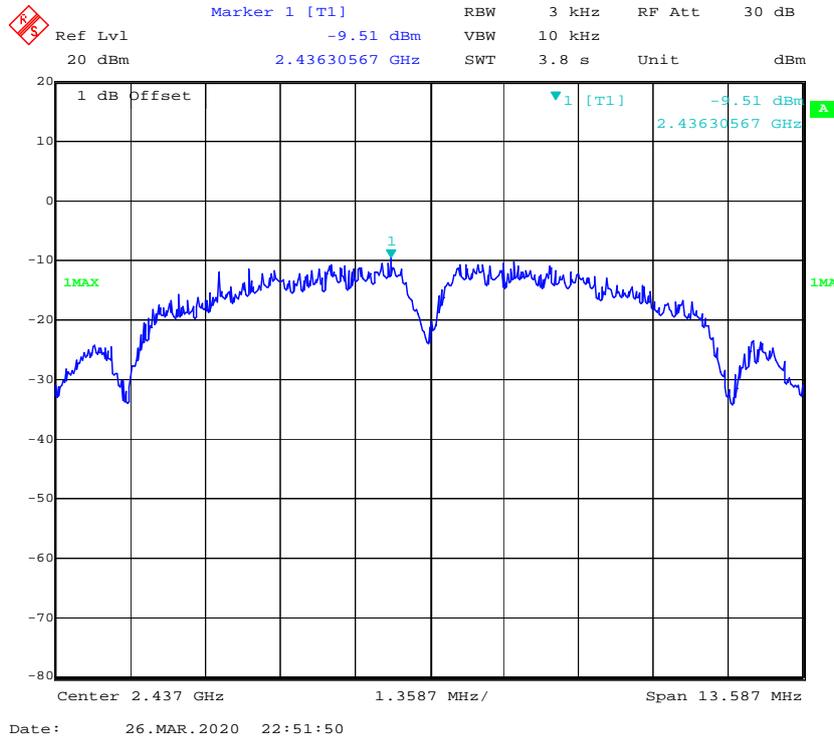


Power Spectral Density, 802.11b High Channel

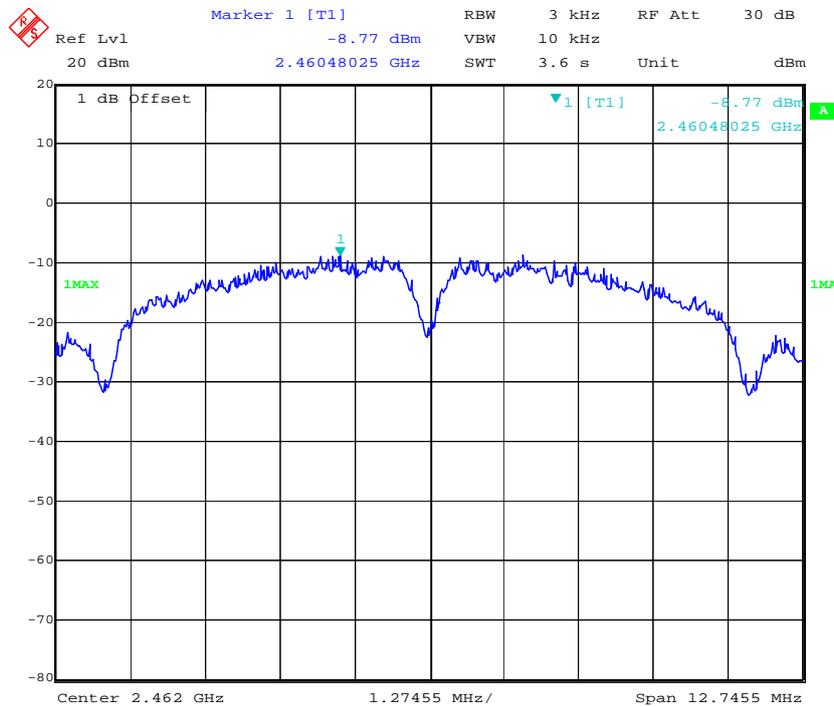

Power Spectral Density, 802.11g Low Channel

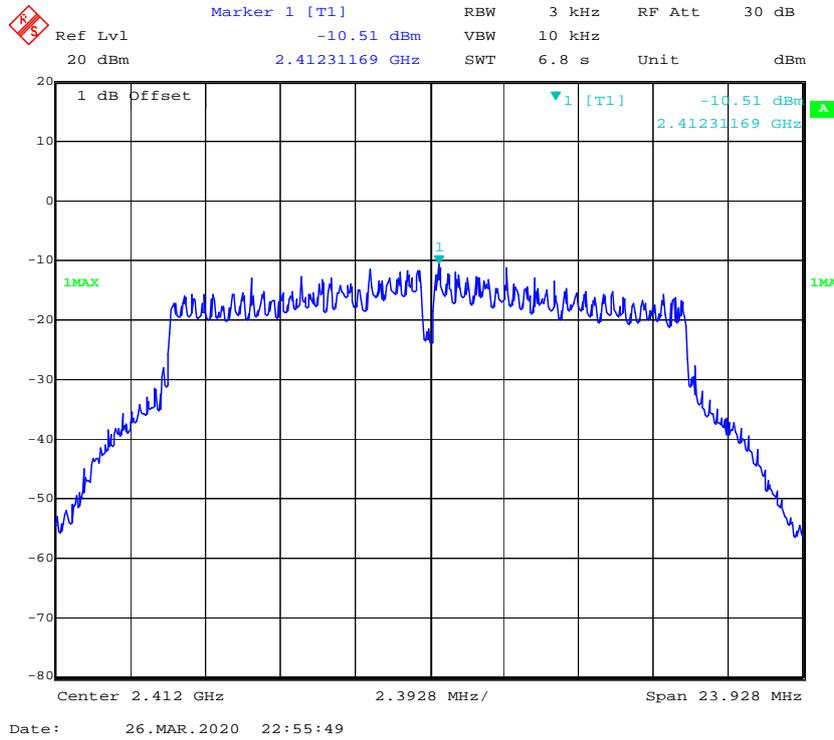


Power Spectral Density, 802.11g Middle Channel

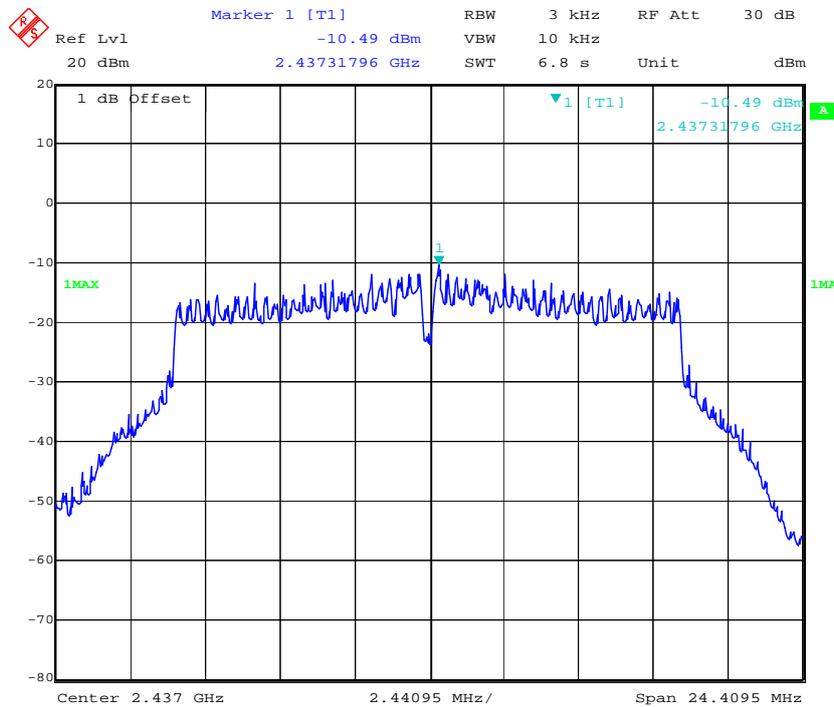

Power Spectral Density, 802.11g High Channel


 Marker 1 [T1] RBW 3 kHz RF Att 30 dB
Ref Lvl -10.44 dBm VBW 10 kHz
20 dBm 2.46231012 GHz SWT 6.8 s Unit dBm

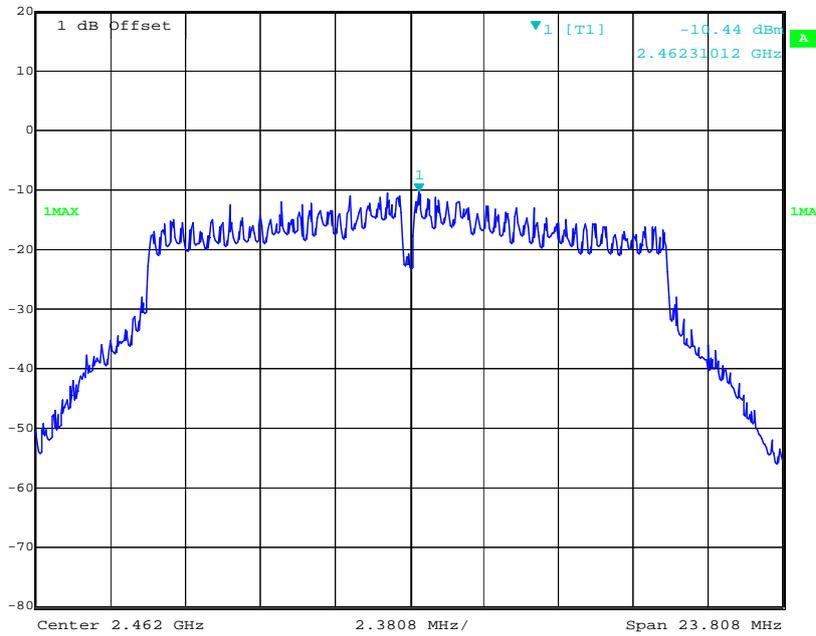


Date: 26.MAR.2020 22:59:06

Power Spectral Density, 802.11 n20 Low Channel

 Marker 1 [T1] RBW 3 kHz RF Att 30 dB
Ref Lvl -11.30 dBm VBW 10 kHz
20 dBm 2.41073665 GHz SWT 7.2 s Unit dBm

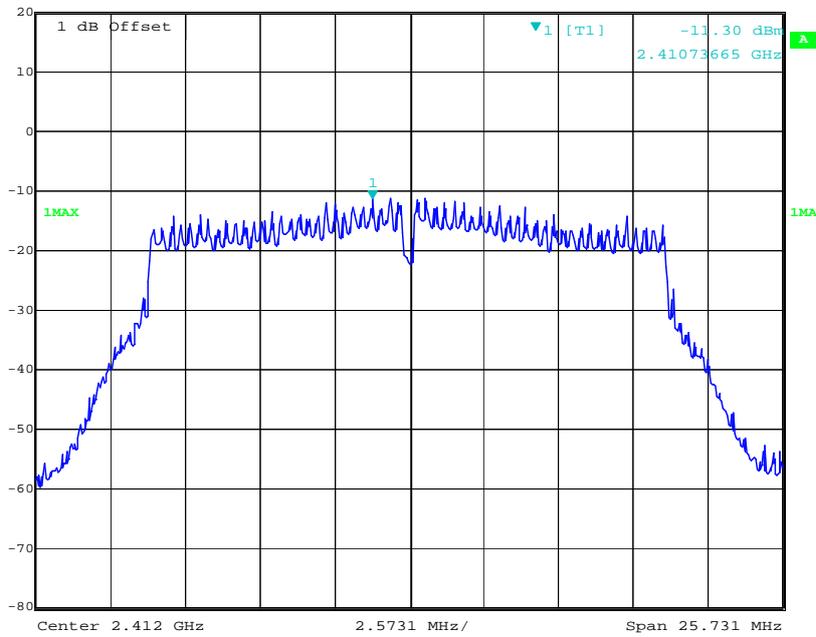


Power Spectral Density, 802.11 n20 Middle Channel

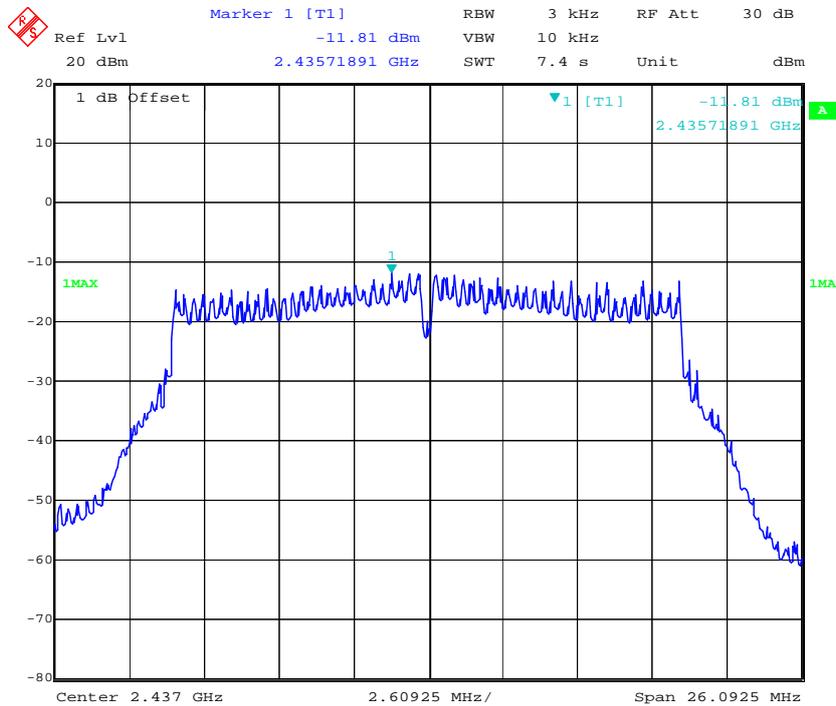


Date: 26.MAR.2020 23:03:33

Power Spectral Density, 802.11 n20 High Channel

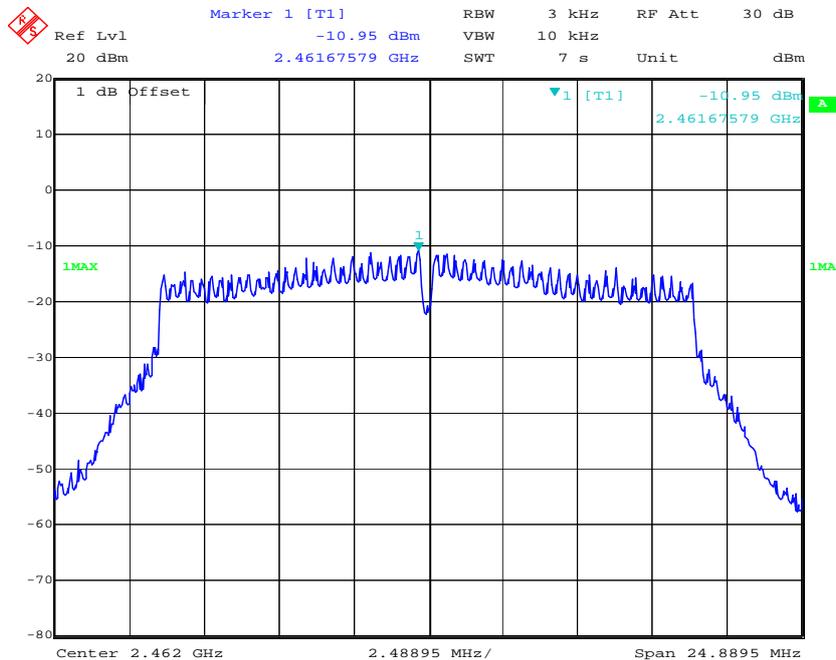


Date: 26.MAR.2020 23:10:29


Power Spectral Density, BLE Low Channel

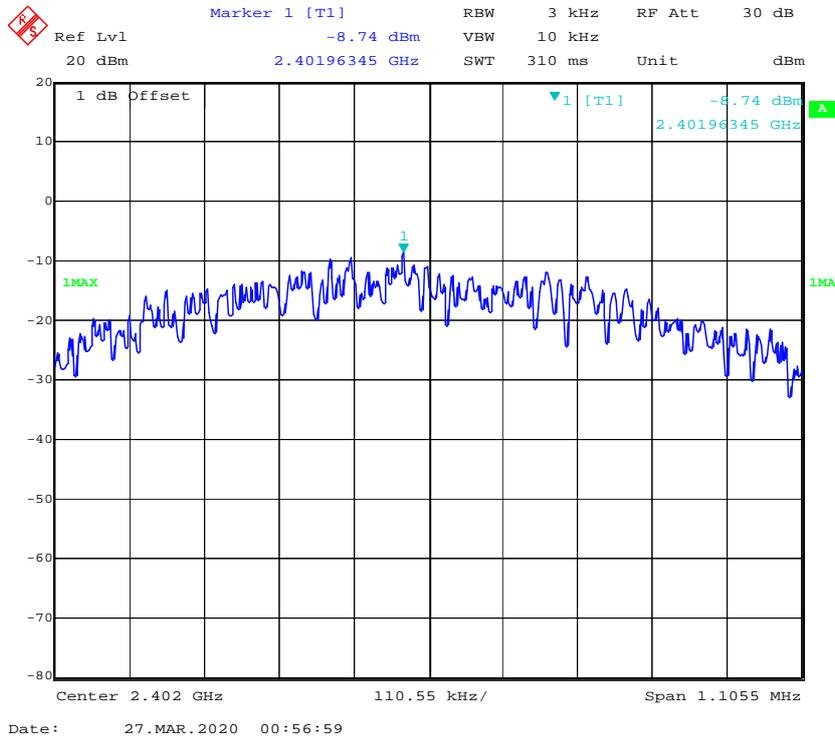

Power Spectral Density, BLE Middle Channel

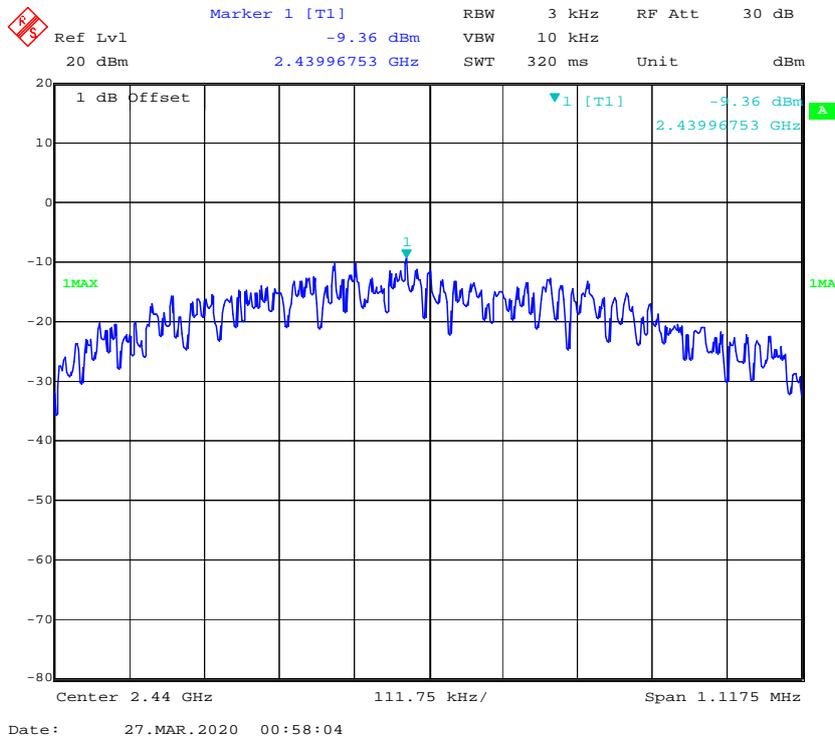

Power Spectral Density, BLE High Channel

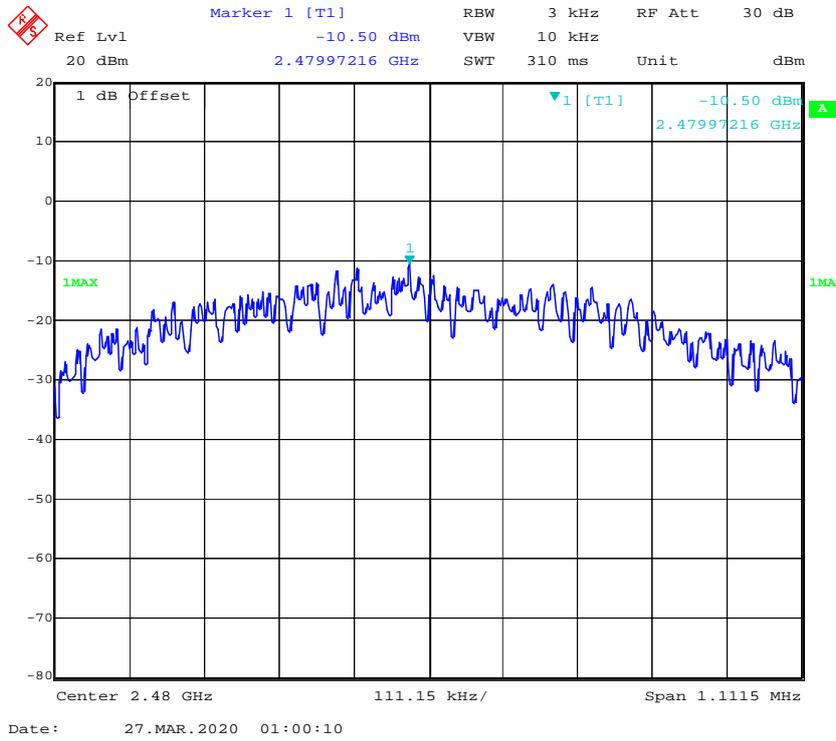

***** END OF REPORT *****