



**FCC 47 CFR PART 15 SUBPART C
INDUSTRY CANADA RSS-210 ISSUE 9**

CERTIFICATION TEST REPORT

FOR

Near Field RF ID Tag Reader / Writer

MODEL NUMBER: UBS-200L

REPORT NUMBER: 12634792A

FCC ID: 2ASDF-UBS200

ISSUE DATE: 2019-04-24

Prepared for
Unified Information Devices
500 Park Av
Suite 109
Lake Villa, IL 60046

Prepared by
UL LLC
333 Pfingsten Rd.
Northbrook, IL 60062
TEL: (847) 272-8800



NVLAP LAB CODE 100414-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--		Initial Issue	

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY	5
4.1. MEASURING INSTRUMENT CALIBRATION	5
4.2. SAMPLE CALCULATION	5
4.3. MEASUREMENT UNCERTAINTY	5
5. EQUIPMENT UNDER TEST	6
5.1. DESCRIPTION OF EUT	6
5.2. MAXIMUM OUTPUT POWER	6
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	6
5.4. SOFTWARE AND FIRMWARE	6
5.5. WORST-CASE CONFIGURATION AND MODE	6
5.6. MODIFICATIONS	6
5.7. DESCRIPTION OF TEST SETUP	7
6. TEST AND MEASUREMENT EQUIPMENT	9
7. 20 dB AND 99% BW	10
8. RADIATED EMISSION TEST RESULTS	12
8.1. LIMITS AND PROCEDURE	12
8.2. TX EMISSIONS 0.009MHz TO 30 MHz	13
8.2.1. Outdoor to 10m SAC Correlation Data	13
8.2.2. Loop Antenna Parallel to Floor	14
8.2.3. Loop Antenna Perpendicular to Floor	16
8.2.4. Loop Antenna Standing Up	18
8.2.5. Rod Antenna Parallel to Floor	20
8.2.6. Rod Antenna Perpendicular to Floor	22
8.3. TX SPURIOUS EMISSION 30 TO 1000 MHz	24
8.3.1. Radiated Spurious Emissions – Loop Antenna (worst case orientation)	24
8.3.2. Radiated Spurious Emissions – Rod Antenna (worst case orientation)	26
9. AC MAINS LINE CONDUCTED EMISSIONS	28
10. SETUP PHOTOS	33

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: Unified Information Devices
500 Park Av
Suite 109
Lake Villa, IL 60046

EUT DESCRIPTION: Near Field RF ID Tag Reader / Writer

MODEL: UBS200L

SERIAL NUMBER: non-serilized

DATE TESTED: 2019-01-18 & 2019-04-23

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	Complies
INDUSTRY CANADA RSS-210 Issue 9	Complies
INDUSTRY CANADA RSS-GEN Issue 5	Complies

UL LLC tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL LLC and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL LLC will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of the U.S. government.

Approved & Released For
UL LLC By: Jeff Moser



Operation Leader
CONSUMER TECHNOLOGY DIVISION
UL LLC

Prepared By:



Test Engineer
CONSUMER TECHNOLOGY DIVISION
UL LLC

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2013, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 5, and RSS-210 Issue 9.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 333 Pfingsten Road, Northbrook, IL 60062 USA.

UL NBK is accredited by NVLAP, Laboratory Code 100414-0.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

RADIATED EMISSIONS

Where relevant, the following sample calculation is provided:

$$\text{Field Strength (dBuV/m)} = \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Preamp Gain (dB)}$$

$$36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} = 28.9 \text{ dBuV/m}$$

MAINS CONDUCTED EMISSIONS

Where relevant, the following sample calculation is provided:

$$\text{Final Voltage (dBuV)} = \text{Measured Voltage (dBuV)} + \text{Cable Loss (dB)} + \text{Limiter Factor (dB)} + \text{LISN Insertion Loss}$$

$$36.5 \text{ dBuV} + 0 \text{ dB} + 10.1 \text{ dB} + 0 \text{ dB} = 46.6 \text{ dBuV}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test	Range	Equipment	Uncertainty k=2
Radiated Emissions	30-200MHz	Bicon 10m Horz	2.15dB
Radiated Emissions	30-200MHz	Bicon 10m Vert	2.14dB
Radiated Emissions	200-1000MHz	LogP 10m Horz	1.84dB
Radiated Emissions	200-1000MHz	LogP 10m Vert	2.19dB
Radiated Emissions	9kHz-30MHz	Loop Antenna	2.52dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a Near Field RF ID reader / writer operating at 134.2kHz.

5.2. MAXIMUM FIELD STRENGTH

The transmitter has a maximum average filed strength as follows:

Frequency Range (MHz)	Mode	Field Strength @ 30m dBuV/m
0.134	Normal TX	25.03

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes tow possible antennas:

- Loop Antenna
- Rod Antenna

Antennas are selected via push button switch and only one antenna cat be used at a time.

5.4. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was:
Mainboard Firmware "UID_UPS-70L" version J11

The EUT driver software installed during testing was:
Driver is "VCP_drv" version 1.0

The test utility software used during testing was:
TeraTerm version 4.78.

5.5. WORST-CASE CONFIGURATION AND MODE

Below 30MHz both antenna was measured when oriented in all possible orientations. The loop antenna was tested when parallel to groundplane, perpendicular to ground plane and standing up. The rod antenna was tested when parallel to ground plane and standing up. Once worst case orientation for TX antenna was established additional measurements were made with tag present and without tag. In both case it was found that the fundamental emissions were lower by fraction of a db when tag was present. All final measurements were made without tag present.

5.6. MODIFICATIONS

Following modifications were required:

- Ferrite by Fair-Rite 0431173951 were installed inside the enclosure directly on each the wire leading to the antenna connector.
- Ferrite by Fair-Rite 0431173951 was installed on a cable between main control board and display board.

5.7. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
EUT	UID	UBS200L	-	-
Loop Antenna	UID	-	-	-
Rod Antenna	UID	-	-	-
EUT Power Supply	GlobTek Inc.	GT-41062-1812-T3	-	-
Laptop Computer	Asus	U318	-	-
Laptop Power Supply	Asus	ADP-90CD DB	-	-


I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Power Inp	1	Custom	two wire	1m	-
2	Atenna Ou	2	Custom	Two wire	1.5m	-
3	USB	2	USB A and B	-	1.5	-

TEST SETUP

The EUT with antennas attached connected to laptop computer via two USB cables and external power supply powering the EUT.

SETUP DIAGRAM FOR TESTS

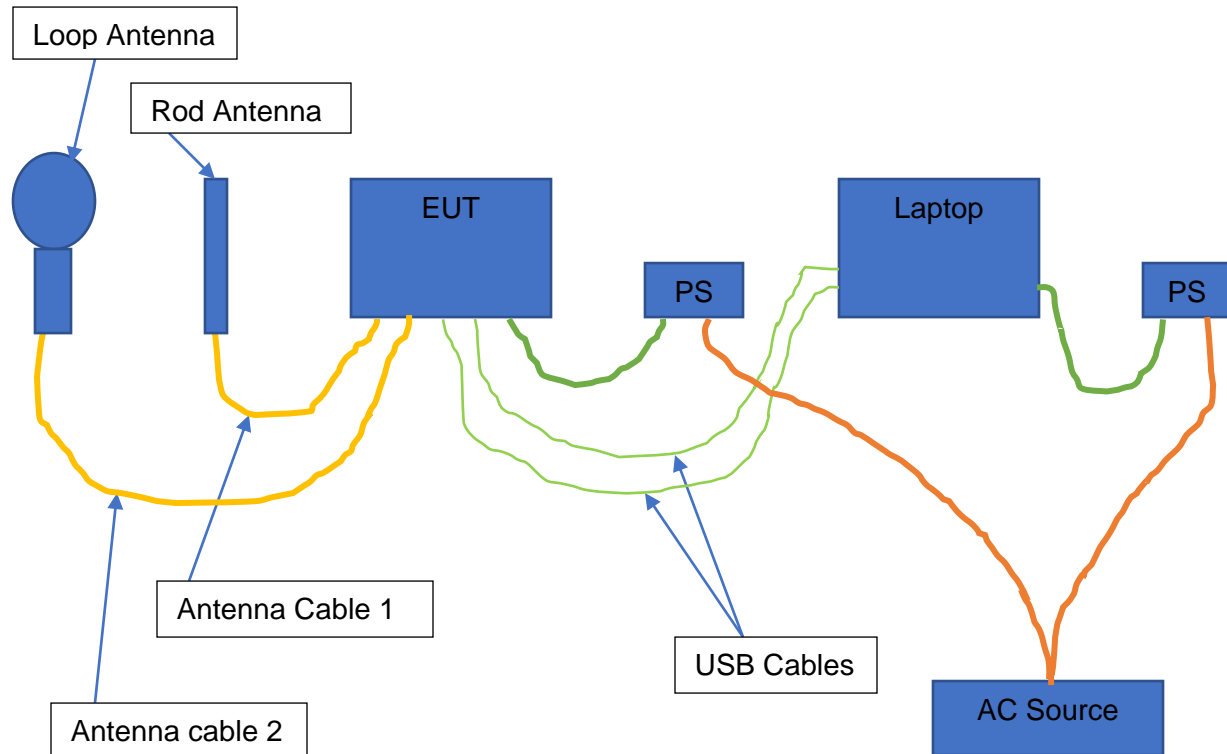

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
EMI Test Receiver	Rohde & Schwarz	ESCI	EMC4328	2018-12-26	2019-12-31
Bicon Antenna	Chase	VBA6106A	EMC4078	2018-03-28	2019-03-31
Log-P Antenna	Chase	UPA6109	EMC4313	2018-04-09	2019-04-30
Signal Analyzer	Aglient	N9030A PXA	EMC4360	2018-12-11	2019-12-31
EMI Test Receiver	Rohde & Schwarz	ESR	EMC4377	2018-12-26	2019-12-31
Transient Limiter	Electro-Metrics	EM7600-2	EMC4224	N/A	N/A
High-Pass Filter	Solar Electronics	2803-150	EMC4327	N/A	N/A
Attenuator	HP	8494B	2831A00838	N/A	N/A
LISN - L1	Solar Electronics	8602-50-TS-50-N	EMC4066	2018-12-19	2019-12-31
LISN - L2	Solar Electronics	8602-50-TS-50-N	EMC4064	2018-12-19	2019-12-31
*Clicks LISN	AFJ	LS 16	EMC4334	2018-12-19	2019-12-31
* used to power AE equipment					

7. 20 dB AND 99% BW

LIMITS

For reference only

TEST PROCEDURE

ANSI C63.10

The transmitter output is connected to the spectrum analyzer.

Per ANSI C63.10 the RBW should be set to 1% to 5% of the 99 % bandwidth. The VBW should be set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal measurement function is utilized.


However, because of the signal type changing the RBW will change the bandwidth itself therefore default setting for RBW based on span was used.

RESULTS

Bandwidth

Frequency (MHz)	20dB Bandwidth (kHz)	99% Bandwidth (kHz)
0.1342	1.395	1.176

Bandwidth Measurement

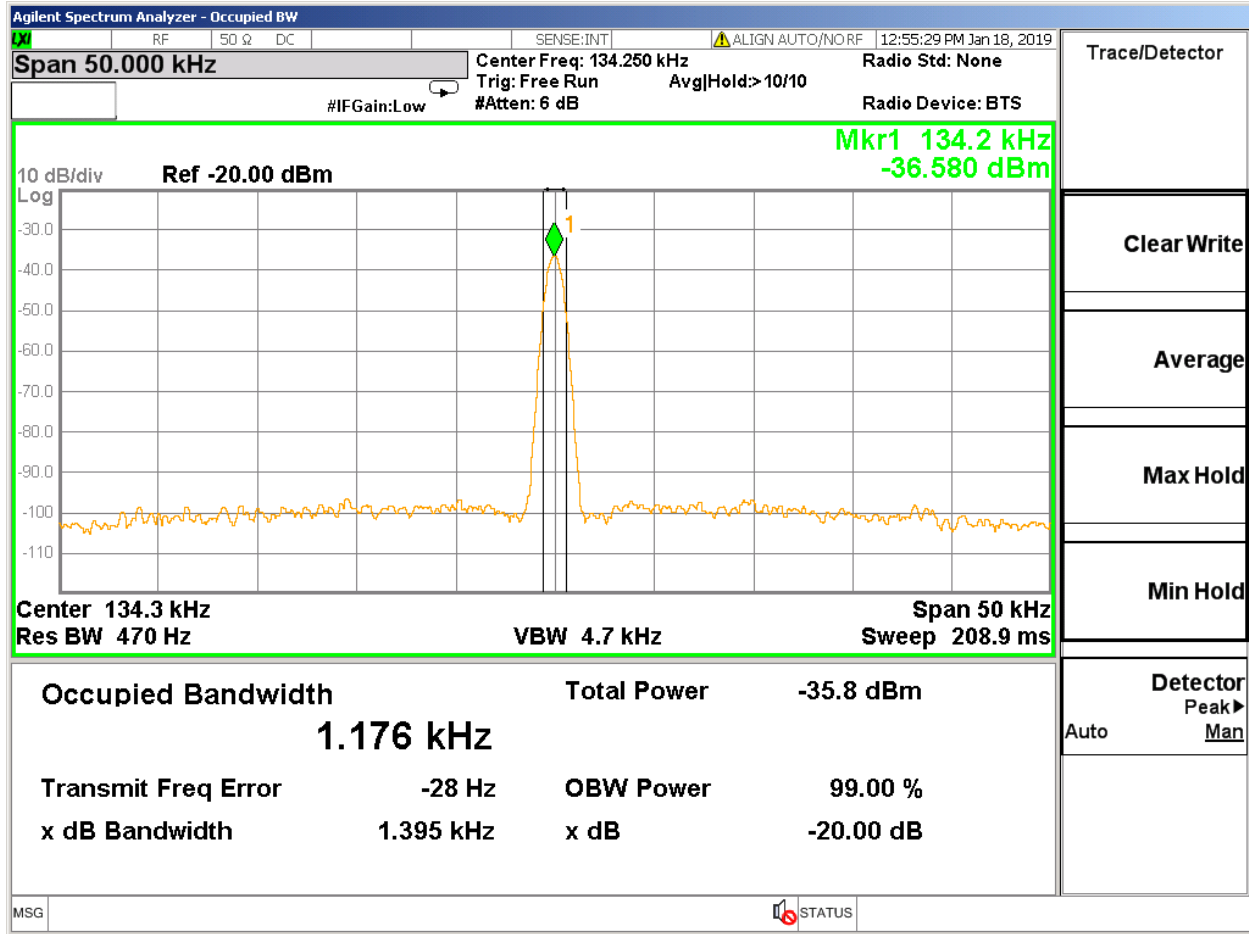

8. RADIATED EMISSION TEST RESULTS

8.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.209 (a)
 IC RSS-GEN, Section 8.9 (Transmitter)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (m)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30
30–88	100	3
88 to 216	150	3
216 to 960	200	3
Above 960 MHz	500	3
Note: The lower limit shall apply at the transition frequency.		

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for below 1GHz measurements. The antenna to EUT distance is 3 meters for frequencies 9kHz-30MHz and 10 meters for frequencies 30MHz-1GHz.

Between 9kHz-490kHz the levels were extrapolated to 300m distance using distance factor ($40 \cdot \log(3/300)$). Between 490kHz-30MHz the levels were extrapolated to 30m using distance correction factor ($40 \cdot \log(3/30)$). Between 30MHz-1GHz the levels were extrapolated to 3m distance using distance correction factor ($20 \cdot \log(10/3)$).

For measurements below 1 GHz the resolution bandwidth is set to 120 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements for the 30-1000 MHz range, 9 kHz for peak detection measurements or 9 kHz for quasi-peak detection measurements for the 0.15-30 MHz range and 200 Hz for peak detection measurements or 200 Hz for quasi-peak detection measurements for the 9 to 150 kHz range. Peak detection is used unless otherwise noted as quasi-peak.


Below 30MHz the antenna height is not changed. Above 30MHz the frequency range of interest is monitored at a fixed antenna height and EUT azimuth. For all frequencies the EUT is rotated through 360 degrees to maximize emissions received. Above 30MHz the antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Below 30MHz the antenna is set to X, Y, and Z orientations. Above 30MHz measurements are made with the antenna polarized in both the vertical and the horizontal positions.

RESULTS

8.2. TX EMISSIONS 0.009MHz TO 30 MHz


8.2.1. Outdoor to 10m SAC Correlation Data

Correlation Data for measurements 9kHz-30MHz between Outside and 10m semi-anechoic chamber at Underwriter Laboratories in Northbrook, IL.

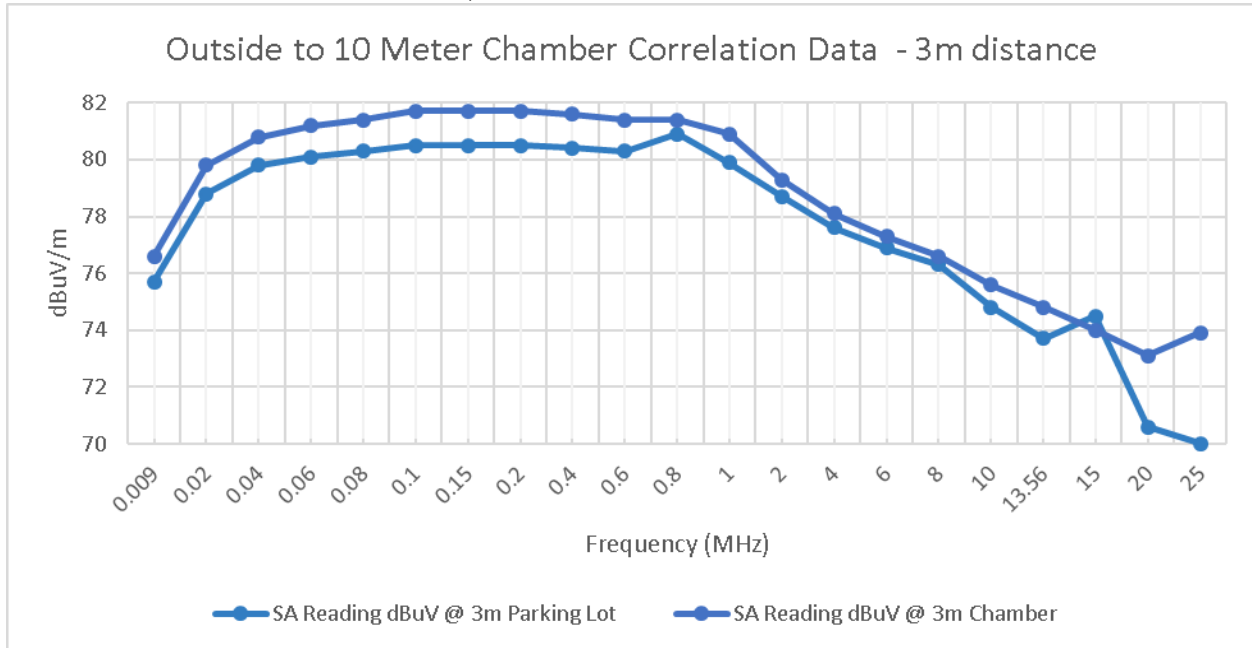


Correlation measurements were conducted using a signal source with an antenna outside in open area (parking lot). Immediately following the measurements the same setup was moved inside the 10 meter semi-anechoic chamber and the measurements were repeated. The above plot shows the difference in levels measured between outside and the 10 meter semi anechoic chamber. Measurements are required per KDB414788.


8.2.2. Loop Antenna Parallel to Floor

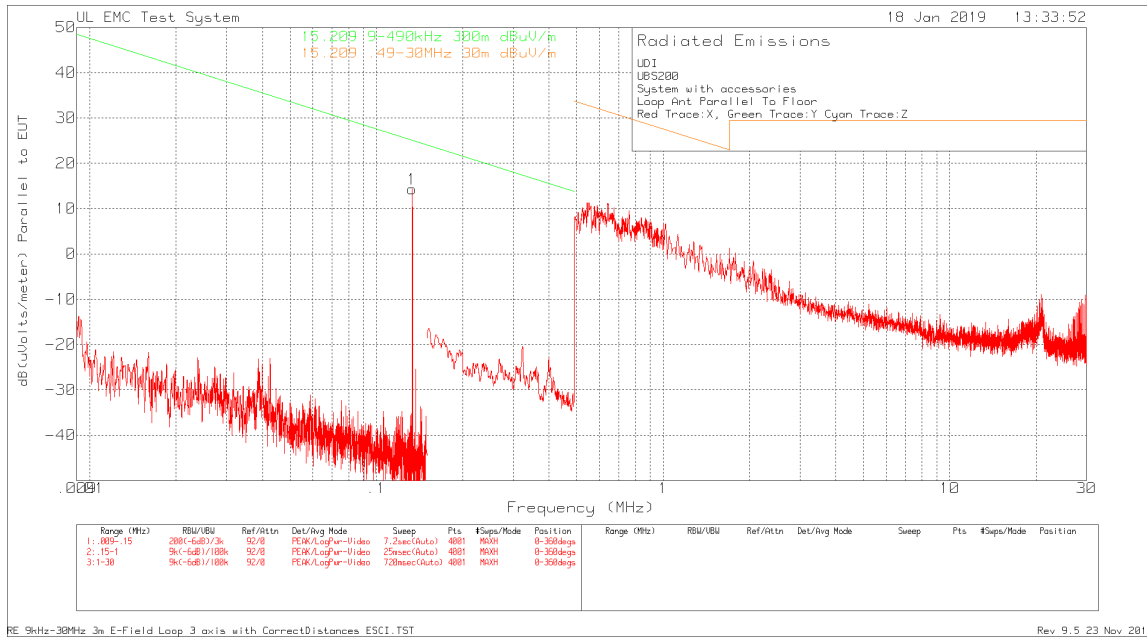

RX Antenna Parallel to EUT

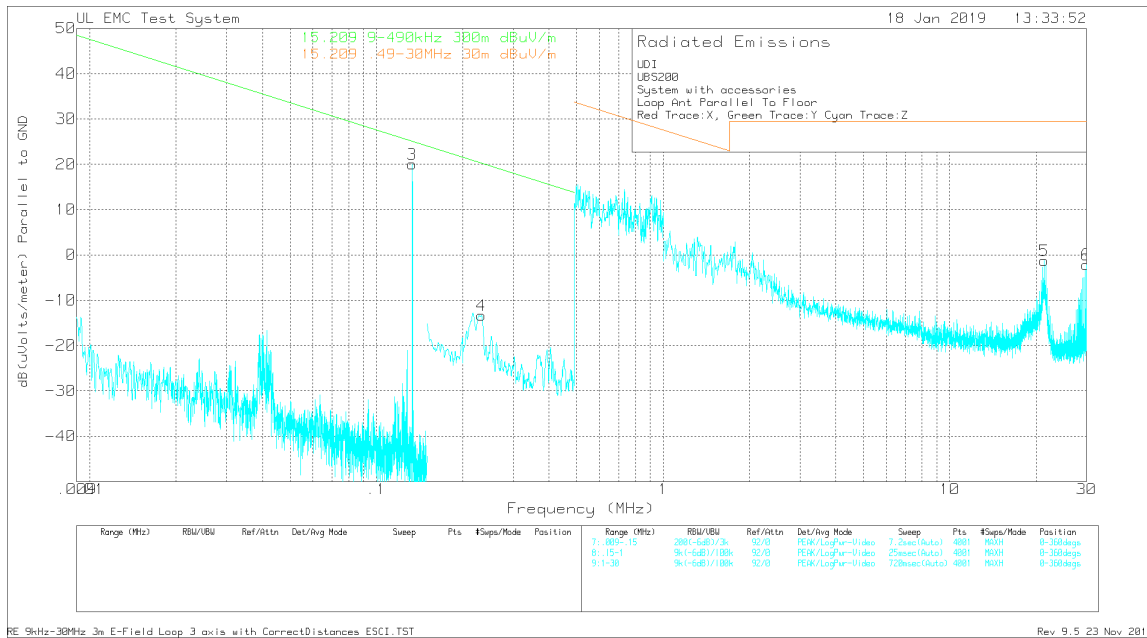

RX Antenna Parallel to Floor

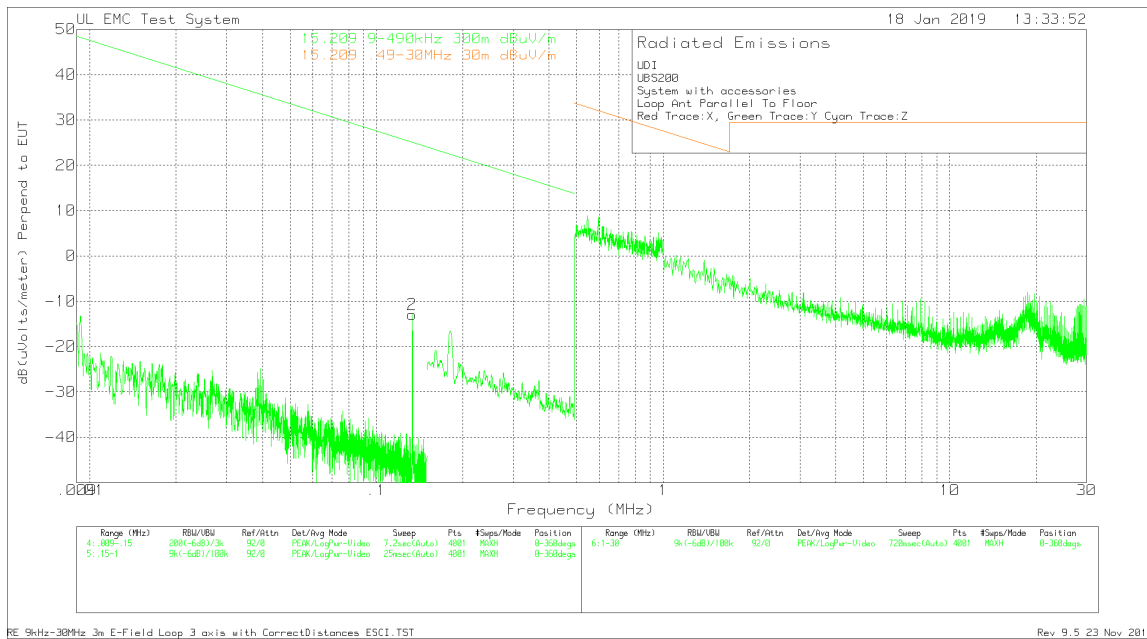

RX Antenna Perpendicular to EUT

Trace Markers - for reference only

No.	Frequency (MHz)	Test	Meter Reading	Transducer Factor (dB)	Gain/Loss Factor (dB)	Corrected Reading dB(uVolts/meter)	Limit:1	Limit:2
1	.13336	81.97dBuV Pk	Azimuth:0-360	12.2	-79.9	14.27	25.1	-
						Margin (dB)	-10.83	-
2	.13336	54.8dBuV Pk	Azimuth:0-360	12.2	-79.9	-12.9	25.1	-
						Margin (dB)	-38	-
3	.13336	87.69dBuV Pk	Azimuth:0-360	12.2	-79.9	19.99	25.1	-
						Margin (dB)	-5.11	-
4	.23254	54.63dBuV Pk	Azimuth:0-360	11.9	-79.9	-13.37	20.27	-
						Margin (dB)	-33.64	-
5	21.3435	27.97dBuV Pk	Azimuth:0-360	10.3	-39.5	-1.23	-	29.54
						Margin (dB)	-	-30.77
6	29.93475	27.86dBuV Pk	Azimuth:0-360	9.4	-39.4	-2.14	-	29.54
						Margin (dB)	-	-31.68


Radiated Emission Data - worst case measured

Test Frequency (MHz)	Meter Reading	Transducer Factor (dB)	Gain/Loss Factor (dB)	Corrected Reading dB(uVolts/meter)	Limit:1	Limit:2
.13422	87.87dBuV Av	12.2	-79.9	20.17	25.04	-
	Azimuth: 243			Margin (dB):	-4.87	-


LIMIT 1: 15.209 9-490kHz 300m dBuV/m
 LIMIT 2: 15.209 .49-30MHz 30m dBuV/m

Pk - Peak detector
 Qp - Quasi-Peak detector
 Av - Average detection


8.2.3. Loop Antenna Perpendicular to Floor

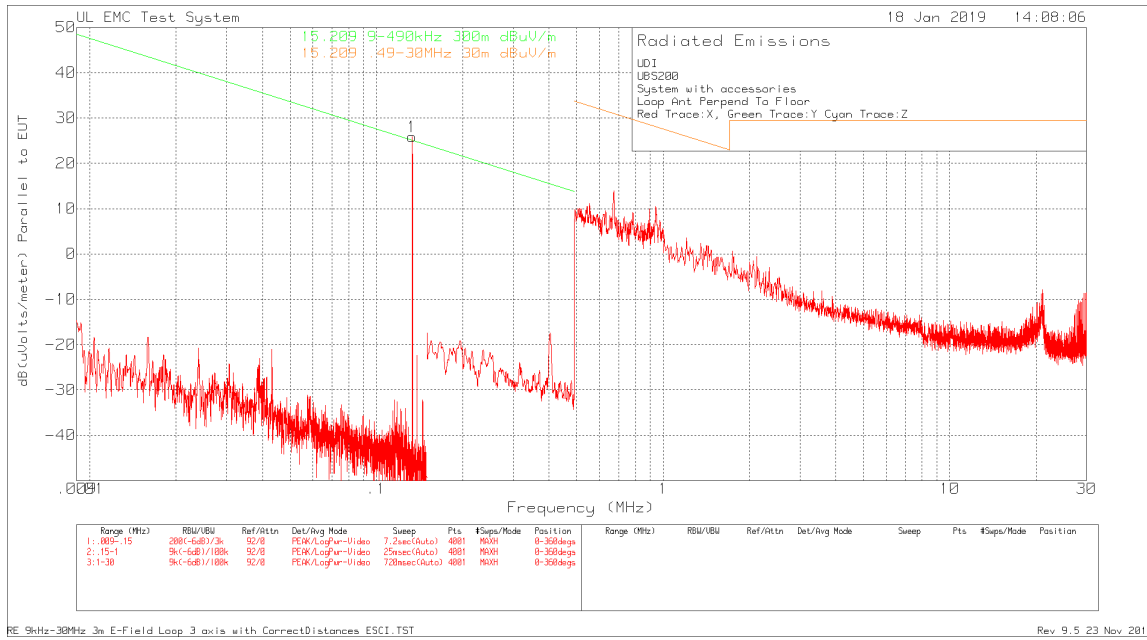

RX Antenna Parallel to EUT

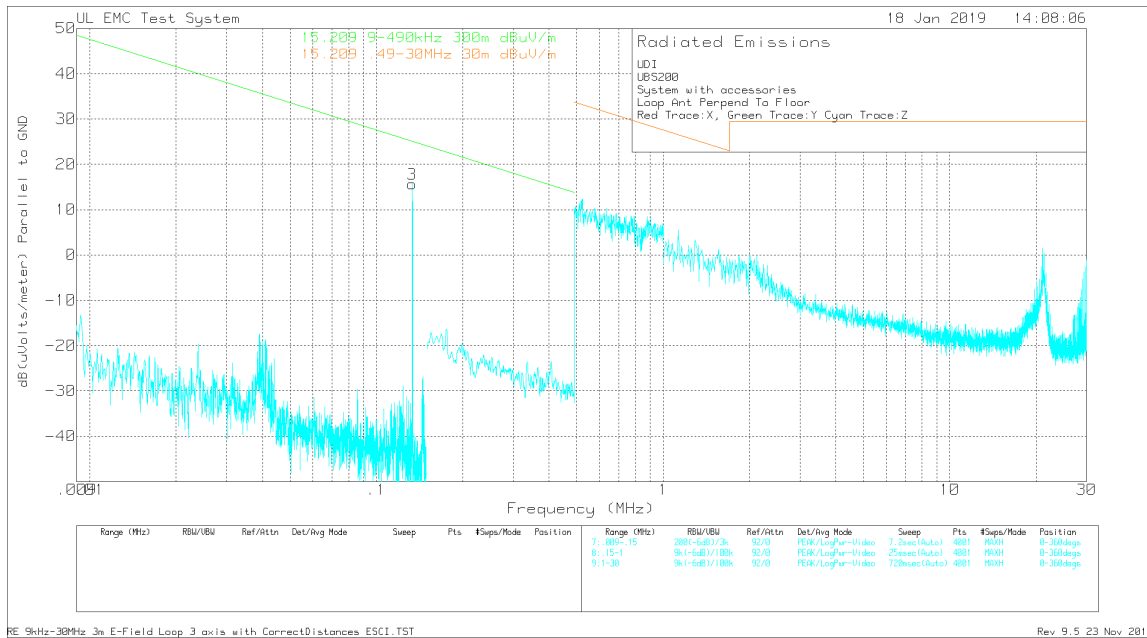

RX Antenna Parallel to Floor

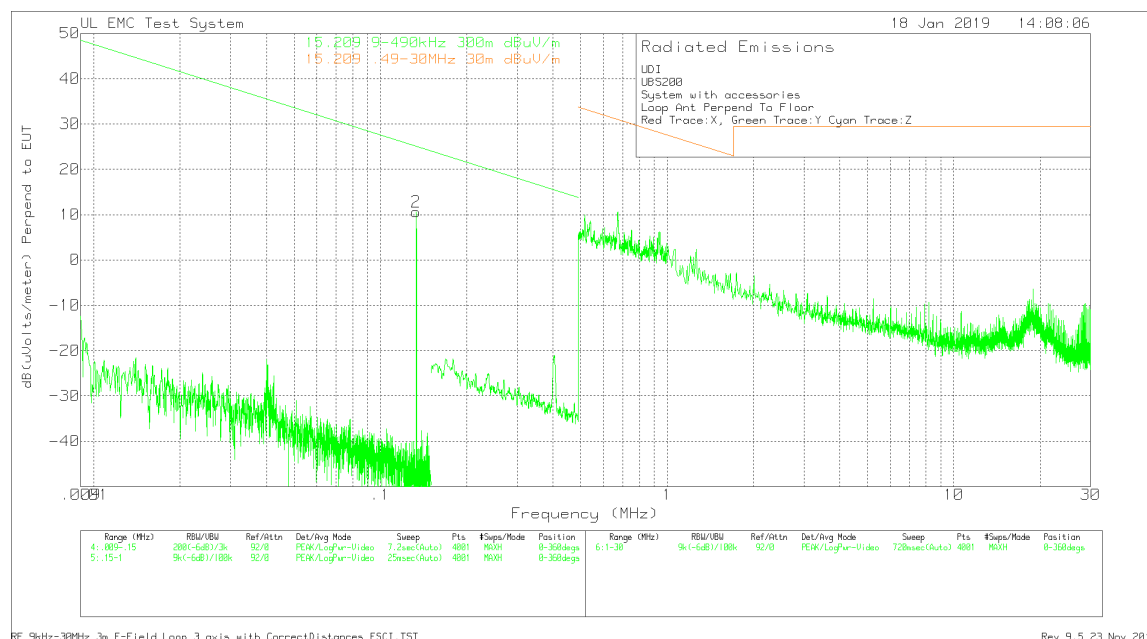

RX Antenna Perpendicular to EUT

Trace Markers - for reference only

No.	Frequency (MHz)	Test	Meter Reading	Transducer Factor (dB)	Gain/Loss Factor (dB)	Corrected Reading dB (uVolts/meter)	Limit:1	Limit:2
1	.13336		93.58dBuV Pk	12.2	-79.9	25.88	25.1	-
			Azimuth:0-360			Margin (dB)	.78	-
2	.13336		78.34dBuV Pk	12.2	-79.9	10.64	25.1	-
			Azimuth:0-360			Margin (dB)	-14.46	-
3	.13336		83.32dBuV Pk	12.2	-79.9	15.62	25.1	-
			Azimuth:0-360			Margin (dB)	-9.48	-


Radiated Emission Data - worst case measured

Test	Frequency (MHz)	Meter Reading	Transducer Factor (dB)	Gain/Loss Factor (dB)	Corrected Reading dB (uVolts/meter)	Limit:1	Limit:2
	.13423	92.6dBuV Qp	12.2	-79.9	24.9	25.04	-
		Azimuth: 85			Margin (dB):	-.14	-
	.13423	92.73dBuV Av	12.2	-79.9	25.03	25.04	-
		Azimuth: 85			Margin (dB):	-.01	-
	.13423	92.74dBuV Pk	12.2	-79.9	25.04	25.04	-
		Azimuth: 85			Margin (dB):	0	-


LIMIT 1: 15.209 9-490kHz 300m dBuV/m
 LIMIT 2: 15.209 .49-30MHz 30m dBuV/m

Pk - Peak detector
 Qp - Quasi-Peak detector
 Av - Average detection


8.2.4. Loop Antenna Standing Up

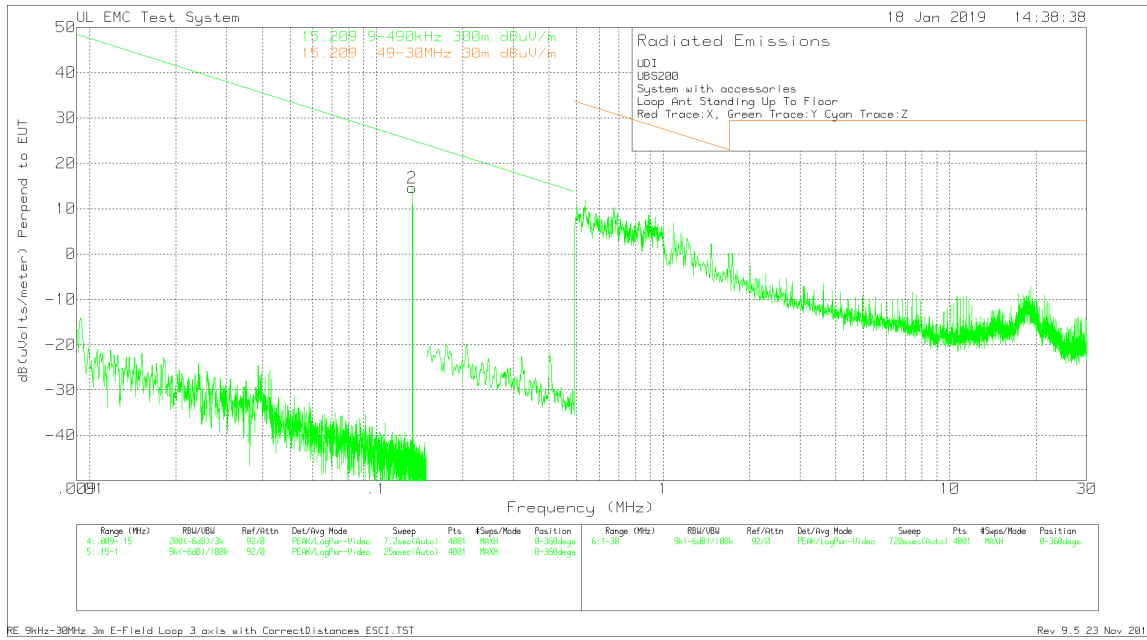

RX Antenna Perpendicular to EUT

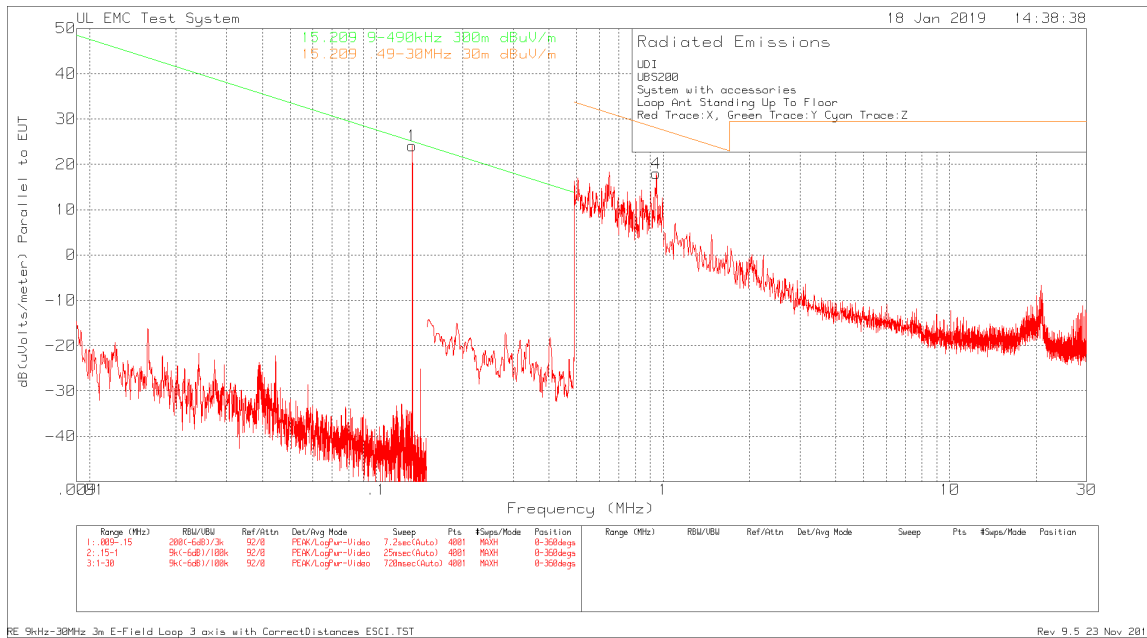

RX Antenna Parallel to EUT

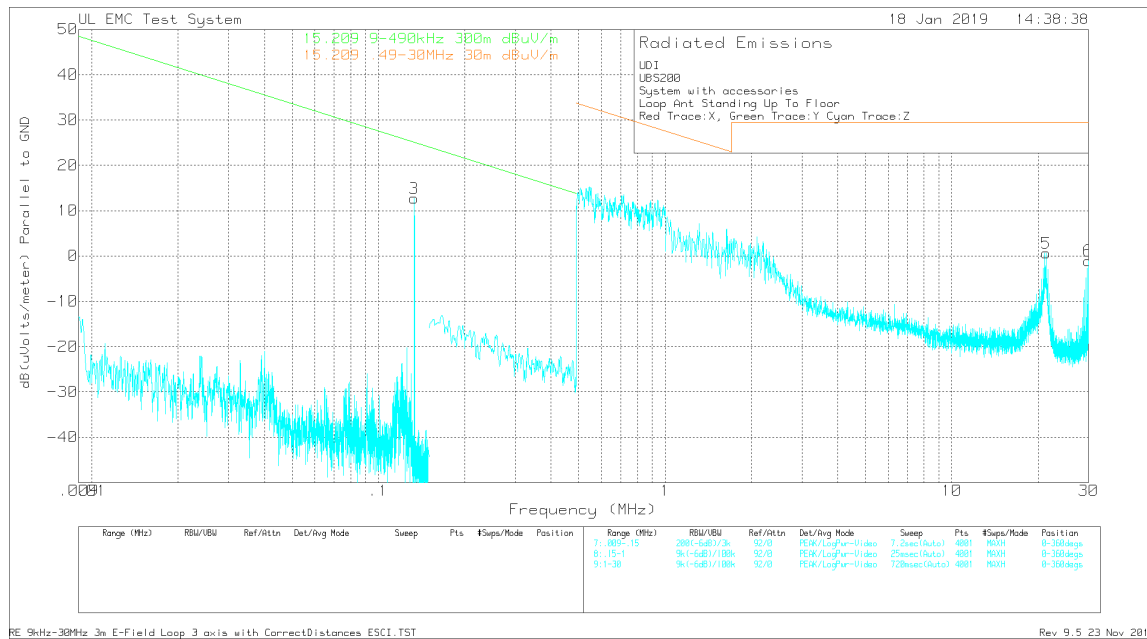

RE 9kHz-30MHz 3m E-Field Loop 3 axis with CorrectDistances ESCI.TST

Rev 9.5 23 Nov 2016

RX Antenna Parallel to Floor

Trace Markers - for reference only

No.	Frequency (MHz)	Test Meter Reading	Transducer Factor (dB)	Gain/Loss Factor (dB)	Corrected Reading dB(uVolts/meter)	Limit:1	Limit:2
1	.13336	91.8dBuV Pk Azimuth:0-360	12.2	-79.9	24.1	25.1	-
					Margin (dB)	-1	-
4	.94662	45.69dBuV Pk Azimuth:0-360	12.2	-39.9	17.99	-	28.08
					Margin (dB)	-	-10.09
2	.13336	82.31dBuV Pk Azimuth:0-360	12.2	-79.9	14.61	25.1	-
					Margin (dB)	-10.49	-
3	.13336	80.44dBuV Pk Azimuth:0-360	12.2	-79.9	12.74	25.1	-
					Margin (dB)	-12.36	-
5	21.3435	29.82dBuV Pk Azimuth:0-360	10.3	-39.5	.62	-	29.54
					Margin (dB)	-	-28.92
6	29.93475	28.95dBuV Pk Azimuth:0-360	9.4	-39.4	-1.05	-	29.54
					Margin (dB)	-	-30.59


Radiated Emission Data - worst case measured

Test Frequency (MHz)	Meter Reading	Transducer Factor (dB)	Gain/Loss Factor (dB)	Corrected Reading dB(uVolts/meter)	Limit:1	Limit:2
.13423 Azimuth: 277	92.01dBuV Qp	12.2	-79.9	24.31	25.04	-
				Margin (dB):	-.73	-
.13423 Azimuth: 277	92.14dBuV Av	12.2	-79.9	24.44	25.04	-
				Margin (dB):	-.6	-
.13423 Azimuth: 277	92.01dBuV Qp	12.2	-79.9	24.31	25.04	-
				Margin (dB):	-.73	-


LIMIT 1: 15.209 9-490kHz 300m dBuV/m
 LIMIT 2: 15.209 .49-30MHz 30m dBuV/m

Pk - Peak Detector
 Qp - Quasi-Peak detector
 Av - Average detection

8.2.5. Rod Antenna Parallel to Floor

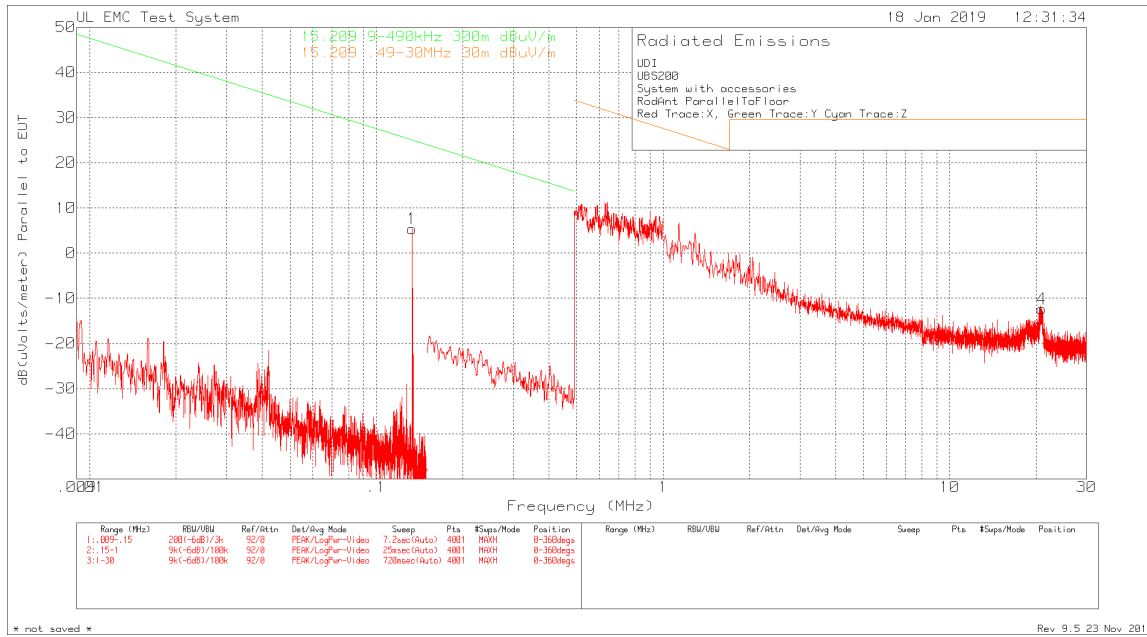


RX antenna parallel to EUT

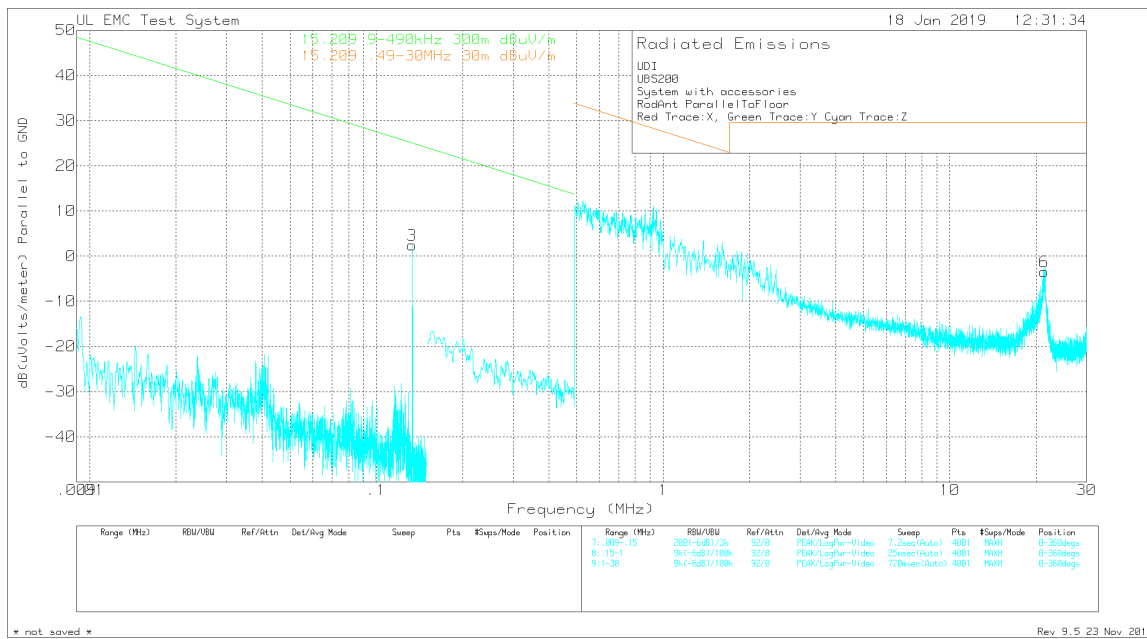


RX antenna parallel to floor


8.2.6. Rod Antenna Perpendicular to Floor

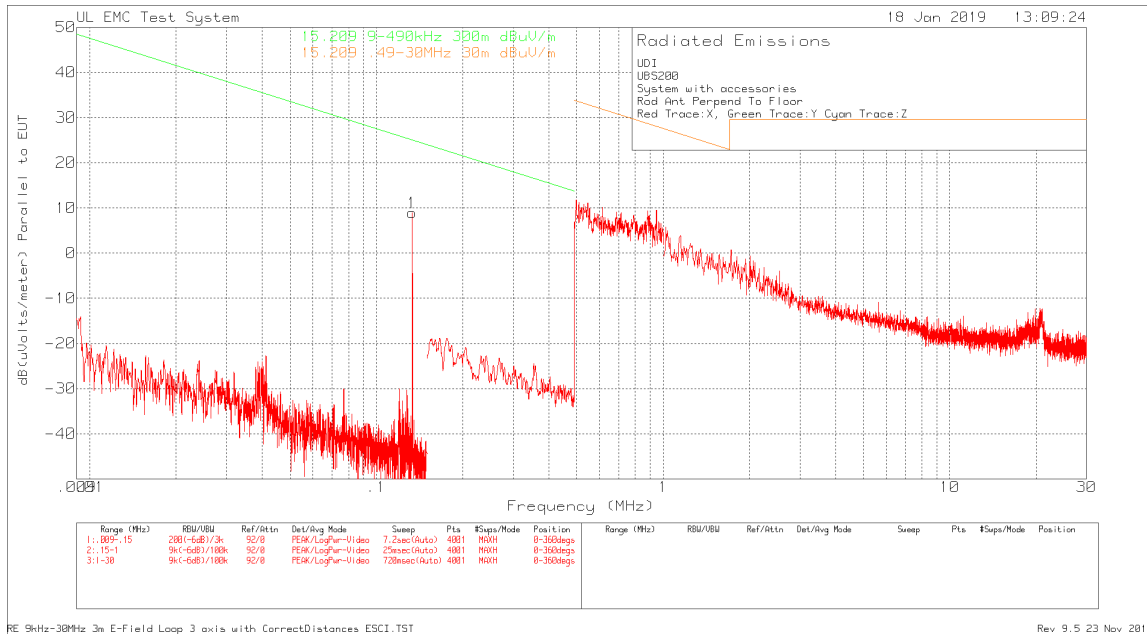

RX antenna parallel to EUT

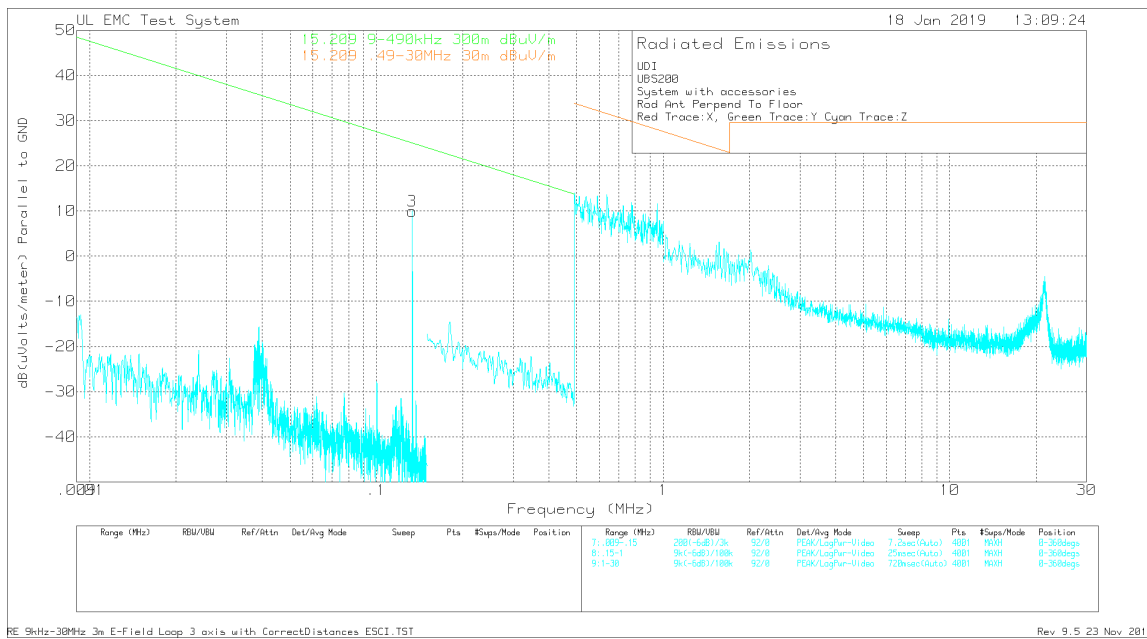

RX antenna parallel to floor

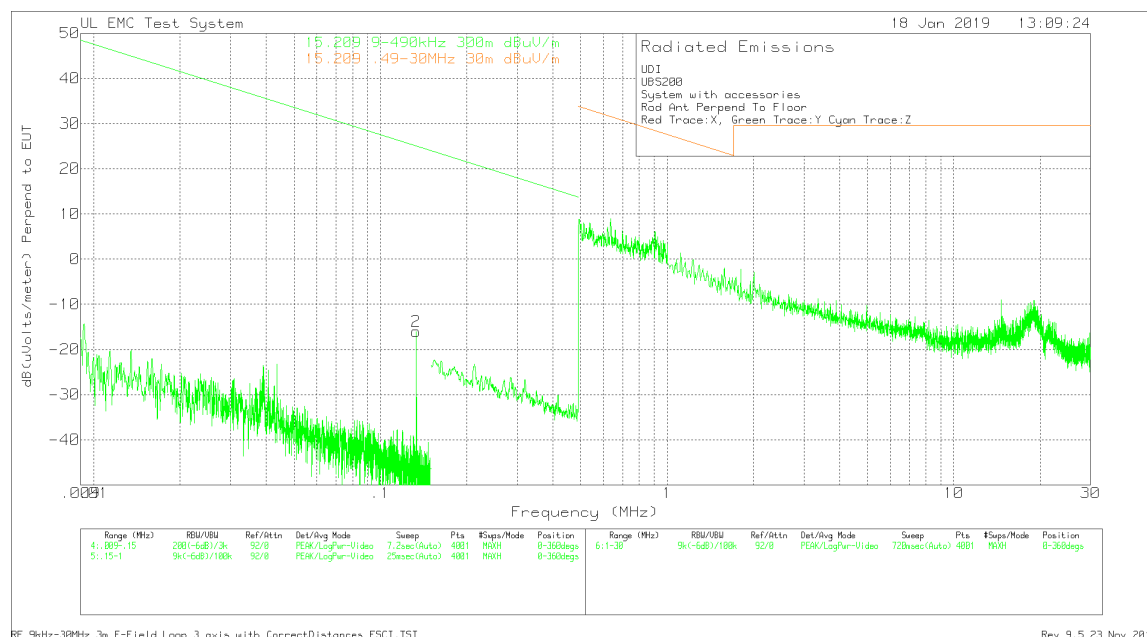

RX antenna perpendicular to EUT

Trace Markers - for reference only

No.	Frequency (MHz)	Meter Reading	Transducer Factor (dB)	Gain/Loss Factor (dB)	Corrected Reading dB(uVolts/meter)	Limit:1	Limit:2
1	.13336	76.62dBuV Pk Azimuth:0-360	12.2	-79.9	8.92	25.1	-
					Margin (dB)	-16.18	-
2	.13336	51.7dBuV Pk Azimuth:0-360	12.2	-79.9	-16	25.1	-
					Margin (dB)	-41.1	-
3	.13336	77.66dBuV Pk Azimuth:0-360	12.2	-79.9	9.96	25.1	-
					Margin (dB)	-15.14	-

Radiated Emission Data - worst case measured



Test	Meter	Transducer	Gain/Loss	Corrected	Limit:1	Limit:2
Frequency (MHz)	Reading	Factor (dB)	Factor (dB)	Reading dB(uVolts/meter)		
.13422	77.62dBuV Qp	12.2	-79.9	9.92	25.04	-
Azimuth: 227				Margin (dB):	-15.12	-
.13422	77.72dBuV Av	12.2	-79.9	10.02	25.04	-
Azimuth: 227				Margin (dB):	-15.02	-
.13422	77.75dBuV Pk	12.2	-79.9	10.05	25.04	-
Azimuth: 227				Margin (dB):	-14.99	-

LIMIT 1: 15.209 9-490kHz 300m dBuV/m
 LIMIT 2: 15.209 .49-30MHz 30m dBuV/m

Pk - Peak detector
 Qp - Quasi-Peak detector
 Av - Average detection

8.3. TX SPURIOUS EMISSION 30 TO 1000 MHz

8.3.1. Radiated Spurious Emissions – Loop Antenna (worst case orientation)

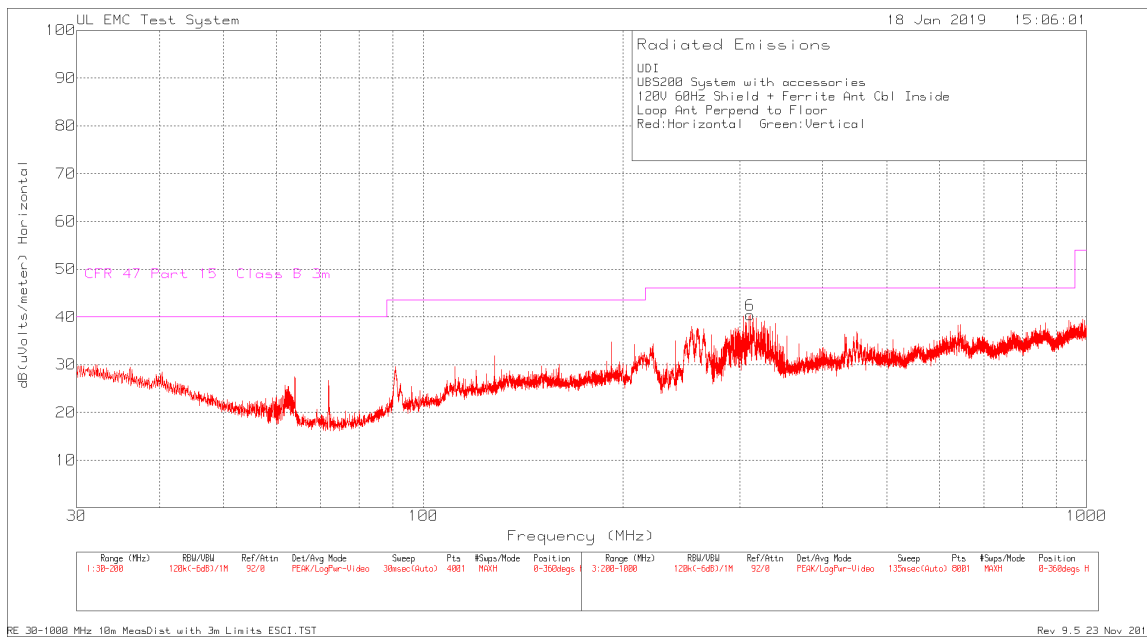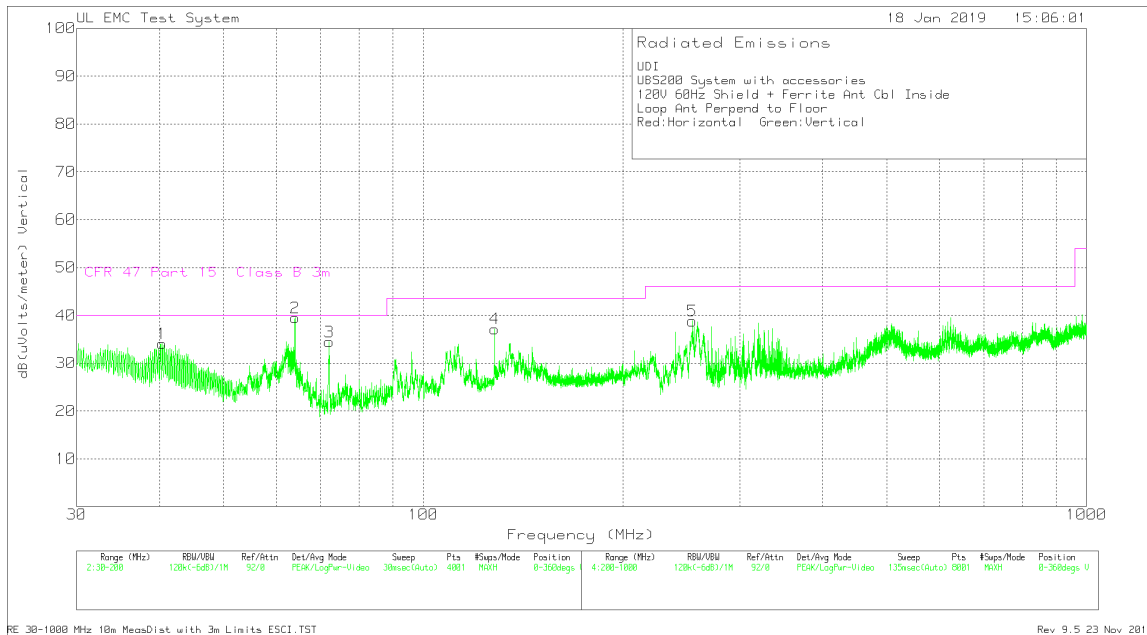

UDI
 UBS200 System with accessories
 120V 60Hz Shield + Ferrite Ant Cbl Inside
 Loop Ant Perpend to Floor
 Red:Horizontal Green:Vertical

Trace Markers

No.	Test Frequency (MHz)	Meter Reading	Transducer Factor (dB)	Gain/Loss Factor (dB)	Corrected Reading	Limit:1 dB (uVolts/meter)
1	40.37	39.51dBuV Pk	14.1	-19.5	34.11	40
		Azimuth:0-360	Height:101	Vert	Margin (dB)	-5.89
2	64.0425	53.03dBuV Pk	6.3	-19.8	39.53	40
		Azimuth:0-360	Height:251	Vert	Margin (dB)	-.47
3	72.1175	47.8dBuV Pk	6.2	-19.5	34.5	40
		Azimuth:0-360	Height:251	Vert	Margin (dB)	-5.5
4	128.0475	42.88dBuV Pk	13.9	-19.6	37.18	43.52
		Azimuth:0-360	Height:101	Vert	Margin (dB)	-6.34
6	310.8	45.29dBuV Pk	13.4	-18.3	40.39	46.02
		Azimuth:0-360	Height:299	Horz	Margin (dB)	-5.63
5	254.2	45.13dBuV Pk	12.2	-18.5	38.83	46.02
		Azimuth:0-360	Height:98	Vert	Margin (dB)	-7.19



Radiated Emission Data

Test Frequency (MHz)	Meter Reading	Transducer Factor (dB)	Gain/Loss Factor (dB)	Corrected Reading	Limit:1 dB (uVolts/meter)
64.0173	52.12dBuV Qp	6.3	-19.8	38.62	40
	Azimuth: 113	Height:261	Vert	Margin (dB):	-1.38

LIMIT 1: CFR 47 Part 15 Class B 3m

Pk - Peak Detector
 Qp - Quasi-Peak detector

8.3.2. Radiated Spurious Emissions – Rod Antenna (worst case orientation)

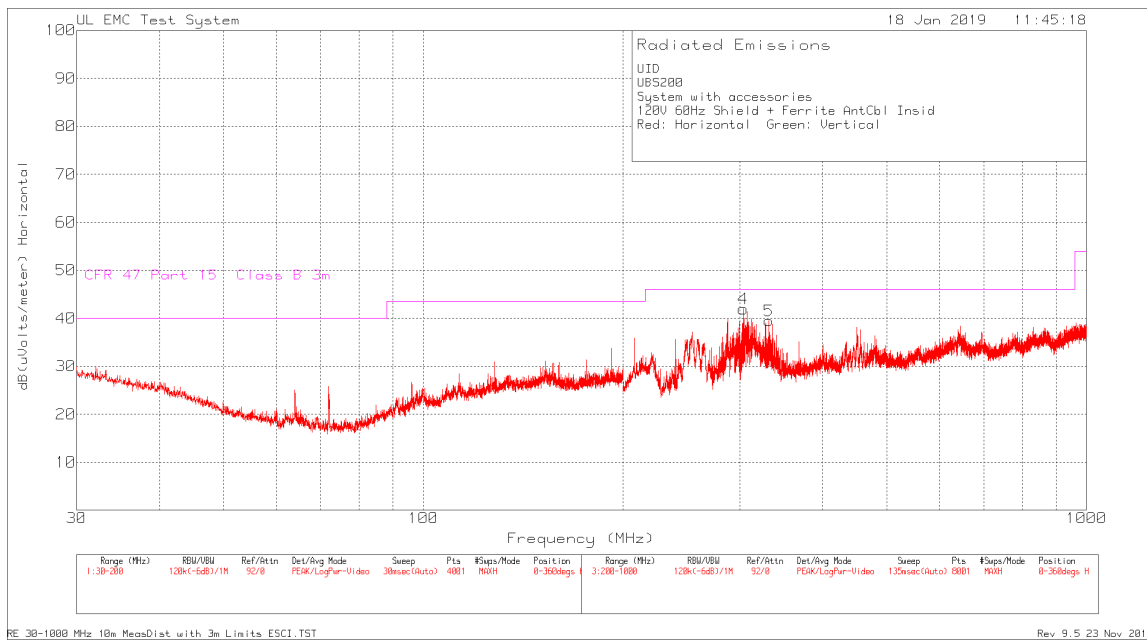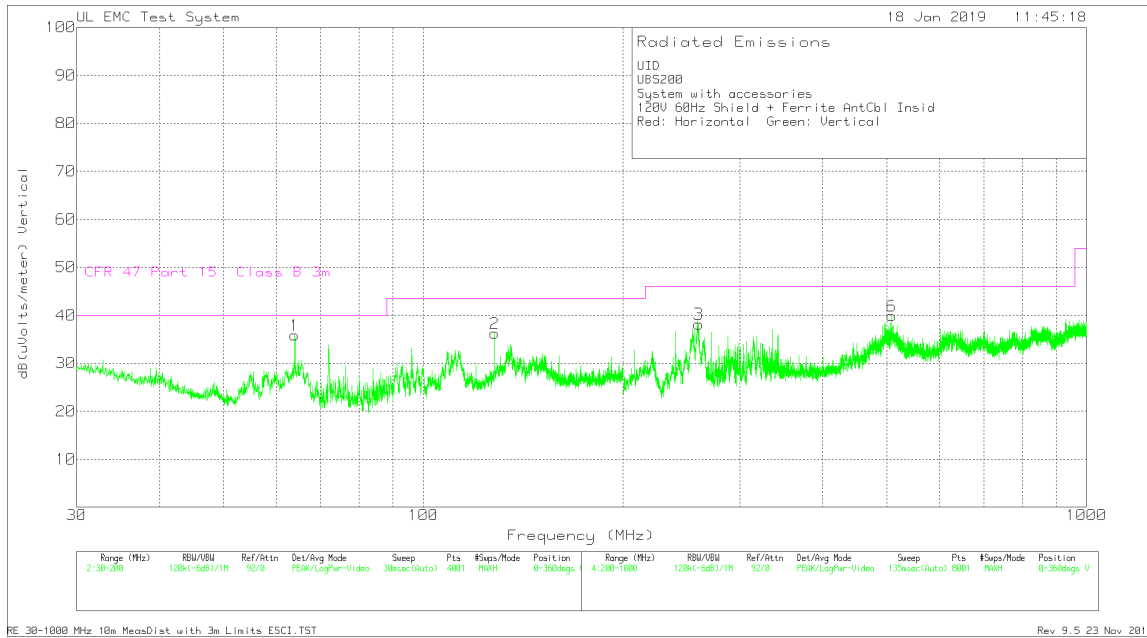

UID
 UBS200
 System with accessories
 120V 60Hz Shield + Ferrite AntCbl Insid
 Red: Horizontal Green: Vertical

Trace Markers

No.	Frequency (MHz)	Meter Reading	Transducer Factor (dB)	Gain/Loss Factor (dB)	Corrected Reading	Limit:1
=====						
1	64	49.35dBuV Pk	6.3	-19.8	35.85	40
		Azimuth:0-360	Height:252	Vert	Margin (dB)	-4.15
2	128.0475	41.93dBuV Pk	13.9	-19.6	36.23	43.52
		Azimuth:0-360	Height:101	Vert	Margin (dB)	-7.29
4	303.6	47.37dBuV Pk	13.2	-18.6	41.97	46.02
		Azimuth:0-360	Height:399	Horz	Margin (dB)	-4.05
5	331.9	43.37dBuV Pk	14.2	-18.1	39.47	46.02
		Azimuth:0-360	Height:399	Horz	Margin (dB)	-6.55
3	260	44.78dBuV Pk	12.4	-19	38.18	46.02
		Azimuth:0-360	Height:99	Vert	Margin (dB)	-7.84
6	508.8	39.2dBuV Pk	17.5	-16.8	39.9	46.02
		Azimuth:0-360	Height:298	Vert	Margin (dB)	-6.12

LIMIT 1: CFR 47 Part 15 Class B 3m
 Pk - Peak detector

9. AC MAINS LINE CONDUCTED EMISSIONS

LIMITS

§15.207 (a)
IC RSS-GEN, Section 7.2.2

Frequency of emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

* Decreases with the logarithm of the frequency.



TEST PROCEDURE

ANSI C63.10

RESULTS

No non-compliance noted:

Loop Antenna Configuration

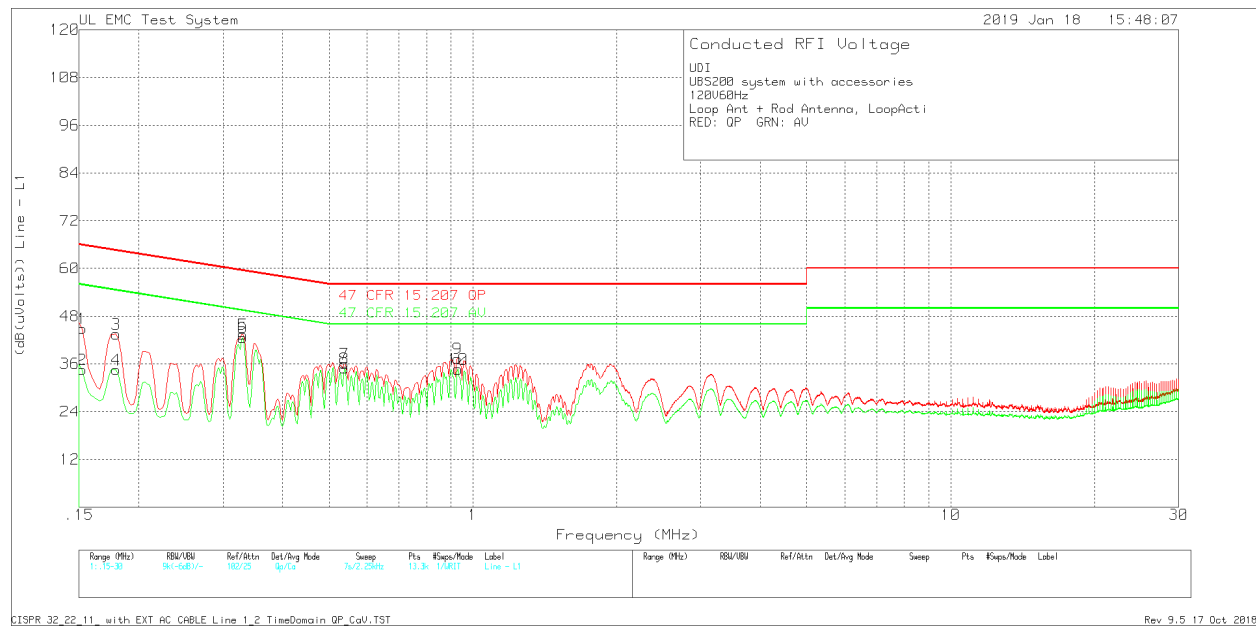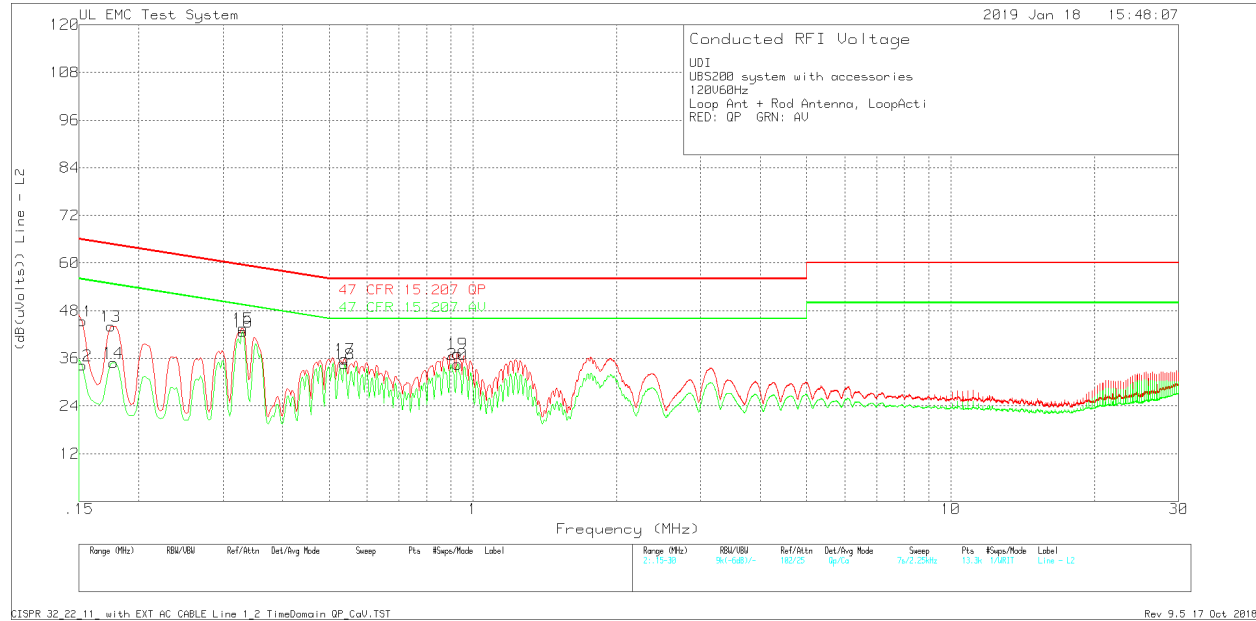

UDI
 UBS200 system with accessories
 120V60Hz
 Loop Ant + Rod Antenna, LoopActi
 RED: QP GRN: AV



Trace Markers

Test No.	Frequency (MHz)	Meter Reading	Transducer Factor (dB)	Gain/Loss Factor (dB)	Corrected Reading (dB(uVolts))	Limit: 1	2	
Line 1	.15225	30.12dBuV	Qp	.1	14.7	44.92	65.88	-
						Margin (dB)	-20.96	-
2	.15225	19.76dBuV	Ca	.1	14.7	34.56	-	55.88
						Margin (dB)	-	-21.32
3	.17925	31.19dBuV	Qp	0	12.3	43.49	64.52	-
						Margin (dB)	-21.03	-
4	.17925	22.23dBuV	Ca	0	12.3	34.53	-	54.52
						Margin (dB)	-	-19.99
5	.33	32.75dBuV	Qp	0	10.7	43.45	59.45	-
						Margin (dB)	-16	-
6	.33	31.92dBuV	Ca	0	10.7	42.62	-	49.45
						Margin (dB)	-	-6.83
7	.53925	25.42dBuV	Qp	0	10.6	36.02	56	-
						Margin (dB)	-19.98	-
8	.53925	24.27dBuV	Ca	0	10.6	34.87	-	46
						Margin (dB)	-	-11.13
9	.9285	26.86dBuV	Qp	0	10.5	37.36	56	-
						Margin (dB)	-18.64	-
10	.93075	24.16dBuV	Ca	0	10.5	34.66	-	46
						Margin (dB)	-	-11.34
Neutral								
11	.15225	30.58dBuV	Qp	.1	14.7	45.38	65.88	-
						Margin (dB)	-20.5	-
12	.15225	19.42dBuV	Ca	.1	14.7	34.22	-	55.88
						Margin (dB)	-	-21.66
13	.17475	31.27dBuV	Qp	.1	12.7	44.07	64.73	-
						Margin (dB)	-20.66	-
14	.177	22.24dBuV	Ca	.1	12.5	34.84	-	54.63
						Margin (dB)	-	-19.79
15	.33	32.88dBuV	Qp	0	10.7	43.58	59.45	-
						Margin (dB)	-15.87	-
16	.33	32dBuV	Ca	0	10.7	42.7	-	49.45
						Margin (dB)	-	-6.75
17	.53925	25.2dBuV	Qp	0	10.6	35.8	56	-
						Margin (dB)	-20.2	-
18	.53925	23.99dBuV	Ca	0	10.6	34.59	-	46
						Margin (dB)	-	-11.41
19	.9285	26.75dBuV	Qp	0	10.5	37.25	56	-
						Margin (dB)	-18.75	-
20	.9285	23.99dBuV	Ca	0	10.5	34.49	-	46
						Margin (dB)	-	-11.51

LIMIT 1: 47 CFR 15.207 QP
 LIMIT 2: 47 CFR 15.207 AV

Qp - Quasi-Peak detector
 Ca - CISPR Average detection

Rod Antenna Configuration

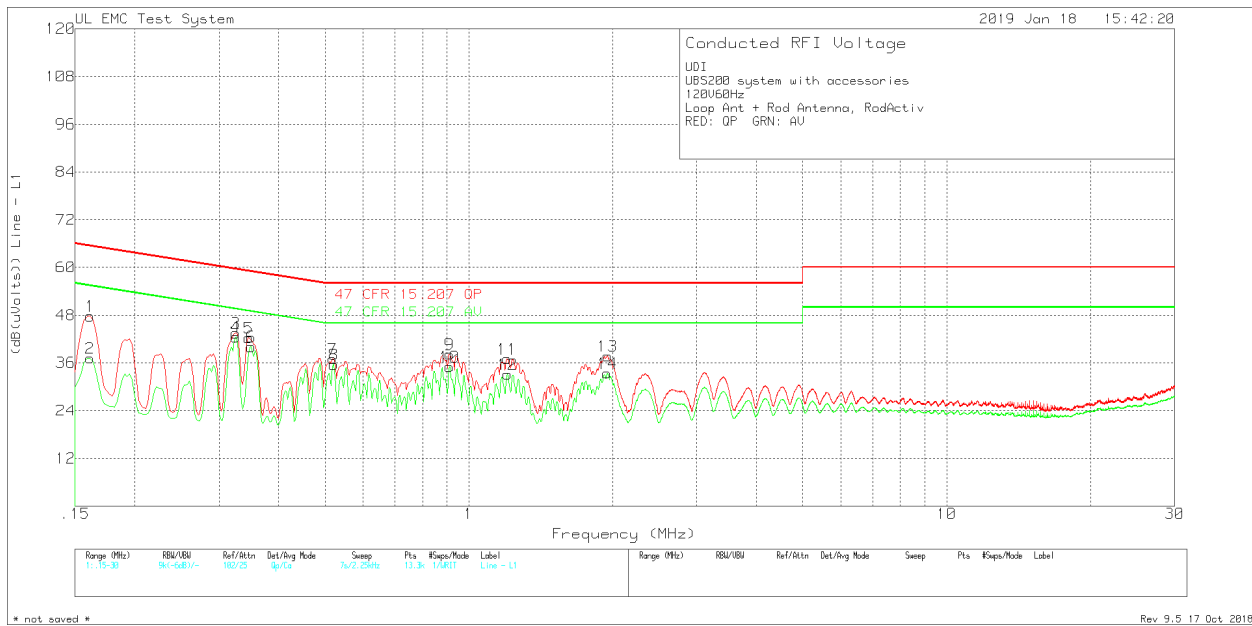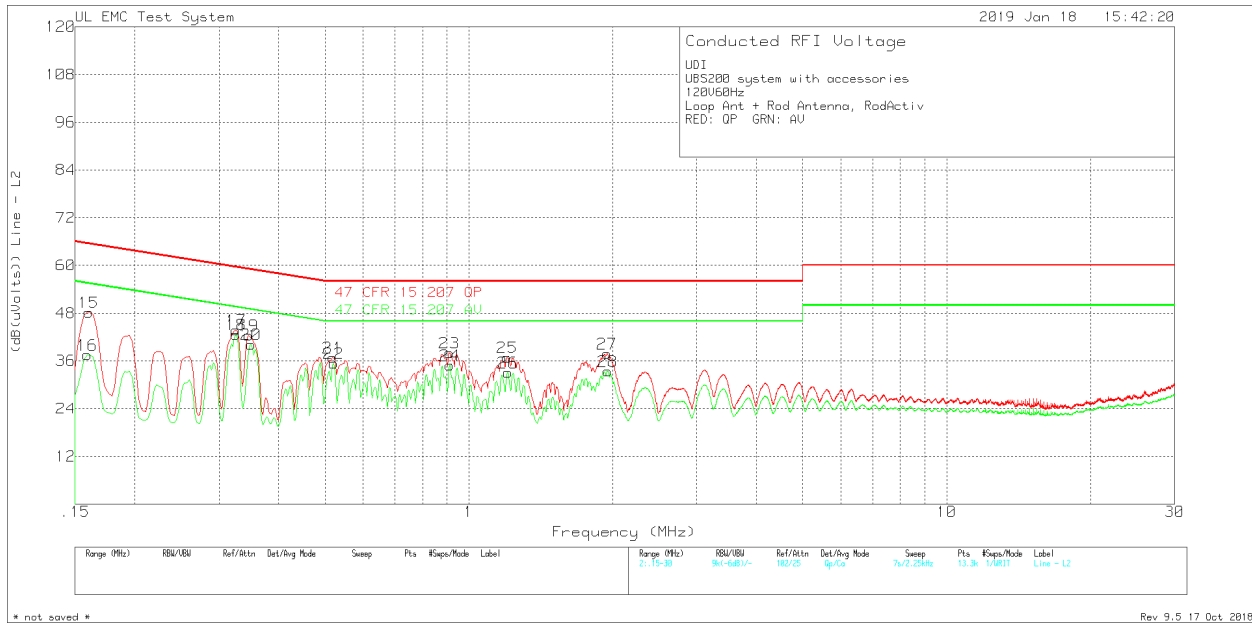

UDI
 UBS200 system with accessories
 120V60Hz
 Loop Ant + Rod Antenna, RodActiv
 RED: QP GRN: AV

Trace Markers


No.	Test Frequency (MHz)	Meter Reading	Transducer Factor (dB)	Gain/Loss Factor (dB)	Corrected Reading (dB(uVolts))	Limit:1	2	
Line 1	.16125	33.75dBuV	Qp	.1	13.9	47.75	65.4	-
						Margin (dB)	-17.65	-
2	.16125	23.2dBuV	Ca	.1	13.9	37.2	-	55.4
						Margin (dB)	-	-18.2
3	.3255	32.81dBuV	Qp	0	10.7	43.51	59.57	-
						Margin (dB)	-16.06	-
4	.3255	31.82dBuV	Ca	0	10.7	42.52	-	49.57
						Margin (dB)	-	-7.05
5	.34575	31.62dBuV	Qp	0	10.7	42.32	59.06	-
						Margin (dB)	-16.74	-
6	.35025	29.36dBuV	Ca	0	10.7	40.06	-	48.96
						Margin (dB)	-	-8.9
7	.519	26.46dBuV	Qp	0	10.6	37.06	56	-
						Margin (dB)	-18.94	-
8	.52125	25.02dBuV	Ca	0	10.6	35.62	-	46
						Margin (dB)	-	-10.38
9	.9105	27.62dBuV	Qp	0	10.5	38.12	56	-
						Margin (dB)	-17.88	-
10	.9105	24.5dBuV	Ca	0	10.5	35	-	46
						Margin (dB)	-	-11
11	1.203	26.49dBuV	Qp	0	10.5	36.99	56	-
						Margin (dB)	-19.01	-
12	1.20525	22.66dBuV	Ca	0	10.5	33.16	-	46
						Margin (dB)	-	-12.84
13	1.95	27.13dBuV	Qp	0	10.6	37.73	56	-
						Margin (dB)	-18.27	-
14	1.94775	22.78dBuV	Ca	0	10.6	33.38	-	46
						Margin (dB)	-	-12.62
Neutral								
15	.16013	34.11dBuV	Qp	.1	14	48.21	65.46	-
						Margin (dB)	-17.25	-
16	.159	23.28dBuV	Ca	.1	14.1	37.48	-	55.52
						Margin (dB)	-	-18.04
17	.3255	33.01dBuV	Qp	0	10.7	43.71	59.57	-
						Margin (dB)	-15.86	-
18	.3255	31.94dBuV	Ca	0	10.7	42.64	-	49.57
						Margin (dB)	-	-6.93
19	.34575	31.67dBuV	Qp	0	10.7	42.37	59.06	-
						Margin (dB)	-16.69	-
20	.35025	29.48dBuV	Ca	0	10.7	40.18	-	48.96
						Margin (dB)	-	-8.78
21	.519	26.23dBuV	Qp	0	10.6	36.83	56	-
						Margin (dB)	-19.17	-
22	.52125	24.8dBuV	Ca	0	10.6	35.4	-	46
						Margin (dB)	-	-10.6
23	.9105	27.51dBuV	Qp	0	10.5	38.01	56	-
						Margin (dB)	-17.99	-
24	.91275	24.36dBuV	Ca	0	10.5	34.86	-	46
						Margin (dB)	-	-11.14
25	1.203	26.37dBuV	Qp	0	10.5	36.87	56	-
						Margin (dB)	-19.13	-
26	1.2075	22.56dBuV	Ca	0	10.5	33.06	-	46
						Margin (dB)	-	-12.94
27	1.9455	27.21dBuV	Qp	0	10.6	37.81	56	-
						Margin (dB)	-18.19	-
28	1.95225	22.8dBuV	Ca	0	10.6	33.4	-	46
						Margin (dB)	-	-12.6

LIMIT 1: 47 CFR 15.207 QP
 LIMIT 2: 47 CFR 15.207 AV

Qp - Quasi-Peak detector
 Ca - CISPR Average detection

10. SETUP PHOTOS

RADIATED EMISSION BELOW 30 MHz – TX Loop and Rod Parallel to Ground, RX Loop X

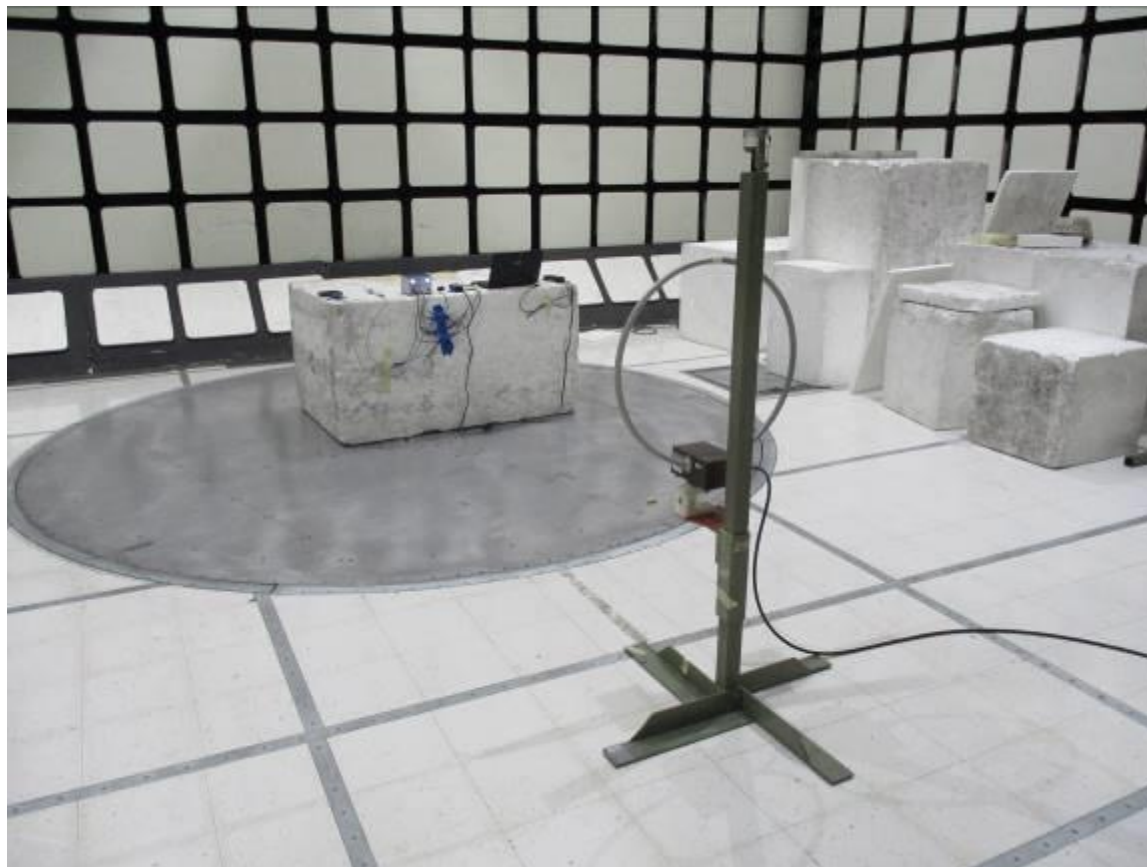


RADIATED EMISSION BELOW 30 MHz – TX Loop and Rod Parallel to Ground, RX Loop Y




RADIATED EMISSION BELOW 30 MHz – TX Loop and Rod Parallel to Ground, RX Loop Z



RADIATED EMISSION BELOW 30 MHz – TX Loop Perpendicular to Ground, RX Loop X

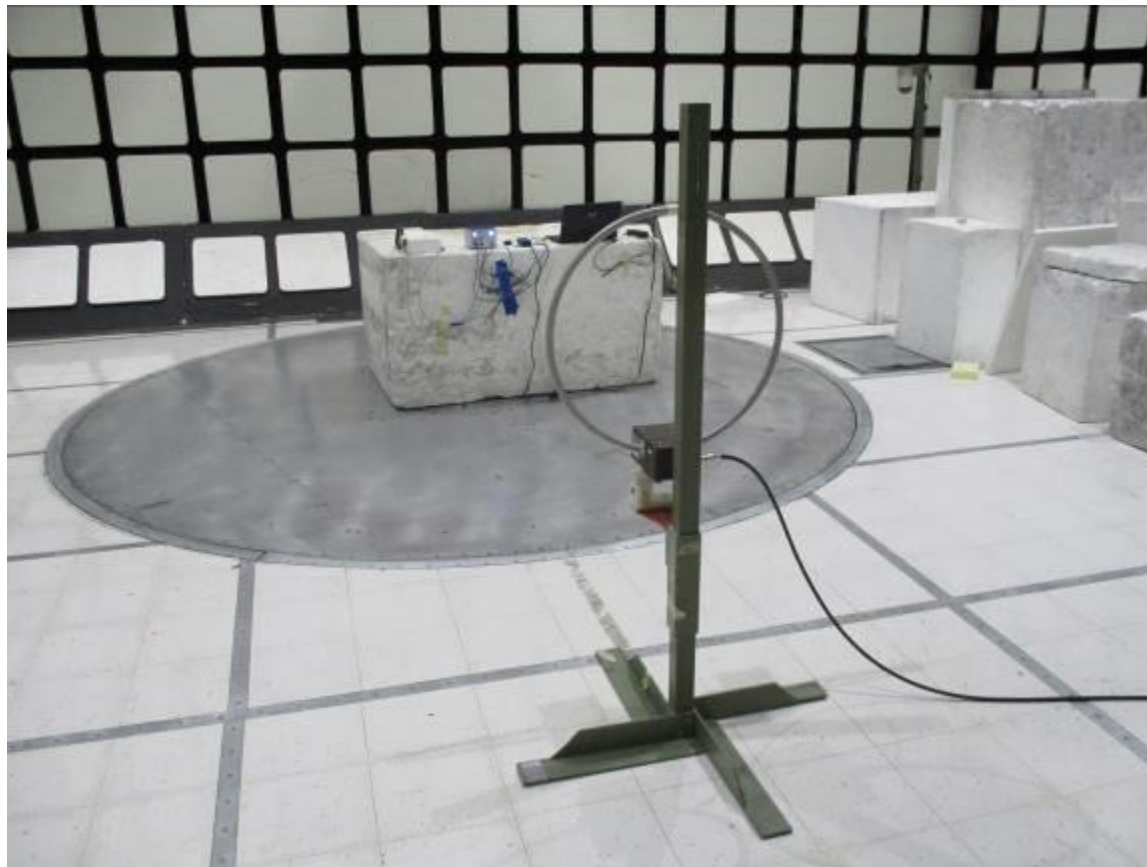

RADIATED EMISSION BELOW 30 MHz – TX Loop Perpendicular to Ground, RX Loop Y

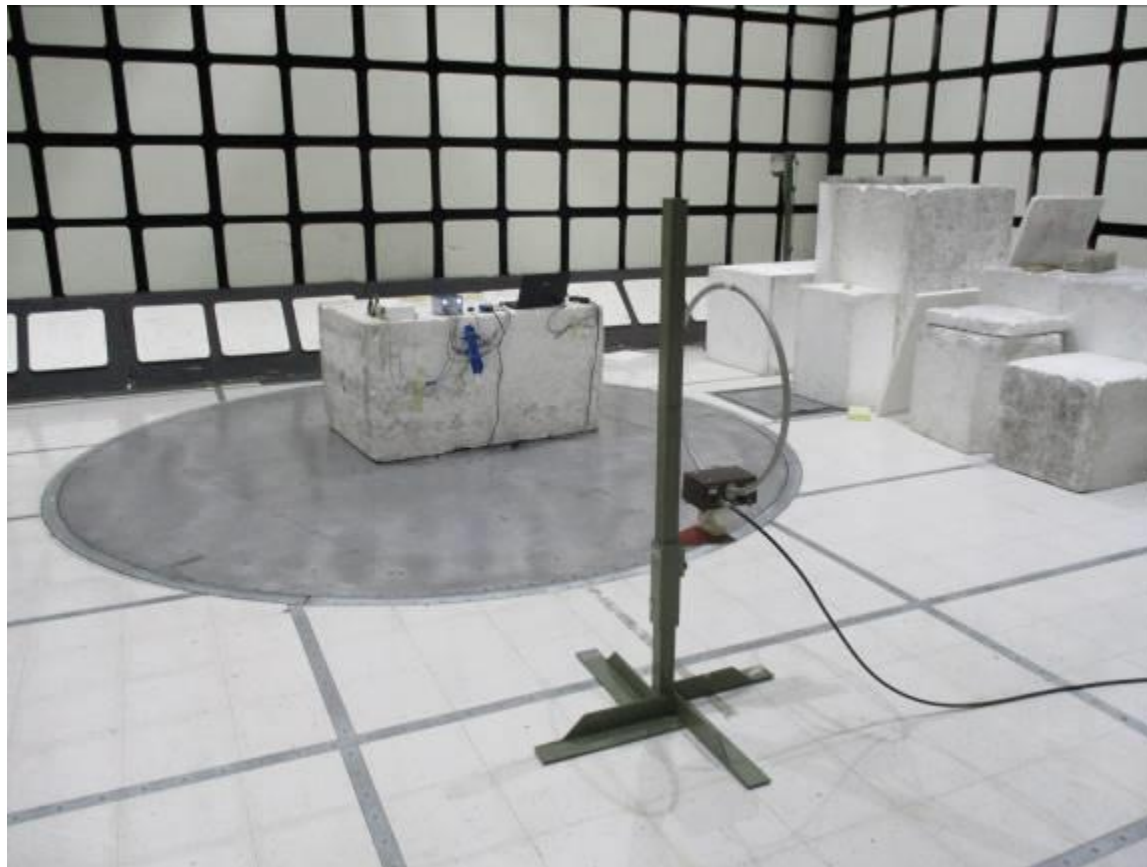


RADIATED EMISSION BELOW 30 MHz – TX Loop Perpendicular to Ground, RX Loop Z



RADIATED EMISSION BELOW 30 MHz – TX Loop Upright, RX Loop X



RADIATED EMISSION BELOW 30 MHz – TX Loop Upright, RX Loop Y

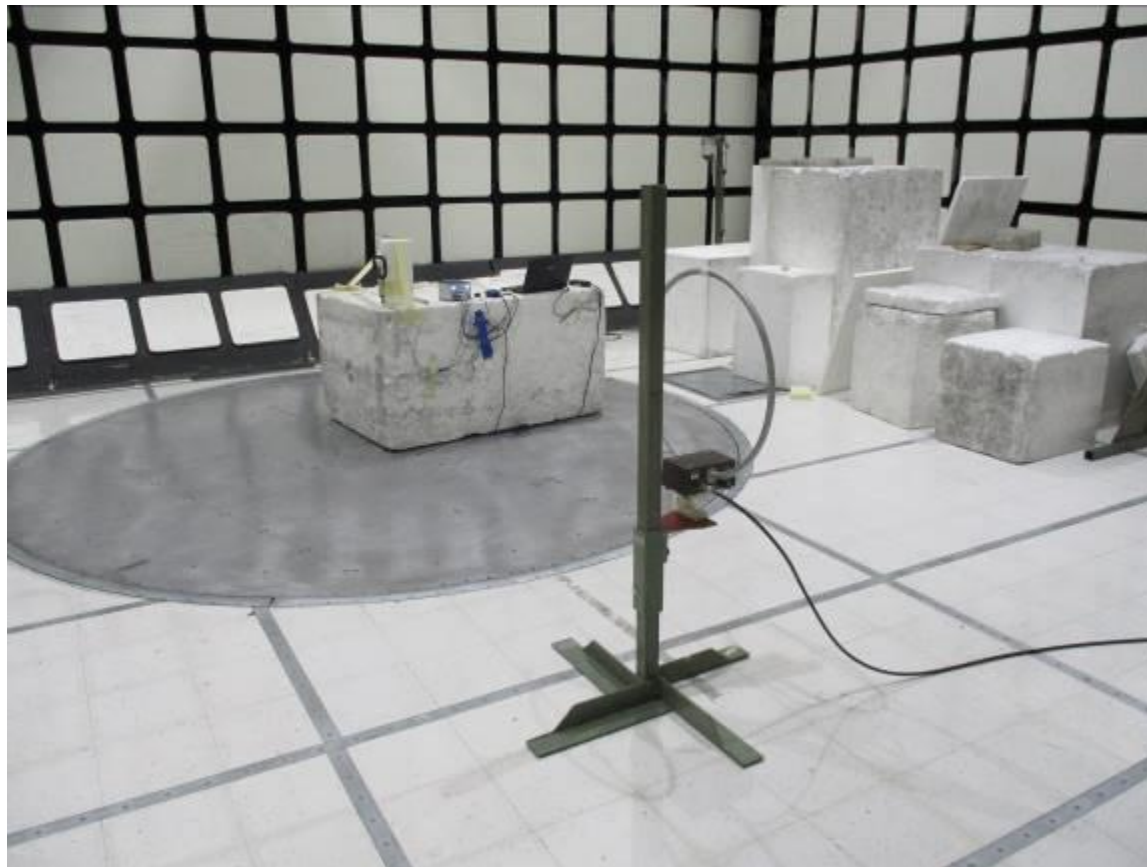


RADIATED EMISSION BELOW 30 MHz – TX Loop Upright, RX Loop Z




RADIATED EMISSION BELOW 30 MHz – TX Rod Upright, RX Loop X



RADIATED EMISSION BELOW 30 MHz – TX Rod Upright, RX Loop Y

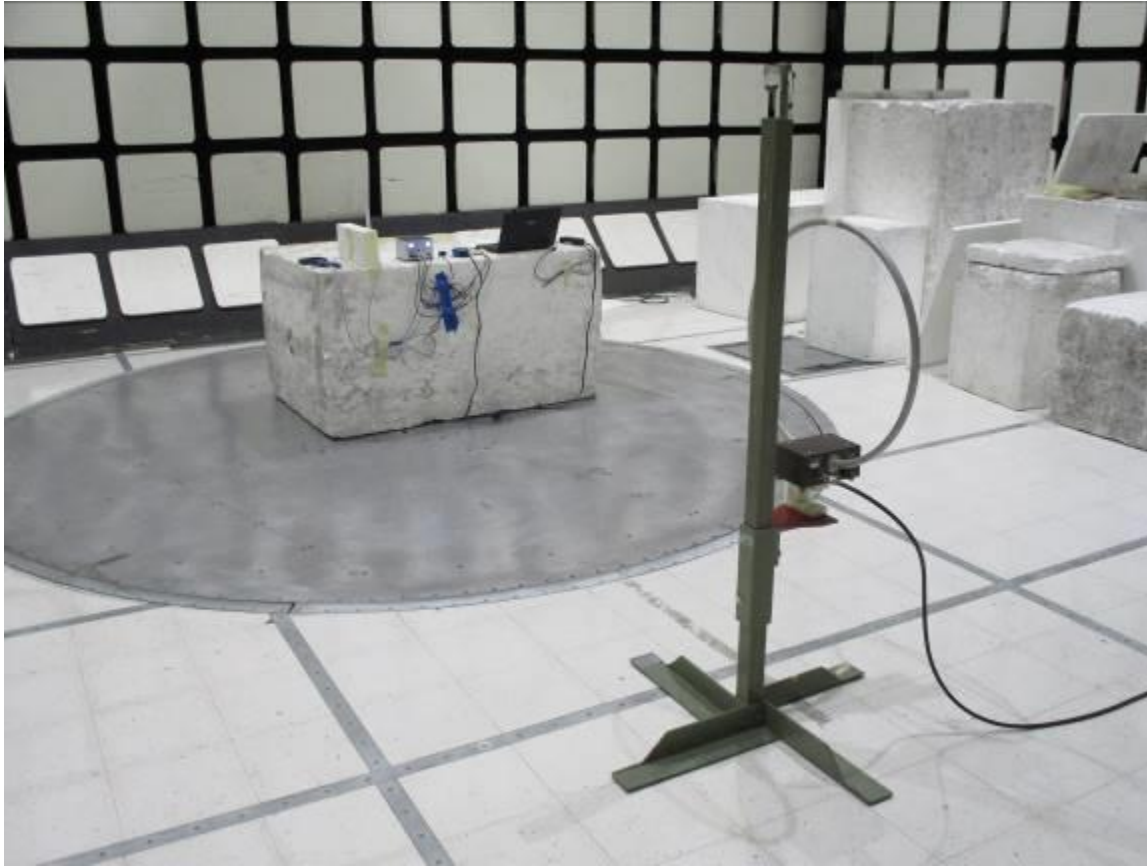

RADIATED EMISSION BELOW 30 MHz – TX Rod Upright, RX Loop Z

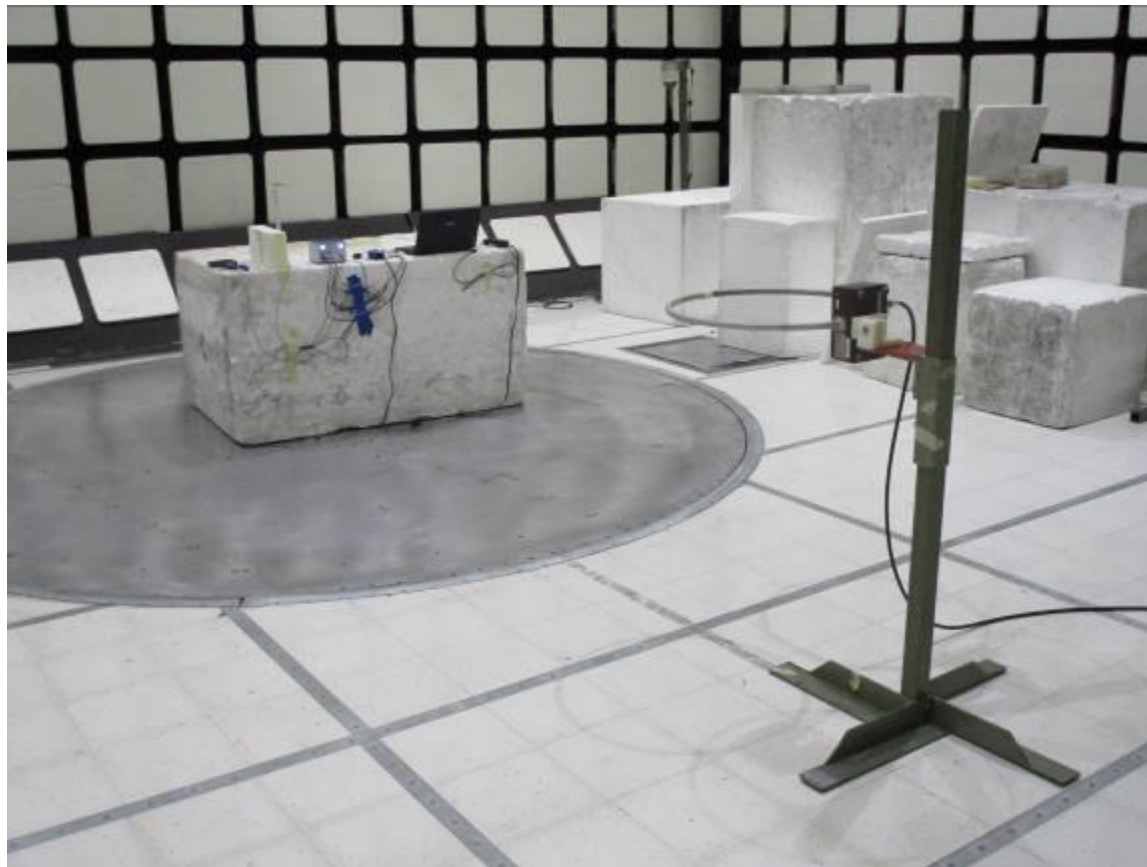

RADIATED EMISSION BELOW 30MHz – 1GHz General Setup



Line Conducted Emissions



END OF TEST REPORT