

Carestream Dental, LLC

RF TEST REPORT

Report Type:

FCC Part 15.225/RSS-210 RF report

Model:

CS 7200

REPORT NUMBER:

221000173SHA-001

ISSUE DATE:

January 16, 2023

DOCUMENT CONTROL NUMBER:

TTRFFCCPART15C_V1 © 2018 Intertek



Applicant : Carestream Dental, LLC
3625 Cumberland Boulevard, Suite 700, Atlanta, GA USA 30339

Manufacturer : Carestream Dental, LLC
3625 Cumberland Boulevard, Suite 700, Atlanta, GA USA 30339

FCC ID : 2ASFG-CS7200
IC : 24914-CS7200

SUMMARY:

The equipment complies with the requirements according to the following standard(s) or Specification:

47CFR Part 15 (2020): Radio Frequency Devices (Subpart C)

ANSI C63.10 (2013): American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

RSS-210 Issue 10 (December 2019) Amendment (April 2020): Licence-exempt Radio Apparatus (All Frequency Bands): Category I Equipment

RSS-Gen Issue 5 (April 2018) Amendment 1 (March 2019) Amendment 2 (February 2021): General Requirements for Compliance of Radio Apparatus

PREPARED BY:



Project Engineer
Erick Liu

REVIEWED BY:



Reviewer
Wakeyou Wang

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST REPORT

Content

REVISION HISTORY..... 5

MEASUREMENT RESULT SUMMARY 6

1 GENERAL INFORMATION 7

1.1 DESCRIPTION OF EQUIPMENT UNDER TEST (EUT) 7

1.2 TECHNICAL SPECIFICATION 7

1.3 DESCRIPTION OF TEST FACILITY 8

2 TEST SPECIFICATIONS..... 9

2.1 STANDARDS OR SPECIFICATION 9

2.2 MODE OF OPERATION DURING THE TEST..... 9

2.3 TEST SOFTWARE LIST 9

2.4 TEST PERIPHERALS LIST 9

2.5 TEST ENVIRONMENT CONDITION:..... 10

20DB BANDWIDTH & 99% BANDWIDTH 10

2.6 INSTRUMENT LIST 11

2.7 MEASUREMENT UNCERTAINTY 13

3 FUNDAMENTAL EMISSION 14

3.1 LIMIT 14

3.2 MEASUREMENT PROCEDURE 14

3.3 TEST RESULTS OF FUNDAMENTAL EMISSIONS 15

4 SPURIOUS EMISSION 16

4.1 LIMIT 16

4.2 MEASUREMENT PROCEDURE 16

4.3 TEST RESULTS OF RADIATED EMISSIONS 18

5 FREQUENCY STABILITY (TEMPERATURE VARIATION) 22

5.1 TEST LIMIT 22

5.2 TEST CONFIGURATION 22

5.3 TEST PROCEDURE AND TEST SETUP 23

5.4 TEST PROTOCOL 23

6 FREQUENCY STABILITY (VOLTAGE VARIATION) 24

6.1 TEST LIMIT 24

6.2 TEST CONFIGURATION 24

6.3 TEST PROCEDURE AND TEST SETUP 24

6.4 TEST PROTOCOL 25

7 CONDUCTED EMISSIONS 26

7.1 LIMIT 26

7.2 TEST CONFIGURATION 26

7.3 MEASUREMENT PROCEDURE 27

7.4 TEST RESULTS OF CONDUCTED EMISSIONS..... 28

8 99% AND 20DB BANDWIDTH 30

8.1 LIMIT 30

8.2 TEST CONFIGURATION 30

8.3 TEST PROCEDURE AND TEST SET UP 31

8.4 TEST PROTOCOL 32

TEST REPORT

9 ANTENNA REQUIREMENT..... 33

Revision History

Report No.	Version	Description	Issued Date
221000173SHA-001	Rev. 01	Initial issue of report	January 16, 2023

Measurement result summary

TEST ITEM	FCC REFERENCE	IC REFERENCE	RESULT
20dB Bandwidth&99% Bandwidth	15.215(c) 2.1049	RSS-Gen Issue 5 Clause 6.7	Pass
Fundamental Field Strength and Emission Mask	15.205 & 15.225(a) (b) (c)	RSS-210 Issue 9 Annex B.6	Pass
Emission outside the frequency band	15.225(d) /15.109	RSS-Gen Issue 5 Clause 8.9&8.10	Pass
Power line conducted emission	15.207	RSS-Gen Issue 5 Clause 8.8	Pass
Frequency Stability	15.225(e)	RSS-Gen Issue 5 Clause 8.11	Pass
Antenna requirement	15.203	-	Pass

Notes: 1: NA =Not Applicable

2: Determination of the test conclusion is based on IEC Guide 115 in consideration of measurement uncertainty.

3: Additions, Deviations and Exclusions from Standards: None.

1 GENERAL INFORMATION

1.1 Description of Equipment Under Test (EUT)

Product name:	Imaging Plate System
Type/Model:	CS 7200
Description of EUT:	The EUT is a scanner, it has only one model, the DC cable of adapter has two ferrite rings at each end of the DC line. Optional accessory Scan & Go is RFID reader, it has been granted.
Rating:	Main unit: 24Vdc, 1.2A AC/DC adapter: Input: 100-240Vac, 47-63Hz, 0.8-0.4A; Output: 24Vdc, 1.25A
EUT type:	<input checked="" type="checkbox"/> Table top <input type="checkbox"/> Floor standing
Software Version:	/
Hardware Version:	/
Sample received date:	November 12, 2022
Date of test:	November 12, 2022 – January 11, 2023

1.2 Technical Specification

Operation Frequency Band:	13.556 ~ 13.567MHz
Normal Working Frequency:	13.56MHz
Channel Number:	1
Type of Modulation:	ASK
Antenna Designation:	Fixed Internal Loop Antenna

TEST REPORT

1.3 Description of Test Facility

Name:	Intertek Testing Services Shanghai
Address:	Building 86, No. 1198 Qinzhou Road(North), Shanghai 200233, P.R. China
Telephone:	86 21 61278200
Telefax:	86 21 54262353

The test facility is recognized, certified, or accredited by these organizations:	CNAS Accreditation Lab Registration No. CNAS L0139
	FCC Accredited Lab Designation Number: CN0175
	IC Registration Lab CAB identifier.: CN0014
	VCCI Registration Lab Registration No.: R-14243, G-10845, C-14723, T-12252
	A2LA Accreditation Lab Certificate Number: 3309.02

2 TEST SPECIFICATIONS

2.1 Standards or specification

47CFR Part 15 (2020)

ANSI C63.10 (2013)

RSS-210 Issue 10 (December 2019) Amendment (April 2020)

RSS-Gen Issue 5 (April 2018) Amendment 1 (March 2019) Amendment 2 (February 2021)

2.2 Mode of operation during the test

While testing, the internal modulation and continuously transmission was applied.

2.3 Test software list

Test Items	Software	Manufacturer	Version
Conducted emission	ESxS-K1	R&S	V2.1.0
Radiated emission	ES-K1	R&S	V1.71

2.4 Test peripherals list

Item No	Description	Band and Model	S/No
1	Laptop computer	DELL 5480	100-240V AC, 50/60Hz
2	Scan Go	/	/

TEST REPORT**2.5 Test environment condition:**

Test items	Temperature	Humidity
20dB Bandwidth & 99% Bandwidth	22°C	55% RH
Fundamental field strength and emission mask	22°C	54% RH
Emission outside the frequency band	22°C	55% RH
Frequency Stability	22°C	54% RH
Power line conducted emission	22°C	54% RH

TEST REPORT

2.6 Instrument list

Radiated Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESIB 26	EC 3045	2023-09-11
<input checked="" type="checkbox"/>	Bilog Antenna	TESEQ	CBL 6112D	EC 4206	2023-05-29
<input type="checkbox"/>	Pre-amplifier	R&S	Pre-amp 18	EC5262	2023-06-19
<input type="checkbox"/>	Horn antenna	R&S	HF 906	EC 3049	2023-11-17
<input type="checkbox"/>	Horn antenna	ETS	3117	EC 4792-1	2024-01-08
<input type="checkbox"/>	Horn antenna	TOYO	HAP18-26W	EC 4792-3	2023-07-08
<input type="checkbox"/>	Pre-amplifier	R&S	Pre-amp 18	EC5262	2023-06-19
<input checked="" type="checkbox"/>	Active loop antenna	Schwarzbeck	FMZB1519	EC 5345	2023-03-07
Conducted Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESCS 30	EC 2107	2023-07-15
<input checked="" type="checkbox"/>	A.M.N.	R&S	ESH2-Z5	EC 3119	2023-12-07
<input type="checkbox"/>	A.M.N.	R&S	ENV 216	EC 3393	2023-07-04
<input type="checkbox"/>	A.M.N.	R&S	ENV4200	EC 3558	2023-06-10
<input type="checkbox"/>	Absorbing clamp	R&S	MDS 21	EC 2108	2023-06-19
<input type="checkbox"/>	CDN	Frankonia	CDN M2M316	EC 5969	2023-03-15
<input type="checkbox"/>	CDN	Schaffner	CDN M316	EC 2113-1	2023-07-16
<input checked="" type="checkbox"/>	Attenuator	Weinschel	68-6-44	EC 3043-9	2023-02-05
<input type="checkbox"/>	Tri-loop	Schwarzbeck	HXYZ 9170	EC 3384	2023-10-10
<input type="checkbox"/>	Voltage Probe	Schwarzbeck	TK9420	EC 4888	2023-09-10
<input type="checkbox"/>	Current probe	R&S	EZ-17	EC 3221	2023-03-15
<input type="checkbox"/>	I.S.N.	FCC	FCC-TLISN -T2-02	EC 3754	2023-02-05
<input type="checkbox"/>	I.S.N.	FCC	FCC-TLISN -T4-02	EC 3755	2023-02-05
<input type="checkbox"/>	I.S.N.	FCC	FCC-TLISN -T8-02	EC 3756	2023-02-05
RF test					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	PXA Signal Analyzer	Keysight	N9030A	EC 5338	2023-03-05
<input type="checkbox"/>	Power sensor	Agilent	U2021XA	EC 5338-1	2023-03-05
<input type="checkbox"/>	MXG Analog Signal Generator	Agilent	N5181A	EC 5338-2	2023-03-05
<input type="checkbox"/>	Vector Signal Generator	Agilent	N5182B	EC 5175	2023-03-05
<input type="checkbox"/>	Power meter	Keysight	N1911A	EC 4318	2023-05-11
<input type="checkbox"/>	Wideband Radio Communication	R&S	CMW500	EC 5944	2023-12-06

TEST REPORT

	Tester				
<input type="checkbox"/>	Mobile Test System	LitePoint	IQxel	EC 5176	2024-01-08
<input type="checkbox"/>	Test Receiver	R&S	ESCI 7	EC 4501	2023-09-11
<input checked="" type="checkbox"/>	Climate chamber	GWS	MT3065	EC 6021	2023-03-06
<input type="checkbox"/>	Spectrum analyzer	Agilent	E7402A	EC 2254	2023-09-11
Additional instrument					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Therom-Hygrograph	ZJ1-2A	S.M.I.F.	EC 3323	2023-06-13
<input type="checkbox"/>	Therom-Hygrograph	ZJ1-2A	S.M.I.F.	EC 3324	2023-04-08
<input checked="" type="checkbox"/>	Therom-Hygrograph	ZJ1-2A	S.M.I.F.	EC 3325	2023-03-23
<input type="checkbox"/>	Therom-Hygrograph	ZJ1-2A	S.M.I.F.	EC 3326	2023-03-28

2.7 Measurement uncertainty

The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Frequency	Expanded Uncertainty (k=2)
Conducted emission at mains ports	9kHz ~ 150kHz	3.52 dB
	150kHz ~ 30MHz	3.19 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	4.90 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	5.02 dB
	6GHz ~ 18GHz	5.28 dB
Occupied Channel Bandwidth	/	± 0.88 %

3 Fundamental Emission

Test result: Pass

3.1 Limit

Frequencies (MHz)	Limit at 30m (dBuV/m)	Limit at 3m (dBuV/m)
13.110 – 13.410	40.50	80.50
13.410 – 13.553	50.50	90.50
13.553 – 13.567	84.00	124.00
13.567 – 13.710	50.50	90.50
13.710 – 14.010	40.50	80.50

3.2 Measurement Procedure

- a) The EUT was placed on a 0.1m plank above the ground at a 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c) Both X and Y axes of the antenna are set to make the measurement.
- d) For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e) The test-receiver system was set to PK Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

TEST REPORT

3.3 Test Results of Fundamental Emissions

Antenna Polarization	Frequency (MHz)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin	Detector
X	13.56	54.6	124.00	69.40	PK
Y	13.56	54.1	124.00	69.90	PK
Z	13.56	53.5	124.00	70.50	PK

- Remark: 1. Correct Factor = Antenna Factor + Cable Loss (+ Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.
 2. Corrected Reading = Original Receiver Reading + Correct Factor
 3. Margin = Limit - Corrected Reading

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,
 Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dBuV,
 Limit = 40.00dBuV/m.
 Then Correct Factor = 30.20 + 2.00 – 32.00 = 0.20dB/m;
 Corrected Reading = 10dBuV + 0.20dB/m = 10.20dBuV/m;
 Margin = 40.00dBuV/m - 10.20dBuV/m = 29.80dB.

4 Spurious Emission

Test result: Pass

4.1 Limit

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	90	10
88 ~ 216	150	10
216 ~ 960	210	10
Above 960	300	10

4.2 Measurement Procedure

For Radiated emission below 30MHz:

- f) The EUT was placed on a 0.1m plank above the ground at a 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- g) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- h) Both X and Y axes of the antenna are set to make the measurement.
- i) For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- j) The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

- 2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz:

- a) The EUT was placed on a 0.1m plank above the ground at a 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c) The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

TEST REPORT

- d) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e) The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f) The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:

- 1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
- 2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
- 3. All modes of operation were evaluated and the worst-case emissions were reported

TEST REPORT

4.3 Test Results of Radiated Emissions

The EUT has been tested in all three orthogonal planes, it has the worst case when it is in horizontal position for both below 30MHz & above 30MHz.


Test data below 30MHz:

Frequency	Limit	Level	Delta	Reading	Factor	Detector	Polar
	dBuV/m	dBuV/m	dB	dBuV	dB/m		
16.200kHz	123.40	45.70	-77.70	25.70	20.00	PK	X
72.300kHz	110.40	34.90	-75.50	14.80	20.10	PK	X
98.300kHz	107.70	36.80	-70.90	16.70	20.10	PK	X
4.758MHz	69.50	30.10	-39.40	9.70	20.40	PK	X
7.071MHz	69.50	37.90	-31.60	17.50	20.40	PK	X
29.189MHz	69.50	29.90	-39.60	9.20	20.70	PK	X
16.200kHz	123.40	45.70	-77.70	25.70	20.00	PK	Y
72.300kHz	110.40	34.90	-75.50	14.80	20.10	PK	Y
98.300kHz	107.70	36.80	-70.90	16.70	20.10	PK	Y
1.001MHz	67.60	34.20	-33.40	14.10	20.10	PK	Y
7.071MHz	69.50	37.90	-31.60	17.50	20.40	PK	Y
29.189MHz	69.50	29.90	-39.60	9.20	20.70	PK	Y
18.400kHz	122.30	44.40	-77.90	24.30	20.10	PK	Z
6.576MHz	69.50	37.60	-31.90	17.20	20.40	PK	Z
8.840MHz	69.50	42.20	-27.30	21.80	20.40	PK	Z
13.560MHz	69.50	46.10	-23.40	25.60	20.50	PK	Z
20.333MHz	69.50	31.50	-38.00	10.80	20.70	PK	Z
29.256MHz	69.50	41.90	-27.60	21.20	20.70	PK	Z

TEST REPORT


Test data from 30MHz to 1000MHz:

H

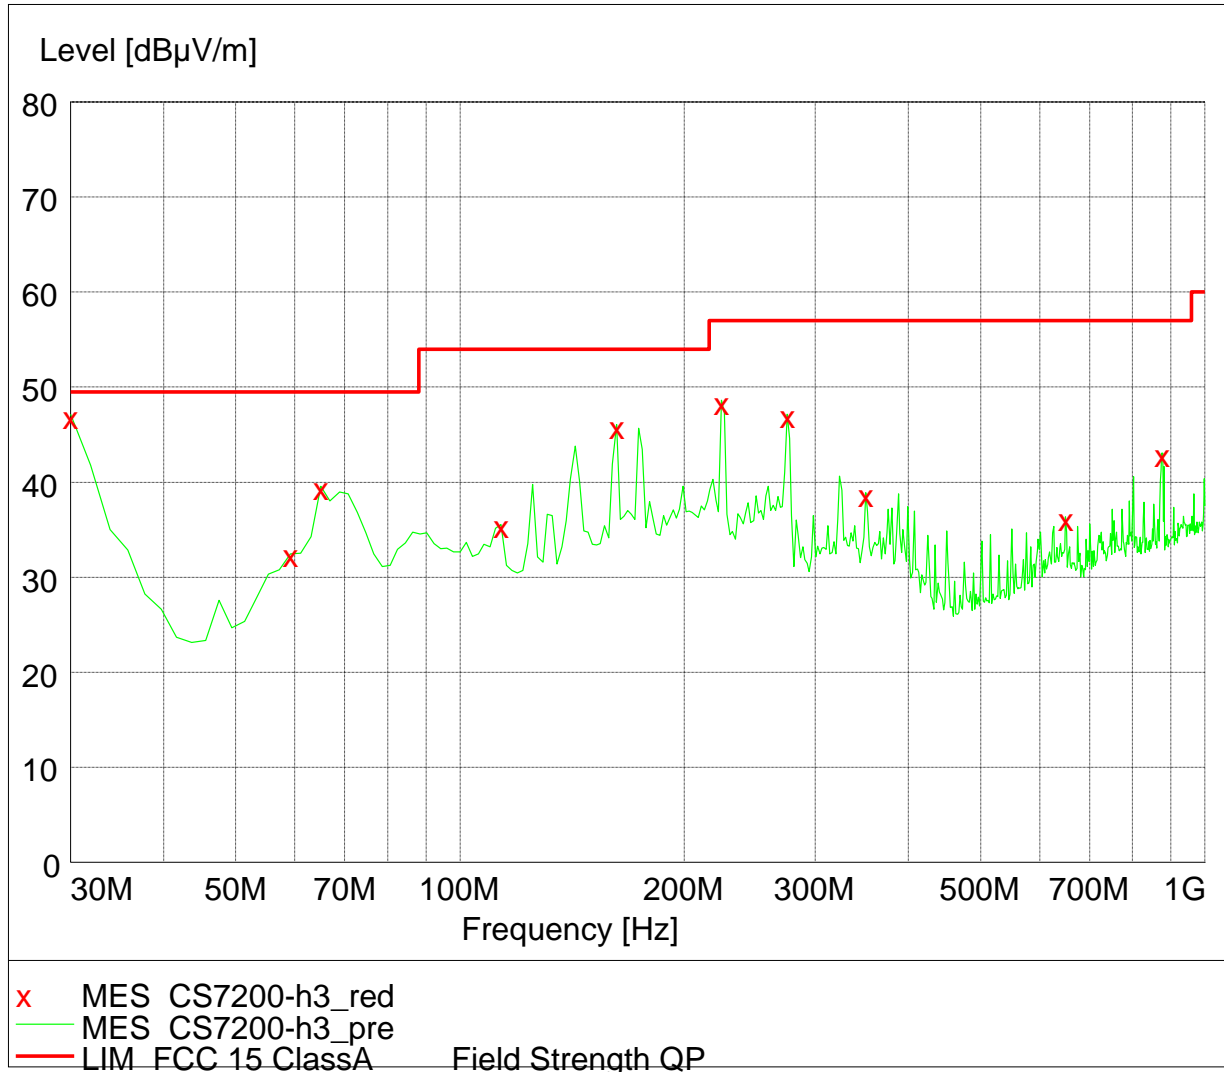

TEST REPORT

V

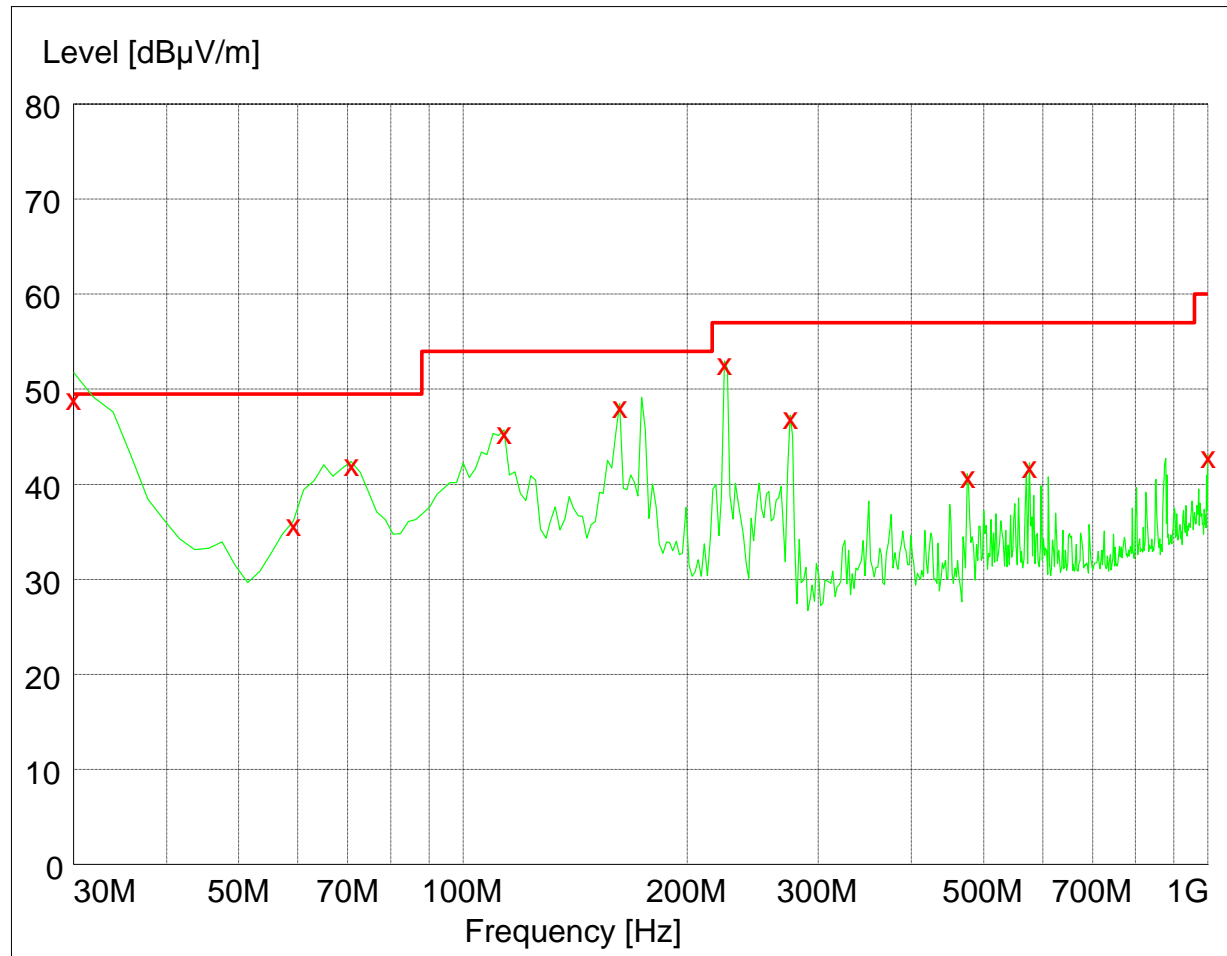

x MES CS7200-v3_red
— MES CS7200-v3_pre
— LIM FCC 15 ClassA Field Strength QP

Antenna Polarization	Frequency (MHz)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin	Detector
H	30.00	47.10	50.00	2.90	QP
H	64.99	39.60	50.00	10.40	QP
H	162.18	46.10	54.00	7.90	QP
H	224.39	48.60	56.90	8.30	QP
H	274.93	47.20	56.90	9.70	QP
H	875.59	43.10	56.90	13.80	QP
V	30.00	49.30	50.00	0.70	QP
V	70.82	42.40	50.00	7.60	QP
V	113.59	45.70	54.00	8.30	QP
V	162.18	48.50	54.00	5.50	QP
V	224.39	53.00	56.90	3.90	QP
V	274.93	47.30	56.90	9.60	QP

TEST REPORT

- Remark: 1. Correct Factor = Antenna Factor + Cable Loss (+ Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.
2. Corrected Reading = Original Receiver Reading + Correct Factor
3. Margin = Limit - Corrected Reading
4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,
Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dBuV,
Limit = 40.00dBuV/m.

Then Correct Factor = $30.20 + 2.00 - 32.00 = 0.20\text{dB/m}$;
Corrected Reading = $10\text{dBuV} + 0.20\text{dB/m} = 10.20\text{dBuV/m}$;
Margin = $40.00\text{dBuV/m} - 10.20\text{dBuV/m} = 29.80\text{dB}$.


5 Frequency Stability (Temperature Variation)

Test result: PASS

5.1 Test limit

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage.

5.2 Test Configuration

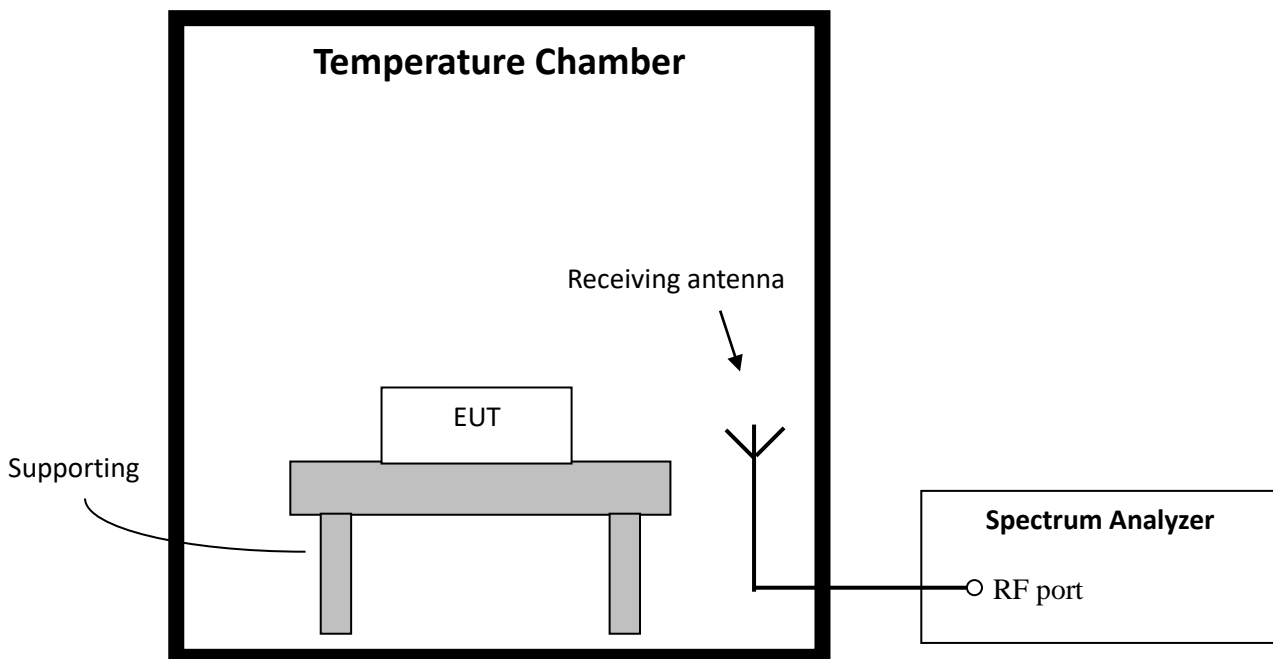

TEST REPORT

5.3 Test procedure and test setup

Test Procedure as per ANSI 63.10 clause 6.8.1.

5.4 Test protocol

Voltage (V)	Temp (°C)	Freq measured (MHz)	Freq nominal (MHz)	Tolerance (%)	Limit (%)
120	-20	13.561	13.560	0.007	0.01
	-10	13.561		0.007	
	0	13.561		0.007	
	10	13.560		0	
	20	13.560		0	
	30	13.561		0.007	
	40	13.561		0.007	
	50	13.561		0.007	


6 Frequency Stability (Voltage Variation)

Test result: PASS

6.1 Test limit

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

6.2 Test Configuration

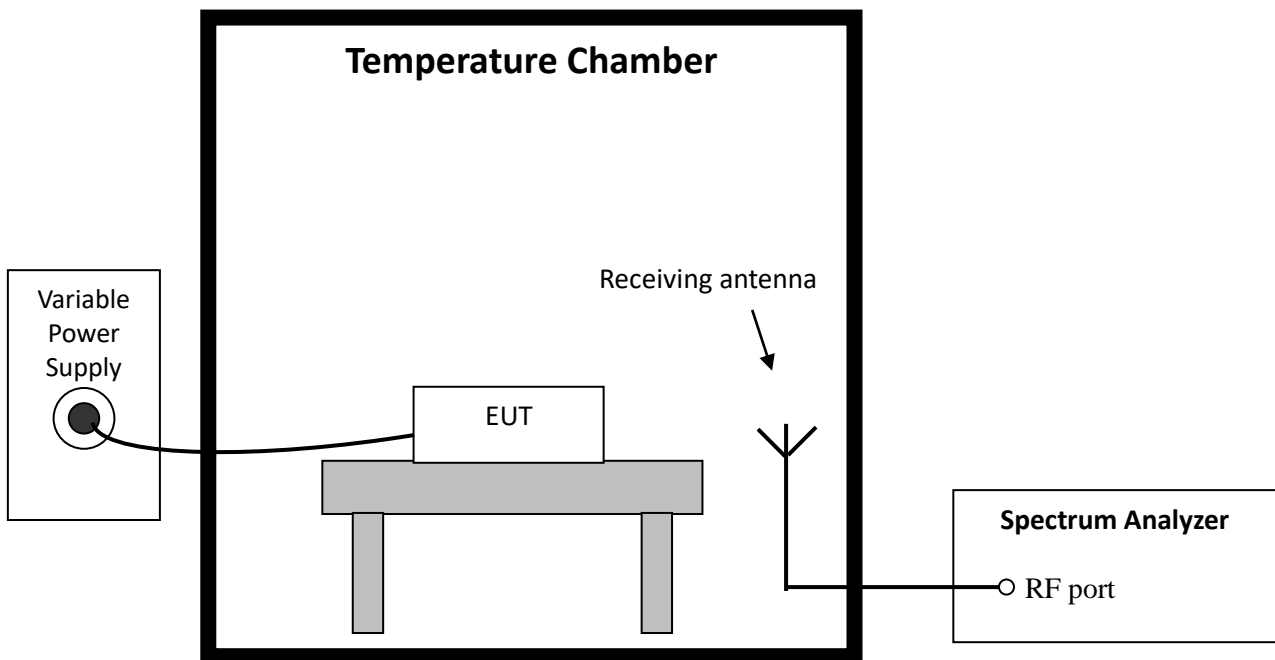

6.3 Test procedure and test setup

Test Procedure as per ANSI 63.10 clause 6.8.2.

TEST REPORT**6.4 Test protocol**

Temp (°C)	Voltage (V)	Freq Measured (MHz)	Freq nominal (MHz)	Tolerance (%)	Limit (%)
20	120	13.560	13.560	0	0.01
	102	13.561		0.007	
	138	13.561		0.007	

7 Conducted emissions


Test result: Pass

7.1 Limit

Frequency of Emission (MHz)	Conducted Emissions Limit (dBuV)	
	QP	AV
0.15-0.5	66 to 56*	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

7.2 Test Configuration

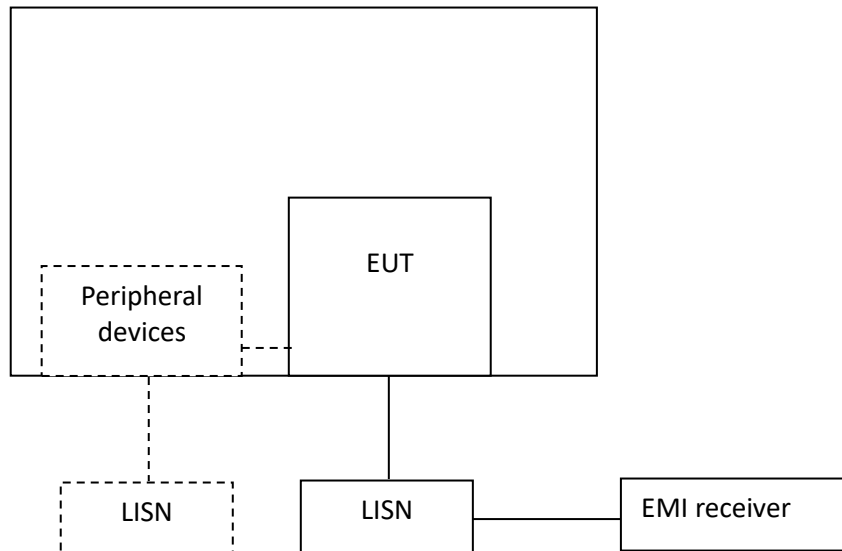



TEST REPORT**7.3 Measurement Procedure**

Measured levels of ac power-line conducted emission shall be the emission voltages from the voltage probe, where permitted, or across the 50 Ω LISN port (to which the EUT is connected), where permitted, terminated into a 50 Ω measuring instrument. All emission voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord by the use of mating plugs and receptacles on the LISN, if used. Equipment shall be tested with power cords that are normally supplied or recommended by the manufacturer and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended by the manufacturer. For those measurements using a LISN, the 50 Ω measuring port is terminated by a measuring instrument having 50 Ω input impedance. All other ports are terminated in 50 Ω loads.

Tabletop devices shall be placed on a platform of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The vertical conducting plane or wall of an RF-shielded (screened) room shall be located 40 cm to the rear of the EUT. Floor-standing devices shall be placed either directly on the reference ground-plane or on insulating material as described in ANSI C63.4. All other surfaces of tabletop or floor-standing EUTs shall be at least 80 cm from any other grounded conducting surface, including the case or cases of one or more LISNs.

The bandwidth of the test receiver is set at 9 kHz.

7.4 Test Results of Conducted Emissions

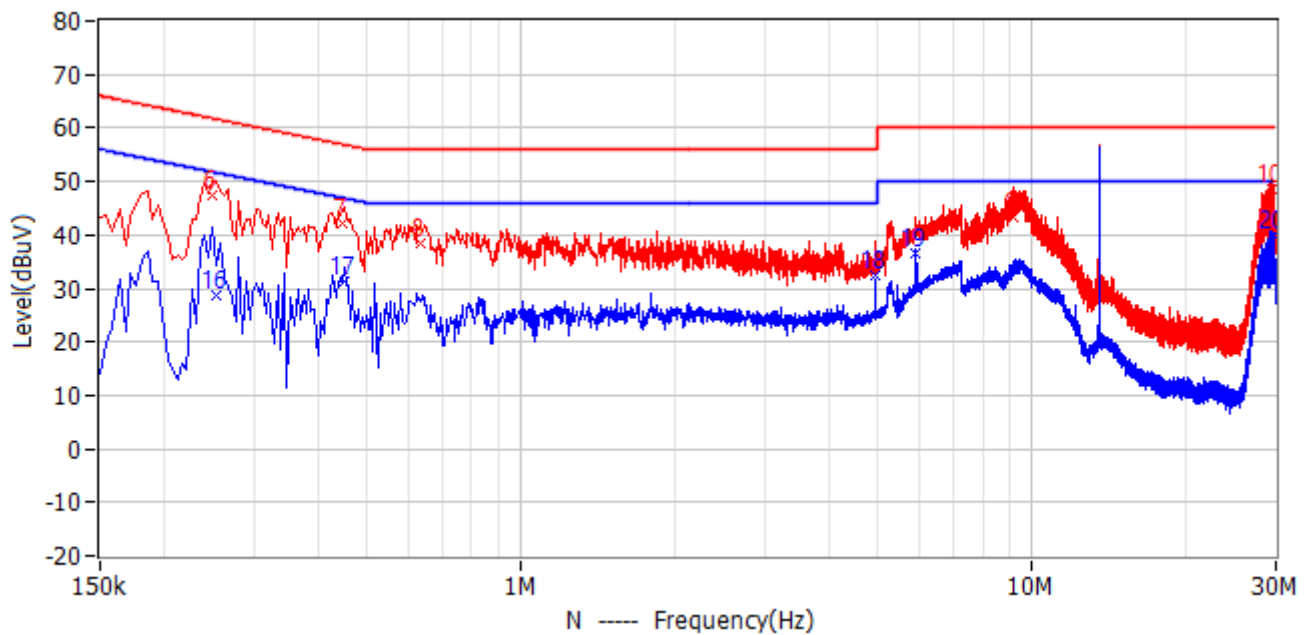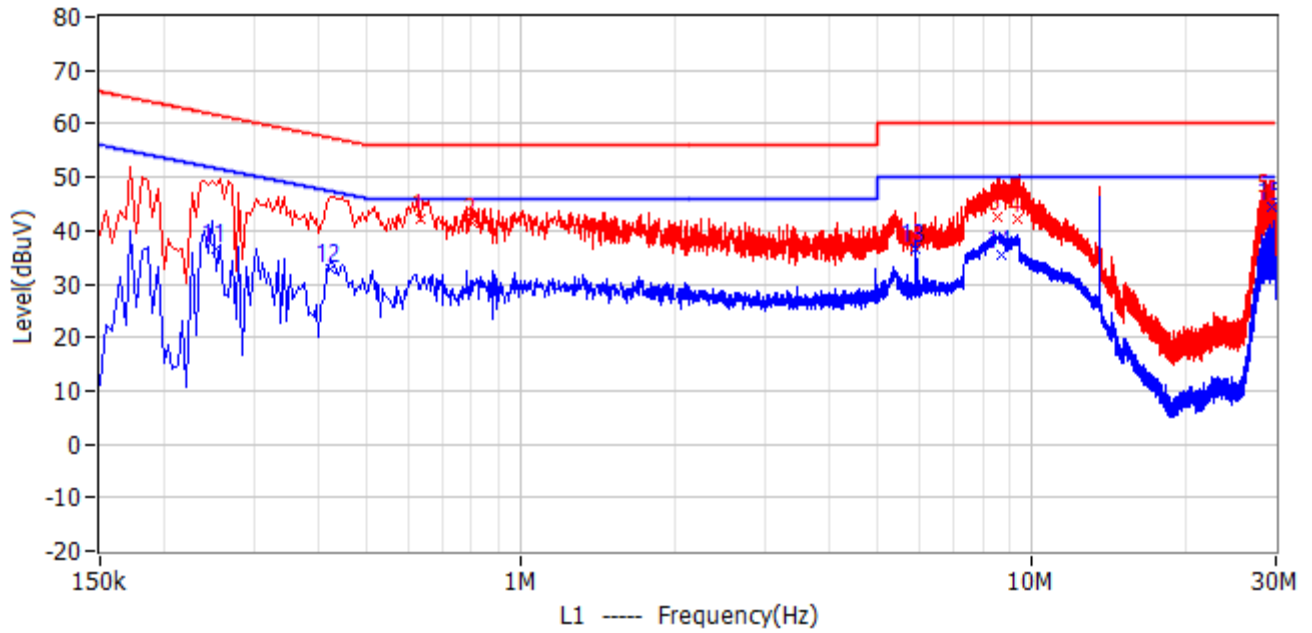

No.	Frequency	Limit dBuV	Level dBuV	Delta dB	Reading dBuV	Factor dB	Detector	Phase
1	636.000kHz	56.0	42.1	-13.9	35.9	6.2	QP	L1
2	802.500kHz	56.0	41.5	-14.5	35.3	6.2	QP	L1
3	8.534MHz	60.0	42.5	-17.5	36.2	6.3	QP	L1
4	9.357MHz	60.0	42.3	-17.7	36.0	6.3	QP	L1
5	28.766MHz	60.0	46.1	-13.9	39.5	6.6	QP	L1
6	249.000kHz	61.8	47.6	-14.2	41.4	6.2	QP	N
7	447.000kHz	56.9	42.3	-14.7	36.0	6.3	QP	N

TEST REPORT

No.	Frequency	Limit dBuV	Level dBuV	Delta dB	Reading dBuV	Factor dB	Detector	Phase
8	636.000kHz	56.0	38.5	-17.5	32.2	6.3	QP	N
9	9.236MHz	60.0	43.2	-16.8	36.8	6.4	QP	N
10	29.400MHz	60.0	48.6	-11.4	41.9	6.7	QP	N
11	253.500kHz	51.6	36.6	-15.0	30.4	6.2	CAV	L1
12	424.500kHz	47.4	32.7	-14.7	26.5	6.2	CAV	L1
13	5.933MHz	50.0	36.6	-13.4	30.3	6.3	CAV	L1
14	8.732MHz	50.0	35.5	-14.5	29.2	6.3	CAV	L1
15	29.481MHz	50.0	44.3	-5.7	37.7	6.6	CAV	L1
16	253.500kHz	51.6	28.6	-23.0	22.4	6.2	CAV	N
17	451.500kHz	46.8	31.4	-15.4	25.1	6.3	CAV	N
18	4.943MHz	46.0	32.6	-13.4	26.2	6.4	CAV	N
19	5.933MHz	50.0	36.7	-13.3	30.3	6.4	CAV	N
20	29.688MHz	50.0	39.8	-10.2	33.1	6.7	CAV	N

Remark: 1. Factor = LISN Factor + Cable Loss, the value was added to Original Receiver Reading by the software automatically.

2. Level = Original Receiver Reading + Factor
3. Delta= Level - Limit
4. If the PK Level is lower than AV limit, the AV test can be elided.
5. the emissions of 13.56MHz is the product's RF signal.

Example: Assuming LISN Factor = 10.00dB, Cable Loss = 2.00dB,
 Original Receiver Reading = 10.00dBuV, Limit = 66.00dBuV.
 Then Factor = 10.00 + 2.00 = 12.00dB;
 Level = 10dBuV + 12.00dB = 22.00dBuV;
 Delta = 22.00dBuV - 66.00dBuV = -44.00dB.


8 99% and 20dB Bandwidth

Test result: Pass

8.1 Limit

The 20dB bandwidth should be fallen in the allocated operating frequency range.
No limit for 99% bandwidth.

8.2 Test configuration

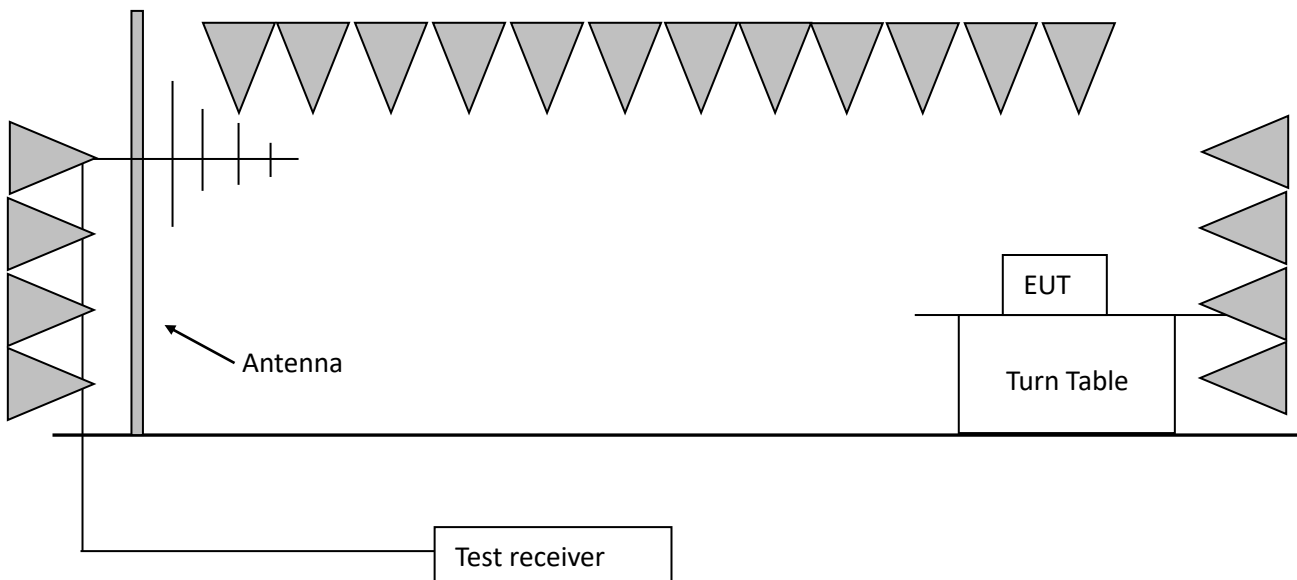

8.3 Test procedure and test set up

The measurement was applied in a 3m semi-anechoic chamber.


The center of the loop antenna shall be 1 m above the horizontal metal ground plane.

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set RBW = 1 % to 5 % of the OBW
3. Set VBW $\geq 3 \cdot$ RBW
4. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
5. Use the 99 % power bandwidth function of the instrument (if available).
6. the 20dB bandwidth is also measured with the same setting.

8.4 Test protocol

Frequency (MHz)	20dB Bandwidth (KHz)	99% Bandwidth (KHz)
13.56	24.96	21.15

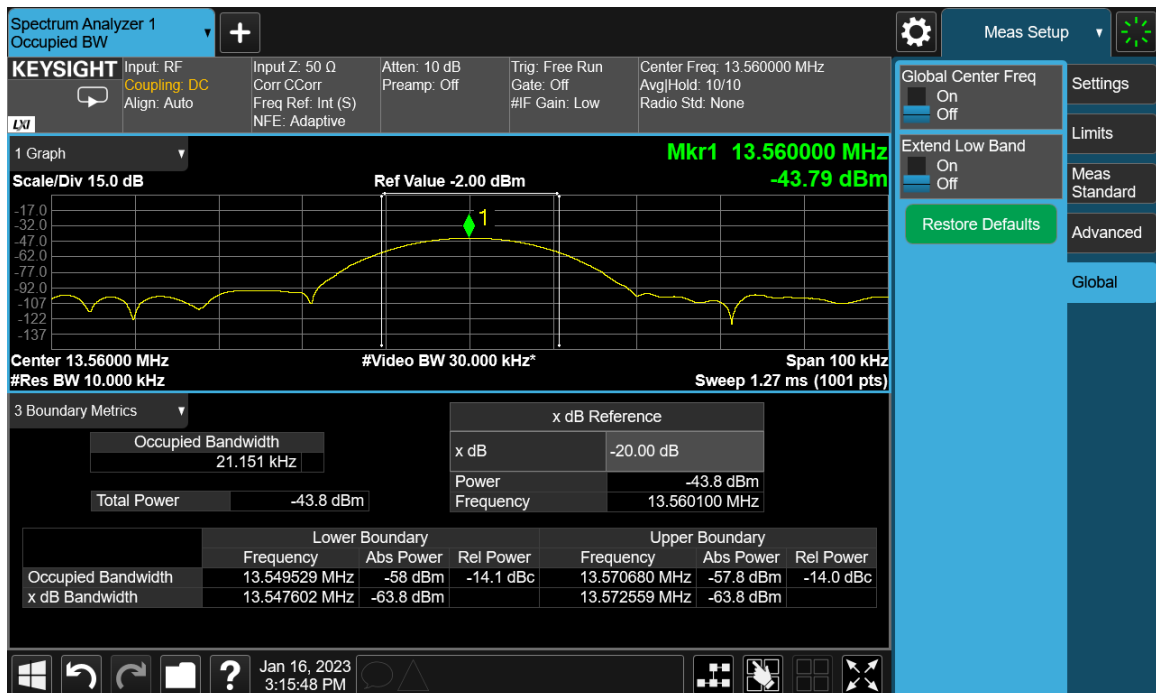

TEST REPORT

9 Antenna requirement

Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Result:

EUT uses permanently attached antenna to the intentional radiator, so it can comply with the provisions of this section.

***** END *****