



深圳市东信通电子科技有限公司

ShenZhen Eastong Electronic technology Co., LTD

APPROVAL SHEET

Model: M4P

(WIFI band internal antenna)

Issued by		Checked by	
Confirmed by		Date	2022-06-07
Manufacturer	ShenZhen Eastong Electronic technology Co., LTD		

1 Summary

This report summarizes the electrical results of the proposed antenna to support the M4P program. We test the antenna with the latest version handset .

2 General Description

2.1 Definitions

VSWR: Voltage Standing Wave Rate

3 Mechanical Description

4 Electrical Performance

4.1 Set-up

4.1.1 VSWR and return loss

VSWR measurements (S_{11}) were performed using an Agilent E5070B Network Analyzer and the previously described test fixture. Coaxial chokes were used to mitigate surface currents on the outside of the cabling. The testing was performed in free space.

4.1.2 Efficiency, Gain and TRP/TIS

The gain of the antenna was measured in Dong Xin's 3D anechoic chamber in Shenzhen. The chamber is capable of doing tests from 380MHz to 6GHz. Coaxial chokes on the feed cable were used to mitigate surface currents. The measurement results are calibrated using dipole standards. For TRP and TIS the chamber uses a Agilent 8960 to establish the connection with the mobile device. During TRP tests the 8960 reads the power received through the chamber probes whilst during TIS tests the 8960 transmits through the probe. All data is afterwards corrected by a calibration table.

4.1.3 Matching Circuit Description


No matching.

4.2 Measurement Data



Effective Radiated Power Summation

5 Antenna Size

Unit: mm

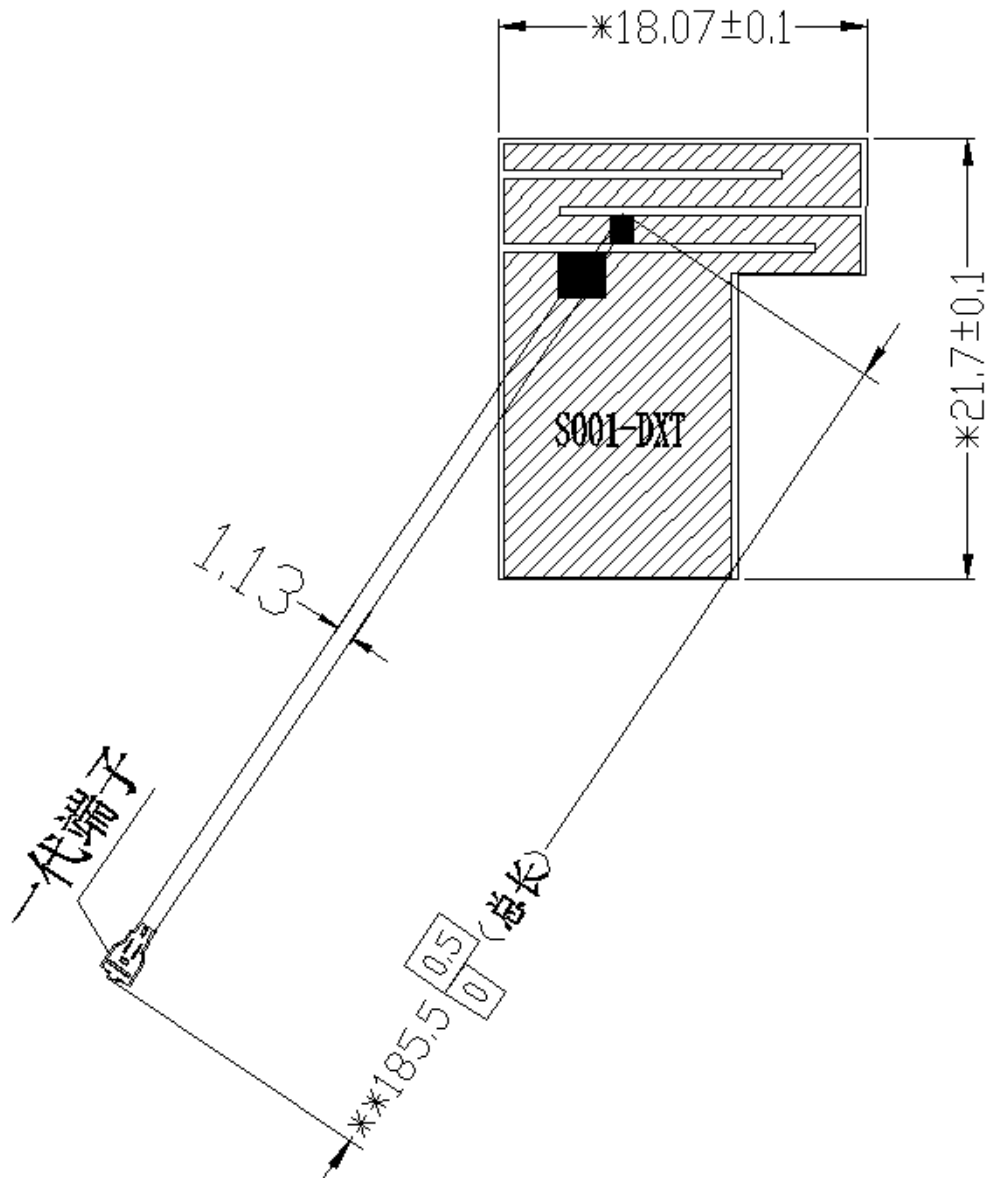

6. S11 test data:

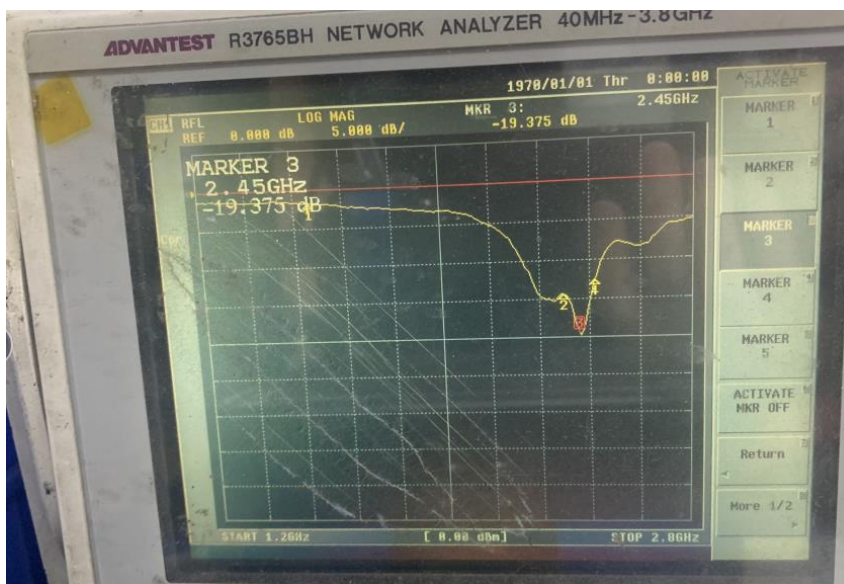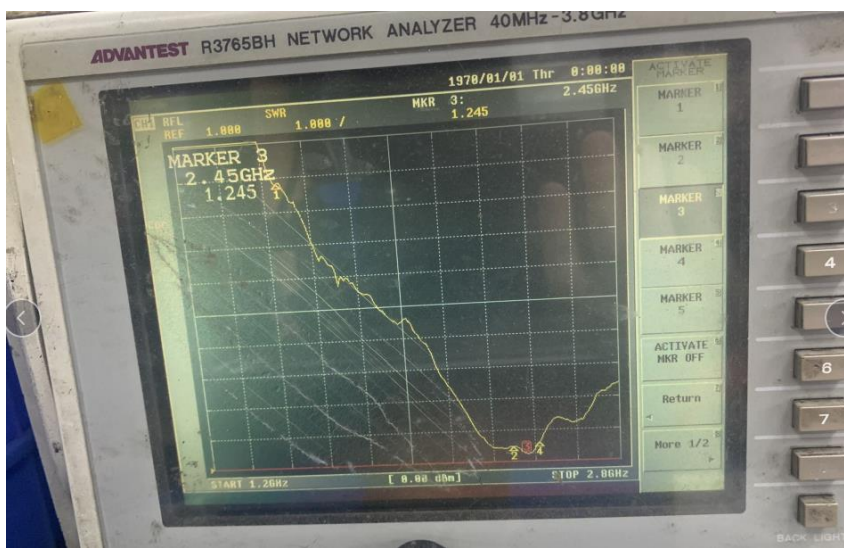


7. Antenna passive test data


Test Point ID	Freq. (MHz)	TRP (dBm)	Gain (dBi)	Directivity (dBi)	Efficiency (%)	Efficiency (dB)	Max (dBm)	Theta of Max	Phi of Max	Min (dBm)	Theta of Min	Phi of Min	AVG (dBm)	Max/Min (dB)	Max/AVG (dB)	Min/AVG (dB)
1	2400.0	2400.00	-0.53	4.91	28.6%	-5.44	-0.53	15	315	-95.99	0	0	-7.79	95.46	7.26	-88.20
2	2410.0	2410.00	-2.47	4.54	19.9%	-7.01	-2.47	120	75	-95.99	0	0	-9.46	93.52	6.99	-86.53
3	2420.0	2420.00	-1.51	4.72	23.8%	-6.23	-1.51	135	75	-95.99	0	0	-7.89	94.48	6.38	-88.10
4	2430.0	2430.00	-2.36	4.70	19.6%	-7.07	-2.36	150	150	-95.99	0	0	-8.50	93.63	6.14	-87.49
5	2440.0	2440.00	-1.54	4.78	23.3%	-6.32	-1.54	150	150	-95.99	0	0	-7.61	94.45	6.07	-88.38
6	2450.0	2450.00	-1.03	4.11	30.6%	-5.14	-1.03	120	90	-95.99	0	0	-6.85	94.95	5.82	-89.14
7	2460.0	2460.00	-2.22	4.15	23.1%	-6.37	-2.22	120	75	-95.99	0	0	-7.99	93.77	5.77	-88.00
8	2470.0	2470.00	-1.67	2.67	36.8%	-4.34	-1.67	15	135	-95.99	0	0	-6.77	94.32	5.11	-89.22
9	2480.0	2480.00	-2.35	3.87	23.9%	-6.22	-2.35	15	75	-95.99	0	0	-8.86	93.64	6.51	-87.13
10	2490.0	2490.00	0.71	4.28	44.0%	-3.57	0.71	120	75	-95.99	0	0	-5.88	96.70	6.59	-90.11
11	2500.0	2500.00	0.56	5.84	29.7%	-5.28	0.56	120	90	-95.99	0	0	-6.91	96.55	7.47	-89.08

8. Antenna 3 D figure


2400MHz

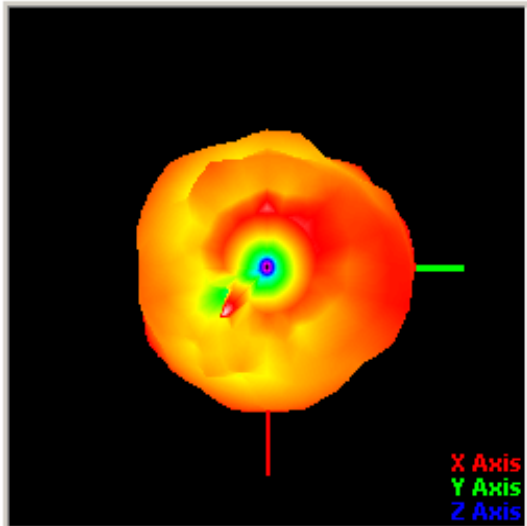


T0-P0

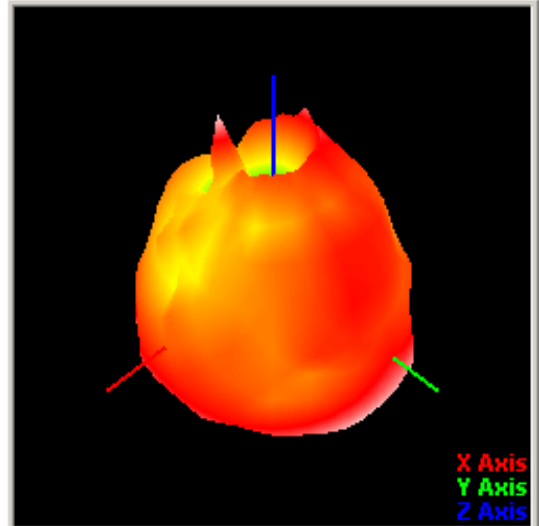

T45-P0

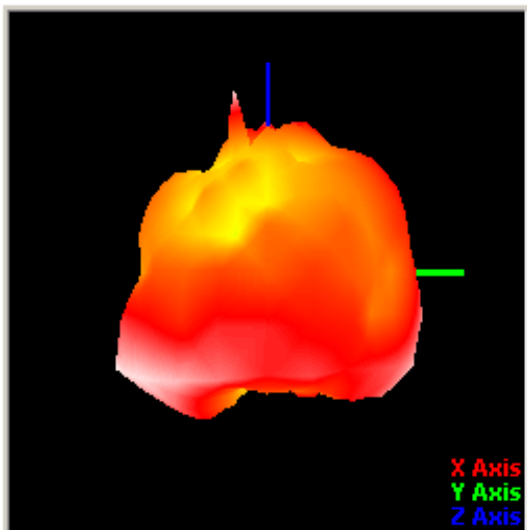


T90-P0

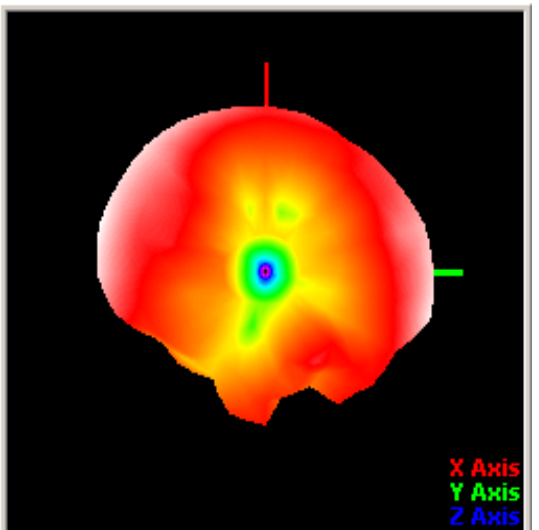


T180-P0


2450MHz

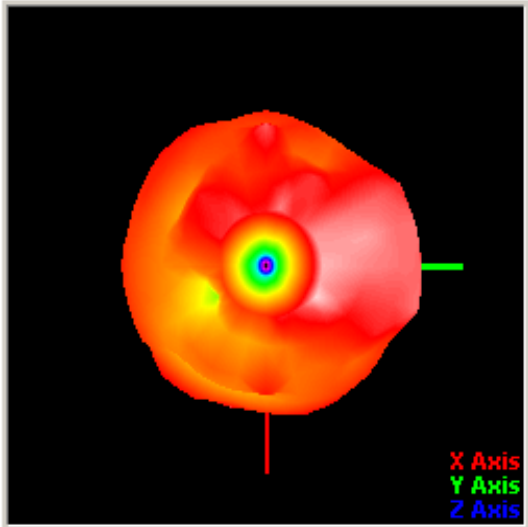


T0-P0

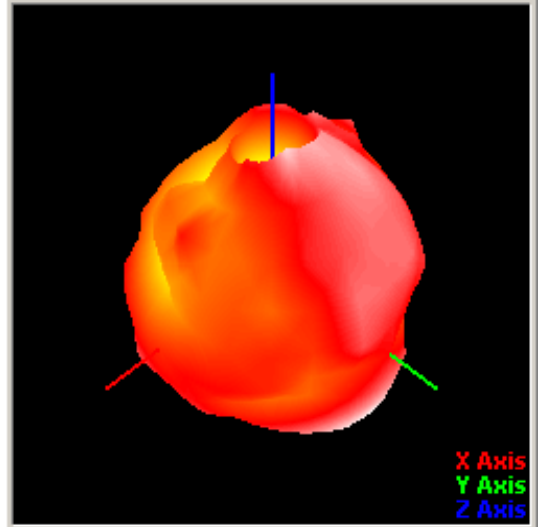

T45-P0

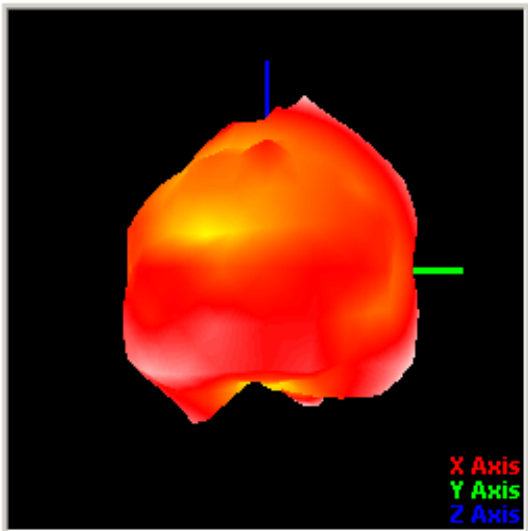


T90-P0

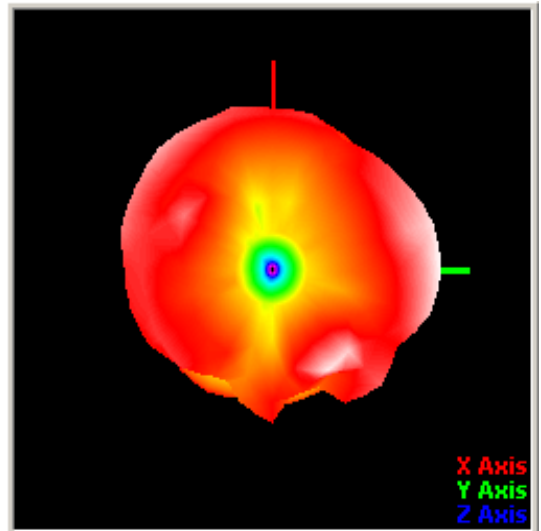


T180-P0


2500MHz

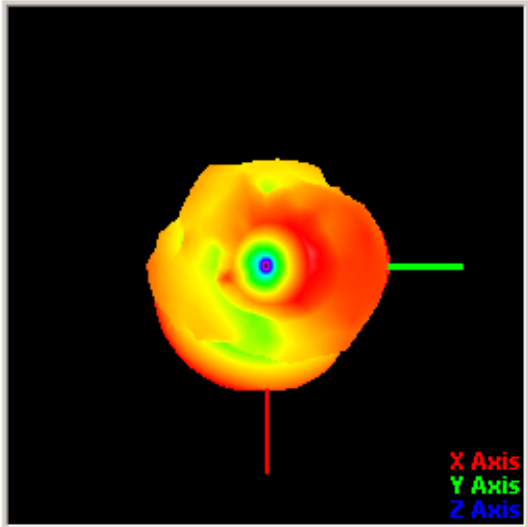


T0-P0

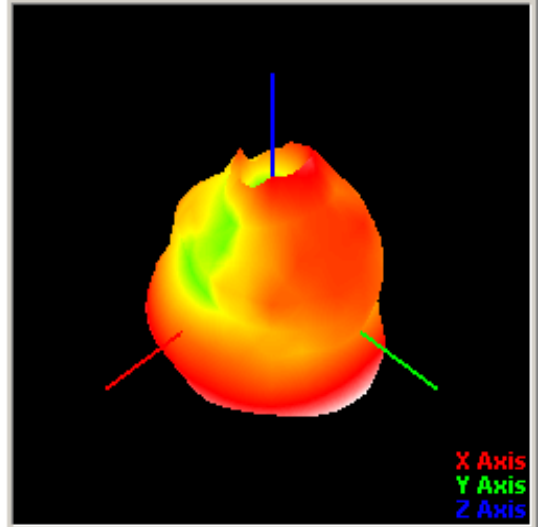

T45-P0

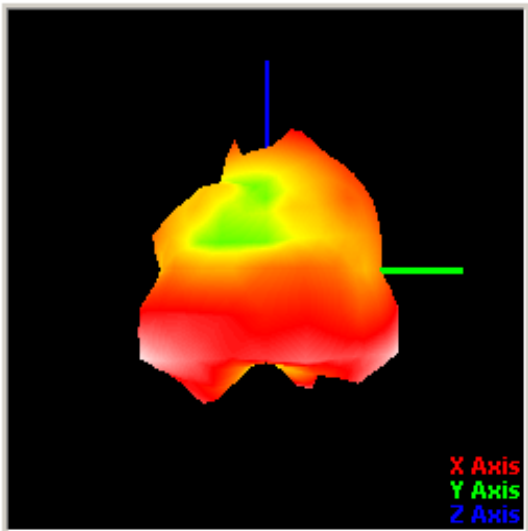

T90-P0

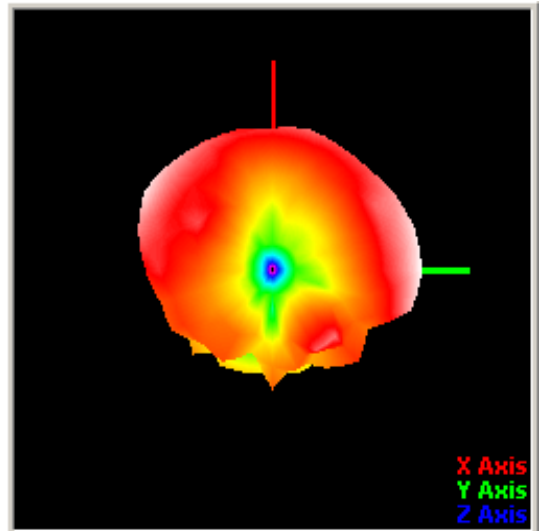

T180-P0