

TEST REPORT

Reference No..... : WTX22X05096528W
FCC ID : 2ASJLAP6398S2
Applicant : Roboteam Home Technology (Shenzhen) Co., Ltd
Address : 22F, CHANGFU JINMAO BUILDING NO.5 SHIHUA ROAD, FUTIAN
DISTRICT, SHENZHEN 518000
Manufacturer : The same as Applicant
Address : The same as Applicant
Product Name : Temi Personal Computer Robot
Model No..... : TEMI S1
Standards : FCC Part 2.1093,
IEEE Std C95.1: 2019
IEEE Std C95.3: 2002 + Rev. 2008
Date of Receipt sample : 2022-05-17
Date of Test..... : 2022-05-17 to 2022-05-26
Date of Issue : 2022-05-27
Test Report Form No. : WTX_Part2_1093W
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,

Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:

Jack Sun

Jack Sun

Approved by:

Silin Chen

Silin Chen

TABLE OF CONTENTS

1. General Information	4
1.1 Product Description for Equipment Under Test (EUT)	4
1.2 Test Standards	6
1.3 Test Methodology	6
1.4 Test Facility	6
2. Summary of Test Results	7
3. Specific Absorption Rate (SAR).....	8
3.1 Introduction.....	8
3.2 SAR Definition	8
4. SAR Measurement System.....	9
4.1 The Measurement System	9
4.2 Probe.....	9
4.3 Probe Calibration Process.....	11
4.4 Phantom	12
4.5 Device Holder.....	12
4.6 Test Equipment List.....	13
5. Tissue Simulating Liquids.....	14
5.1 Composition of Tissue Simulating Liquid.....	14
5.2 Tissue Dielectric Parameters for Head and Body Phantoms.....	15
5.3 Tissue Calibration Result.....	16
6. SAR Measurement Evaluation	17
6.1 Purpose of System Performance Check.....	17
6.2 System Setup	17
6.3 Validation Results.....	18
7. EUT Testing Position	19
7.1 Body Position	19
7.2 EUT Antenna Position	19
7.3 EUT Testing Position.....	20
8. SAR Measurement Procedures.....	21
8.1 Measurement Procedures	21
8.2 Spatial Peak SAR Evaluation	21
8.3 Area & Zoom Scan Procedures.....	22
8.4 Volume Scan Procedures.....	22
8.5 SAR Averaged Methods	22
8.6 Power Drift Monitoring.....	22
9. SAR Test Result	23
9.1 Conducted RF Output Power	23
9.2 Test Results for Standalone SAR Test.....	30
9.3 Simultaneous Multi-band Transmission SAR Analysis	33
10. Measurement Uncertainty	35
10.1 Uncertainty for SAR Test.....	35
Annex A. Plots of System Performance Check	37
Annex B. Plots of SAR Measurement.....	47
Annex E. Calibration Certificate.....	73

Report version

Version No.	Date of issue	Description
Rev.00	2022-05-27	Original
/	/	/

1. General Information

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT:	
Product Name:	Temí Personal Computer Robot
Trade Name:	t e m í
Model No.:	TEMI S1
Adding Model:	/
Rated Voltage:	DC 14.4V by Battery; DC 19.0V by Adapter
Battery capacity:	14.7Ah
Adapter Model:	Model: S090MO1900474 Input: 100-240VAC, 50/60Hz, 1.8A Output: 19.0VDC, 4.74A, 90.0W
Software Version:	/
Hardware Version:	/
<i>Note: The test data is gathered from a production sample provided by the manufacturer.</i>	

Technical Characteristics of EUT:	
WIFI(2.4GHz)	
Support Standards:	802.11b, 802.11g, 802.11n-HT20
Frequency Range:	2412-2462MHz for 802.11b/g/n(HT20)
RF Output Power:	Antenna 0: 15.3dBm (Conducted) Antenna 1: 14.9dBm(Conducted)
Type of Modulation:	DBPSK,BPSK,DQPSK,QPSK,16QAM,64QAM
Data Rate:	1-11Mbps, 6-54Mbps, up to 150Mbps
Quantity of Channels:	11 for 802.11b/g/n-HT20
Channel Separation:	5MHz
Antenna Type:	Integral Antenna
Antenna Gain:	Antenna 0: -0.5dBi Antenna 1: 0.5dBi
Bluetooth	
Bluetooth Version:	V5.1
Frequency Range:	2402-2480MHz
RF Output Power:	7.0dBm (Conducted)
Data Rate:	1Mbps, 2Mbps, 3Mbps
Modulation:	GFSK, $\pi/4$ DQPSK, 8DPSK
Quantity of Channels:	79/40
Channel Separation:	1MHz/2MHz
Antenna Type:	Integral Antenna
Antenna Gain:	-0.5dBi
Wi-Fi(5GHz)	
Support Standards:	802.11a, 802.11n-HT20/40, 802.11ac-HT20/40/80
Frequency Range:	Band 1: 5180-5240MHz,Band 2: 5260-5320MHz, Band 3: 5500-5700MHz,Band 4: 5745-5825MHz
RF Output Power:	Antenna 0: 15.4dBm (Conducted) Antenna 1: 14.3dBm (Conducted)
Type of Modulation:	BPSK,QPSK, 16QAM, 64QAM, 256-QAM
Type of Antenna:	Integral Antenna
Antenna Gain:	Antenna 0: 2.0dBi Antenna 1: 1.5dBi
<i>Note: The Antenna Gain is provided by the customer and can affect the validity of results.</i>	

1.2 Test Standards

The following report is accordance with FCC 47 CFR Part 2.1093, IEEE Std C95.1: 2019, IEEE Std C95.3: 2002 + Rev. 2008, IEC/IEEE 62209-1528:2020, and KDB 865664 D01 v01r04 and KDB 865664 D02 v01r02 and KDB 616217 D04 v01r02 and 248227 D01 802 11 Wi-Fi SAR v02r02.

The objective is to determine compliance with FCC Part 2.1093 of the Federal Communication Commissions rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with KDB 865664 D01 v01r04 and KDB 865664 D02 v01r02. The public notice KDB 447498 D01 v06 for Mobile and Portable Devices RF Exposure Procedure also.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010. Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

2. Summary of Test Results

The maximum results of Specific Absorption Rate (SAR) have found during testing are as follows:

Frequency Band	Limb (0mm Gap)	SAR _{10g} Limit (W/kg)
	Maximum SAR _{1g} (W/kg)	
WLAN 2.4GHz	0.175	4.0
WLAN 5GHz	0.456	4.0
Bluetooth	0.049	4.0
Simultaneous Transmission	0.833	4.0

Remark:

The device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR Part 2.1093 and IEEE Std C95.1: 2019, and had been tested in accordance with the measurement methods and procedure specified in KDB 865664 D01 v01r04, KDB 865664 D02 v01r02 and IEC 62209-2:2010+AMD1 (2019).

3. Specific Absorption Rate (SAR)

3.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

3.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\text{SAR} = C \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

4. SAR Measurement System

4.1 The Measurement System

Comosar is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The Comosar system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue

The following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The OpenSAR software computes the results to give a SAR value in a 1g or 10g mass.

4.2 Probe


For the measurements the Specific Dosimetric E-Field Probe SSE2 SN 45/15 EPGO280 with following specifications is used

- Dynamic range: 0.01-100 W/kg
- Probe Length: 330 mm
- Length of Individual Dipoles: 4.5 mm
- Maximum external diameter: 8 mm

Reference No.: WTX22X05096528W

- Probe Tip External Diameter : 5 mm
 - Distance between dipoles / probe extremity: 2.7mm
 - Probe linearity: <0.25 dB
 - Axial Isotropy: <0.25 dB
 - Spherical Isotropy: <0.50 dB
 - Calibration range: 700 to 3000MHz for head & body simulating liquid.
- Angle between probe axis (evaluation axis) and surface normal line: less than 30°

Probe calibration is realized, in compliance with EN 62209-1 and IEEE 1528 STD, with CALISAR, Antenna proprietary calibration system. The calibration is performed with the EN 62209-1 annexe technique using reference guide at the five frequencies.

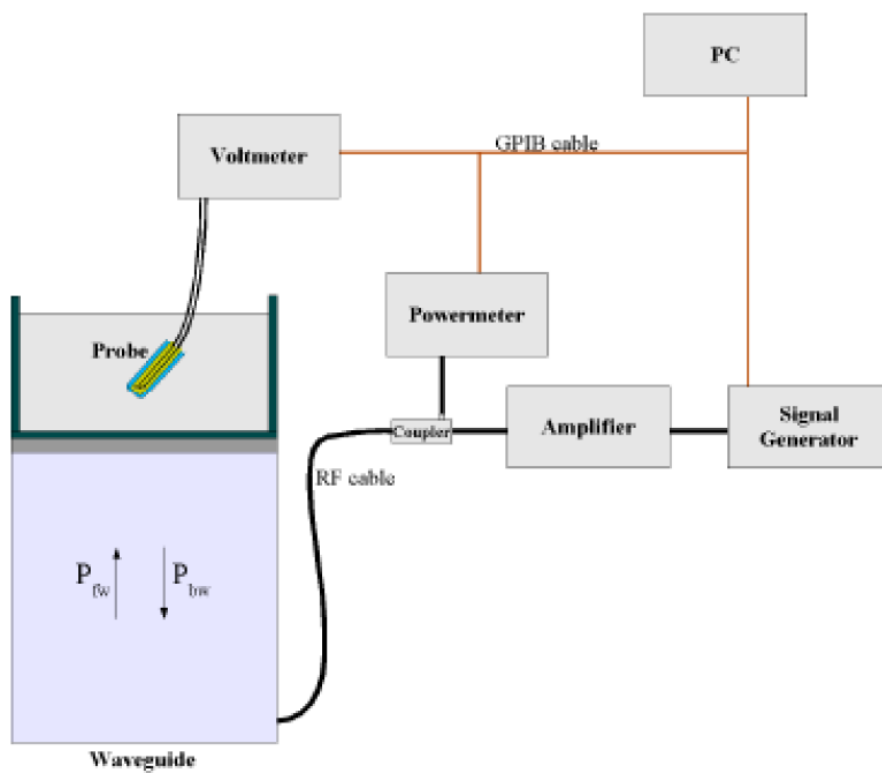

$$SAR = \frac{4(P_{fw} - P_{bw})}{ab\delta} \cos^2\left(\pi \frac{y}{a}\right) e^{-2z/\delta}$$

Where :

P_{fw} = Forward Power

P_{bw} = Backward Power

a and b = Waveguide dimensions

δ = Skin depth

Keithley configuration:

Waltek Testing Group (Shenzhen) Co., Ltd.

[Http://www.waltek.com.cn](http://www.waltek.com.cn)

Reference No.: WTX22X05096528W

Rate = Medium; Filter = ON; RDGS = 10; Filter type = Moving Average; Range auto after each calibration, a SAR measurement is performed on a validation dipole and compared with a NPL calibrated probe, to verify it.

The calibration factors, CF(N), for the 3 sensors corresponding to dipole 1, dipole 2 and dipole 3 are:

$$CF(N)=SAR(N)/Vlin(N) \quad (N=1,2,3)$$

The linearised output voltage Vlin(N) is obtained from the displayed output voltage V(N) using

$$Vlin(N)=V(N)*(1+V(N)/DCP(N)) \quad (N=1,2,3)$$

where DCP is the diode compression point in mV.

4.3 Probe Calibration Process

Dosimetric Assessment Procedure

Each E-Probe/Probe Amplifier combination has unique calibration parameters. SATIMO Probe calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm²) using an with CALISAR, Antenna proprietary calibration system.

Free Space Assessment Procedure

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1mW/cm².

Temperature Assessment Procedure

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated head tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

Where:

$$SAR = C \frac{\Delta T}{\Delta t}$$

Δt = exposure time (30 seconds),

C = heat capacity of tissue (brain or muscle),

ΔT = temperature increase due to RF exposure.

SAR is proportional to $\Delta T / \Delta t$, the initial rate of tissue heating, before thermal diffusion takes place. The electric

field in the simulated tissue can be used to estimate SAR by equating the thermally derived SAR to that with the E- field component.

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

Where:

σ = simulated tissue conductivity,


ρ = Tissue density (1.25 g/cm³ for brain tissue)

4.4 Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.

4.5 Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1 °.

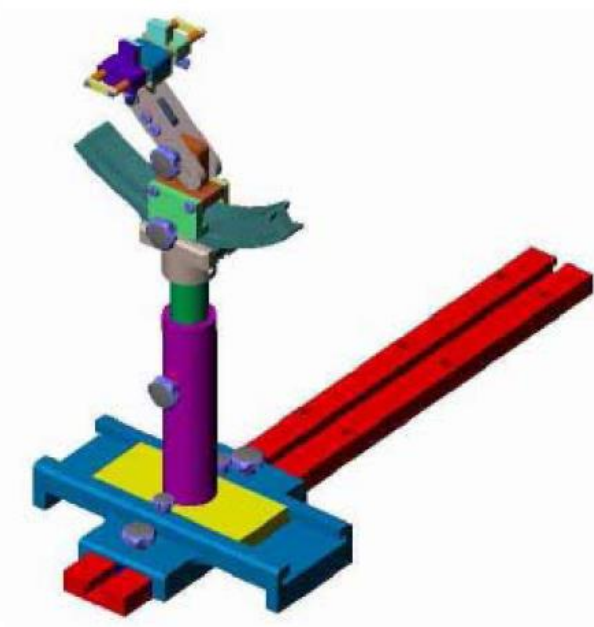

System Material	Permittivity	Loss Tangent
Delrin	3.7	0.005


4.6 Test Equipment List

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
E-Field Probe	MVG	SSE2	SN 18/21 EPGO356	2021-07-16	2022-07-15
750MHz Dipole	MVG	SID750	SN 47/12 DIP 0G750-203	2020-03-11	2023-03-10
835MHz Dipole	MVG	SID835	SN 47/12 DIP 0G835-204	2020-03-11	2023-03-10
900MHz Dipole	MVG	SID900	SN 47/12 DIP 0G900-205	2020-03-11	2023-03-10
1800MHz Dipole	MVG	SID1800	SN 47/12 DIP 1G800-206	2020-03-11	2023-03-10
1900MHz Dipole	MVG	SID1900	SN 47/12 DIP 1G900-207	2020-03-11	2023-03-10
2000MHz Dipole	MVG	SID2000	SN 47/12 DIP 2G000-208	2020-03-11	2023-03-10
2450MHz Dipole	MVG	SID2450	SN 13/15 DIP 2G450-364	2020-03-11	2023-03-10
2600MHz Dipole	MVG	SID2600	SN 28/21 DIP 2G600-590	2021-07-16	2024-07-15
5 GHz Dipole	MVG	SWG5500	SN 49/16 WGA45	2020-07-03	2023-07-02
Dielectric Probe	SATIMO	SCLMP	SN 47/12 OCPG49	2022-03-22	2023-03-21
SAM Phantom	SATIMO	SAM	SN/ 47/12 SAM95	N/A	N/A
Multi Meter	Keithley	Keithley 2000	4006367	2022-03-22	2023-03-21
Power meter	Keithley	3500	JC-2017-09-001	2022-03-22	2023-03-21
Power meter	Keithley	3500	JC-2017-09-001	2022-03-22	2023-03-21
Power Sensor	HP	11636B	JC-2017-10-002	2022-03-22	2023-03-21
MXG X-Series RF Vector Signal Generato	KEYSIGHT	N5182B	MY57300664	2022-03-22	2023-03-21
Universal Tester	Rohde & Schwarz	CMU200	112315	2022-03-22	2023-03-21
Universal Radio Communication Tester	Rohde & Schwarz	CMW500	148650	2022-03-22	2023-03-21
Network Analyzer	HP	8753C	2901A00831	2022-03-22	2023-03-21

5. Tissue Simulating Liquids

5.1 Composition of Tissue Simulating Liquid

For the measurement of the field distribution inside the SAM phantom with SMTIMO, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. Please see the following photos for the liquid height.

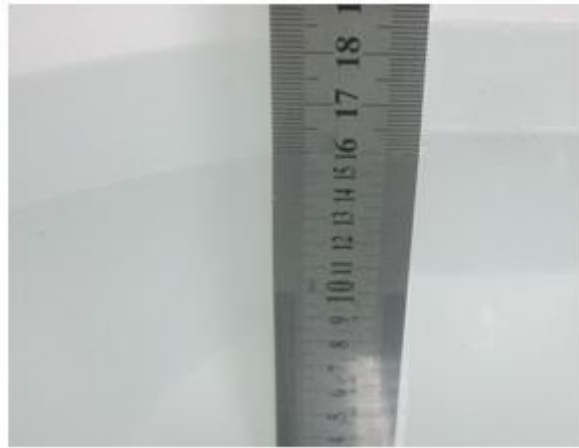

Liquid Height for Body SAR

The Composition of Tissue Simulating Liquid

Frequency (MHz)	Water (%)	Salt (%)	Sugar (%)	HEC (%)	Preventol (%)	DGBE (%)
Body						
2450	68.6	0.1	0	0	0	31.3

Frequency (MHz)	Water (%)	Hexyl Carbitol (%)	Triton X-100 (%)
Body			
5200-5800	78.6	10.7	10.7

5.2 Tissue Dielectric Parameters for Head and Body Phantoms

The IEEE Std. 1528, FCC KDBs and CEI/IEC 62209 standards state that the system validation measurements must be performed using a reference dipole meeting the fore mentioned return loss and mechanical dimension requirements. The validation measurement must be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. Per the standards, the dipole shall be positioned below the bottom of the phantom, with the dipole length centered and parallel to the longest dimension of the flat phantom, with the top surface of the dipole at the described distance from the bottom surface of the phantom.

Target Frequency (MHz)	Head		Body	
	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity (σ)	Permittivity (ϵ_r)
150	0.76	52.3	0.80	61.9
300	0.87	45.3	0.92	58.2
450	0.87	43.5	0.94	56.7
750	0.89	41.9	0.96	55.5
835	0.90	41.5	0.97	55.2
900	0.97	41.5	1.05	55.0
915	0.98	41.5	1.06	55.0
1450	1.20	40.5	1.30	54.0
1610	1.29	40.3	1.40	53.8
1800-2000	1.40	40.0	1.52	53.3
2450	1.80	39.2	1.95	52.7
3000	2.40	38.5	2.73	52.0
5200	4.66	36.0	5.30	49.0
5400	4.86	35.8	5.53	48.7
5600	5.07	35.5	5.77	48.5
5800	5.27	35.3	6.00	48.2

5.3 Tissue Calibration Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using COMOSAR Dielectric Probe Kit and an Agilent Network Analyzer.

Calibration Result for Dielectric Parameters of Tissue Simulating Liquid

Body Tissue Simulating Liquid									
Freq. MHz.	Temp. (°C)	Conductivity			Permittivity			Limit (%)	Date
		Reading (σ)	Target (σ)	Delta (%)	Reading (ϵ_r)	Target (ϵ_r)	Delta (%)		
2450	21.3	1.91	1.95	-2.05	52.01	52.7	-1.31	±5	2022-05-20
5200	21.3	5.16	5.30	-2.64	48.51	49.0	-1.00	±5	2022-05-23
5400	21.3	5.36	5.53	-3.07	49.35	48.7	1.33	±5	2022-05-23
5600	21.3	5.52	5.77	-4.33	48.39	48.5	-0.23	±5	2022-05-23
5800	21.3	5.76	6.00	-4.00	48.58	48.2	0.79	±5	2022-05-23
2412	21.3	1.92	1.95	-1.54	52.11	52.7	-1.12	±5	2022-05-20
2437	21.3	1.91	1.95	-2.05	52.08	52.7	-1.18	±5	2022-05-20
2480	21.3	1.93	1.95	-1.03	52.21	52.7	-0.93	±5	2022-05-20
5180	21.3	5.15	5.30	-2.83	48.52	49.0	-0.98	±5	2022-05-23
5240	21.3	5.16	5.30	-2.64	48.53	49.0	-0.96	±5	2022-05-23
5280	21.3	5.39	5.53	-2.53	49.45	48.7	1.54	±5	2022-05-23
5320	21.3	5.36	5.53	-3.07	49.35	48.7	1.33	±5	2022-05-23
5700	21.3	5.58	5.77	-3.29	48.53	48.5	0.06	±5	2022-05-23
5720	21.3	5.56	5.77	-3.64	48.67	48.5	0.35	±5	2022-05-23
5785	21.3	5.77	6.00	-3.83	48.56	48.2	0.75	±5	2022-05-23
5825	21.3	5.76	6.00	-4.00	48.58	48.2	0.79	±5	2022-05-23


6. SAR Measurement Evaluation

6.1 Purpose of System Performance Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

6.2 System Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave which comes from a signal generator at frequency 2450MHz and 5000MHz. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom.

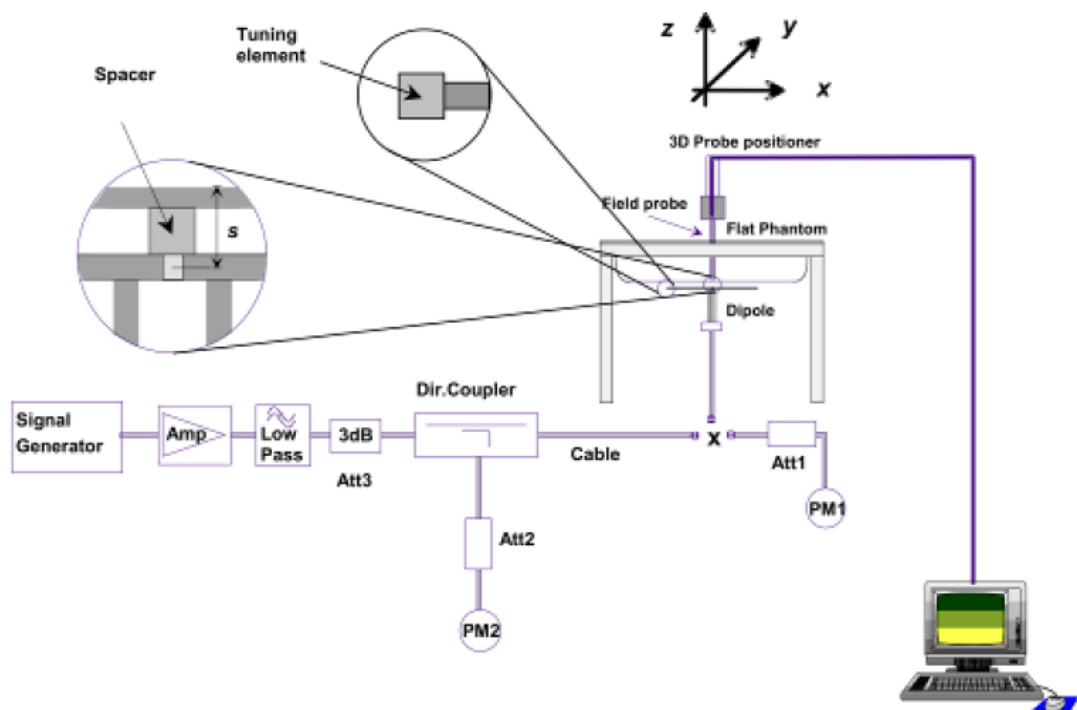

System Verification Setup Block Diagram



Setup Photo of Dipole Antenna

The output power on dipole port must be calibrated to 24 dBm(250 mW) before dipole is connected.
 The output power on 5 GHz Waveguide must be calibrated to 20 dBm (100mW) before 5 GHz Waveguide is connected.

6.3 Validation Results

Comparing to the original SAR value provided by SATIMO, the validation data should be within its specification of 10 %. Table 6.1 shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion.

Frequency	Targeted SAR _{10g}	Measured SAR _{10g}	Normalized SAR _{10g}	Tolerance	Date
MHz	(W/kg)	(W/kg)	(W/kg)	(%)	
Body					
2450	23.38	5.82	23.28	-0.43	2022-05-20
5200	50.01	50.01	5.103	51.03	2022-05-23
5400	57.57	57.57	6.048	60.48	2022-05-23
5600	57.93	57.93	5.923	59.23	2022-05-23
5800	59.17	59.17	5.984	59.84	2022-05-23

Targeted and Measurement SAR

Please refer to Annex A for the plots of system performance check.

7. EUT Testing Position

7.1 Body Position

- (a) To position the device parallel to the phantom surface with each side.
- (b) To adjust the device parallel to the flat phantom.
- (c) To adjust the distance between the device surface and the flat phantom to 0mm.


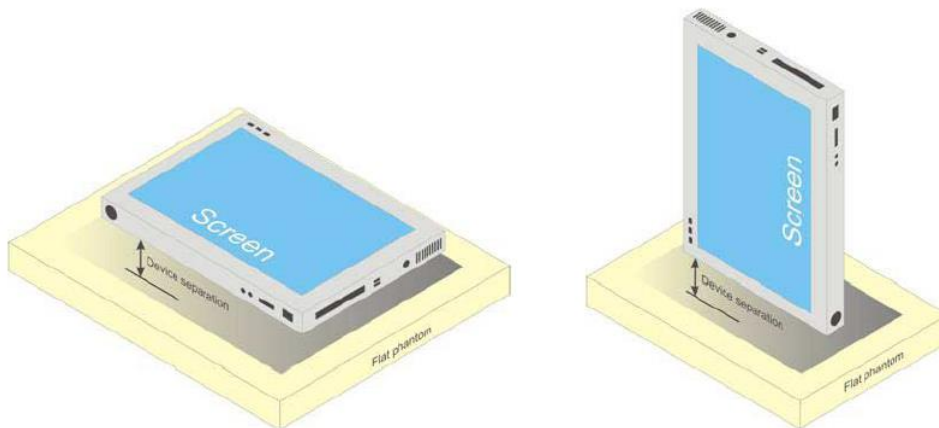


Illustration for Body Position

7.2 EUT Antenna Position

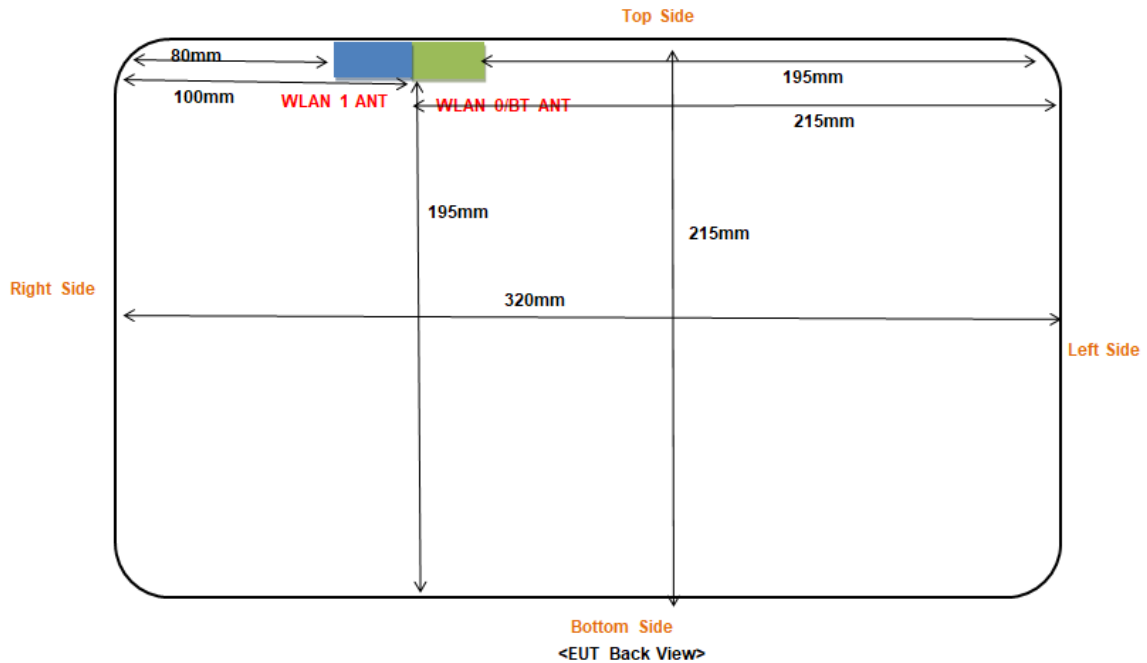

EUT Sizes: Long 320mm; height-top:42mm/height-bottom:7mm; Width:215mm

Fig 7.2 Block Diagram for EUT Antenna Position

7.3 EUT Testing Position

Distance of EUT antenna-to-edge/surface(mm), Test distance:0mm						
Antennas	Back side	Front side	Left Edge	Right Edge	Top Edge	Bottom Edge
WLAN ANT0/ Bluetooth	42	<25	195	100	<25	195
WLAN ANT 1	42	<25	215	80	<25	195

Remark:

1. Referring to KDB 447498 D01v06, the distance of the antennas to all adjacent edges SAR test exclusion for adjacent edges.
2. For tablet with overall diagonal dimension >20cm, SAR testing for front surface of the display section is exempted according to KDB616217 D04.

Body mode SAR assessments are required for this device. This EUT was tested in different positions for different SAR test modes, more information as below:

Limb SAR tests, Test distance: 0mm						
Antennas	Front	Back	Right Side	Left Side	Top Side	Bottom
WLAN ANT0/ Bluetooth	/	No	No	No	Yes	No
WLAN ANT1	/	No	No	No	Yes	No

Remark:

1. Referring to KDB 616217 D04 v01r02, KDB 248227 D01 v02r02 and KDB 447498 D01 v06, this device is overall diagonal dimension(>20cm) tablet, tested in direct contact (no gap) with flat phantom.
2. Referring to KDB 616217 D04 v01r02, Exposures from antennas through the front (top) surface of the display section of a full-size tablet, away from the edges, are generally limited to the user’s hands. Exposures to hands for typical consumer transmitters used in tablets are not expected to exceed the extremity SAR limit; therefore, SAR evaluation for the front surface of tablet display screens are generally not necessary.

Please refer to Annex for the EUT test setup photos.

8. SAR Measurement Procedures

8.1 Measurement Procedures

The measurement procedures are as follows:

- (a) Use base station simulator (if applicable) or engineering software to transmit RF power continuously (continuous Tx) in the highest power channel.
- (b) Keep EUT to radiate maximum output power or 100% factor (if applicable)
- (c) Measure output power through RF cable and power meter.
- (d) Place the EUT in the positions as Annex D demonstrates.
- (e) Set scan area, grid size and other setting on the SATIMO software.
- (f) Measure SAR results for the highest power channel on each testing position.
- (g) Find out the largest SAR result on these testing positions of each band
- (h) Measure SAR results for other channels in worst SAR testing position if the SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

8.2 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The SATIMO software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine. The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

8.3 Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan measures 5x5x7 points with step size 8, 8 and 5 mm for 300 MHz to 3 GHz, and 8x8x8 points with step size 4, 4 and 2.5 mm for 3 GHz to 6 GHz. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g.

8.4 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing (step-size is 4, 4 and 2.5 mm). When all volume scan were completed, the software can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.5 SAR Averaged Methods

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimize measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is using to determinate this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10g and 1 g requires a very fine resolution in the three dimensional scanned data array.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In SATIMO measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

9. SAR Test Result

9.1 Conducted RF Output Power

WLAN(2.4GHz) – Conducted Power –ANT0					
Test Mode	Data Rate	Channel	Frequency (MHz)	Average Power (dBm)	Max. Tune up Value (dBm)
802.11b	1Mbps	CH 01	2412	14.6	16.0
		CH 06	2437	14.7	16.0
		CH 11	2462	14.3	16.0
802.11g	6Mbps	CH 01	2412	15.1	16.0
		CH 06	2437	15.1	16.0
		CH 11	2462	14.8	16.0
802.11n (20MHz)	MCS0	CH 01	2412	15.2	16.0
		CH 06	2437	15.3	16.0
		CH 11	2462	14.8	16.0

WLAN(2.4GHz) – Conducted Power –ANT1					
Test Mode	Data Rate	Channel	Frequency (MHz)	Average Power (dBm)	Max. Tune up Value (dBm)
802.11b	1Mbps	CH 01	2412	14.7	16.0
		CH 06	2437	14.8	16.0
		CH 11	2462	14.0	16.0
802.11g	6Mbps	CH 01	2412	13.6	16.0
		CH 06	2437	14.7	16.0
		CH 11	2462	14.0	16.0
802.11n (20MHz)	MCS0	CH 01	2412	14.9	16.0
		CH 06	2437	14.2	16.0
		CH 11	2462	14.4	16.0

WLAN(5.2GHz) -Conducted Power-ANT0				
Test Mode	Channel	Frequency (MHz)	Average Power (dBm)	Max. Tune up Value (dBm)
802.11a	CH 36	5180	13.4	14.5
	CH 40	5200	12.7	14.5
	CH 44	5220	13.4	14.5
	CH 48	5240	14.4	14.5
802.11n (20MHz)	CH 36	5180	14.8	15.5
	CH 40	5200	14.3	15.5
	CH 44	5220	14.4	15.5
	CH 48	5240	15.4	15.5
802.11n (40MHz)	CH 38	5190	13.8	15.0
	CH46	5230	14.6	15.0
802.11ac (20MHz)	CH 36	5180	14.5	15.5
	CH 40	5200	14.0	15.5
	CH 44	5220	14.3	15.5
	CH 48	5240	15.4	15.5
802.11ac (40MHz)	CH 38	5190	13.7	15.0
	CH46	5230	14.1	15.0
802.11ac (80MHz)	CH 42	5210	12.9	14.0

WLAN(5.2GHz) -Conducted Power-ANT1				
Test Mode	Channel	Frequency (MHz)	Average Power (dBm)	Max. Tune up Value (dBm)
802.11a	CH 36	5180	12.8	14.0
	CH 40	5200	12.7	14.0
	CH 44	5220	12.8	14.0
	CH 48	5240	12.1	14.0
802.11n (20MHz)	CH 36	5180	13.3	14.5
	CH 40	5200	12.7	14.5
	CH 44	5220	13.3	14.5
	CH 48	5240	14.3	14.5
802.11n (40MHz)	CH 38	5190	12.0	14.0
	CH46	5230	12.3	14.0
802.11ac (20MHz)	CH 36	5180	13.0	14.5
	CH 40	5200	12.7	14.5
	CH 44	5220	12.8	14.5
	CH 48	5240	13.6	14.5
802.11ac (40MHz)	CH 38	5190	12.0	14.0
	CH46	5230	12.2	14.0

802.11ac (80MHz)	CH 42	5210	11.6	13.0
------------------	-------	------	------	------

WLAN(5.3GHz) -Conducted Power-ANT0				
Test Mode	Channel	Frequency (MHz)	Average Power (dBm)	Max. Tune up Value (dBm)
802.11a	CH 52	5260	13.4	14.5
	CH 56	5280	13.0	14.5
	CH 60	5300	13.2	14.5
	CH 64	5320	13.8	14.5
802.11n (20MHz)	CH 52	5260	15.1	15.5
	CH 56	5280	15.0	15.5
	CH 60	5300	14.9	15.5
	CH 64	5320	15.3	15.5
802.11n (40MHz)	CH 54	5270	15.0	15.0
	CH 62	5310	15.0	15.0
802.11ac (20MHz)	CH 52	5260	15.1	15.5
	CH 56	5280	14.8	15.5
	CH 60	5300	14.9	15.5
	CH 64	5320	15.3	15.5
802.11ac (40MHz)	CH 54	5270	14.8	15.0
	CH 62	5310	14.7	15.0
802.11ac (80MHz)	CH 58	5290	13.3	14.0

WLAN(5.3GHz) -Conducted Power-ANT1				
Test Mode	Channel	Frequency (MHz)	Average Power (dBm)	Max. Tune up Value (dBm)
802.11a	CH 52	5260	12.7	14.0
	CH 56	5280	12.6	14.0
	CH 60	5300	13.2	14.0
	CH 64	5320	12.8	14.0
802.11n (20MHz)	CH 52	5260	13.4	14.5
	CH 56	5280	13.0	14.5
	CH 60	5300	13.1	14.5
	CH 64	5320	13.8	14.5
802.11n (40MHz)	CH 54	5270	12.5	14.0
	CH 62	5310	12.6	14.0
802.11ac (20MHz)	CH 52	5260	13.1	14.5
	CH 56	5280	12.8	14.5
	CH 60	5300	13.4	14.5
	CH 64	5320	13.5	14.5
802.11ac (40MHz)	CH 54	5270	12.7	14.0

	CH 62	5310	12.8	14.0
802.11ac (80MHz)	CH 58	5290	12.0	13.0

WLAN(5.6GHz) -Conducted Power-ANT0				
Test Mode	Channel	Frequency (MHz)	Average Power (dBm)	Max. Tune up Value (dBm)
802.11a	CH 100	5500	13.8	14.5
	CH 116	5580	13.7	14.5
	CH 132	5660	13.6	14.5
	CH 140	5700	14.1	14.5
	CH 144	5720	14.1	14.5
802.11n (20MHz)	CH 100	5500	14.7	15.5
	CH 116	5580	14.6	15.5
	CH 132	5660	14.0	15.5
	CH 140	5700	14.8	15.5
	CH 144	5720	14.7	15.5
802.11n (40MHz)	CH 102	5510	14.1	15.0
	CH 110	5550	13.5	15.0
	CH 118	5590	13.9	15.0
	CH 134	5670	13.3	15.0
	CH 142	5710	13.9	15.0
802.11ac (20MHz)	CH 100	5500	14.8	15.5
	CH 116	5580	14.6	15.5
	CH 132	5660	14.0	15.5
	CH 140	5700	14.8	15.5
	CH 144	5720	14.7	15.5
802.11ac (40MHz)	CH 102	5510	13.9	15.0
	CH 110	5550	13.6	15.0
	CH 118	5590	13.9	15.0
	CH 134	5670	13.5	15.0
	CH 142	5710	13.8	15.0
802.11ac (80MHz)	CH 106	5530	13.0	14.0
	CH 122	5610	13.2	14.0
	CH 138	5690	12.9	14.0

WLAN(5.6GHz) -Conducted Power-ANT1				
Test Mode	Channel	Frequency (MHz)	Average Power (dBm)	Max. Tune up Value (dBm)
802.11a	CH 100	5500	12.9	14.0
	CH 116	5580	12.7	14.0
	CH 132	5660	12.9	14.0
	CH 140	5700	13.4	14.0
	CH 144	5720	13.7	14.0
802.11n (20MHz)	CH 100	5500	13.6	14.5
	CH 116	5580	13.6	14.5
	CH 132	5660	13.6	14.5
	CH 140	5700	14.2	14.5
	CH 144	5720	14.1	14.5
802.11n (40MHz)	CH 102	5510	13.1	14.0
	CH 110	5550	13.2	14.0
	CH 118	5590	12.7	14.0
	CH 134	5670	12.9	14.0
	CH 142	5710	13.2	14.0
802.11ac (20MHz)	CH 100	5500	13.5	14.5
	CH 116	5580	13.5	14.5
	CH 132	5660	13.7	14.5
	CH 140	5700	14.1	14.5
	CH 144	5720	14.3	14.5
802.11ac (40MHz)	CH 102	5510	12.6	14.0
	CH 110	5550	12.3	14.0
	CH 118	5590	12.7	14.0
	CH 134	5670	13.0	14.0
	CH 142	5710	13.2	14.0
802.11ac (80MHz)	CH 106	5530	11.6	13.0
	CH 122	5610	12.2	13.0
	CH 138	5690	12.2	13.0

WLAN(5.8GHz) – Conducted Power–ANT0				
Test Mode	Channel	Frequency (MHz)	Average Power (dBm)	Max. Tune up Value (dBm)
802.11a	CH 149	5745	13.7	14.5
	CH 157	5785	13.8	14.5
	CH 165	5825	13.8	14.5
802.11n (HT20)	CH 149	5745	13.5	15.5
	CH 157	5785	13.8	15.5
	CH 165	5825	13.7	15.5
802.11n (HT40)	CH 151	5755	12.6	15.0
	CH159	5795	13.0	15.0
802.11ac(VHT20)	CH 149	5745	13.5	15.5
	CH 157	5785	13.7	15.5
	CH 165	5825	13.6	15.5
802.11ac (VHT40)	CH 151	5755	12.5	15.0
	CH159	5795	12.9	15.0
802.11ac (VHT80)	CH155	5775	13.2	14.0

WLAN(5.8GHz) – Conducted Power–ANT1				
Test Mode	Channel	Frequency (MHz)	Average Power (dBm)	Max. Tune up Value (dBm)
802.11a	CH 149	5745	13.6	14.0
	CH 157	5785	12.7	14.0
	CH 165	5825	13.0	14.0
802.11n (HT20)	CH 149	5745	13.7	14.5
	CH 157	5785	13.9	14.5
	CH 165	5825	14.1	14.5
802.11n (HT40)	CH 151	5755	13.3	14.0
	CH159	5795	13.4	14.0
802.11ac(VHT20)	CH 149	5745	13.8	14.5
	CH 157	5785	13.9	14.5
	CH 165	5825	13.9	14.5
802.11ac (VHT40)	CH 151	5755	13.3	14.0
	CH159	5795	13.3	14.0
802.11ac (VHT80)	CH155	5775	12.6	13.0

Remark:

1. Per KDB 248227 D01 v02r02, For 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure applies to multiple exposure test positions.
2. Per KDB 248227 D01 v02r02, For 802.11b DSSS SAR measurements ,when the reported SAR of the highest

Waltek Testing Group (Shenzhen) Co., Ltd.

[Http://www.waltek.com.cn](http://www.waltek.com.cn)

measured maximum output power channel (see 3.1) for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration. When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

3 .For OFDM modes (802.11g/n), SAR is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and it is ≤ 1.2 W/kg.

BR+EDR Conducted Power

Modulation	Channel (MHz)	Antenna	Conducted Power (dBm)	Max. Tune up Value (dBm)
DH1	Hopping	Ant0	5.5	7.5
DH5	Hopping	Ant0	5.7	7.5
2DH1	Hopping	Ant0	6.7	7.5
2DH5	Hopping	Ant0	6.9	7.5
3DH1	Hopping	Ant0	6.8	7.5
3DH5	Hopping	Ant0	7.0	7.5

Rate	Channel (MHz)	Antenna	Conducted Power (dBm)	Max. Tune up Value (dBm)
DH5	2402	Ant0	5.9	7.5
	2441	Ant0	5.9	7.5
	2480	Ant0	5.8	7.5
2DH5	2402	Ant0	7.1	7.5
	2441	Ant0	6.7	7.5
	2480	Ant0	7.1	7.5
3DH5	2402	Ant0	7.5	7.5
	2441	Ant0	7.1	7.5
	2480	Ant0	7.6	8.0

BLE-Conducted Power

Rate	Channel (MHz)	Antenna	Conducted Power (dBm)	Max. Tune up Value (dBm)
1M	2402	Ant0	5.1	6.0
	2440	Ant0	4.3	6.0
	2480	Ant0	4.8	6.0
2M	2402	Ant0	4.6	6.0
	2440	Ant0	5.3	6.0
	2480	Ant0	5.6	6.0

9.2 Test Results for Standalone SAR Test

Limb SAR

WLAN 2.4GHz–Limb SAR Test–ANT0(0mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR10g (W/kg)	Scaled SAR10g (W/kg)
			CH.	MHz					
1.	802.11b	Top Side	06	2437	14.7	16.0	1.349	0.130	0.175

WLAN 2.4GHz–Limb SAR Test–ANT0(0mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR10g (W/kg)	Scaled SAR10g (W/kg)
			CH.	MHz					
2.	802.11n (20MHz)	Top Side	06	2437	15.3	16.0	1.175	0.127	0.149

WLAN 2.4GHz–Limb SAR Test–ANT1(0mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR10g (W/kg)	Scaled SAR10g (W/kg)
			CH.	MHz					
3.	802.11b	Top Side	06	2437	14.8	16.0	1.318	0.125	0.165

WLAN 2.4GHz–Limb SAR Test–ANT1(0mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR10g (W/kg)	Scaled SAR10g (W/kg)
			CH.	MHz					
4.	802.11n (20MHz)	Top Side	01	2412	14.9	16.0	1.288	0.129	0.166

Bluetooth–Limb SAR Test(0mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR10g (W/kg)	Scaled SAR10g (W/kg)
			MHz						
5.	Bluetooth	Top Side	2480		7.0	8.0	1.259	0.039	0.049

WLAN 5.2GHz–Limb SAR Test–ANT0(0mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR10g (W/kg)	Scaled SAR10g (W/kg)
			CH.	MHz					
6.	802.11n (20MHz)	Top Side	48	5240	15.4	15.5	1.023	0.273	0.279

WLAN 5.2GHz–Limb SAR Test–ANT1(0mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR10g (W/kg)	Scaled SAR10g (W/kg)
			CH.	MHz					
7.	802.11n (20MHz)	Top Side	48	5240	14.3	14.5	1.047	0.271	0.284

WLAN 5.3GHz–Limb SAR Test–ANT0(0mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR10g (W/kg)	Scaled SAR10g (W/kg)
			CH.	MHz					
8.	802.11n (20MHz)	Top Side	64	5320	15.3	15.5	1.047	0.262	0.274

WLAN 5.3GHz–Limb SAR Test–ANT1(0mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
9.	802.11n (20MHz)	Top Side	64	5320	13.8	14.5	1.175	0.234	0.275

WLAN 5.6GHz–Limb SAR Test –ANT0(0mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR10g (W/kg)	Scaled SAR10g (W/kg)
			CH.	MHz					
10.	802.11n (20MHz)	Top Side	140	5700	14.8	15.5	1.175	0.328	0.385
	802.11n (20MHz)	Top Side	100	5500	14.7	15.5	1.202	0.239	0.287
	802.11n (20MHz)	Top Side	116	5580	14.6	15.5	1.230	0.232	0.285
	802.11n (20MHz)	Top Side	132	5660	14.0	15.5	1.413	0.218	0.308
	802.11n (20MHz)	Top Side	144	5720	14.7	15.5	1.202	0.223	0.268

WLAN 5.6GHz–Limb SAR Test –ANT1(0mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR10g (W/kg)	Scaled SAR10g (W/kg)
			CH.	MHz					
11.	802.11ac (20MHz)	Top Side	144	5720	14.3	14.5	1.047	0.293	0.307

WLAN 5.8GHz–Limb SAR Test –ANT0(0mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR10g (W/kg)	Scaled SAR10g (W/kg)
			CH.	MHz					
12.	802.11a	Top Side	157	5785	13.8	14.5	1.175	0.388	0.456
	802.11a	Top Side	165	5825	13.8	14.5	1.175	0.365	0.429

WLAN 5.8GHz–Limb SAR Test –ANT1(0mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR10g (W/kg)	Scaled SAR10g (W/kg)
			CH.	MHz					
13.	802.11n (HT20)	Top Side	165	5825	14.1	14.5	1.096	0.344	0.377

Remark:1. Per KDB 447498 D01 v06, if the highest output channel SAR for each exposure position ≤ 0.8 W/kg other channels SAR tests are not necessary.

2. Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 3) through 5) do not apply.

3. When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.

4. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).

5. Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

9.3 Simultaneous Multi-band Transmission SAR Analysis

List of Mode for Simultaneous Multi-band Transmission

No.	Configurations	Limb SAR
1	WLAN(2.4GHz)(Data) ANT0 + WLAN(2.4GHz)(Data) ANT1	Yes
2	WLAN(5GHz)(Data) ANT0 + WLAN(5GHz)(Data) ANT1	Yes
3	WLAN(2.4GHz)(Data)ANT 0 + WLAN(5GHz)(Data)ANT 1	Yes
4	WLAN(2.4GHz)(Data)ANT 1 + WLAN(5GHz)(Data)ANT 0	Yes
5	WLAN(2.4GHz)(Data) ANT1+ Bluetooth(Data)	Yes
6	WLAN(5GHz)(Data) ANT1+ Bluetooth(Data)	Yes

Remark:

1. WLAN ANT0 and Bluetooth share the same antenna, and cannot transmit simultaneously.
2. According to the KDB 447498 D01 v06, when standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:
(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm) • [√ f(GHz)/x] W/kg for test separation distances ≤ 50 mm;
where x = 7.5 for 1-g SAR, and x = 18.75 for 10-g SAR.
3. The maximum SAR summation is calculated based on the same configuration and test position.

Limb SAR

	WLAN(2.4GHz)-ANT0	WLAN(2.4GHz)-ANT1	Summed SAR (W/kg)
Position	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Back	--	--	--
Front	--	--	--
Right side	--	--	--
Left side	--	--	--
Top side	0.175	0.166	0.341
Bottom side	--	--	--

	WLAN(5GHz)-ANT0	WLAN(5GHz)-ANT1	Summed SAR (W/kg)
Position	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Back	--	--	--
Front	--	--	--
Right side	--	--	--
Left side	--	--	--
Top side	0.456	0.377	0.833
Bottom side	--	--	--

	WLAN(2.4GHz)-ANT0	WLAN(5GHz)-ANT1	Summed SAR (W/kg)
Position	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Back	--	--	--
Front	--	--	--
Right side	--	--	--
Left side	--	--	--
Top side	0.175	0.377	0.552
Bottom side	--	--	--

	WLAN(2.4GHz)-ANT1	WLAN(5GHz)-ANT0	Summed SAR (W/kg)
Position	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Back	--	--	--
Front	--	--	--
Right side	--	--	--
Left side	--	--	--
Top side	0.166	0.456	0.622
Bottom side	--	--	--

	WLAN(2.4GHz)-ANT1	Bluetooth	Summed SAR (W/kg)
Position	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Back	--	--	--
Front	--	--	--
Right side	--	--	--
Left side	--	--	--
Top side	0.166	0.049	0.215
Bottom side	--	--	--

	WLAN(5GHz)-ANT1	Bluetooth	Summed SAR (W/kg)
Position	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Back	--	--	--
Front	--	--	--
Right side	--	--	--
Left side	--	--	--
Top side	0.377	0.049	0.426
Bottom side	--	--	--

10. Measurement Uncertainty

10.1 Uncertainty for SAR Test

a	b	c	d	e= f(d,k)	f	g	h= c*f/e	i= c*g/e	k
Uncertainty Component	Sec.	Tol (+- %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	Vi
Measurement System									
Probe calibration	E.2.1	7.0	N	1	1	1	7.00	7.00	∞
Axial Isotropy	E.2.2	2.5	R	$\sqrt{3}$	$(1_{Cp})^{1/2}$	$(1_{Cp})^{1/2}$	1.02	1.02	∞
Hemispherical Isotropy	E.2.2	4.0	R	$\sqrt{3}$	$(Cp)^{1/2}$	$(Cp)^{1/2}$	1.63	1.63	∞
Boundary effect	E.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	E.2.4	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
System detection limits	E.2.5	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Readout Electronics	E.2.6	0.02	N	1	1	1	0.02	0.02	∞
Reponse Time	E.2.7	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Integration Time	E.2.8	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
RF ambient Conditions – Noise	E.6.1	0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF ambient Conditions - Reflections	E.6.1	0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioner Mechanical Tolerance	E.6.2	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Probe positioning with respect to Phantom Shell	E.6.3	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	E.5	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Test Sample Related									
Test sample positioning	E.4.2	0.03	N	1	1	1	0.03	0.03	N-1
Device Holder Uncertainty	E.4.1	5.00	N	1	1	1	5.00	5.00	
Output power Variation - SAR drift measurement	E.2.9	12.02	R	$\sqrt{3}$	1	1	6.94	6.94	∞
SAR scaling	E6.5	0.0	R	$\sqrt{3}$	1	1	0.0	0.0	∞
Phantom and Tissue Parameters									
Phantom Uncertainty (Shape and thickness tolerances)	E.3.1	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	∞

Uncertainty in SAR correction for deviations in permittivity and conductivity	E.3.2	1.9	R	$\sqrt{3}$	1	0.84	1.10	0.90	∞
Liquid conductivity - deviation from target value	E.3.2	5.00	R	$\sqrt{3}$	0.64	0.43	1.85	1.24	∞
Liquid conductivity - measurement uncertainty	E.3.3	5.00	N	1	0.64	0.43	3.20	2.15	∞
Liquid permittivity - deviation from target value	E.3.2	0.37	R	$\sqrt{3}$	0.6	0.49	0.13	0.10	∞
Liquid permittivity - measurement uncertainty	E.3.3	10.00	N	1	0.6	0.49	6.00	4.90	∞
Combined Standard Uncertainty			RSS				10.20	10.00	
Expanded Uncertainty (95% Confidence interval)			K=2				20.40	20.00	

Annex A. Plots of System Performance Check

MEASUREMENT 1

Type: Validation measurement (Fast, 75.00 %)

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.62; Calibrated: 2021-07-16

A. Experimental conditions

Area Scan	dx=0mm dy=0mm
Zoom Scan	dx=0mm dy=0mm dz=4mm
Phantom	Validation plane
Device Position	Dipole
Band	CW2450
Signal	CW (Crest factor: 1.0)

B. SAR Measurement Results

Frequency (MHz)	2450.000000
Relative Permittivity (real part)	52.013275
Conductivity (S/m)	1.910214
Power Variation (%)	-1.050000
Ambient Temperature	21.3
Liquid Temperature	21.3

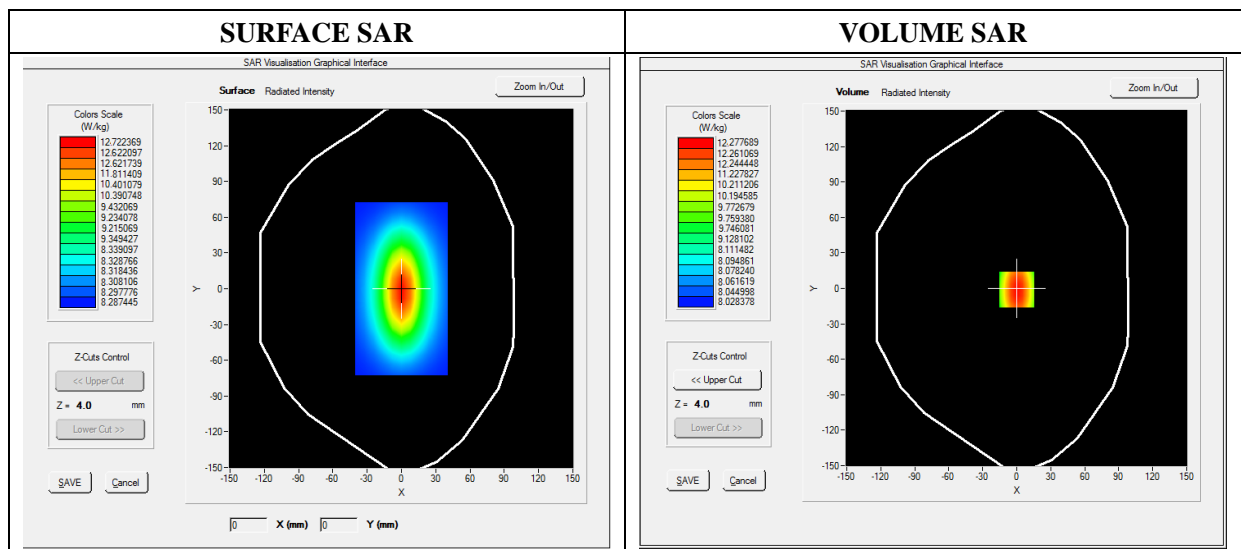




Maximum location: X=0.00, Y=0.00

SAR 10g (W/Kg)	5.821735
SAR 1g (W/Kg)	13.031201

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	12.2365	10.3321	8.4512	6.4365	5.6123	3.5621

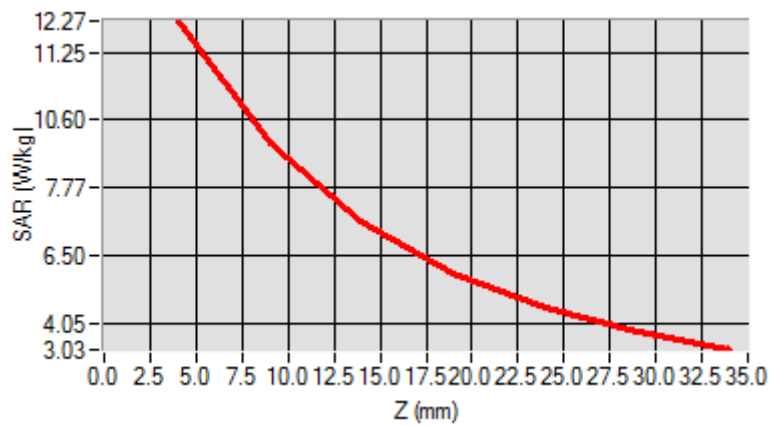

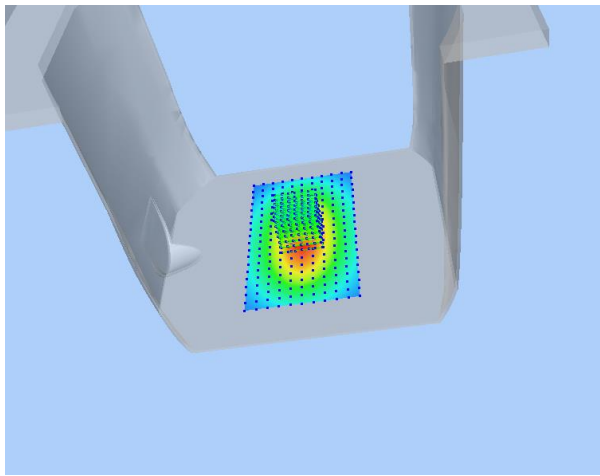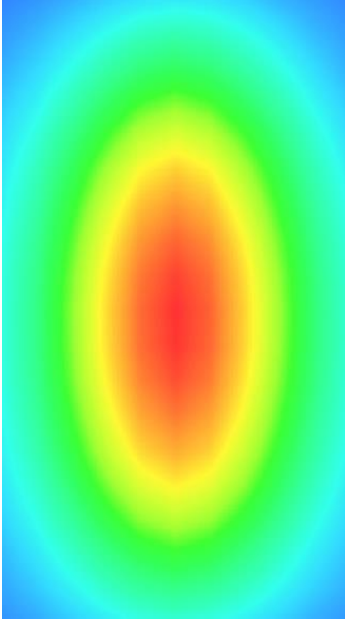3D screen shot	Hot spot position
	

MEASUREMENT 2

Type: Validation measurement (Fast, 75.00 %)

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 1.82; Calibrated: 2021-07-16

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Phantom	Validation plane
Device Position	Dipole
Band	CW5200
Signal	CW (Crest factor: 1.0)

B. SAR Measurement Results



Frequency (MHz)	5200.000000
Relative Permittivity (real part)	48.512911
Conductivity (S/m)	5.163426
Power Variation (%)	-0.940000
Ambient Temperature	21.3
Liquid Temperature	21.3

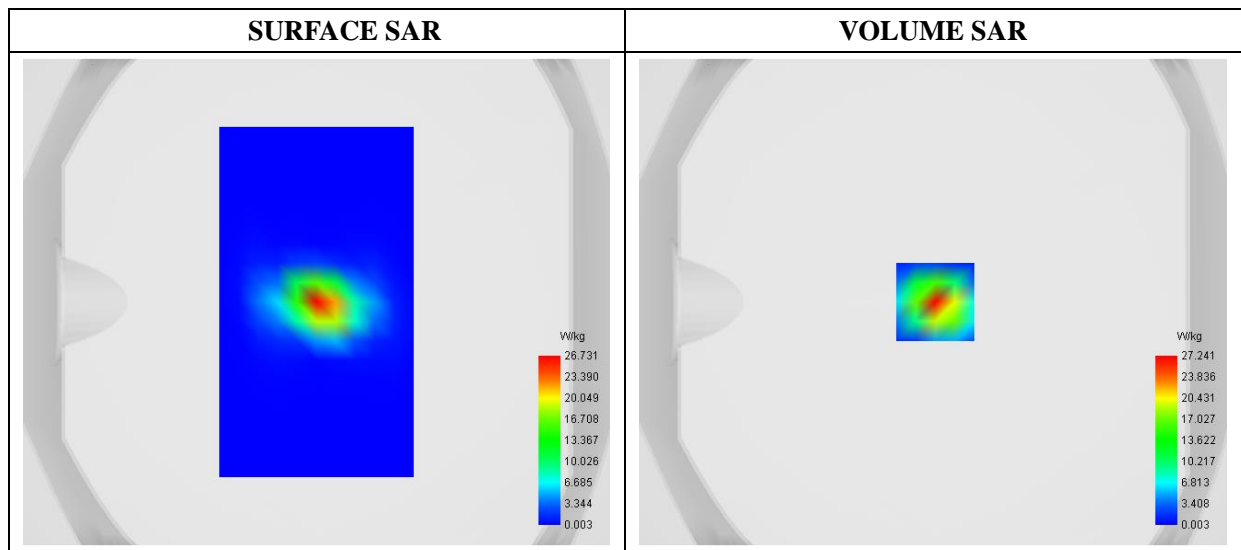

Maximum location: X=1.00, Y=0.00

SAR 10g (W/Kg)	5.103341
SAR 1g (W/Kg)	16.460226

Z (mm)	0.00	2.00	7.00	12.00	17.00	22.00	27.00
SAR (W/Kg)	40.7264	26.2408	6.1746	1.2234	0.3465	0.0743	0.0119

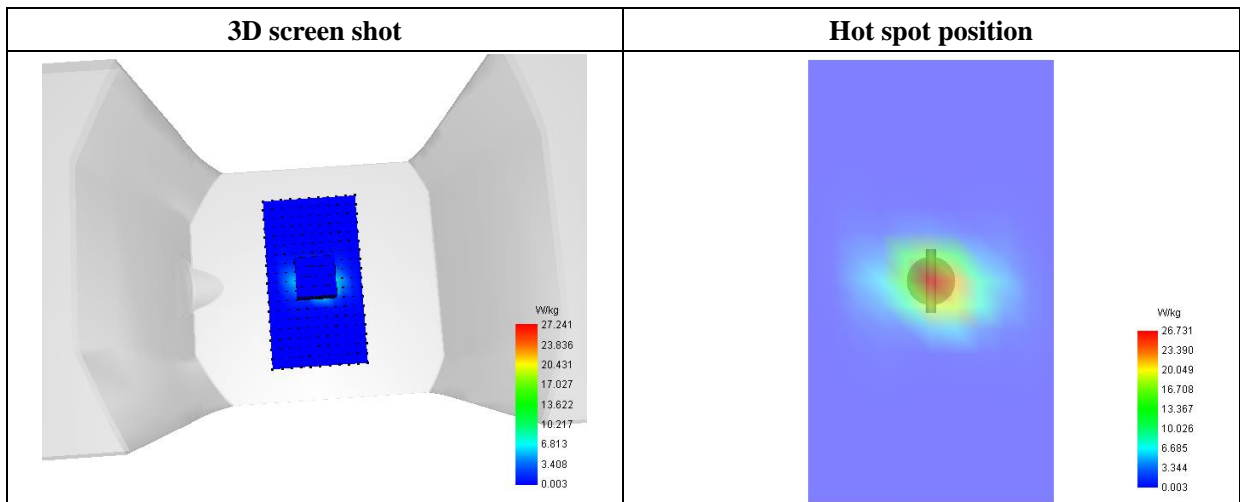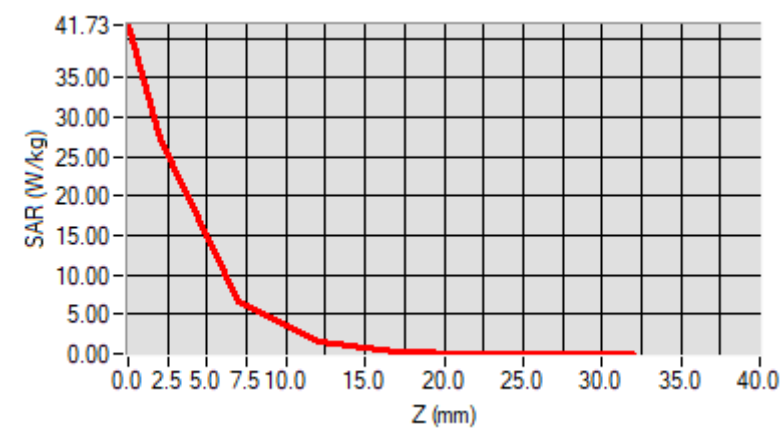

MEASUREMENT 3

Type: Validation measurement (Fast, 75.00 %)

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.02; Calibrated: 2021-07-16

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Phantom	Validation plane
Device Position	Dipole
Band	CW5400
Signal	CW (Crest factor: 1.0)

B. SAR Measurement Results



Frequency (MHz)	5400.000000
Relative Permittivity (real part)	49.350839
Conductivity (S/m)	5.360192
Power Variation (%)	1.020000
Ambient Temperature	21.3
Liquid Temperature	21.3

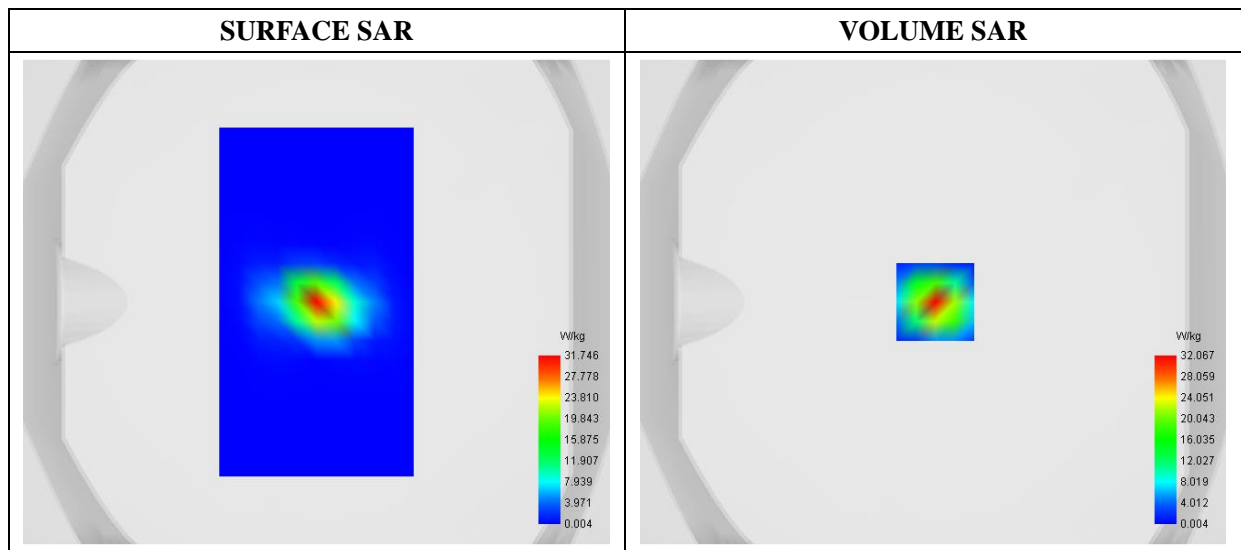

Maximum location: X=1.00, Y=0.00

SAR 10g (W/Kg)	6.047588
SAR 1g (W/Kg)	17.481175

Z (mm)	0.00	2.00	7.00	12.00	17.00	22.00	27.00
SAR (W/Kg)	49.8193	32.0669	7.0244	1.5969	0.3410	0.0635	0.0070

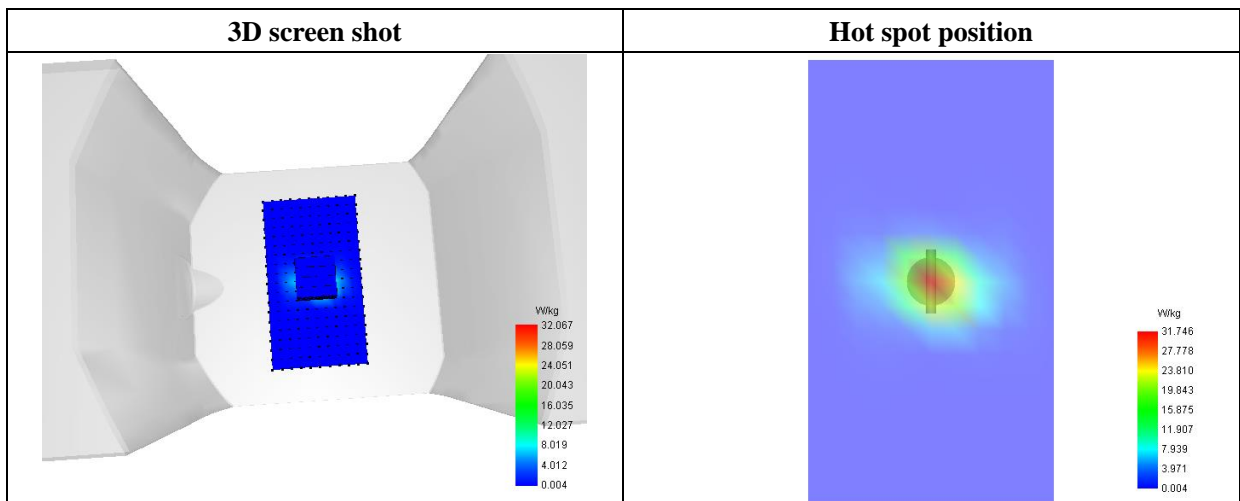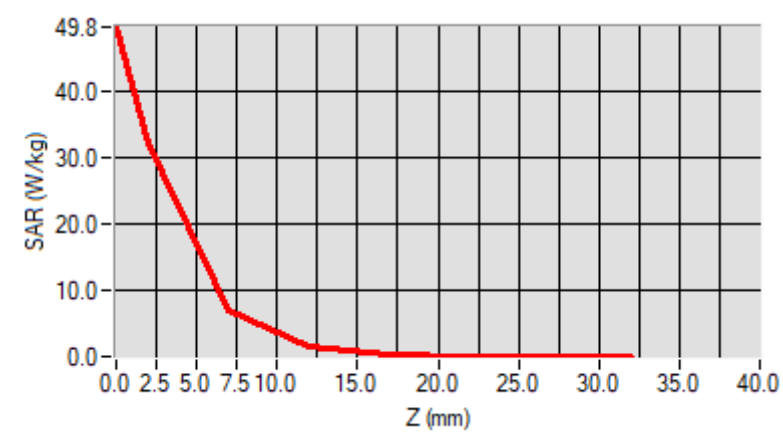

MEASUREMENT 4

Type: Validation measurement (Fast, 75.00 %)

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.20; Calibrated: 2021-07-16

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Phantom	Validation plane
Device Position	Dipole
Band	CW5600
Signal	CW (Crest factor: 1.0)

B. SAR Measurement Results

Frequency (MHz)	5600.000000
Relative Permittivity (real part)	48.391205
Conductivity (S/m)	5.520357
Power Variation (%)	-0.640000
Ambient Temperature	21.3
Liquid Temperature	21.3


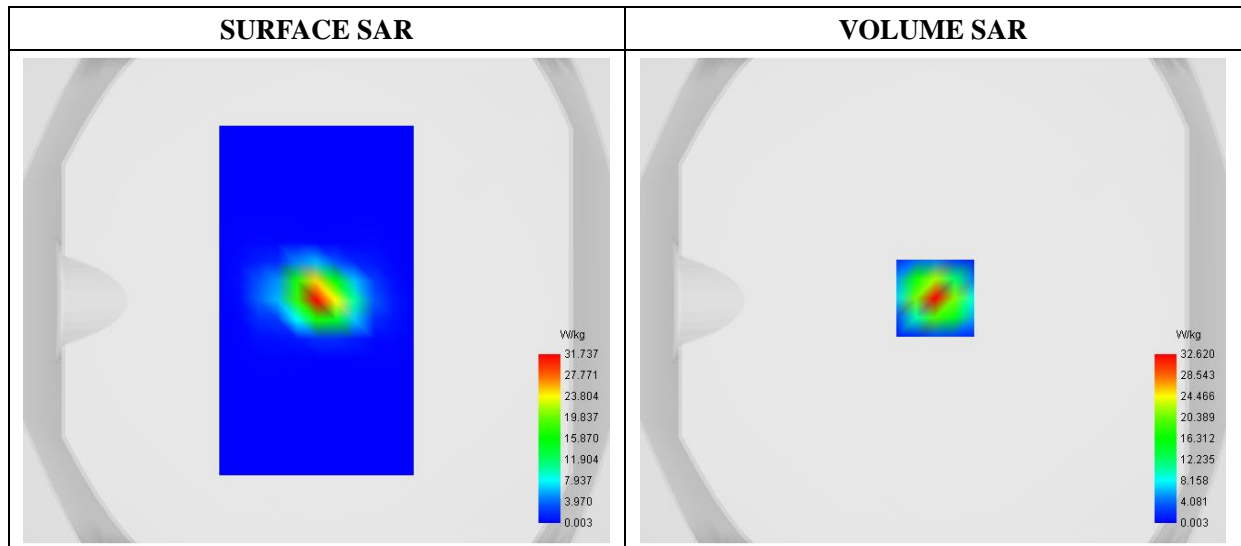


Maximum location: X=1.00, Y=1.00

Reference No.: WTX22X05096528W

SAR 10g (W/Kg)	5.922791
SAR 1g (W/Kg)	17.604052

Z (mm)	0.00	2.00	7.00	12.00	17.00	22.00	27.00
SAR (W/Kg)	51.2061	32.6198	6.6166	1.3486	0.2638	0.0509	0.0050

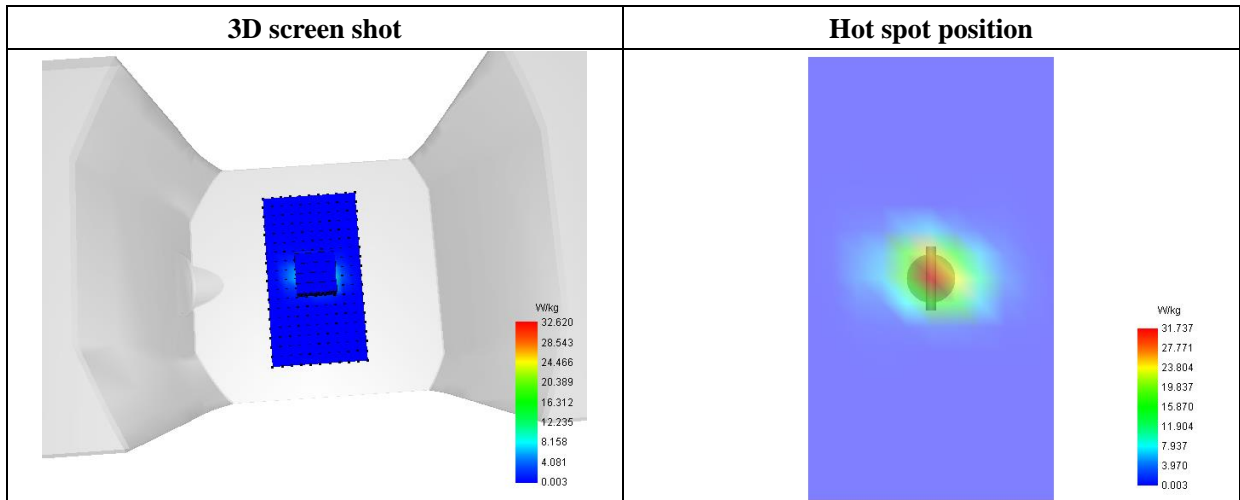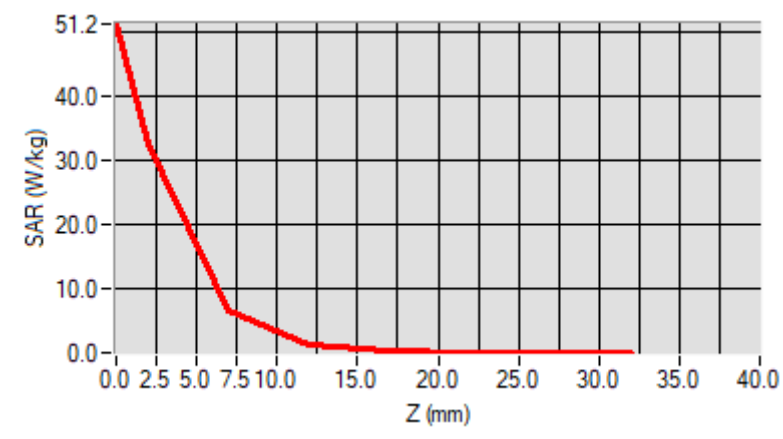

MEASUREMENT 5

Type: Validation measurement (Fast, 75.00 %)

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.11; Calibrated: 2021-07-16

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Dipole
Band	CW5800
Signal	CW (Crest factor: 1.0)

B. SAR Measurement Results



Frequency (MHz)	5800.000000
Relative Permittivity (real part)	48.583814
Conductivity (S/m)	5.762705
Power Variation (%)	-1.640000
Ambient Temperature	21.3
Liquid Temperature	21.3

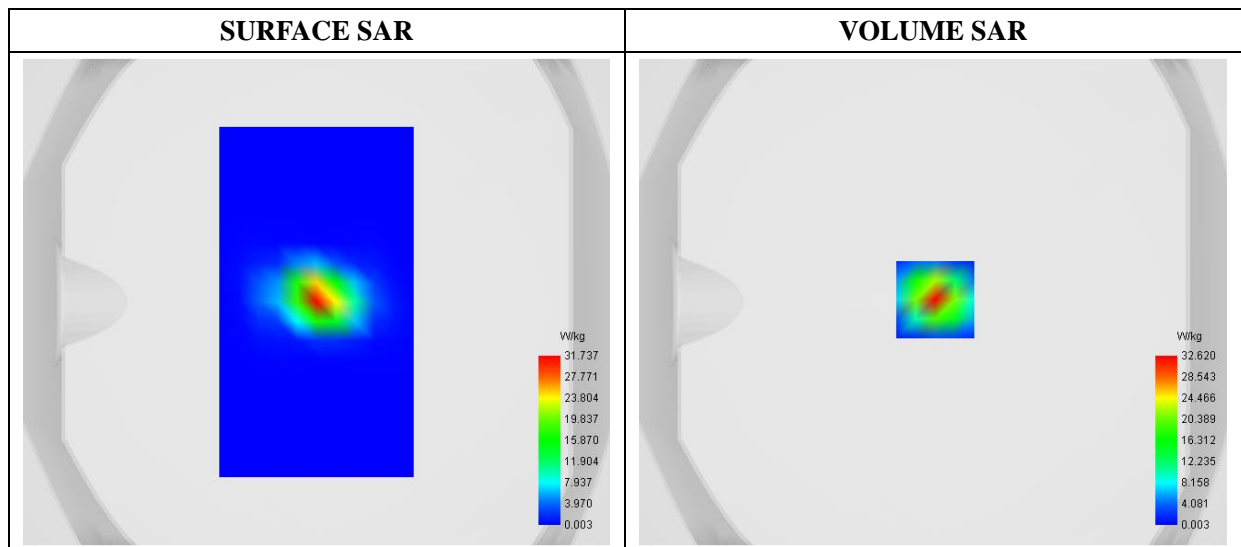

Maximum location: X=1.00, Y=1.00

SAR 10g (W/Kg)	5.983506
SAR 1g (W/Kg)	17.960742

Z (mm)	0.00	2.00	7.00	12.00	17.00	22.00	27.00
SAR (W/Kg)	51.2061	32.6198	6.6166	1.3486	0.2638	0.0509	0.0050

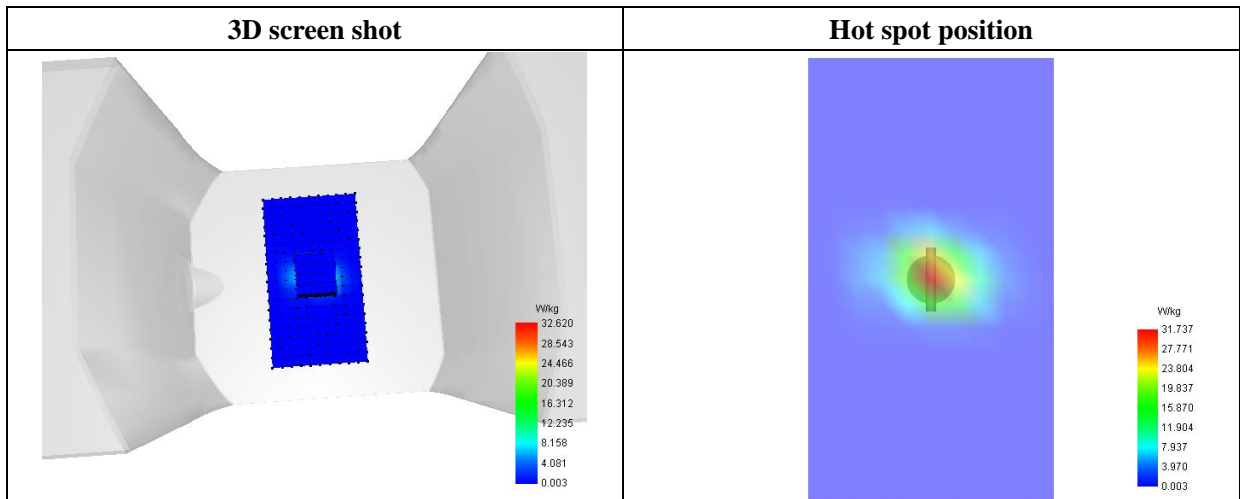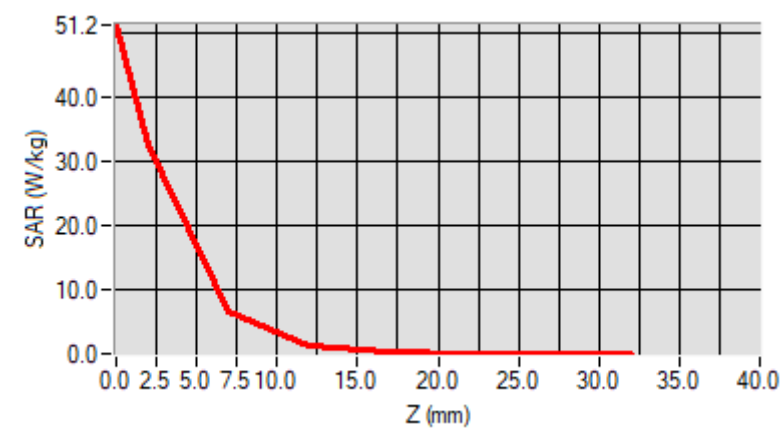

Annex B. Plots of SAR Measurement

MEASUREMENT 1

Type: Phone measurement (Complete)

Date of measurement: 2022-05-20


Measurement duration: 12 minutes 3 seconds

A. Experimental conditions

Area Scan	dx=8mm dy=-24mm
Zoom Scan	dx=8mm dy=-24mm dz=4mm
Phantom	Flat Plane
Device Position	Top
Band	WiFi_802.11b_ANT0
Channels	Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	2437.000000
Relative Permittivity (real part)	52.080212
Conductivity (S/m)	1.910255
Power Variation (%)	2.403721
Ambient Temperature	21.3
Liquid Temperature	21.3

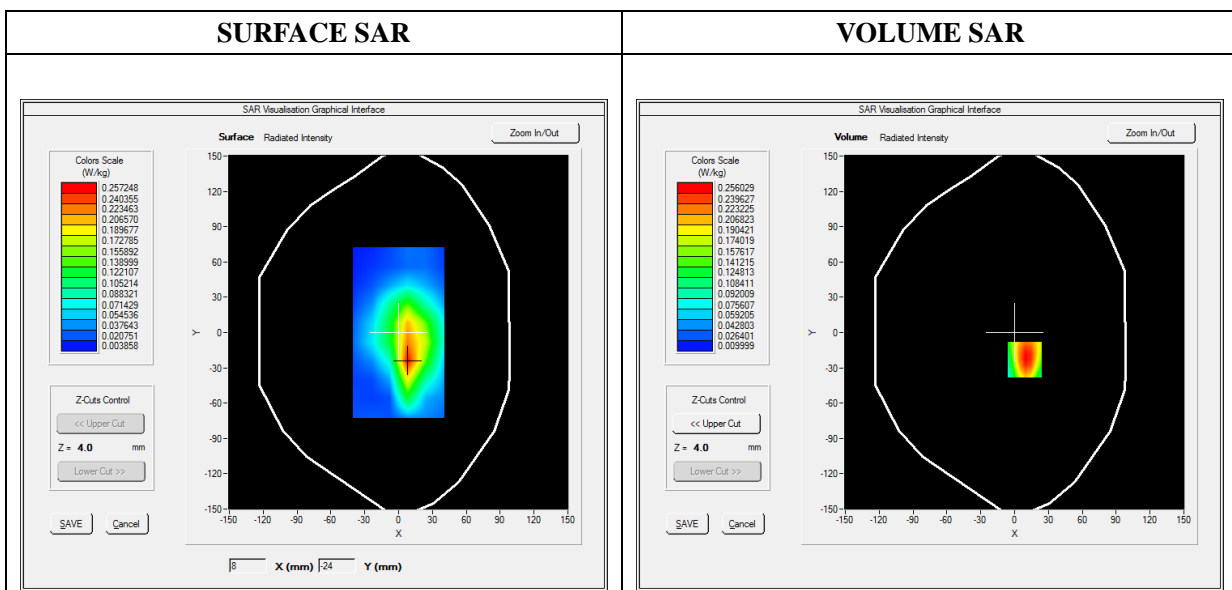


Maximum location: X=9.00, Y=-23.00

SAR Peak: 0.45 W/kg

SAR 10g (W/Kg)	0.129540
SAR 1g (W/Kg)	0.244157

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.4341	0.2560	0.1263	0.0623	0.0332

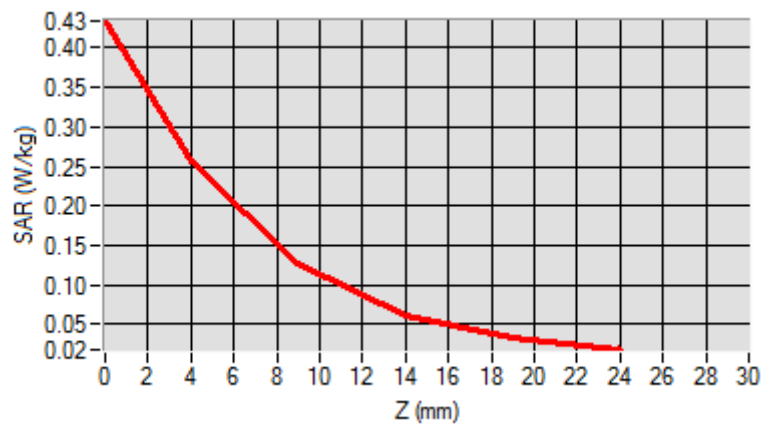

3D screen shot	Hot spot position

MEASUREMENT 2


Type: Phone measurement (Complete)
 Date of measurement: 2022-05-20
 Measurement duration: 12 minutes 3 seconds

A. Experimental conditions

Area Scan	dx=8mm dy=-24mm
Zoom Scan	dx=8mm dy=-24mm dz=4mm
Phantom	Flat Plane
Device Position	Top
Band	WiFi_802.11n (20MHz)_ANT0
Channels	Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	2437.000000
Relative Permittivity (real part)	52.080212
Conductivity (S/m)	1.910255
Power Variation (%)	2.403721
Ambient Temperature	21.3
Liquid Temperature	21.3

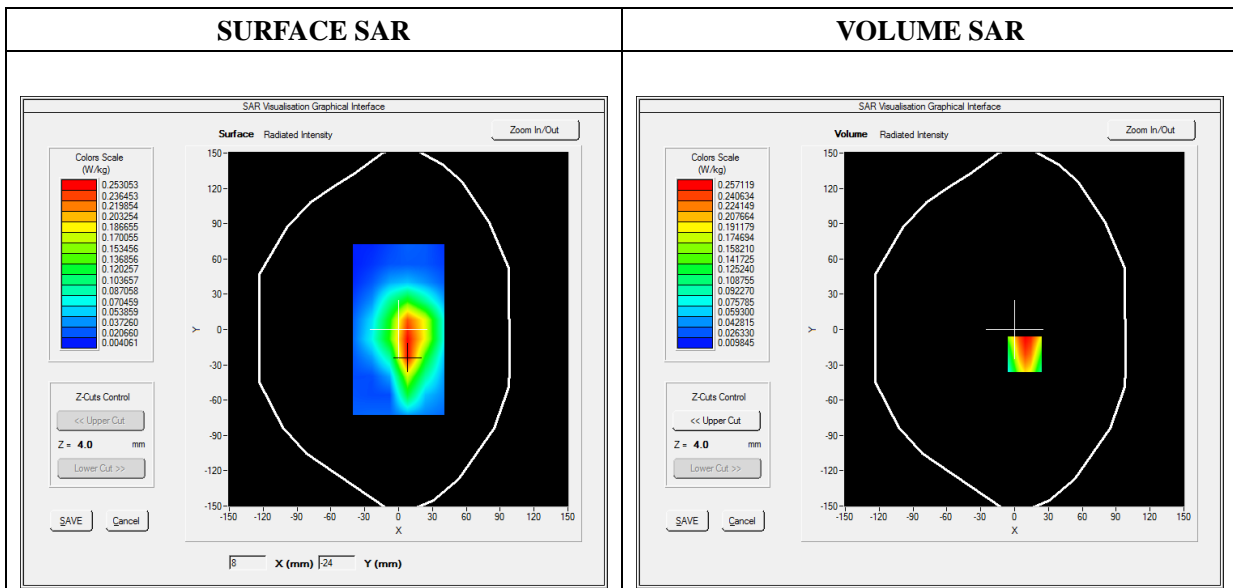


Maximum location: X=9.00, Y=-21.00

SAR Peak: 0.47 W/kg

SAR 10g (W/Kg)	0.127228
SAR 1g (W/Kg)	0.242314

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.3795	0.2571	0.1204	0.0526	0.0438

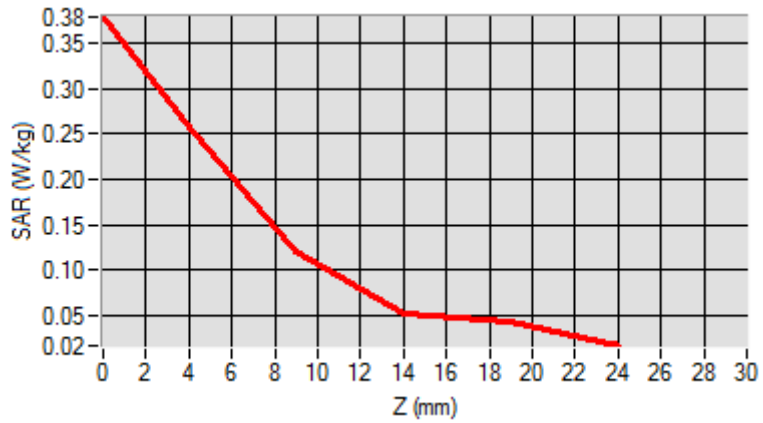

3D screen shot	Hot spot position
<p>A 3D model of a device, possibly a mobile phone, with a color-coded SAR hot spot visualization on its surface. The hot spot is concentrated in the center of the device's face, indicated by red and yellow colors, surrounded by green and blue areas representing lower SAR values.</p>	<p>A 2D heatmap visualization of the SAR hot spot position. The central area is red, indicating the highest SAR values, which transitions through yellow and green to blue at the edges, representing lower SAR values.</p>

MEASUREMENT 3


Type: Phone measurement (Complete)
 Date of measurement: 2022-05-20
 Measurement duration: 12 minutes 3 seconds

A. Experimental conditions

Area Scan	dx=8mm dy=-8mm
Zoom Scan	dx=8mm dy=-8mm dz=4mm
Phantom	Flat Plane
Device Position	Top
Band	WiFi_802.11b_ANT1
Channels	Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	2437.000000
Relative Permittivity (real part)	52.080212
Conductivity (S/m)	1.910255
Power Variation (%)	2.403721
Ambient Temperature	21.3
Liquid Temperature	21.3


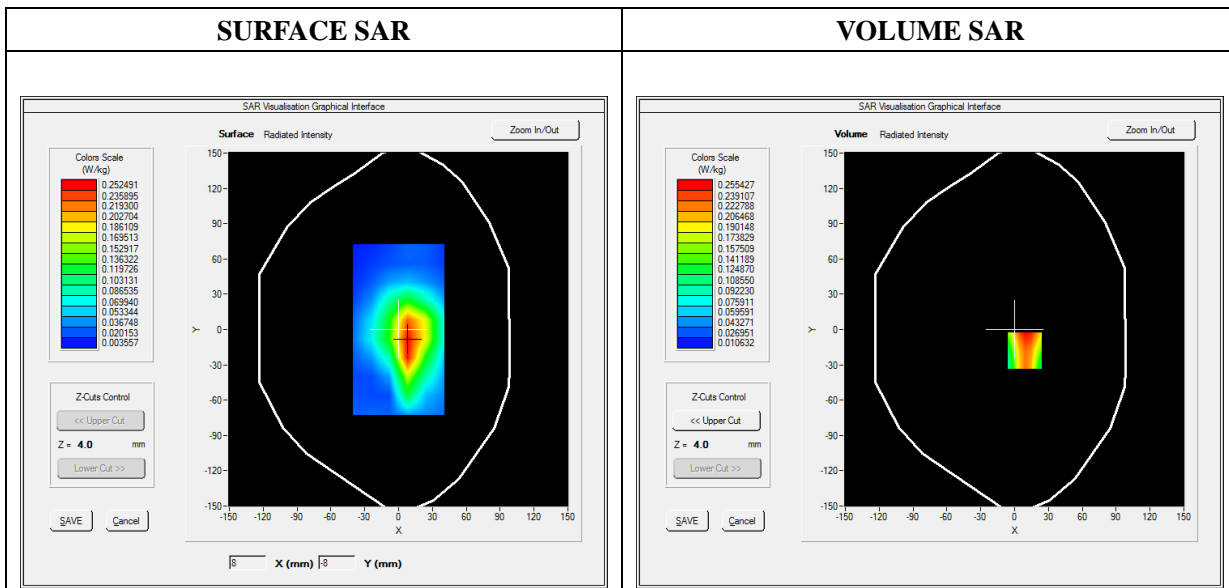


Maximum location: X=9.00, Y=-18.00

SAR Peak: 0.45 W/kg

SAR 10g (W/Kg)	0.124781
SAR 1g (W/Kg)	0.236689

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.3373	0.2554	0.1292	0.0561	0.0435

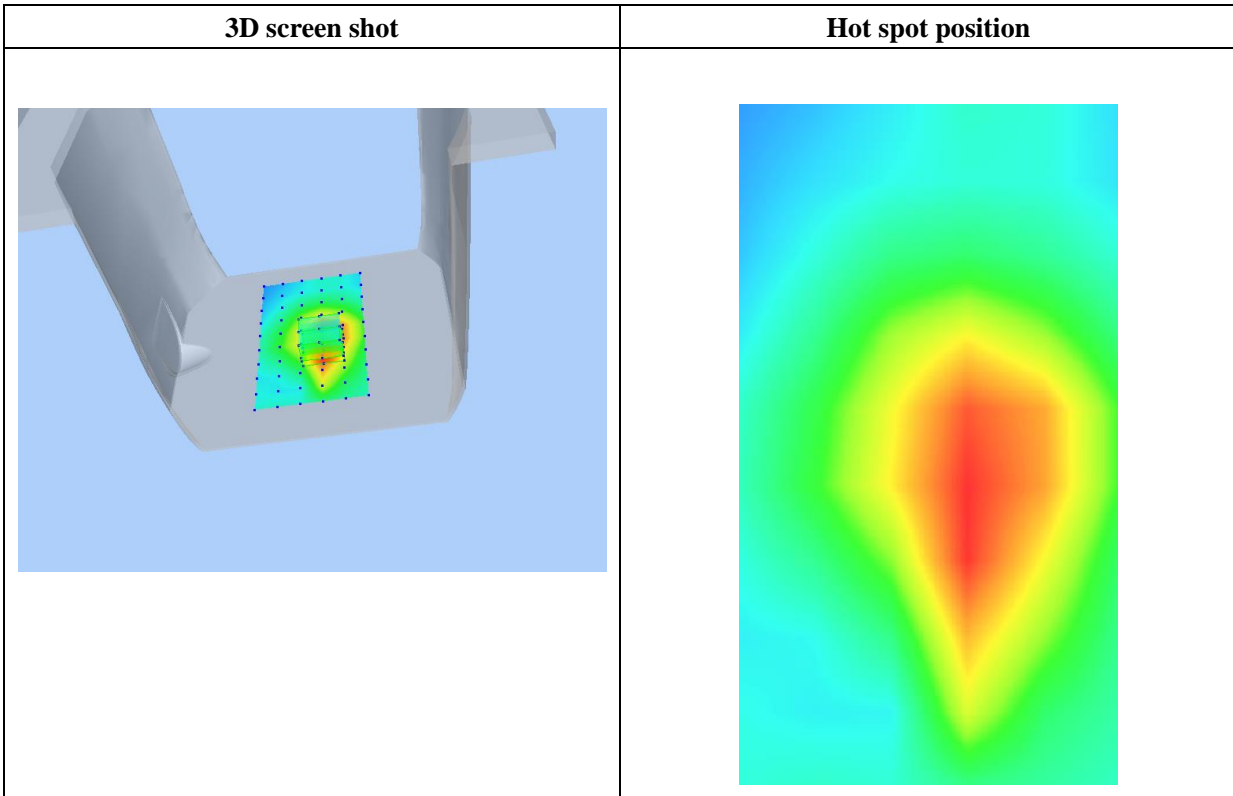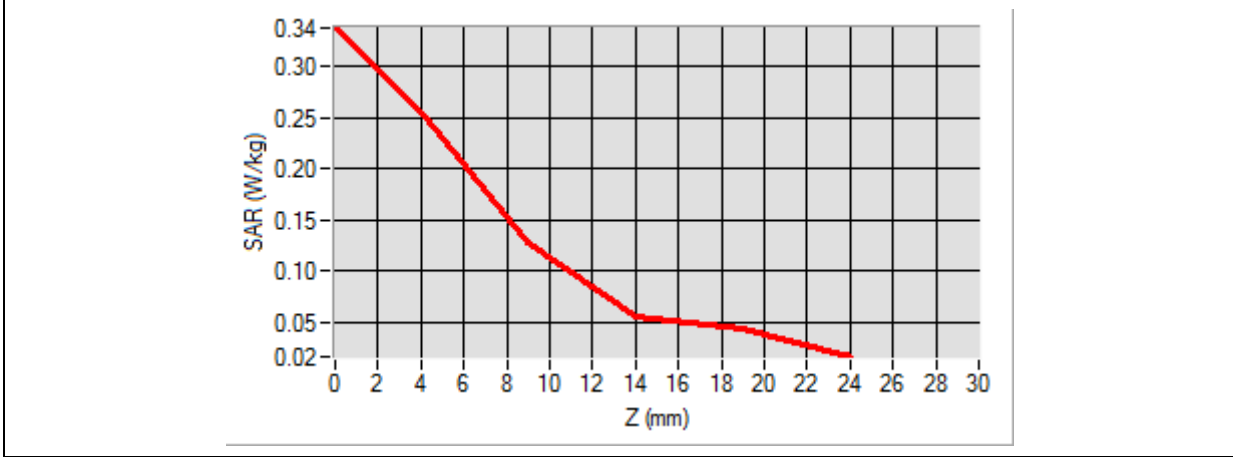

MEASUREMENT 4


Type: Phone measurement (Complete)
 Date of measurement: 2022-05-20
 Measurement duration: 12 minutes 3 seconds

A. Experimental conditions

Area Scan	dx=8mm dy=-24mm
Zoom Scan	dx=8mm dy=-24mm dz=4mm
Phantom	Flat Plane
Device Position	Top
Band	WiFi_802.11n (20MHz)_ANT1
Channels	Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	2412.000000
Relative Permittivity (real part)	52.112127
Conductivity (S/m)	1.922558
Power Variation (%)	2.403721
Ambient Temperature	21.3
Liquid Temperature	21.3

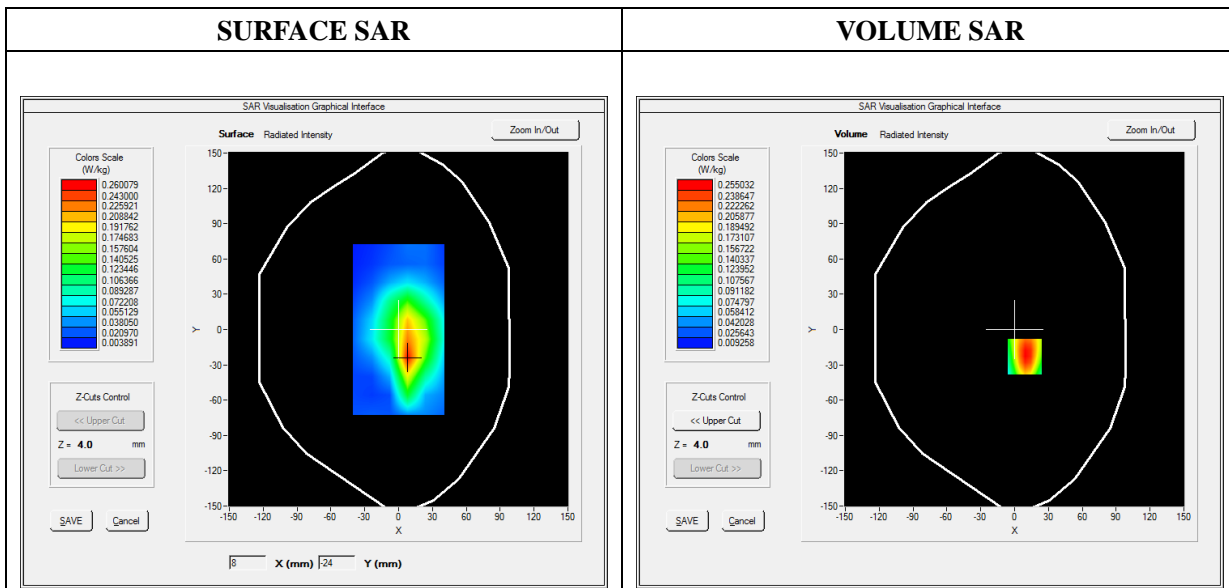

Maximum location: X=9.00, Y=-23.00
SAR Peak: 0.45 W/kg

SAR 10g (W/Kg)	0.128642
SAR 1g (W/Kg)	0.203559

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.4369	0.2550	0.1241	0.0609	0.0329

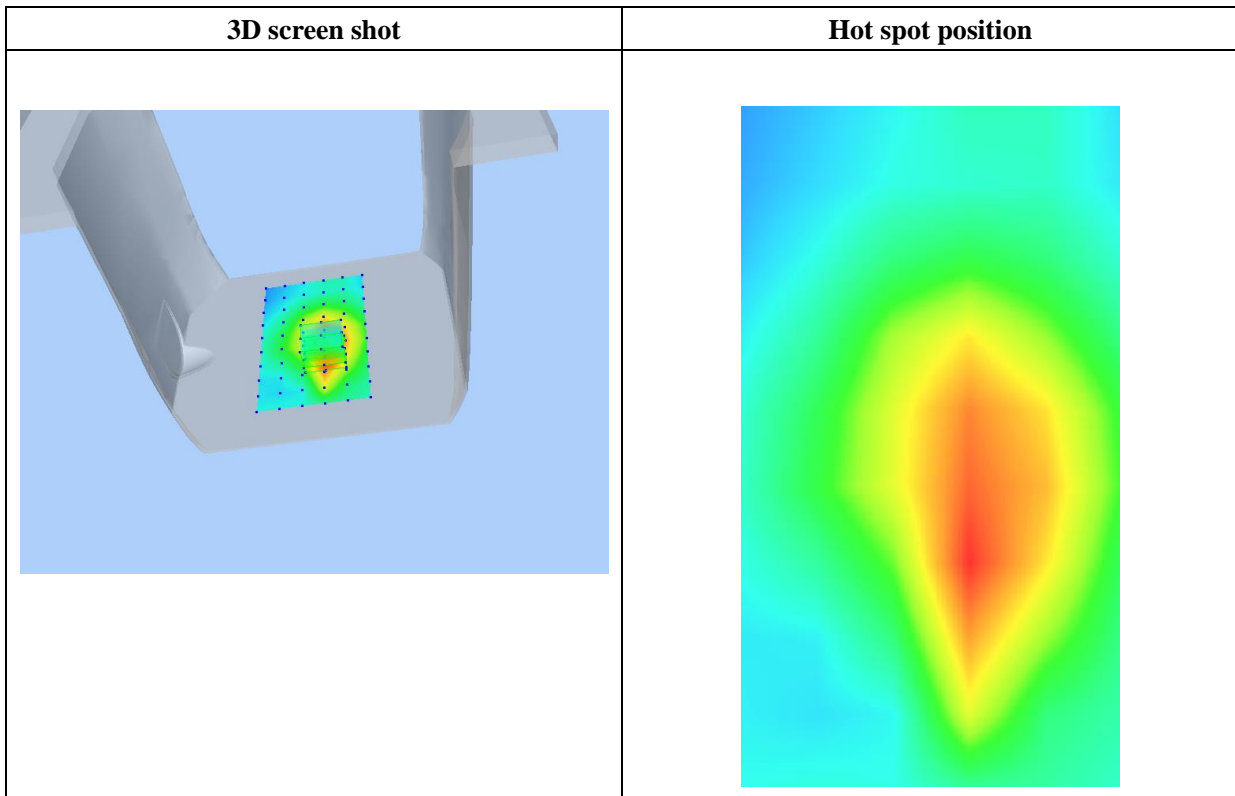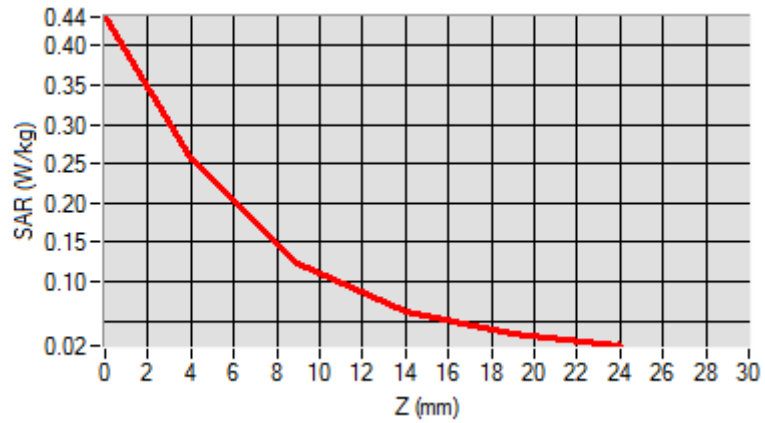

MEASUREMENT 5


Type: Phone measurement (Complete)
 Date of measurement: 2022-05-20
 Measurement duration: 12 minutes 3 seconds

A. Experimental conditions

Area Scan	dx=8mm dy=-24mm
Zoom Scan	dx=8mm dy=-24mm dz=4mm
Phantom	Flat Plane
Device Position	Top
Band	Bluetooth
Channels	High
Signal	Duty Cycle 1:1

B. SAR Measurement Results


Frequency (MHz)	2480.000000
Relative Permittivity (real part)	52.210128
Conductivity (S/m)	1.930558
Power Variation (%)	2.403721
Ambient Temperature	21.3
Liquid Temperature	21.3

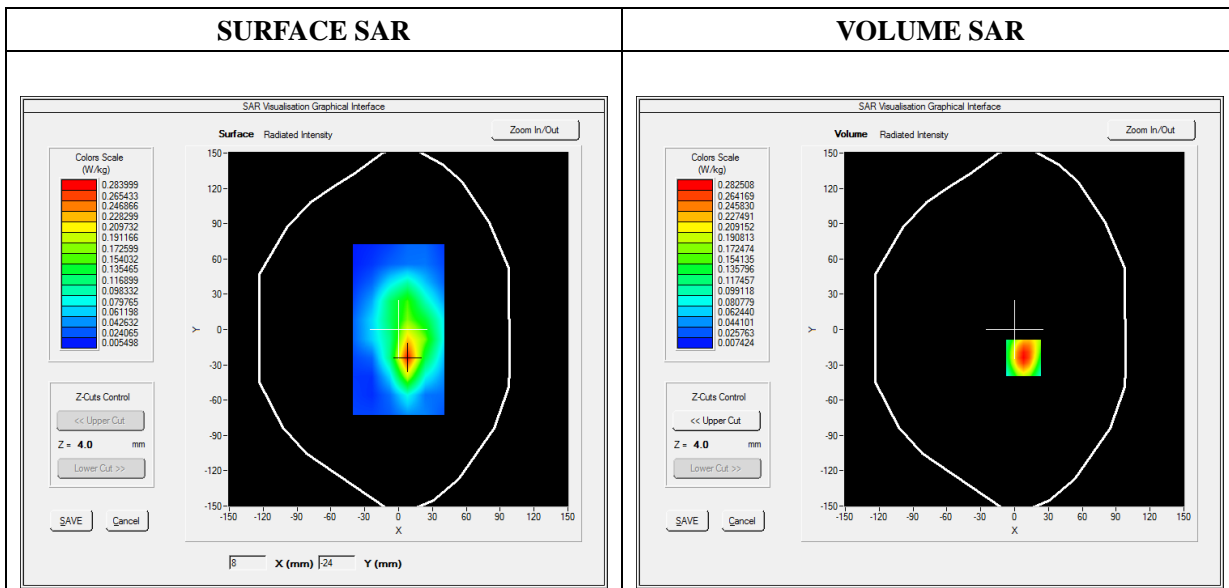

Maximum location: X=8.00, Y=-24.00
SAR Peak: 0.19 W/kg

SAR 10g (W/Kg)	0.038904
SAR 1g (W/Kg)	0.064688

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.4724	0.2825	0.1427	0.0727	0.0401

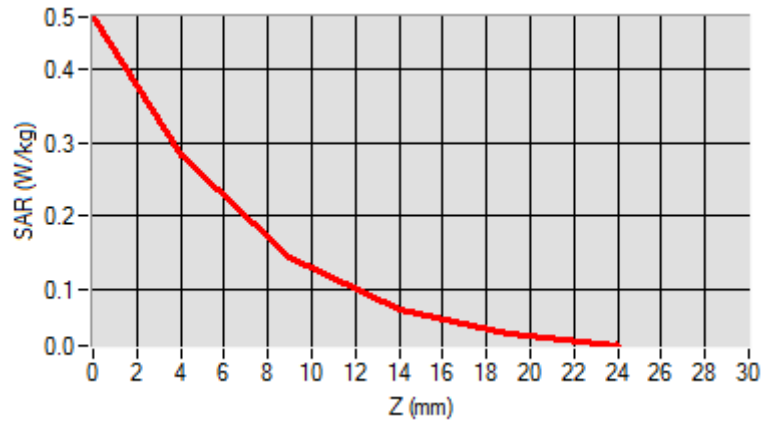

3D screen shot	Hot spot position
<p>A 3D perspective view of a grey device with a blue grid overlay. A color-coded hot spot is visible on the device's surface, showing a gradient from blue (low SAR) to red (high SAR).</p>	<p>A 2D heatmap showing the SAR distribution. The highest intensity (red) is concentrated in the center, with intensity decreasing outwards through yellow, green, and cyan to blue.</p>

MEASUREMENT 6

Type: Phone measurement (Complete)
 Date of measurement: 2022-05-23
 Measurement duration: 12 minutes 3 seconds


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=4mm dy=4mm dz=2mm
Phantom	Flat Plane
Device Position	Top
Band	WiFi(5.2GHz)_802.11n (20MHz)_ANT0
Channels	High
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	5240.000000
Relative Permittivity (real part)	48.532911
Conductivity (S/m)	5.161483
Power Variation (%)	0.542660
Ambient Temperature	21.3
Liquid Temperature	21.3

C. SAR Surface and Volume

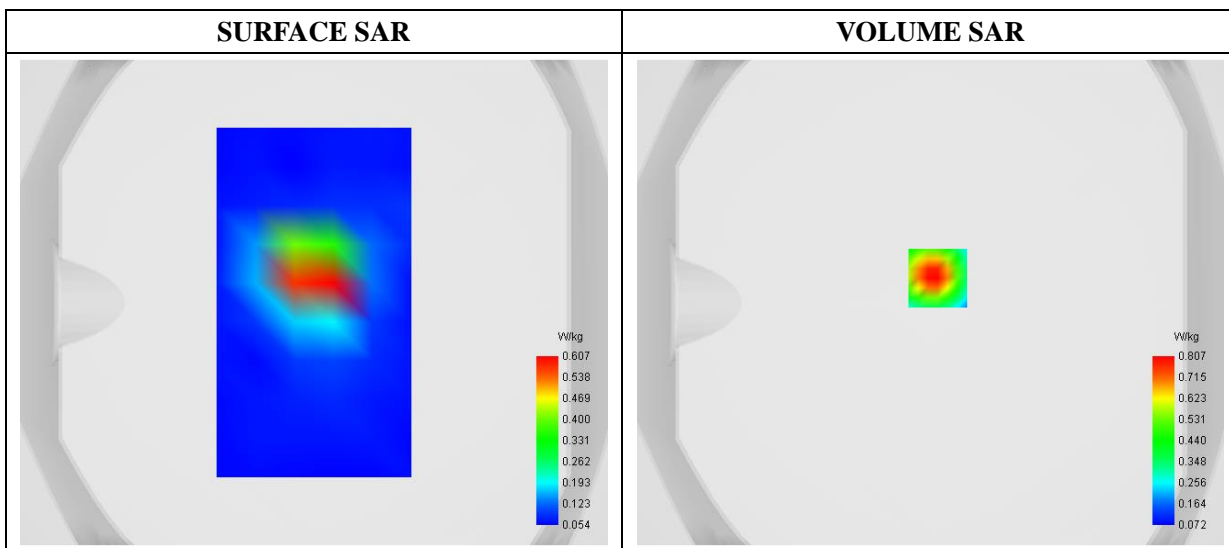


Maximum location: X=3.00, Y=10.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.272684
SAR 1g (W/Kg)	0.554399

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00
SAR (W/Kg)	1.1073	0.8072	0.5891	0.4322	0.3242	0.2498	0.1979	0.1607	0.1328	

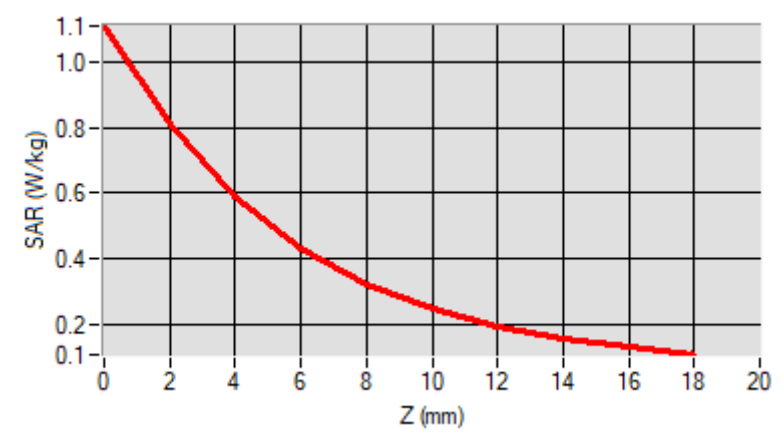

F. 3D Image

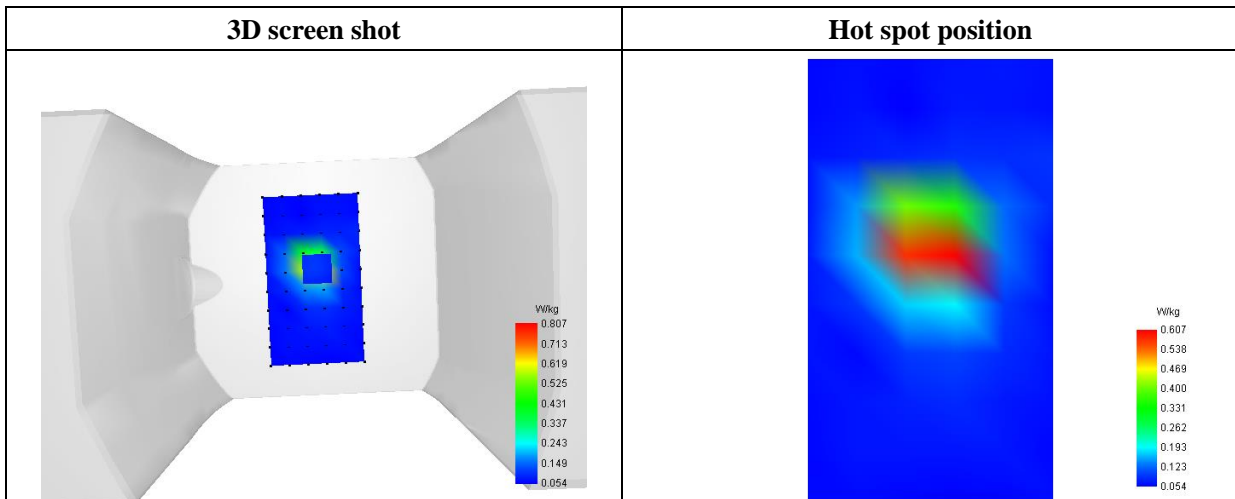

MEASUREMENT 7

Type: Phone measurement (Complete)
 Date of measurement: 2022-05-23
 Measurement duration: 12 minutes 3 seconds


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=4mm dy=4mm dz=2mm
Phantom	Flat Plane
Device Position	Top
Band	WiFi(5.2GHz)_802.11n (20MHz)_ANT1
Channels	High
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	5240.000000
Relative Permittivity (real part)	48.532911
Conductivity (S/m)	5.161483
Power Variation (%)	0.542660
Ambient Temperature	21.3
Liquid Temperature	21.3

C. SAR Surface and Volume

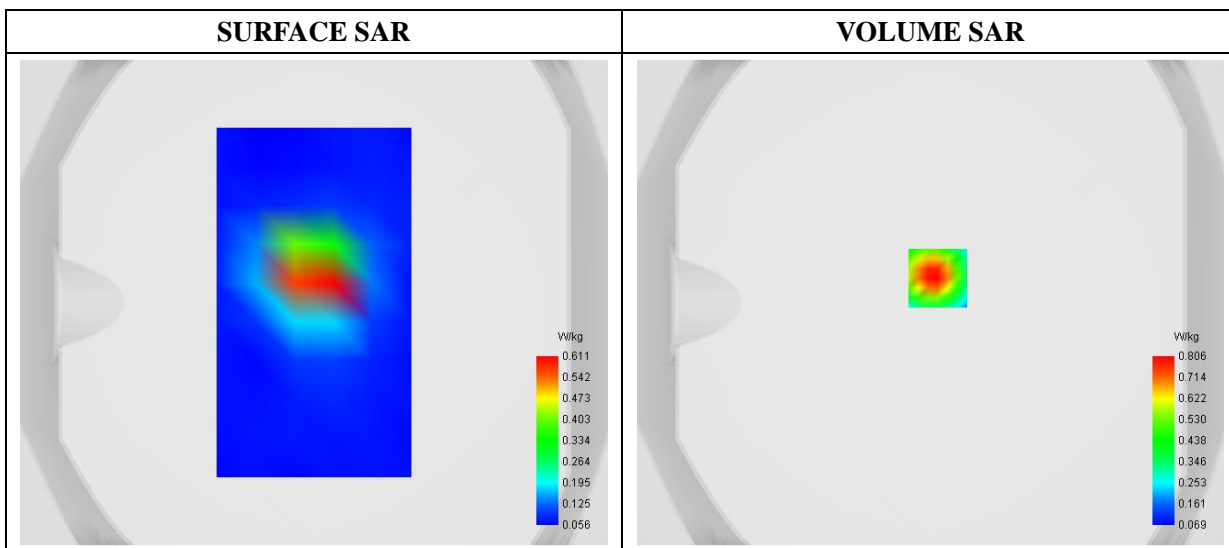


Maximum location: X=3.00, Y=10.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.270971
SAR 1g (W/Kg)	0.513300

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00
SAR (W/Kg)	1.1037	0.8065	0.5898	0.4334	0.3252	0.2502	0.1976	0.1597	0.1310	0.1100

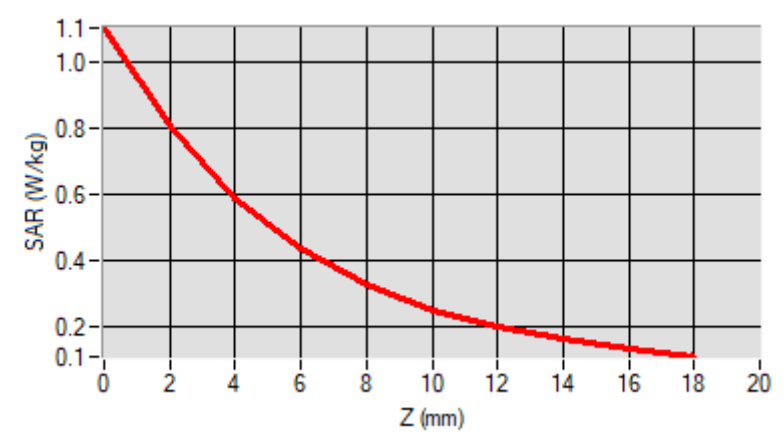

F. 3D Image

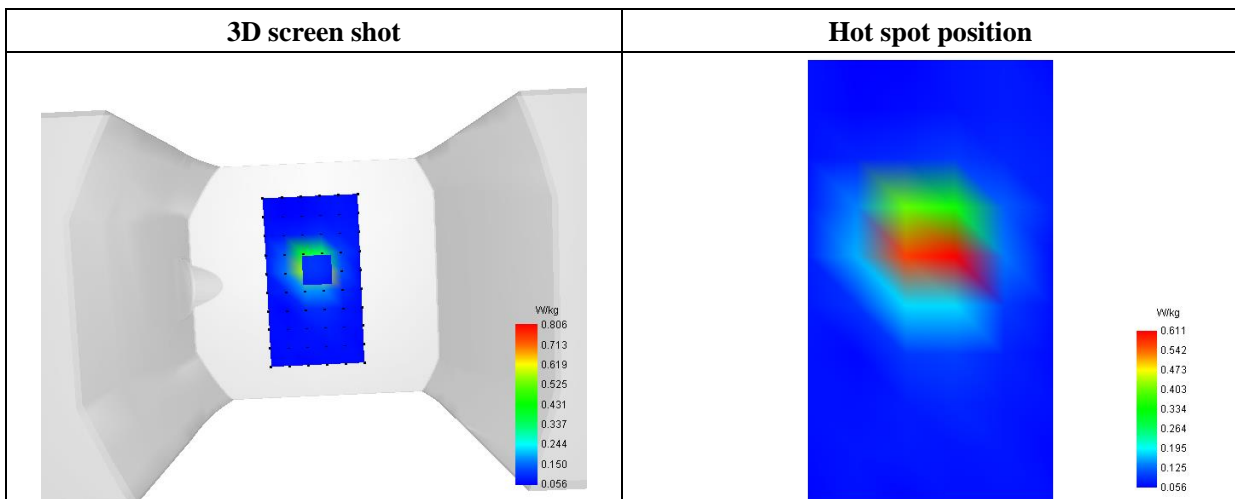

MEASUREMENT 8

Type: Phone measurement (Complete)
 Date of measurement: 2022-05-23
 Measurement duration: 12 minutes 3 seconds


A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Top
Band	WiFi(5.3GHz)_802.11n (20MHz)_ANT0
Channels	High
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	5320.000000
Relative Permittivity (real part)	49.350839
Conductivity (S/m)	5.360192
Power Variation (%)	0.463782
Ambient Temperature	21.3
Liquid Temperature	21.3

C. SAR Surface and Volume

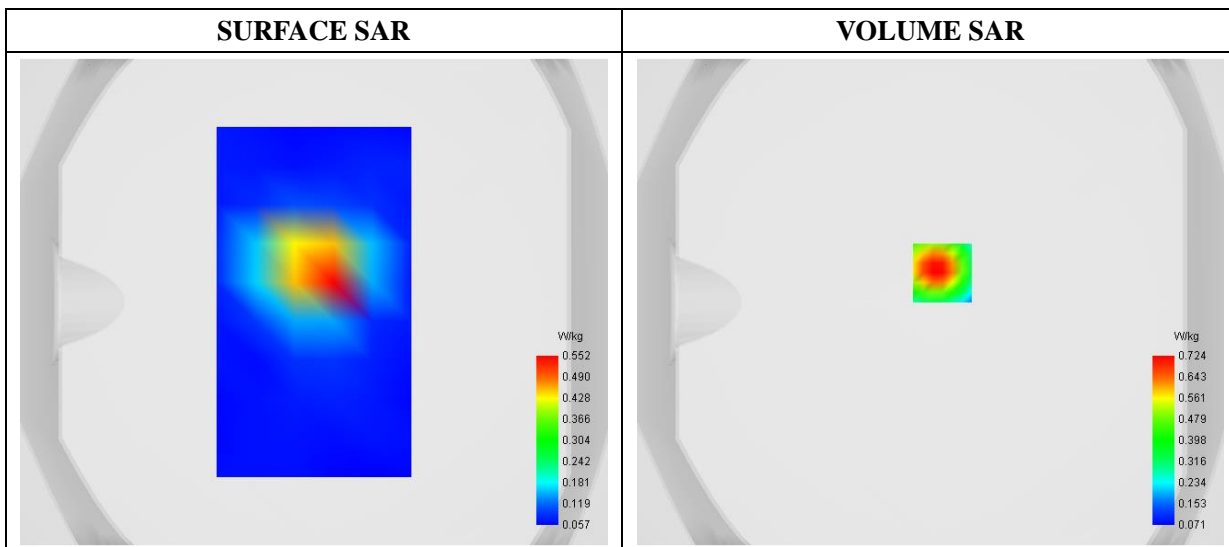


Maximum location: X=5.00, Y=12.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.261540
SAR 1g (W/Kg)	0.507712

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00
SAR (W/Kg)	1.0767	0.7243	0.4675	0.3911	0.2701	0.2305	0.1738	0.1534	0.1230	

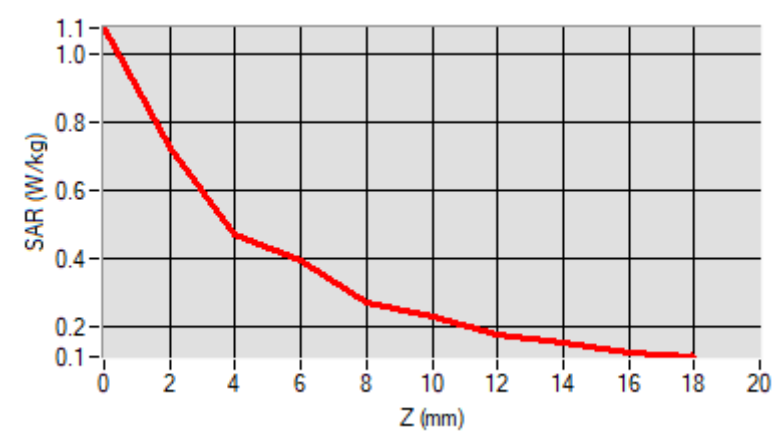

F. 3D Image

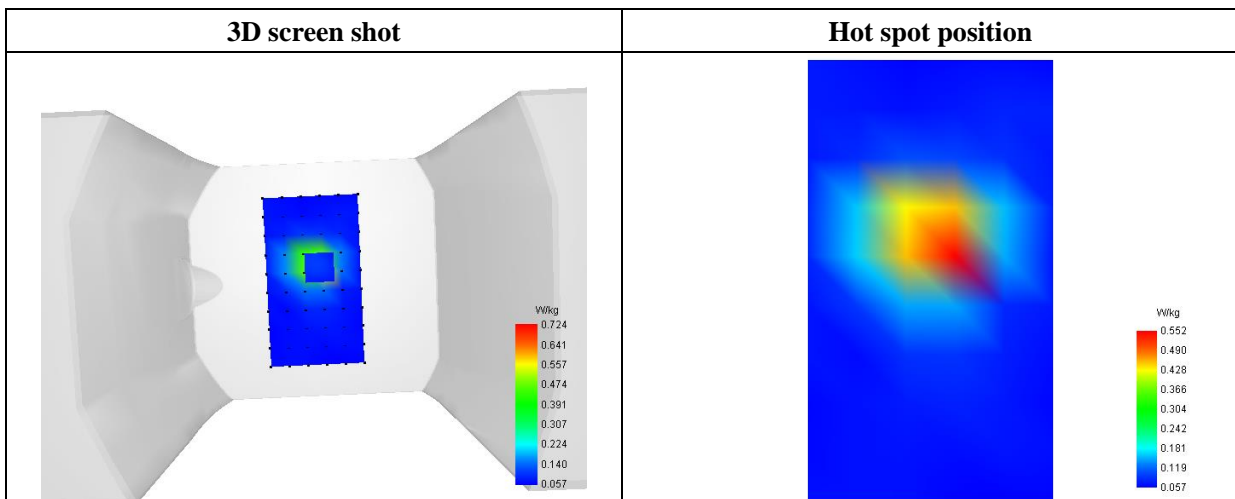

MEASUREMENT 9

Type: Phone measurement (Complete)
 Date of measurement: 2022-05-23
 Measurement duration: 12 minutes 3 seconds


A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Top
Band	WiFi(5.3GHz)_802.11n (20MHz)_ANT1
Channels	High
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	5320.000000
Relative Permittivity (real part)	49.350839
Conductivity (S/m)	5.360192
Power Variation (%)	0.463782
Ambient Temperature	21.3
Liquid Temperature	21.3

C. SAR Surface and Volume

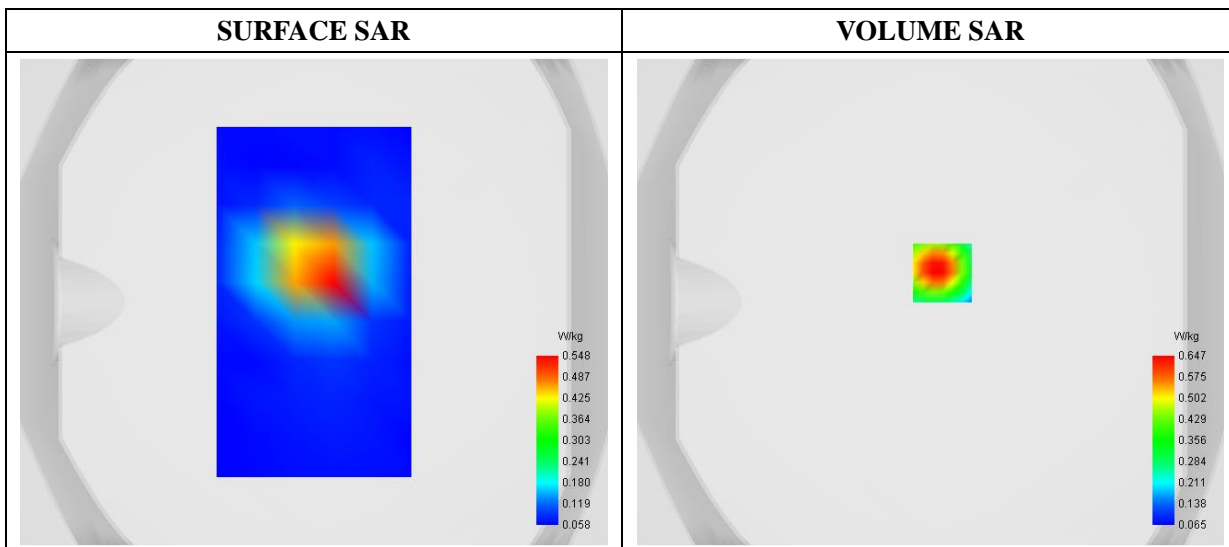


Maximum location: X=5.00, Y=12.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.233791
SAR 1g (W/Kg)	0.449873

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00
SAR (W/Kg)	0.9738	0.6474	0.4133	0.3389	0.2318	0.1989	0.1505	0.1373	0.1122	

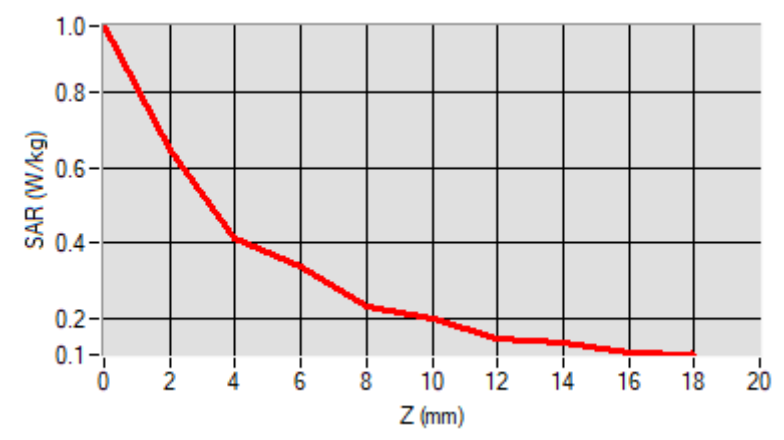

F. 3D Image

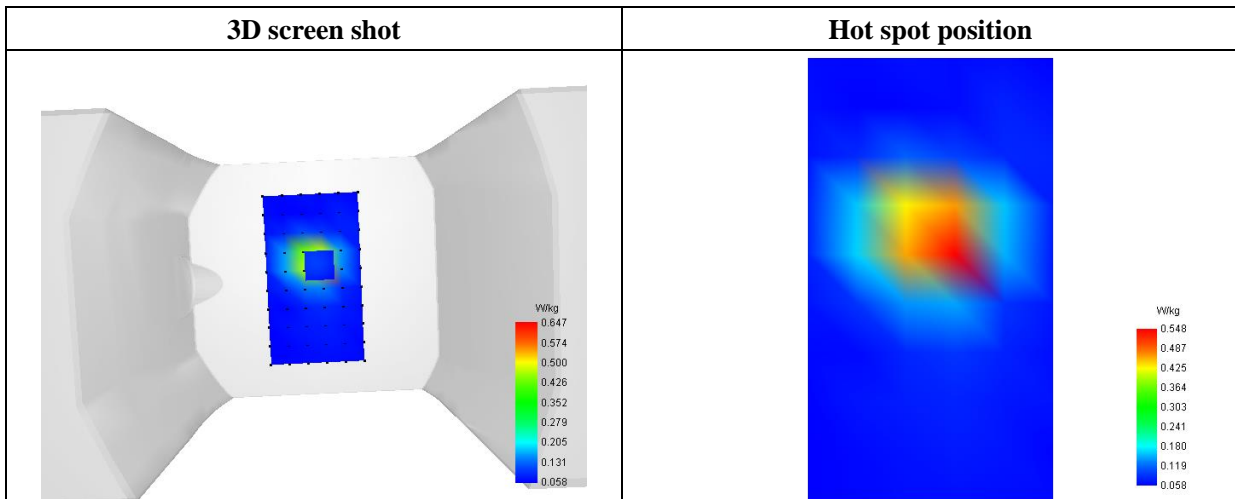

MEASUREMENT 10

Type: Phone measurement (Complete)

Date of measurement: 2022-05-23

Measurement duration: 12 minutes 3 seconds


A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Top
Band	WiFi(5.6GHz)_802.11n (20MHz)_ANT0
Channels	High
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	5700.000000
Relative Permittivity (real part)	48.531254
Conductivity (S/m)	5.580512
Power Variation (%)	0.848732
Ambient Temperature	21.3
Liquid Temperature	21.3

C. SAR Surface and Volume

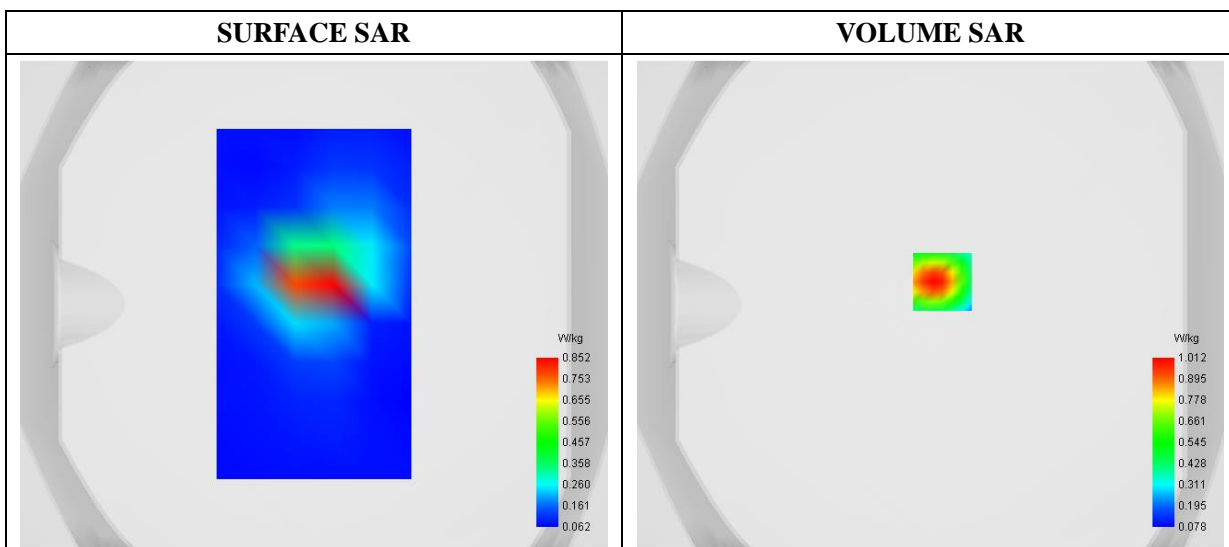


Maximum location: X=5.00, Y=9.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.327969
SAR 1g (W/Kg)	0.683492

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00
SAR (W/Kg)	1.5410	1.0115	0.6227	0.5392	0.3507	0.3082	0.2168	0.1945	0.1455	0.1455

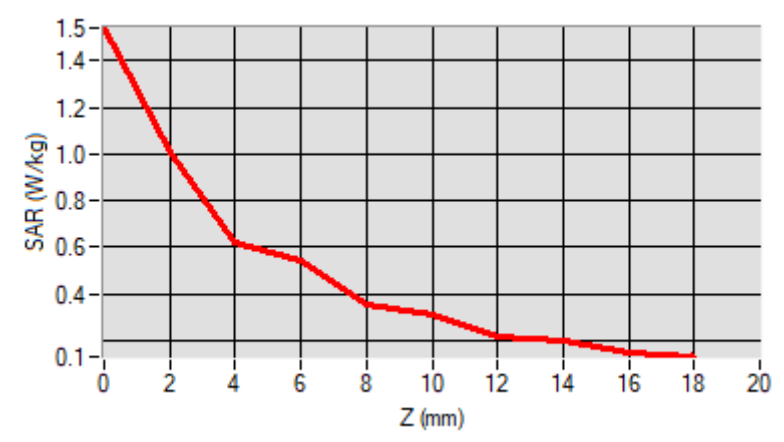

F. 3D Image

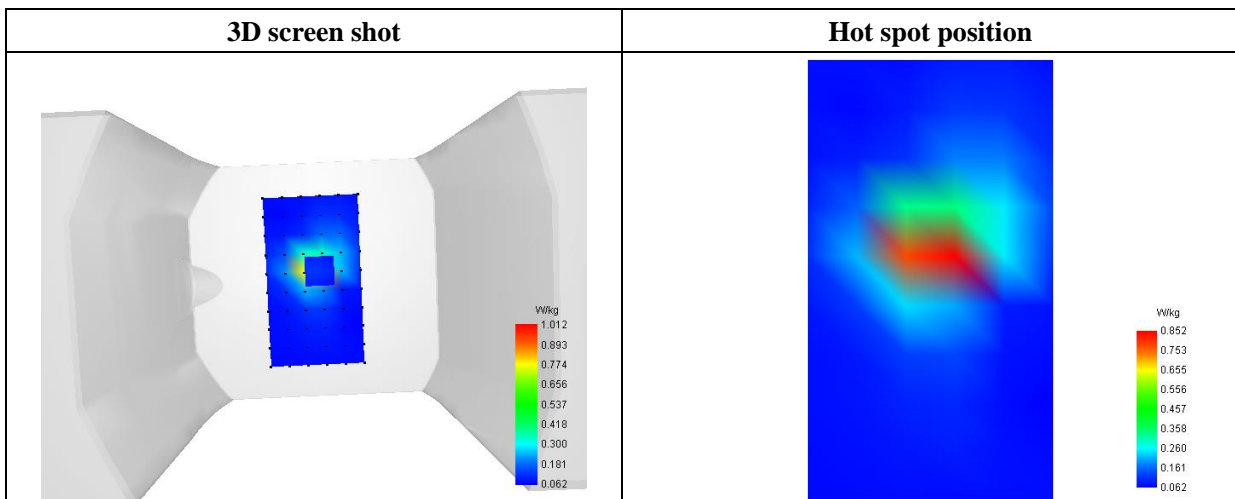

MEASUREMENT 11

Type: Phone measurement (Complete)
 Date of measurement: 2022-05-23
 Measurement duration: 12 minutes 3 seconds


A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Top
Band	WiFi(5.6GHz)_802.11n (20MHz)_ANT1
Channels	High
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	5720.000000
Relative Permittivity (real part)	48.672448
Conductivity (S/m)	5.562127
Power Variation (%)	0.848732
Ambient Temperature	21.3
Liquid Temperature	21.3

C. SAR Surface and Volume

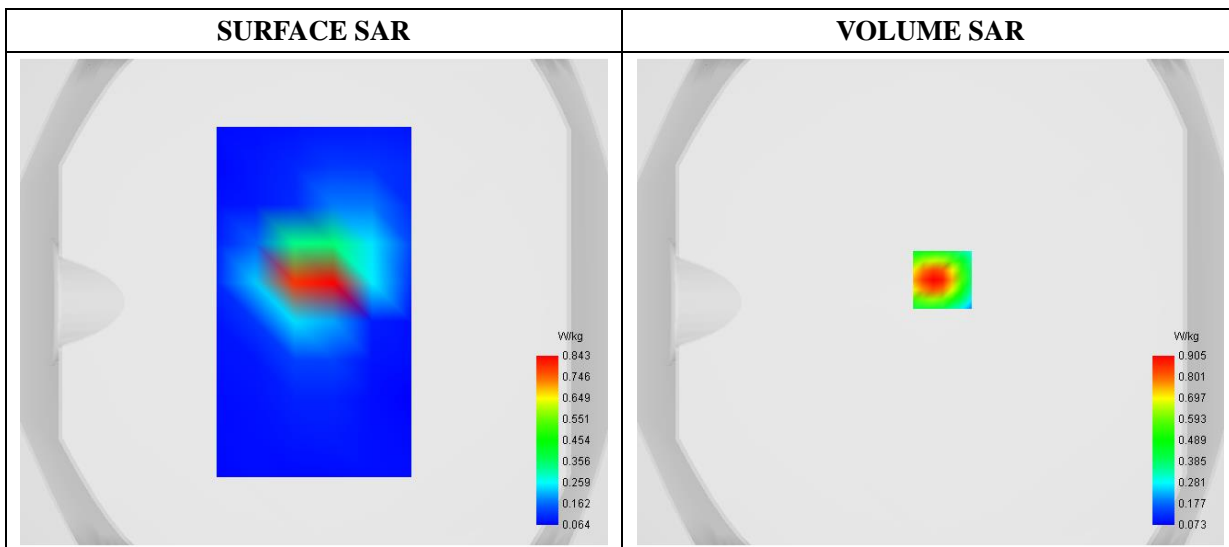


Maximum location: X=5.00, Y=9.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.292777
SAR 1g (W/Kg)	0.608621

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00
SAR (W/Kg)	1.3874	0.9050	0.5539	0.4740	0.3093	0.2691	0.1920	0.1721	0.1312	0.1312

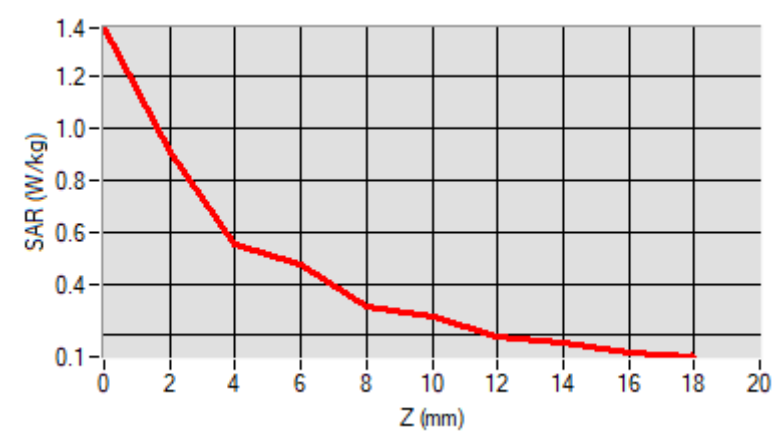

F. 3D Image

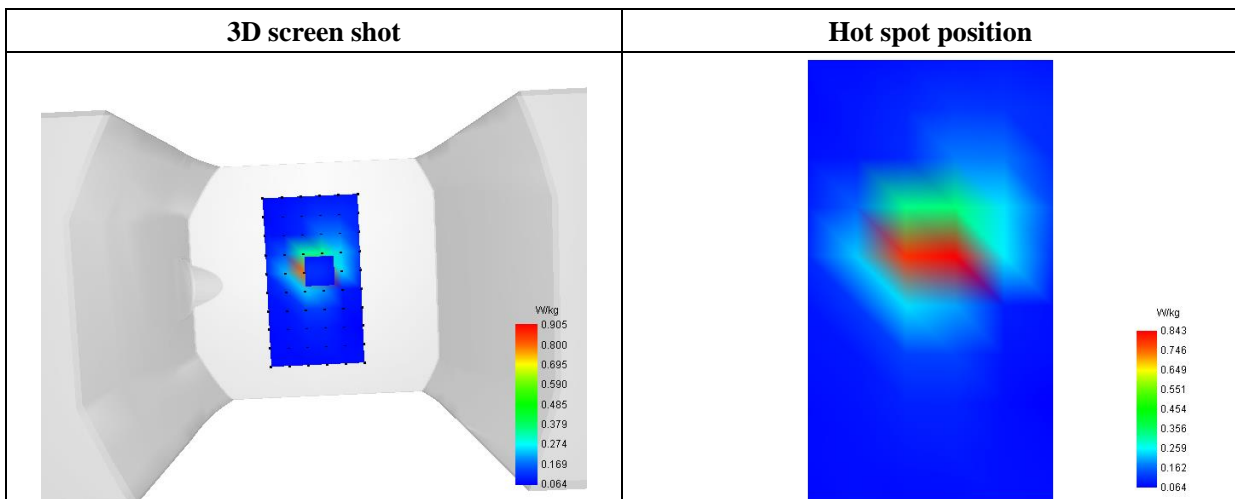

MEASUREMENT 12

Type: Phone measurement (Complete)
 Date of measurement: 2022-05-23
 Measurement duration: 12 minutes 3 seconds


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=4mm dy=4mm dz=2mm
Phantom	Flat Plane
Device Position	Top
Band	WiFi(5.8GHz)_802.11a_ANT0
Channels	Middle
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	5785.000000
Relative Permittivity (real part)	48.560839
Conductivity (S/m)	5.771254
Power Variation (%)	5.210512
Ambient Temperature	21.3
Liquid Temperature	21.3

C. SAR Surface and Volume

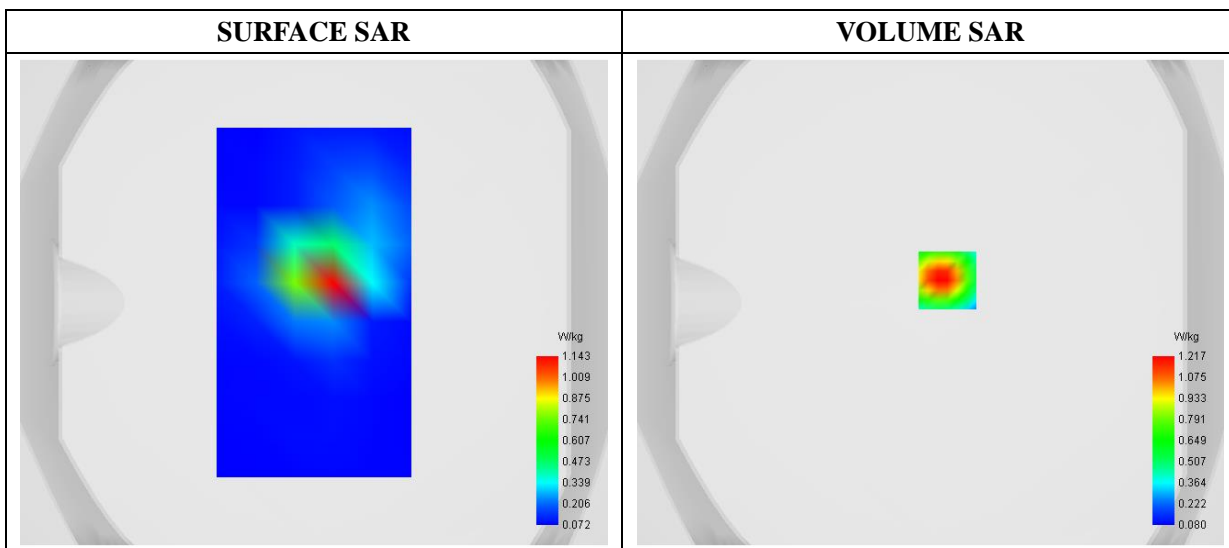


Maximum location: X=7.00, Y=9.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.387603
SAR 1g (W/Kg)	0.622599

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00
SAR (W/Kg)	1.8410	1.2173	0.7623	0.6364	0.4171	0.3551	0.2489	0.2184	0.1602	

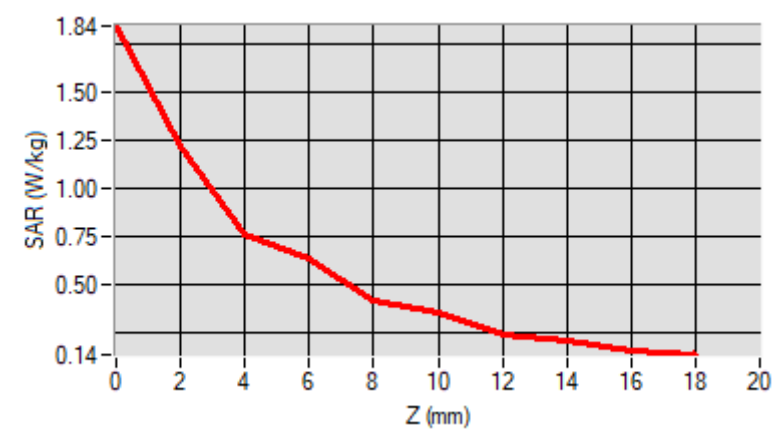

F. 3D Image

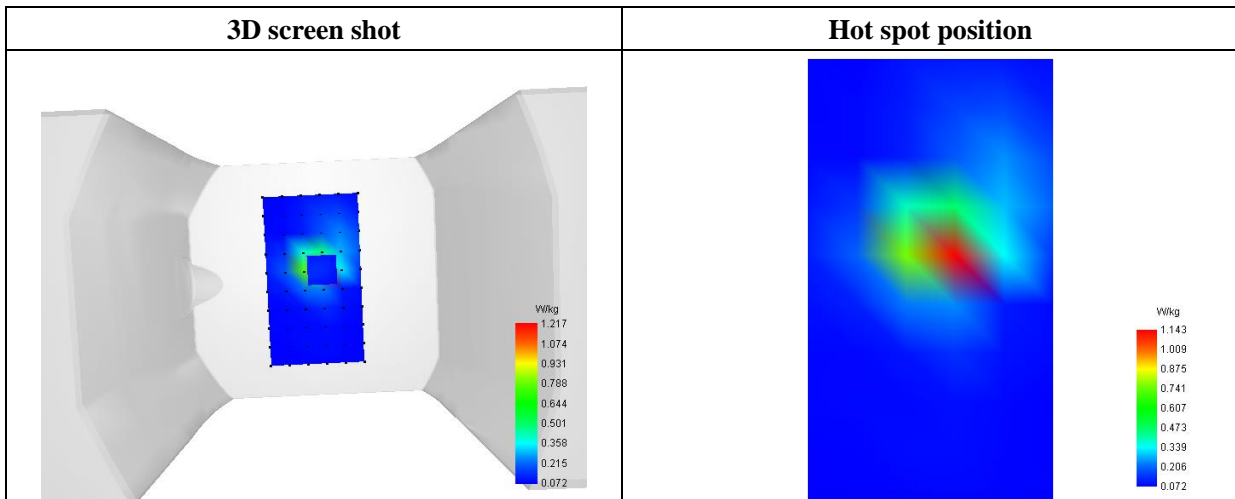

MEASUREMENT 13

Type: Phone measurement (Complete)
 Date of measurement: 2022-05-23
 Measurement duration: 12 minutes 3 seconds


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=4mm dy=4mm dz=2mm
Phantom	Flat Plane
Device Position	Top
Band	WiFi(5.8GHz)_802.11n (HT20)_ANT1
Channels	High
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	5825.000000
Relative Permittivity (real part)	48.580839
Conductivity (S/m)	5.761254
Power Variation (%)	5.210512
Ambient Temperature	21.3
Liquid Temperature	21.3

C. SAR Surface and Volume

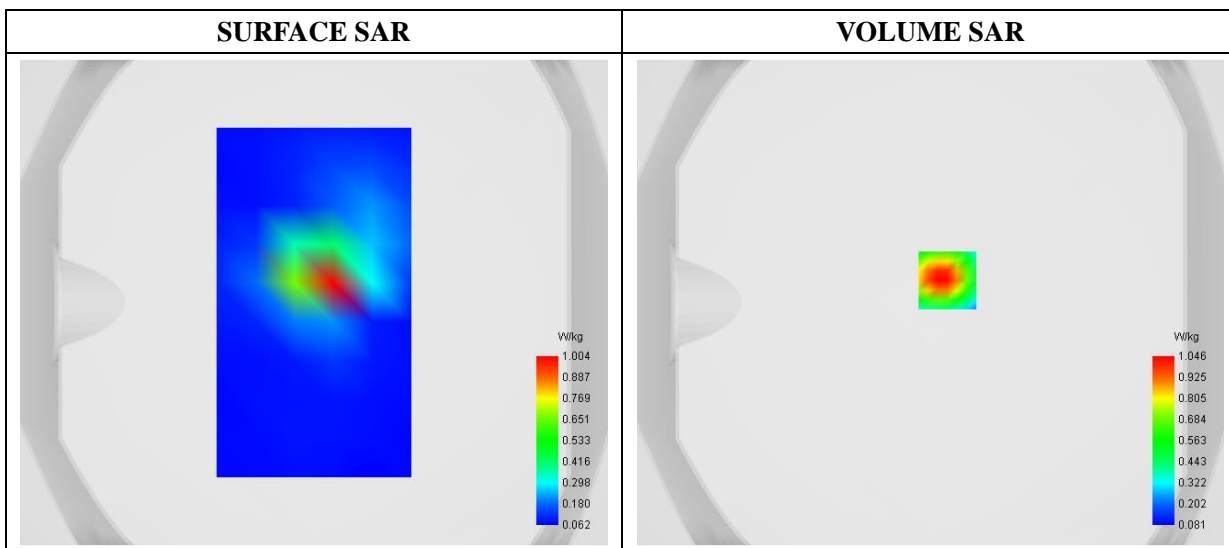


Maximum location: X=7.00, Y=9.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.344082
SAR 1g (W/Kg)	0.613890

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00
SAR (W/Kg)	1.5594	1.0457	0.6685	0.5621	0.3776	0.3230	0.2324	0.2037	0.1538	

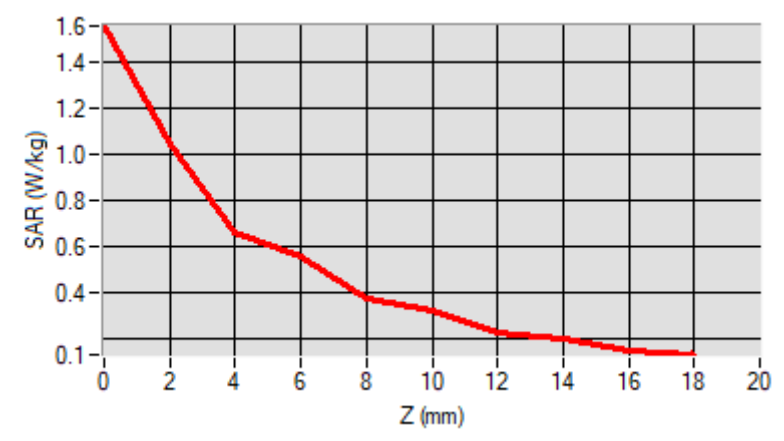

F. 3D Image

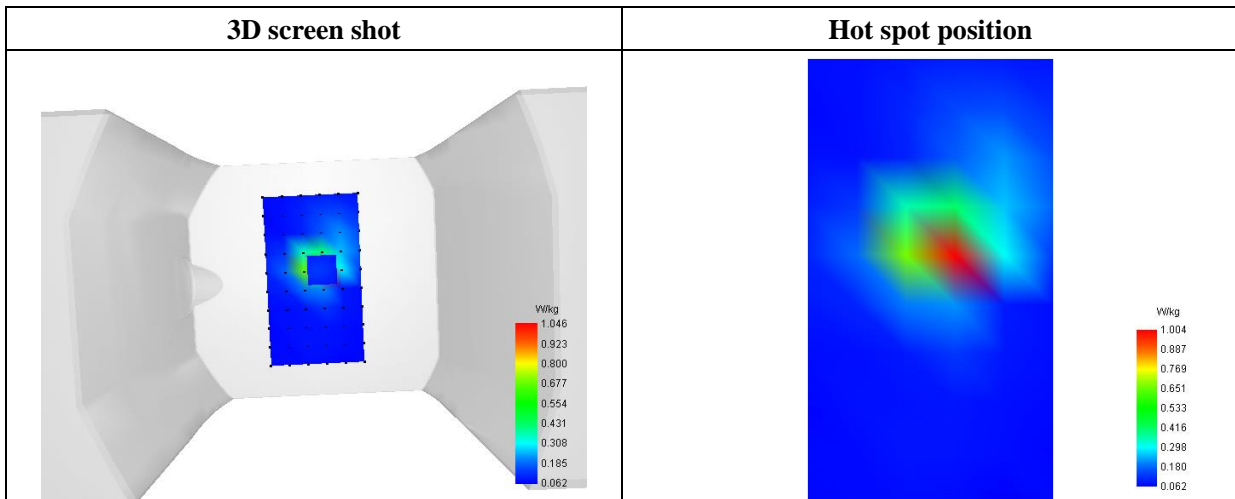

Reference No.: WTX22X05096528W

Annex E. Calibration Certificate

Please refer to the exhibit for the calibration certificate

******* END OF REPORT *******