



Test Report

Date : 2019-02-28
No. : HMD19010009

Page 1 of 106

- Applicant** : Ankang Comate Tech Co., Ltd.
North end of Gaoxin No.7 Road of The High-Tech Industrial Zone,
Ankang City, Shaanxi Province, China
- Supplier / Manufacturer** : Ankang Comate Tech Co., Ltd.
North end of Gaoxin No.7 Road of The High-Tech Industrial Zone,
Ankang City, Shaanxi Province, China
- Description of Sample(s)** : Submitted sample(s) said to be
Product: Blackweb 1000-Watt 2.1 Bluetooth® Entertainment
System
Brand Name: Blackweb
Model No.: SS-0302
FCC ID: 2ASKIBWD19AAA07
- Date Samples Received** : 2019-01-10
- Date Tested** : 2019-01-14 to 2019-02-28
- Investigation Requested** : Perform Electro Magnetic Interference measurement in accordance
with FCC 47CFR [Codes of Federal Regulations] Part 15: 2017 and
ANSI C63.10:2013 for FCC Certification.
- Conclusions** : The submitted product COMPLIED with the requirements of Federal
Communications Commission [FCC] Rules and Regulations Part 15.
The tests were performed in accordance with the standards described
above and on Section 2.2 in this Test Report.
- Remarks** : Bluetooth FHSS (GFSK / $\pi/4$ -DQPSK / 8DPSK)
For additional model(s) details, please see page 3


CHEUNG Chi, Kenneth
Authorized Signatory



The Hong Kong Standards and Testing Centre Limited
10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.
For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



Test Report

Date : 2019-02-28
No. : HMD19010009

Page 2 of 106

CONTENT:

Cover	Page 1 of 106
Content	Page 2 of 106
<u>1.0</u> <u>General Details</u>	
1.1 Test Laboratory	Page 3 of 106
1.2 Equipment Under Test [EUT] Description of EUT operation	Page 3 of 106
1.3 Date of Order	Page 3 of 106
1.4 Submitted Sample(s)	Page 3 of 106
1.5 Test Duration	Page 3 of 106
1.6 Country of Origin	Page 3 of 106
1.7 RF Module Details	Page 4 of 106
1.8 Antenna Details	Page 4 of 106
<u>2.0</u> <u>Technical Details</u>	
2.1 Investigations Requested	Page 5 of 106
2.2 Test Standards and Results Summary	Page 5 of 106
2.3 Table for Test Modes	Page 6 of 106
<u>3.0</u> <u>Test Results</u>	
3.1 Emission	Page 7-100 of 106
<u>Appendix A</u> List of Measurement Equipment	Page 101 of 106
<u>Appendix B</u> Photograph(s) of Product	Page 102-106 of 106



Test Report

Date : 2019-02-28
No. : HMD19010009

Page 3 of 106

1.0 General Details

1.1 Test Laboratory

The Hong Kong Standards and Testing Centre Ltd.
EMC Laboratory
10 Dai Wang Street, Taipo Industrial Estate, New Territories, Hong Kong
Telephone: 852 2666 1888
Fax: 852 2664 4353

1.2 Equipment Under Test [EUT]

Description of Sample(s)

Product:	Blackweb 1000-Watt 2.1 Bluetooth® Entertainment System
Manufacturer:	Ankang Comate Tech Co., Ltd. North end of Gaoxin No.7 Road of The High-Tech Industrial Zone, Ankang City, Shaanxi Province, China
Brand Name:	Blackweb
Model Number:	SS-0302
Additional Model Number:	BWD19AAA07
Rating:	120V a.c. 60Hz

1.2.1 Description of EUT Operation

The Equipment Under Test (EUT) is a Blackweb 1000-Watt 2.1 Bluetooth® Entertainment System. The transmission signal is digital modulated with channel frequency range 2402-2480MHz. The R.F. signal was modulated by IC; the type of modulation used was frequency hopping spread spectrum Modulation.

1.3 Date of Order

2019-01-10

1.4 Submitted Sample(s):

1 Sample

1.5 Test Duration

2019-01-14 to 2019-02-28

1.6 Country of Origin

China



Test Report

Date : 2019-02-28
No. : HMD19010009

Page 4 of 106

1.7 RF Module Details

Module Model Number: BK3266
Module FCC ID: N/A
Module Transmission Type: Bluetooth V5.0
Modulation: FHSS (GFSK / $\pi/4$ -DQPSK / 8DPSK)
Data Rates:
1MBps: GFSK
2 MBps: $\pi/4$ -DQPSK
3 MBps: 8DPSK
Frequency Range: 2400-2483.5MHz
Carrier Frequencies: 2402MHz – 2480MHz

Module Specification (specification provided by manufacturer)

1.8 Antenna Details

Antenna Type: PCB antenna
Antenna Gain: 0dBi

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



Test Report

Date : 2019-02-28
No. : HMD19010009

Page 5 of 106

2.0 Technical Details

2.1 Investigations Requested

Perform Electromagnetic Interference measurements in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2017 Regulations and ANSI C63.10:2013 for FCC Certification. According FCC KDB 558074 DTS Measurement Guidance, Duty cycle \cong 98%. The device was realized by test software.

2.2 Test Standards and Results Summary Tables

EMISSION Results Summary						
Test Condition	Test Requirement	Test Method	Class / Severity	Test Result		
				Pass	Failed	N/A
Maximum Peak Conducted Output Power	FCC 47CFR 15.247(b)(1)	ANSI C63.10: 2013	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Radiated Spurious Emissions	FCC 47CFR 15.209	ANSI C63.10: 2013	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
AC Mains Conducted Emissions	FCC 47CFR 15.207	ANSI C63.10: 2013	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Number of Hopping Frequency	FCC 47CFR 15.247 (b)(1)	ANSI C63.10: 2013	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
20dB Bandwidth	FCC 47CFR 15.247(a)(2)	ANSI C63.10: 2013	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Hopping Channel Separation	FCC 47CFR 15.247(a)(1)	ANSI C63.10: 2013	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Band-edge measurement (Radiated)	FCC 47CFR 15.247(d)	ANSI C63.10: 2013	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Pseudorandom Hopping Algorithm	FCC 47CFR 15.247(a)(1)	N/A	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Time of Occupancy (Dwell Time)	FCC 47CFR 15.247(a)(1)(iii)	ANSI C63.10: 2013	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Antenna requirement	FCC 47CFR 15.203	N/A	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Note: N/A - Not Applicable

The Hong Kong Standards and Testing Centre Limited
10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



Test Report

Date : 2019-02-28
No. : HMD19010009

Page 6 of 106

2.3 Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate in the table below is the worst case rate with respect to the specific test item.

Investigation has been done on all the possible configurations for searching the worst cases.

The device was realized by test software.

The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate
Maximum Peak Conducted Output Power	GFSK / $\pi/4$ -DQPSK / 8DPSK	1MBps / 2MBps / 3MBps
Hopping Channel Separation	GFSK / $\pi/4$ -DQPSK / 8DPSK	1MBps / 2MBps / 3MBps
Number of Hopping Frequency	GFSK / $\pi/4$ -DQPSK / 8DPSK	1MBps / 2MBp / 3MBps
Time of Occupancy(Dwell Time)	8DPSK (DH1 / DH3 / DH5)	3MBps
Radiated Spurious Emissions	GFSK / $\pi/4$ -DQPSK / 8DPSK	1MBps / 2MBps / 3MBps
Band-edge compliance of Conducted Emission	GFSK / $\pi/4$ -DQPSK / 8DPSK	1MBps / 2MBps / 3MBps

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.

Test Report

Date : 2019-02-28
No. : HMD19010009

Page 7 of 106

3.0 Test Results

3.1 Emission

3.1.1 Maximum Peak Conducted Output Power

Test Requirement:	FCC 47CFR 15.247(b) (1)
Test Method:	ANSI C63.10: 2013
Test Date:	2019-01-21
Mode of Operation:	Tx mode

Ambient Temperature: 25°C Relative Humidity: 51% Atmospheric Pressure: 101 kPa


Test Method:

A temporary antenna connector was soldered to the RF output. The RF output of the EUT was connected to the spectrum analyzer. All the attenuation or cable loss will be added to the measured maximum output power. The results are recorded in Watt.

Spectrum Analyzer Setting:

RBW = 3 MHz, VBW= 3MHz, Sweep = Auto, Span: Approximately five times the 20 dB bandwidth
Detector = Peak, Trace = Max. hold

Test Setup:

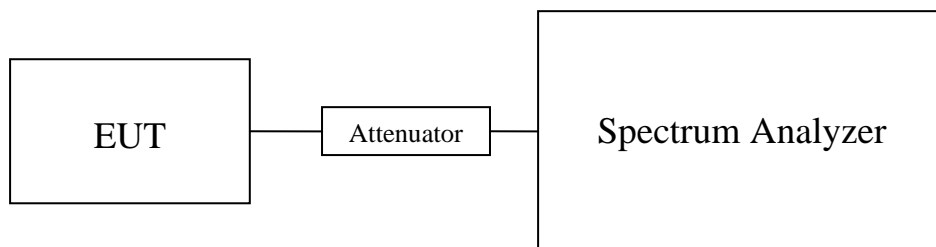

Note: a temporary antenna connector was soldered to the RF output.



Test Report

Date : 2019-02-28
No. : HMD19010009

Page 8 of 106

Limits for Maximum Peak Conducted Output Power [FCC 47CFR 15.247]:

The maximum peak output power shall not exceeded the following limits:
For frequency hopping systems employing at least 75 hopping channels: 1 Watt
For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 Watts
For Digital Transmission systems in 2400-2483.5 MHz Band: 1 Watt

Results of Bluetooth Communication mode (GFSK) (Fundamental Power): Pass

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2402	0.000643

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2441	0.000634

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2480	0.000614

Results of Bluetooth Communication mode ($\pi/4$ -DQPSK) (Fundamental Power): Pass

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2402	0.000761

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2441	0.000791

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2480	0.000826

Results of Bluetooth Communication mode (8DPSK) (Fundamental Power): Pass

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2402	0.000778

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2441	0.000809

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2480	0.000864

Calculated measurement uncertainty : 30MHz to 1GHz 1.7dB
1GHz to 18GHz 1.7dB

Remark:

1. All test data for each data rate were verified, but only the worst case was reported.
2. The EUT is programmed to transmit signals continuously for all testing.

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.




Test Report

Date : 2019-02-28
 No. : HMD19010009

Page 9 of 106

Test plot of Maximum Peak Conducted Output Power :

Bluetooth Communication mode (GFSK, 2402MHz)

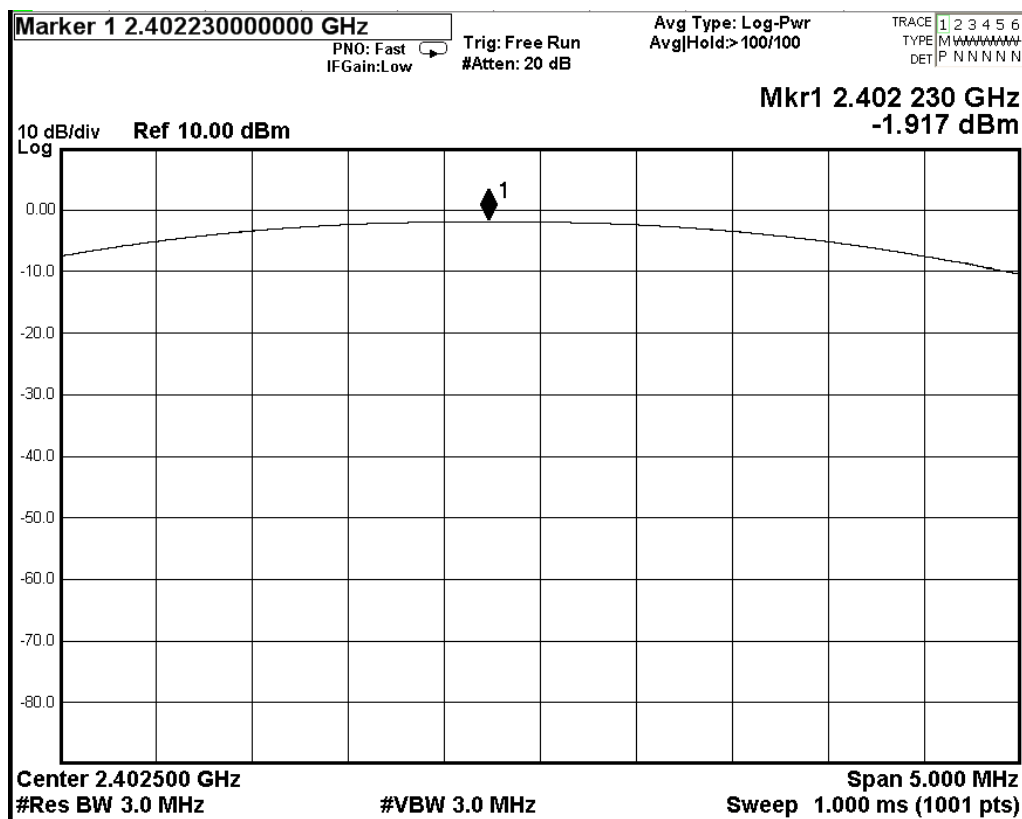

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.




Test Report

Date : 2019-02-28
No. : HMD19010009

Page 10 of 106

Bluetooth Communication mode (GFSK, 2441MHz)

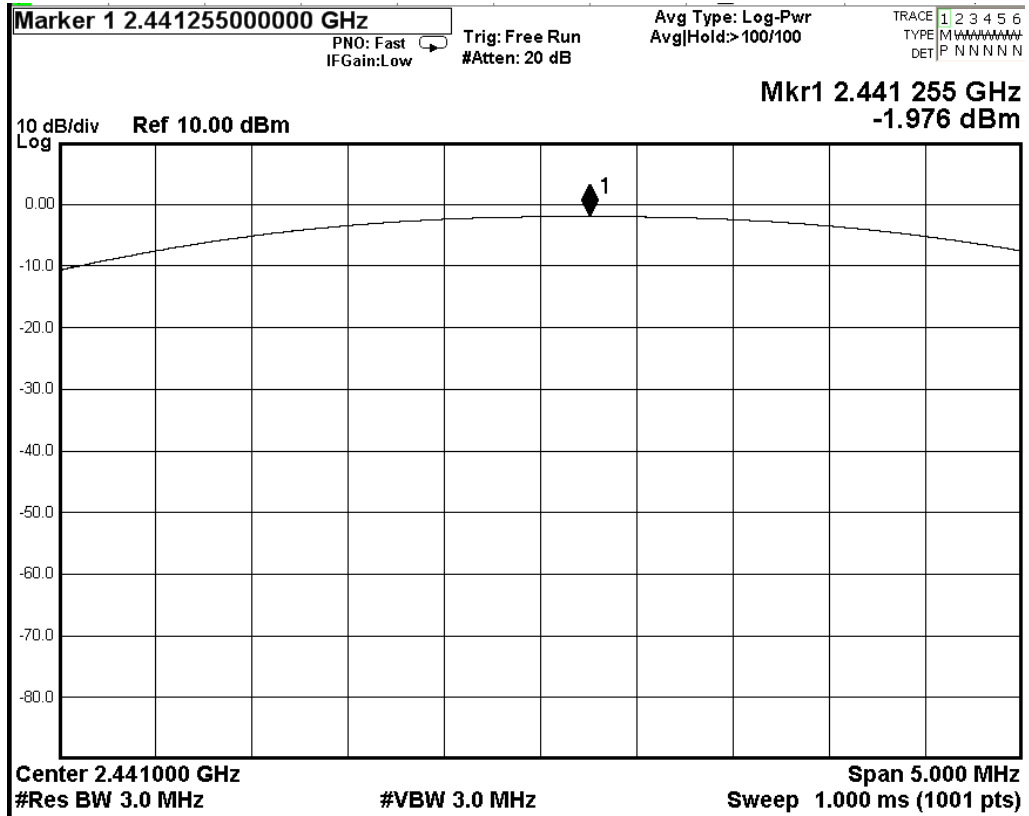

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.




Test Report

Date : 2019-02-28
No. : HMD19010009

Page 11 of 106

Bluetooth Communication mode (GFSK, 2480MHz)

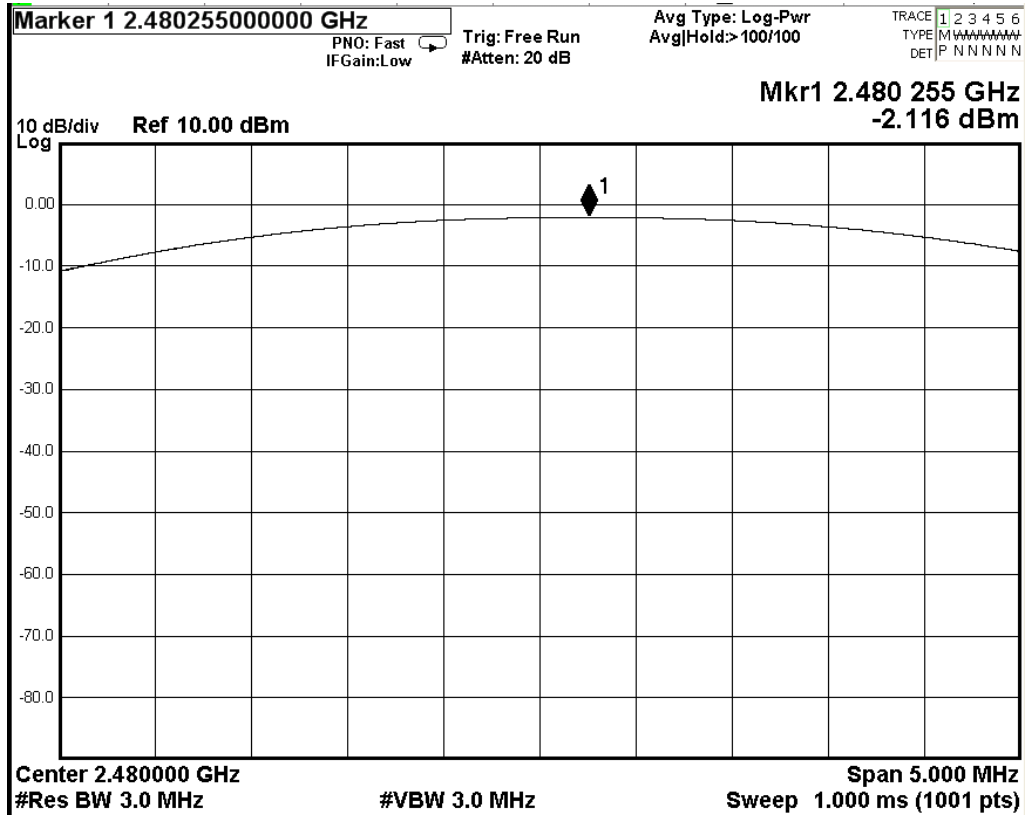




Test Report

Date : 2019-02-28
No. : HMD19010009

Page 12 of 106

Bluetooth Communication mode ($\pi/4$ DQPSK, 2402MHz)

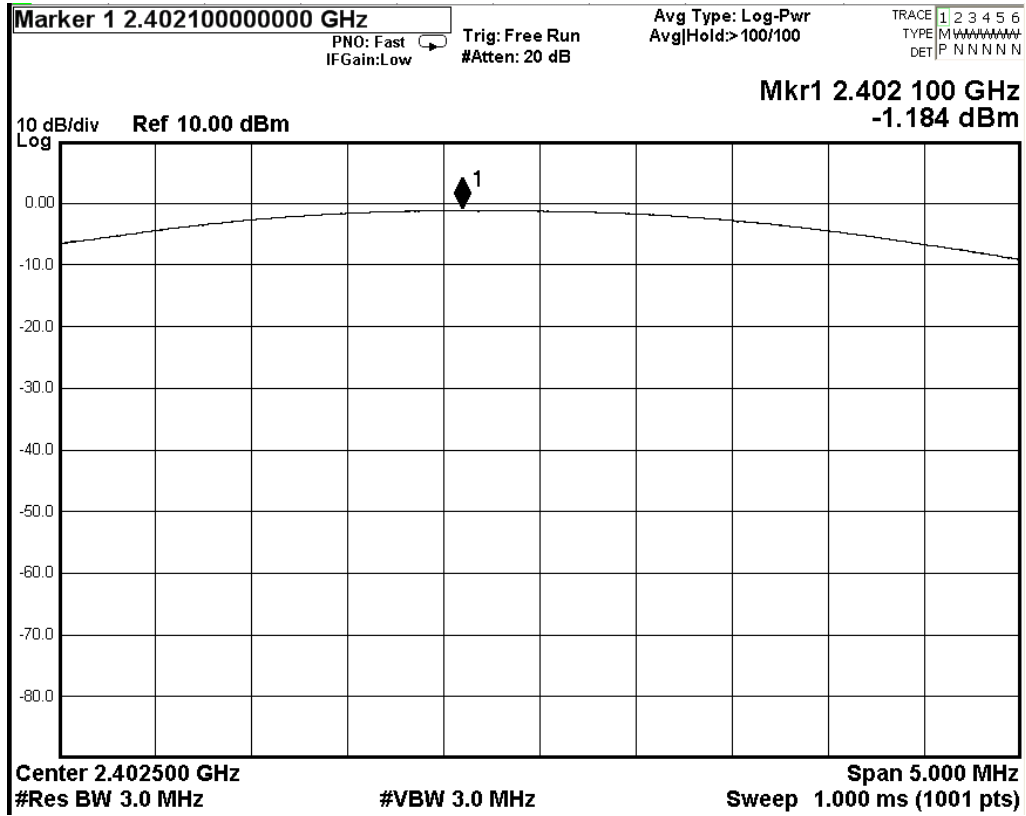




Test Report

Date : 2019-02-28
No. : HMD19010009

Page 13 of 106

Bluetooth Communication mode ($\pi/4$ DQPSK, 2441MHz)

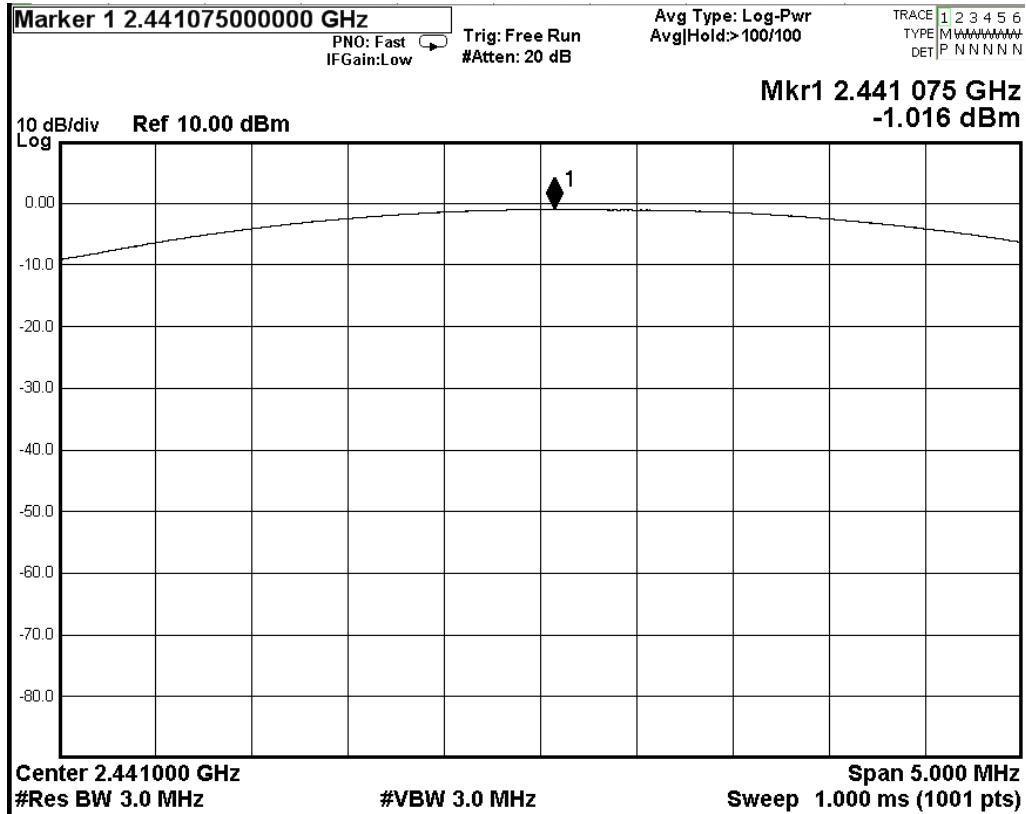




Test Report

Date : 2019-02-28
No. : HMD19010009

Page 14 of 106

Bluetooth Communication mode ($\pi/4$ DQPSK, 2480MHz)

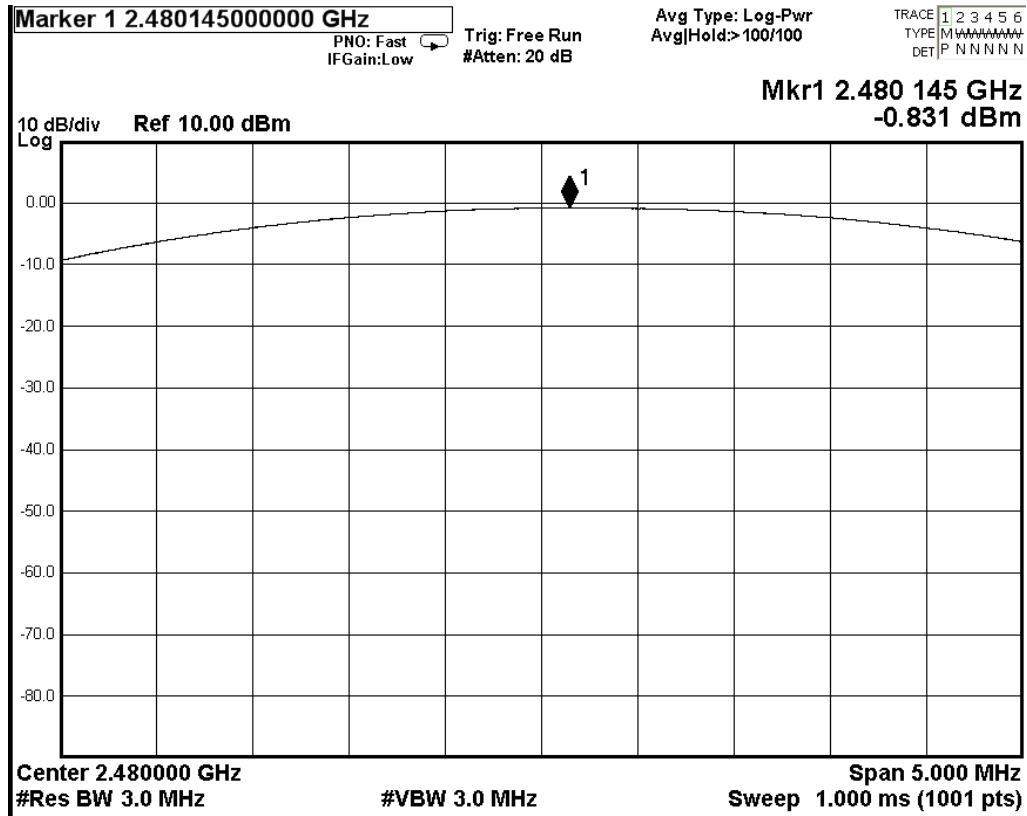




Test Report

Date : 2019-02-28
No. : HMD19010009

Page 15 of 106

Bluetooth Communication mode (8DPSK, 2402MHz)

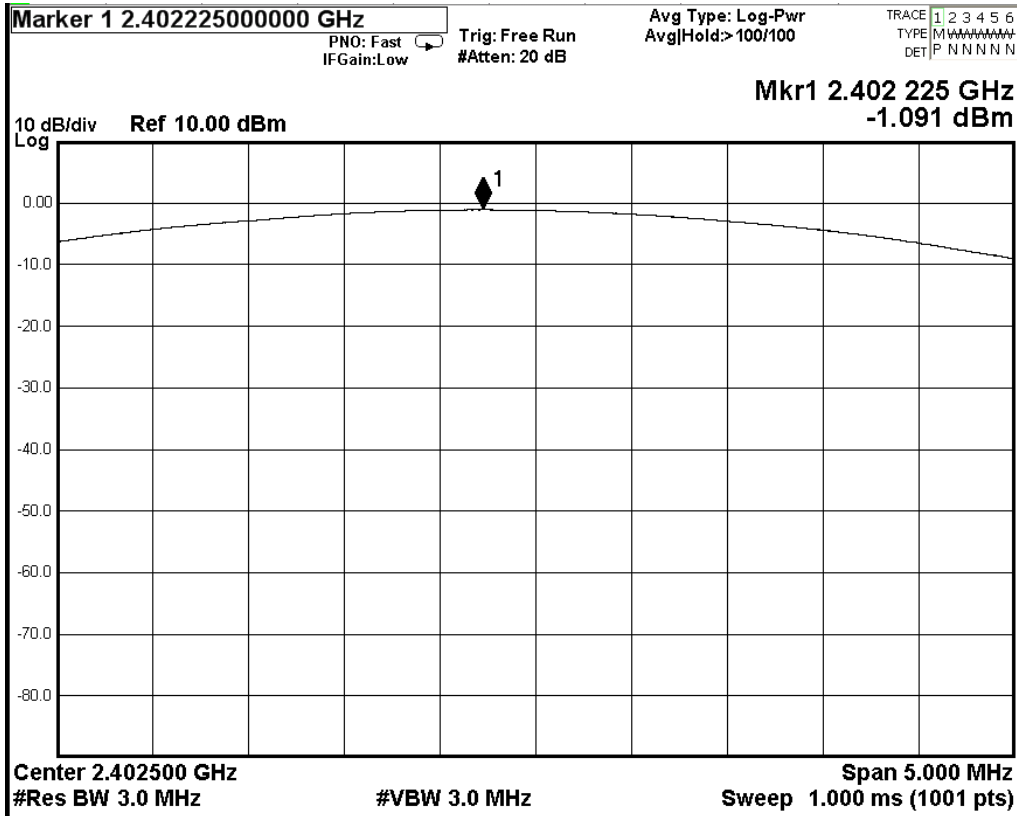




Test Report

Date : 2019-02-28
No. : HMD19010009

Page 16 of 106

Bluetooth Communication mode (8DPSK, 2441MHz)

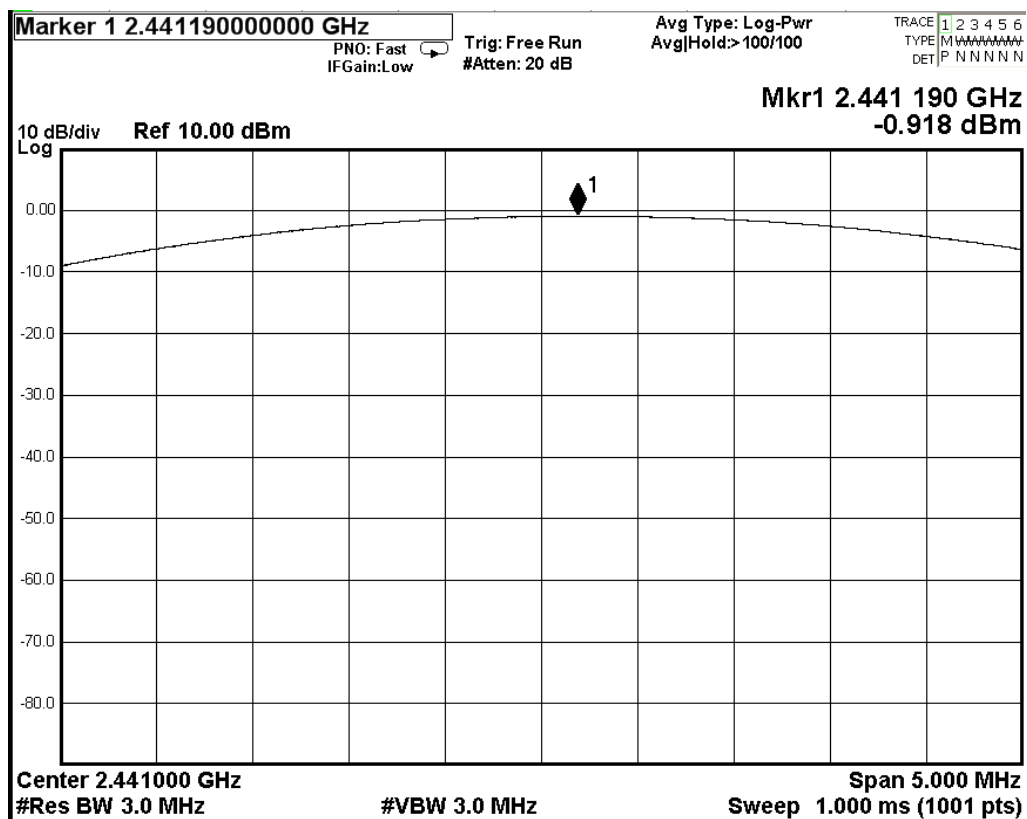

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.




Test Report

Date : 2019-02-28
No. : HMD19010009

Page 17 of 106

Bluetooth Communication mode (8DPSK, 2480MHz)

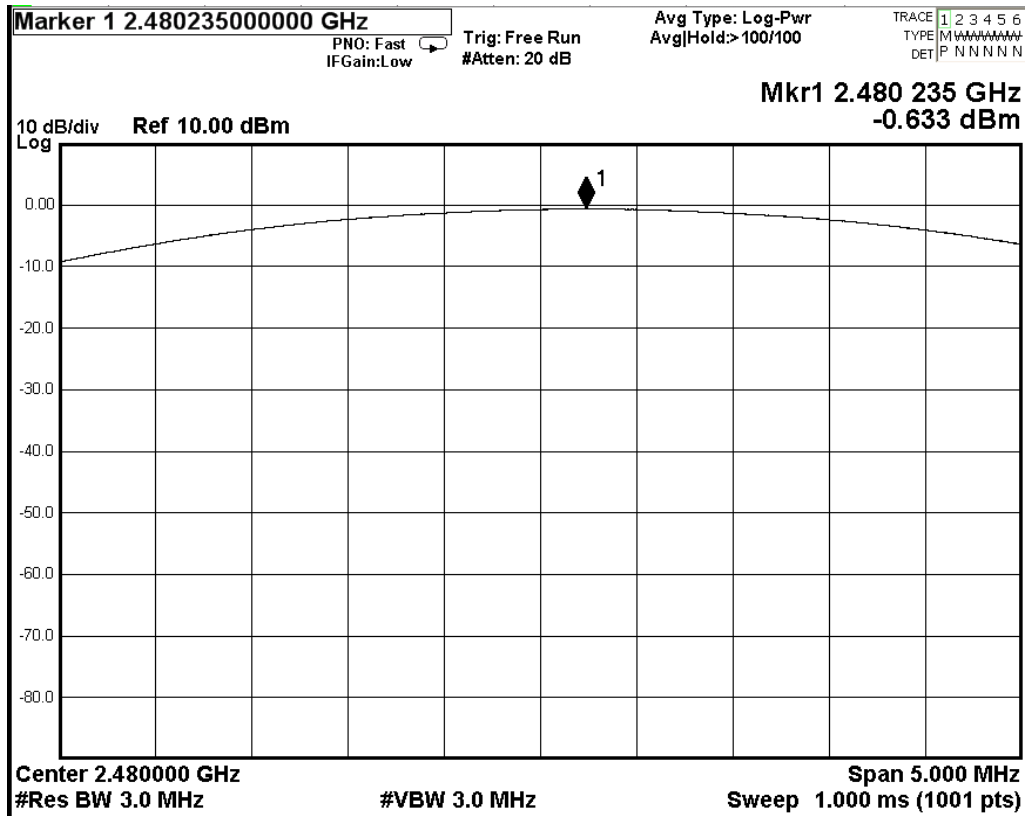



Test Report

Date : 2019-02-28
No. : HMD19010009

Page 18 of 106

3.1.2 Radiated Spurious Emissions

Test Requirement:	FCC 47CFR 15.209
Test Method:	ANSI C63.10:2013
Test Date:	2019-01-15 to 2019-02-28
Mode of Operation:	Tx mode / Bluetooth Communication mode (GFSK)

Ambient Temperature: 25°C	Relative Humidity: 50%	Atmospheric Pressure: 101 kPa
---------------------------	------------------------	-------------------------------

Test Method:

For emission measurements at or below 1 GHz, the sample was placed 0.8m above the ground plane of semi-anechoic Chamber*. For emission measurements above 1 GHz, the sample was placed 1.5m above the ground plane of semi-anechoic Chamber*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

* Semi-Anechoic chamber located on the G/F of The Hong Kong Standards and Testing Centre Ltd. with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 607756.

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.

Test Report

Date : 2019-02-28
No. : HMD19010009

Page 19 of 106

Spectrum Analyzer Setting:

9KHz – 30MHz (Pk & Av)

RBW: 10kHz
VBW: 30kHz
Sweep: Auto
Span: Fully capture the emissions being measured
Trace: Max. hold

30MHz – 1GHz (QP)

RBW: 120kHz
VBW: 120kHz
Sweep: Auto
Span: Fully capture the emissions being measured
Trace: Max. hold


Above 1GHz (Pk)

RBW: 1MHz
VBW: 1MHz
Sweep: Auto
Span: Fully capture the emissions being measured
Trace: Max. hold

Above 1GHz (Av)

RBW: 1MHz
VBW: 10Hz
Sweep: Auto
Span: Fully capture the emissions being measured
Trace: Max. hold

Test Setup:

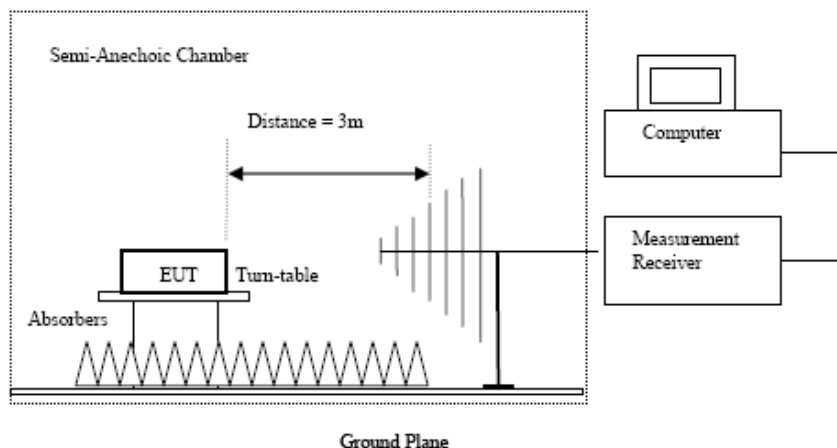

- Absorbers placed on top of the ground plane are for measurements above 1000MHz only.
- Measurements between 30MHz to 1000MHz made with Bi-log antennas, above 1000MHz horn antennas are used, 9kHz to 30MHz loop antennas are used.

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



Test Report

Date : 2019-02-28
 No. : HMD19010009

Page 20 of 106

Limits for Radiated Emissions FCC 47 CFR 15.247 Class B]:

Frequency Range [MHz]	Quasi-Peak Limits [μ V/m]
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Result of Tx mode (2402.0 MHz) (GFSK) (9kHz – 30MHz): Pass

Field Strength of Spurious Emissions Peak Value						
Frequency MHz	Measured Level dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Field Strength uV/m	Limit uV/m	E-Field Polarity
Emissions detected are more than 20 dB below the FCC Limits						

Result of Tx mode (2402.0 MHz) (GFSK) (Above 1GHz): Pass

Field Strength of Spurious Emissions Peak Value						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB	E-Field Polarity
4804.0	23.9	41.5	65.4	74.0	8.6	Vertical
4804.0	19.8	42.4	62.2	74.0	11.8	Horizontal
7206.0	18.7	45.1	63.8	74.0	10.3	Vertical
7206.0	14.1	46.2	60.3	74.0	13.7	Horizontal
9608.0	12.5	48.0	60.5	74.0	13.5	Vertical
9608.0	9.1	48.8	57.9	74.0	16.1	Horizontal
12010.0	5.7	51.8	57.5	74.0	16.5	Vertical
12010.0	3.7	52.4	56.1	74.0	17.9	Horizontal

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



Test Report

Date : 2019-02-28
 No. : HMD19010009

Page 21 of 106

Field Strength of Spurious Emissions						
Average Value						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB	E-Field Polarity
4804.0	8.6	41.5	50.1	54.0	3.9	Vertical
4804.0	4.5	42.4	46.9	54.0	7.1	Horizontal
7206.0	3.2	45.1	48.3	54.0	5.7	Vertical
7206.0	-1.6	46.2	44.7	54.0	9.3	Horizontal
9608.0	-2.9	48.0	45.1	54.0	8.9	Vertical
9608.0	-6.7	48.8	42.1	54.0	11.9	Horizontal
12010.0	-9.6	51.8	42.2	54.0	11.8	Vertical
12010.0	-11.7	52.4	40.68	54.0	13.3	Horizontal

Result of Tx mode (2441.0 MHz) (GFSK) (9kHz – 30MHz): Pass

Field Strength of Spurious Emissions						
Peak Value						
Frequency MHz	Measured Level dBuV	Correction Factor dB/m	Field Strength dBuV/m	Field Strength uV/m	Limit uV/m	E-Field Polarity
Emissions detected are more than 20 dB below the FCC Limits						

Result of Tx mode (2441.0 MHz) (GFSK) (Above 1GHz): Pass

Field Strength of Spurious Emissions						
Peak Value						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB	E-Field Polarity
4882.0	23.2	41.6	64.8	74.0	9.2	Vertical
4882.0	20.1	42.5	62.6	74.0	11.4	Horizontal
7323.0	9.3	53.2	62.5	74.0	11.6	Vertical
7323.0	14.7	46.3	61.0	74.0	13.0	Horizontal
9764.0	12.6	48.1	60.7	74.0	13.3	Vertical
9764.0	9.4	48.9	58.3	74.0	15.7	Horizontal
12205.0	6.4	51.6	58.0	74.0	16.0	Vertical
12205.0	4.3	52.5	56.8	74.0	17.3	Horizontal



Test Report

Date : 2019-02-28
 No. : HMD19010009

Page 22 of 106

Field Strength of Spurious Emissions						
Average Value						
Frequency MHz	Measured Level @3m dBuV	Correction Factor dB/m	Field Strength dBuV/m	Limit @3m dBuV/m	Margin dB	E-Field Polarity
4882.0	7.9	41.6	49.5	54.0	4.5	Vertical
4882.0	7.8	42.5	50.3	54.0	3.7	Horizontal
7323.0	1.8	45.2	47.0	54.0	7.0	Vertical
7323.0	-0.9	46.3	45.4	54.0	8.6	Horizontal
9764.0	-2.8	48.1	45.3	54.0	8.7	Vertical
9764.0	-6.3	48.9	42.6	54.0	11.4	Horizontal
12205.0	-7.8	51.6	43.8	54.0	10.2	Vertical
12205.0	-11.2	52.5	41.3	54.0	12.7	Horizontal

Result of Tx mode (2480.0 MHz) (GFSK) (9kHz – 30MHz): Pass

Field Strength of Spurious Emissions						
Peak Value						
Frequency MHz	Measured Level dBuV	Correction Factor dB/m	Field Strength dBuV/m	Field Strength uV/m	Limit uV/m	E-Field Polarity
Emissions detected are more than 20 dB below the FCC Limits						

Result of Tx mode (2480.0 MHz) (GFSK) (Above 1GHz): Pass

Field Strength of Spurious Emissions						
Peak Value						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB	E-Field Polarity
4960.0	23.0	41.4	64.4	74.0	9.7	Vertical
4960.0	19.2	42.7	61.9	74.0	12.1	Horizontal
7440.0	18.0	45.6	63.6	74.0	10.4	Vertical
7440.0	13.7	46.5	60.2	74.0	13.9	Horizontal
9920.0	11.3	48.6	59.9	74.0	14.1	Vertical
9920.0	6.78	49.7	56.5	74.0	17.5	Horizontal
12400.0	6.7	51.7	58.4	74.0	15.6	Vertical
12400.0	4.4	52.7	57.1	74.0	17.0	Horizontal

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



Test Report

Date : 2019-02-28
 No. : HMD19010009

Page 23 of 106

Field Strength of Spurious Emissions						
Average Value						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB	E-Field Polarity
4960.0	8.4	41.4	49.8	54.0	4.2	Vertical
4960.0	3.9	42.7	46.6	54.0	7.4	Horizontal
7440.0	2.5	45.6	48.1	54.0	5.9	Vertical
7440.0	-2.0	46.5	44.5	54.0	9.5	Horizontal
9920.0	-4.1	48.6	44.5	54.0	9.5	Vertical
9920.0	-9.0	49.7	40.7	54.0	13.3	Horizontal
12400.0	-8.5	51.7	43.2	54.0	10.8	Vertical
12400.0	-11.1	52.7	41.6	54.0	12.4	Horizontal

Result of Tx mode (2402.0 MHz) ($\pi/4$ -DQPSK) (9kHz – 30MHz): Pass

Field Strength of Spurious Emissions						
Peak Value						
Frequency MHz	Measured Level dBuV	Correction Factor dB/m	Field Strength dBuV/m	Field Strength uV/m	Limit uV/m	E-Field Polarity
Emissions detected are more than 20 dB below the FCC Limits						

Result of Tx mode (2402.0 MHz) ($\pi/4$ -DQPSK) (Above 1GHz): Pass

Field Strength of Spurious Emissions						
Peak Value						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB	E-Field Polarity
4804.0	24.4	41.5	65.9	74.0	8.1	Vertical
4804.0	20.8	42.4	63.2	74.0	10.9	Horizontal
7206.0	18.7	45.1	63.8	74.0	10.3	Vertical
7206.0	15.1	46.2	61.3	74.0	12.8	Horizontal
9608.0	11.8	48.0	59.8	74.0	14.2	Vertical
9608.0	9.2	48.8	58.0	74.0	16.0	Horizontal
12010.0	5.7	51.8	57.5	74.0	16.5	Vertical
12010.0	3.9	52.4	56.3	74.0	17.7	Horizontal

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



Test Report

Date : 2019-02-28
 No. : HMD19010009

Page 24 of 106

Field Strength of Spurious Emissions						
Average Value						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB	E-Field Polarity
4804.0	9.1	41.5	50.6	54.0	3.4	Vertical
4804.0	5.5	42.4	47.9	54.0	6.1	Horizontal
7206.0	3.2	45.1	48.3	54.0	5.7	Vertical
7206.0	-0.6	46.2	45.6	54.0	8.4	Horizontal
9608.0	-3.6	48.0	44.4	54.0	9.6	Vertical
9608.0	-6.5	48.8	42.3	54.0	11.7	Horizontal
12010.0	-9.6	51.8	42.2	54.0	11.8	Vertical
12010.0	-11.6	52.4	40.85	54.0	13.2	Horizontal

Result of Tx mode (2441.0 MHz) ($\pi/4$ -DQPSK) (9kHz – 30MHz): Pass

Field Strength of Spurious Emissions						
Peak Value						
Frequency MHz	Measured Level dBuV	Correction Factor dB/m	Field Strength dBuV/m	Field Strength uV/m	Limit uV/m	E-Field Polarity
Emissions detected are more than 20 dB below the FCC Limits						

Result of Tx mode (2441.0 MHz) ($\pi/4$ -DQPSK) (Above 1GHz): Pass

Field Strength of Spurious Emissions						
Peak Value						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB	E-Field Polarity
4882.0	23.5	41.6	65.1	74.0	8.9	Vertical
4882.0	20.8	42.5	63.3	74.0	10.8	Horizontal
7323.0	9.9	45.2	55.1	74.0	18.9	Vertical
7323.0	15.1	46.3	61.4	74.0	12.6	Horizontal
9764.0	11.7	48.1	59.8	74.0	14.2	Vertical
9764.0	8.8	48.9	57.7	74.0	16.3	Horizontal
12205.0	6.7	51.6	58.3	74.0	15.7	Vertical
12205.0	4.5	52.5	57.0	74.0	17.0	Horizontal

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



Test Report

Date : 2019-02-28
 No. : HMD19010009

Page 25 of 106

Field Strength of Spurious Emissions						
Average Value						
Frequency MHz	Measured Level @3m dBuV	Correction Factor dB/m	Field Strength dBuV/m	Limit @3m dBuV/m	Margin dB	E-Field Polarity
4882.0	8.2	41.6	49.8	54.0	4.2	Vertical
4882.0	5.5	42.5	48.0	54.0	6.0	Horizontal
7323.0	2.4	45.2	47.6	54.0	6.4	Vertical
7323.0	-0.6	46.3	45.7	54.0	8.3	Horizontal
9764.0	-3.7	48.1	44.4	54.0	9.6	Vertical
9764.0	-7.0	48.9	41.9	54.0	12.1	Horizontal
12205.0	-7.5	51.6	44.1	54.0	9.9	Vertical
12205.0	-10.9	52.5	41.6	54.0	12.4	Horizontal

Result of Tx mode (2480.0 MHz) ($\pi/4$ -DQPSK) (9kHz – 30MHz): Pass

Field Strength of Spurious Emissions						
Peak Value						
Frequency MHz	Measured Level dBuV	Correction Factor dB/m	Field Strength dBuV/m	Field Strength uV/m	Limit uV/m	E-Field Polarity
Emissions detected are more than 20 dB below the FCC Limits						

Result of Tx mode (2480.0 MHz) ($\pi/4$ -DQPSK) (Above 1GHz): Pass

Field Strength of Spurious Emissions						
Peak Value						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB	E-Field Polarity
4960.0	23.6	41.4	65.0	74.0	9.0	Vertical
4960.0	20.4	42.7	63.1	74.0	10.9	Horizontal
7440.0	18.5	45.6	64.1	74.0	9.9	Vertical
7440.0	14.9	46.5	61.4	74.0	12.7	Horizontal
9920.0	11.5	48.6	60.1	74.0	14.0	Vertical
9920.0	7.66	49.7	57.4	74.0	16.6	Horizontal
12400.0	6.1	51.7	57.8	74.0	16.2	Vertical
12400.0	4.5	52.7	57.2	74.0	16.8	Horizontal

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



Test Report

Date : 2019-02-28
 No. : HMD19010009

Page 26 of 106

Field Strength of Spurious Emissions						
Average Value						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB	E-Field Polarity
4960.0	9.1	41.4	50.5	54.0	3.6	Vertical
4960.0	5.1	42.7	47.8	54.0	6.2	Horizontal
7440.0	3.1	45.6	48.7	54.0	5.3	Vertical
7440.0	-0.8	46.5	45.7	54.0	8.3	Horizontal
9920.0	-4.0	48.6	44.6	54.0	9.4	Vertical
9920.0	-8.1	49.7	41.6	54.0	12.4	Horizontal
12400.0	-9.1	51.7	42.6	54.0	11.4	Vertical
12400.0	-11.0	52.7	41.7	54.0	12.3	Horizontal

Result of Tx mode (2402.0 MHz) (8DPSK) (9kHz – 30MHz): Pass

Field Strength of Spurious Emissions						
Peak Value						
Frequency MHz	Measured Level dBuV	Correction Factor dB/m	Field Strength dBuV/m	Field Strength uV/m	Limit uV/m	E-Field Polarity
Emissions detected are more than 20 dB below the FCC Limits						

Result of Tx mode (2402.0 MHz) (8DPSK) (Above 1GHz): Pass

Field Strength of Spurious Emissions						
Peak Value						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB	E-Field Polarity
4804.0	24.6	41.5	66.1	74.0	7.9	Vertical
4804.0	21.3	42.4	63.7	74.0	10.3	Horizontal
7206.0	19.4	45.1	64.5	74.0	9.5	Vertical
7206.0	15.8	46.2	62.0	74.0	12.0	Horizontal
9608.0	12.3	48.0	60.3	74.0	13.7	Vertical
9608.0	9.1	48.8	57.9	74.0	16.1	Horizontal
12010.0	6.8	51.8	58.6	74.0	15.4	Vertical
12010.0	4.9	52.4	57.3	74.0	16.7	Horizontal

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



Test Report

Date : 2019-02-28
 No. : HMD19010009

Page 27 of 106

Field Strength of Spurious Emissions						
Average Value						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB	E-Field Polarity
4804.0	9.9	41.5	51.4	54.0	2.6	Vertical
4804.0	6.0	42.4	48.4	54.0	5.6	Horizontal
7206.0	3.9	45.1	49.0	54.0	5.0	Vertical
7206.0	0.2	46.2	46.4	54.0	7.7	Horizontal
9608.0	-3.1	48.0	44.9	54.0	9.1	Vertical
9608.0	-6.7	48.8	42.1	54.0	11.9	Horizontal
12010.0	-8.4	51.8	43.4	54.0	10.6	Vertical
12010.0	-10.5	52.4	41.9	54.0	12.1	Horizontal

Result of Tx mode (2441.0 MHz) (8DPSK) (9kHz – 30MHz): Pass

Field Strength of Spurious Emissions						
Peak Value						
Frequency MHz	Measured Level dBuV	Correction Factor dB/m	Field Strength dBuV/m	Field Strength uV/m	Limit uV/m	E-Field Polarity
Emissions detected are more than 20 dB below the FCC Limits						

Result of Tx mode (2441.0 MHz) (8DPSK) (Above 1GHz): Pass

Field Strength of Spurious Emissions						
Peak Value						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB	E-Field Polarity
4882.0	23.9	41.6	65.5	74.0	8.5	Vertical
4882.0	20.3	42.5	62.8	74.0	11.2	Horizontal
7323.0	11.4	53.2	64.6	74.0	9.5	Vertical
7323.0	15.1	46.3	61.4	74.0	12.6	Horizontal
9764.0	10.9	48.1	59.0	74.0	15.0	Vertical
9764.0	8.6	48.9	57.5	74.0	16.5	Horizontal
12205.0	7.2	51.6	58.8	74.0	15.3	Vertical
12205.0	3.8	52.5	56.3	74.0	17.7	Horizontal

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



Test Report

Date : 2019-02-28
 No. : HMD19010009

Page 28 of 106

Field Strength of Spurious Emissions						
Average Value						
Frequency MHz	Measured Level @3m dBuV	Correction Factor dB/m	Field Strength dBuV/m	Limit @3m dBuV/m	Margin dB	E-Field Polarity
4882.0	8.5	41.6	50.1	54.0	3.9	Vertical
4882.0	5.1	42.5	47.6	54.0	6.5	Horizontal
7323.0	3.9	45.2	49.1	54.0	4.9	Vertical
7323.0	-0.6	46.3	45.7	54.0	8.3	Horizontal
9764.0	-4.6	48.1	43.6	54.0	10.5	Vertical
9764.0	-7.2	48.9	41.7	54.0	12.3	Horizontal
12205.0	-7.1	51.6	44.5	54.0	9.5	Vertical
12205.0	-11.7	52.5	40.8	54.0	13.2	Horizontal

Result of Tx mode (2480.0 MHz) (8DPSK) (9kHz – 30MHz): Pass

Field Strength of Spurious Emissions						
Peak Value						
Frequency MHz	Measured Level dBuV	Correction Factor dB/m	Field Strength dBuV/m	Field Strength uV/m	Limit uV/m	E-Field Polarity
Emissions detected are more than 20 dB below the FCC Limits						

Result of Tx mode (2480.0 MHz) (8DPSK) (Above 1GHz): Pass

Field Strength of Spurious Emissions						
Peak Value						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB	E-Field Polarity
4960.0	23.9	41.4	65.3	74.0	8.7	Vertical
4960.0	21.0	42.7	63.7	74.0	10.3	Horizontal
7440.0	18.4	45.6	64.0	74.0	10.0	Vertical
7440.0	14.7	46.5	61.2	74.0	12.8	Horizontal
9920.0	11.1	48.6	59.7	74.0	14.3	Vertical
9920.0	8.32	49.7	58.0	74.0	16.0	Horizontal
12400.0	6.7	51.7	58.4	74.0	15.6	Vertical
12400.0	4.3	52.7	57.0	74.0	17.1	Horizontal

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



Test Report

Date : 2019-02-28
No. : HMD19010009

Page 29 of 106

Field Strength of Spurious Emissions Average Value						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB	E-Field Polarity
4960.0	9.3	41.4	50.7	54.0	3.3	Vertical
4960.0	5.7	42.7	48.4	54.0	5.6	Horizontal
7440.0	2.9	45.6	48.5	54.0	5.5	Vertical
7440.0	-0.9	46.5	45.6	54.0	8.4	Horizontal
9920.0	-4.3	48.6	44.3	54.0	9.7	Vertical
9920.0	-7.4	49.7	42.3	54.0	11.7	Horizontal
12400.0	-8.6	51.7	43.1	54.0	10.9	Vertical
12400.0	-11.2	52.7	41.5	54.0	12.5	Horizontal

Remarks:

No additional spurious emissions found between lowest internal used/generated frequency and 30 MHz

* Denotes restricted band of operation.

Measurements were made using a peak detector. Any emission less than 1000MHz and falling within the restricted bands of FCC Rules Part 15 Section 15.205 and the limits of FCC Rules Part 15 Section 15.209 were applied.

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty
(9kHz-30MHz): 2.0dB
(30MHz -1GHz): 4.9dB
(1GHz -6GHz): 4.02dB
(6GHz -26.5GHz): 4.03dB

Emissions in the vertical and horizontal polarizations have been investigated and the worst-case test results are recorded in this report.

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



Test Report

Date : 2019-02-28
No. : HMD19010009

Page 30 of 106

Radiated Emissions Measurement:

Limit :

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).

Result: RF Radiated Emissions (Lowest)-GFSK

Field Strength of Band-edge Compliance Peak Value						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB	E-Field Polarity
2390.0	13.6	36.8	50.4	74.0	23.7	Vertical
2390.0	13.3	36.4	49.7	74.0	24.3	Horizontal

Field Strength of Band-edge Compliance Average Value						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB	E-Field Polarity
2390.0	2.5	36.8	39.3	54.0	14.7	Vertical
2390.0	1.0	36.4	37.4	54.0	16.6	Horizontal

Result: RF Radiated Emissions (Highest) -GFSK

Field Strength of Band-edge Compliance Peak Value						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB	E-Field Polarity
2483.5	25.1	36.8	61.9	74.0	12.1	Vertical
2483.5	21.5	36.4	57.9	74.0	16.1	Horizontal

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



Test Report

Date : 2019-02-28
 No. : HMD19010009

Page 31 of 106

Field Strength of Band-edge Compliance Average Value						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB	E-Field Polarity
2483.5	13.0	36.8	49.8	54.0	4.2	Vertical
2483.5	8.8	36.4	45.2	54.0	8.9	Horizontal

Result: RF Radiated Emissions (Lowest)- $\pi/4$ -DQPSK

Field Strength of Band-edge Compliance Peak Value						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB	E-Field Polarity
2390.0	14.5	36.8	51.3	74.0	22.8	Vertical
2390.0	13.3	36.4	49.7	74.0	24.3	Horizontal

Field Strength of Band-edge Compliance Average Value						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB	E-Field Polarity
2390.0	3.4	36.8	40.2	54.0	13.8	Vertical
2390.0	0.9	36.4	37.3	54.0	16.7	Horizontal

Result: RF Radiated Emissions (Highest) - $\pi/4$ -DQPSK

Field Strength of Band-edge Compliance Peak Value						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB	E-Field Polarity
2483.5	23.6	36.8	60.4	74.0	13.6	Vertical
2483.5	21.9	36.4	58.3	74.0	15.8	Horizontal

Field Strength of Band-edge Compliance Average Value						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB	E-Field Polarity
2483.5	11.6	36.8	48.4	54.0	5.6	Vertical
2483.5	9.1	36.4	45.5	54.0	8.5	Horizontal

Test Report

Date : 2019-02-28
 No. : HMD19010009

Page 32 of 106

Result: RF Radiated Emissions (Lowest) - 8DPSK

Field Strength of Band-edge Compliance Peak Value						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB	E-Field Polarity
2390.0	14.2	36.8	51.0	74.0	23.0	Vertical
2390.0	12.4	36.4	48.8	74.0	25.2	Horizontal

Field Strength of Band-edge Compliance Average Value						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB	E-Field Polarity
2390.0	3.1	36.8	39.9	54.0	14.1	Vertical
2390.0	0.0	36.4	36.4	54.0	17.6	Horizontal

Result: RF Radiated Emissions (Highest) -8DPSK

Field Strength of Band-edge Compliance Peak Value						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB	E-Field Polarity
2483.5	24.4	36.8	61.2	74.0	12.8	Vertical
2483.5	23.3	36.4	59.7	74.0	14.3	Horizontal

Field Strength of Band-edge Compliance Average Value						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB	E-Field Polarity
2483.5	12.3	36.8	49.1	54.0	4.9	Vertical
2483.5	10.5	36.4	46.9	54.0	7.1	Horizontal



Test Report

Date : 2019-02-28
 No. : HMD19010009

Page 33 of 106

Limits for Radiated Emissions FCC 47 CFR 15.247 Class B):


Frequency Range [MHz]	Quasi-Peak Limits [$\mu\text{V/m}$]
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Results of Bluetooth mode (USB output: 5V 1A) (GFSK 2402.0 MHz) (30MHz – 1GHz): Pass (Power panel “A”)

Please refer to the following table for result details(The data is the worst cases)

Horizontal

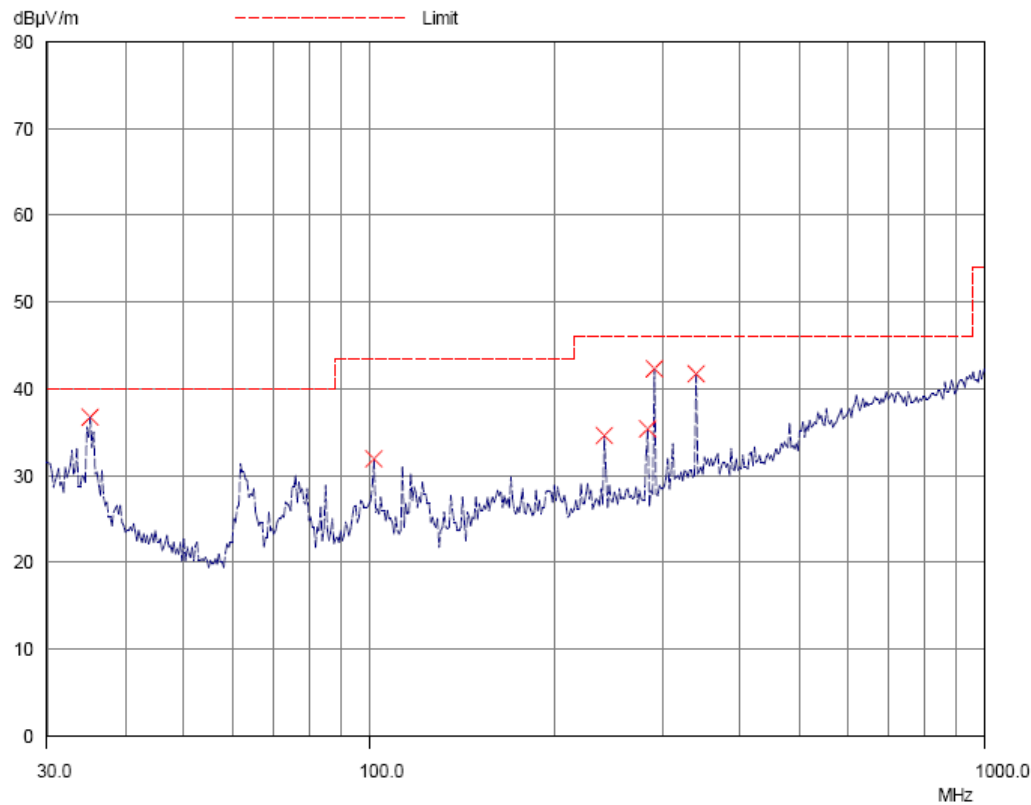

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.



Test Report

Date : 2019-02-28
No. : HMD19010009

Page 34 of 106

**Result of Bluetooth mode (USB output: 5V 1A) (GFSK 2402.0 MHz) (30MHz – 1GHz): Pass
(Power panel “A”)**

Radiated Emissions Quasi-Peak					
Emission Frequency MHz	E-Field Polarity	Level @3m dB μ V/m	Limit @3m dB μ V/m	Level @3m μ V/m	Limit @3m μ V/m
35.1	Horizontal	36.4	40.0	66.1	100
101.6	Horizontal	32.1	43.5	40.3	150
241.3	Horizontal	34.6	46.0	53.7	200
282.3	Horizontal	35.4	46.0	58.9	200
289.8	Horizontal	42.3	46.0	130.3	200
338.8	Horizontal	41.7	46.0	121.6	200

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.



Test Report

Date : 2019-02-28
 No. : HMD19010009

Page 35 of 106

Limits for Radiated Emissions FCC 47 CFR 15.247 Class B):


Frequency Range [MHz]	Quasi-Peak Limits [$\mu\text{V}/\text{m}$]
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Results of Bluetooth mode (USB output: 5V 1A) (GFSK 2402.0 MHz) (30MHz – 1GHz): Pass (Power panel “A”)

Please refer to the following table for result details(The data is the worst cases)

Vertical

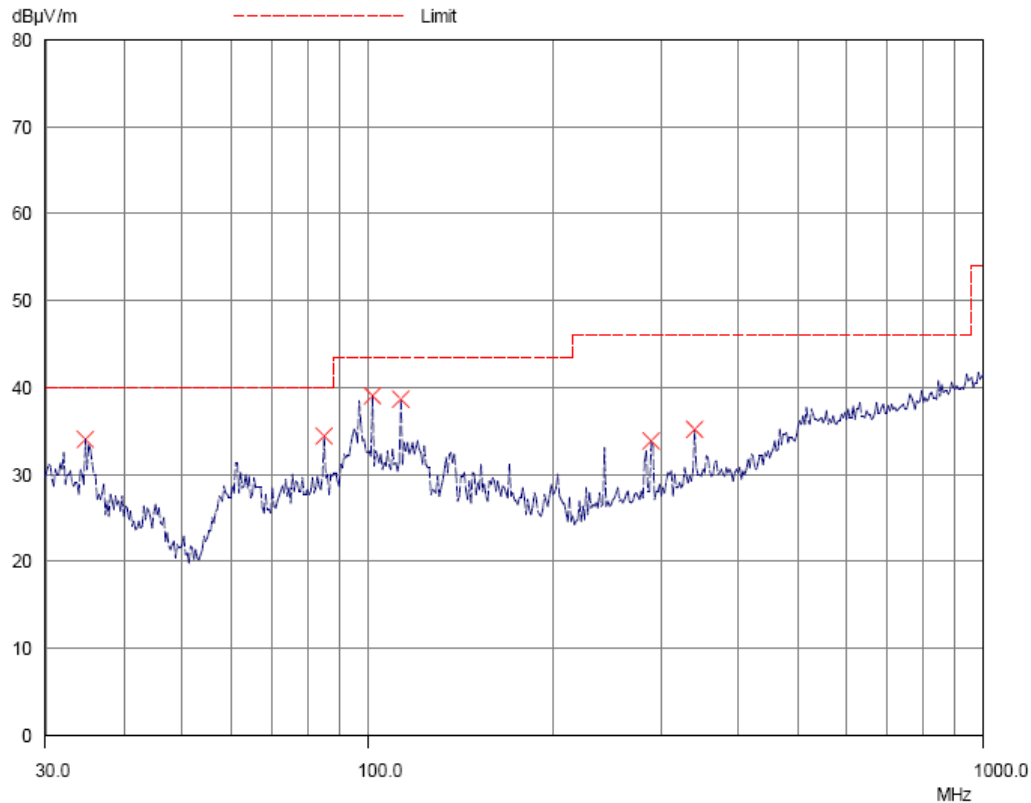

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.



Test Report

Date : 2019-02-28
No. : HMD19010009

Page 36 of 106

**Result of Bluetooth mode (USB output: 5V 1A) (GFSK 2402.0 MHz) (30MHz – 1GHz): Pass
(Power panel “A”)**

Radiated Emissions Quasi-Peak					
Emission Frequency MHz	E-Field Polarity	Level @3m dB μ V/m	Limit @3m dB μ V/m	Level @3m μ V/m	Limit @3m μ V/m
34.5	Vertical	34.1	40.0	50.7	100
84.7	Vertical	34.4	40.0	52.5	100
101.6	Vertical	39.1	43.5	90.2	150
112.9	Vertical	38.6	43.5	85.1	150
289.3	Vertical	33.9	46.0	49.5	200
338.8	Vertical	35.2	46.0	57.5	200

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.



Test Report

Date : 2019-02-28
 No. : HMD19010009

Page 37 of 106

Limits for Radiated Emissions FCC 47 CFR 15.247 Class B):


Frequency Range [MHz]	Quasi-Peak Limits [μ V/m]
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Results of Bluetooth mode (USB output: 5V 1A) (GFSK 2402.0 MHz) (30MHz – 1GHz): Pass (Power panel “B”)

Please refer to the following table for result details(The data is the worst cases)

Horizontal

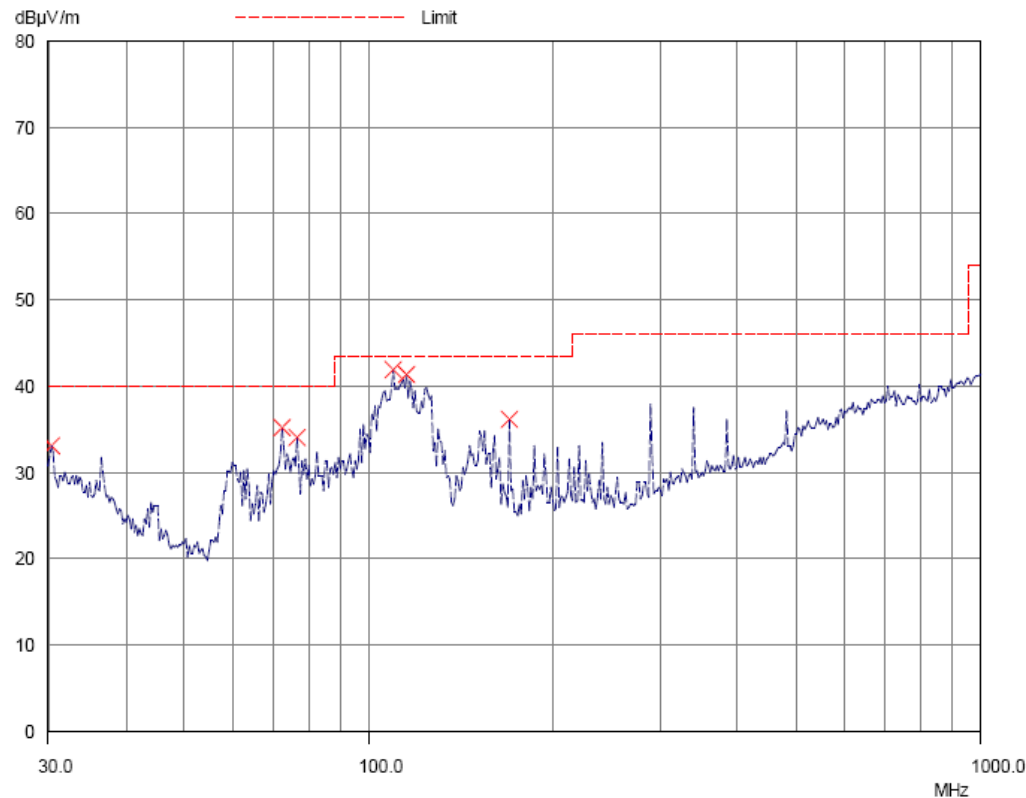

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.



Test Report

Date : 2019-02-28
No. : HMD19010009

Page 38 of 106

**Result of Bluetooth mode (USB output: 5V 1A) (GFSK 2402.0 MHz) (30MHz – 1GHz): Pass
(Power panel “B”)**

Radiated Emissions Quasi-Peak					
Emission Frequency MHz	E-Field Polarity	Level @3m dB μ V/m	Limit @3m dB μ V/m	Level @3m μ V/m	Limit @3m μ V/m
30.1	Horizontal	31.1	40.0	35.9	100
71.9	Horizontal	33.3	40.0	46.2	100
76.1	Horizontal	32.1	40.0	40.3	100
109.1	Horizontal	39.8	43.5	97.7	150
114.8	Horizontal	39.1	43.5	90.2	150
169.4	Horizontal	35.6	43.5	60.3	150

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.



Test Report

Date : 2019-02-28
 No. : HMD19010009

Page 39 of 106

Limits for Radiated Emissions FCC 47 CFR 15.247 Class B):


Frequency Range [MHz]	Quasi-Peak Limits [$\mu\text{V}/\text{m}$]
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Results of Bluetooth mode (USB output: 5V 1A) (GFSK 2402.0 MHz) (30MHz – 1GHz): Pass (Power panel “B”)

Please refer to the following table for result details(The data is the worst cases)

Vertical

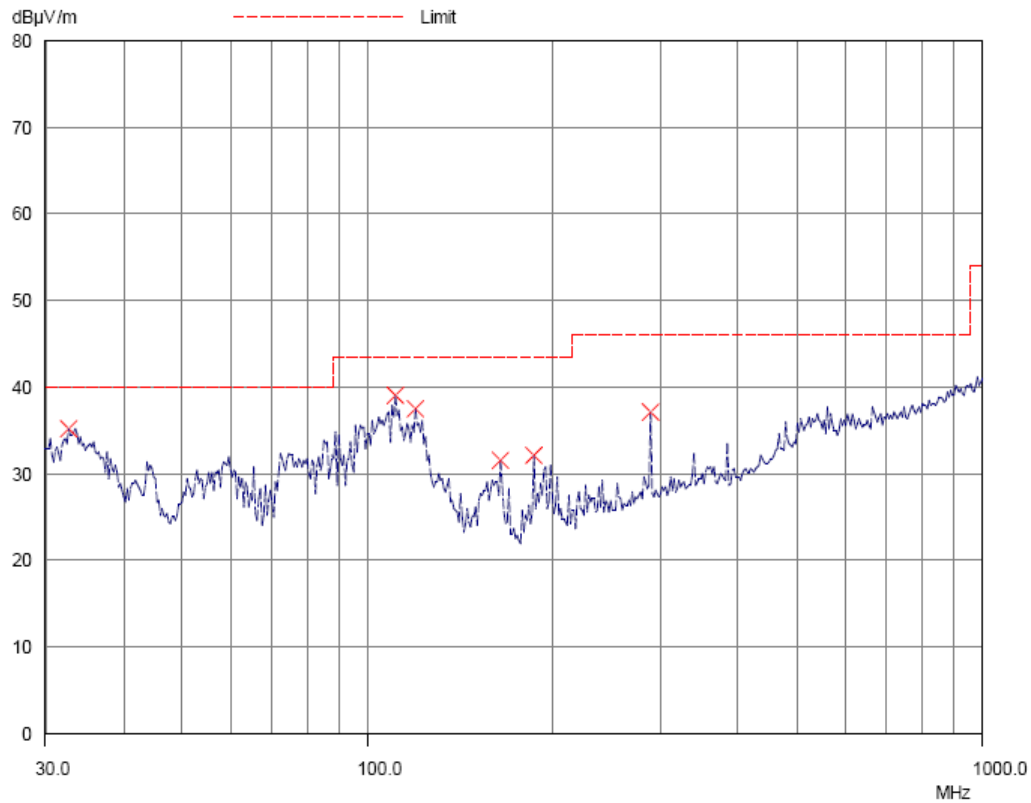

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.



Test Report

Date : 2019-02-28
No. : HMD19010009

Page 40 of 106

**Result of Bluetooth mode (USB output: 5V 1A) (GFSK 2402.0 MHz) (30MHz – 1GHz): Pass
(Power panel “B”)**

Radiated Emissions Quasi-Peak					
Emission Frequency MHz	E-Field Polarity	Level @3m dB μ V/m	Limit @3m dB μ V/m	Level @3m μ V/m	Limit @3m μ V/m
32.4	Vertical	34.3	40.0	51.9	100
110.5	Vertical	37.1	43.5	71.6	150
119.6	Vertical	35.5	43.5	59.6	150
164.1	Vertical	29.4	43.5	29.5	150
186.3	Vertical	30.1	43.5	32.0	150
288.9	Vertical	36.2	46.0	64.6	200

Remarks:

Calculated measurement uncertainty (30MHz – 1GHz): 4.9dB

Emissions in the vertical and horizontal polarizations have been investigated and the worst-case test results are recorded in this report.

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

Test Report

Date : 2019-02-28
No. : HMD19010009

Page 41 of 106

3.1.3 AC Mains Conducted Emissions (0.15MHz to 30MHz)

Test Requirement:	FCC 47CFR 15.207
Test Method:	ANSI C63.10:2013
Test Date:	2019-01-16 to 2019-02-26
Mode of Operation:	Bluetooth mode
Test Voltage:	120V a.c. 60Hz

Ambient Temperature: 25°C Relative Humidity: 51% Atmospheric Pressure: 101 kPa


Test Method:

The test was performed in accordance with ANSI C63.10:2013, with the following: an initial measurement was performed in peak and average detection mode on the live line, any emissions recorded within 30dB of the relevant limit line were re-measured using quasi-peak and average detection on the live and neutral lines with the worst case recorded in the table of results.

Receiver Setting:

Bandw. = 9 kHz, Meas. Time= 10.0 ms, Step Width = 5.0kHz
Detector = MaxPeak and CISPR AV

Test Setup:

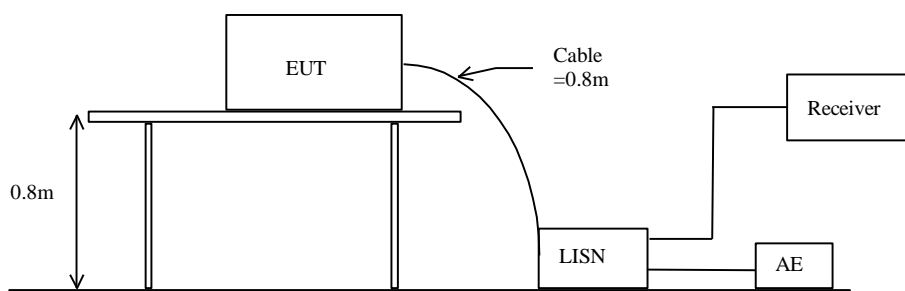



Test Report

Date : 2019-02-28
 No. : HMD19010009

Page 42 of 106

Limits for Conducted Emissions (FCC 47 CFR 15.207):


Frequency Range [MHz]	Quasi-Peak Limits [dB μ V]	Average [dB μ V]
0.15-0.5	66 to 56*	56 to 46*
0.5-5.0	56	46
5.0-30.0	60	50

* Decreases with the logarithm of the frequency.

Limits for Conducted Emissions Test, please refer to limit lines (Quasi-Peak and Average) in the following diagram.

Results of Bluetooth mode(USB output: 5V 1A) (Power panel “A”) (L): PASS

Please refer to the following diagram for individual results.

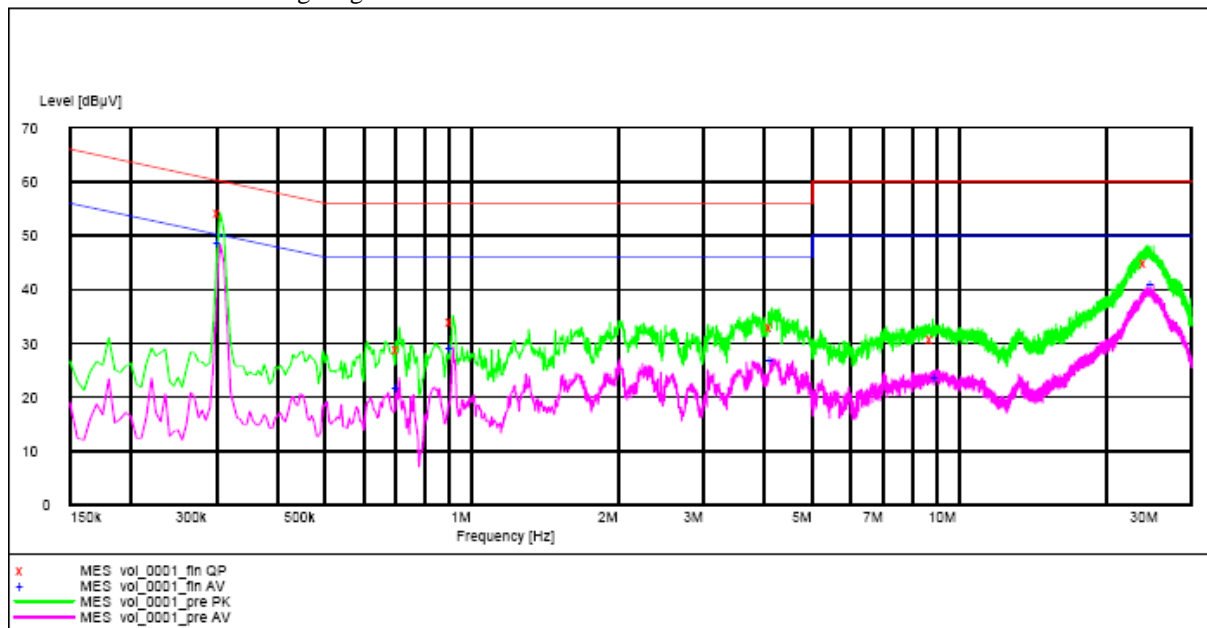

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.



Test Report

Date : 2019-02-28
 No. : HMD19010009

Page 43 of 106

Results of Bluetooth mode(USB output: 5V 1A) (Power panel “A”) (L): PASS

Conductor Live or Neutral	Frequency MHz	Quasi-peak		Average	
		Level dB μ V	Limit dB μ V	Level dB μ V	Limit dB μ V
Live	0.305	54.1	60.0	-*-	-*-
Live	0.710	29.0	56.0	-*-	-*-
Live	0.915	34.1	56.0	-*-	-*-
Live	4.135	33.0	56.0	-*-	-*-
Live	8.850	30.9	60.0	-*-	-*-
Live	24.330	44.8	60.0	-*-	-*-
Live	0.305	-*-	-*-	48.7	50.0
Live	0.710	-*-	-*-	21.9	46.0
Live	0.915	-*-	-*-	29.3	46.0
Live	4.155	-*-	-*-	27.0	46.0
Live	9.050	-*-	-*-	23.9	50.0
Live	25.060	-*-	-*-	40.9	50.0

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

Test Report

Date : 2019-02-28
 No. : HMD19010009

Page 44 of 106


Frequency Range [MHz]	Quasi-Peak Limits [dBμV]	Average [dBμV]
0.15-0.5	66 to 56*	56 to 46*
0.5-5.0	56	46
5.0-30.0	60	50

* Decreases with the logarithm of the frequency.

Limits for Conducted Emissions Test, please refer to limit lines (Quasi-Peak and Average) in the following diagram.

Results of Bluetooth mode(USB output: 5V 1A) (Power panel “A”) (N): PASS

Please refer to the following diagram for individual results.

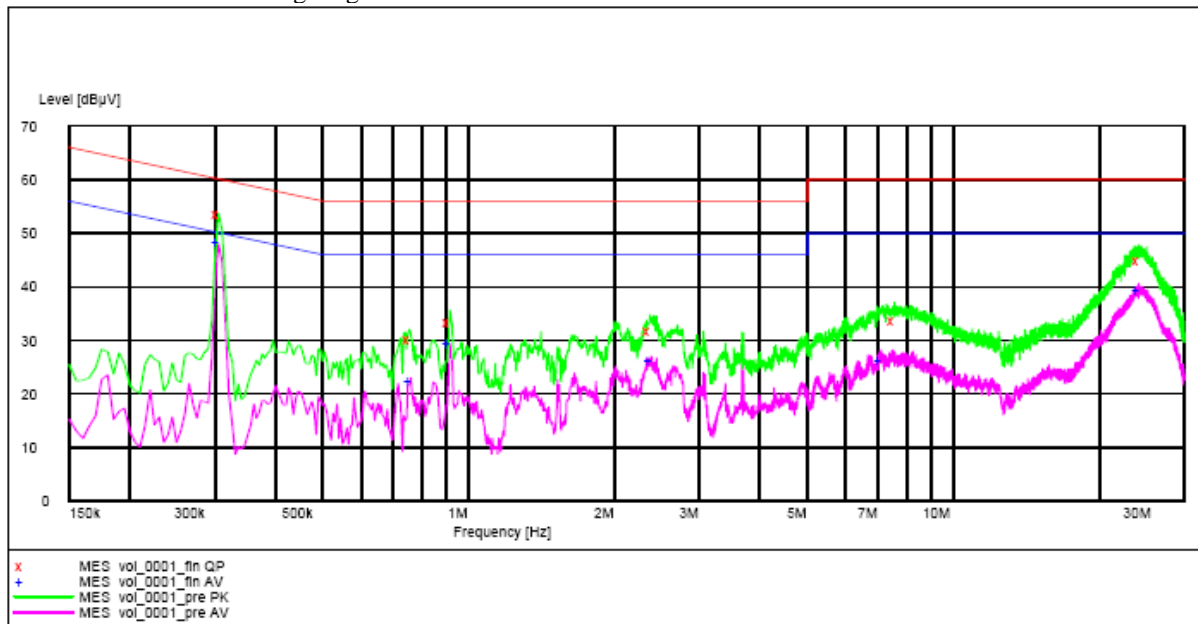



Test Report

Date : 2019-02-28
 No. : HMD19010009

Page 45 of 106

Results of Bluetooth mode(USB output: 5V 1A) (Power panel “A”) (N)

Conductor Live or Neutral	Frequency MHz	Quasi-peak		Average	
		Level dB μ V	Limit dB μ V	Level dB μ V	Limit dB μ V
Neutral	0.305	53.7	60.0	_*_	_*_
Neutral	0.755	30.1	56.0	_*_	_*_
Neutral	0.915	33.4	56.0	_*_	_*_
Neutral	2.365	31.8	56.0	_*_	_*_
Neutral	7.565	33.8	60.0	_*_	_*_
Neutral	24.150	44.8	60.0	_*_	_*_
Neutral	0.305	_*_	_*_	48.4	50.0
Neutral	0.760	_*_	_*_	22.6	46.0
Neutral	0.915	_*_	_*_	29.4	46.0
Neutral	2.380	_*_	_*_	26.2	46.0
Neutral	7.110	_*_	_*_	26.3	50.0
Neutral	24.140	_*_	_*_	39.3	50.0

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.

Test Report

Date : 2019-02-28
 No. : HMD19010009

Page 46 of 106


Frequency Range [MHz]	Quasi-Peak Limits [dB μ V]	Average [dB μ V]
0.15-0.5	66 to 56*	56 to 46*
0.5-5.0	56	46
5.0-30.0	60	50

* Decreases with the logarithm of the frequency.

Limits for Conducted Emissions Test, please refer to limit lines (Quasi-Peak and Average) in the following diagram.

Results of Bluetooth mode(USB output: 5V 1A) (Power panel “B”) (L): PASS

Please refer to the following diagram for individual results.

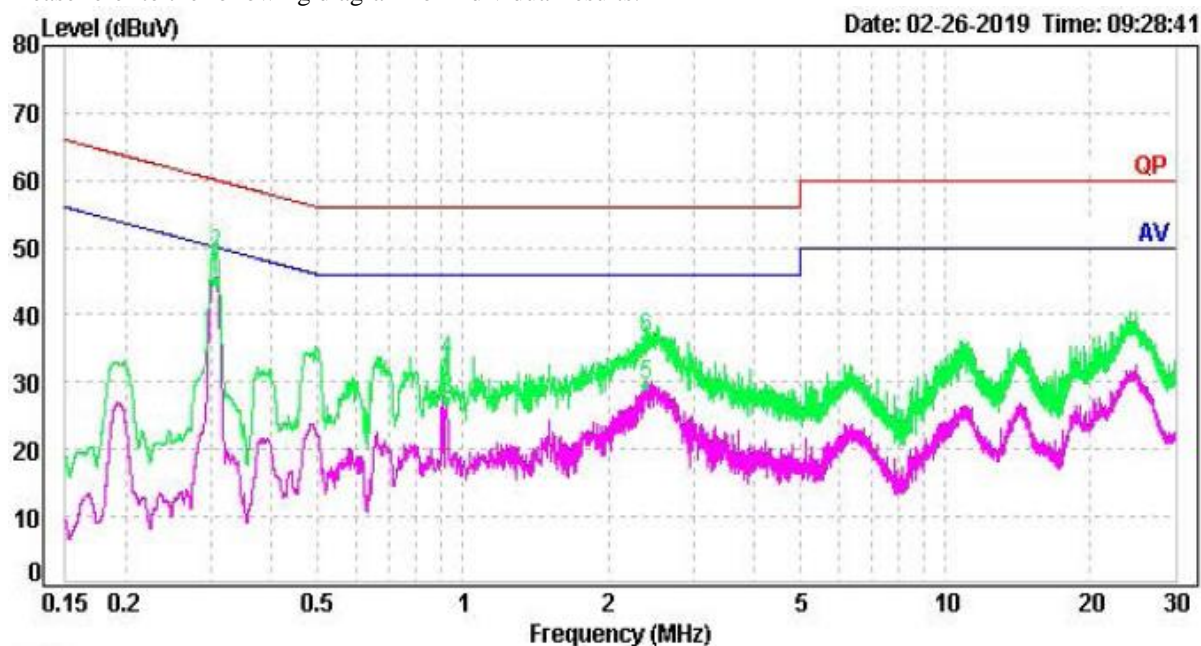



Test Report

Date : 2019-02-28
No. : HMD19010009

Page 47 of 106

Results of Bluetooth mode(USB output: 5V 1A) (Power panel "B") (L): PASS

Conductor Live or Neutral	Frequency MHz	Quasi-peak		Average	
		Level dB μ V	Limit dB μ V	Level dB μ V	Limit dB μ V
Live	0.306	48.9	60.0	-*-	-*-
Live	0.930	33.3	56.0	-*-	-*-
Live	2.388	36.4	56.0	-*-	-*-
Live	0.306	-*-	-*-	45.1	50.0
Live	0.930	-*-	-*-	27.3	46.0
Live	2.388	-*-	-*-	29.4	46.0

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.

Test Report

Date : 2019-02-28
 No. : HMD19010009

Page 48 of 106


Frequency Range [MHz]	Quasi-Peak Limits [dB μ V]	Average [dB μ V]
0.15-0.5	66 to 56*	56 to 46*
0.5-5.0	56	46
5.0-30.0	60	50

* Decreases with the logarithm of the frequency.

Limits for Conducted Emissions Test, please refer to limit lines (Quasi-Peak and Average) in the following diagram.

Results of Bluetooth mode(USB output: 5V 1A) (Power panel “B”) (N): PASS

Please refer to the following diagram for individual results.

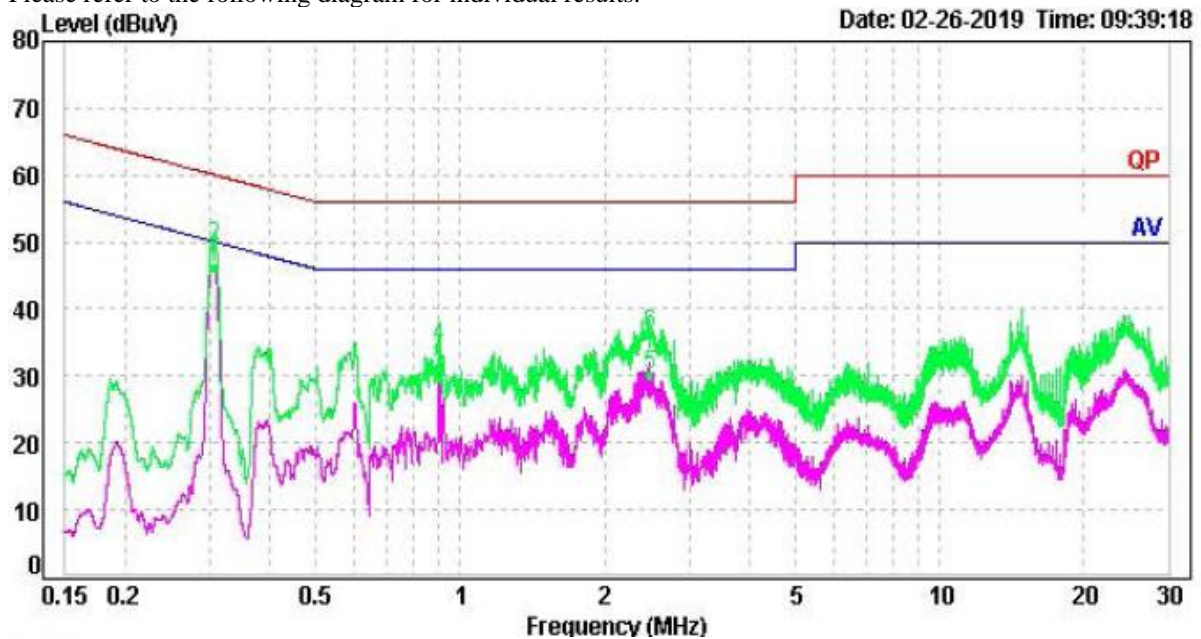



Test Report

Date : 2019-02-28
No. : HMD19010009

Page 49 of 106

Results of Bluetooth mode(USB output: 5V 1A) (Power panel “B”) (N)

Conductor Live or Neutral	Frequency MHz	Quasi-peak		Average	
		Level dB μ V	Limit dB μ V	Level dB μ V	Limit dB μ V
Neutral	0.306	49.3	60.0	-*-	-*-
Neutral	0.903	34.3	56.0	-*-	-*-
Neutral	2.472	36.3	56.0	-*-	-*-
Neutral	0.306	-*-	-*-	46.1	50.0
Neutral	0.903	-*-	-*-	29.9	46.0
Neutral	2.472	-*-	-*-	30.2	46.0

Remarks:

Calculated measurement uncertainty (0.15MHz – 30MHz): 3.25dB

-*- Emission(s) that is far below the corresponding limit line.

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to “Conditions of Issuance of Test Reports” section or Website.



Test Report

Date : 2019-02-28
No. : HMD19010009

Page 50 of 106

3.1.4 Number of Hopping Frequency

Ambient Temperature: 25°C Relative Humidity: 51% Atmospheric Pressure: 101 kPa

Limit of Number of Hopping Frequency

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels

Test Method:

The RF output of the EUT was connected to the spectrum analyzer by a low loss cable.

Spectrum Analyzer Setting:


RBW = 300kHz, VBW \geq RBW, Sweep = Auto, Span = the frequency band of operation
Detector = Peak, Trace = Max. hold

Test Setup:

As Test Setup of clause 3.1.1 in this test report.

Measurement Data:

GFSK: 79 of 79 Channel

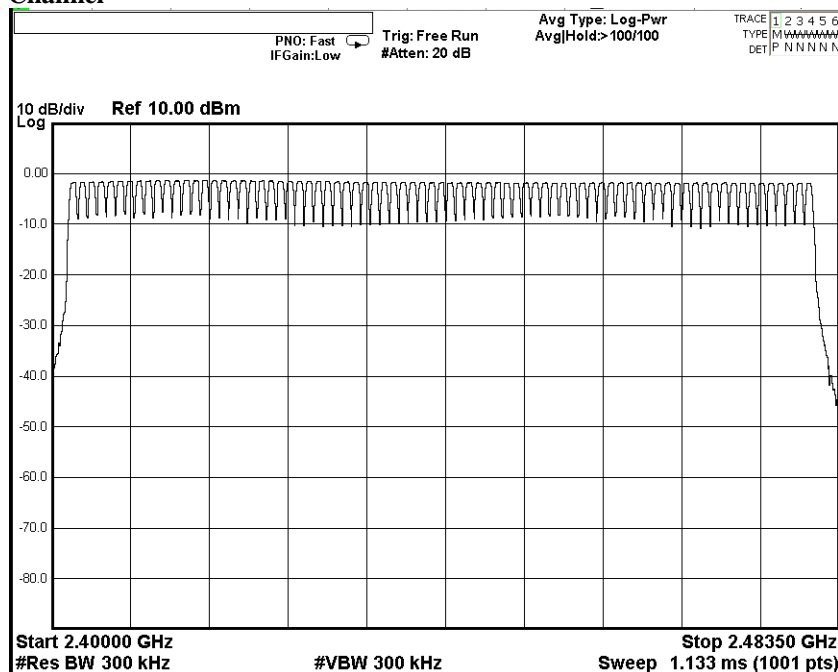

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.




Test Report

Date : 2019-02-28
No. : HMD19010009

Page 51 of 106

$\pi/4$ -DQPSK: 79 of 79 Channel

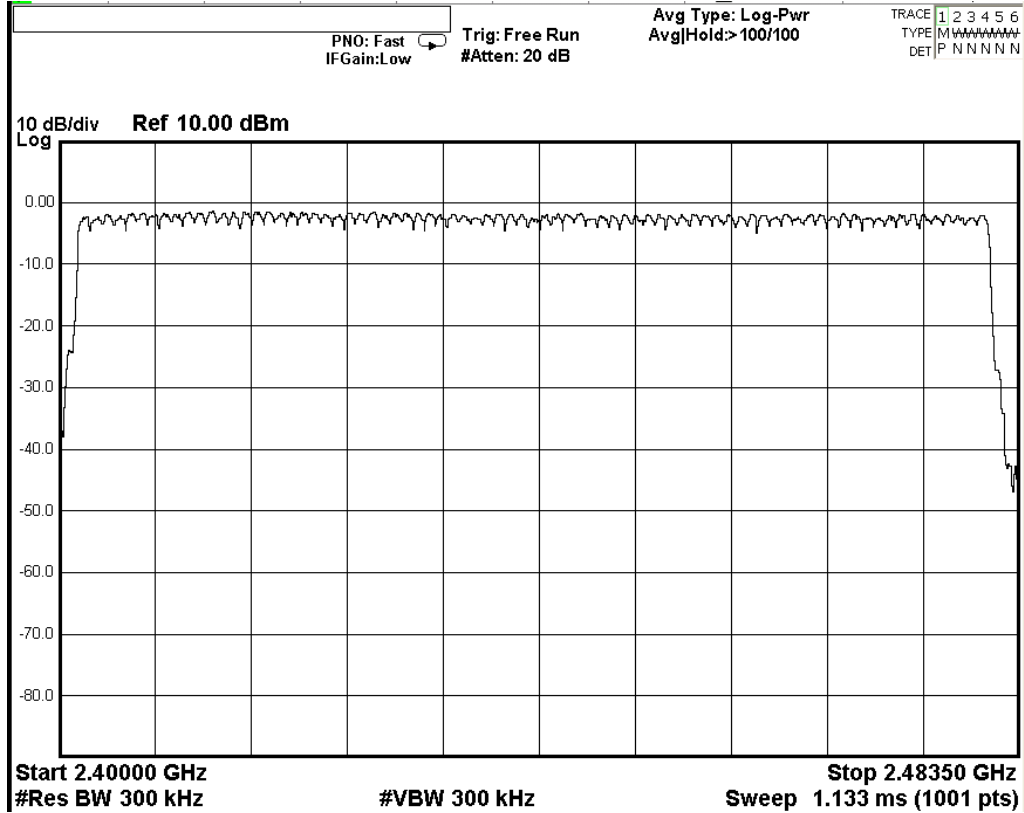

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.




Test Report

Date : 2019-02-28
No. : HMD19010009

Page 52 of 106

8DPSK: 79 of 79 Channel

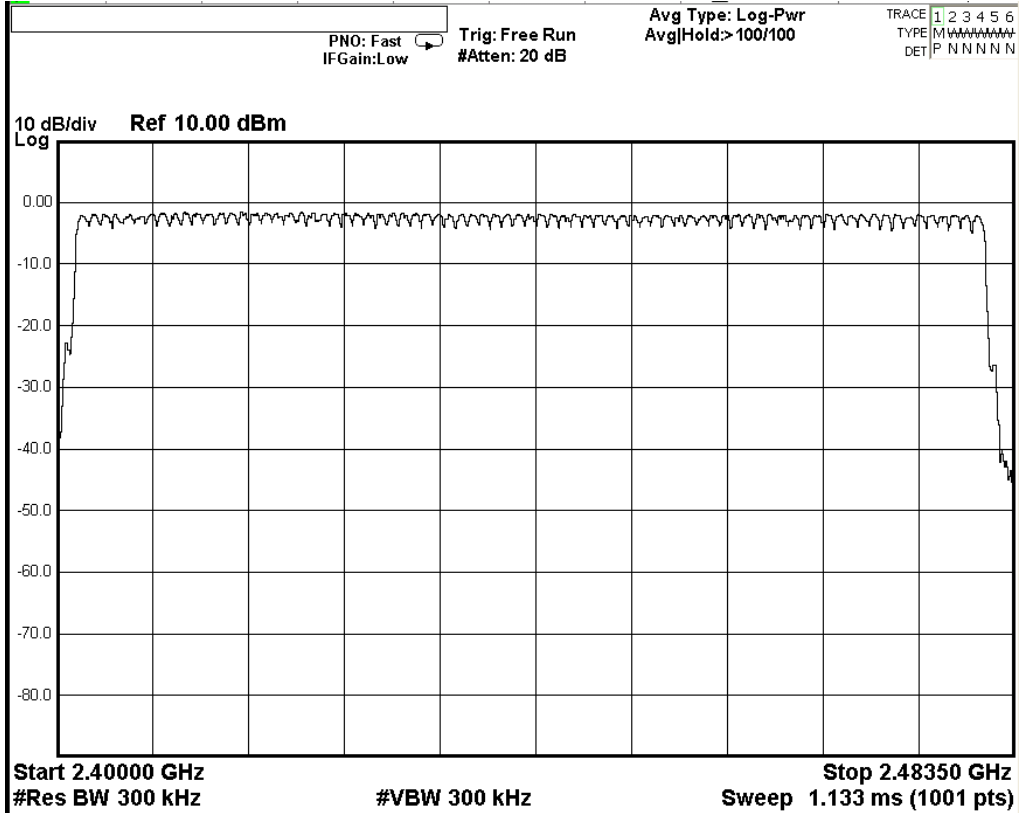

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



Test Report

Date : 2019-02-28
No. : HMD19010009

Page 53 of 106

3.1.5 20dB Bandwidth

Test Requirement: FCC 47CFR 15.247(a)(1)
Test Method: ANSI C63.10:2013
Test Date: 2019-01-22
Mode of Operation: Tx mode

Ambient Temperature: 25°C Relative Humidity: 51% Atmospheric Pressure: 101 kPa

Remark:

The result has been done on all the possible configurations for searching the worst cases.

Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

Spectrum Analyzer Setting:

RBW = 30kHz, VBW \geq RBW, Sweep = Auto, Span = two times and five times the OBW
Detector = Peak, Trace = Max. hold

Test Setup:

As Test Setup of clause 3.1.1 in this test report.




Test Report

Date : 2019-02-28
 No. : HMD19010009

Page 54 of 106

Fundamental Frequency [MHz]	20dB Bandwidth [kHz]	FCC Limits [MHz]
2402	960.0	Within 2400-2483.5

(Lowest Operating Frequency) - (GFSK)

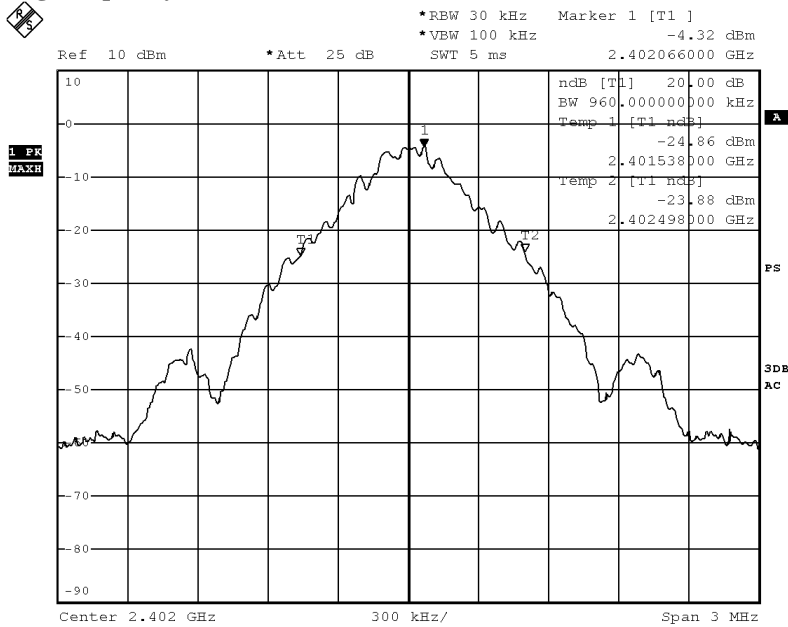

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.




Test Report

Date : 2019-02-28
 No. : HMD19010009

Page 55 of 106

Fundamental Frequency [MHz]	20dB Bandwidth [kHz]	FCC Limits [MHz]
2441	960.0	Within 2400-2483.5

(Middle Operating Frequency) - (GFSK)

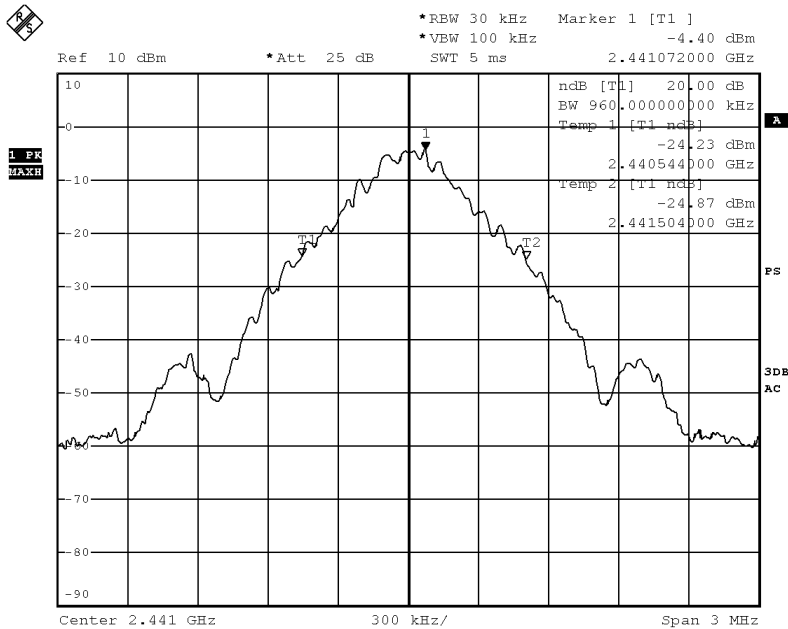




Test Report

Date : 2019-02-28
 No. : HMD19010009

Page 56 of 106

Fundamental Frequency [MHz]	20dB Bandwidth [kHz]	FCC Limits [MHz]
2480	954.0	Within 2400-2483.5

(Highest Operating Frequency) - (GFSK)

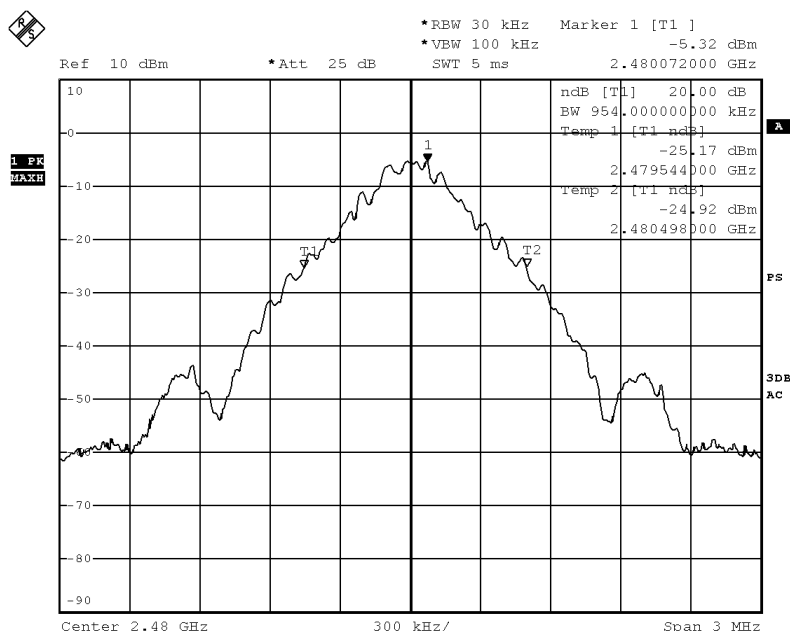

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.




Test Report

Date : 2019-02-28
 No. : HMD19010009

Page 57 of 106

Fundamental Frequency [MHz]	20dB Bandwidth [MHz]	FCC Limits [MHz]
2402	1.404	Within 2400-2483.5

(Lowest Operating Frequency) - ($\pi/4$ DQPSK)

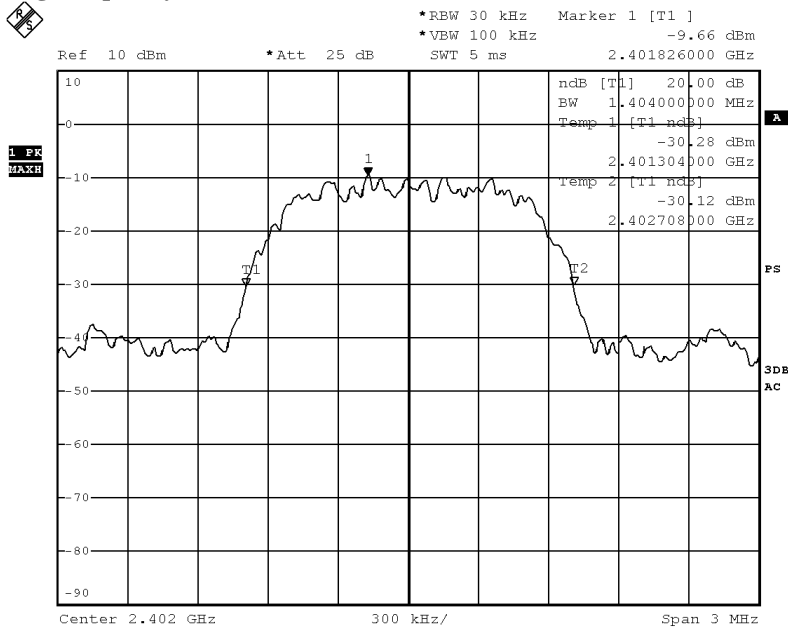

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.




Test Report

Date : 2019-02-28
 No. : HMD19010009

Page 58 of 106

Fundamental Frequency [MHz]	20dB Bandwidth [MHz]	FCC Limits [MHz]
2441	1.386	Within 2400-2483.5

(Middle Operating Frequency) - ($\pi/4$ DQPSK)

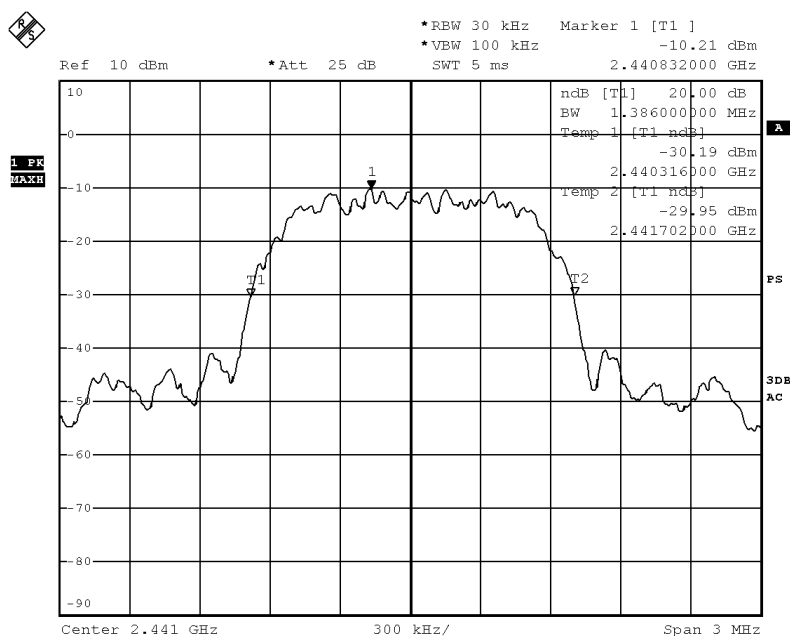

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.




Test Report

Date : 2019-02-28
 No. : HMD19010009

Page 59 of 106

Fundamental Frequency [MHz]	20dB Bandwidth [MHz]	FCC Limits [MHz]
2480	1.386	Within 2400-2483.5

(Highest Operating Frequency) - ($\pi/4$ DQPSK)

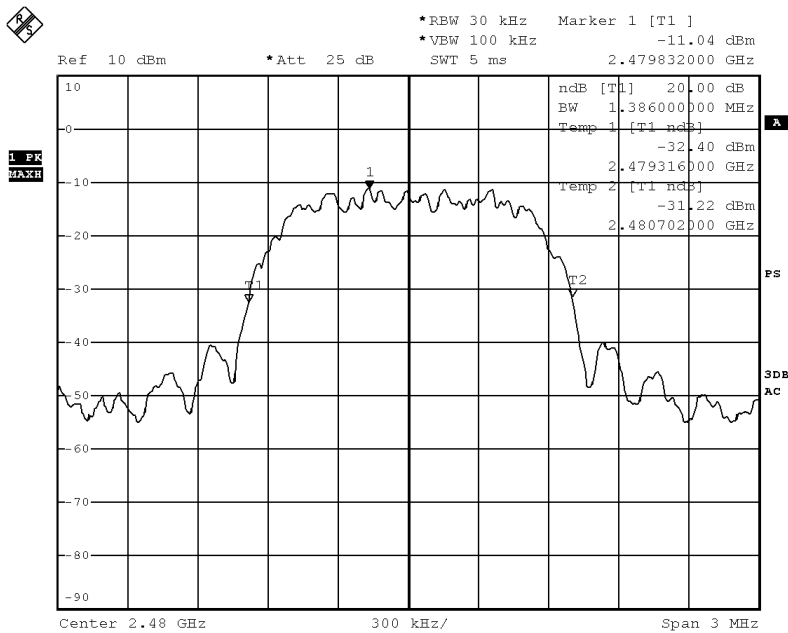




Test Report

Date : 2019-02-28
 No. : HMD19010009

Page 60 of 106

Fundamental Frequency [MHz]	20dB Bandwidth [MHz]	FCC Limits [MHz]
2402	1.386	Within 2400-2483.5

(Lowest Operating Frequency) - (8DPSK)

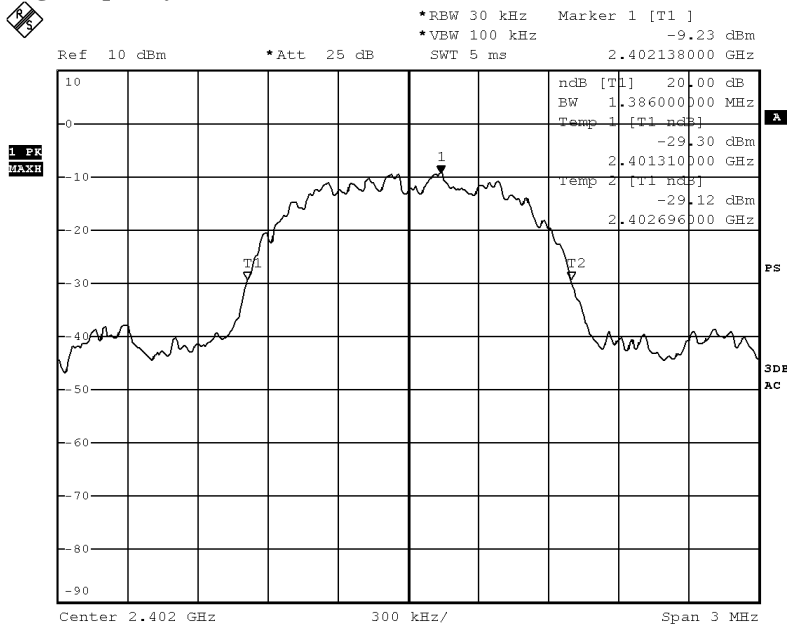




Test Report

Date : 2019-02-28
 No. : HMD19010009

Page 61 of 106

Fundamental Frequency [MHz]	20dB Bandwidth [MHz]	FCC Limits [MHz]
2441	1.374	Within 2400-2483.5

(Middle Operating Frequency) - (8DPSK)

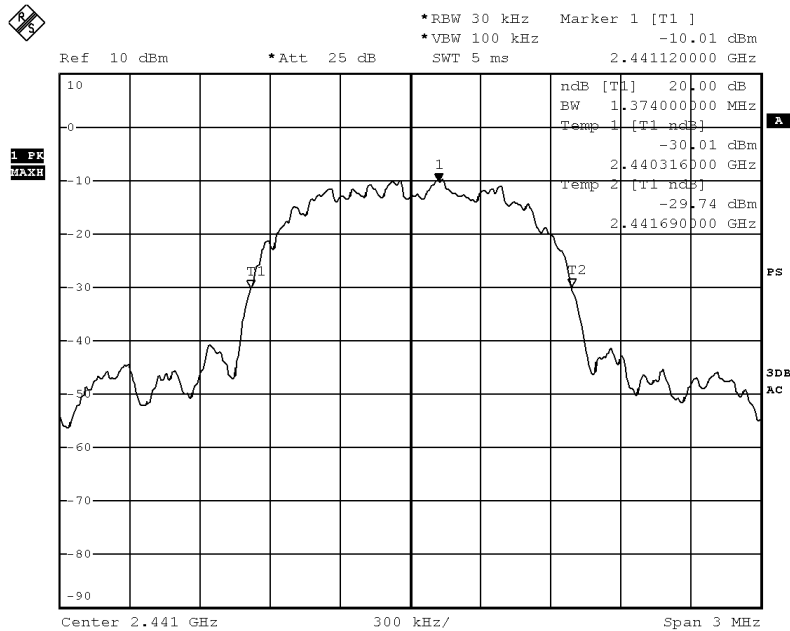




Test Report

Date : 2019-02-28
 No. : HMD19010009

Page 62 of 106

Fundamental Frequency [MHz]	20dB Bandwidth [MHz]	FCC Limits [MHz]
2480	1.368	Within 2400-2483.5

(Highest Operating Frequency) - (8DPSK)

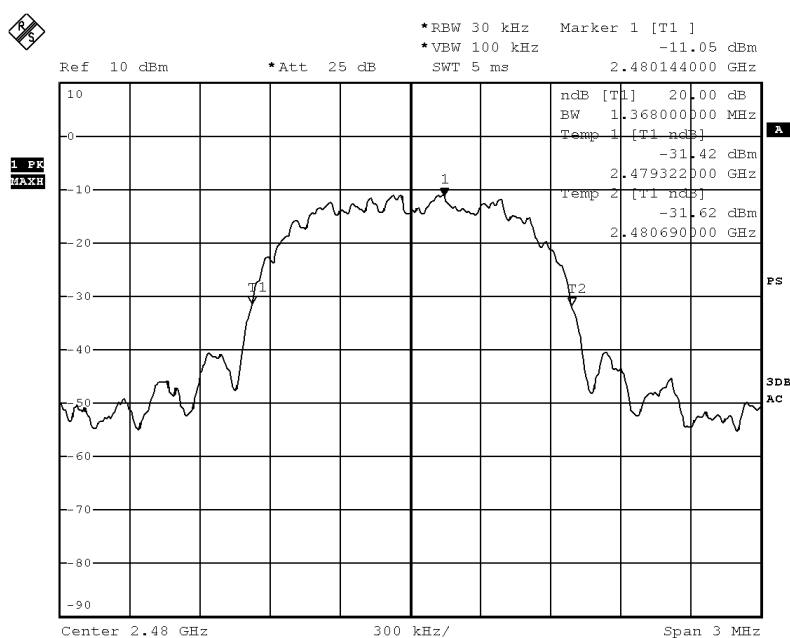

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



Test Report

Date : 2019-02-28
No. : HMD19010009

Page 63 of 106

3.1.6 Hopping Channel Separation

Ambient Temperature: 25°C

Relative Humidity: 51%

Atmospheric Pressure: 101 kPa

Requirements:

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Spectrum Analyzer Setting:

RBW = 300kHz, VBW \geq RBW, Sweep = Auto,
Span = Wide enough to capture the peaks of two adjacent channels
Detector = Peak, Trace = Max. hold

Limit:

The measured maximum bandwidth = 954kHz (GFSK)

The measured maximum bandwidth * 2/3 = 1.404MHz * 2/3 = 936kHz

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.




Test Report

Date : 2019-02-28
No. : HMD19010009

Page 64 of 106

Channel separation = 1MHz (>954kHz) (Lowest) (GFSK)

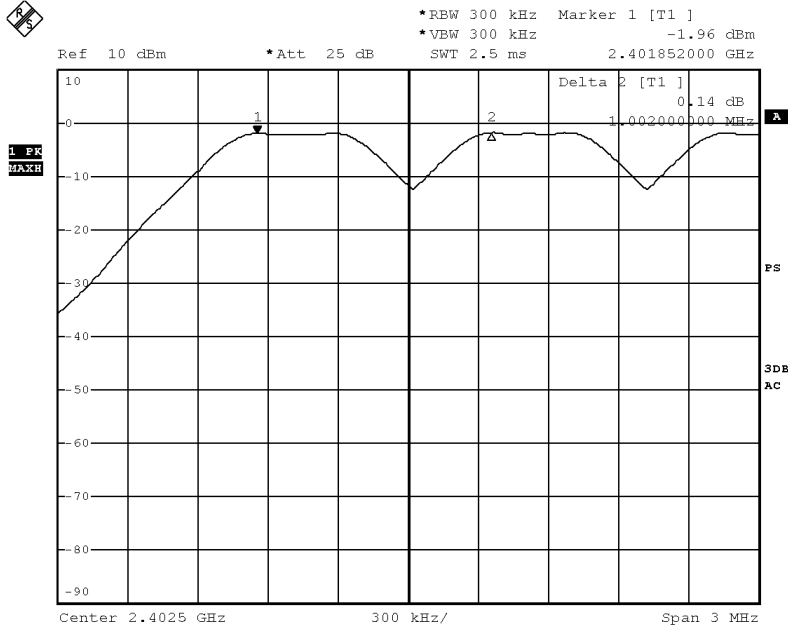

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.


For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



Test Report

Date : 2019-02-28
No. : HMD19010009

Page 65 of 106

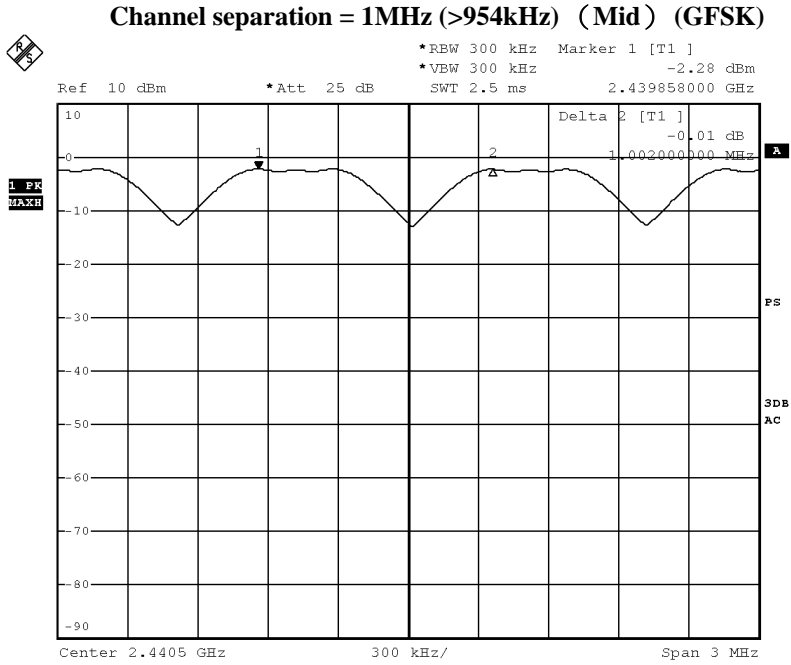

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.


For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



Test Report

Date : 2019-02-28
No. : HMD19010009

Page 66 of 106

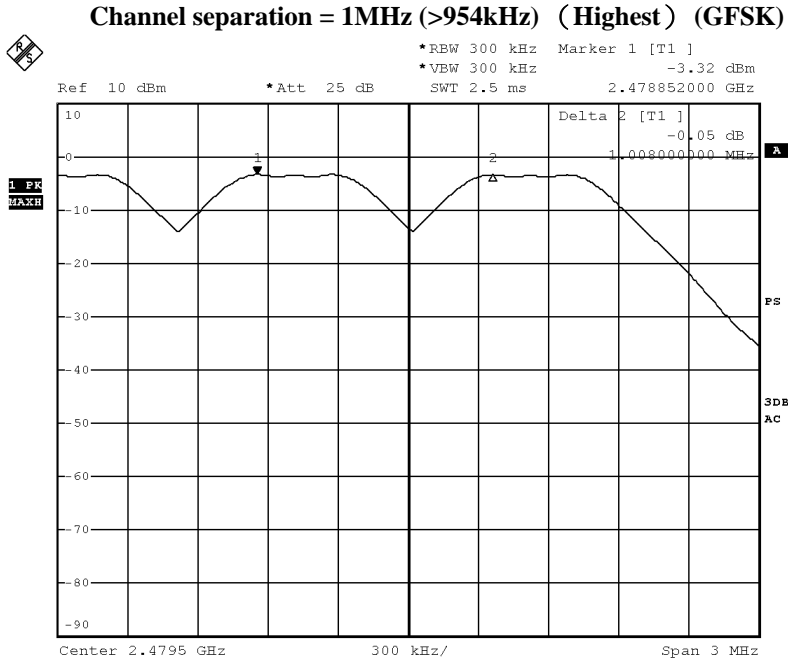




Test Report

Date : 2019-02-28
No. : HMD19010009

Page 67 of 106

Channel separation = 1MHz (>936kHz) (Lowest) ($\pi/4$ DQPSK)

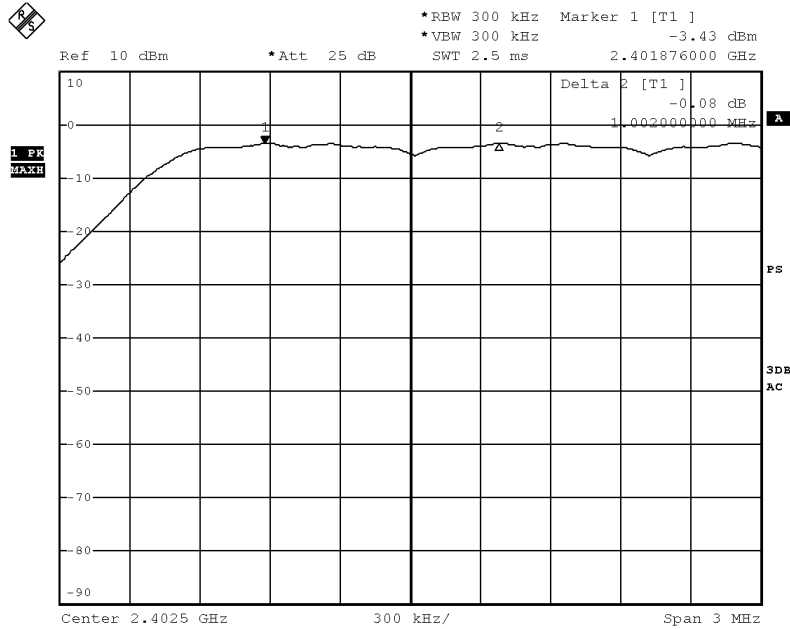

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.


For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



Test Report

Date : 2019-02-28
No. : HMD19010009

Page 68 of 106

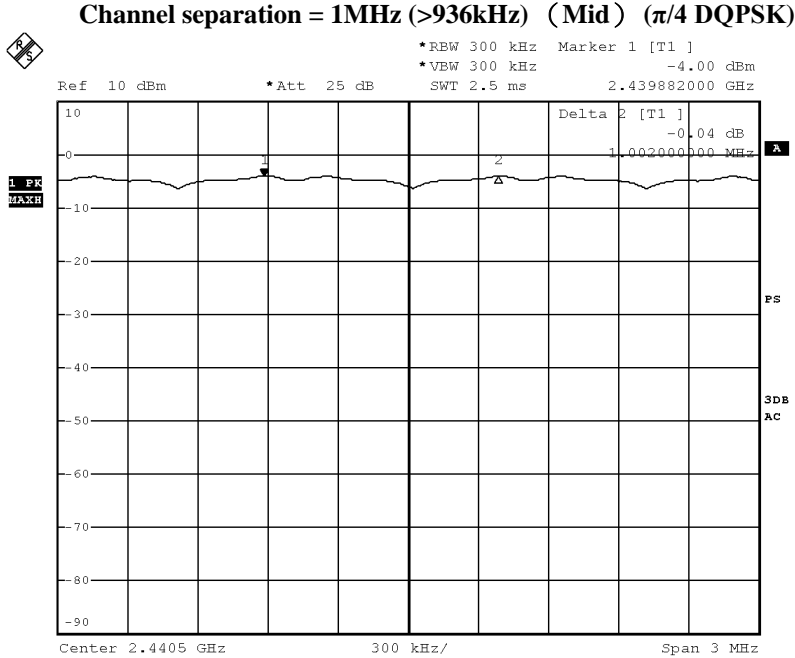




Test Report

Date : 2019-02-28
No. : HMD19010009

Page 69 of 106

Channel separation = 1MHz (>936kHz) (Highest) ($\pi/4$ DQPSK)

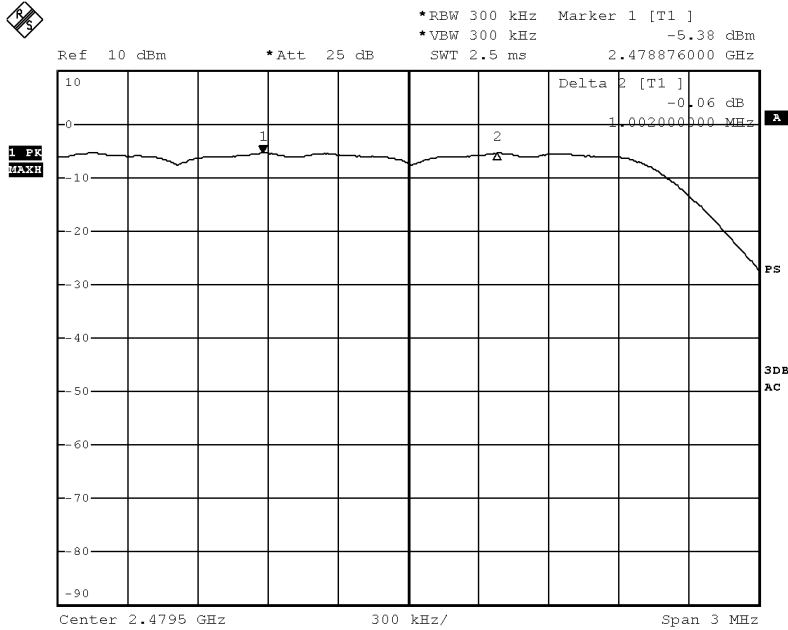

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.




Test Report

Date : 2019-02-28
No. : HMD19010009

Page 70 of 106

Channel separation = 1MHz (>936kHz) (Lowest) (8DPSK)

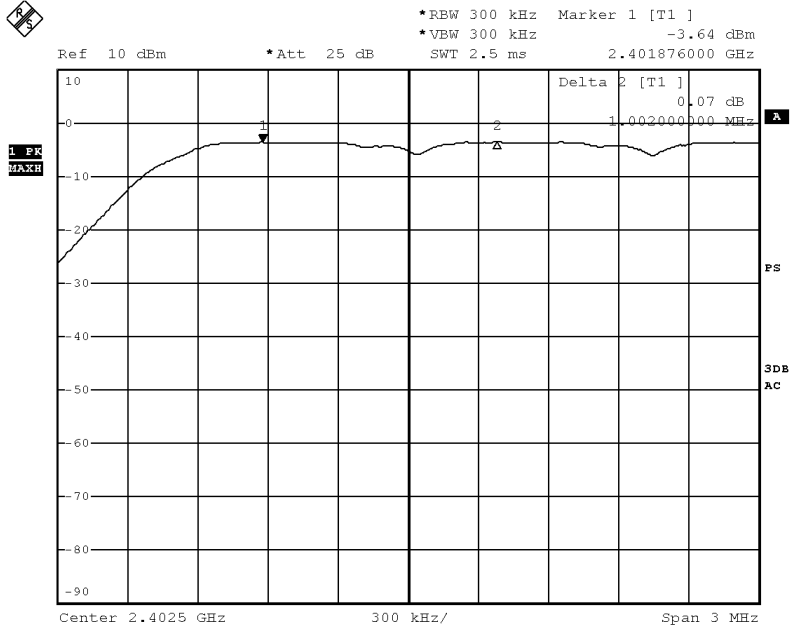

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.


For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



Test Report

Date : 2019-02-28
No. : HMD19010009

Page 71 of 106

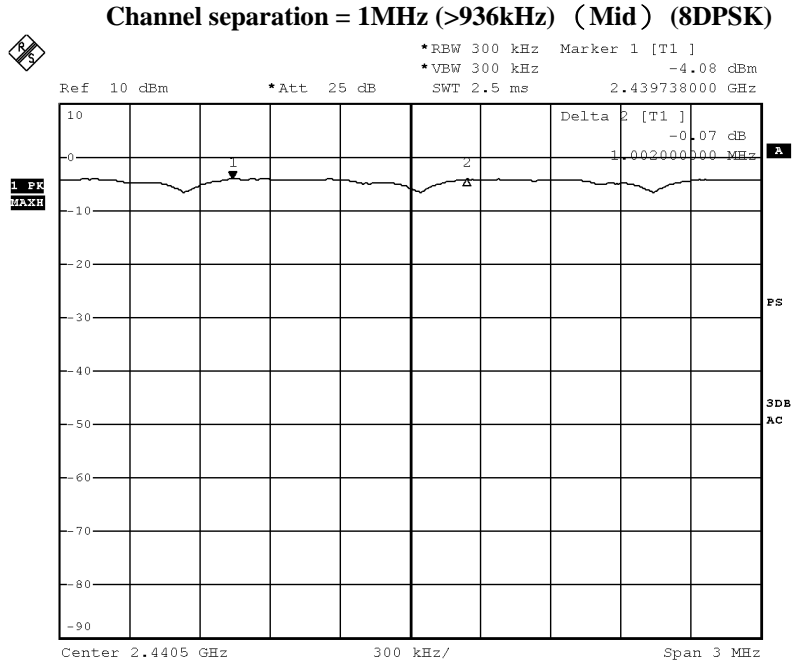

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.




Test Report

Date : 2019-02-28
No. : HMD19010009

Page 72 of 106

Channel separation = 1MHz (>936kHz) (Highest) (8DPSK)

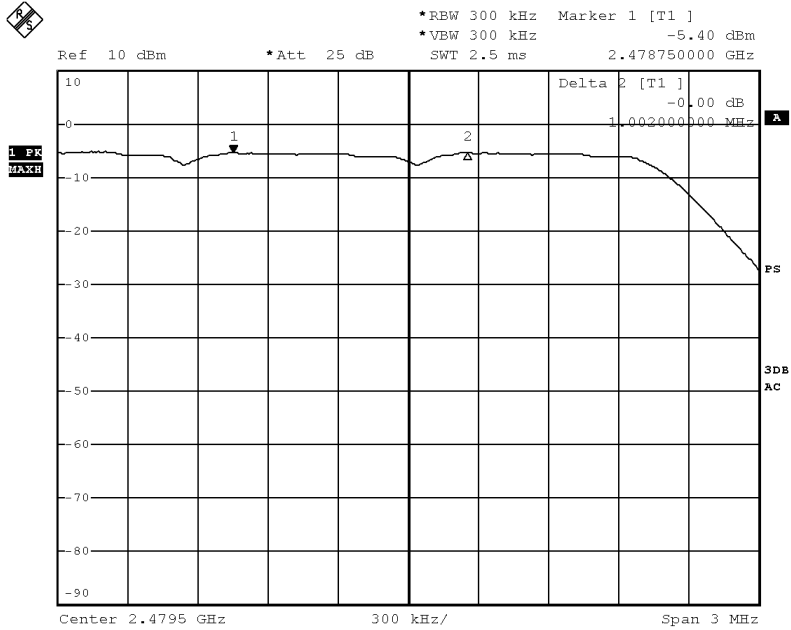

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



Test Report

Date : 2019-02-28
No. : HMD19010009

Page 73 of 106

3.1.7 Band-edge Compliance of RF Conducted Emissions Measurement:

Ambient Temperature: 25°C Relative Humidity: 51% Atmospheric Pressure: 101 kPa

Limit :

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.

According to the test method DA 00-705.

Spectrum Analyzer Setting:

RBW = 100kHz, VBW= 300kHz, Sweep = Coupled,

Span = Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products that fall outside of the authorized band of operation.

Detector = Peak, Trace = Max. hold

Remark: Emissions under the fixed frequency mode and hopping mode have been investigated, the worst-case measurement results were recorded in the test report

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.

Test Report

Date : 2019-02-28
 No. : HMD19010009


Page 74 of 106

Band-edge Compliance of RF Conducted Emissions Measurement:

Band-edge Compliance of RF Emissions – Lowest (GFSK) (Hopping on) Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2358.975000	-57.8	26.8	-30.9	PASS
2358.925000	-58.1	27.2	-30.9	PASS
2382.975000	-58.3	27.3	-30.9	PASS
2383.025000	-58.6	27.6	-30.9	PASS
2366.025000	-58.6	27.6	-30.9	PASS
2398.925000	-58.6	27.7	-30.9	PASS
2398.975000	-58.9	28.0	-30.9	PASS
2326.925000	-59.0	28.1	-30.9	PASS
2332.925000	-59.0	28.1	-30.9	PASS
2312.825000	-59.1	28.1	-30.9	PASS
2366.075000	-59.1	28.2	-30.9	PASS
2370.975000	-59.2	28.3	-30.9	PASS
2398.875000	-59.2	28.3	-30.9	PASS
2321.025000	-59.2	28.3	-30.9	PASS
2312.875000	-59.3	28.3	-30.9	PASS

Band Edge

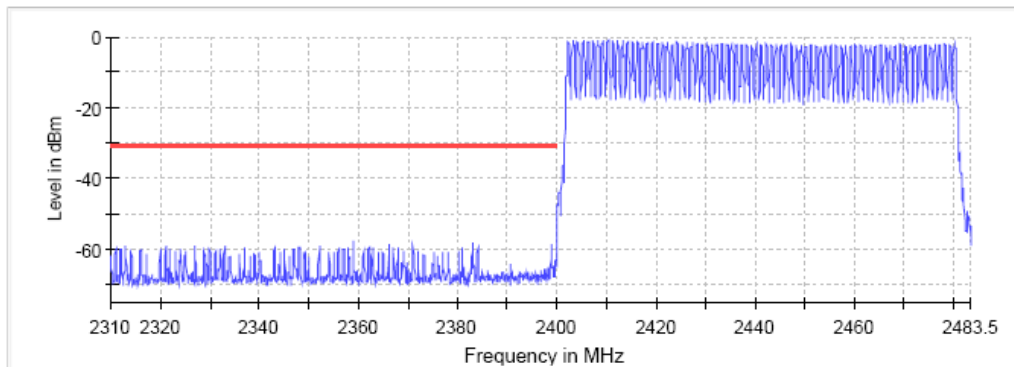



Test Report


Date : 2019-02-28
 No. : HMD19010009

Page 75 of 106

Band-edge Compliance of RF Emissions – Lowest (GFSK) (Hopping off) Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2399.975000	-46.4	15.3	-31.2	PASS
2399.925000	-46.9	15.7	-31.2	PASS
2399.775000	-47.8	16.6	-31.2	PASS
2399.725000	-47.8	16.7	-31.2	PASS
2399.875000	-48.0	16.9	-31.2	PASS
2399.825000	-48.2	17.0	-31.2	PASS
2399.675000	-48.3	17.2	-31.2	PASS
2399.625000	-48.4	17.3	-31.2	PASS
2399.575000	-48.7	17.6	-31.2	PASS
2399.525000	-49.6	18.4	-31.2	PASS
2399.425000	-49.8	18.7	-31.2	PASS
2399.475000	-49.8	18.7	-31.2	PASS
2399.375000	-50.6	19.5	-31.2	PASS
2399.325000	-50.9	19.8	-31.2	PASS
2399.275000	-51.5	20.3	-31.2	PASS

Band Edge

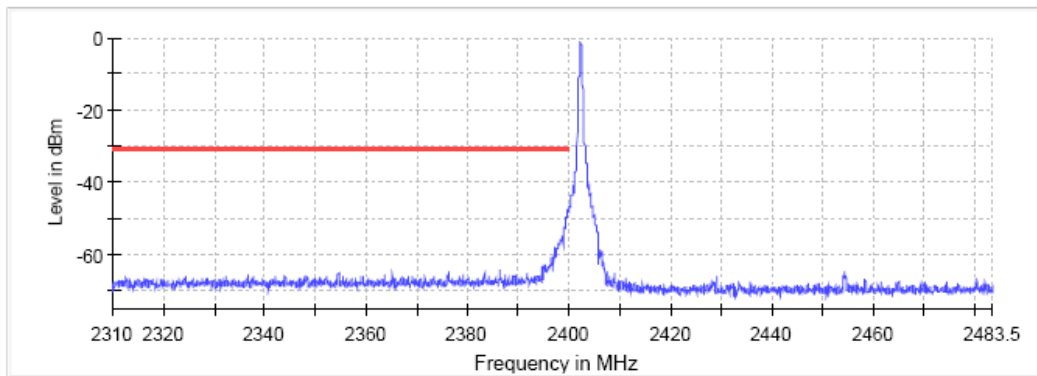

— Limit — Sum Level × Fail



Test Report

Date : 2019-02-28
 No. : HMD19010009


Page 76 of 106

Band-edge Compliance of RF Emissions – Highest (GFSK) (Hopping on)

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2498.625000	-54.8	23.8	-31.0	PASS
2498.575000	-55.0	24.1	-31.0	PASS
2498.475000	-55.1	24.1	-31.0	PASS
2498.525000	-55.1	24.1	-31.0	PASS
2498.425000	-55.9	24.9	-31.0	PASS
2498.675000	-55.9	25.0	-31.0	PASS
2499.575000	-57.0	26.0	-31.0	PASS
2499.525000	-57.1	26.1	-31.0	PASS
2498.375000	-57.3	26.3	-31.0	PASS
2499.675000	-57.4	26.4	-31.0	PASS
2499.625000	-57.4	26.5	-31.0	PASS
2499.725000	-57.7	26.7	-31.0	PASS
2499.475000	-58.9	27.9	-31.0	PASS
2498.325000	-58.9	28.0	-31.0	PASS
2498.725000	-59.7	28.7	-31.0	PASS

Band Edge

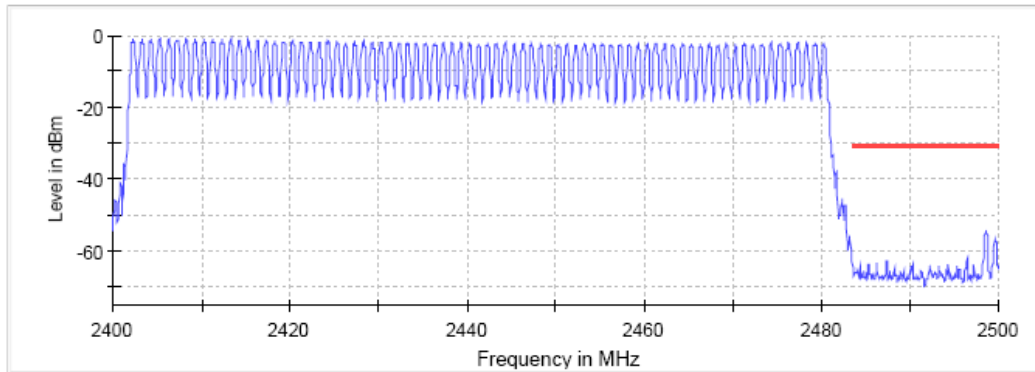

— Limit
 — Sum Level
 × Fail

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.

Test Report

Date : 2019-02-28
 No. : HMD19010009


Page 77 of 106

Band-edge Compliance of RF Emissions – Highest (GFSK) (Hopping off)

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2483.525000	-51.4	19.4	-32.0	PASS
2483.575000	-51.9	20.0	-32.0	PASS
2483.625000	-52.4	20.4	-32.0	PASS
2483.675000	-52.6	20.6	-32.0	PASS
2483.725000	-52.7	20.7	-32.0	PASS
2483.775000	-53.0	21.0	-32.0	PASS
2483.875000	-53.0	21.1	-32.0	PASS
2483.825000	-53.1	21.2	-32.0	PASS
2483.925000	-53.2	21.2	-32.0	PASS
2483.975000	-53.7	21.8	-32.0	PASS
2484.025000	-54.4	22.4	-32.0	PASS
2484.075000	-55.0	23.0	-32.0	PASS
2484.225000	-55.1	23.1	-32.0	PASS
2484.175000	-55.1	23.2	-32.0	PASS
2484.275000	-55.6	23.6	-32.0	PASS

Band Edge

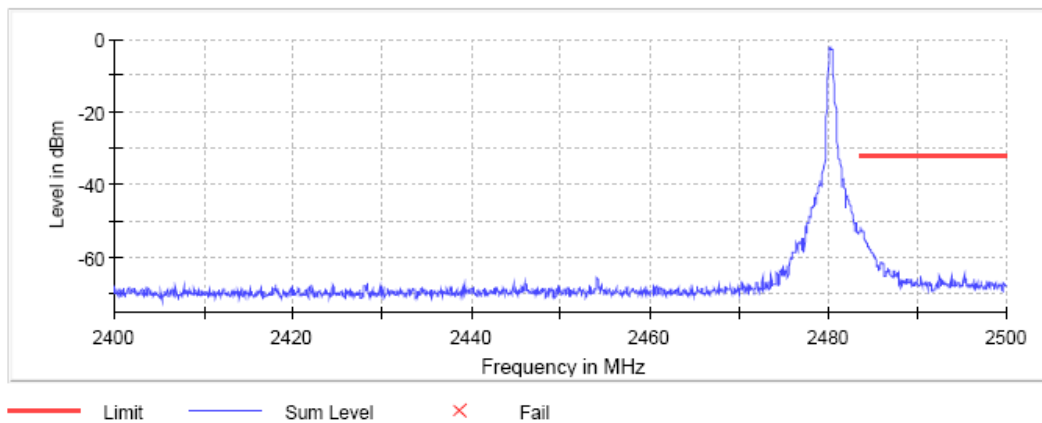



Test Report

Date : 2019-02-28
 No. : HMD19010009


Page 78 of 106

Band-edge Compliance of RF Emissions – Lowest ($\pi/4$ DQPSK) (Hopping on)

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2399.925000	-43.8	11.2	-32.7	PASS
2399.875000	-44.4	11.7	-32.7	PASS
2399.975000	-44.6	12.0	-32.7	PASS
2399.825000	-49.1	16.5	-32.7	PASS
2399.225000	-51.2	18.6	-32.7	PASS
2399.175000	-51.5	18.9	-32.7	PASS
2399.775000	-51.6	18.9	-32.7	PASS
2399.725000	-52.0	19.3	-32.7	PASS
2399.625000	-53.1	20.4	-32.7	PASS
2399.575000	-53.2	20.5	-32.7	PASS
2399.275000	-53.6	20.9	-32.7	PASS
2399.675000	-53.8	21.1	-32.7	PASS
2399.025000	-54.8	22.1	-32.7	PASS
2398.975000	-55.0	22.3	-32.7	PASS
2399.425000	-55.3	22.6	-32.7	PASS

Band Edge

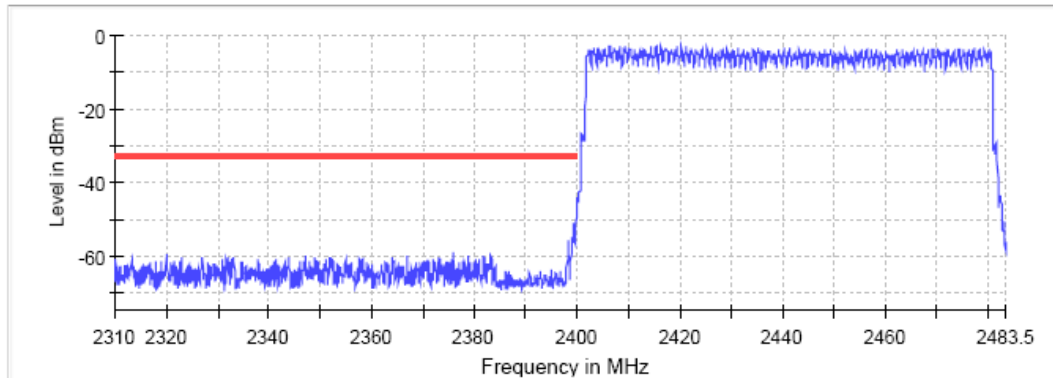

— Limit — Sum Level × Fail

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.

Test Report

Date : 2019-02-28
 No. : HMD19010009


Page 79 of 106

Band-edge Compliance of RF Emissions – Lowest ($\pi/4$ DQPSK) (Hopping off)

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2399.925000	-41.6	9.0	-32.6	PASS
2399.875000	-41.8	9.1	-32.6	PASS
2399.975000	-42.0	9.4	-32.6	PASS
2399.825000	-43.3	10.6	-32.6	PASS
2399.775000	-44.1	11.4	-32.6	PASS
2399.725000	-44.7	12.1	-32.6	PASS
2399.625000	-45.7	13.1	-32.6	PASS
2399.575000	-46.3	13.7	-32.6	PASS
2399.675000	-46.8	14.2	-32.6	PASS
2399.425000	-48.2	15.6	-32.6	PASS
2399.475000	-48.3	15.7	-32.6	PASS
2399.525000	-48.7	16.0	-32.6	PASS
2399.375000	-48.8	16.1	-32.6	PASS
2399.325000	-48.8	16.2	-32.6	PASS
2399.025000	-50.0	17.4	-32.6	PASS

Band Edge

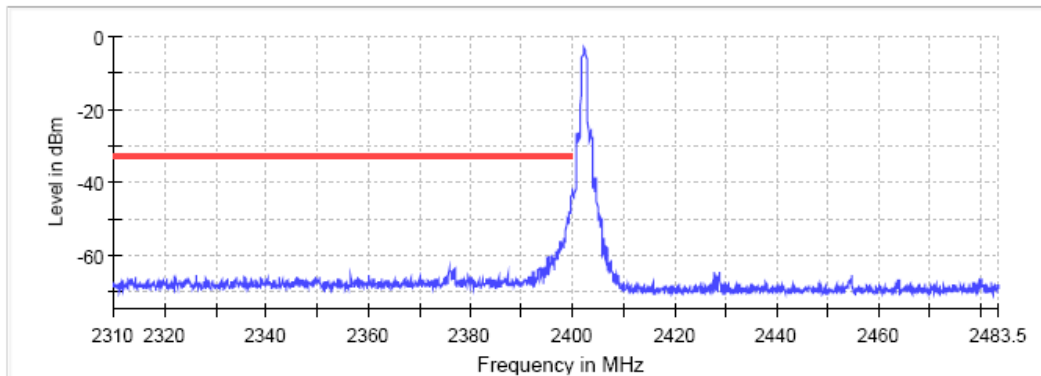

— Limit
 — Sum Level
 × Fail

Test Report

Date : 2019-02-28
 No. : HMD19010009


Page 80 of 106

Band-edge Compliance of RF Emissions – Highest ($\pi/4$ DQPSK) (Hopping on)

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2483.575000	-60.1	27.6	-32.6	PASS
2483.625000	-60.3	27.7	-32.6	PASS
2498.975000	-60.4	27.8	-32.6	PASS
2498.275000	-60.4	27.8	-32.6	PASS
2498.925000	-60.6	28.0	-32.6	PASS
2499.425000	-60.6	28.1	-32.6	PASS
2498.875000	-60.9	28.3	-32.6	PASS
2498.325000	-61.0	28.4	-32.6	PASS
2498.575000	-61.1	28.6	-32.6	PASS
2498.375000	-61.2	28.6	-32.6	PASS
2498.225000	-61.3	28.7	-32.6	PASS
2483.525000	-61.4	28.8	-32.6	PASS
2499.025000	-61.4	28.8	-32.6	PASS
2499.475000	-61.4	28.9	-32.6	PASS
2498.425000	-61.6	29.0	-32.6	PASS

Band Edge

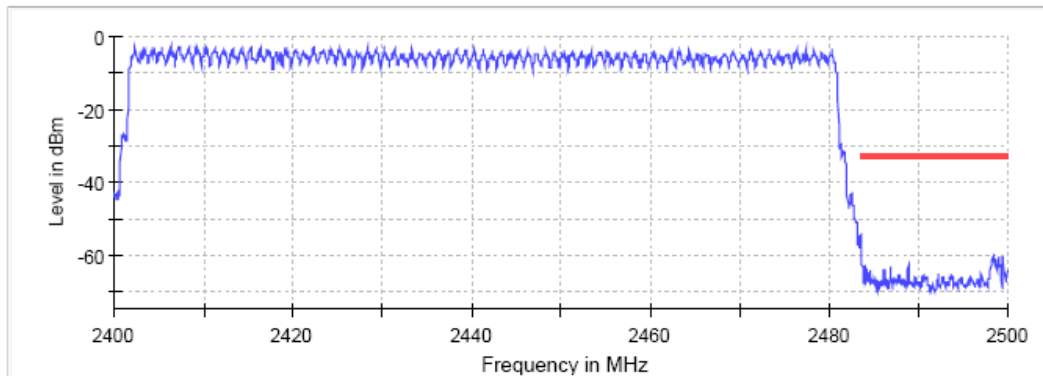

— Limit
 — Sum Level
 × Fail

Test Report

Date : 2019-02-28
 No. : HMD19010009


Page 81 of 106

Band-edge Compliance of RF Emissions – Highest ($\pi/4$ DQPSK) (Hopping off)

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2483.525000	-51.7	18.3	-33.4	PASS
2483.575000	-52.2	18.8	-33.4	PASS
2483.775000	-53.3	20.0	-33.4	PASS
2483.625000	-53.3	20.0	-33.4	PASS
2483.725000	-53.4	20.0	-33.4	PASS
2483.825000	-53.6	20.3	-33.4	PASS
2483.675000	-53.9	20.5	-33.4	PASS
2483.875000	-54.4	21.1	-33.4	PASS
2483.975000	-54.4	21.1	-33.4	PASS
2483.925000	-54.5	21.1	-33.4	PASS
2484.025000	-55.0	21.7	-33.4	PASS
2484.375000	-55.4	22.0	-33.4	PASS
2484.425000	-55.4	22.0	-33.4	PASS
2484.325000	-55.6	22.3	-33.4	PASS
2484.175000	-55.8	22.5	-33.4	PASS

Band Edge

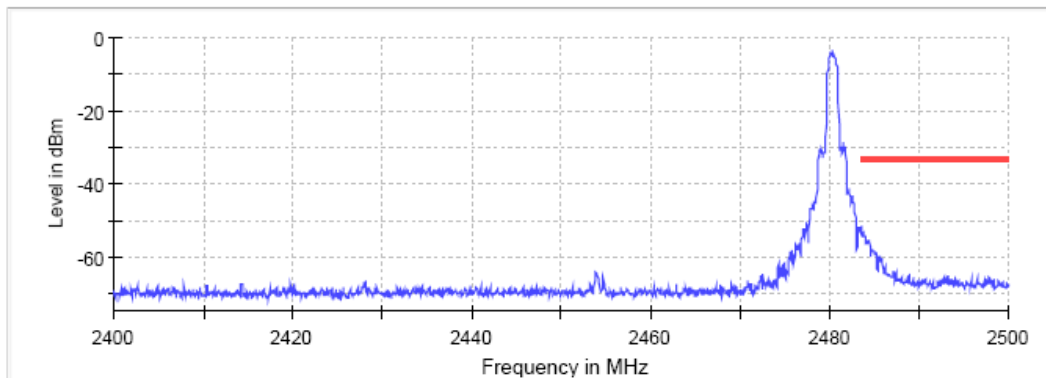

— Limit
 — Sum Level
 × Fail



Test Report

Date : 2019-02-28
 No. : HMD19010009


Page 82 of 106

Band-edge Compliance of RF Emissions – Lowest (8DPSK) (Hopping on)

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2399.775000	-44.6	12.0	-32.7	PASS
2399.825000	-45.2	12.6	-32.7	PASS
2399.875000	-45.3	12.6	-32.7	PASS
2399.725000	-45.4	12.7	-32.7	PASS
2399.925000	-46.3	13.6	-32.7	PASS
2399.975000	-47.2	14.6	-32.7	PASS
2398.925000	-48.2	15.5	-32.7	PASS
2398.975000	-48.5	15.9	-32.7	PASS
2399.025000	-49.6	16.9	-32.7	PASS
2399.675000	-49.7	17.0	-32.7	PASS
2398.875000	-50.4	17.8	-32.7	PASS
2398.825000	-51.4	18.8	-32.7	PASS
2398.775000	-52.4	19.8	-32.7	PASS
2399.625000	-52.8	20.2	-32.7	PASS
2399.075000	-53.0	20.4	-32.7	PASS

Band Edge

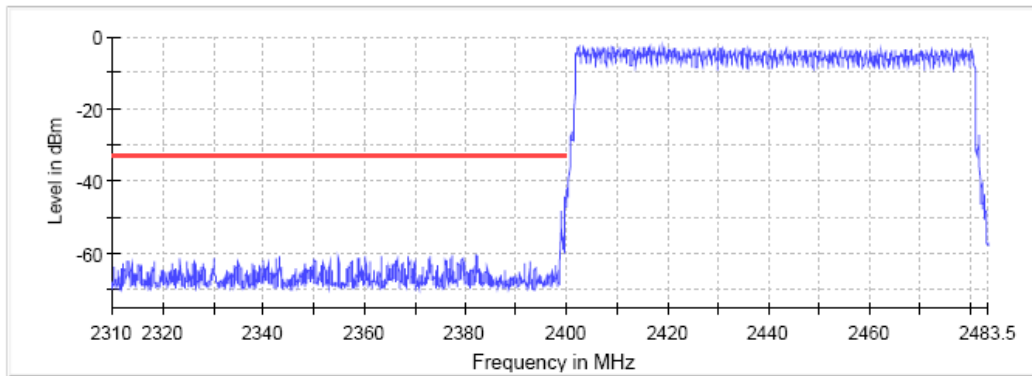

— Limit — Sum Level × Fail

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.

Test Report

Date : 2019-02-28
 No. : HMD19010009


Page 83 of 106

Band-edge Compliance of RF Emissions – Lowest (8DPSK) (Hopping off)

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2399.925000	-39.7	7.1	-32.6	PASS
2399.975000	-39.9	7.2	-32.6	PASS
2399.875000	-40.4	7.8	-32.6	PASS
2399.825000	-40.7	8.0	-32.6	PASS
2399.725000	-41.0	8.4	-32.6	PASS
2399.775000	-41.1	8.5	-32.6	PASS
2399.675000	-44.0	11.3	-32.6	PASS
2399.625000	-46.4	13.7	-32.6	PASS
2398.925000	-47.4	14.8	-32.6	PASS
2398.875000	-48.1	15.5	-32.6	PASS
2399.225000	-48.1	15.5	-32.6	PASS
2398.975000	-48.3	15.7	-32.6	PASS
2399.275000	-48.5	15.8	-32.6	PASS
2399.125000	-48.9	16.3	-32.6	PASS
2399.025000	-48.9	16.3	-32.6	PASS

Band Edge

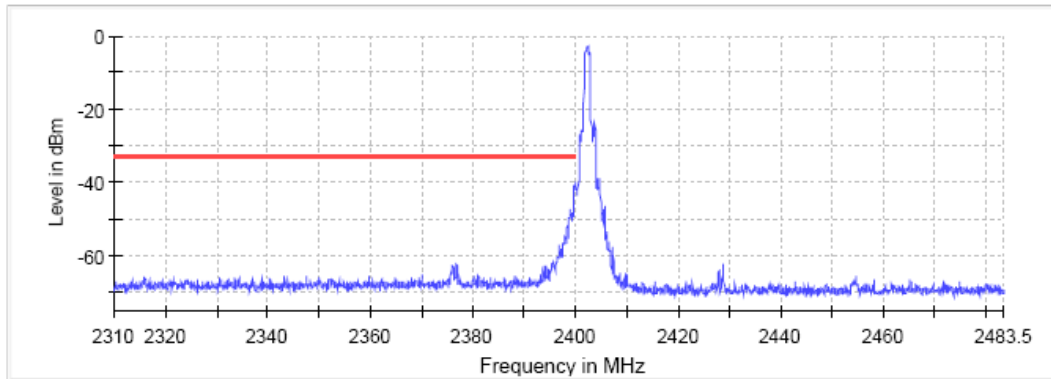

— Limit
 — Sum Level
 × Fail



Test Report

Date : 2019-02-28
 No. : HMD19010009


Page 84 of 106

Band-edge Compliance of RF Emissions – Highest (8DPSK) (Hopping on)

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2498.875000	-57.8	25.1	-32.6	PASS
2498.775000	-57.9	25.3	-32.6	PASS
2498.825000	-58.1	25.5	-32.6	PASS
2498.925000	-58.5	25.9	-32.6	PASS
2498.625000	-58.8	26.2	-32.6	PASS
2498.675000	-58.9	26.3	-32.6	PASS
2498.725000	-59.5	26.9	-32.6	PASS
2498.175000	-60.0	27.4	-32.6	PASS
2498.575000	-60.2	27.6	-32.6	PASS
2499.575000	-60.6	28.0	-32.6	PASS
2499.525000	-60.7	28.1	-32.6	PASS
2498.375000	-60.7	28.1	-32.6	PASS
2498.225000	-60.8	28.2	-32.6	PASS
2499.675000	-61.0	28.3	-32.6	PASS
2483.525000	-61.0	28.4	-32.6	PASS

Band Edge

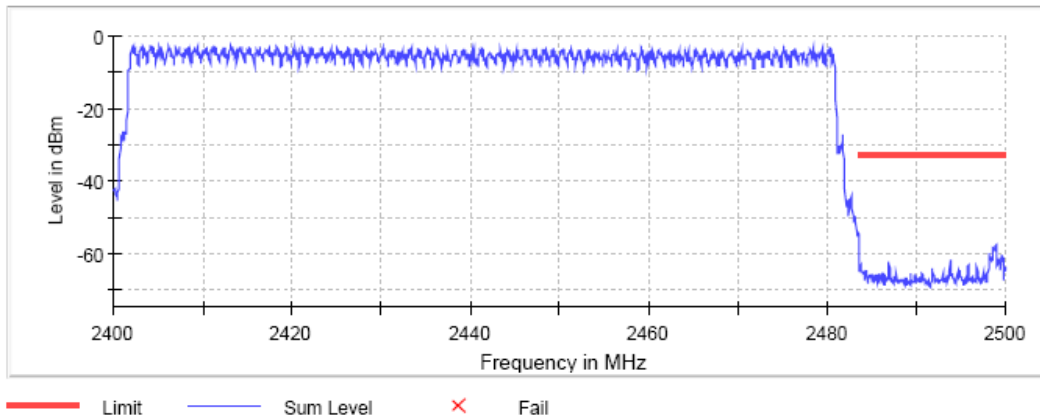

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.

Test Report

Date : 2019-02-28
 No. : HMD19010009


Page 85 of 106

Band-edge Compliance of RF Emissions – Highest (8DPSK) (Hopping off)

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2483.675000	-48.5	15.0	-33.5	PASS
2483.725000	-48.6	15.0	-33.5	PASS
2483.625000	-48.8	15.3	-33.5	PASS
2483.775000	-49.2	15.6	-33.5	PASS
2483.575000	-49.8	16.3	-33.5	PASS
2483.825000	-50.3	16.8	-33.5	PASS
2483.525000	-50.8	17.3	-33.5	PASS
2483.875000	-51.1	17.6	-33.5	PASS
2483.925000	-51.7	18.2	-33.5	PASS
2483.975000	-53.1	19.6	-33.5	PASS
2484.075000	-53.7	20.2	-33.5	PASS
2484.025000	-53.8	20.2	-33.5	PASS
2484.125000	-54.3	20.7	-33.5	PASS
2484.175000	-54.4	20.8	-33.5	PASS
2484.225000	-54.7	21.2	-33.5	PASS

Band Edge

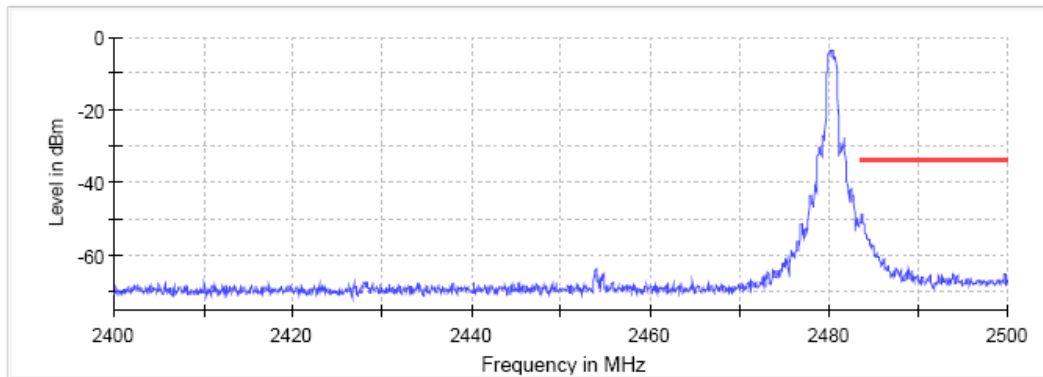

— Limit — Sum Level × Fail

Test Report

Date : 2019-02-28
 No. : HMD19010009

Page 86 of 106


Compliance of RF Conducted Emissions Measurement:

Limit :

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.

Remark: Emissions under the fixed frequency mode and hopping mode have been investigated, the worst-case measurement results were recorded in the test report


Compliance of RF Emissions – (GFSK 2402MHz) (the worst case)

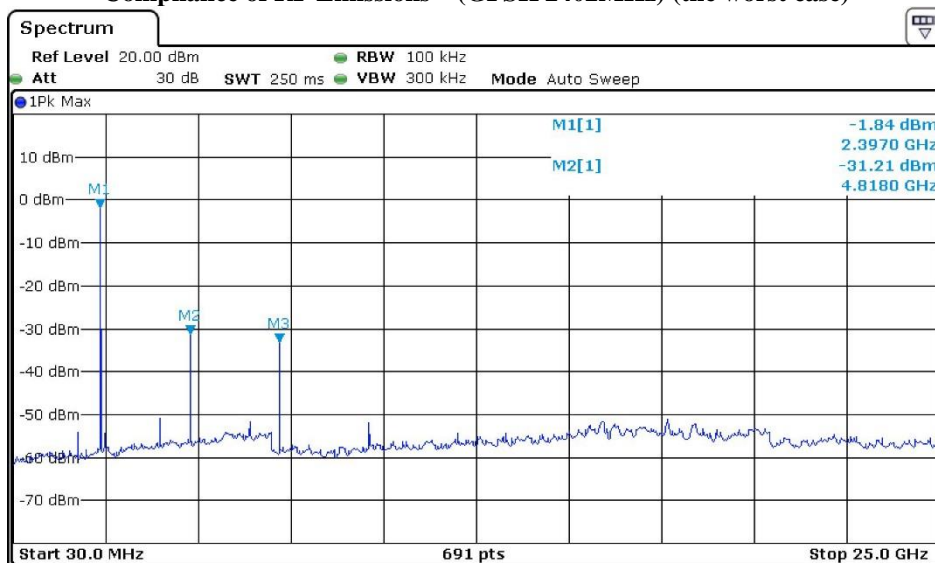


Test Report

Date : 2019-02-28
 No. : HMD19010009

Compliance of RF Emissions – ($\pi/4$ -DQPSK 2402MHz) (the worst case)

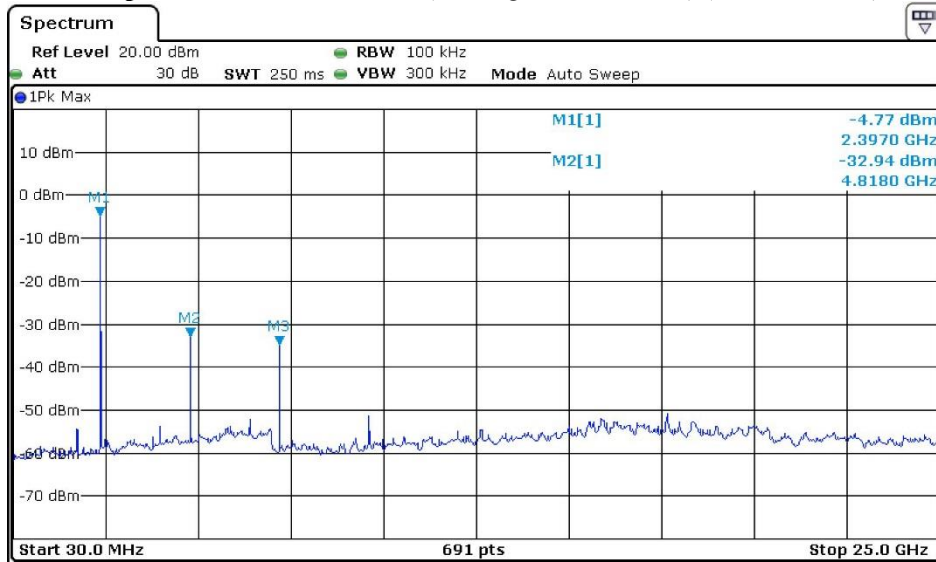

Compliance of RF Emissions – (8DPSK 2402MHz) (the worst case)

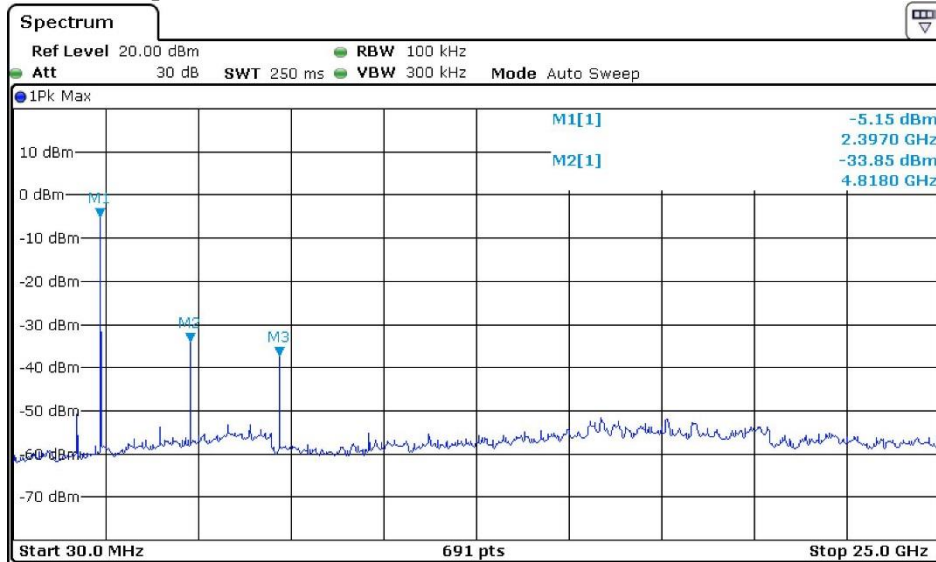



Test Report

Date : 2019-02-28
No. : HMD19010009

Page 88 of 106

3.1.8 Time of Occupancy (Dwell Time)

Ambient Temperature: 25°C Relative Humidity: 51% Atmospheric Pressure: 101 kPa

Requirements:

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channel employed.

No requirements for Digital Transmission System.

Spectrum Analyzer Setting:

RBW = 300kHz, VBW ≥ RBW,

Sweep = A longer sweep time to show two successive hops on a channel,


Span = Zero, Detector = Peak, Trace = Max. hold

Dwell Time = Pulse Duration * hop rate / number of channel * observation duration

Observed duration: 0.4s x 79 = 31.6s

Measurement Data:

Channel Occupied in 8DPSK: 79 of 79 Channel

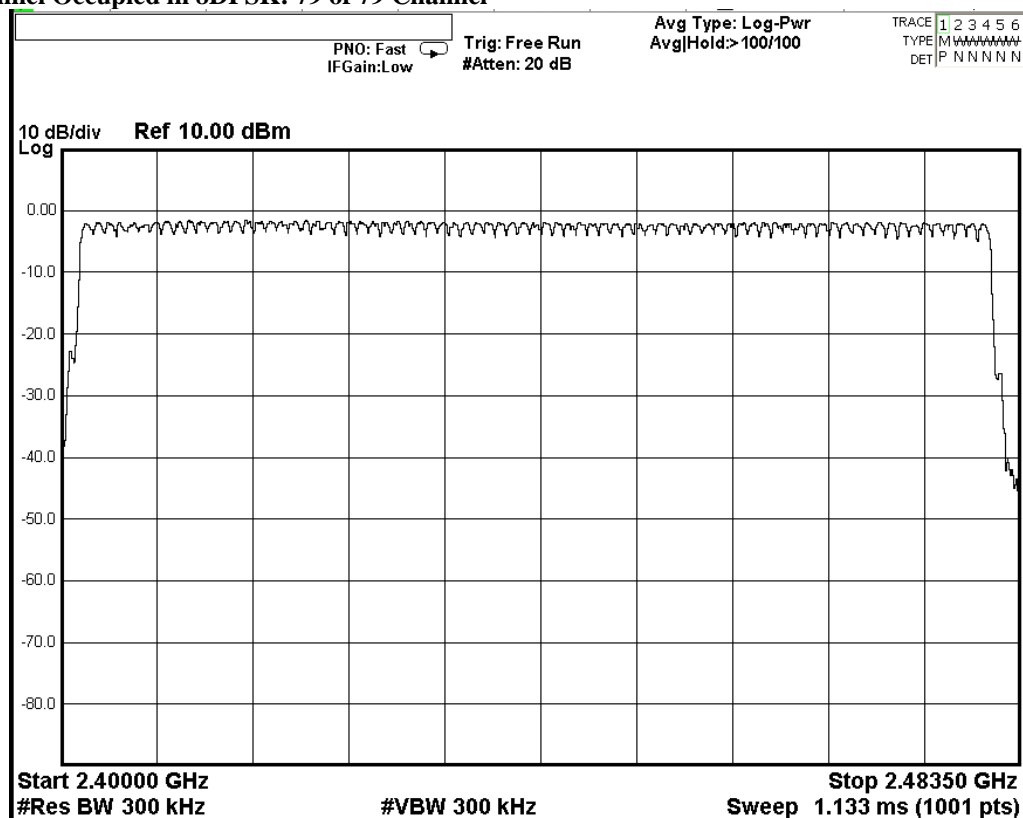

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.

Test Report


Date : 2019-02-28
 No. : HMD19010009

Page 89 of 106

DH5 Packet:

DH5 Packet permit maximum $1600/79/6 = 3.37$ hops per second in each channel (5 time slots RX, 1 time slot TX). The Dwell time is the time duration of the pulse times $3.37 \times 31.6 = 106.6$ within 31.6 seconds

Fig. A
[Pulse duration of Lowest Channel]

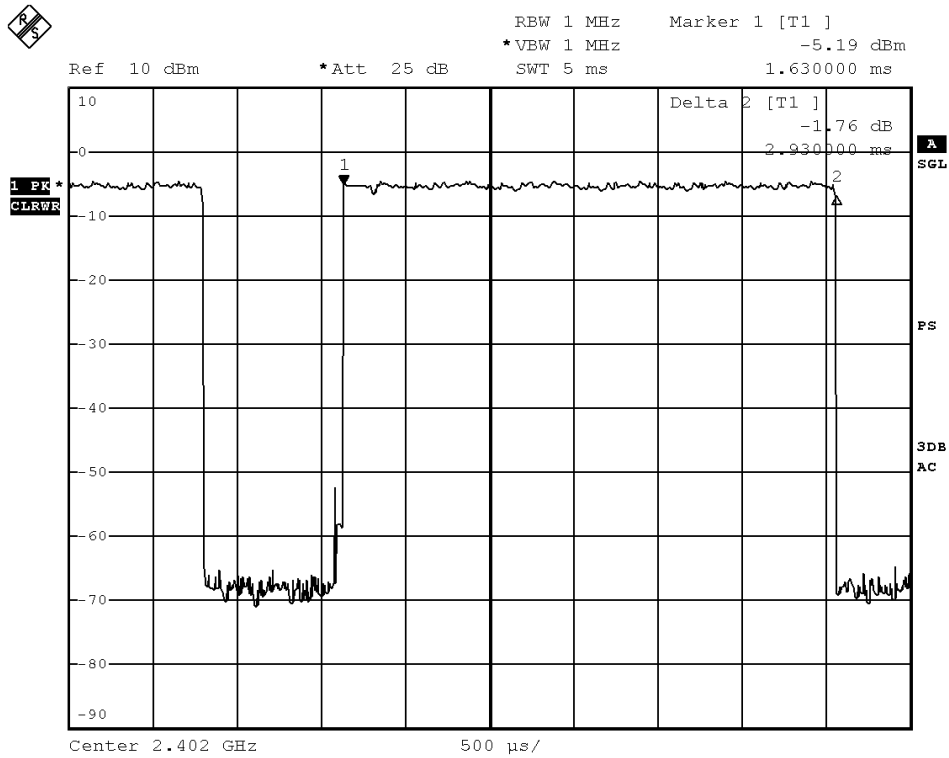




Test Report

Date : 2019-02-28
No. : HMD19010009

Page 90 of 106

Fig. B
[Pulse duration of Middle Channel]

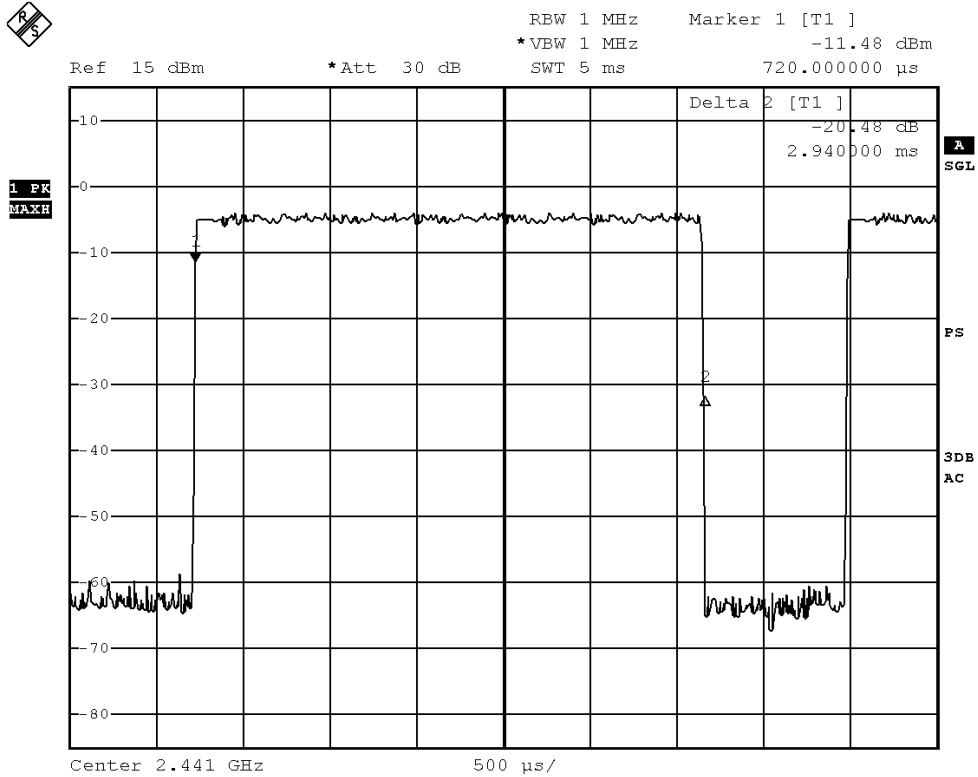

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.


For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.

Test Report

Date : 2019-02-28
 No. : HMD19010009

Page 91 of 106

Fig. C
[Pulse duration of Highest Channel]

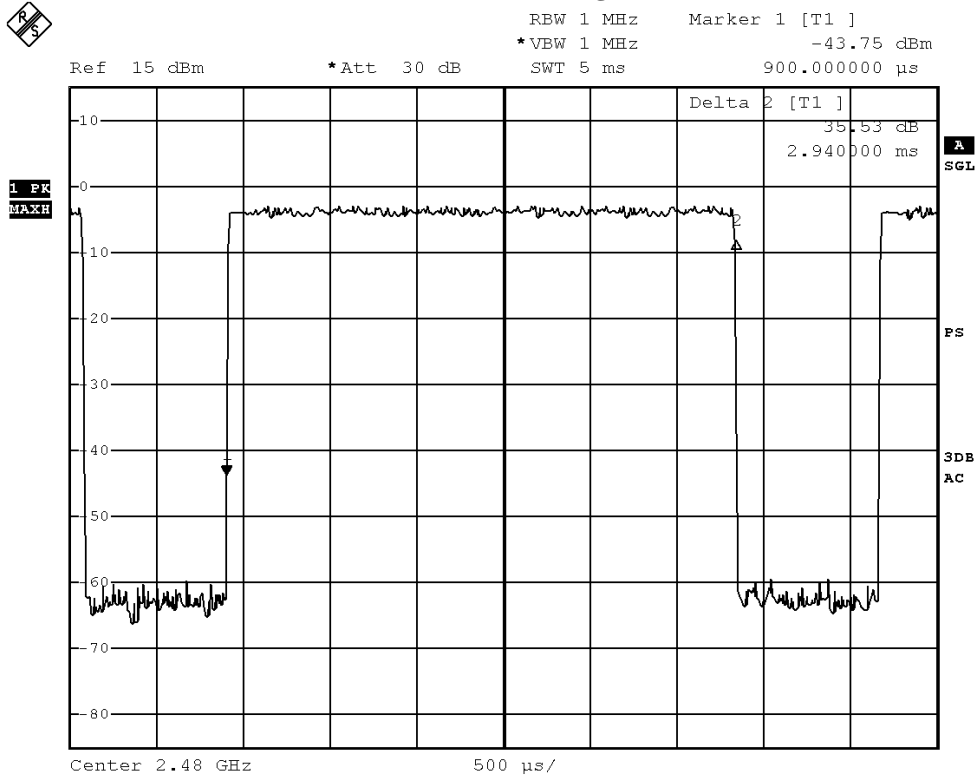

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.

Test Report


Date : 2019-02-28
 No. : HMD19010009

Page 92 of 106

DH3 Packet:

DH3 Packet permit maximum $1600/79/4 = 5.06$ hops per second in each channel (3 time slots RX, 1 time slot TX). The Dwell time is the time duration of the pulse times $5.06 \times 31.6 = 160$ within 31.6 seconds

Fig. D
[Pulse duration of Lowest Channel]

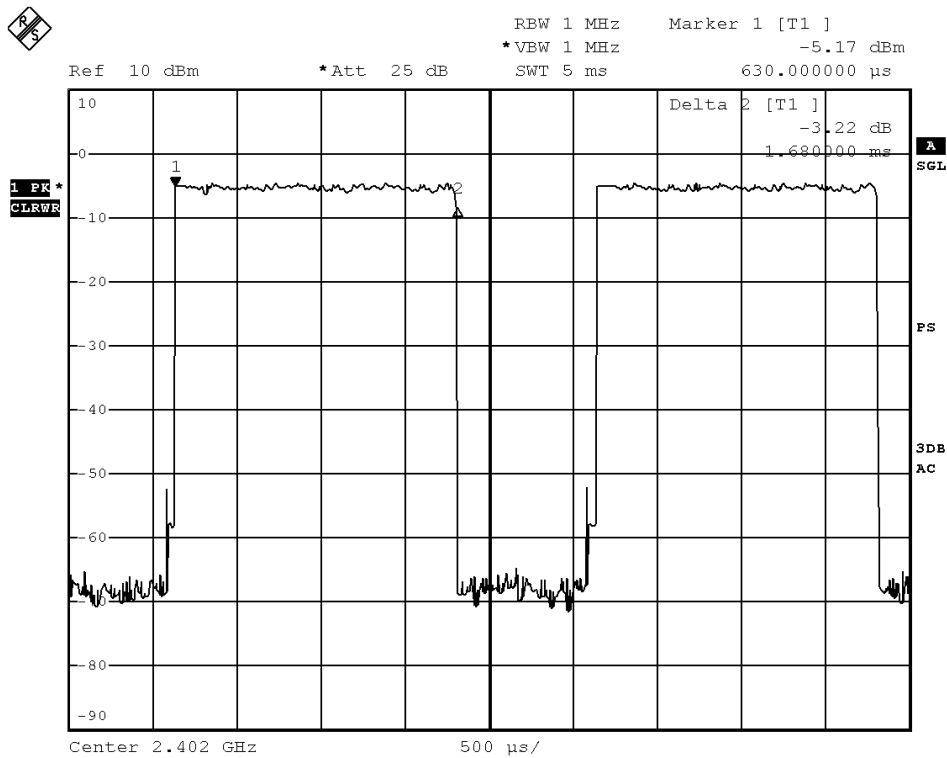


Test Report

Date : 2019-02-28
 No. : HMD19010009

Page 93 of 106

Fig. E
[Pulse duration of Middle Channel]

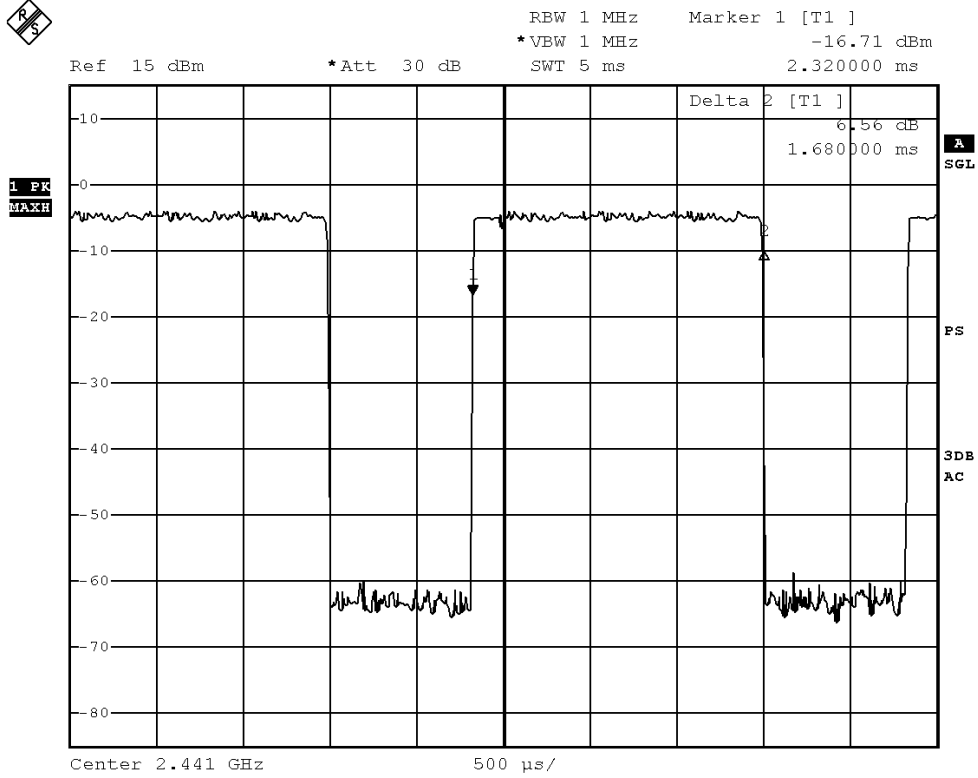


Test Report

Date : 2019-02-28
 No. : HMD19010009

Page 94 of 106

Fig. F
[Pulse duration of Highest Channel]

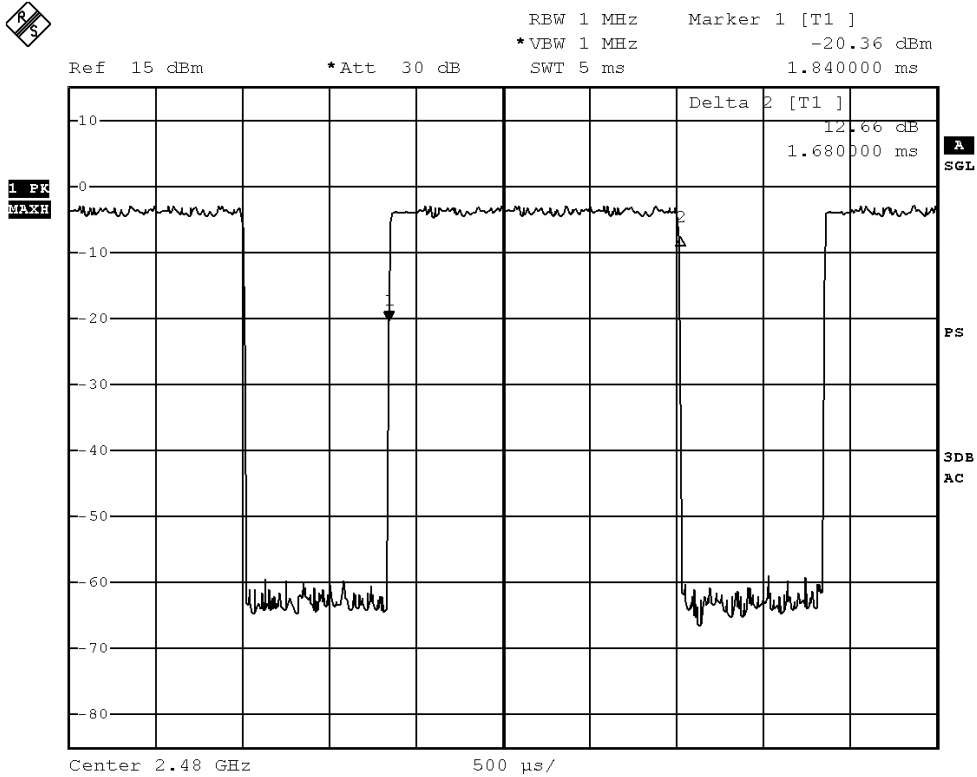

Test Report


Date : 2019-02-28
 No. : HMD19010009

Page 95 of 106

DH1 Packet:

DH1 Packet permit maximum $1600/79/2 = 10.12$ hops per second in each channel (3 time slots RX, 1 time slot TX). The Dwell time is the time duration of the pulse times $10.12 \times 31.6 = 320$ within 31.6 seconds

Fig. G
[Pulse duration of Lowest Channel]

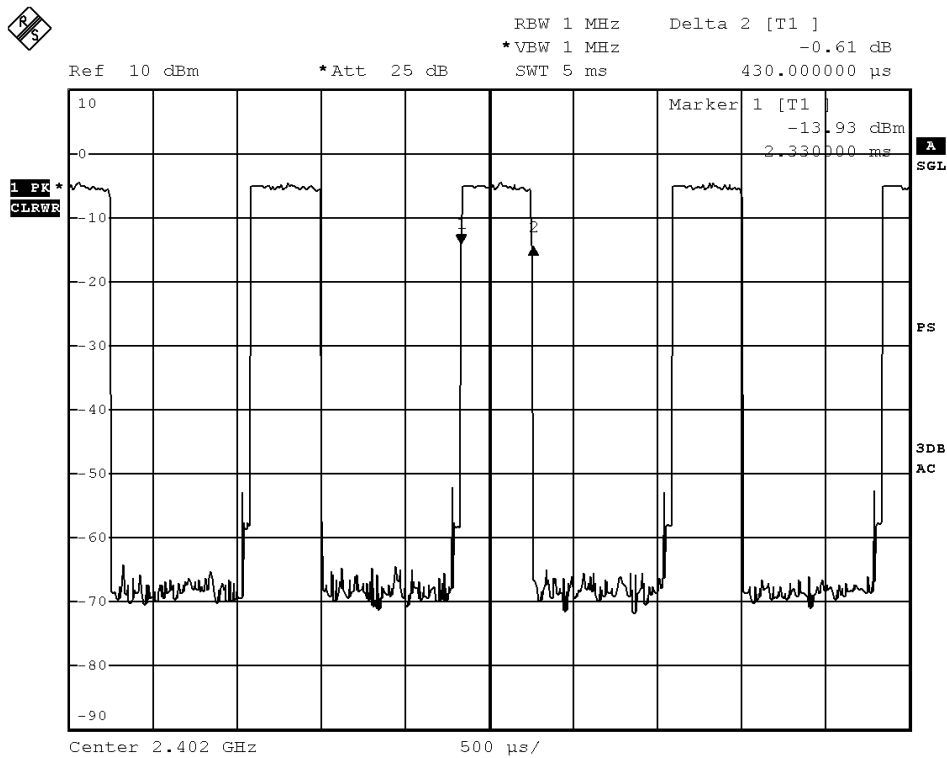

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.


For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.

Test Report

Date : 2019-02-28
 No. : HMD19010009

Page 96 of 106

Fig. H
[Pulse duration of Middle Channel]

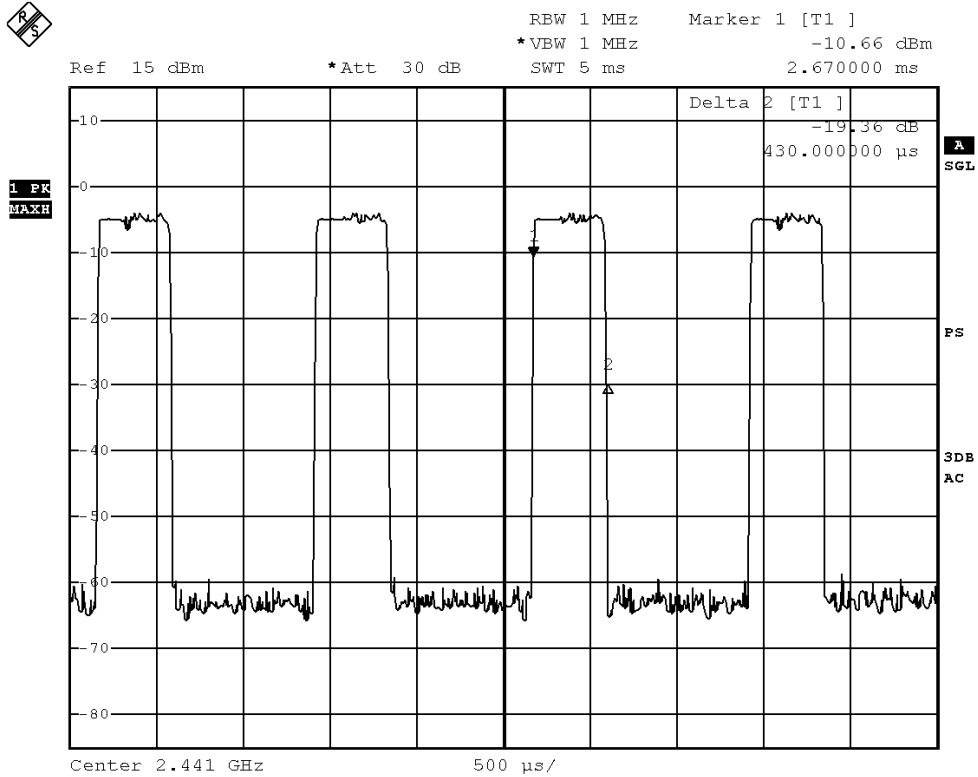


Test Report

Date : 2019-02-28
 No. : HMD19010009

Page 97 of 106

Fig. I
[Pulse duration of Highest Channel]

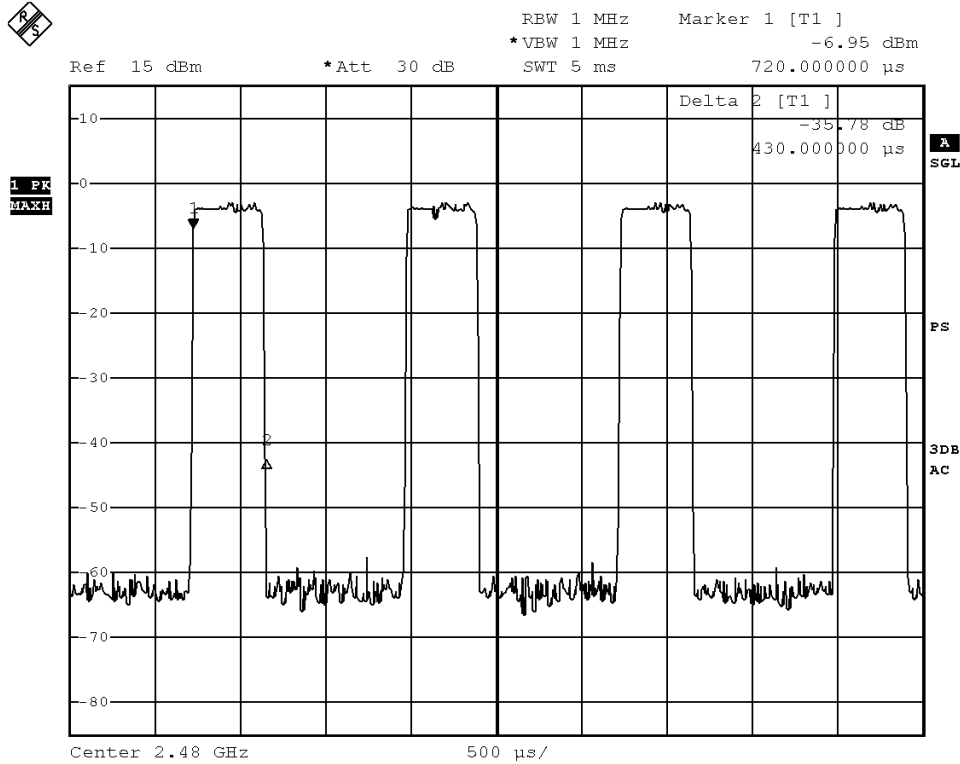

Time of occupancy (Dwell Time):

Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell Time (s)	Limits (s)	Test Results
3DH5	2402	2.930	0.312	0.400	Complies
3DH5	2441	2.940	0.313	0.400	Complies
3DH5	2480	2.940	0.313	0.400	Complies
3DH3	2402	1.680	0.269	0.400	Complies
3DH3	2441	1.680	0.269	0.400	Complies
3DH3	2480	1.680	0.269	0.400	Complies
3DH1	2402	0.430	0.138	0.400	Complies
3DH1	2441	0.430	0.138	0.400	Complies
3DH1	2480	0.430	0.138	0.400	Complies



Test Report

Date : 2019-02-28
No. : HMD19010009

Page 98 of 106

3.1.9 Channel Centre Frequency

Ambient Temperature: 25°C Relative Humidity: 51% Atmospheric Pressure: 101 kPa

Requirements:

Frequency hopping system in the 2400-2483.5MHz band shall use at least 79 (Channel 1 to 79) non-overlapping channels.

The EUT operates in according with the Bluetooth system specification within the 2400 - 2483.5 MHz frequency band.

RF channels for Bluetooth systems are spaced 1 MHz and are ordered in channel number k. In order to comply with out-of-band regulations, a lower frequency guard band of 2.0 MHz and a higher frequency guard band of 3.5MHz is used.

The operating frequencies of each channel are as follows:

First RF channel start from 2400MHz + 2MHz guard band = 2402MHz

Frequency of RF Channel = 2402+k MHz, k = 1,...,79 (Channel separation = 1MHz)



Test Report

Date : 2019-02-28
No. : HMD19010009

Page 99 of 106

3.1.10 Pseudorandom Hopping Algorithm

Ambient Temperature: 25°C Relative Humidity: 51% Atmospheric Pressure: 101 kPa

Requirements:

The channel frequencies shall be selected from a pseudorandom ordered list of hopping frequencies. Each frequency must be used equally by the transmitter.

EUT Pseudorandom Hopping Algorithm

The EUT is a Bluetooth device, the Pseudo-random hopping pattern; hopping characteristics and algorithm are based on the Bluetooth specification.

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



Test Report

Date : 2019-02-28
No. : HMD19010009

Page 100 of 106

3.1.11 Antenna Requirement

Ambient Temperature: 25°C

Relative Humidity: 51%

Atmospheric Pressure: 101 kPa

Test Requirements: § 15.203

Test Specification:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Test Results:

This is PCB antenna. There is no external antenna, the antenna gain = 0dBi. User is unable to remove or changed the Antenna.

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.



Test Report

Date : 2019-02-28
 No. : HMD19010009

Page 101 of 106

Appendix A

List of Measurement Equipment

Radiated Emission

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL
EM215	MULTIDEVICE CONTROLLER	EMCO	2090	00024676	N/A	N/A
EM217	ELECTRIC POWERED TURNTABLE	EMCO	2088	00029144	N/A	N/A
EM218	ANECHOIC CHAMBER	ETS-LINDGREN	FACT-3	--	2018/04/20	2019/04/20
EM356	ANTENNA POSITIONING TOWER	ETS-LINDGREN	2171B	00150346	N/A	N/A
EM354	BICONILOG ANTENNA	ETS-LINDGREN	3143B	00142073	2018/03/29	2020/03/29
EM229	EMI TEST RECEIVER	R&S	ESIB40	100248	2018/06/01	2019/06/01
EM276	BROADBAND HORN ANTENNA	A-INFOMW	JXTXLB-10180-SF	J2031090903007	2018/04/27	2020/04/27
EM300	PYRAMIDAL STANDARD GAIN HORN ANTENNA	ETS-LINDGREN	3160-09	00130130	2018/05/13	2019/05/13
EM301	PYRAMIDAL STANDARD GAIN HORN ANTENNA	ETS-LINDGREN	3160-10	00130988	2018/05/13	2019/05/13
EM302	PRECISION OMNIDIRECTIONAL DIPOLE (1 – 6GHZ)	SEIBERSDORF LABORATORIES	POD 16	161806/L	2018/05/11	2020/05/11
EM303	PRECISION OMNIDIRECTIONAL DIPOLE (6 – 18GHZ)	SEIBERSDORF LABORATORIES	POD 618	6181908/L	2018/05/11	2020/05/11
EM353	LOOP ANTENNA	ETS_LINDGREN	6502	00206533	2018/04/16	2020/04/16
EM045	POWER METER	ROHDE & SCHWARZ	NRVD	843246/028	2018/06/01	2020/06/01

Line Conducted

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL
EM119	LISN	R & S	ESH3-Z5	0831.5518.52	2018/11/09	2019/11/09
EM145	EMI TEST RECEIVER	R & S	ESCS 30	830245/021	2018/06/01	2019/06/01
EM179	IMPULSE LIMITER	ROHDE & SCHWARZ	ESH3-Z2	357-8810.52/54	2019/01/11	2020/01/11
EM154	SHIELDING ROOM	SIEMENS MATSUSHITA COMPONENTS	N/A	803-740-057-99A	2017/02/02	2022/02/02
N/A	MEASUREMENT AND EVALUATION SOFTWARE	ROHDE & SCHWARZ	BSIB-K1	V1.20	N/A	N/A

Remarks:-

CM Corrective Maintenance
 N/A Not Applicable
 TBD To Be Determined

Test Report

Date : 2019-02-28
No. : HMD19010009

Page 102 of 106

Appendix B

Photographs of EUT

View of the product




View of the product




Inside View of the product




Inner Circuit Top View(Power panel "A")

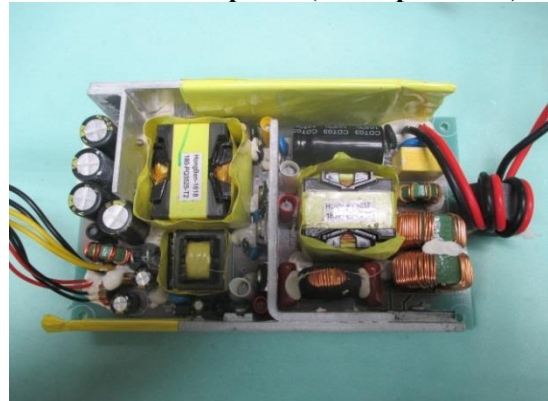

Inner Circuit Bottom View(Power panel "A")

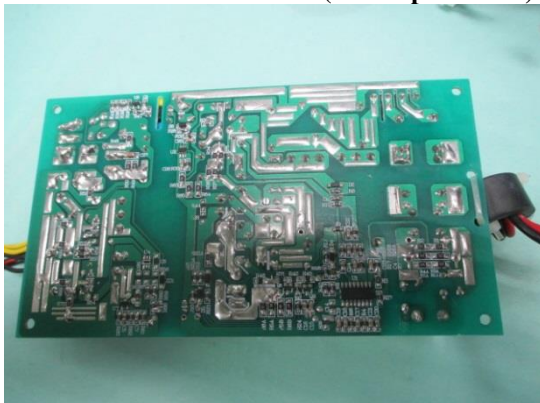

Inner Circuit Top View(Power panel "B")

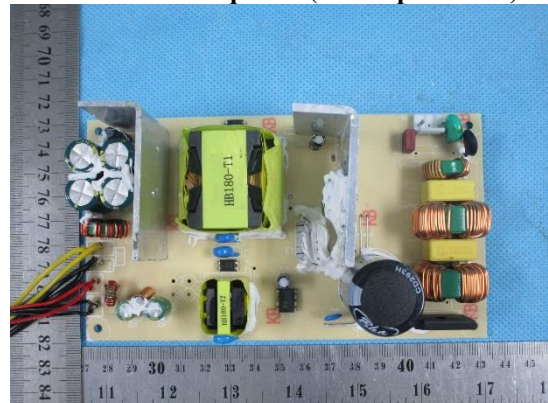


Test Report

Date : 2019-02-28
No. : HMD19010009

Page 103 of 106

Photographs of EUT


Inner Circuit Bottom View(Power panel "B")

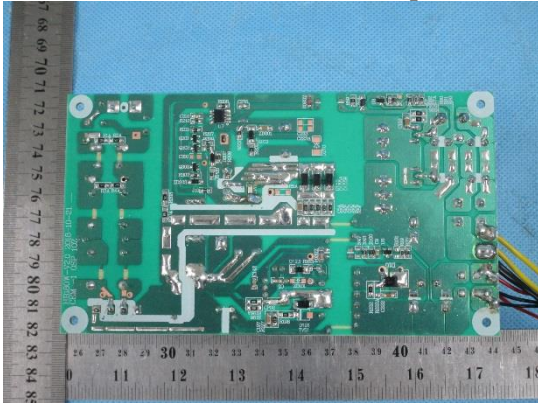


Inner Circuit Top View



Inner Circuit Bottom View

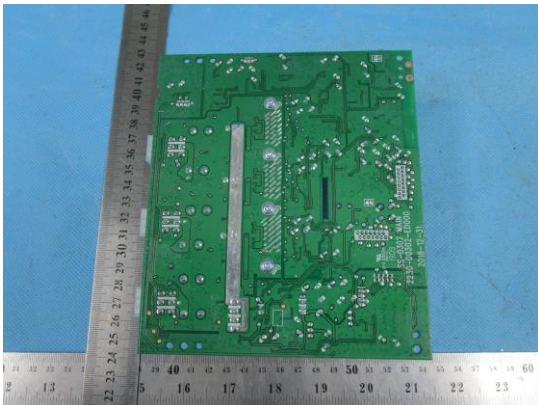

Inner Circuit Top View

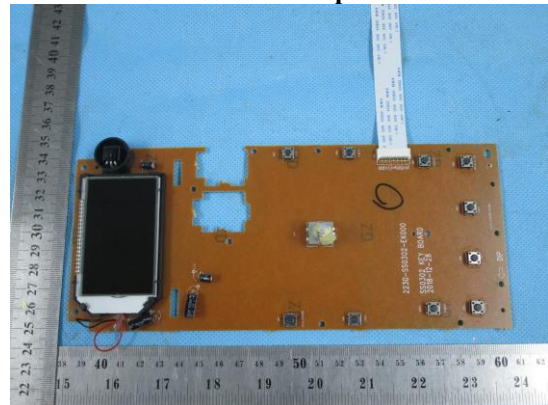

Inner Circuit Bottom View



Test Report

Date : 2019-02-28
No. : HMD19010009

Page 104 of 106

Photographs of EUT

Measurement of Radiated Emission Test Set Up



The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.


For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.

Test Report

Date : 2019-02-28
No. : HMD19010009

Page 105 of 106

Photographs of EUT

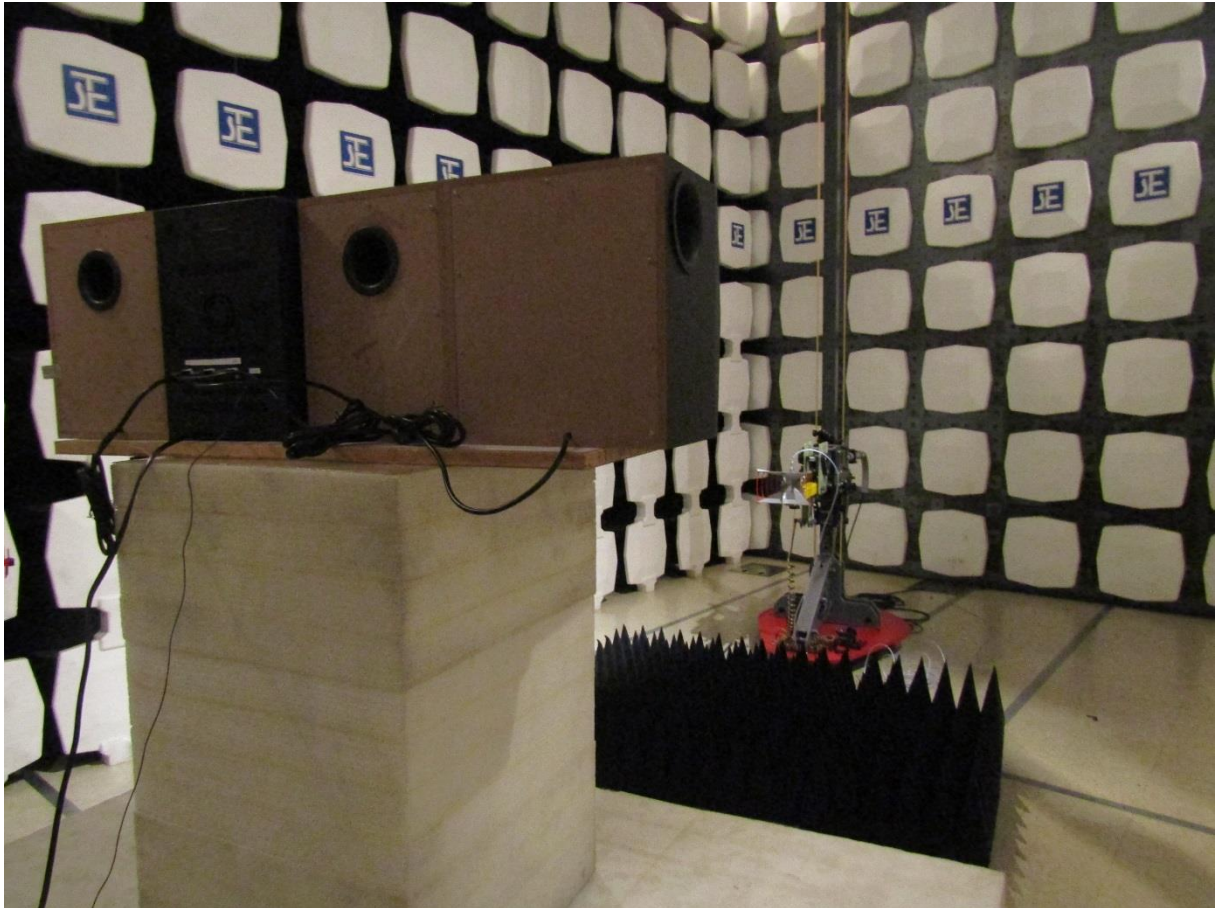

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.

Test Report

Date : 2019-02-28
No. : HMD19010009

Page 106 of 106

Measurement of Conducted Emission Test Set Up



***** End of Test Report *****

The Hong Kong Standards and Testing Centre Limited

10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

For Conditions of Issuance of this test report, please refer to "Conditions of Issuance of Test Reports" section or Website.

Conditions of Issuance of Test Reports

1. All samples and goods are accepted by The Hong Kong Standards & Testing Centre Limited (the “Company”) solely for testing and reporting in accordance with the following terms and conditions. The Company provides its services on the basis that such terms and conditions constitute express agreement between the Company and any person, firm or company requesting its services (the “Clients”).
2. Any report issued by the Company as a result of this application for testing service (the “Report”) shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to his customer, supplier or other persons directly concerned. Subject to clause 3, the Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
3. The Company shall be at liberty to disclose the testing-related documents and/or files anytime to any third-party accreditation and/or recognition bodies for audit or other related purposes. No liabilities whatsoever shall attach to the Company's act of disclosure.
4. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
5. The results in Report apply only to the sample as received and do not apply to the bulk, unless the sampling has been carried out by the Company and is stated as such in the Report.
6. When a statement of conformity to a specification or standard is provided, the ILAC-G8 Guidance document (and/or IEC Guide 115 in the electrotechnical sector) will be adopted as a decision rule for the determination of conformity unless it is inherent in the requested specification or standard, or otherwise specified in the Report.
7. In the event of the improper use the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
8. Sample submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
9. The Company will not be liable for or accept responsibility for any loss or damage howsoever arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
10. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
11. Subject to the variable length of retention time for test data and report stored hereinto as to otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of this test report for a period of three years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after the retention period. Under no circumstances shall we be liable for damages of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.
12. Issuance records of the Report are available on the internet at www.stc.group. Further enquiry of validity or verification of the Reports should be addressed to the Company.