

# FCC Test Report

**Report No:** WD-RF-R-190342-B0

**Product Name** : Time Clock  
**Model Name** : NT8000X-XX(X can be 0~9 or a~z or A~Z or blank)  
**Series Model Name** : NT8000Y-YY(Y can be 0~9 or a~z or A~Z or blank)  
**FCC ID** : 2ASPA NOVATIME-HID  
**Applicant** : NOVAtime Technology, Inc.  
**Received Date** : Feb. 18, 2019  
**Tested Date** : May. 09, 2019 ~ Jun. 26, 2019  
**Applicable Standard** : 47 CFR FCC Part 15, Subpart C (Section 15.247)  
KDB 558074 D01 DTS Meas. Guidance v05  
ANSI C63.10 : 2013



**Wendell Industrial Co., Ltd**  
**Wendell Electrical Testing Lab.**

**Caution:**

This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment.

Please note that the measurement uncertainty are provided for informational purpose only and are not used in determining the Pass/Fail results.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of Wendell Industrial Co., Ltd..

# Test Report

Issued Date: June 26, 2019

Project No.: 19Q021808

<b>Product Name</b>	Time Clock
<b>Trade Name</b>	NOVAtime Technology, Inc.
<b>Model Name</b>	NT8000X-XX(X can be 0~9 or a~z or A~Z or blank)
<b>Series Model Name</b>	NT8000Y-YY(Y can be 0~9 or a~z or A~Z or blank)
<b>FCC ID</b>	2ASPANOVATIME-HID
<b>Applicant</b>	NOVAtime Technology, Inc.
<b>Manufacturer</b>	unitech electronics co., ltd.
<b>EUT Rated Voltage</b>	AC 100 ~ 240V / 50 or 60Hz 、PoE
<b>EUT Test Voltage</b>	AC 120V / 60Hz
<b>EUT Supports Radios Application</b>	WLAN 802.11a/b/g WLAN 802.11n (HT20/HT40) Bluetooth BR/EDR/LE RFID
<b>Applicable Standard</b>	47 CFR FCC Part 15, Subpart C (Section 15.247) KDB 558074 D01 DTS Meas. Guidance v05 ANSI C63.10 : 2013
<b>Output Power</b>	8.90 dBm
<b>Test Result</b>	Complied

Documented :




( Specialist / Emma Lu )

Technical Engineer :



( Deputy Section Manager / Jack Chang )

Approved :



( Project Manager / Gary Wu )

## Table of Contents

<b>Document Revision History .....</b>	<b>5</b>
<b>Summary of Test Result .....</b>	<b>6</b>
<b>1 Generation Information .....</b>	<b>7</b>
1.1 Applicant .....	7
1.2 Manufacturer .....	7
1.3 Description of Equipment under Test .....	7
1.4 Test Mode Applicability And Tested Channel Detail .....	10
1.5 Configuration of Tested System .....	12
1.6 EUT Exercise Software .....	12
1.7 Tested System Details .....	13
1.8 Test Facility .....	14
1.9 Measurement Uncertainty .....	15
1.10 List of Test Equipment .....	16
<b>2 Test Result .....</b>	<b>19</b>
2.1 Antenna Requirement .....	19
2.1.1 Standard Applicable .....	19
2.1.2 Antenna Connected Construction .....	19
2.1.3 Antenna Gain .....	19
2.2 Peak Output Power Measurement .....	20
2.2.1 Limit .....	20
2.2.2 Test Setup .....	20
2.2.3 Test Procedure .....	20
2.2.4 Test Result .....	20
2.3 6dB Bandwidth Measurement .....	21
2.3.1 Limit .....	21
2.3.2 Test Setup .....	21
2.3.3 Test Procedure .....	21
2.3.4 Test Result .....	22
2.4 Power Spectral Density Measurement .....	23
2.4.1 Limit .....	23
2.4.2 Test Setup .....	23
2.4.3 Test Procedure .....	23
2.4.4 Test Result .....	24
2.5 Conducted Band Edges and Spurious Emission Measurement .....	25
2.5.1 Limit .....	25
2.5.2 Test Setup .....	25
2.5.3 Test Procedure .....	25
2.5.4 Test Result .....	26
2.6 Radiated Band Edges and Spurious Emission Measurement .....	29
2.6.1 Limit .....	29
2.6.2 Test Setup .....	30
2.6.3 Test Procedure .....	31
2.6.4 Duty Cycle .....	32
2.6.5 Test Result of Radiated Band Edge Measurement .....	32
2.6.6 Test Result of Radiated Spurious Emission Measurement .....	37
2.7 AC Conducted Emissions Measurement .....	46
2.7.1 Limit .....	46

2.7.2	Test Setup.....	46
2.7.3	Test Procedure.....	47
2.7.4	Test Result .....	48

**Attachment 1: EUT Test Photographs**

**Attachment 2: EUT Detailed Photographs**

## Document Revision History

Report No.	Issue date	Description
WD-RF-R-190342-B0	June 26, 2019	Initial report

## Summary of Test Result

Ref. Std. Clause	Test Items	Result
15.203 15.247(C)	Antenna Requirement	Pass
15.247(b)	Peak Output Power	Pass
15.247(a)(2)	6dB Bandwidth	Pass
15.247(e)	Power Spectral Density	Pass
15.247(d)	Conducted Band Edges and Conducted Spurious Emission	Pass
15.247(d)	Radiated Band Edges and Radiated Spurious Emission	Pass
15.207	AC Conducted Emission	Pass

# 1 Generation Information

## 1.1 Applicant

NOVAtime Technology, Inc.  
9680 Haven Avenue, Suite #200, Rancho Cucamonga, CA 91730

## 1.2 Manufacturer

unitech electronics co., ltd.  
5Fl., No.136, Lane 235, Pao-Chiao Rd., Hsin-Tien Dist, New Taipei City, Taiwan 231, R.O.C.

## 1.3 Description of Equipment under Test

<b>Product Name</b>	Time Clock
<b>Model No.</b>	NT8000X-XX(X can be 0~9 or a~z or A~Z or blank)
<b>Series Model No.</b>	NT8000Y-YY(Y can be 0~9 or a~z or A~Z or blank)
<b>FCC ID</b>	2ASPA NOVATIME-HID
<b>Frequency Range</b>	2402 ~ 2480 MHz
<b>Number of Channels</b>	40CH
<b>Channel separation</b>	2 MHz
<b>Type of Modulation</b>	GFSK(1 Mbps)
<b>Antenna Information</b>	Refer to the table "Antenna List"
<b>EUT Supports Radios Application</b>	WLAN 802.11a/b/g WLAN 802.11n (HT20/HT40) Bluetooth BR/EDR/LE RFID
<b>EUT Rated Voltage</b>	AC 100 ~ 240V / 50 or 60Hz 、PoE
<b>EUT Test Voltage</b>	AC 120V / 60Hz

The EUT uses following adapter.

<b>Trade Name</b>	ENG Electric co., Ltd.
<b>Model No.</b>	6A-601DB12
<b>Input Power</b>	AC 100 ~ 240V / 50 or 60Hz 、PoE
<b>Output Power</b>	DC 12V/5.0A
<b>Power Line</b>	Non-shielded, 1 Core , 1.5m

### Antenna List

No.	Manufacturer	Model No.	Antenna Type	Peak Gain
1	JOYMAX	TBF-UT01MPXX-752	Dipole	5 dBi for 2.4GHz

Remark: The antenna of EUT is conforming to FCC 15.203

### Channel List

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	10	2422	20	2442	30	2462
01	2404	11	2424	21	2444	31	2464
02	2406	12	2426	22	2446	32	2466
03	2408	13	2428	23	2448	33	2468
04	2410	14	2430	24	2450	34	2470
05	2412	15	2432	25	2452	35	2472
06	2414	16	2434	26	2454	36	2474
07	2416	17	2436	27	2456	37	2476
08	2418	18	2438	28	2458	38	2478
09	2420	19	2440	29	2460	39	2480

### Test Frequencies in each operating band

Frequency range over which the device operates in each operating band (Note 1)	Number of test frequencies required	Location of test frequencies inside the operating frequency range (Note 1,2)
$\leq 1$ MHz	1	near centre
$> 1$ MHz and $\leq 10$ MHz	2	1 near high end, 1 near low end
$> 10$ MHz	3	1 near high end, 1 near centre, and 1 near low end

**Note 1:** The frequency range over which the device operates in a given operating band is the difference between the highest and lowest frequencies on which the device can be tuned within that given operating band. The frequency range can be smaller than or equal to the operating band, but cannot be greater than the operating band.

**Note 2:** In the third column of table 1, “near” means as close as possible to or at the centre / low end / high end of the frequency range over which the device operates.



**Firmware / Software Version**

1	Product Name	Time Clock
2	Model No.	NT8000X-XX(X can be 0~9 or a~z or A~Z or blank)
3	Test SW Version	QRCT_ver.3.0.268.0
4	RF power setting in TEST SW	<input checked="" type="checkbox"/> RF power setting was not able to alter during testing. <input type="checkbox"/> RF power setting was able to alter during testing. (See the following table)

**Parameters of test software setting**

Type of Modulation	Channel	Frequency (MHz)	Set Value
GFSK(1Mbps)	00	2402	Default
	19	2440	Default
	39	2480	Default

## 1.4 Test Mode Applicability And Tested Channel Detail

1. This device is a Time Clock with a built-in Wi-Fi 、Bluetooth and RFID transceiver.
2. Main model: NT8000X-XX (X can be 0~9 or a~z or A~Z or blank), series model: NT8000Y-YY (Y can be 0~9 or a~z or A~Z or blank). The difference lies in the fingerprint recognizer function.
3. The EUT supports "Power over Ethernet" and "Adapter", the worst case is the adapter power supply. The final test mode selects the adapter power and records it in the report.
4. FCC ID: 2ASPA NOVATIME-EM, 2ASPA NOVATIME-HID and 2ASPA NOVATIME-OEM use the same WIFI and Bluetooth modules, be used platform Time Clock, the platform is used identical internal printed circuit board layouts, have a common design and components, differ only in the 125kHz and 13.56MHz modular.
5. These tests were performed on a sample of equipment to demonstrate compliance with 47 CFR FCC Part 15, Subpart C (Section 15.247).
6. Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports.
7. The worst case was found when positioned on X axis for radiated emission. Following test modes were selected for the final test, and the final worst case is recorded in the report:

EUT Configure Mode	RE < 1G	RE ≥ 1G	ACM	ACP	Description
--	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Transmit BLE
--	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Normal Link

**Note :** RE<1G: Radiated Emission below 1GHz

RE≥1G: Radiated Emission above 1GHz

ACM: Antenna Port Conducted Measurement

ACP: AC Power Line Conducted Emission

Following channel(s) was (were) selected for the final test as listed below:

### Radiated Spurious Emission Measurement(Below 1GHz):

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
--	BLE	0 ~ 39	19	GFSK	1

### Radiated Spurious Emission Measurement(Above 1GHz):

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
--	BLE	0 ~ 39	0, 19, 39	GFSK	1

### Radiated Band Edge Emission Measurement(Above 1GHz):

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
--	BLE	0 ~ 39	0, 39	GFSK	1

**Peak Output Power, 6dB Bandwidth, Power Spectral Density, Conducted Spurious Emission:**

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
--	BLE	0 ~ 39	0, 19, 39	GFSK	1


**Conducted Band Edges:**

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
--	BLE	0 ~ 39	0, 39	GFSK	1

**AC Conducted Emission:**

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
--	BLE	0 ~ 39	19	GFSK	1

## 1.5 Configuration of Tested System

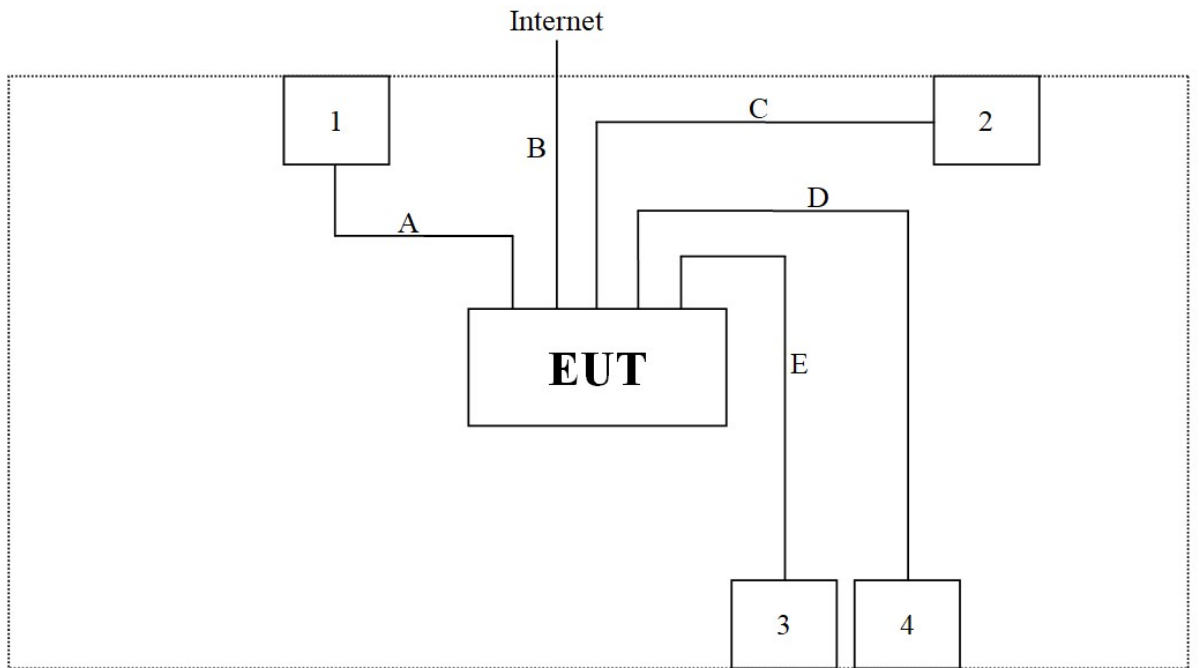

Test Table

## 1.6 EUT Exercise Software

1. Setup the EUT as shown in Section 1.5
2. Execute software "QRCT\_ver.3.0.268.0".
3. Configure the test mode, the test channel, and the data rate.
4. Press "OK" to start the continuous transmit.
5. Verify that the EUT works properly.

## 1.7 Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

No.	Product	Manufacturer	Model No.	Serial No.	Power Cord
1	Adapter	ENG Electric co., Ltd.	6A-601DB12	N/A	Non-shielded, 1 Core, 1.5m
2	Notebook PC	acer	N16Q1	NXVF4TA023742254147600	Non-shielded, 1 Core, 0.8m
3	USB Keyboard	Lemel	5105U	G6450015686	Non-shielded, Non-Core, 1.5m
4	USB Mouse	Lemel	M83	201707K31002387	Non-shielded, Non-Core, 1.5m

No.	Signal Cable Type	Signal cable Description
A	Power Cable	Non-shielded, 1 Core, 1.5m
B	LAN Cable	Non-shielded, Non-Core, 10m
C	USB Cable	Shielded, Non-Core, 1m
D	USB Mouse	Non-shielded, Non-Core, 1.5m
E	USB Keyboard	Non-shielded, Non-Core, 1.5m

## 1.8 Test Facility

Items	Required (IEC 60068-1)	Actual
Temperature (°C)	15-35	25
Humidity (% RH)	25-75	65
Barometric pressure (mbar)	860-1060	1001

**Description:** Accredited by TAF

Accredited Number: 2965

**Issued by:** Wendell Industrial Co., Ltd

**Lab Address:** 6F/6F-1, No.188, Baoqiao Rd., Xindian Dist.,  
New Taipei City 23145, Taiwan R.O.C

**Test Lab:** Wendell Electrical Testing Lab.

**Test Location:** No.67-9, Shimen Rd., Tucheng Dist.,  
New Taipei City 236, Taiwan R.O.C

**FCC Accreditation Number:** TW2965

**FCC Designation Number:** TW1118

## 1.9 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence (level based on a coverage factor K=2)

Measurement Project	Measuring Range	Expended Uncertainty
AC Conducted Emission	0.150 ~ 30 MHz	2.9 dB
Radiated Emission	0.009 ~ 30 MHz	3.8 dB
	30 ~ 1000 MHz	3.5 dB
	1000 ~ 18000 MHz	3.7 dB
	18000 ~ 40000 MHz	3.8 dB
Unwanted Emission Strength Measurement	1000 ~ 6000 MHz	2.5 dB
RF Power, Conducted	1000 ~ 6000 MHz	1.3 dB
Occupied Bandwidth	1000 ~ 6000 MHz	3 %
Power Density	1000 ~ 6000 MHz	1.4 dB
Duty Cycle	1000 ~ 6000 MHz	2.4 %
DC Power Supply	0.5 ~ 30 V	1.7 %
Temperature	15 ~ 30 °C	0.8 °C
Humidity	40 ~ 80 %	3.8 %

**Note:** Please note that the measurement uncertainty are provided for informational purpose only and are not used in determining the Pass/Fail results.

## 1.10 List of Test Equipment

### For Conducted measurements / RF Conducted Measurement Room

Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
✓ Spectrum analyzer	Keysight	N9010A	MY54200737	2018/10/24	2019/10/23
✓ Wideband Peak Power Meter	Anritsu	ML2495A	1733007	2018/10/25	2019/10/24
✓ Pulse Power Sensor + Precision Adaptor	Anritsu	MA2411B	1726022	2018/10/25	2019/10/24
Temperature Chamber	TAICHY	MHK-225LK	1061121	2019/4/29	2020/4/28
Wireless Connectivity Tester	R&S	CMW270	101307	2019/4/24	2020/4/23
✓ Attenuator	MVE	MVE2211-10	CT-9-056	2018/8/6	2019/8/5
Attenuator	MVE	MVE2211-20	CT-9-057	2018/8/6	2019/8/5
Attenuator	MVE	MVE2211-30	CT-9-058	2018/8/6	2019/8/5
Power Divider	MVE	MVE8546	170826003	2018/8/9	2019/8/8
Power Splitter	MVE	MVE8547	170302047	2018/8/9	2019/8/8
DC Power Supply	GW INSTEK	GPC-3060D	GER817636	2018/8/9	2019/8/8

#### Remark:

1. All equipments are calibrated every one year.
2. The test instruments marked with “✓” are used to measure the final test results.



**For AC Conduction measurements / Conducted Room**

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
✓	EMI Test Receiver	R&S	ESR3	102309	2019/5/16	2020/5/15
✓	2-Line V-Network LISN	R&S	ENV216	101185	2019/5/20	2020/5/19
✓	LISN	SCHWARZBECK	NSLK 8127RC	05028	2019/5/20	2020/5/19
✓	Transient Limiter	EM Electronics Corporation	EM-7600	857	2019/5/16	2020/5/15
✓	50ohm Cable	EMCI	EMCCFD300-BM-BM-5000	170613	2019/5/16	2020/5/15
✓	50 ohm terminal impedance	HUBER+SUHNER	50 ohm terminal impedance	CT-1-109-1	2019/5/13	2020/5/12

**Remark:**

1. All equipments are calibrated every one year.
2. The test instruments marked with “✓” are used to measure the final test results.
3. Test Software version: FARAD EZ-EMC Ver.EMC-CON 3A1

**For Radiated measurements / 9x6x6 Semi Anechoic Room**

Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
✓ Spectrum Analyzer	Keysight	N9010A	MY52220228	2019/4/25	2020/4/24
✓ EMI Receiver	Keysight	N9038A	MY51210173	2018/12/5	2019/12/4
✓ Pre-Amplifier	EMEC	EMC330	060668	2018/10/16	2019/10/15
✓ Pre-Amplifier	EMCI	EMC051845SE	980525	2018/10/11	2019/10/10
✓ Pre-Amplifier	EMCI	EMC184045SE	980515	2018/10/10	2019/10/9
✓ Pre-Amplifier	EMEC	EM01G18G	060648	2018/10/11	2019/10/10
✓ Cable	EMEC	EM-CB400	105060103	2018/10/18	2019/10/17
✓ Cable	EMEC	EM-CB400	105060102	2018/10/18	2019/10/17
✓ Cable	EMEC	EM-CB400	105060101	2018/10/18	2019/10/17
✓ Cable	EMCI	EMC102-KM-KM-600	170637	2018/10/10	2019/10/9
✓ Cable	HUBER+SUHNER	SF102	MY2751/2	2018/10/10	2019/10/9
✓ Cable	EMCI	EMC102-KM-KM-3000	170635	2018/10/10	2019/10/9
✓ Loop Antenna	EMCI	LPA600	277	2018/4/19	2020/4/18
✓ TRILOG super broad Antenna	Schwarzbeck	VULB 9168	VULB 9168-700 & 1421	2018/10/19	2019/10/18
✓ Horn Antenna	Schwarzbeck	BBHA 9120D	01557	2018/10/9	2019/10/8
✓ Horn Antenna	Schwarzbeck	BBHA 9170	703	2018/10/11	2019/10/10
✓ RF Filter	EMEC	BRF-2400-2500	002	2018/10/10	2019/10/9
RF Filter	EMEC	BRF-5150-5350	104	2018/10/10	2019/10/9
RF Filter	EMEC	BRF-5470-5725	092	2018/10/10	2019/10/9
RF Filter	EMEC	BRF-5725-5875	091	2018/10/10	2019/10/9
✓ RF Filter	EMEC	HPF-2800	002	2018/10/10	2019/10/9
RF Filter	EMEC	HPF-5850	059	2018/10/10	2019/10/9

**Remark:**

1. The test instruments marked with “✓” are used to measure the final test results.
2. Test Software version: FARAD EZ-EMC Ver.WD-03A1-1

## 2 Test Result

### 2.1 Antenna Requirement

#### 2.1.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

An intentional radiator shall be designed to ensure that no antenna other than as furnished by the responsible party shall be used with the device. If transmitting antennas of directional gain greater than 6dBi are using the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi, for compliance to FCC 47CFR 15.247 (c) requirements.

#### 2.1.2 Antenna Connected Construction

Non-standard antenna connector is used.

#### 2.1.3 Antenna Gain


No.	Manufacturer	Model No.	Antenna Type	Peak Gain
1	JOYMAX	TBF-UT01MPXX-752	Dipole	5 dBi for 2.4GHz

## 2.2 Peak Output Power Measurement

### 2.2.1 Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 1W. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

### 2.2.2 Test Setup



### 2.2.3 Test Procedure

1. Enable the EUT transmit continuously.
2. Let EUT be connected to the power meter, and record the max. reading.
3. Measurement using a gated RF average power meter, since this measurement is made only during the ON time of the transmitter, no duty cycle correction is required.

### 2.2.4 Test Result

Protocol	Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Result
BLE	00	2402	8.90	≤ 30	Pass
	19	2440	8.10	≤ 30	Pass
	39	2480	8.12	≤ 30	Pass

Remark:


1. Peak Power = Reading value on power meter + cable loss
2.  $10 \log(X/\text{mW}) = \text{dBm}$ ,  $X=1$  watt (Limit)  
1 watt = 30 dBm

## 2.3 6dB Bandwidth Measurement

### 2.3.1 Limit

The minimum 6 dB bandwidth shall be at least 500 kHz.

### 2.3.2 Test Setup



### 2.3.3 Test Procedure

1. Enable the EUT transmit continuously.
2. Spectrum analyzer set:
  - a) RBW = 100 kHz
  - b) VBW  $\geq$  3 RBW
  - c) Detector = peak
  - d) Sweep time = auto couple
  - e) Trace mode = max hold.

### 2.3.4 Test Result

Protocol	Channel	Frequency (MHz)	6dB BW (kHz)	Limit (kHz)	Result
BLE	00	2402	674.700	$\geq 500$	Pass
	19	2440	677.500		Pass
	39	2480	678.000		Pass




## 2.4 Power Spectral Density Measurement

### 2.4.1 Limit

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

### 2.4.2 Test Setup




### 2.4.3 Test Procedure

1. Enable the EUT transmit continuously.
2. Spectrum analyzer set:
  - a)  $RBW = 3 \text{ kHz} \sim 100 \text{ kHz}$
  - b)  $VBW \geq 3 \text{ RBW}$
  - c)  $\text{Span} = 1.5 \text{ times DTS Channel 6dB Bandwidth}$
  - d) Detector = peak
  - e) Sweep time = auto couple
  - f) Trace mode = max hold.

## 2.4.4 Test Result

Protocol	Channel	Frequency (MHz)	PSD (dBm)	Limit (dBm)	Result
BLE	00	2402	-14.635	$\leq 8$	Pass
	19	2440	-15.085		Pass
	39	2480	-15.287		Pass

Remark: PSD = Reading value on spectrum analyzer + cable loss

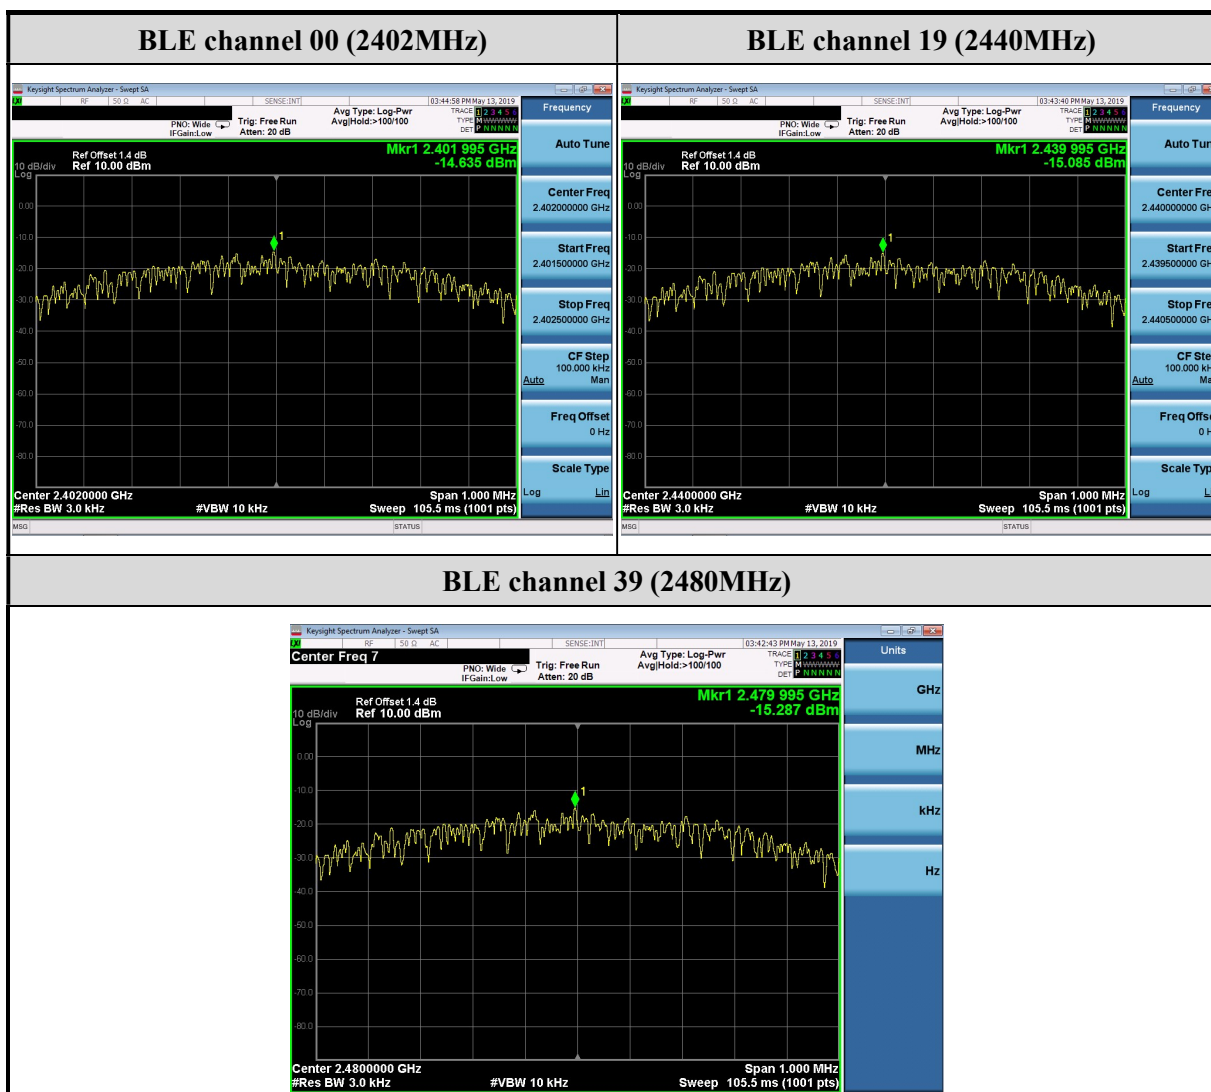



## 2.5 Conducted Band Edges and Spurious Emission Measurement

### 2.5.1 Limit

In any 100 KHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in must also comply with the radiated emission limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB

### 2.5.2 Test Setup




### 2.5.3 Test Procedure

1. Enable the EUT transmit continuously.
2. Spectrum analyzer set :
  - a) RBW = 100 kHz
  - b) VBW  $\geq$  3 RBW
  - c) Detector = peak
  - d) Sweep time = auto couple
  - e) Trace mode = max hold.

## 2.5.4 Test Result



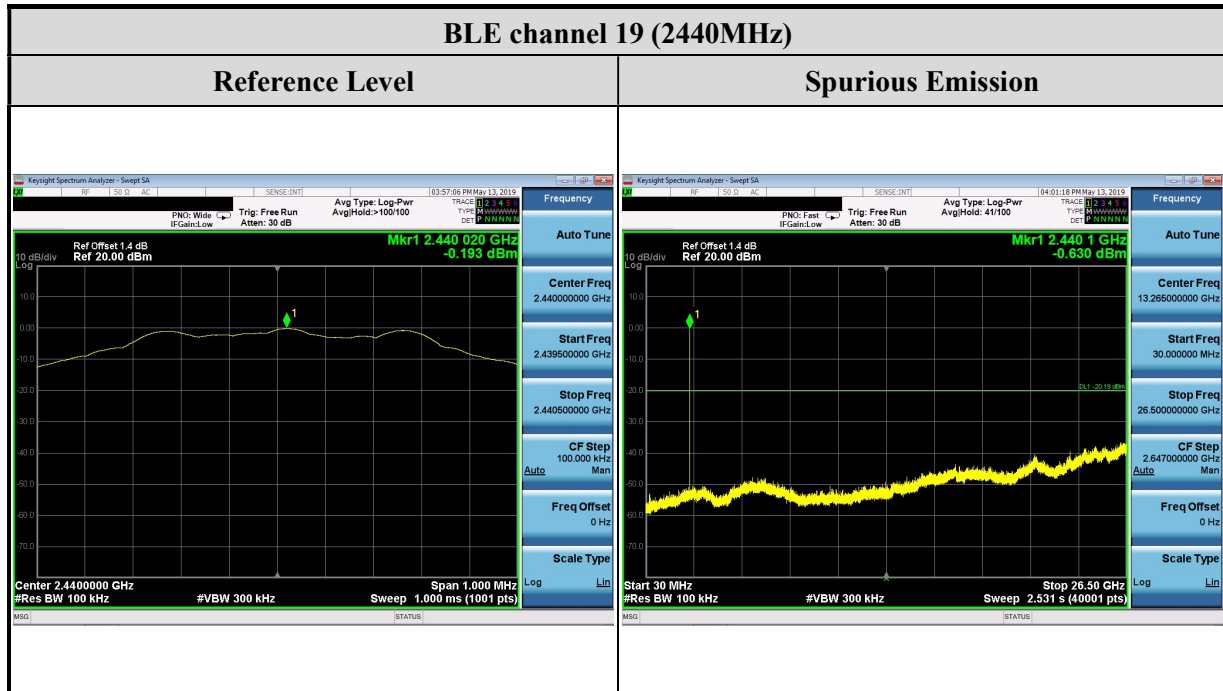


### BLE channel 39 (2480MHz)


#### Reference Level



#### Spurious Emission

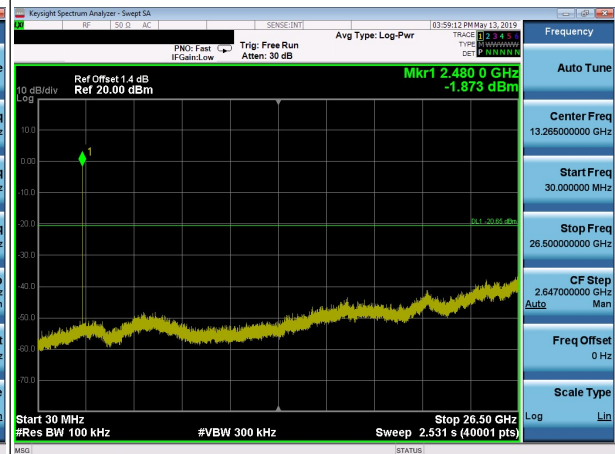

### Band Edge

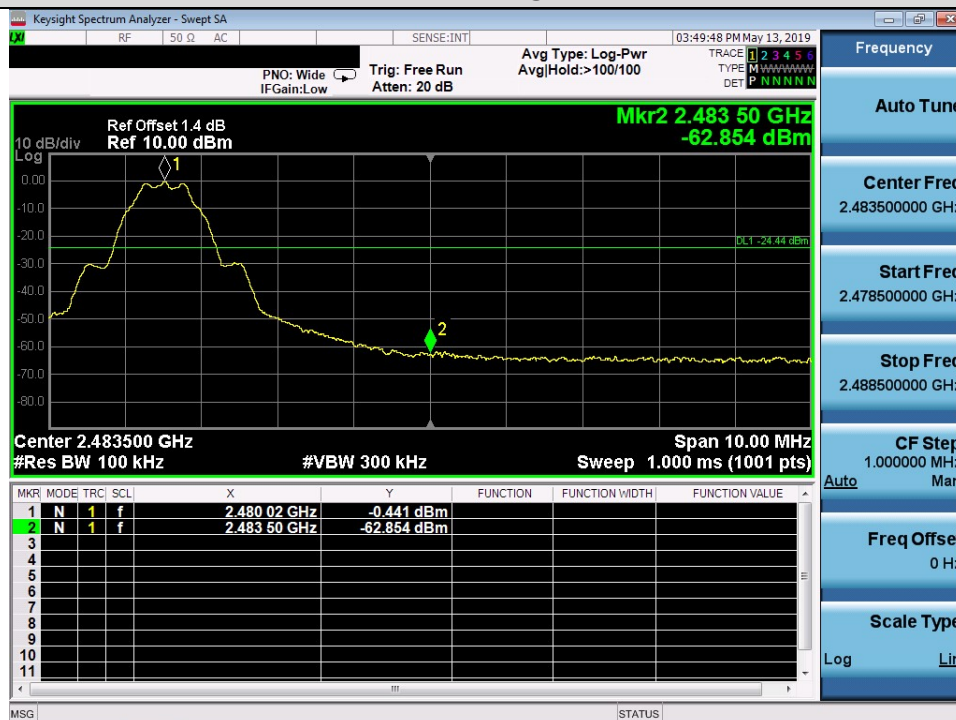

## 2.6 Radiated Band Edges and Spurious Emission Measurement

### 2.6.1 Limit


Frequency (MHz)	Field Strength ( $\mu\text{V/m}$ )	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Remarks:


1. RF Voltage (dBuV) =  $20 \log \text{RF Voltage}(\mu\text{V})$
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system

## 2.6.2 Test Setup


### Below 30MHz

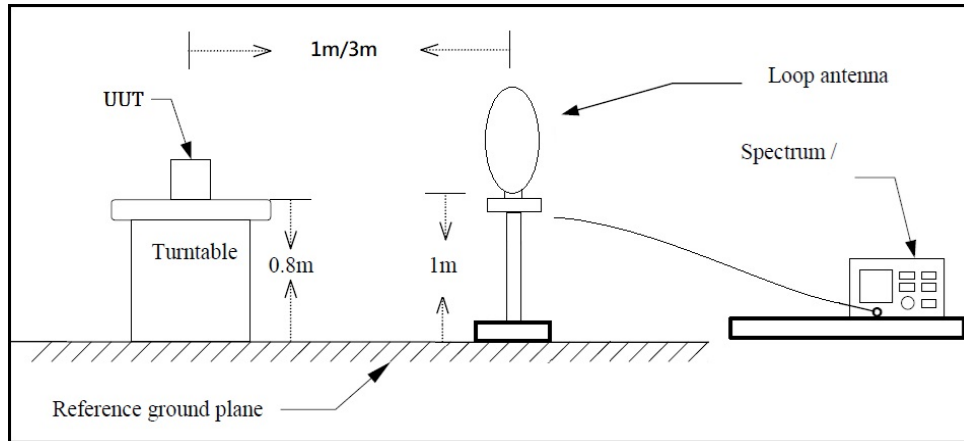

### 30MHz~1GHz

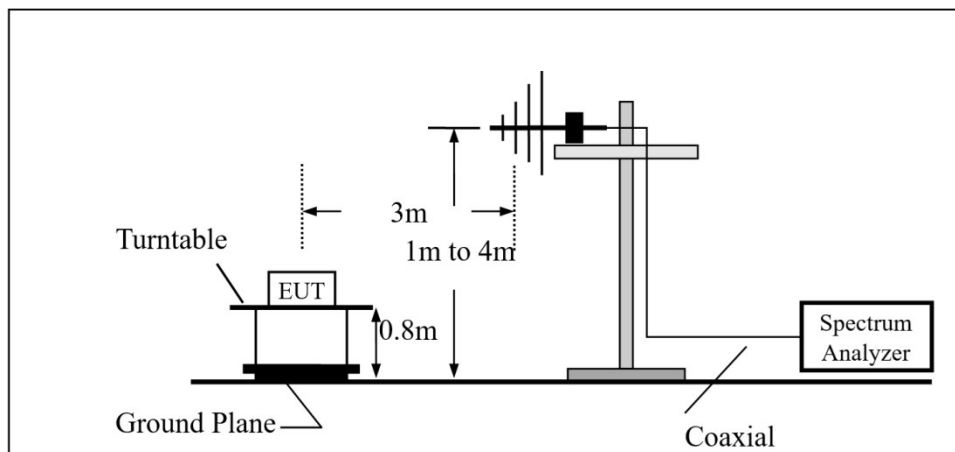

### Above 1GHz

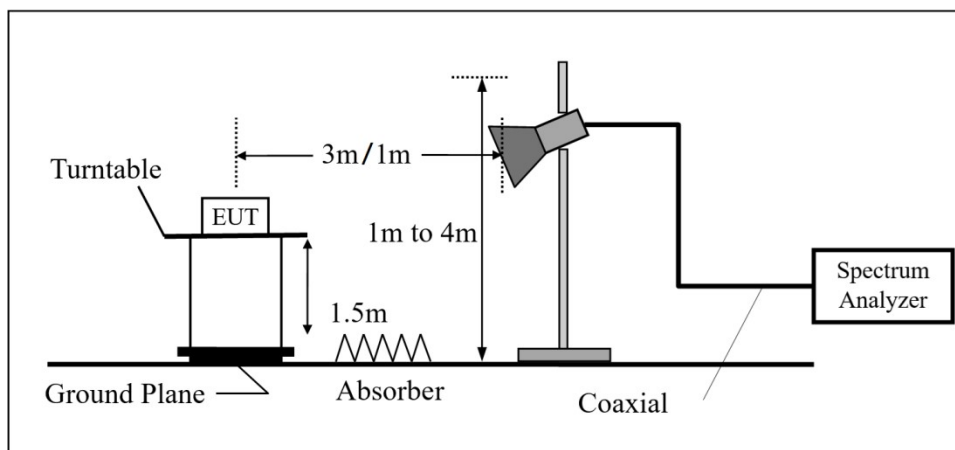

### **2.6.3 Test Procedure**

The EUT was setup according to ANSI C63.10, 2013 and tested according test procedure of KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

#### **For Radiated emission below 30MHz**

- (1) The EUT was placed on the top of a rotating table 0.8 meters above the ground in a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- (2) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- (3) Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- (4) For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- (5) The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

#### **For Radiated emission Above 30MHz**

- (1) The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for the test. The table was rotated 360 degrees to determine the position of the highest radiation.
- (2) The EUT was set 3 meters away from the interference-receiving antenna, the height of the antenna is varied from 1 meter to 4 meters above the ground to determine the maximum value of the field strength.
- (3) Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- (4) For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- (5) The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- (6) The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets the average limit, measurement with the average detector is unnecessary.

## 2.6.4 Duty Cycle

Protocol	Frequency (MHz)	on time (ms)	on+off time (ms)	Duty cycle	Duty Factor (dB)	1/T Minimum VBW (kHz)
BLE	2402	0.425	0.625	0.680	1.675	2.353


## 2.6.5 Test Result of Radiated Band Edge Measurement

The following tables for radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X axis) were recorded in this report.

Test Frequency	
RF	BLE
Tx	CH00 (2402MHz)
	CH39 (2480MHz)



<b>Test Mode :</b>	Transmit BLE	<b>Test Date :</b>	2019/05/16
<b>Test Channel :</b>	CH00(2402MHz)	<b>Temperature :</b>	25 °C
<b>Polarization :</b>	Horizontal	<b>Relative Humidity :</b>	65 %

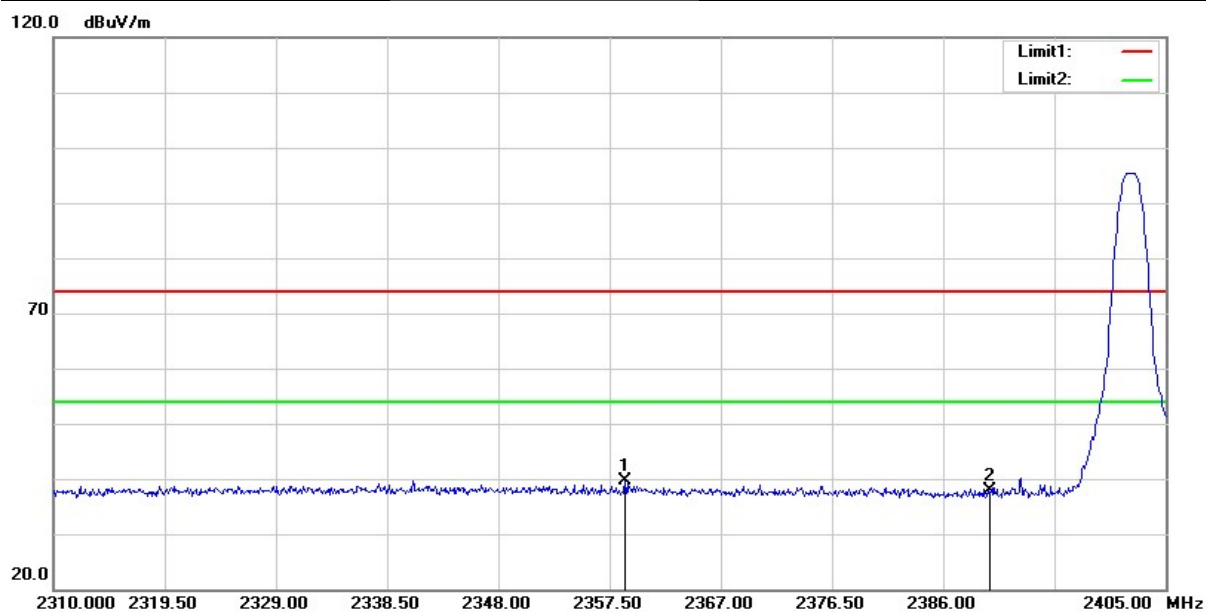


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2358.830	44.18	-4.60	39.58	74.00	-34.42	peak
2	2390.000	42.64	-4.71	37.93	74.00	-36.07	peak

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

<b>Test Mode :</b>	Transmit BLE	<b>Test Date :</b>	2019/05/16
<b>Test Channel :</b>	CH00(2402MHz)	<b>Temperature :</b>	25 °C
<b>Polarization :</b>	Vertical	<b>Relative Humidity :</b>	65 %

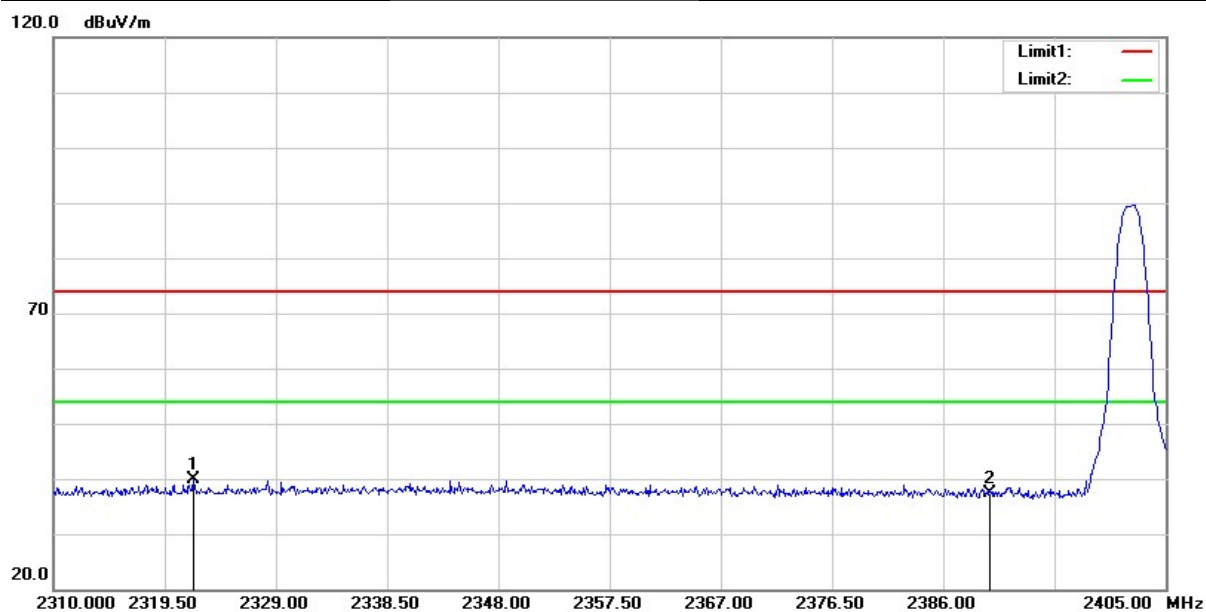


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2321.970	44.48	-4.63	39.85	74.00	-34.15	peak
2	2390.000	42.18	-4.71	37.47	74.00	-36.53	peak

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

<b>Test Mode :</b>	Transmit BLE	<b>Test Date :</b>	2019/05/16
<b>Test Channel :</b>	CH39(2480MHz)	<b>Temperature :</b>	25 °C
<b>Polarization :</b>	Horizontal	<b>Relative Humidity :</b>	65 %

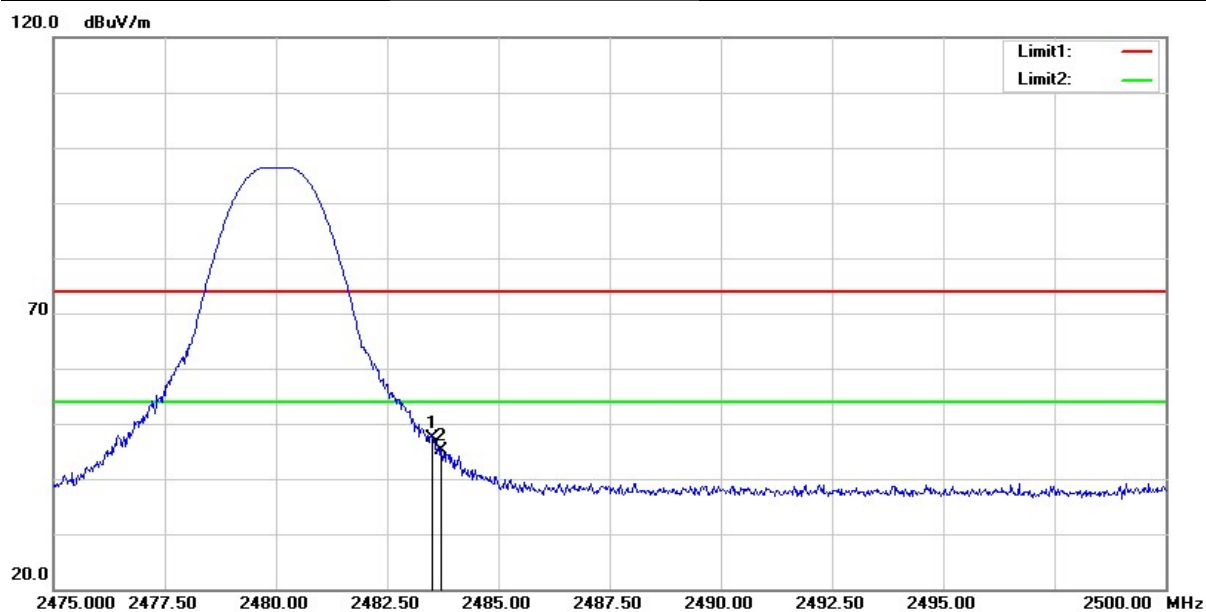


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	52.12	-4.62	47.50	74.00	-26.50	peak
2	2483.725	49.87	-4.62	45.25	74.00	-28.75	peak

#### Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

<b>Test Mode :</b>	Transmit BLE	<b>Test Date :</b>	2019/05/16
<b>Test Channel :</b>	CH39(2480MHz)	<b>Temperature :</b>	25 °C
<b>Polarization :</b>	Vertical	<b>Relative Humidity :</b>	65 %

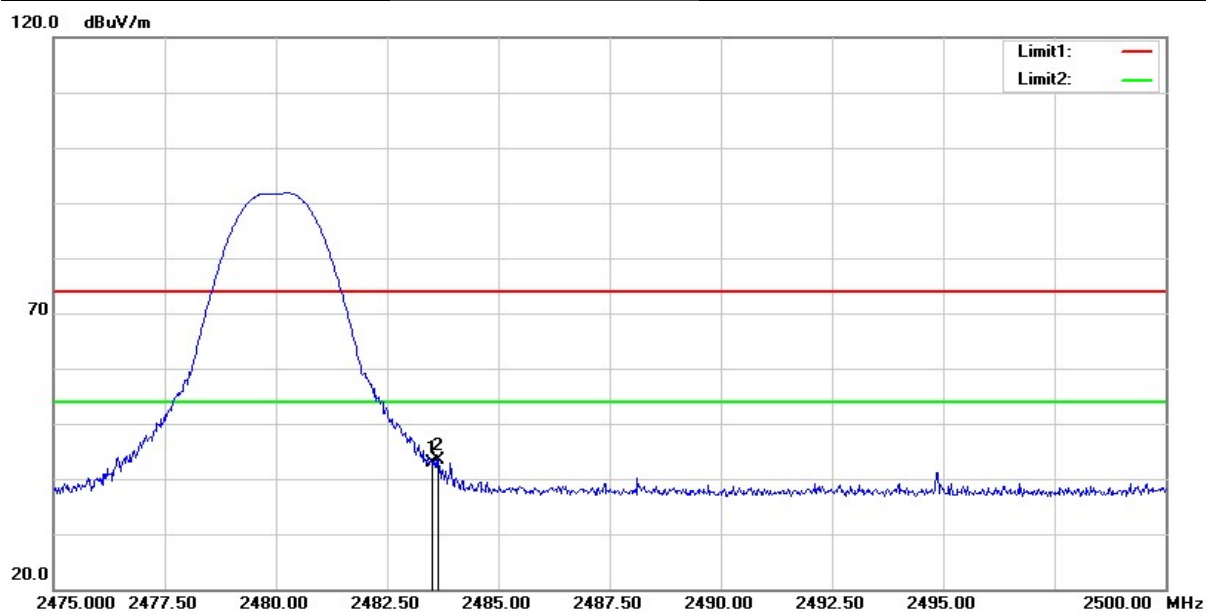

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	47.54	-4.62	42.92	74.00	-31.08	peak
2	2483.650	48.03	-4.62	43.41	74.00	-30.59	peak

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit


### 2.6.6 Test Result of Radiated Spurious Emission Measurement

- (1) The radiation measurement frequency is 9kHz ~ 30MHz. The interference value of this frequency range is less than the limit value of 20 dB. It is considered that the background noise value is not recorded.
- (2) The following table shows the radiation measurement frequency from 30MHz to 26.5GHz, pre-scanning in the X, Y and Z axes. The worst case (X-axis) is documented in this report.

Test Frequency	
RF	BLE
Tx	CH00 (2402MHz)
	CH19 (2440MHz)
	CH39 (2480MHz)

### Above 1GHz Data

<b>Test Mode :</b>	Transmit BLE	<b>Test Date :</b>	2019/05/16
<b>Test Channel :</b>	CH00(2402MHz)	<b>Temperature :</b>	25 °C
<b>Polarization :</b>	Horizontal	<b>Relative Humidity :</b>	65 %

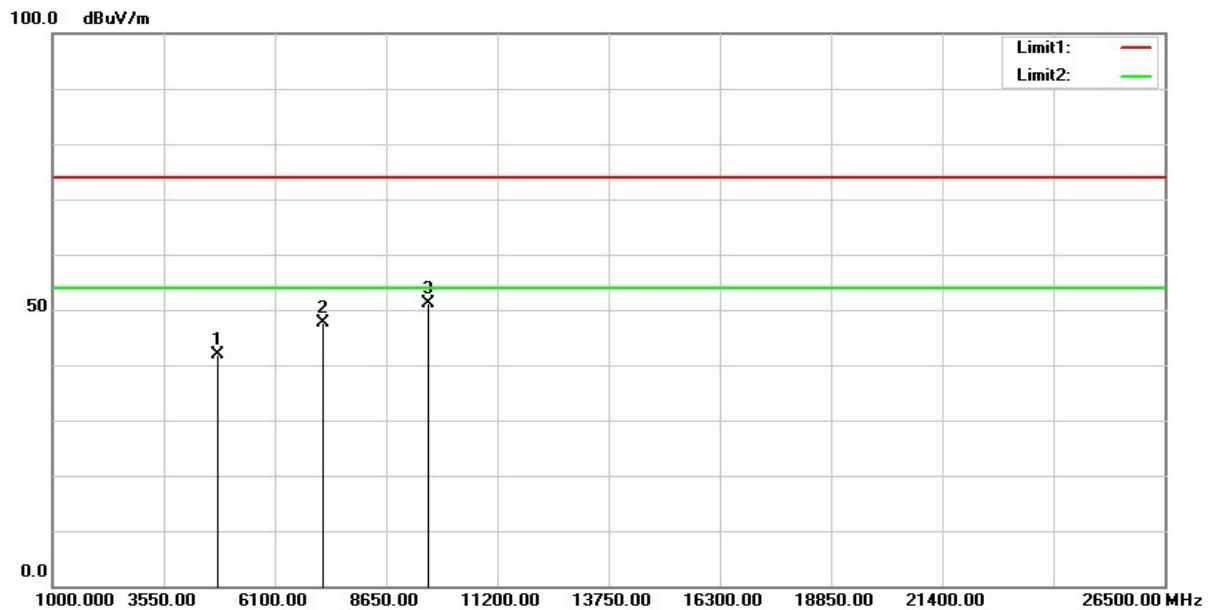


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	51.80	-9.82	41.98	74.00	-32.02	peak
2	7206.000	51.23	-3.68	47.55	74.00	-26.45	peak
3	9608.000	51.13	-0.09	51.04	74.00	-22.96	peak

### Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

<b>Test Mode :</b>	Transmit BLE	<b>Test Date :</b>	2019/05/16
<b>Test Channel :</b>	CH00(2402MHz)	<b>Temperature :</b>	25 °C
<b>Polarization :</b>	Vertical	<b>Relative Humidity :</b>	65 %

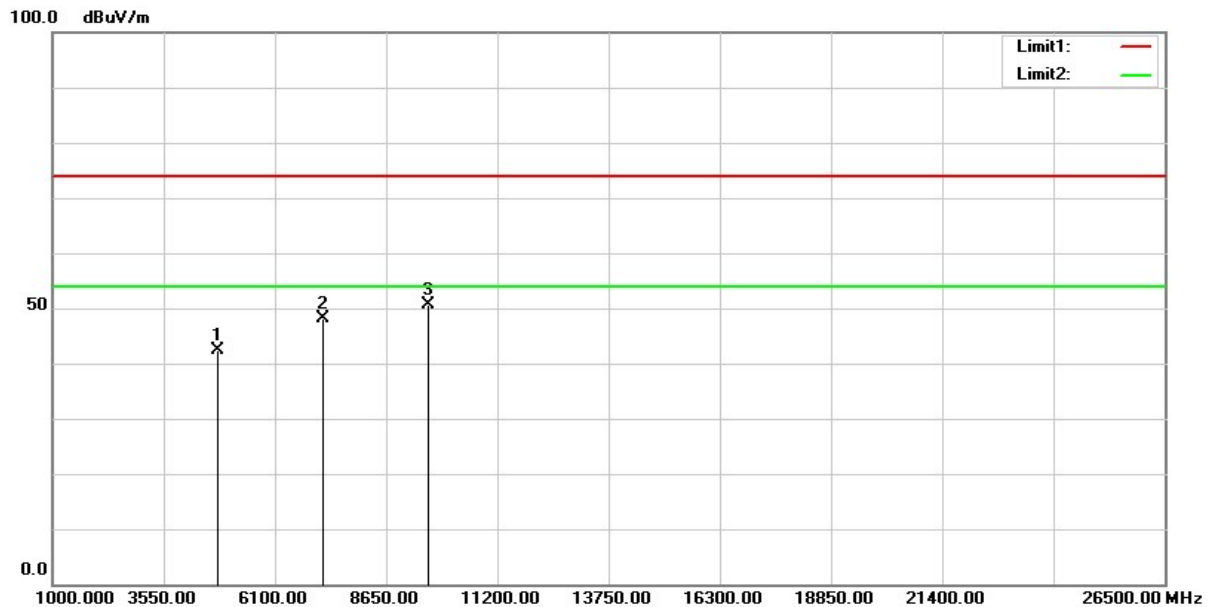


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	52.27	-9.82	42.45	74.00	-31.55	peak
2	7206.000	51.78	-3.68	48.10	74.00	-25.90	peak
3	9608.000	50.65	-0.09	50.56	74.00	-23.44	peak

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

<b>Test Mode :</b>	Transmit BLE	<b>Test Date :</b>	2019/05/16
<b>Test Channel :</b>	CH19(2440MHz)	<b>Temperature :</b>	25 °C
<b>Polarization :</b>	Horizontal	<b>Relative Humidity :</b>	65 %

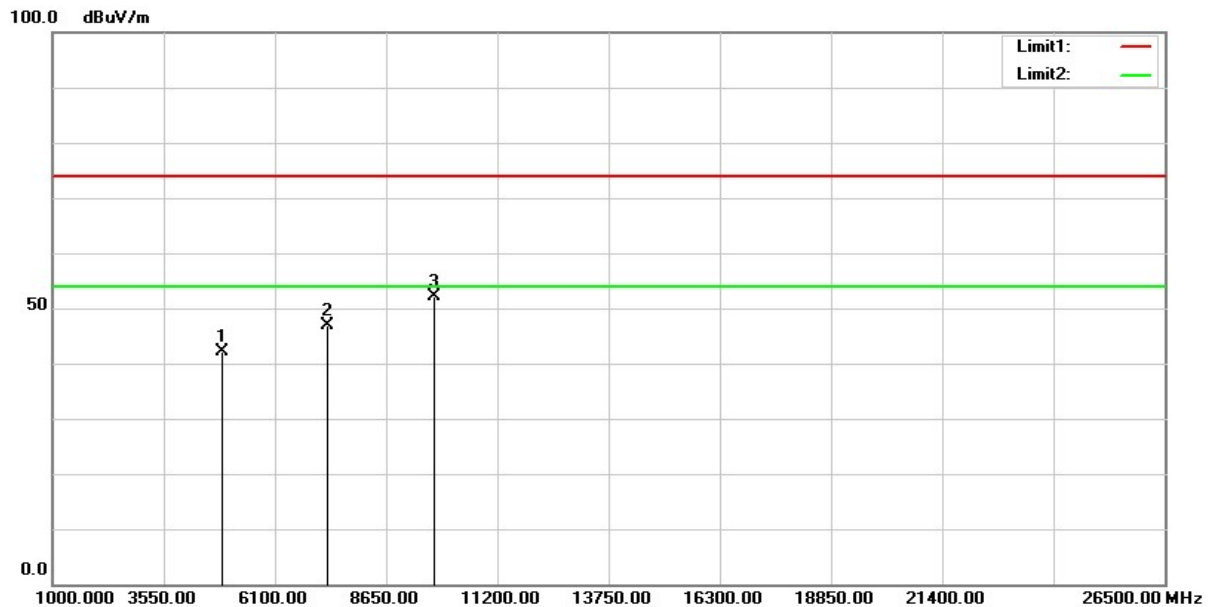


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4880.000	52.11	-9.96	42.15	74.00	-31.85	peak
2	7320.000	50.74	-3.86	46.88	74.00	-27.12	peak
3	9760.000	51.21	0.87	52.08	74.00	-21.92	peak

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit



<b>Test Mode :</b>	Transmit BLE	<b>Test Date :</b>	2019/05/16
<b>Test Channel :</b>	CH19(2440MHz)	<b>Temperature :</b>	25 °C
<b>Polarization :</b>	Vertical	<b>Relative Humidity :</b>	65 %

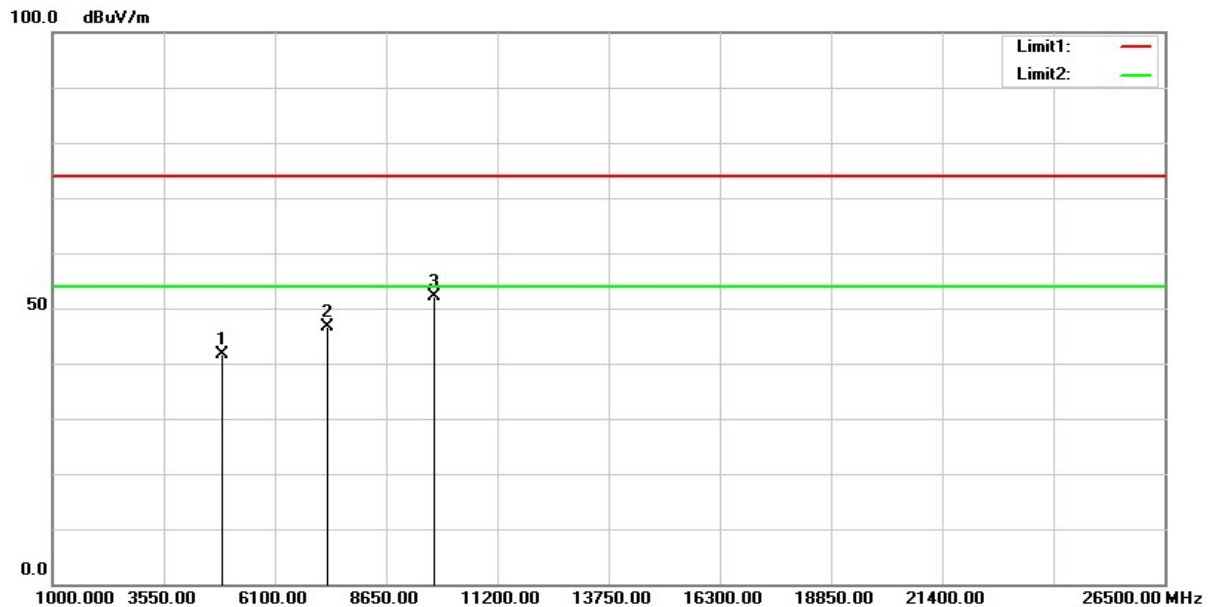


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4880.000	51.52	-9.96	41.56	74.00	-32.44	peak
2	7320.000	50.56	-3.86	46.70	74.00	-27.30	peak
3	9760.000	51.30	0.87	52.17	74.00	-21.83	peak

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

<b>Test Mode :</b>	Transmit BLE	<b>Test Date :</b>	2019/05/16
<b>Test Channel :</b>	CH39(2480MHz)	<b>Temperature :</b>	25 °C
<b>Polarization :</b>	Horizontal	<b>Relative Humidity :</b>	65 %

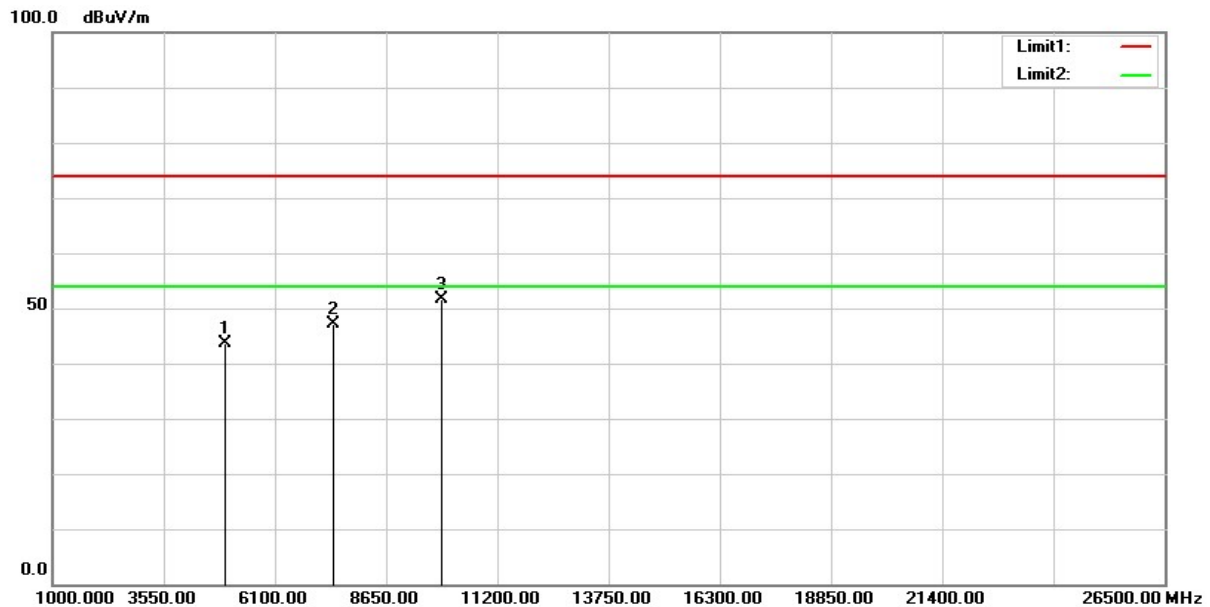


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	53.10	-9.54	43.56	74.00	-30.44	peak
2	7440.000	51.01	-3.81	47.20	74.00	-26.80	peak
3	9920.000	50.29	1.34	51.63	74.00	-22.37	peak

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

<b>Test Mode :</b>	Transmit BLE	<b>Test Date :</b>	2019/05/16
<b>Test Channel :</b>	CH39(2480MHz)	<b>Temperature :</b>	25 °C
<b>Polarization :</b>	Vertical	<b>Relative Humidity :</b>	65 %

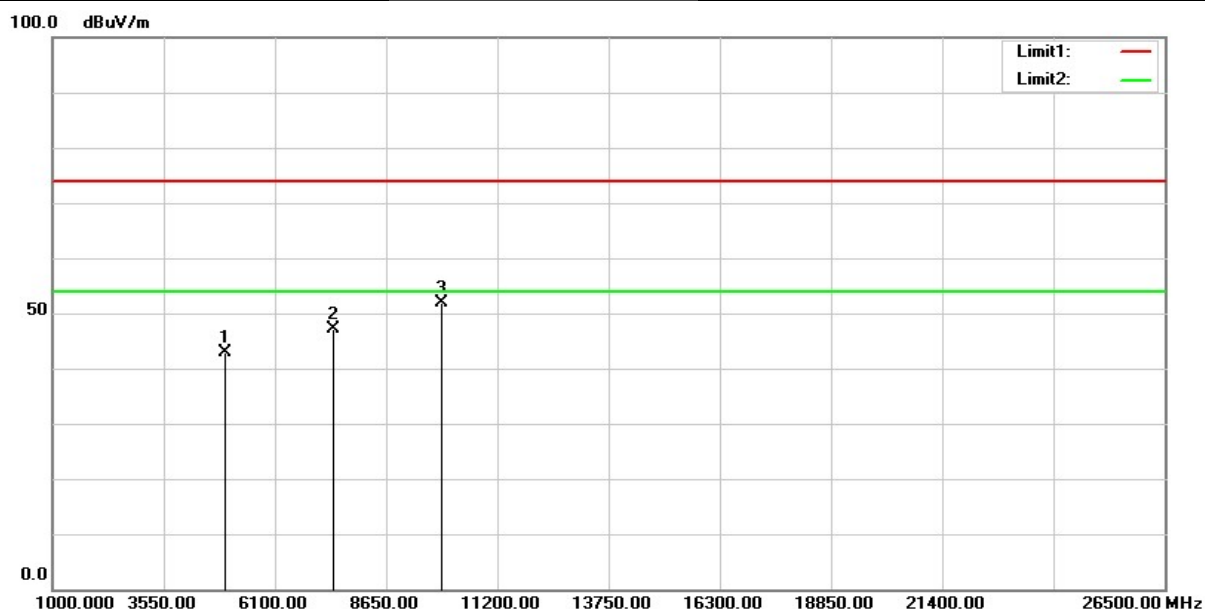

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	52.33	-9.54	42.79	74.00	-31.21	peak
2	7440.000	51.00	-3.81	47.19	74.00	-26.81	peak
3	9920.000	50.52	1.34	51.86	74.00	-22.14	peak

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

### Below 1GHz Data

<b>Test Mode :</b>	Transmit BLE	<b>Test Date :</b>	2019/06/20
<b>Test Channel :</b>	CH19(2440MHz)	<b>Temperature :</b>	25 °C
<b>Polarization :</b>	Horizontal	<b>Relative Humidity :</b>	65 %




No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	71.7100	50.47	-12.52	37.95	40.00	-2.05	QP
2	84.3200	53.20	-15.33	37.87	40.00	-2.13	QP
3	238.5500	50.66	-11.06	39.60	46.00	-6.40	QP
4	361.7400	48.53	-7.56	40.97	46.00	-5.03	QP
5	431.5800	46.26	-5.67	40.59	46.00	-5.41	QP
6	900.0900	42.29	2.11	44.40	46.00	-1.60	QP

#### Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

<b>Test Mode :</b>	Transmit BLE	<b>Test Date :</b>	2019/06/20
<b>Test Channel :</b>	CH19(2440MHz)	<b>Temperature :</b>	25 °C
<b>Polarization :</b>	Vertical	<b>Relative Humidity :</b>	65 %

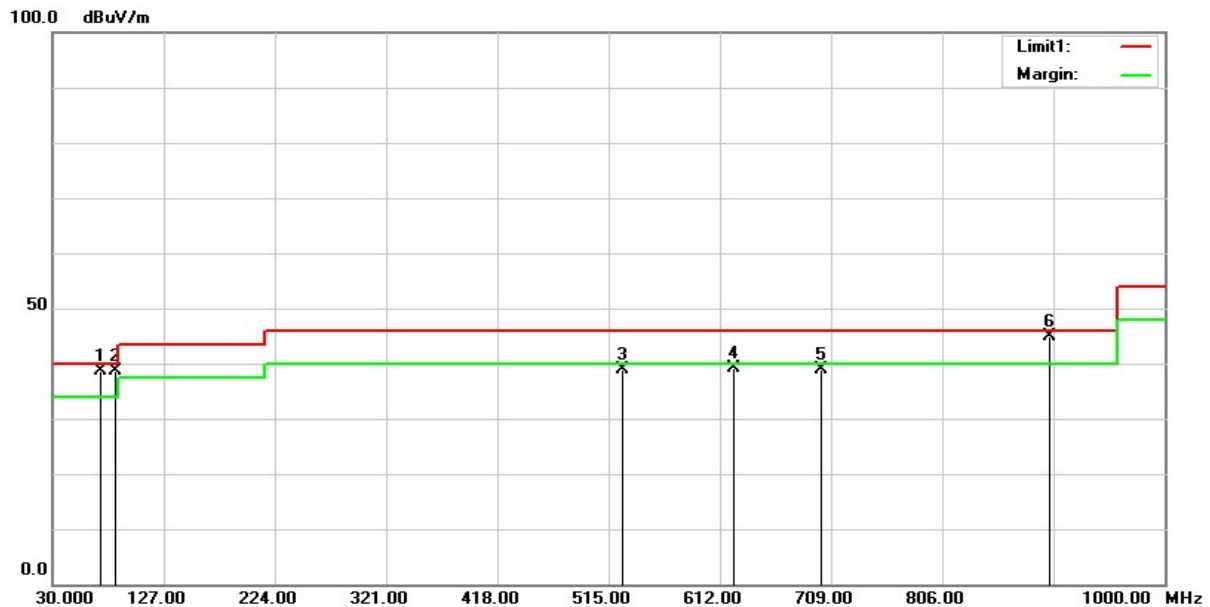

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	71.7100	51.10	-12.52	38.58	40.00	-1.42	QP
2	84.3200	54.07	-15.33	38.74	40.00	-1.26	QP
3	527.6100	42.65	-3.73	38.92	46.00	-7.08	QP
4	623.6400	40.72	-1.70	39.02	46.00	-6.98	QP
5	700.2700	39.59	-0.68	38.91	46.00	-7.09	QP
6	900.0900	42.73	2.11	44.84	46.00	-1.16	QP

#### Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit


## 2.7 AC Conducted Emissions Measurement

### 2.7.1 Limit

Frequency (MHz)	FCC Part 15 Subpart C Paragraph 15.207 (dB $\mu$ V) Limit	
	Quasi-peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.50 to 5.0	56	46
5.0 to 30.0	60	50

\*Decreases with the logarithm of the frequency

### 2.7.2 Test Setup

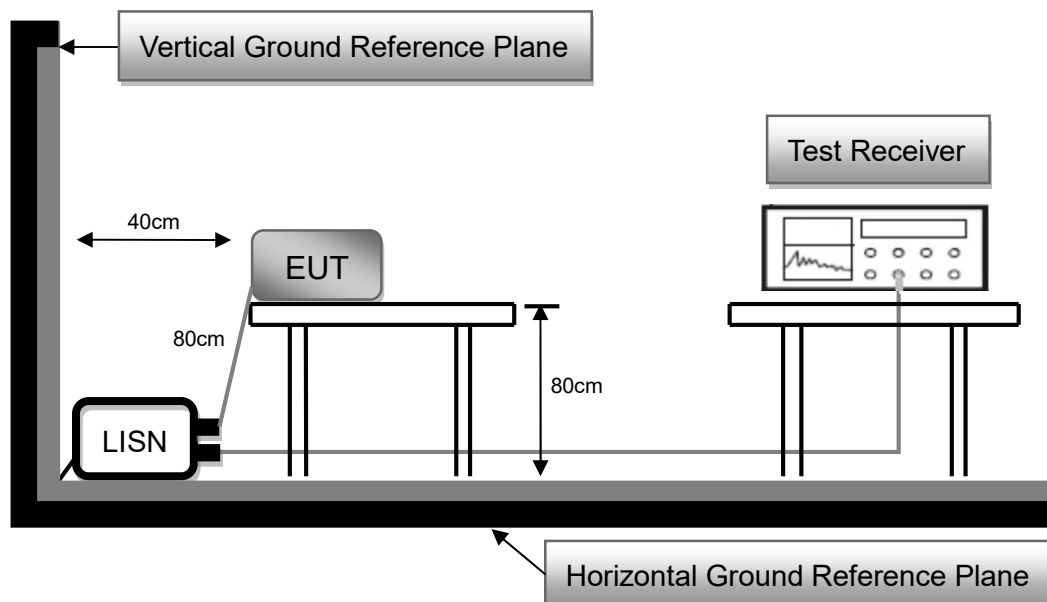


### 2.7.3 Test Procedure

1. The EUT was placed 0.8 meter height wooden table from the horizontal ground plane with EUT being connected to power source through a line impedance stabilization network (LISN). The LISN at least be 80 cm from nearest chassis of EUT.
2. The line impedance stabilization network (LISN) provides 50 ohm/50uH of coupling impedance for the measuring instrument. All other support equipments powered from additional LISN(s).
3. Interrelating cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle. All I/O cables were positioned to simulate typical usage.
4. All I/O cables that are not connected to a peripheral shall be bundle in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
5. The EMI test receiver connected to LISN powering the EUT. The actual test configuration, please refer to EUT test photos.
6. The receiver scanned from 150kHz to 30MHz for emissions in each of test modes. A scan was taken on both power lines, Line and Neutral, recording at least six highest emissions.
7. The EUT and cable configuration of the above highest emission levels were recorded. The Test Data of the worst case was recorded.

## 2.7.4 Test Result

Test Voltage :	120Vac, 60Hz	Frequency Range:	0.15-30 MHz
Test Mode :	Normal Link	6dB Bandwidth :	9 kHz
Test Date :	2019/06/05	Phase :	L
Temperature :	25°C	Humidity :	65 %

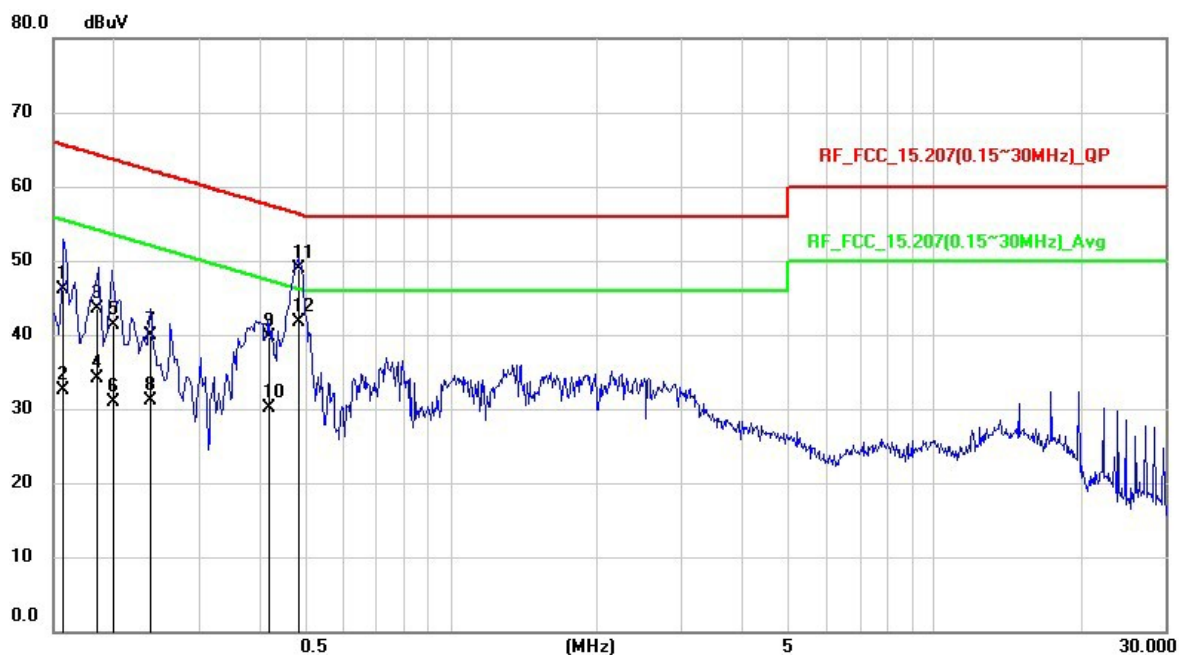

No.	Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measurement (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1568	36.3	9.84	46.14	65.63	-19.49	QP
2	0.1568	22.61	9.84	32.45	55.63	-23.18	AVG
3	0.184	33.58	9.83	43.41	64.3	-20.89	QP
4	0.184	24.23	9.83	34.06	54.3	-20.24	AVG
5	0.1997	31.46	9.83	41.29	63.62	-22.33	QP
6	0.1997	21.06	9.83	30.89	53.62	-22.73	AVG
7	0.2377	30.04	9.83	39.87	62.18	-22.31	QP
8	0.2377	21.21	9.83	31.04	52.18	-21.14	AVG
9	0.4203	29.96	9.84	39.8	57.44	-17.64	QP
10	0.4203	20.18	9.84	30.02	47.44	-17.42	AVG
11	0.482	39.07	9.84	48.91	56.3	-7.39	QP
12	0.482	31.94	9.84	41.78	46.3	-4.52	AVG

Remark:

1. QP = Quasi Peak, AVG = Average
2. Correction Factor = Insertion loss of LISN + Cable loss
3. Measurement Value = Reading Level + Correct Factor
4. Margin Level = Result Value – Limit Value



Test Voltage :	120Vac, 60Hz	Frequency Range:	0.15-30 MHz
Test Mode :	Normal Link	6dB Bandwidth :	9 kHz
Test Date :	2019/06/05	Phase :	N
Temperature :	25°C	Humidity :	65 %



No.	Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measurement (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1617	37.01	9.83	46.84	65.38	-18.54	QP
2	0.1617	23.16	9.83	32.99	55.38	-22.39	AVG
3	0.1832	34.32	9.82	44.14	64.34	-20.2	QP
4	0.1832	24.32	9.82	34.14	54.34	-20.2	AVG
5	0.2083	32.89	9.82	42.71	63.27	-20.56	QP
6	0.2083	25.06	9.82	34.88	53.27	-18.39	AVG
7	0.4149	29.82	9.84	39.66	57.55	-17.89	QP
8	0.4149	20.15	9.84	29.99	47.55	-17.56	AVG
9	0.4272	30.52	9.84	40.36	57.31	-16.95	QP
10	0.4272	19.52	9.84	29.36	47.31	-17.95	AVG
11	0.4775	39.16	9.84	49	56.38	-7.38	QP
12	0.4775	31.71	9.84	41.55	46.38	-4.83	AVG

Remark:

1. QP = Quasi Peak, AVG = Average
2. Correction Factor = Insertion loss of LISN + Cable loss
3. Measurement Value = Reading Level + Correct Factor
4. Margin Level = Result Value – Limit Value

--- END ---