

RF TEST REPORT

For

MAYFLASH LIMITED

Product Name: F700 Arcade Stick

Model(s): F700

Report Reference No. : POCE230818308XRW

FCC ID : 2ASVQ-F700

Applicant's Name : MAYFLASH LIMITED

Address : 3/F,Buiding No.1,TingWei Industrial Park,LiuFang Rd, No.67, BaoAn,
Shenzhen, China.

Testing Laboratory : Shenzhen POCE Technology Co., Ltd.

Address : 102 Building H1 & 1/F., Building H, Hongfa Science & Technology Park,
Tangtou, Shiyan, Bao'an District, Shenzhen, Guangdong, China

Test Specification Standard : 47 CFR Part 15.249

Date of Receipt : August 09, 2023

Date of Test : August 09, 2023 to August 29, 2023

Data of Issue : August 29, 2023

Result : **Pass**

Note: This report shall not be reproduced except in full, without the written approval of Shenzhen POCE Technology Co., Ltd. This document may be altered or revised by Shenzhen POCE Technology Co., Ltd. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample

Revision History Of Report

Version	Description	REPORT No.	Issue Date
V1.0	Original	POCE230818308XRW	August 29, 2023

NOTE1:

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

Compiled by:



Amy Zhu / File administrators

Supervised by:



Stone Yin / Technique principal

Approved by:



Machael Mo / Manager

CONTENTS

1	TEST SUMMARY	4
1.1	TEST STANDARDS	4
1.2	SUMMARY OF TEST RESULT	4
2	GENERAL INFORMATION	5
2.1	CLIENT INFORMATION	5
2.2	DESCRIPTION OF DEVICE (EUT)	5
2.3	DESCRIPTION OF TEST MODES	6
2.4	DESCRIPTION OF SUPPORT UNITS	6
2.5	EQUIPMENTS USED DURING THE TEST	6
2.6	STATEMENT OF THE MEASUREMENT UNCERTAINTY	8
2.7	IDENTIFICATION OF TESTING LABORATORY	8
2.8	ANNOUNCEMENT	8
3	EVALUATION RESULTS (EVALUATION)	9
3.1	ANTENNA REQUIREMENT	9
3.1.1	Conclusion:	9
4	RADIO SPECTRUM MATTER TEST RESULTS (RF)	10
4.1	CONDUCTED EMISSION AT AC POWER LINE	10
4.1.1	E.U.T. Operation:	10
4.1.2	Test Setup Diagram:	10
4.1.3	Test Data:	11
4.2	OCCUPIED BANDWIDTH	13
4.2.1	E.U.T. Operation:	14
4.2.2	Test Setup Diagram:	14
4.2.3	Test Data:	14
4.3	FIELD STRENGTH OF FUNDAMENTAL	15
4.3.1	E.U.T. Operation:	15
4.3.2	Test Setup Diagram:	15
4.3.3	Test Data:	16
4.4	EMISSIONS IN RESTRICTED FREQUENCY BANDS (BELOW 1GHZ)	17
4.4.1	E.U.T. Operation:	17
4.4.2	Test Setup Diagram:	18
4.4.3	Test Data:	18
4.5	EMISSIONS IN RESTRICTED FREQUENCY BANDS (ABOVE 1GHZ)	21
4.5.1	E.U.T. Operation:	21
4.5.2	Test Setup Diagram:	22
4.5.3	Test Data:	22
5	TEST SETUP PHOTOS	26
6	PHOTOS OF THE EUT	27
	APPENDIX	28
1.	OCCUPIED BANDWIDTH	28

1 TEST SUMMARY

1.1 Test Standards

The tests were performed according to following standards:

47 CFR Part 15.249: Operation within the bands 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHz, and 24.0-24.25 GHz

1.2 Summary of Test Result

Item	Standard	Method	Requirement	Result
Antenna requirement	47 CFR Part 15.249		Part 15.203	Pass
Conducted Emission at AC power line	47 CFR Part 15.249	ANSI C63.10-2013 section 6.2	47 CFR 15.207(a)	Pass
Occupied Bandwidth	47 CFR Part 15.249	ANSI C63.10-2013, section 6.9.2	47 CFR 15.215(c)	Pass
Emissions in restricted frequency bands (below 1GHz)	47 CFR Part 15.249	ANSI C63.10-2013 section 6.5	47 CFR 15.249(a) 47 CFR 15.249(d) 47 CFR 15.249(e)	Pass
Emissions in restricted frequency bands (above 1GHz)	47 CFR Part 15.249	ANSI C63.10-2013 section 6.6	47 CFR 15.249(a) 47 CFR 15.249(d) 47 CFR 15.249(e)	Pass

Note: 1.N/A -this device(EUT) is not applicable to this testing item
2. RF-conducted test results including cable loss.

2 GENERAL INFORMATION

2.1 Client Information

Applicant's Name : MAYFLASH LIMITED
Address : 3/F,Buiding No.1,TingWei Industrial Park,LiuFang Rd, No.67, BaoAn, Shenzhen, China.

Manufacturer : MAYFLASH LIMITED
Address : 3/F,Buiding No.1,TingWei Industrial Park,LiuFang Rd, No.67, BaoAn, Shenzhen, China.

2.2 Description of Device (EUT)

Product Name:	F700 Arcade Stick
Sample number:	230818002
Model/Type reference:	F700
Series Model:	/
Trade Mark:	/
Product Description:	F700 Arcade Stick
Operation Frequency:	2402MHz-2480MHz
Number of Channels:	40
Modulation Type:	GFSK
Antenna Type:	PCB ANT
Antenna Gain:	2.64dBi
Hardware Version:	V0.4
Software Version:	V1.0

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	11	2422MHz	21	2442MHz	31	2462MHz
2	2404MHz	12	2424MHz	22	2444MHz	32	2464MHz
3	2406MHz	13	2426MHz	23	2446MHz	33	2466MHz
4	2408MHz	14	2428MHz	24	2448MHz	34	2468MHz
5	2410MHz	15	2430MHz	25	2450MHz	35	2470MHz
6	2412MHz	16	2432MHz	26	2452MHz	36	2472MHz
7	2414MHz	17	2434MHz	27	2454MHz	37	2474MHz
8	2416MHz	18	2436MHz	28	2456MHz	38	2476MHz
9	2418MHz	19	2438MHz	29	2458MHz	39	2478MHz
10	2420MHz	20	2440MHz	30	2460MHz	40	2480MHz

Note:

#: The antenna gain provided by the applicant, and the laboratory will not be responsible for the accumulated calculation results which covers the information provided by the applicant.

Note:


In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)
--------------	-----------------

Lowest channel	2402MHz
Middle channel	2440MHz
Highest channel	2480MHz

2.3 Description of Test Modes

No	Title	Description
TM1	TX-GFSK	Keep the EUT in continuously transmitting mode with GFSK modulation.

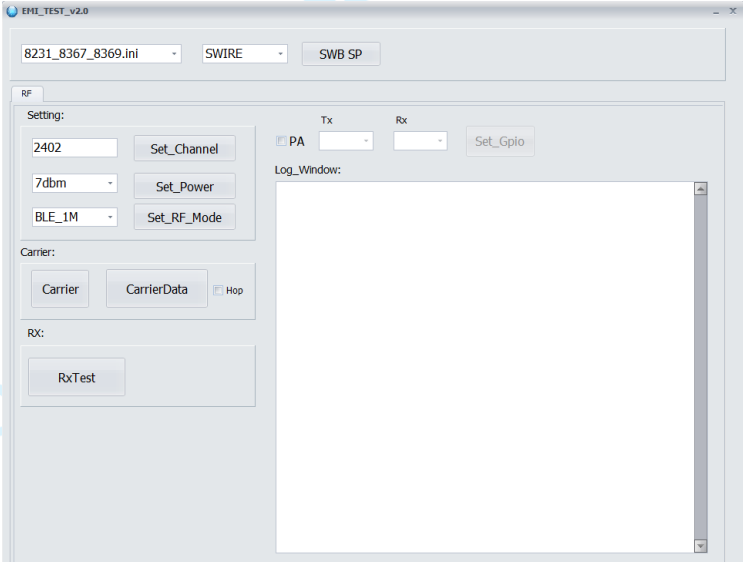Title	Description
TM1	Keep the EUT works in continuously transmitting mode with GFSK modulation.
	<input checked="" type="checkbox"/> Special software is used. <input type="checkbox"/> Through engineering command into the engineering mode. engineering command: <code>###3646633###</code> <input type="checkbox"/> Other method:
	Special software: 

2.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Description	Manufacturer	Model No.	Remark	Certification
1	adapter	huawei	HW-100100C01	Provide by lab	SDOC
2	PC	DELL	TP00067A	Provide by lab	SDOC

2.5 Equipments Used During The Test

Conducted Emission at AC power line					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal. Due Date
Shielding room	CY	8*4*3	20160102	2023/1/26	2025/1/25
Pulse Limiter	Schwarzbeck	VTSD 9561	561-G071	2023/2/27	2024/2/26

Cable	Schwarzbeck	/	/	2023/2/27	2024/2/26
Test Receiver	Rohde & Schwarz	ESPI	1164.6607K03-102109-MH	2023/6/13	2024/6/12
L.I.S.N	R&S	ESH3-Z5	831.5518.52	2022/12/29	2023/12/28
L.I.S.N	Schwarzbeck	NSLK 8126	NSLK 8126	2023/8/8	2024/8/7
50ΩCoaxial Switch	Anritsu	MP59B	M20531	/	/
EMI Testsoftware	Farad	EZ -EMC	V1.1.42	/	/

Emissions in restricted frequency bands and RF					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Test Receiver	R&S	ESCI	102109	2023/6/13	2024/6/12
Spectrum Analyzer	R&S	FSP30	1321.3008K40-101729-jR	2023/6/14	2024/6/13
966 Chamber	CY	9*6*6	20160101	2023/1/26	2025/1/25
Bore-sighting Antenna rack	PBB	1308503	16033	/	/
Loop antenna	ZHINAN	ZN30900C	ZN30900C	2021/7/5	2024/7/4
Broadband Antenna	Sunol Sciences	JB6 Antenna	A090414	2023/5-21	2025/5-20
Horn Antenna	Sunol Sciences	DRH-118	A091114	2023/5/13	2025/5/12
Horn antenna	COM-POWER	AH-1840(40G)	10100008	2023/4/5	2025/4/4
Power APM(LF)	Schwarzbeck	BBV9743	9743-151	2023/6/13	2024/6/12
Power APM(HF)	Schwarzbeck	BBV9718	9718-282	2023/6/13	2024/6/12
Cable(LF)#2	Schwarzbeck	/	/	2023/2/27	2024/2/26
Cable(LF)#1	Schwarzbeck	/	/	2023/2/27	2024/2/26
Cable(HF)#2	Schwarzbeck	AK9515E	96250	2023/2/28	2024/2/27
Cable(HF)#1	Schwarzbeck	SYV-50-3-1	/	2023/2/27	2024/2/26
Power divider	MIDWEST	PWD-2533	SMA-79	2023/5/11	2026/5/10
signal generator	Keysight	N5181A	MY48180415	2022/12/10	2023/12/9
signal generator	Keysight	N5182A	MY50143455	2022/12/29	2023/12/28
Spectrum Analyzer	Keysight	N9020A	MY53420323	2022/12/29	2023/12/28
RF Sensor Unit	TACHOY	TR1029-2	000001	/	/
RF Control Unit	TACHOY	TR1029-1	000001	/	/
Position Controller	MF	MF-7802	/	/	/
EMI Testsoftware	Farad	EZ -EMC	V1.1.42	/	/
RF TestSoftware	TACHOY	RTS-01	V2.0.0.0	/	/

2.6 Statement Of The Measurement Uncertainty

Test Item	Measurement Uncertainty
Conducted Disturbance (0.15~30MHz)	±3.41dB
Occupied Bandwidth	±3.63%
RF power density	±0.234%
Radio Frequency	2×10 ⁻⁷
RF conducted power	±0.733dB
Duty cycle	±3.1%
Conducted Spurious emissions	±1.98dB
Radiated Emission (Above 1GHz)	±5.46dB
Radiated Emission (Below 1GHz)	±5.79dB
Note: (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

2.7 Identification of Testing Laboratory

Company Name:	Shenzhen POCE Technology Co., Ltd.
Address:	101-102 Building H5 & 1/F., Building H, Hongfa Science & Technology Park, Tangtou, Shiyan, Bao'an District, Shenzhen, Guangdong, China
Phone Number:	+86-13267178997
Fax Number:	86-755-29113252

Identification of the Responsible Testing Location

Company Name:	Shenzhen POCE Technology Co., Ltd.
Address:	101-102 Building H5 & 1/F., Building H, Hongfa Science & Technology Park, Tangtou, Shiyan, Bao'an District, Shenzhen, Guangdong, China
Phone Number:	+86-13267178997
Fax Number:	86-755-29113252
FCC Registration Number:	0032847402
Designation Number:	CN1342
Test Firm Registration No.:	778666
A2LA Certificate Number:	6270.01

2.8 Announcement


- (1) The test report reference to the report template version v0.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing, reviewing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) This document may not be altered or revised in any way unless done so by POCE and all revisions are duly noted in the revisions section.
- (5) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (6) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

3 Evaluation Results (Evaluation)

3.1 Antenna requirement

Test Requirement:	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.
-------------------	--

3.1.1 Conclusion:

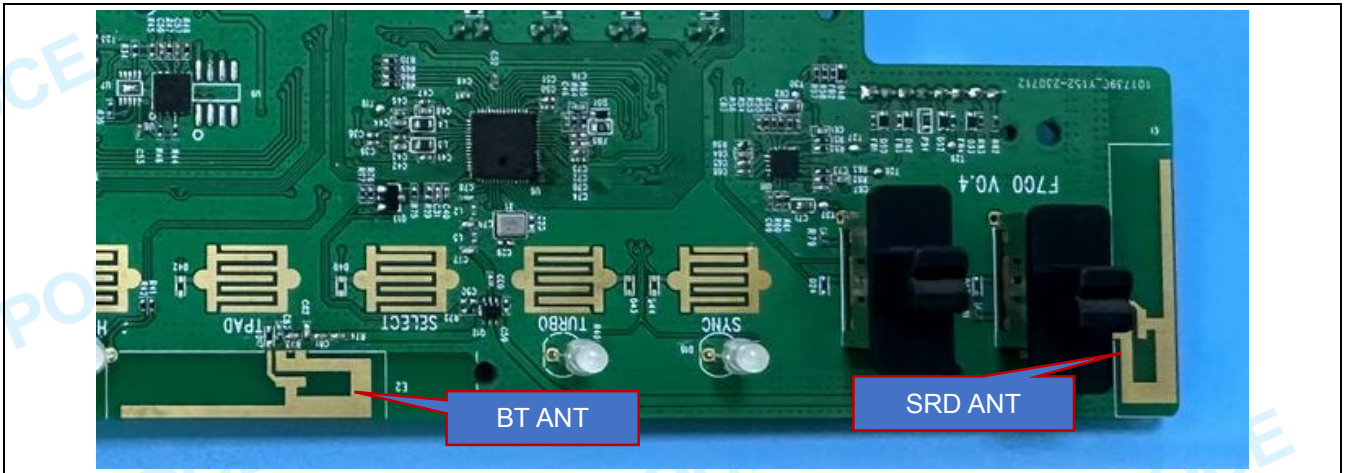

4 Radio Spectrum Matter Test Results (RF)


4.1 Conducted Emission at AC power line

Test Requirement:	Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).		
Test Limit:	Frequency of emission (MHz)	Conducted limit (dB μ V)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
*Decreases with the logarithm of the frequency.			
Test Method:	Refer to ANSI C63.10-2013 section 6.2, standard test method for ac power-line conducted emissions from unlicensed wireless devices		

4.1.1 E.U.T. Operation:


Operating Environment:					
Temperature:	23.5 °C	Humidity:	53.6 %	Atmospheric Pressure:	101 kPa
Pre test mode:	TM1				
Final test mode:	TM1				

4.1.2 Test Setup Diagram:

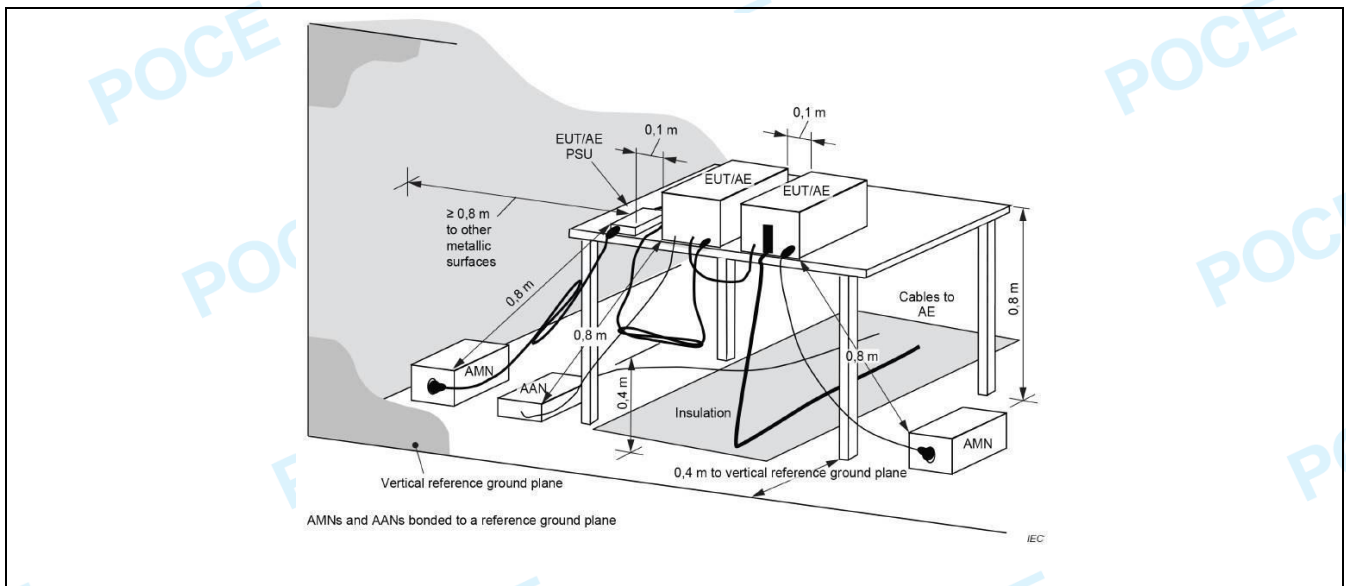


4.1.3 Test Data:

TM1 / Line: Line / Band: 2.4G / CH: H

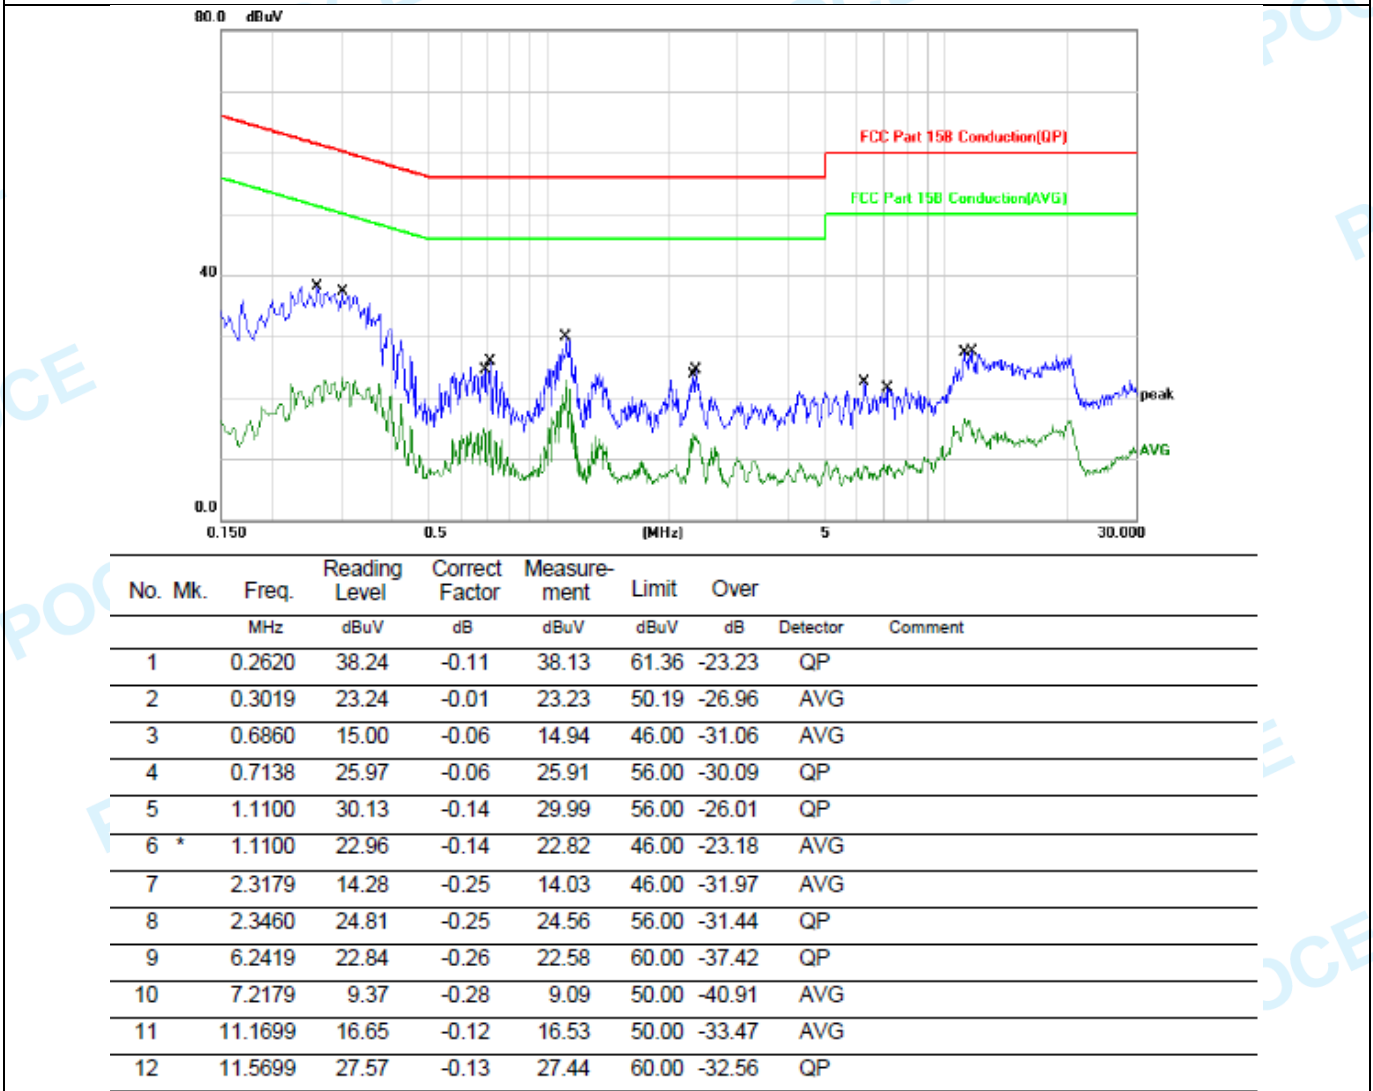

TM1 / Line: Neutral / Band: 2.4G/ CH: H

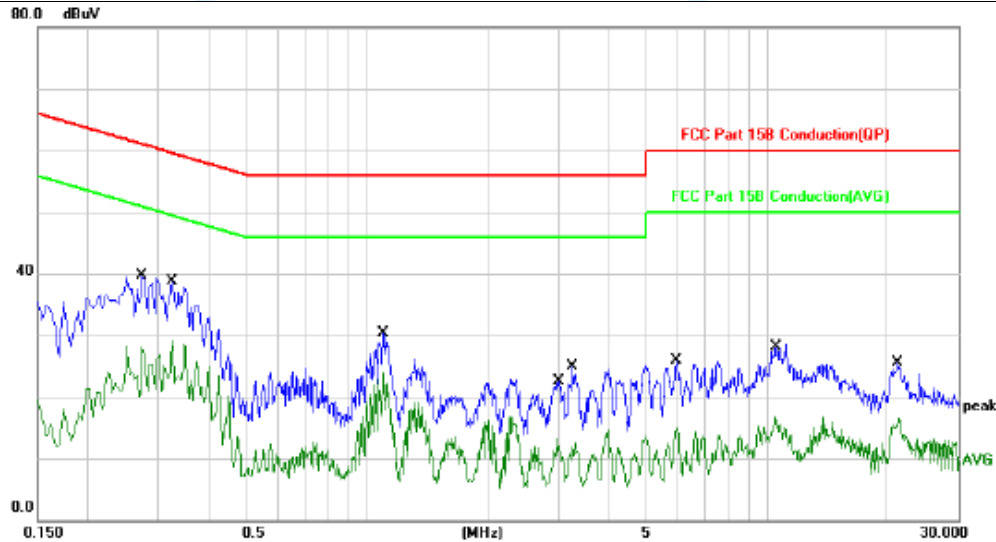

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Over dB	Detector	Comment
1	0.2740	39.72	-0.04	39.68	60.99	-21.31	QP	
2 *	0.3260	29.06	-0.02	29.04	49.55	-20.51	AVG	
3	1.0940	30.38	-0.13	30.25	56.00	-25.75	QP	
4	1.0940	24.04	-0.13	23.91	46.00	-22.09	AVG	
5	2.9980	13.41	-0.18	13.23	46.00	-32.77	AVG	
6	3.2740	25.09	-0.19	24.90	56.00	-31.10	QP	
7	5.9499	26.18	-0.25	25.93	60.00	-34.07	QP	
8	5.9778	15.18	-0.25	14.93	50.00	-35.07	AVG	
9	10.4859	16.84	-0.10	16.74	50.00	-33.26	AVG	
10	10.5099	28.13	-0.11	28.02	60.00	-31.98	QP	
11	21.1938	25.89	-0.39	25.50	60.00	-34.50	QP	
12	21.3658	16.85	-0.39	16.46	50.00	-33.54	AVG	

Note:

- 1.An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2.Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3.Measurement Level = Reading level + Correct Factor, Over=Limit- Measurement


4.2 Occupied Bandwidth

Test Requirement:	Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.
Test Limit:	Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.
Test Method:	Occupied bandwidth—relative measurement procedure
Procedure:	<p>a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the EMI receiver or spectrum analyzer shall be between two times and five times the OBW.</p> <p>b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW, unless otherwise specified by the applicable requirement.</p> <p>c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2.</p> <p>d) Steps a) through c) might require iteration to adjust within the specified tolerances.</p> <p>e) The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target “-xx dB down” requirement; that is, if the requirement calls for measuring the -20 dB OBW, the instrument noise floor at the selected RBW shall be at least 30 dB below the reference value.</p> <p>f) Set detection mode to peak and trace mode to max hold.</p> <p>g) Determine the reference value: Set the EUT to transmit an unmodulated carrier or modulated signal, as applicable. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).</p> <p>h) Determine the “-xx dB down amplitude” using $[(\text{reference value}) - xx]$. Alternatively, this calculation may be made by using the marker-delta function of the instrument.</p> <p>i) If the reference value is determined by an unmodulated carrier, then turn the EUT modulation ON, and either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise, the trace from step g) shall be used for step j).</p> <p>j) Place two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-xx dB down amplitude” determined in step h). If a marker is below this “-xx dB down amplitude” value, then it shall be as close as possible to this value. The occupied bandwidth is the frequency difference between the two markers. Alternatively, set a marker at the lowest frequency of the envelope of the spectral display, such that the marker is at or slightly below the “-xx dB down amplitude” determined in step h). Reset the marker-delta function and move the marker to the other side of the emission until the delta marker amplitude is at the same level as the reference marker amplitude. The marker-delta frequency reading at this point is the specified emission bandwidth.</p> <p>k) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).</p>

4.2.1 E.U.T. Operation:

Operating Environment:					
Temperature:	23.5 °C	Humidity:	53.6 %	Atmospheric Pressure:	101 kPa
Pre test mode:	TM1				
Final test mode:	TM1				

4.2.2 Test Setup Diagram:

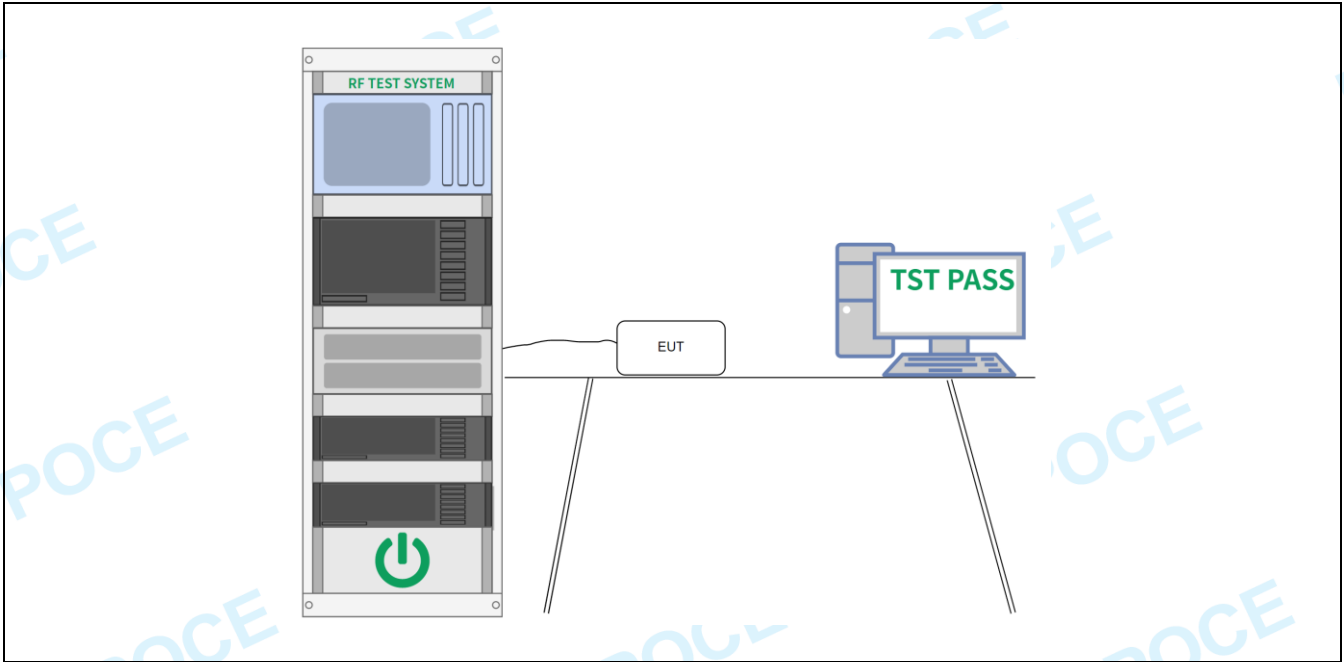

4.2.3 Test Data:

Please Refer to Appendix for Details.


4.3 Field strength of fundamental

Test Requirement:	<p>Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:</p> <table border="1"> <thead> <tr> <th>Fundamental frequency</th> <th>Field strength of fundamental (millivolts/meter)</th> <th>Field strength of harmonics (microvolts/meter)</th> </tr> </thead> <tbody> <tr> <td>902-928 MHz</td> <td>50</td> <td>500</td> </tr> <tr> <td>2400-2483.5 MHz</td> <td>50</td> <td>500</td> </tr> <tr> <td>5725-5875 MHz</td> <td>50</td> <td>500</td> </tr> <tr> <td>24.0-24.25 GHz</td> <td>250</td> <td>2500</td> </tr> </tbody> </table>	Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)	902-928 MHz	50	500	2400-2483.5 MHz	50	500	5725-5875 MHz	50	500	24.0-24.25 GHz	250	2500
Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)														
902-928 MHz	50	500														
2400-2483.5 MHz	50	500														
5725-5875 MHz	50	500														
24.0-24.25 GHz	250	2500														
Test Limit:	<p>Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:</p> <table border="1"> <thead> <tr> <th>Fundamental frequency</th> <th>Field strength of fundamental (millivolts/meter)</th> <th>Field strength of harmonics (microvolts/meter)</th> </tr> </thead> <tbody> <tr> <td>902-928 MHz</td> <td>50</td> <td>500</td> </tr> <tr> <td>2400-2483.5 MHz</td> <td>50</td> <td>500</td> </tr> <tr> <td>5725-5875 MHz</td> <td>50</td> <td>500</td> </tr> <tr> <td>24.0-24.25 GHz</td> <td>250</td> <td>2500</td> </tr> </tbody> </table>	Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)	902-928 MHz	50	500	2400-2483.5 MHz	50	500	5725-5875 MHz	50	500	24.0-24.25 GHz	250	2500
Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)														
902-928 MHz	50	500														
2400-2483.5 MHz	50	500														
5725-5875 MHz	50	500														
24.0-24.25 GHz	250	2500														
Test Method:	ANSI C63.10-2013 section 6.5															
Procedure:	ANSI C63.10-2013 section 6.5															

4.3.1 E.U.T. Operation:

Operating Environment:					
Temperature:	23.5 °C	Humidity:	53.6 %	Atmospheric Pressure:	101 kPa
Pre test mode:	TM1				
Final test mode:	TM1				

4.3.2 Test Setup Diagram:

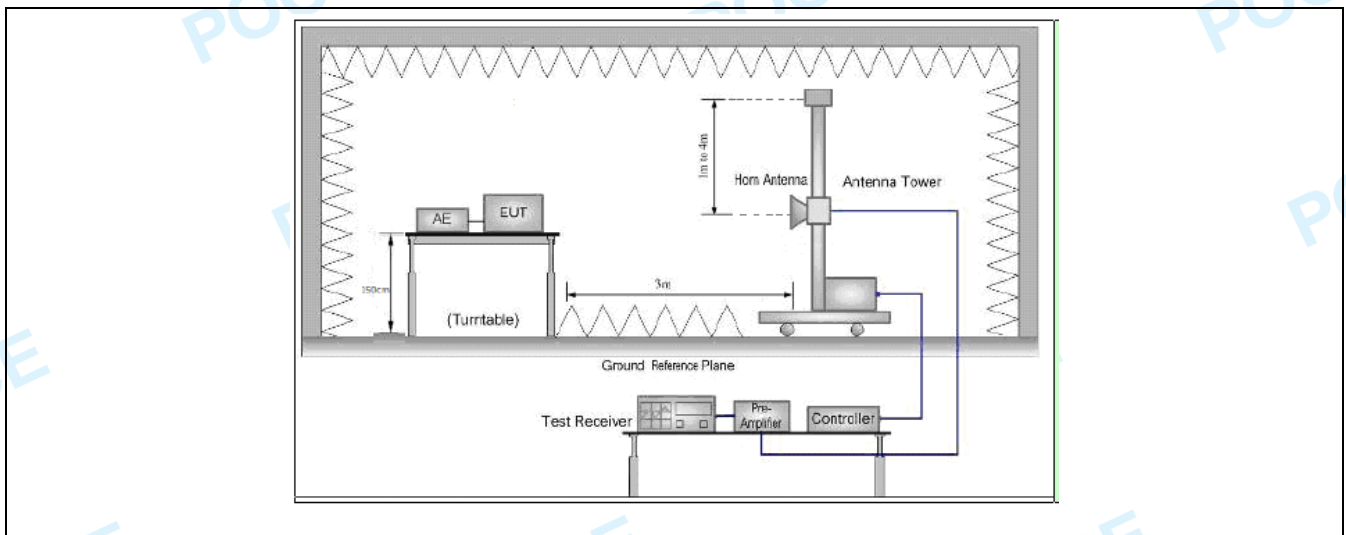

4.3.3 Test Data:

Frequency (MHz)	Emission Level (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector (PK/AV)	Polarization (H/V)
2402.00	92.77	114	-21.00	PK	H
2402.00	82.85	94	-13.80	AV	H
2402.00	92.95	114	-19.41	PK	V
2402.00	81.55	94	-11.59	AV	V

Frequency (MHz)	Emission Level (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector (PK/AV)	Polarization (H/V)
2440.00	90.01	114.00	-22.57	PK	H
2440.00	83.33	94.00	-9.56	AV	H
2440.00	91.71	114.00	-18.93	PK	V
2440.00	84.79	94.00	-9.07	AV	V

Frequency (MHz)	Emission Level (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector (PK/AV)	Polarization (H/V)
2480.00	92.54	114	-18.03	PK	H
2480.00	80.45	94	-10.84	AV	H
2480.00	90.69	114	-22.59	PK	V
2480.00	80.05	94	-11.68	AV	V

Remark: Over=Limit - Emission Level


4.4 Emissions in restricted frequency bands (below 1GHz)

Test Requirement:	47 CFR 15.249(a) 47 CFR 15.249(d) 47 CFR 15.249(e)																																							
Test Limit:	<p>Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:</p> <table border="1"> <thead> <tr> <th>Fundamental frequency</th> <th>Field strength of fundamental (millivolts/meter)</th> <th>Field strength of harmonics (microvolts/meter)</th> </tr> </thead> <tbody> <tr> <td>902-928 MHz</td> <td>50</td> <td>500</td> </tr> <tr> <td>2400-2483.5 MHz</td> <td>50</td> <td>500</td> </tr> <tr> <td>5725-5875 MHz</td> <td>50</td> <td>500</td> </tr> <tr> <td>24.0-24.25 GHz</td> <td>250</td> <td>2500</td> </tr> </tbody> </table> <p>Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation.</p> <table border="1"> <thead> <tr> <th>Frequency (MHz)</th> <th>Field strength (microvolts/meter)</th> <th>Measurement distance (meters)</th> </tr> </thead> <tbody> <tr> <td>0.009-0.490</td> <td>2400/F(kHz)</td> <td>300</td> </tr> <tr> <td>0.490-1.705</td> <td>24000/F(kHz)</td> <td>30</td> </tr> <tr> <td>1.705-30.0</td> <td>30</td> <td>30</td> </tr> <tr> <td>30-88</td> <td>100 **</td> <td>3</td> </tr> <tr> <td>88-216</td> <td>150 **</td> <td>3</td> </tr> <tr> <td>216-960</td> <td>200 **</td> <td>3</td> </tr> <tr> <td>Above 960</td> <td>500</td> <td>3</td> </tr> </tbody> </table> <p>** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.</p> <p>As shown in § 15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.</p>	Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)	902-928 MHz	50	500	2400-2483.5 MHz	50	500	5725-5875 MHz	50	500	24.0-24.25 GHz	250	2500	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)	0.009-0.490	2400/F(kHz)	300	0.490-1.705	24000/F(kHz)	30	1.705-30.0	30	30	30-88	100 **	3	88-216	150 **	3	216-960	200 **	3	Above 960	500	3
Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)																																						
902-928 MHz	50	500																																						
2400-2483.5 MHz	50	500																																						
5725-5875 MHz	50	500																																						
24.0-24.25 GHz	250	2500																																						
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)																																						
0.009-0.490	2400/F(kHz)	300																																						
0.490-1.705	24000/F(kHz)	30																																						
1.705-30.0	30	30																																						
30-88	100 **	3																																						
88-216	150 **	3																																						
216-960	200 **	3																																						
Above 960	500	3																																						
Test Method:	ANSI C63.10-2013 section 6.5																																							
Procedure:	ANSI C63.10-2013 section 6.5																																							

4.4.1 E.U.T. Operation:

Operating Environment:					
Temperature:	23.5 °C	Humidity:	53.6 %	Atmospheric Pressure:	101 kPa
Pre test mode:	TM1				
Final test mode:	TM1				

4.4.2 Test Setup Diagram:

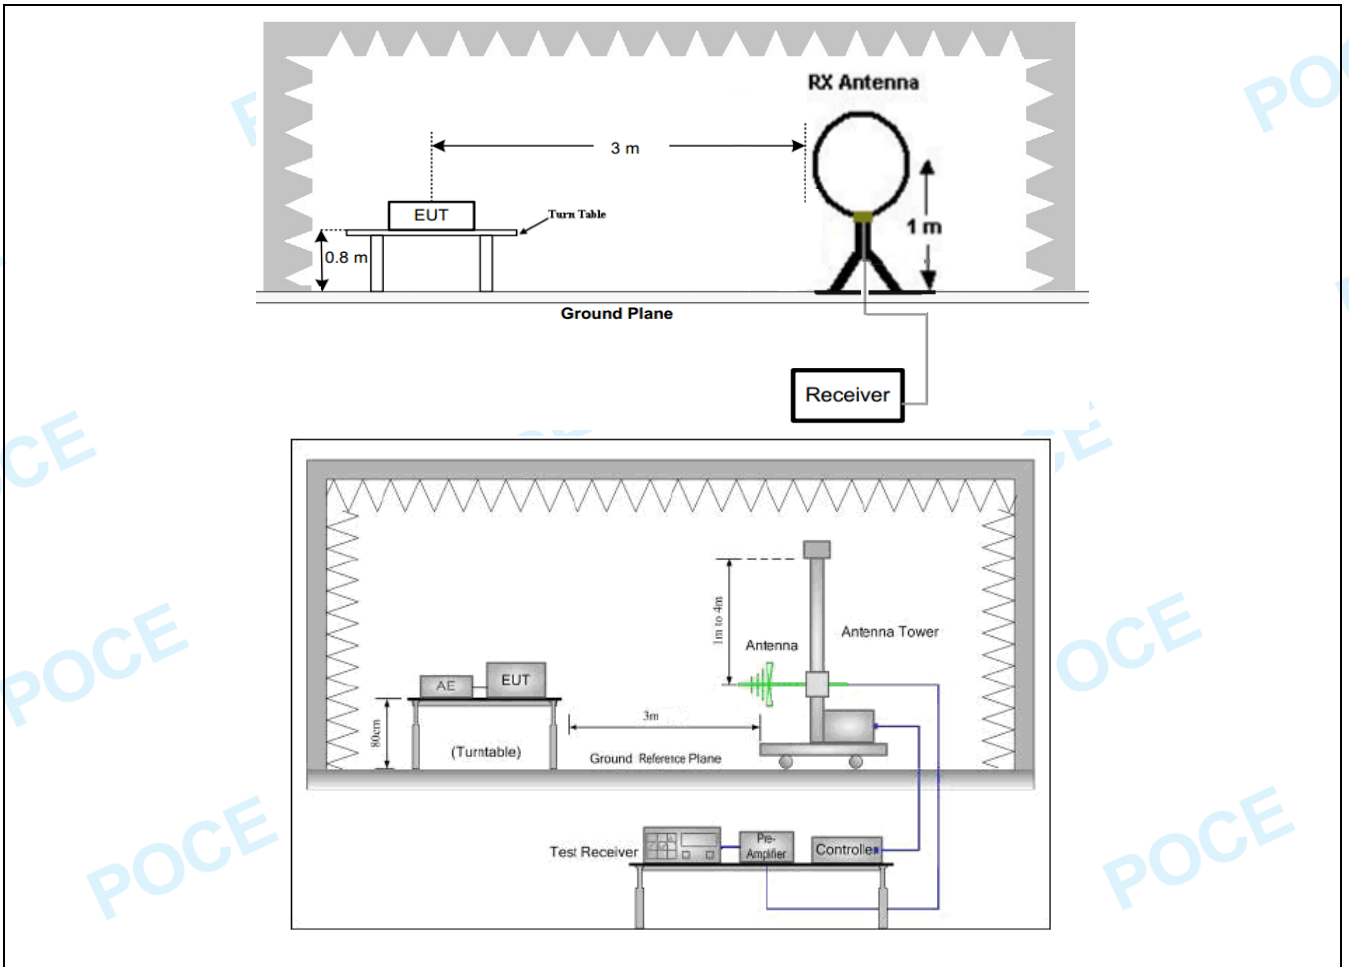

4.4.3 Test Data:


Between 9KHz – 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.

NOTE: Test data only records the worst mode or worst channel.


Between 30MHz – 1000MHz

TM1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / CH: L

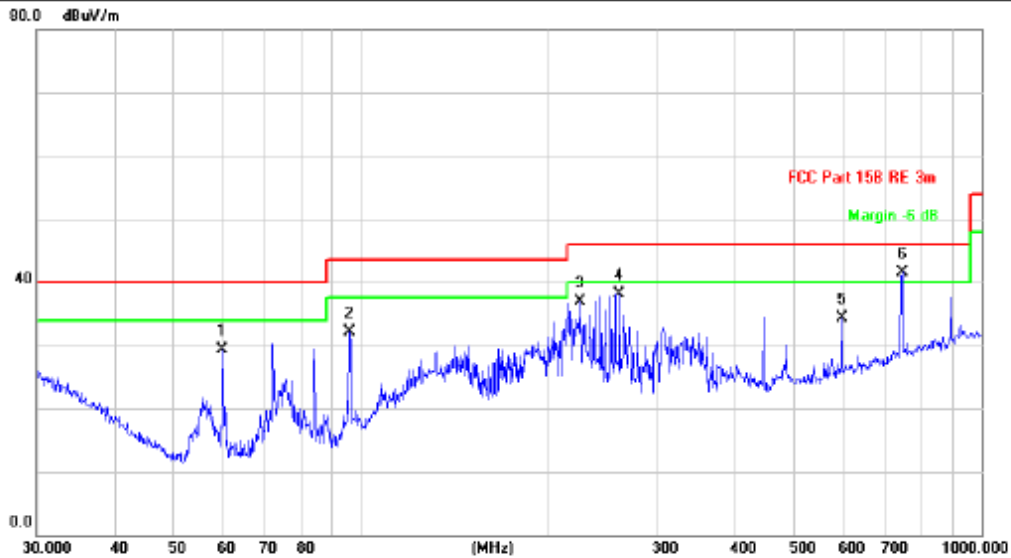

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		59.8588	41.24	-11.92	29.32	40.00	-10.68	QP	100	116	
2		95.7622	41.82	-9.78	32.04	43.50	-11.46	QP	100	25	
3		225.3080	43.41	-6.47	36.94	46.00	-9.06	QP	100	18	
4		261.0581	43.22	-5.05	38.17	46.00	-7.83	QP	100	79	
5		595.1327	32.25	2.13	34.38	46.00	-11.62	QP	100	315	
6	*	744.8659	36.77	4.83	41.60	46.00	-4.40	QP	100	189	

TM1 / Polarization: Vertical / Band: 2400-2483.5 MHz / CH: L

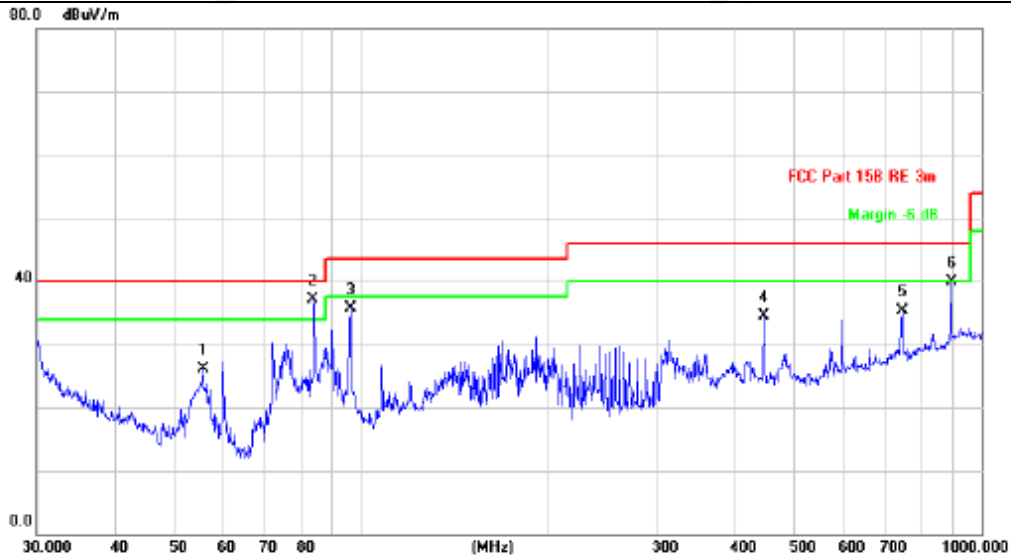

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		55.6094	37.46	-11.42	26.04	40.00	-13.96	QP	100	337	
2	*	83.8156	48.70	-11.55	37.15	40.00	-2.85	QP	100	129	
3		96.0986	45.34	-9.69	35.65	43.50	-7.85	QP	100	316	
4		446.4141	35.25	-0.65	34.60	46.00	-11.40	QP	100	115	
5		744.8659	30.38	4.83	35.21	46.00	-10.79	QP	100	293	
6		893.8567	32.72	7.18	39.90	46.00	-6.10	QP	100	38	

Remark: Over= Measurement Level - Limit
 Measurement Level=Test receiver reading + correction factor
 Correction Factor= Antenna Factor + Cable loss – Pre-amplifier


4.5 Emissions in restricted frequency bands (above 1GHz)

Test Requirement:	47 CFR 15.249(a) 47 CFR 15.249(d) 47 CFR 15.249(e)																									
Test Limit:	Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:																									
	<table border="1"> <thead> <tr> <th>Fundamental frequency</th> <th>Field strength of fundamental (millivolts/meter)</th> <th>Field strength of harmonics (microvolts/meter)</th> </tr> </thead> <tbody> <tr> <td>902-928 MHz</td> <td>50</td> <td>500</td> </tr> <tr> <td>2400-2483.5 MHz</td> <td>50</td> <td>500</td> </tr> <tr> <td>5725-5875 MHz</td> <td>50</td> <td>500</td> </tr> <tr> <td>24.0-24.25 GHz</td> <td>250</td> <td>2500</td> </tr> </tbody> </table>			Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)	902-928 MHz	50	500	2400-2483.5 MHz	50	500	5725-5875 MHz	50	500	24.0-24.25 GHz	250	2500								
Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)																								
902-928 MHz	50	500																								
2400-2483.5 MHz	50	500																								
5725-5875 MHz	50	500																								
24.0-24.25 GHz	250	2500																								
Test Limit:	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation.																									
	<table border="1"> <thead> <tr> <th>Frequency (MHz)</th> <th>Field strength (microvolts/meter)</th> <th>Measurement distance (meters)</th> </tr> </thead> <tbody> <tr> <td>0.009-0.490</td> <td>2400/F(kHz)</td> <td>300</td> </tr> <tr> <td>0.490-1.705</td> <td>24000/F(kHz)</td> <td>30</td> </tr> <tr> <td>1.705-30.0</td> <td>30</td> <td>30</td> </tr> <tr> <td>30-88</td> <td>100 **</td> <td>3</td> </tr> <tr> <td>88-216</td> <td>150 **</td> <td>3</td> </tr> <tr> <td>216-960</td> <td>200 **</td> <td>3</td> </tr> <tr> <td>Above 960</td> <td>500</td> <td>3</td> </tr> </tbody> </table>			Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)	0.009-0.490	2400/F(kHz)	300	0.490-1.705	24000/F(kHz)	30	1.705-30.0	30	30	30-88	100 **	3	88-216	150 **	3	216-960	200 **	3	Above 960	500
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)																								
0.009-0.490	2400/F(kHz)	300																								
0.490-1.705	24000/F(kHz)	30																								
1.705-30.0	30	30																								
30-88	100 **	3																								
88-216	150 **	3																								
216-960	200 **	3																								
Above 960	500	3																								
Test Method:	ANSI C63.10-2013 section 6.6																									
	ANSI C63.10-2013 section 6.6																									

4.5.1 E.U.T. Operation:

Operating Environment:					
Temperature:	23.5 °C	Humidity:	53.6 %	Atmospheric Pressure:	101 kPa
Pre test mode:	TM1				
Final test mode:	TM1				


4.5.2 Test Setup Diagram:

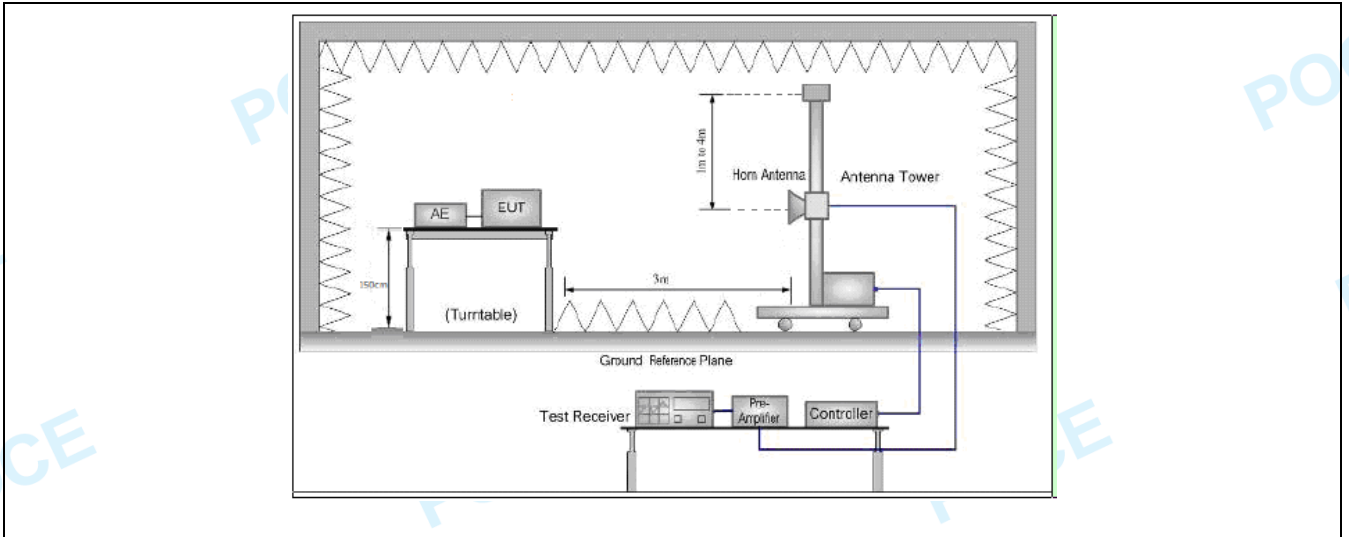

4.5.3 Test Data:


Test results only record the worst mode or channel (Waveforms below the limit of 20dbm are not marked. The range 12GHz to 25GHz only has background noise, so it is not recorded in the report)

TM1 / Polarization: Horizontal / Band: 2.4G / CH: L

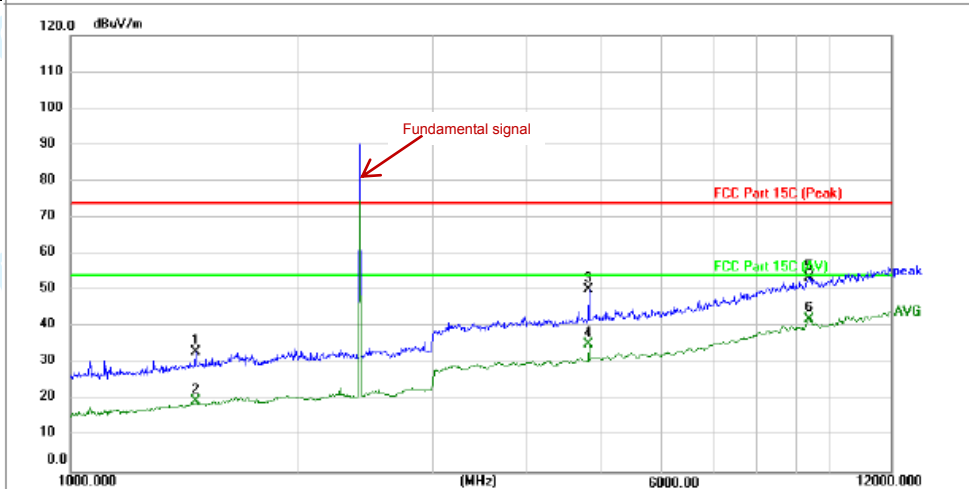


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	1458.934	42.58	-9.56	33.02	74.00	-40.98	peak			P	
2	1462.563	29.26	-9.53	19.73	54.00	-34.27	AVG			P	
3	4808.864	51.02	-0.88	50.14	74.00	-23.86	peak			P	
4	4808.864	36.14	-0.88	35.26	54.00	-18.74	AVG			P	
5	9383.013	45.50	8.07	53.57	74.00	-20.43	peak			P	
6 *	9383.013	34.17	8.07	42.24	54.00	-11.76	AVG			P	

TM1 / Polarization: Vertical / Band: 2.4G / CH: L

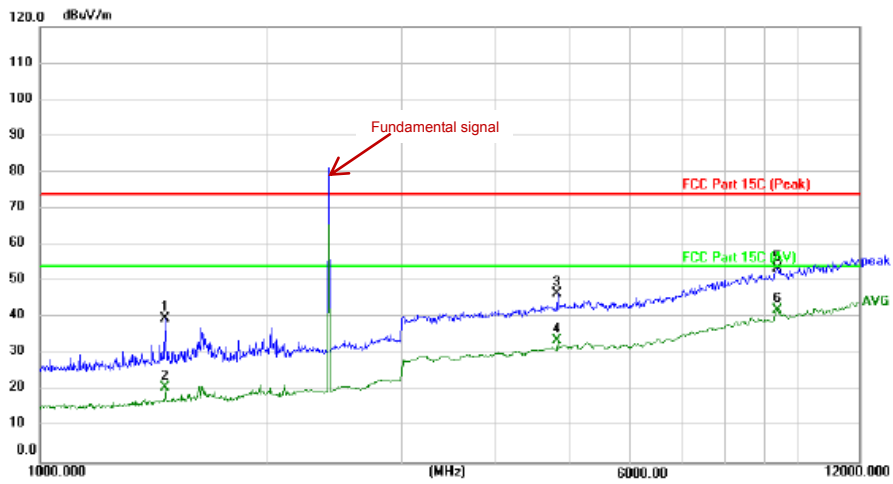


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	1462.563	51.27	-11.41	39.86	74.00	-34.14	peak			P	
2	1462.563	32.22	-11.41	20.81	54.00	-33.19	AVG			P	
3	4808.864	46.93	-0.26	46.67	74.00	-27.33	peak			P	
4	4808.864	34.10	-0.26	33.84	54.00	-20.16	AVG			P	
5	9383.013	45.65	7.86	53.51	74.00	-20.49	peak			P	
6 *	9383.013	34.15	7.86	42.01	54.00	-11.99	AVG			P	

TM1 / Polarization: Horizontal / Band: 2.4G/ CH: H

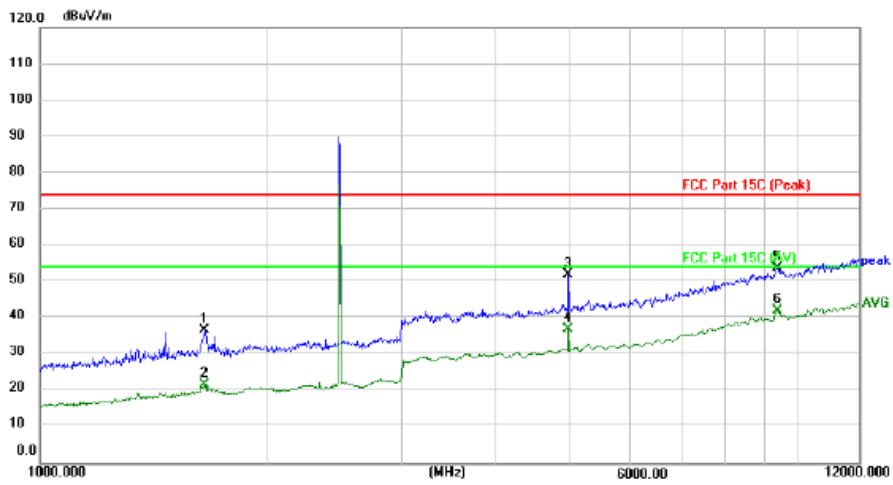

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	1651.941	45.71	-8.82	36.89	74.00	-37.11	peak			P	
2	1651.941	30.54	-8.82	21.72	54.00	-32.28	AVG			P	
3	4966.745	52.30	-0.34	51.96	74.00	-22.04	peak			P	
4	4966.745	37.50	-0.34	37.16	54.00	-16.84	AVG			P	
5	9383.013	45.79	8.07	53.86	74.00	-20.14	peak			P	
6 *	9383.013	34.08	8.07	42.15	54.00	-11.85	AVG			P	

TM1 / Polarization: Vertical / Band: 2.4G / CH: H

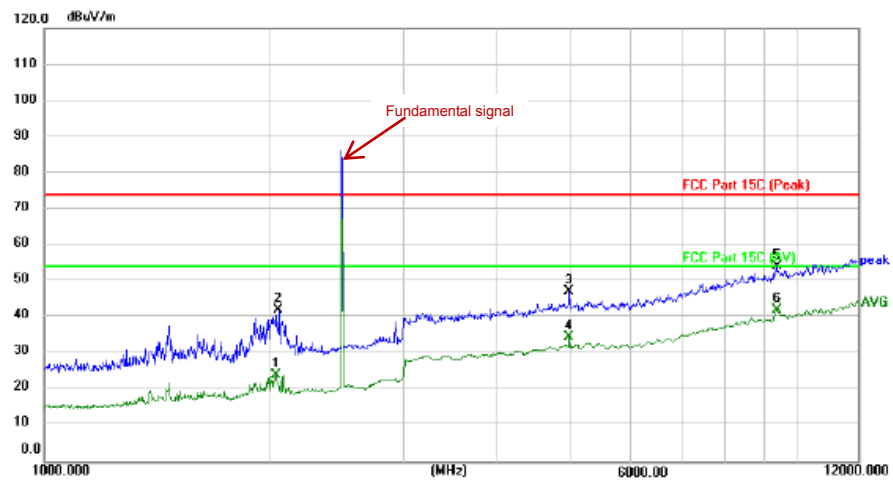

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2025.291	33.42	-9.35	24.07	54.00	-29.93	AVG			P	
2	2045.522	51.34	-9.27	42.07	74.00	-31.93	peak			P	
3	4966.745	46.89	0.26	47.15	74.00	-26.85	peak			P	
4	4966.745	34.26	0.26	34.52	54.00	-19.48	AVG			P	
5	9359.726	46.25	7.84	54.09	74.00	-19.91	peak			P	
6 *	9383.013	34.15	7.86	42.01	54.00	-11.99	AVG			P	

Remark: Over= Measurement Level - Limit
 Measurement Level=Test receiver reading + correction factor
 Correction Factor= Antenna Factor + Cable loss – Pre-amplifier

Note:

Per ANSI C63.10-2013, if there are two or more antennas, the conducted powers at Core 0, Core 1, ..., Core i were first measured separately, as shown in the section above (this product only has one antenna). The measured values were then summed in linear power units then converted back to dBm.

Sample Multiple antennas Calculation: Core 0 + Core 1 + ... Core i = MIMO/CDD
(i is the number of antennas)


(#VALUE! mW + XX mW) = #VALUE! mW = XX dBm

Sample e.i.r.p. Calculation:


XX dBm = Conducted Power (dBm) + Ant gain (dBi)

5 TEST SETUP PHOTOS

Emissions in restricted frequency bands (below 1GHz)

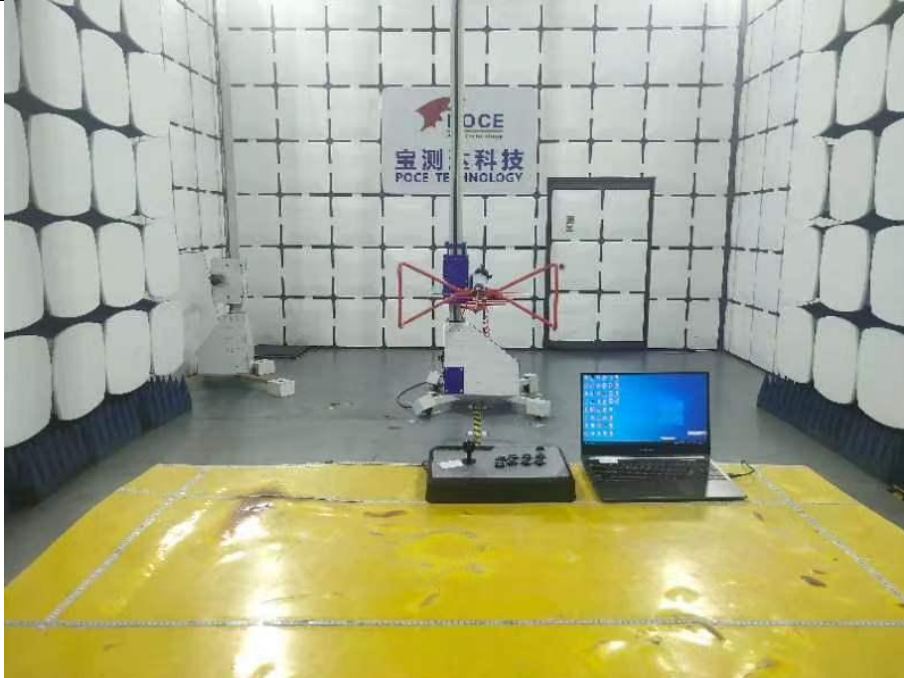

Emissions in restricted frequency bands (above 1GHz)

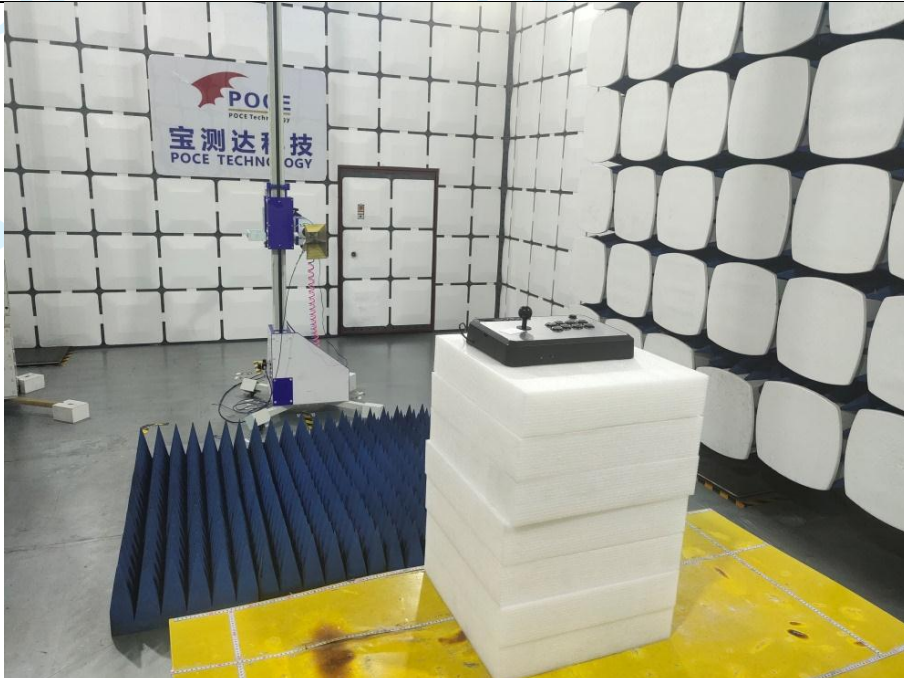

Conducted Emission at AC power line



6 PHOTOS OF THE EUT

Please refer to report No.: POCE230818307VRW

Appendix

1. Occupied Bandwidth

Condition	Antenna	Modulation	Frequency (MHz)	99% BW (MHz)	20dB BW (MHz)
NVNT	ANT1	GFSK	2402.00	0.813	0.879
NVNT	ANT1	GFSK	2440.00	0.815	0.880
NVNT	ANT1	GFSK	2480.00	0.817	0.881



99% Occupied Bandwidth_NVNT_ANT1_2440



99% Occupied Bandwidth_NVNT_ANT1_2480

