

FCC 47 CFR PART 15 SUBPART C

CERTIFICATION TEST REPORT

For

SMART VACUUM CLEANER

MODEL No.: S12CA0A02, S12CA0A10, S12CA0A11,
S12CA0A15, S12CA0A20, S12CA0A30, S12US0A02, S12US0A10,
S12US0A11, S12US0A15, S12US0A20, S12US0A30, PureOne S12,
PureOne S12M, PureOne S12 Plus

FCC ID: 2ASWB-S12

Trade Mark: N/A

REPORT NO: ES190327975W-1

ISSUE DATE: July 11, 2019

Prepared for

Ecovacs Robotics Co Ltd

NO 108 SHI HU RD (W) WU ZHONG ZONE, SUZHOU, JIANGSU, 215128,
CN

Prepared by

EMTEK(SHENZHEN) CO., LTD.
Bldg 69, Majialong Industry Zone, Nanshan District,
Shenzhen, Guangdong, China
TEL: 86-755-26954280
FAX: 86-755-26954282

TABLE OF CONTENTS

1	TEST RESULT CERTIFICATION	4
2	EUT TECHNICAL DESCRIPTION	5
3	SUMMARY OF TEST RESULT	6
4	TEST METHODOLOGY	7
4.1	GENERAL DESCRIPTION OF APPLIED STANDARDS	7
4.2	MEASUREMENT EQUIPMENT USED	7
4.3	DESCRIPTION OF TEST MODES	8
5	FACILITIES AND ACCREDITATIONS	9
5.1	FACILITIES.....	9
5.2	LABORATORY ACCREDITATIONS AND LISTINGS	9
6	TEST SYSTEM UNCERTAINTY	10
7	SETUP OF EQUIPMENT UNDER TEST	11
7.1	RADIO FREQUENCY TEST SETUP 1.....	11
7.2	RADIO FREQUENCY TEST SETUP 2.....	11
7.3	CONDUCTED EMISSION TEST SETUP	12
7.4	BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM.....	13
7.5	SUPPORT EQUIPMENT.....	13
8	TEST REQUIREMENTS	14
8.1	DTS(6DB)BANDWIDTH	14
8.2	MAXIMUM PEAK CONDUCTED OUTPUT POWER	20
8.3	MAXIMUM POWER SPECTRAL DENSITY	22
8.4	UNWANTED EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS	28
8.5	RADIATED SPURIOUS EMISSION	33
8.6	CONDUCTED EMISSIONS TEST	51
8.7	ANTENNA APPLICATION	56

Modified History

Rev.	Summary	Date of Rev.	Report No.
V1.0	Original Report	/	ES190327975W
V1.1	Add model ,Wireless module shield update(1)	July 11, 2019	ES190327975W-1

(1) Update Radiated Disturbance

1 TEST RESULT CERTIFICATION

Applicant:	Ecovacs Robotics Co Ltd NO 108 SHI HU RD (W) WU ZHONG ZONE, SUZHOU, JIANGSU, 215128, CN
Manufacturer:	Ecovacs Robotics Co Ltd NO 108 SHI HU RD (W) WU ZHONG ZONE, SUZHOU, JIANGSU, 215128, CN
EUT Description:	SMART VACUUM CLEANER
Model Number:	S12CA0A02, S12CA0A10, S12CA0A11, S12CA0A15, S12CA0A20, S12CA0A30, S12US0A02, S12US0A10, S12US0A11, S12US0A15, S12US0A20, S12US0A30, PureOne S12, PureOne S12M, PureOne S12 Plus
Trademark:	N/A

Measurement Procedure Used:

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 2, Subpart J FCC 47 CFR Part 15, Subpart C	PASS

The above equipment was tested by EMTEK(SHENZHEN) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2 and Part 15.247

The test results of this report relate only to the tested sample identified in this report.

Date of Test :

April 1, 2019 to April 15, 2019
June 28, 2019 to July 9, 2019

Prepared by :

Sevin Li

Sevin Li/Editor

Reviewer :

Joe Xia

Joe Xia/Supervisor

Approve & Authorized Signer :

Lisa Wang

Lisa Wang/Manager



2 EUT TECHNICAL DESCRIPTION

Characteristics	Description
Model Number	S12CA0A02, S12CA0A10, S12CA0A11, S12CA0A15, S12CA0A20, S12CA0A30, S12US0A02, S12US0A10, S12US0A11, S12US0A15, S12US0A20, S12US0A30, PureOne S12, PureOne S12M, PureOne S12 Plus (Note: between them are identical in circuitry and electrical, mechanical and physical construction; the differences is model name for trading purpose; For PURE ONE S12 have display unit and used 2500 mAh battery, the PURE ONE S12 M has no display unit used 2000mAh battery, other circuitry and electrical mechanical and physical construction are same. Select PureOne S12 M as the final test model)
IEEE 802.11 WLAN Mode Supported	<input checked="" type="checkbox"/> 802.11b <input checked="" type="checkbox"/> 802.11g <input checked="" type="checkbox"/> 802.11n(20MHz channel bandwidth)
Data Rate	<input checked="" type="checkbox"/> 802.11 b:1,2,5.5,11Mbps; <input checked="" type="checkbox"/> 802.11 g:6,9,12,18,24,36,48,54Mbps; <input checked="" type="checkbox"/> 802.11n(HT20):MCS0-MCS7;
Modulation	DSSS with DBPSK/DQPSK/CCK for 802.11b; OFDM with BPSK/QPSK/16QAM for 802.11g/n;
Operating Frequency Range	<input checked="" type="checkbox"/> 2412-2462MHz for 802.11b/g/n(HT20);
Number of Channels	<input checked="" type="checkbox"/> 11 channels for 802.11b/g/n(HT20);
Transmit Power Max	18.52 dBm
Antenna Type	FPC antenna
Gain	2 dBi
Power supply	<input checked="" type="checkbox"/> DC 26V via Adapter <input checked="" type="checkbox"/> DC 21.6V via internal rechargeable lithium battery <input checked="" type="checkbox"/> Adapter: Model: CHA12NA Input: AC 100-120V, 60Hz, 1.3A max Output1: DC 26.0V, 0.7A Output2: DC 26.0V, 0.7A <input checked="" type="checkbox"/> Battery: For PURE ONE S12, PURE ONE S12 Plus Model: A12NA-02 Rating: 21.6V DC 2500mAh 54Wh For PURE ONE S12 M Model: A12NA-01 Rating: 21.6V DC 2000mAh 43.2Wh Note: Two Batteries are same except the capacity

Note: for more details, please refer to the User's manual of the EUT.

3 SUMMARY OF TEST RESULT

FCC PartClause	Test Parameter	Verdict	Remark
15.247(a)(2)	DTS (6dB) Bandwidth	PASS	
15.247(b)(3)	Maximum Peak Conducted Output Power	PASS	
15.247(e)	Maximum Power Spectral Density Level	PASS	
15.247(d)	Unwanted Emission Into Non-Restricted Frequency Bands	PASS	
15.247(d) 15.209	Unwanted Emission Into Restricted Frequency Bands (conducted)	PASS	
15.247(d) 15.209	Radiated Spurious Emission	PASS	
15.207	Conducted Emission Test	PASS	
15.247(b)	Antenna Application	PASS	
	NOTE1:N/A (Not Applicable) NOTE2:According to FCC OET KDB 558074, the report use radiated measurements in the restricted frequency bands. In addition, the radiated test is also performed to ensure the emissions emanating from the device cabinet also comply with the applicable limits.		

RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for FCC ID: 2ASWB-S12 filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

4 TEST METHODOLOGY

4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:

FCC 47 CFR Part 2, Subpart J

FCC 47 CFR Part 15, Subpart C

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

4.2 MEASUREMENT EQUIPMENT USED

4.2.1 Conducted Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	CAL. DATE	CAL. DATE	DUE CAL.
Test Receiver	Rohde & Schwarz	ESCI	26115-010-0027	May 20, 2018	May 19, 2019	May 18, 2020
L.I.S.N.	Rohde & Schwarz	ENV216	101161	May 20, 2018	May 19, 2019	May 18, 2020
50Ω Coaxial Switch	Anritsu	MP59B	6100175589	May 21, 2018	May 20, 2019	May 19, 2020
Voltage Probe	Rohde & Schwarz	ESH2-Z3	100122	May 21, 2018	May 20, 2019	May 19, 2020
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100006	May 20, 2018	May 19, 2019	May 18, 2020
I.S.N	Teseq GmbH	ISN T800	30327	May 21, 2018	May 20, 2019	May 19, 2020

4.2.2 Radiated Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	CAL. DATE	CAL. DATE	DUE CAL.
EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	May 21, 2018	May 20, 2019	May 19, 2020
Pre-Amplifier	HP	8447F	2944A07999	May 20, 2018	May 19, 2019	May 18, 2020
Bilog Antenna	Schwarzbeck	VULB9163	142	May 20, 2018	May 19, 2019	May 18, 2020
Loop Antenna	ARA	PLA-1030/B	1029	May 20, 2018	May 19, 2019	May 18, 2020
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170399	May 21, 2018	May 20, 2019	May 19, 2020
Horn Antenna	Schwarzbeck	BBHA 9120	D143	May 20, 2018	May 19, 2019	May 18, 2020
Cable	Schwarzbeck	AK9513	ACRX1	May 21, 2018	May 20, 2019	May 19, 2020
Cable	Rosenberger	N/A	FP2RX2	May 21, 2018	May 20, 2019	May 19, 2020
Cable	Schwarzbeck	AK9513	CRPX1	May 21, 2018	May 20, 2019	May 19, 2020
Cable	Schwarzbeck	AK9513	CRRX2	May 21, 2018	May 20, 2019	May 19, 2020

4.2.3 Radio Frequency Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	CAL. DATE	CAL. DATE	DUE CAL.
Spectrum Analyzer	Agilent	E4407B	88156318	May 21, 2018	May 20, 2019	May 19, 2020
Signal Analyzer	Agilent	N9010A	My53470879	May 21, 2018	May 20, 2019	May 19, 2020
Power meter	Anritsu	ML2495A	0824006	May 21, 2018	May 20, 2019	May 19, 2020
Power sensor	Anritsu	MA2411B	0738172	May 21, 2018	May 20, 2019	May 19, 2020

Remark: Each piece of equipment is scheduled for calibration once a year.

4.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (802.11b: 1 Mbps; 802.11g: 6 Mbps; 802.11n (HT20): were used for all test.

Test software: ESP_RF_test_tool_v1.1.0

Power Level: ATT 20dB*0.25

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Frequency and Channel list for 802.11 b/g/n(HT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447		

Test Frequency and Channel for 802.11 b/g/n (HT20):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	6	2437	11	2462

5 FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

Bldg 69, Majialong Industry Zone District, Nanshan District, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

5.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

- | | |
|---------------|---|
| EMC Lab. | <ul style="list-style-type: none"> : Accredited by CNAS, 2018.11.30
The certificate is valid until 2022.10.28
The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2006 (identical to ISO/IEC 17025:2017)
The Certificate Registration Number is L2291 : Accredited by TUV Rheinland Shenzhen 2018.03.30
The Laboratory has been assessed according to the requirements ISO/IEC 17025 : Accredited by FCC, August 09, 2018
Designation Number: CN1204
Test Firm Registration Number: 882943
Accredited by A2LA, August 08, 2018
The Certificate Registration Number is 4321.01 : Accredited by Industry Canada, November 09, 2018
The Conformity Assessment Body Identifier is CN0008 |
| Name of Firm | : SHENZHEN EMTEK CO., LTD. |
| Site Location | : Bldg 69, Majialong Industry Zone,
Nanshan District, Shenzhen, Guangdong, China |

6 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:


Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Peak Output Power Test	$\pm 1.0\text{dB}$
Conducted Emissions Test	$\pm 2.0\text{dB}$
Radiated Emission Test	$\pm 2.0\text{dB}$
Power Density	$\pm 2.0\text{dB}$
Occupied Bandwidth Test	$\pm 1.0\text{dB}$
Band Edge Test	$\pm 3\text{dB}$
All emission, radiated	$\pm 3\text{dB}$
Antenna Port Emission	$\pm 3\text{dB}$
Temperature	$\pm 0.5^{\circ}\text{C}$
Humidity	$\pm 3\%$

Measurement Uncertainty for a level of Confidence of 95%

7 SETUP OF EQUIPMENT UNDER TEST

7.1 RADIO FREQUENCY TEST SETUP 1

The WLAN component's antenna ports(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.



7.2 RADIO FREQUENCY TEST SETUP 2

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

Below 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT.


30MHz-1GHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


Above 1GHz:

The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


(a) Radiated Emission Test Set-Up, Frequency Below 30MHz

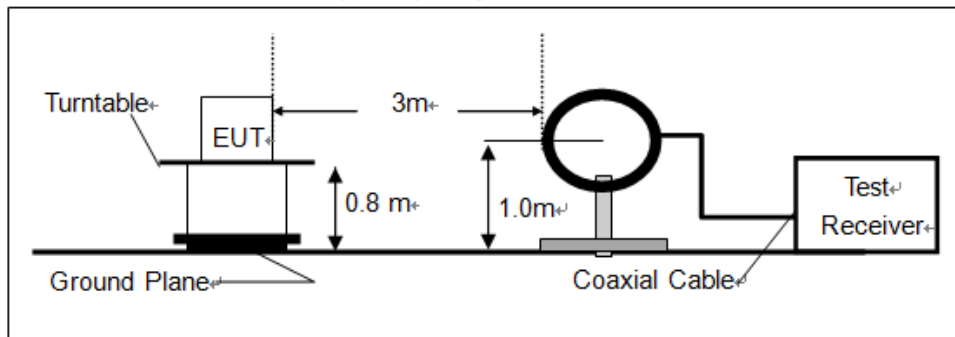

(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

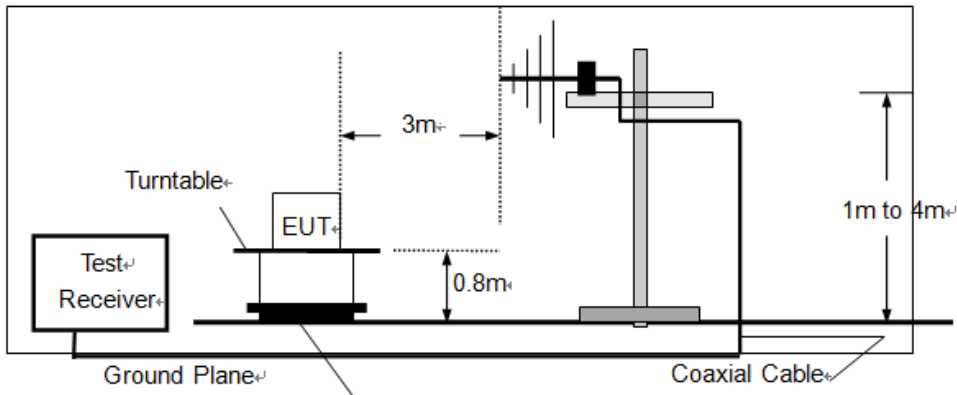

(c) Radiated Emission Test Set-Up, Frequency above 1000MHz

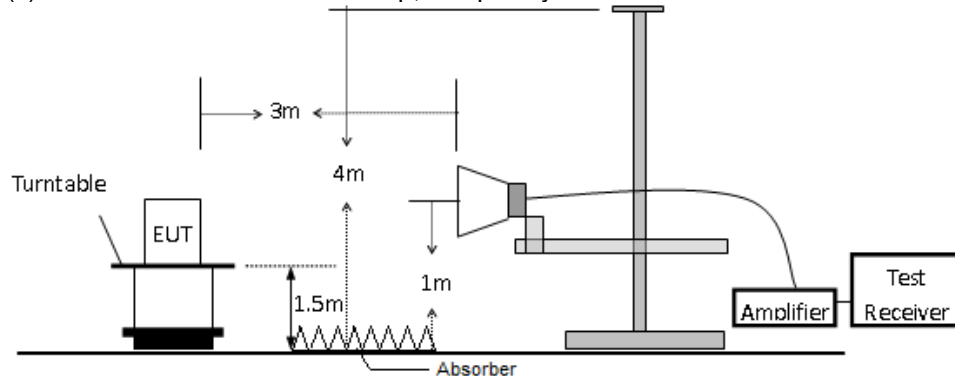


7.3 CONDUCTED EMISSION TEST SETUP


The mains cable of the EUT (maybe per AC/DC Adapter) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1 m.

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

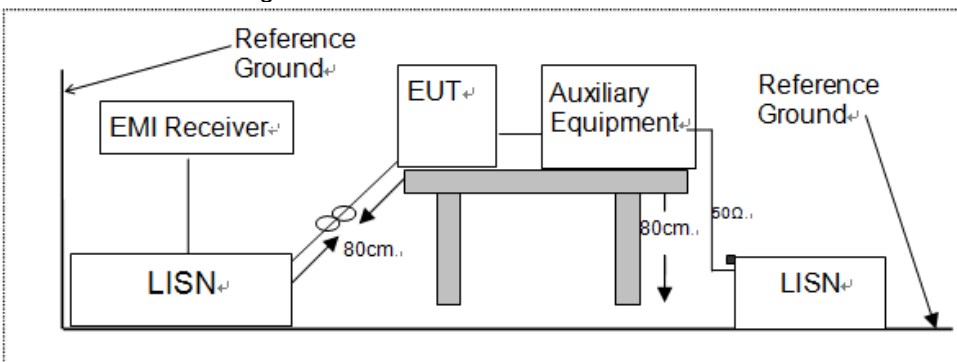

7.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

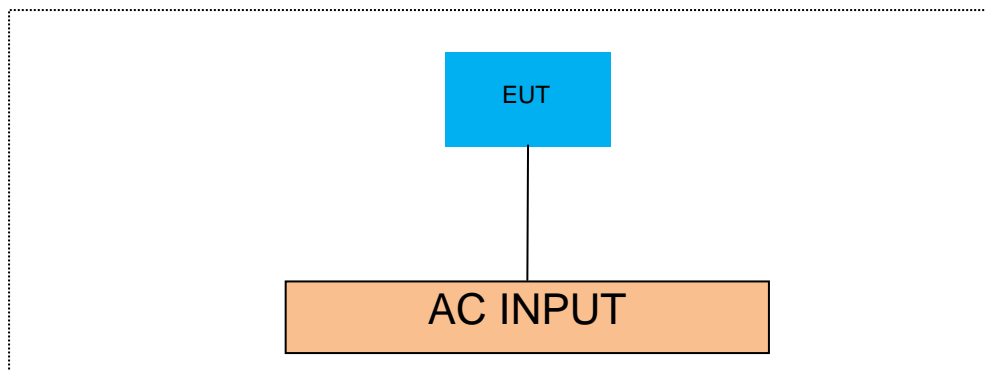

7.5 SUPPORT EQUIPMENT

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
N/A	N/A	N/A	N/A	N/A	N/A	N/A

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

8 TEST REQUIREMENTS

8.1 DTS(6DB)BANDWIDTH

8.1.1 Applicable Standard

According to FCC Part15.247(a)(2) and KDB 558074 D01 15.247 Meas Guidance v05r02

8.1.2 Conformance Limit

The minimum -6 dB bandwidth shall be at least 500 kHz.

8.1.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.1.4 Test Procedure

The EUT was operating in IEEE 802.11b/g/n mode and controlled its channel. Printed out the test result from the spectrum by hard copy function.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 100 kHz.

Set the video bandwidth (VBW) =300kHz.

Set Span=2 times OBW

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Measure and record the results in the test report.

8.1.5 Test Results


Temperature : 26°C
Humidity : 60 %

Test By: King Kong

Operation Mode	Channel Number	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Verdict
802.11b	1	2412	9.03	>=500	PASS
	6	2437	9.03	>=500	PASS
	11	2462	9.03	>=500	PASS
802.11g	1	2412	16.324	>=500	PASS
	6	2437	16.324	>=500	PASS
	11	2462	16.324	>=500	PASS
802.11n (HT20)	1	2412	17.250	>=500	PASS
	6	2437	17.250	>=500	PASS
	11	2462	17.250	>=500	PASS

Test Model

DTS (6dB) Bandwidth
802.11b
Channel 1: 2412MHz

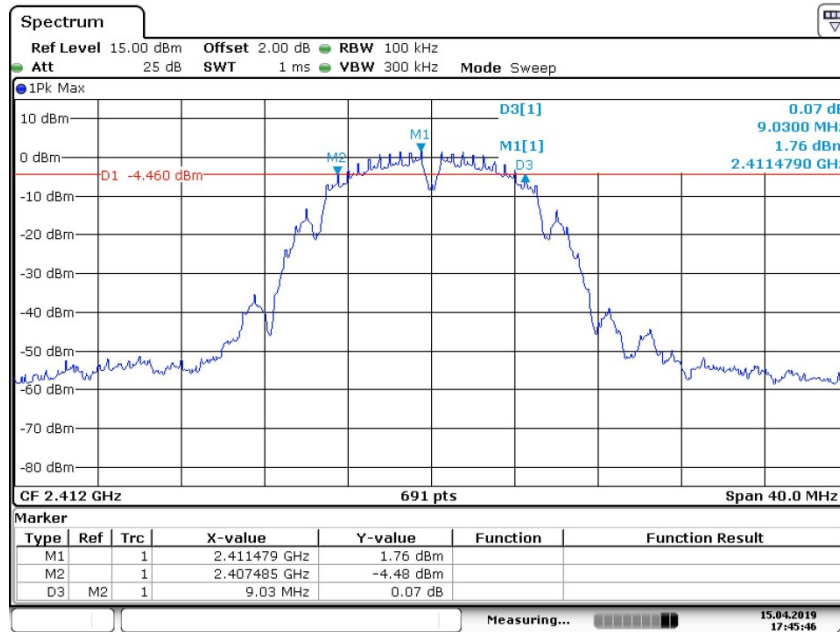

Date: 15.APR.2019 17:45:45

Test Model


DTS (6dB) Bandwidth
802.11b
Channel 6: 2437MHz



Date: 15.APR.2019 17:46:39

Test Model


DTS (6dB) Bandwidth
802.11b
Channel 11: 2462MHz

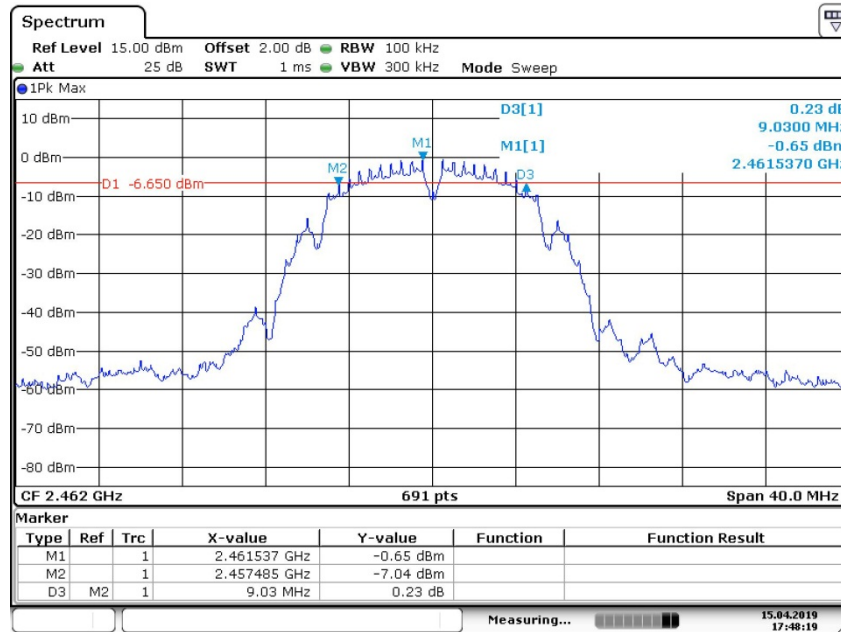

Date: 15.APR.2019 17:48:19

Test Model


DTS (6dB) Bandwidth
802.11g
Channel 1: 2412MHz

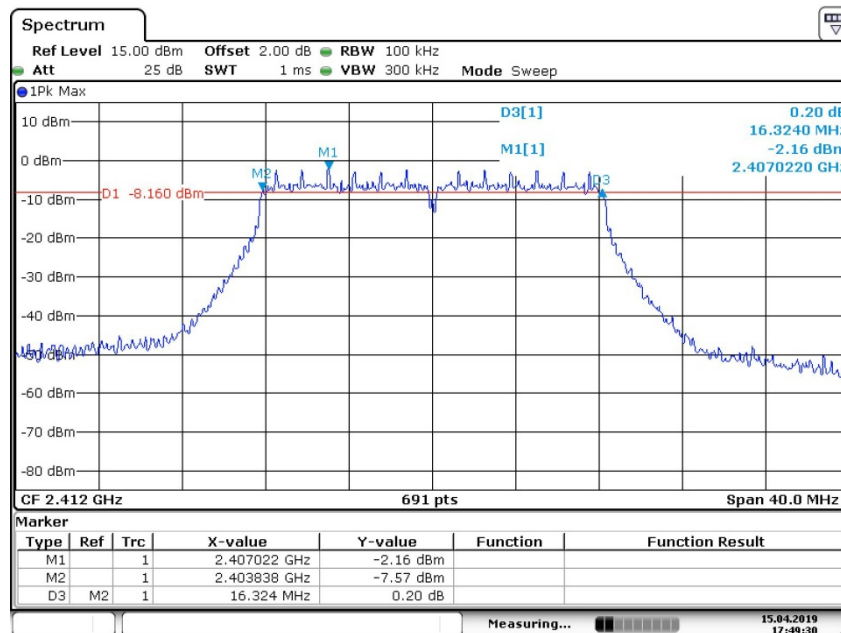

Date: 15.APR.2019 17:49:30

Test Model


DTS (6dB) Bandwidth
802.11g
Channel 6: 2437MHz

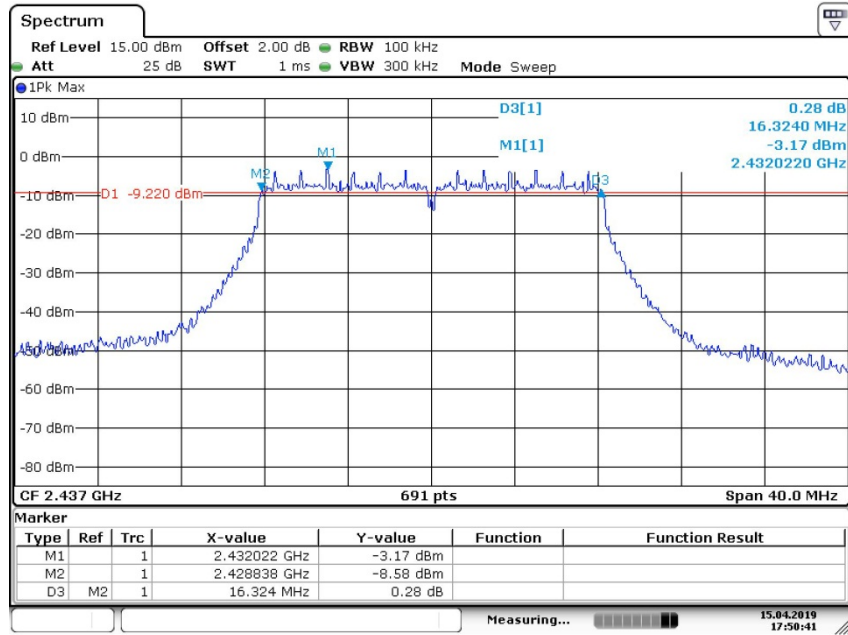

Date: 15.APR.2019 17:50:41

Test Model


DTS (6dB) Bandwidth
802.11g
Channel 11: 2462MHz

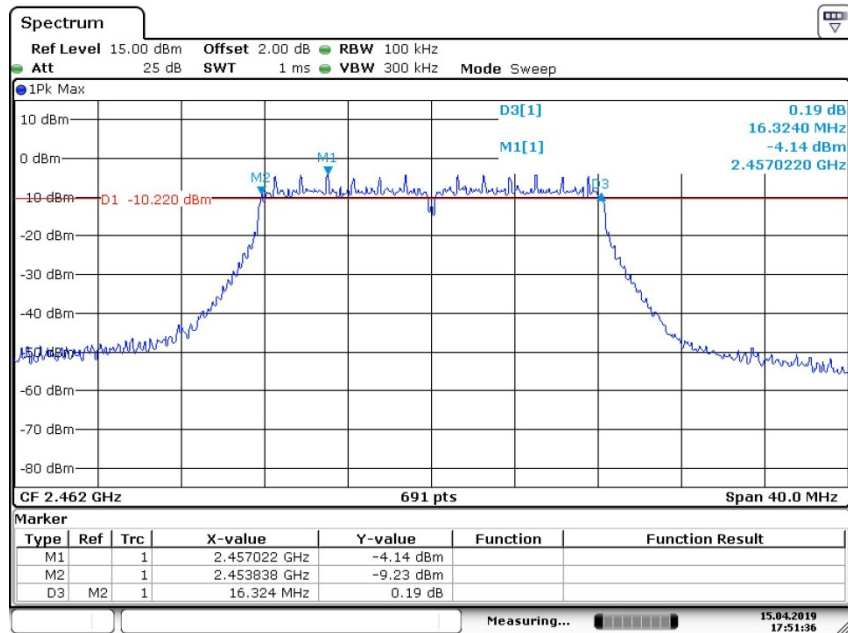

Date: 15.APR.2019 17:51:36

Test Model


DTS (6dB) Bandwidth
802.11n (HT20)
Channel 1: 2412MHz

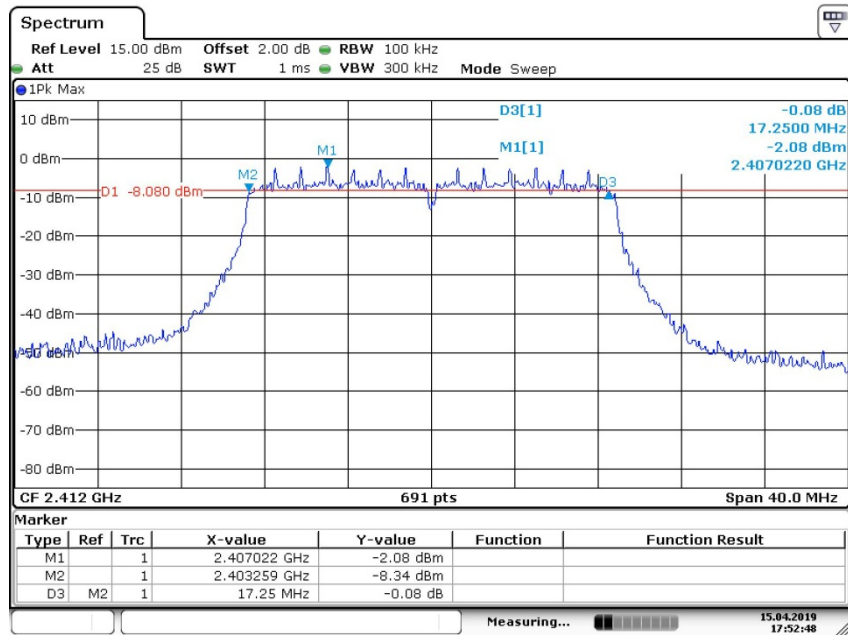

Date: 15 APR 2019 17:52:48

Test Model


DTS (6dB) Bandwidth
802.11n (HT20)
Channel 6: 2437MHz

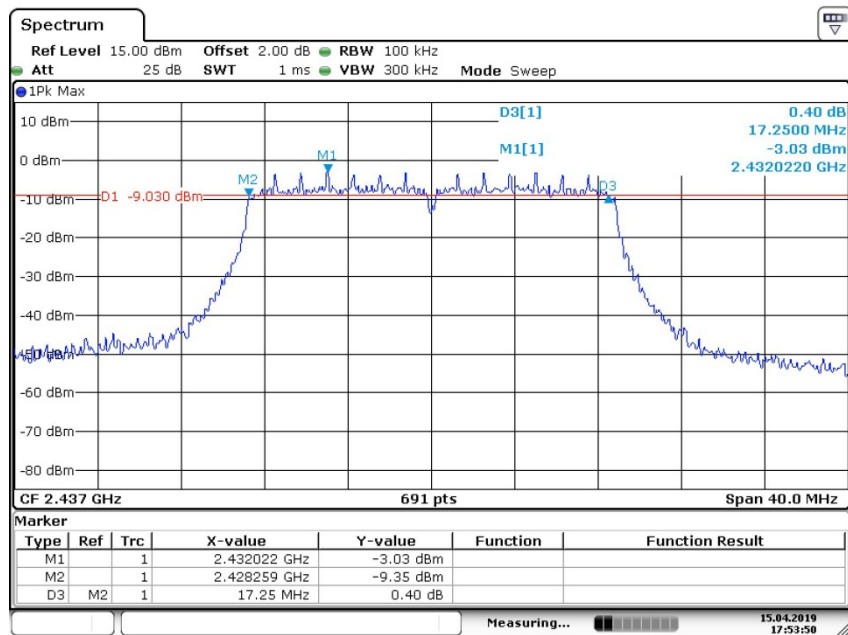

Date: 15 APR 2019 17:53:51

Test Model

DTS (6dB) Bandwidth
802.11n (HT20)
Channel 11: 2462MHz

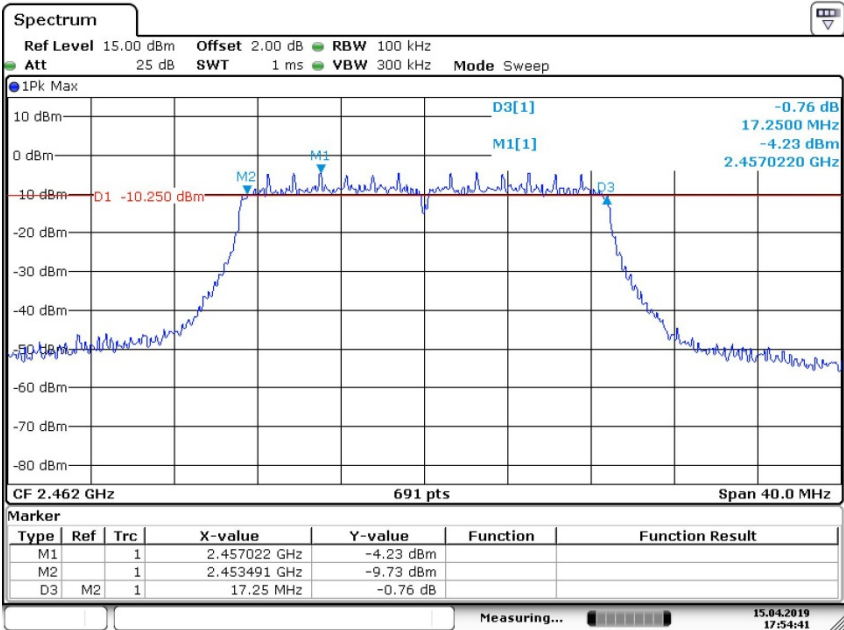

Date: 15.APR.2019 17:54:41

8.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER

8.2.1 Applicable Standard

According to FCC Part15.247(b)(3) and KDB 558074 D01 15.247 Meas Guidance v05r02

8.2.2 Conformance Limit

The maximum peak conducted output power of the intentional radiator for systems using digital modulation in the 2400 - 2483.5 MHz bands shall not exceed: 1 Watt (30dBm).

8.2.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.2.4 Test Procedure

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum output power setting and enable the EUT transmit continuously.

Measure the conducted output power with cable loss and record the results in the test report.

Measure and record the results in the report.

As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power. The maximum conducted output power is the total transmit power delivered to all antennas and antenna elements, averaged across all symbols in the signalling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or transmitting at a reduced power level. If multiple modes of operation are implemented, the maximum conducted output power is the highest total transmit power occurring in any mode

If the transmitter employs an antenna system that emits multiple directional beams, but does not emit multiple directional beams simultaneously, the total output power conducted to the array or arrays that comprise the device (i.e. the sum of the power supplied to all antennas, antenna elements, staves, etc., and summed across all carriers or frequency channels) shall not exceed the applicable output power limit specified in sections 5.4(b) and 5.4(d). However, the total conducted output power shall be reduced by 1 dB below the specified limits for each 3 dB that the directional gain of the antenna/antenna array exceeds 6 dBi. The directional antenna gain shall be computed as the sum of 10 log (number of array elements or staves) plus the directional gain of the element or staff having the highest gain.

8.2.5 Test Results

Pass

See the Follow Page

Temperature : 26°C
Humidity : 60 %

Test By:

King Kong

Operation Mode	Channel Number	Channel Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)	Verdict
802.11b	1	2412	11.98	30	PASS
	6	2437	11.17	30	PASS
	11	2462	10.30	30	PASS
802.11g	1	2412	16.67	30	PASS
	6	2437	15.92	30	PASS
	11	2462	15.06	30	PASS
802.11n (ht20)	1	2412	18.52	30	PASS
	6	2437	18.47	30	PASS
	11	2462	17.81	30	PASS

8.3 MAXIMUM POWER SPECTRAL DENSITY

8.3.1 Applicable Standard

According to FCC Part15.247(e) and KDB 558074 D01 15.247 Meas Guidance v05r02

8.3.2 Conformance Limit

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

8.3.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.3.4 Test Procedure

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance

The transmitter output (antenna port) was connected to the spectrum analyzer

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: 3 kHz

Set the VBW to:10 kHz.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

Note: If antenna Gain exceeds 6 dBi, then PSD Limit=8-(Gain- 6)


8.3.5 Test Results

Temperature : 26°C Test By: King Kong
Humidity : 60 %

Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Level (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
802.11b	1	2412	-13.38	=<8	PASS
	6	2437	-11.79	=<8	PASS
	11	2462	-13.30	=<8	PASS
802.11g	1	2412	-14.07	=<8	PASS
	6	2437	-15.21	=<8	PASS
	11	2462	-15.44	=<8	PASS
802.11n (HT20)	1	2412	-14.80	=<8	PASS
	6	2437	-15.42	=<8	PASS
	11	2462	-15.42	=<8	PASS
N/A					

Test Model


Power Spectral Density
802.11b
Channel 1: 2412MHz

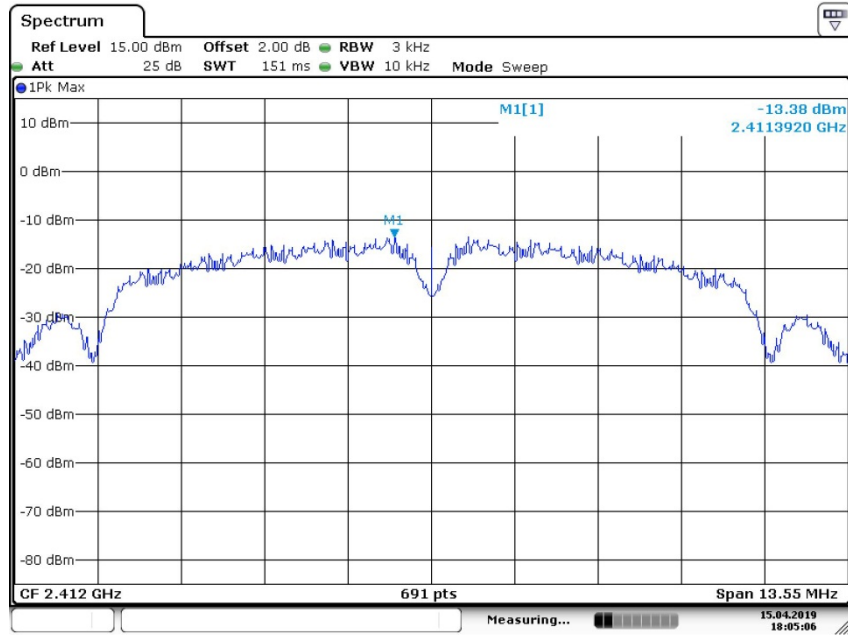

Date: 15.APR.2019 18:05:05

Test Model


Power Spectral Density
802.11b
Channel 6: 2437MHz

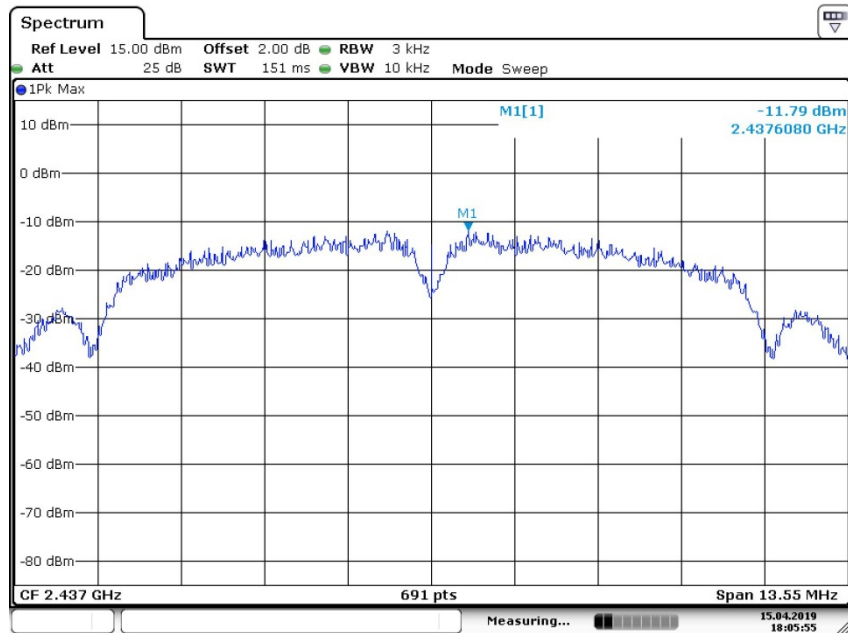

Date: 15.APR.2019 18:05:56

Test Model


Power Spectral Density
802.11b
Channel 11: 2462MHz

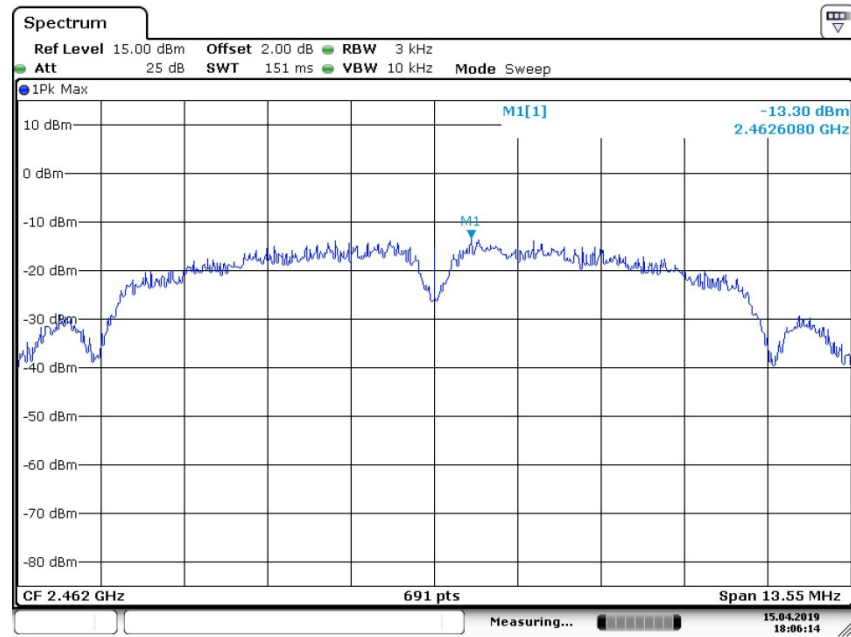

Date: 15.APR.2019 18:06:14

Test Model


Power Spectral Density
802.11g
Channel 1: 2412MHz

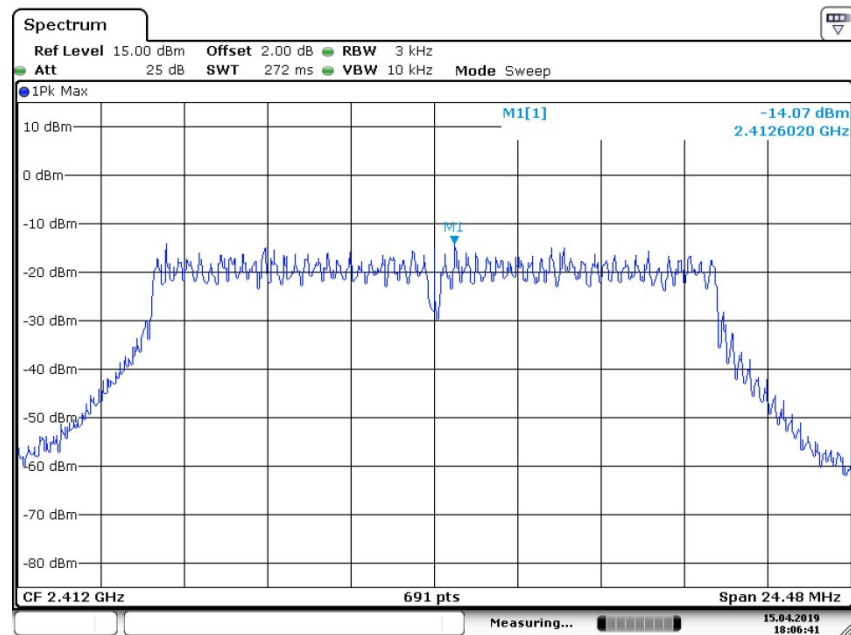

Date: 15.APR.2019 18:06:41

Test Model


Power Spectral Density
802.11g
Channel 6: 2437MHz

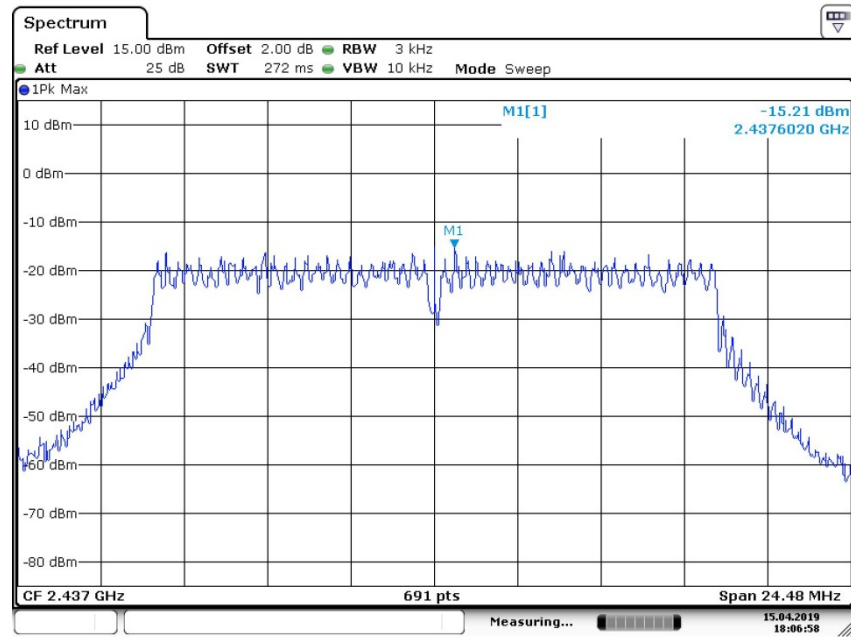

Date: 15.APR.2019 18:06:58

Test Model


Power Spectral Density
802.11g
Channel 11: 2462MHz

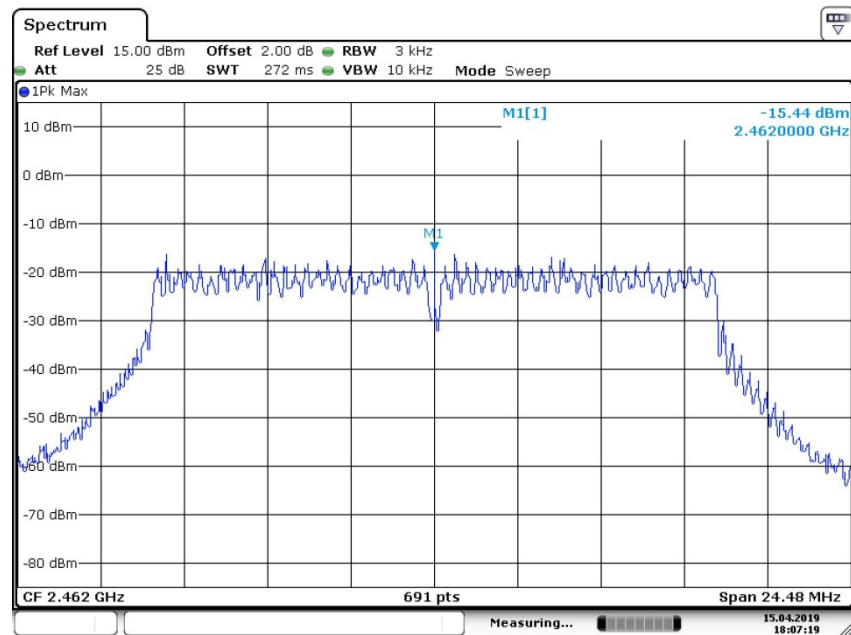

Date: 15.APR.2019 18:07:18

Test Model


Power Spectral Density
802.11n (HT20)
Channel 1: 2412MHz

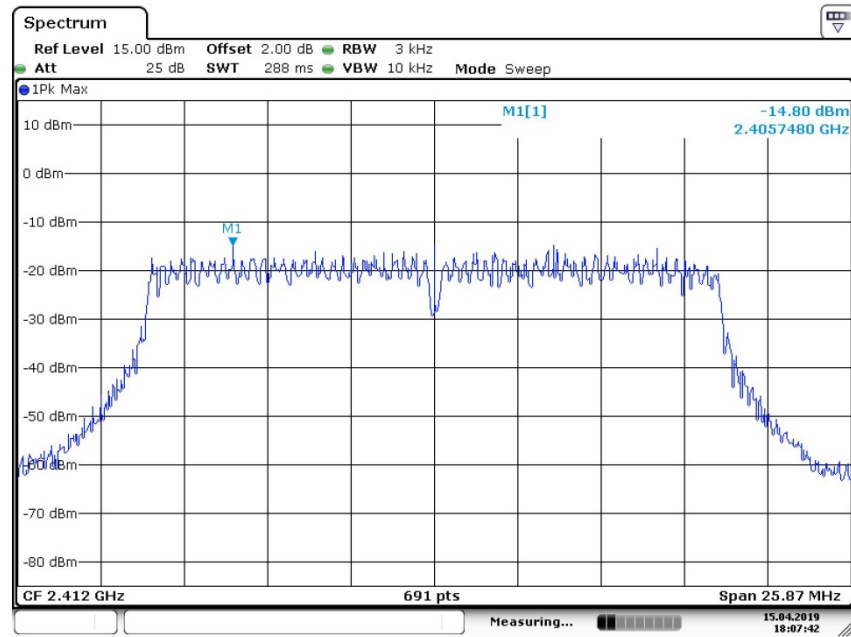

Date: 15.APR.2019 18:07:41

Test Model


Power Spectral Density
802.11n (HT20)
Channel 6: 2437MHz

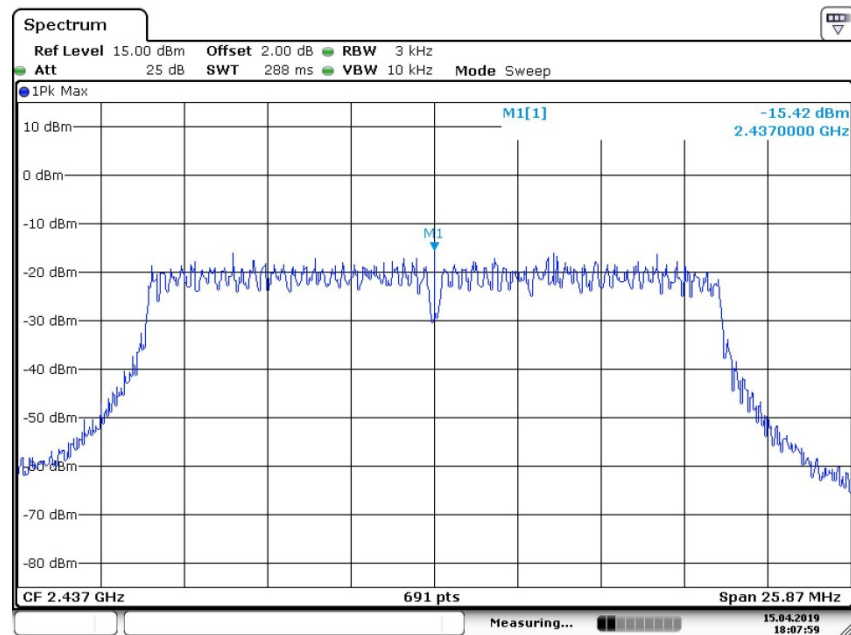

Date: 15.APR.2019 18:07:59

Test Model

Power Spectral Density
802.11n (HT20)
Channel 11: 2462MHz

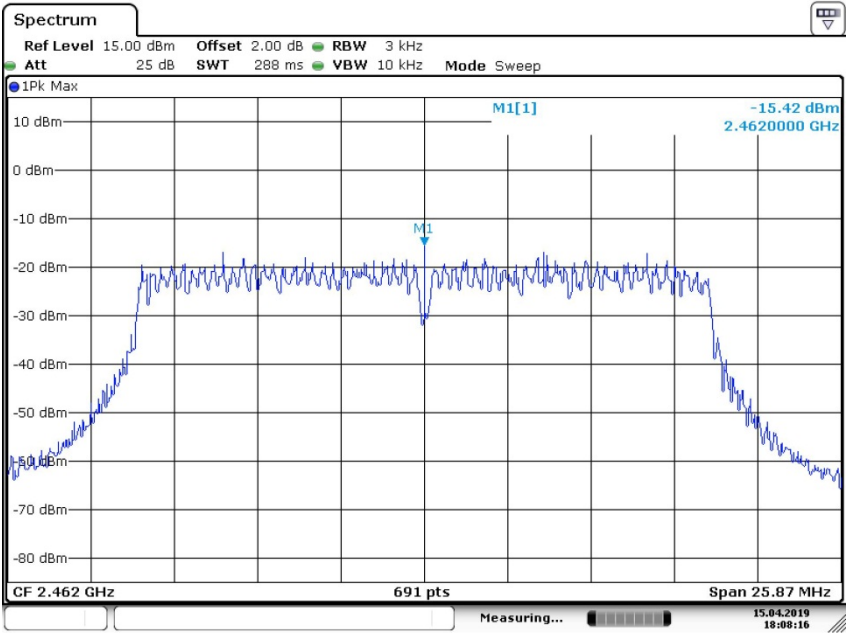

Date: 15.APR.2019 18:08:17

8.4 UNWANTED EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS

8.4.1 Applicable Standard

According to FCC Part 15.247(d) and KDB 558074 D01 15.247 Meas Guidance v05r02

8.4.2 Conformance Limit

According to FCC Part 15.247(d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

8.4.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.4.4 Test Procedure

The transmitter output (antenna port) was connected to the spectrum analyzer

■ Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to ≥ 1.5 times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

■ Emission level measurement

Set the center frequency and span to encompass frequency range to be measured.

Set the RBW = 100 kHz.

Set the VBW = 300 kHz.

Set Detector = peak

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.


Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements. Report the three highest emissions relative to the limit.

8.4.5 Test Results


All modes 2.4G 802.11b/g/n(HT20) have been tested, and the worst result recorded was report as below:

Test Model ☐ 802.11b ☐ 802.11g ☒ 802.11n(HT20)
☒ Channel 1: 2412MHz

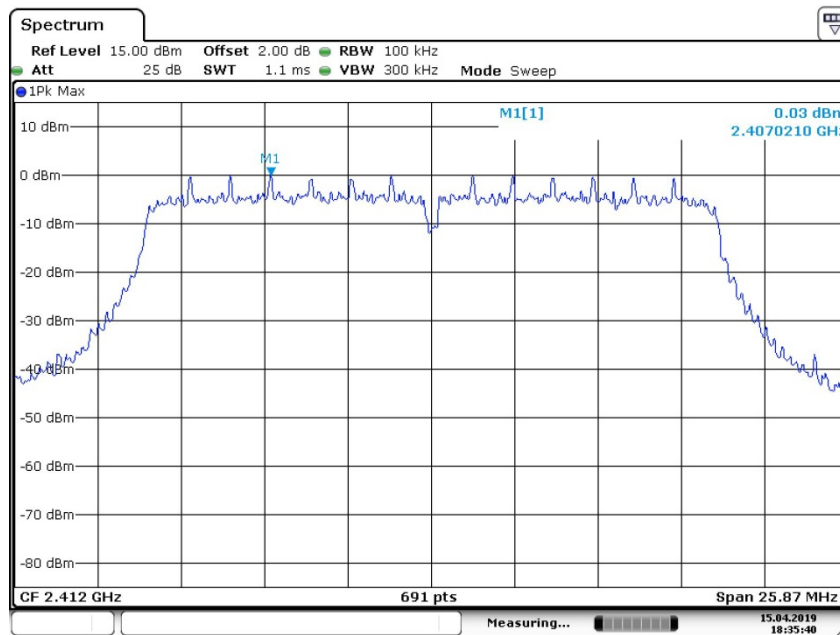


Date: 15 APR 2019 18:35:40

Test Model ☐ 802.11b ☐ 802.11g ☒ 802.11n(HT20)
☒ Channel 1: 2412MHz

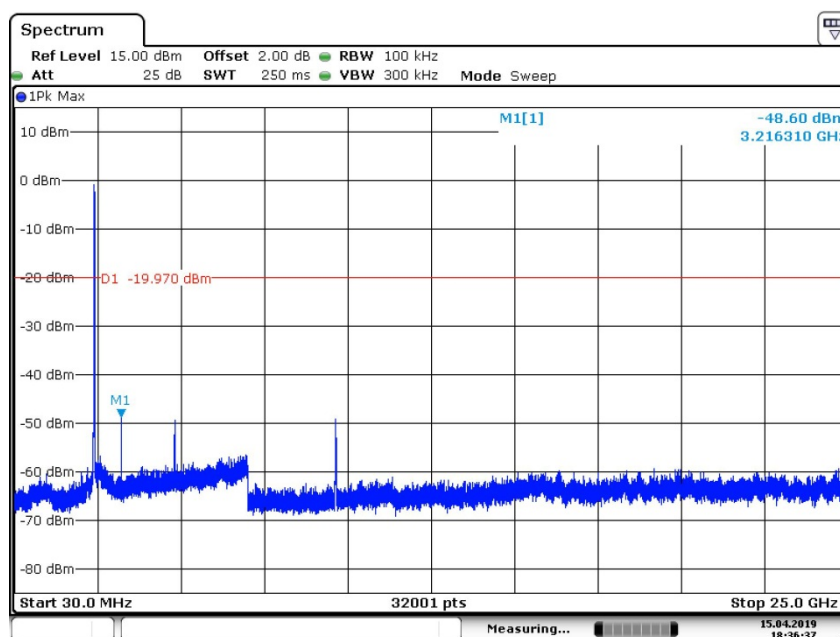


Date: 15 APR 2019 18:36:37

Test Model ☐ 802.11b ☐ 802.11g ☒ 802.11n(HT20) Band edge
☒ Channel 1: 2412MHz

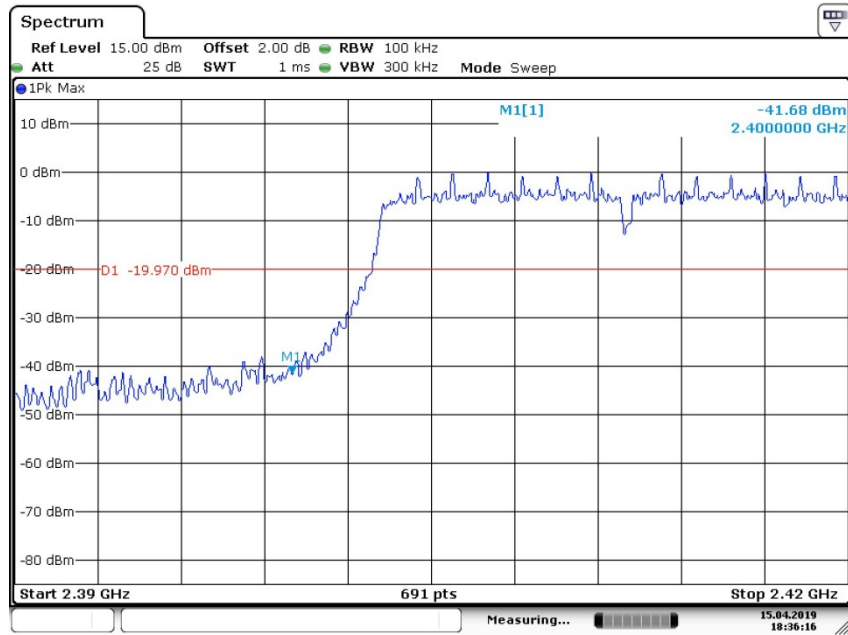


Date: 15.APR.2019 18:36:15

Test Model ☐ 802.11b ☐ 802.11g ☒ 802.11n(HT20) PSD(Power Spectral Density) RBW=100kHz
Channel 6: 2437MHz

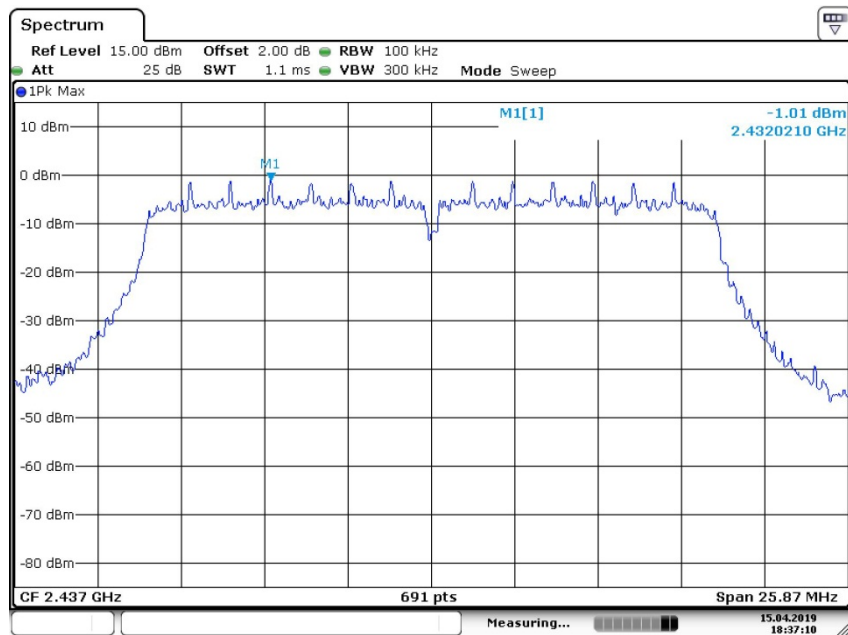


Date: 15.APR.2019 18:37:10

Test Model ☐ 802.11b ☐ 802.11g ☒ 802.11n(HT20)
Channel 6: 2437MHz

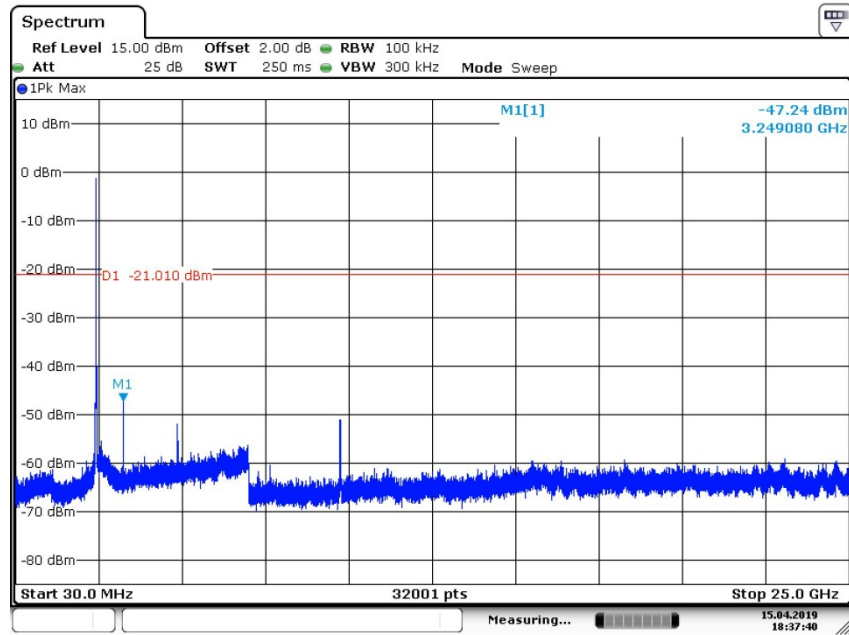


Date: 15.APR.2019 18:37:40

Test Model ☐ 802.11b ☐ 802.11g ☒ 802.11n(HT20)
PSD(Power Spectral Density) RBW=100kHz
☒ Channel 11: 2462MHz

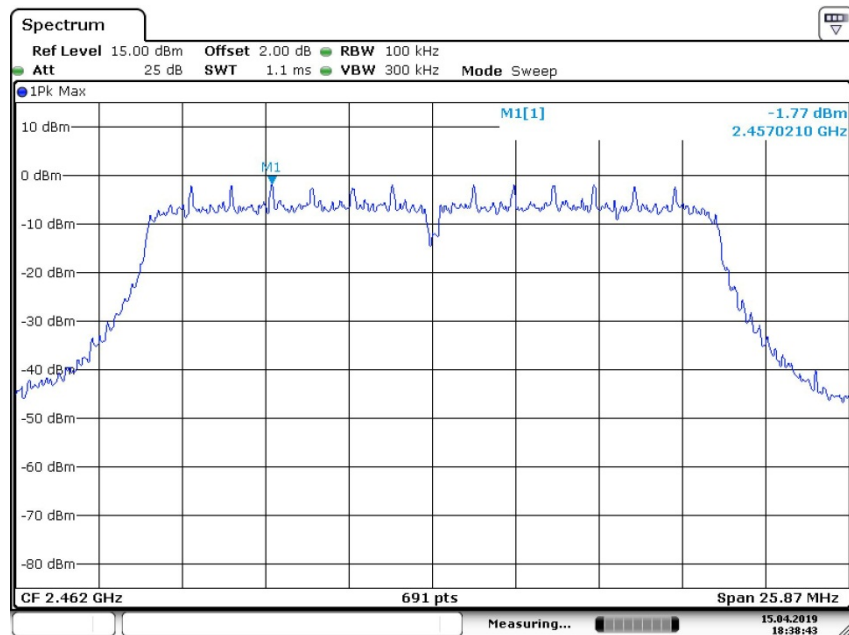

Date: 15.APR.2019 18:38:43


Test Model ☐ 802.11b ☐ 802.11g ☒ 802.11n(HT20)
☒ Channel 11: 2462MHz

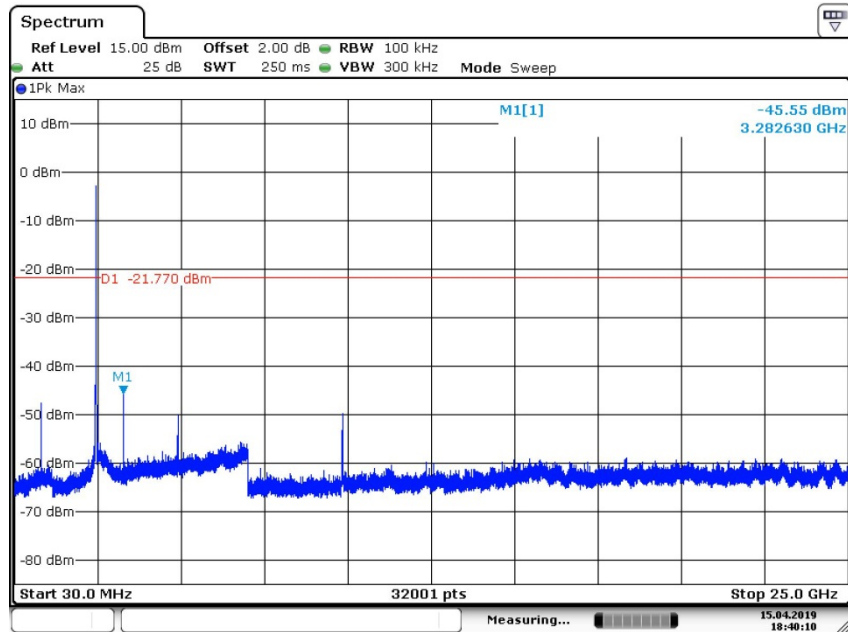

Date: 15.APR.2019 18:40:10

Test Model ☐ 802.11b ☐ 802.11g ☒ 802.11n(HT20)
☒ Channel 11: 2462MHz

Band edge

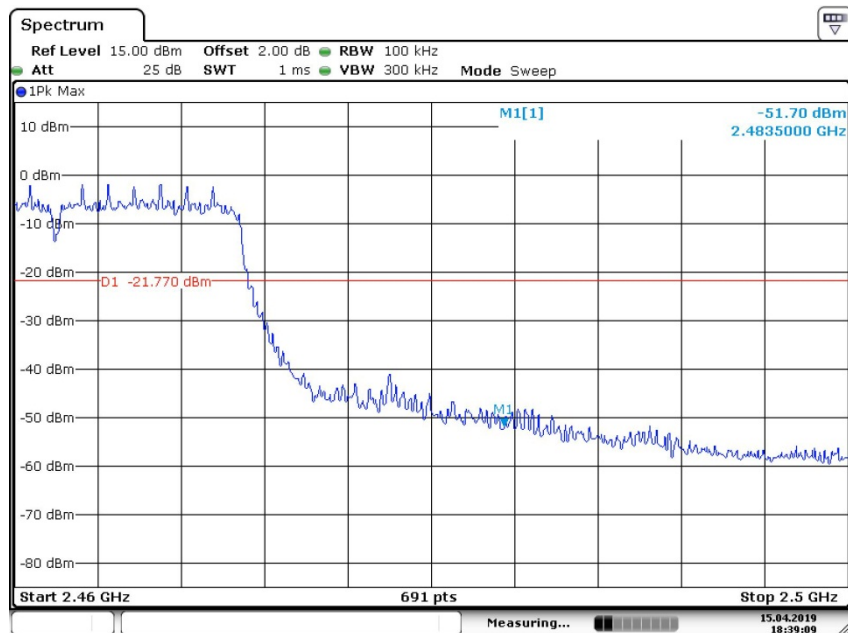

Date: 15.APR.2019 18:39:09

8.5 RADIATED SPURIOUS EMISSION

8.5.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and KDB 558074 D01 15.247 Meas Guidance v05r02

8.5.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

According to FCC Part 15.205, the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log (uV/m)	300
0.490-1.705	2400/F(KHz)	20 log (uV/m)	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

8.5.3 Test Configuration

Test according to clause 7.2 radio frequency test setup 2

8.5.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz (1GHz to 25GHz), 100 kHz for $f < 1$ GHz (30MHz to 1GHz), 200Hz for $f < 150$ KHz (9KHz to 150KHz), 9KHz for $f < 30$ MHz (150KHz to 30KHz)

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT,

measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

Repeat above procedures until all frequency measured was complete.

8.5.5 Test Results

■ Spurious Emission below 30MHz(9KHz to 30MHz)

Temperature: 24°C Test By: King Kong
 Humidity: 53 %
 Test mode: TX Mode

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40\log(\text{Specific distance}/ \text{test distance})(\text{dB})$;

Limit line=Specific limits(dBuV) + distance extrapolation factor

■ Spurious Emission Above 1GHz(1GHz to 25GHz)

All modes 2.4G 802.11b/g/n have been tested, and the worst result 802.11g recorded was report as below:

Temperature : 23°C Test By: XW
 Humidity : 50 % Frequency: Channel 1: 2412MHz
 Test mode: 802.11g

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4824.17	V	54.54	50.88	74	54	-19.46	-3.12
11464.72	V	56.52	42.07	74	54	-17.48	-11.93
15895.63	V	56.63	41.40	74	54	-17.37	-12.60
4824.17	H	55.53	50.59	74	54	-18.47	-3.41
11464.72	H	55.98	40.76	74	54	-18.02	-13.24
15895.63	H	56.53	40.06	74	54	-17.47	-13.94

Temperature : 23°C
 Humidity : 50 %
 Test mode: 802.11g

Test By: XW
 Frequency: Channel 6: 2437MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4874.69	V	53.59	51.93	74	54	-20.41	-2.07
11514.98	V	55.96	41.51	74	54	-18.04	-12.49
15774.26	V	58.12	42.83	74	54	-15.88	-11.17
4874.69	H	54.59	51.6	74	54	-19.41	-2.40
11514.98	H	55.06	42.32	74	54	-18.94	-11.68
15774.26	H	56.76	42.85	74	54	-17.24	-11.15

Temperature : 23°C
 Humidity : 50 %
 Test mode: 802.11g

Test By: XW
 Frequency: Channel 11: 2462MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4924.51	V	55.08	50.91	74	54	-18.92	-3.09
12010.27	V	55.95	42.6	74	54	-18.05	-11.40
15639.78	V	58.40	42.37	74	54	-15.60	-11.63
4924.51	H	55.83	51.52	74	54	-18.17	-2.48
12010.27	H	56.38	40.35	74	54	-17.62	-13.65
15639.78	H	58.71	40.89	74	54	-15.29	-13.11

- Note:** (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
 (3) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

All modes 2.4G 802.11b/g/n have been tested, and the worst result 802.11g recorded was report as below:

Temperature : 23°C Test By: XW
 Humidity : 50 % Frequency: Channel 1: 2412MHz
 Test mode: 802.11n(HT20)

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	Margin (dB)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Margin (dB)
2390.00	H	51.68	74.00	-22.32	42.74	54.00	-11.26
2389.53	V	46.40	74.00	-27.60	37.12	54.00	-16.88


Temperature : 26°C Test By: XW
 Humidity : 60 % Frequency: Channel 11: 2462MHz
 Test mode: 802.11n(HT20)

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	Margin (dB)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Margin (dB)
2483.52	H	49.49	74.00	-24.51	37.28	54.00	-16.72
2483.53	V	47.31	74.00	-26.69	35.23	54.00	-18.77

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
 - (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
 - (3) Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.


Spurious Emission in Restricted Band 2310-2390MHz

Test Model	<input type="checkbox"/> 802.11b	<input type="checkbox"/> 802.11g	<input checked="" type="checkbox"/> 802.11n(HT20)	Polarity: H
	<input checked="" type="checkbox"/> Channel 1: 2412MHz			
	VBW=3MHz			Test By: King Kong

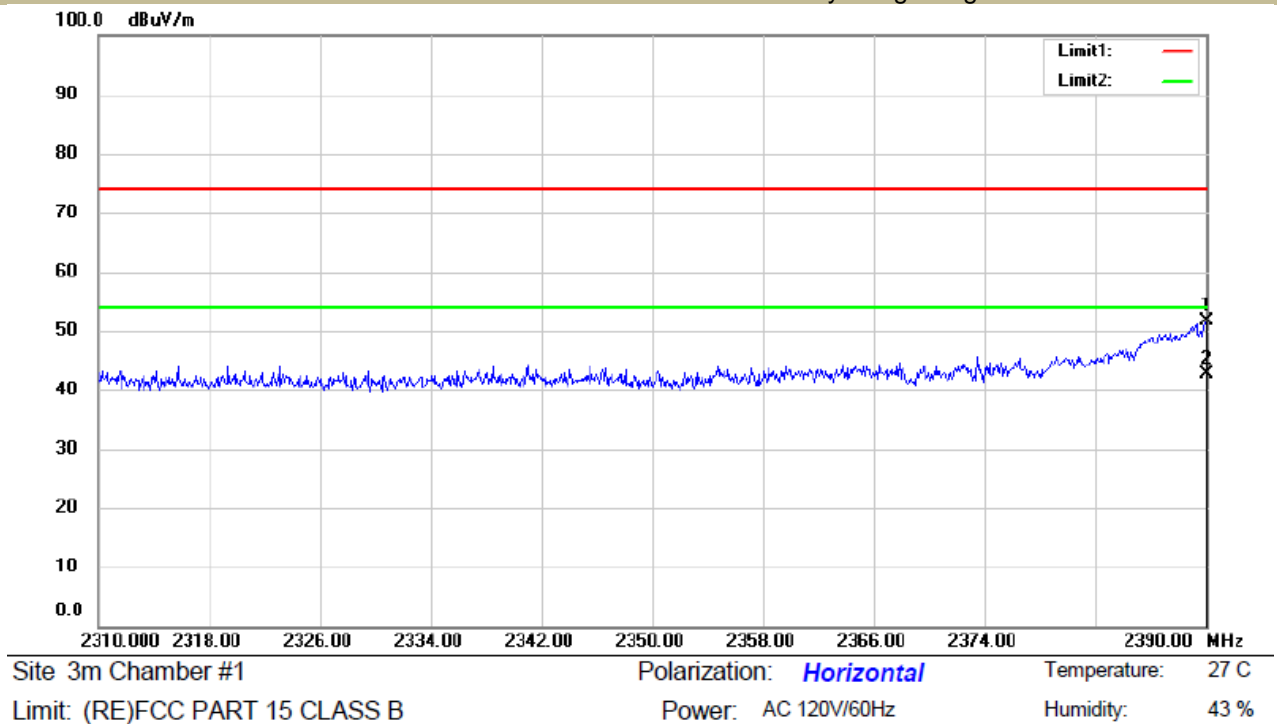


Spurious Emission in Restricted Band 2310-2390MHz

Test Model	<input type="checkbox"/> 802.11b	<input type="checkbox"/> 802.11g	<input checked="" type="checkbox"/> 802.11n(HT20)	Polarity: V
	<input checked="" type="checkbox"/> Channel 1: 2412MHz			
	VBW=3MHz			Test By: King Kong

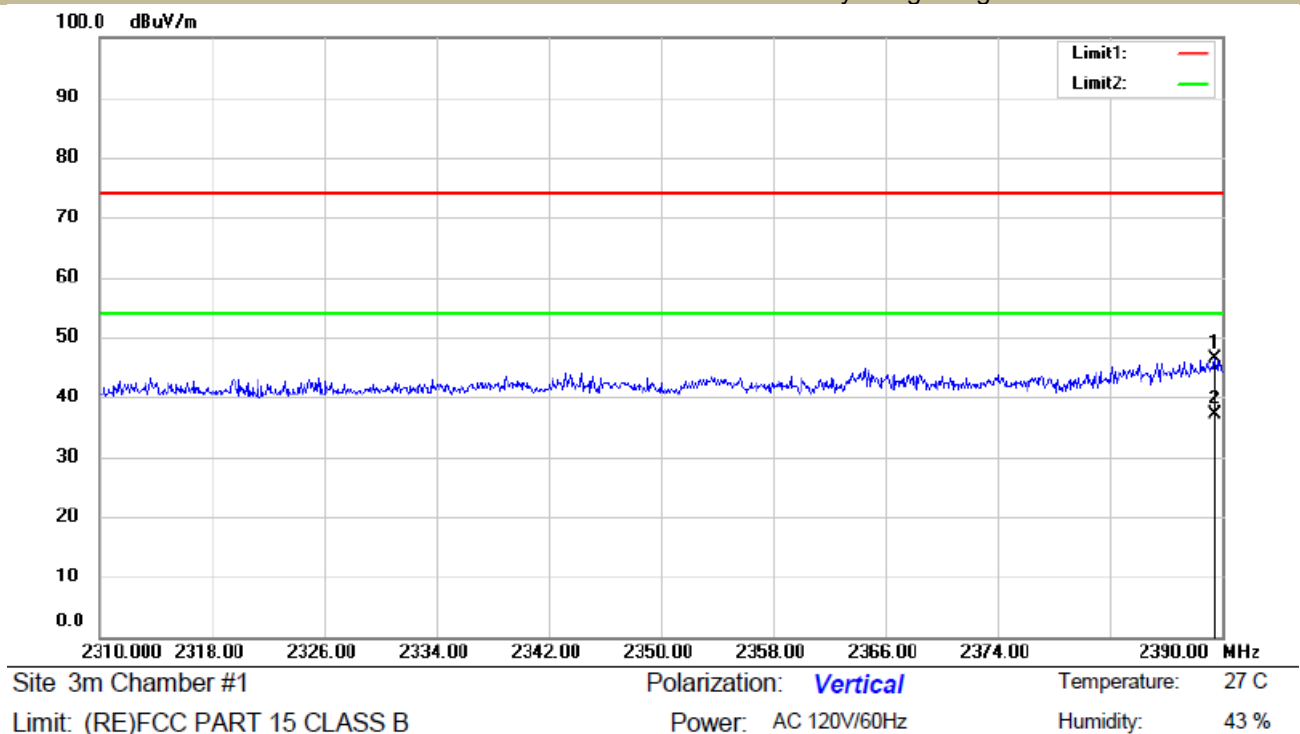


Spurious Emission in Restricted Band 2483.5-2500MHz

Test Model	<input type="checkbox"/> 802.11b	<input type="checkbox"/> 802.11g	<input checked="" type="checkbox"/> 802.11n(HT20)	Polarity: H
	<input checked="" type="checkbox"/> Channel 11: 2462MHz			
	VBW=3MHz		Test By: King Kong	

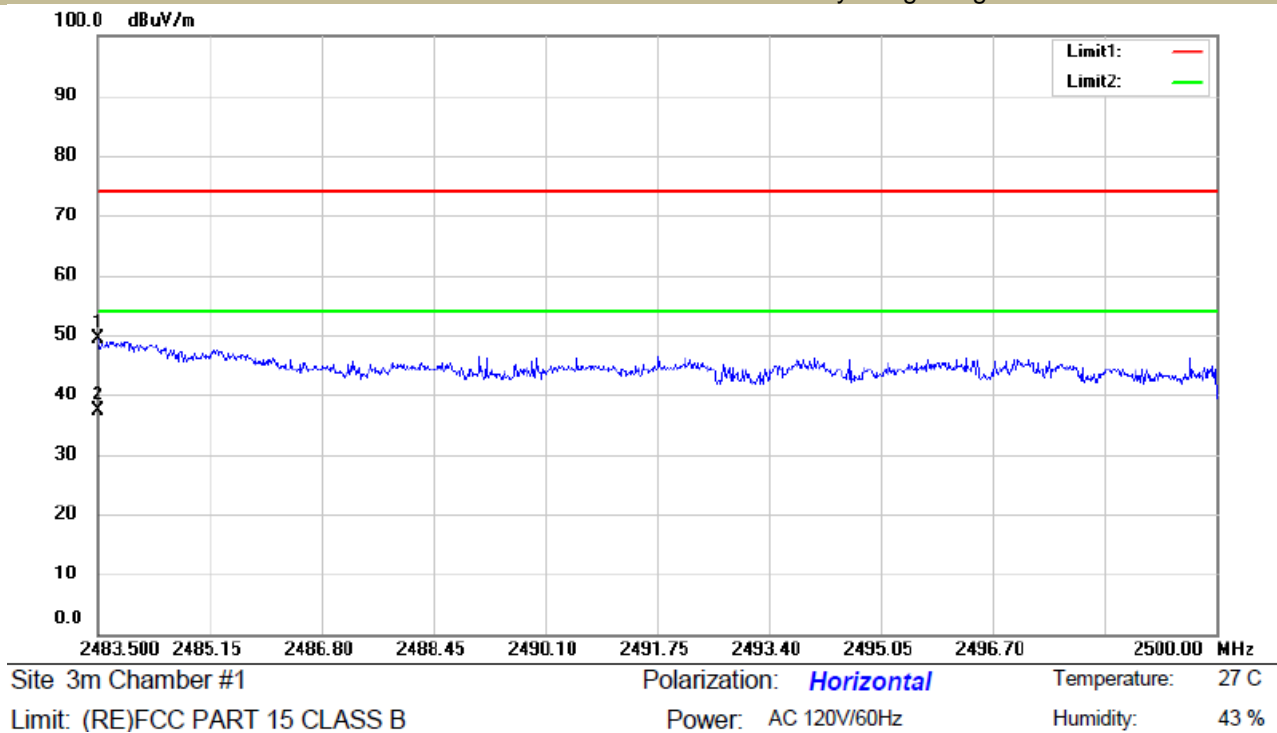

Spurious Emission in Restricted Band 2483.5-2500MHz


Test Model	<input type="checkbox"/> 802.11b	<input type="checkbox"/> 802.11g	<input checked="" type="checkbox"/> 802.11n(HT20)	Polarity: V
	<input checked="" type="checkbox"/> Channel 11: 2462MHz			
	VBW=3MHz		Test By: King Kong	

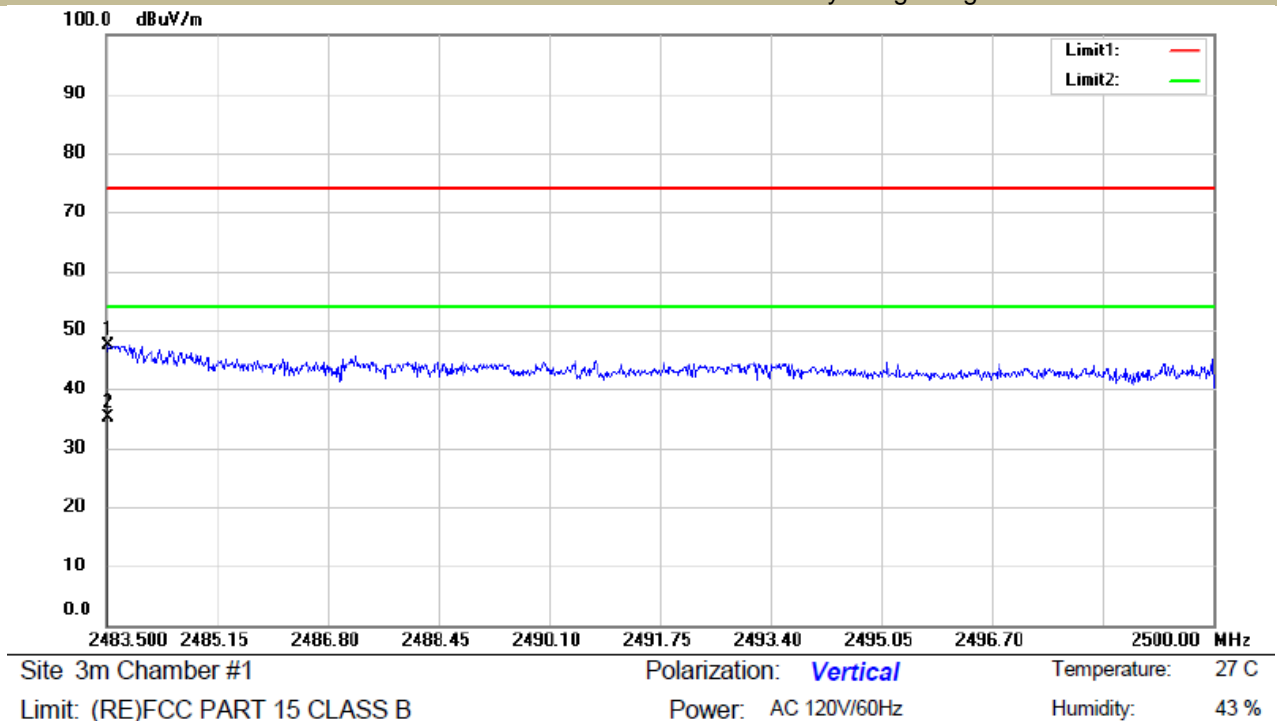

■ Spurious Emission below 1GHz (30MHz to 1GHz)

All modes 2.4G 802.11b/g/n(HT20) have been tested, and the worst result 802.11b recorded was report as below:


For Model: PURE ONE S12 M

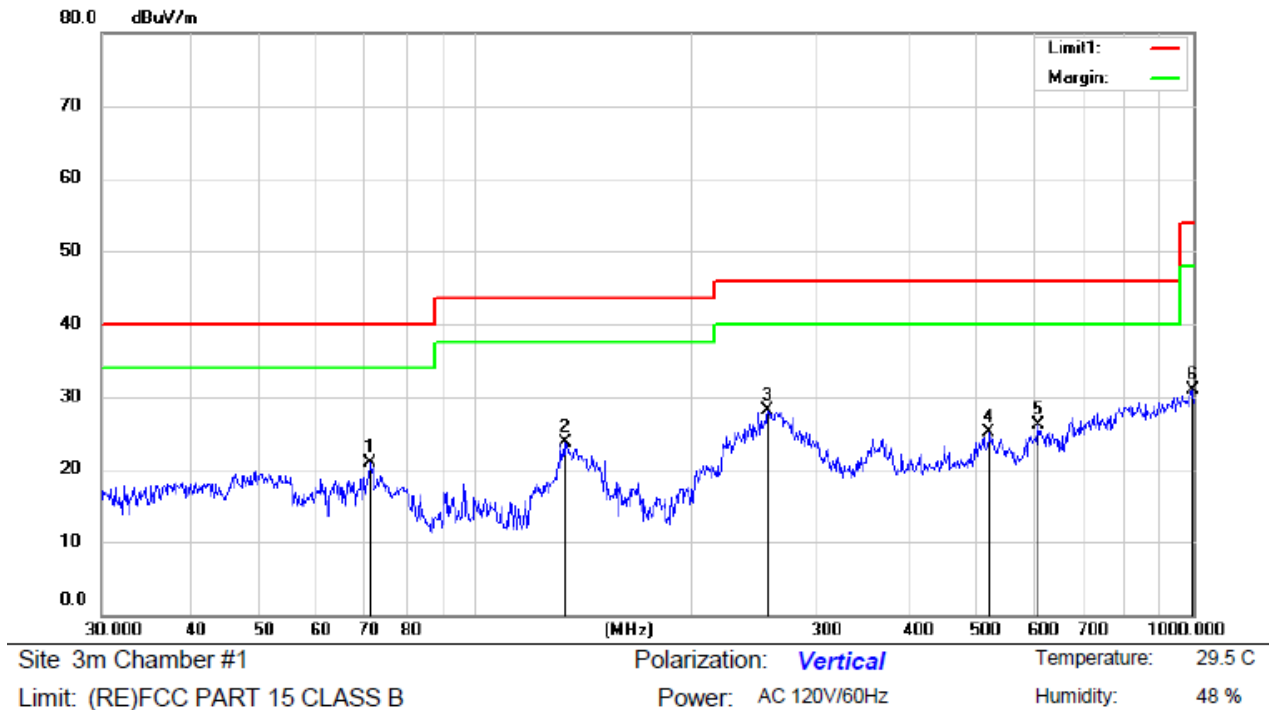

Mode: WIFI2.4G TX2412MHz

Note:


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		71.2986	36.70	-15.74	20.96	40.00	-19.04	QP		
2		132.8594	39.20	-15.51	23.69	43.50	-19.81	QP		
3	*	255.5110	37.65	-9.62	28.03	46.00	-17.97	QP		
4		519.9756	29.47	-4.37	25.10	46.00	-20.90	QP		
5		609.1201	28.10	-2.04	26.06	46.00	-19.94	QP		
6		997.3735	27.06	3.88	30.94	54.00	-23.06	QP		

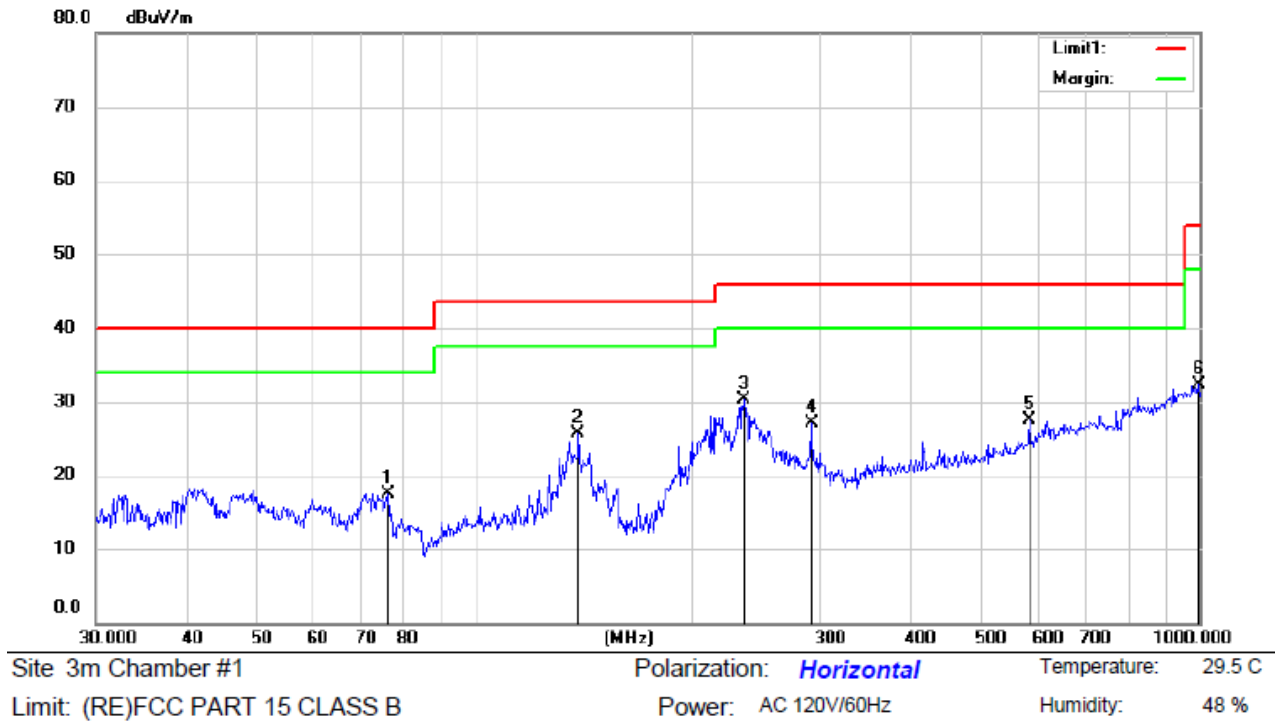

Mode:WIFI2.4G TX2412MHz


Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		76.1105	34.38	-16.86	17.52	40.00	-22.48	QP		
2		139.0560	41.25	-15.60	25.65	43.50	-17.85	QP		
3	*	234.9910	40.69	-10.40	30.29	46.00	-15.71	QP		
4		291.9302	35.51	-8.49	27.02	46.00	-18.98	QP		
5		583.7650	30.23	-2.78	27.45	46.00	-18.55	QP		
6		997.3735	28.45	3.88	32.33	54.00	-21.67	QP		

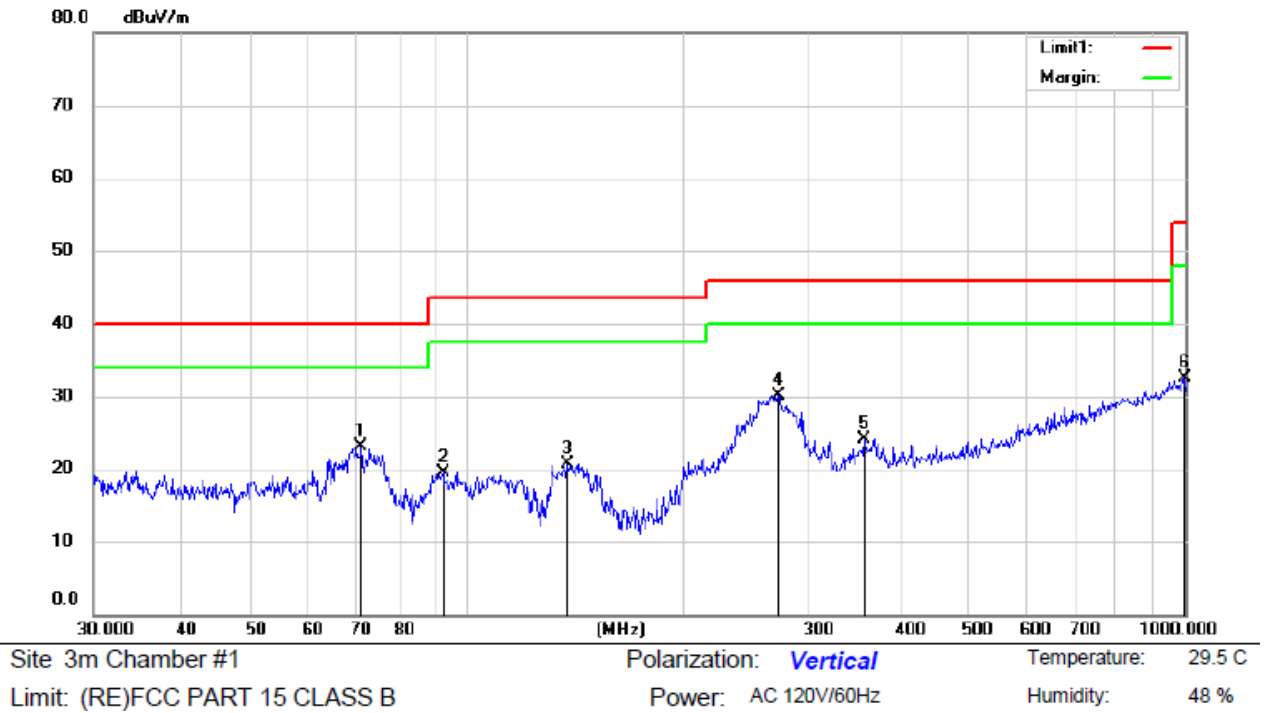

Mode:WIFI2.4G TX2437MHz
Note:


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		70.8315	38.70	-15.59	23.11	40.00	-16.89	QP		
2		92.1386	33.63	-14.11	19.52	43.50	-23.98	QP		
3		137.5406	36.38	-15.60	20.78	43.50	-22.72	QP		
4	*	270.8491	39.41	-9.27	30.14	46.00	-15.86	QP		
5		356.9886	31.01	-6.82	24.19	46.00	-21.81	QP		
6		997.3735	28.56	3.88	32.44	54.00	-21.56	QP		

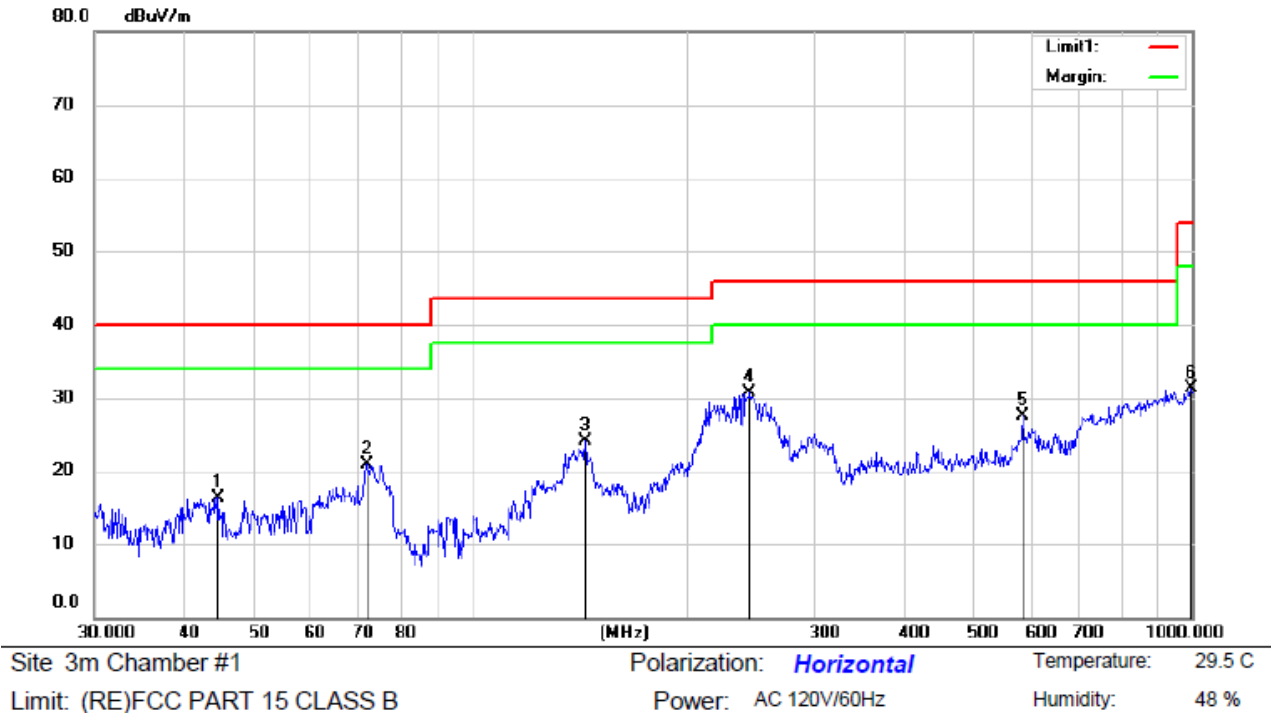

Mode: WIFI2.4G TX2437MHz

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		44.7042	27.74	-11.35	16.39	40.00	-23.61	QP			
2		71.7061	36.70	-15.86	20.84	40.00	-19.16	QP			
3		144.0820	39.77	-15.61	24.16	43.50	-19.34	QP			
4	*	243.4838	40.80	-10.07	30.73	46.00	-15.27	QP			
5		583.7650	30.23	-2.78	27.45	46.00	-18.55	QP			
6		997.3735	27.45	3.88	31.33	54.00	-22.67	QP			

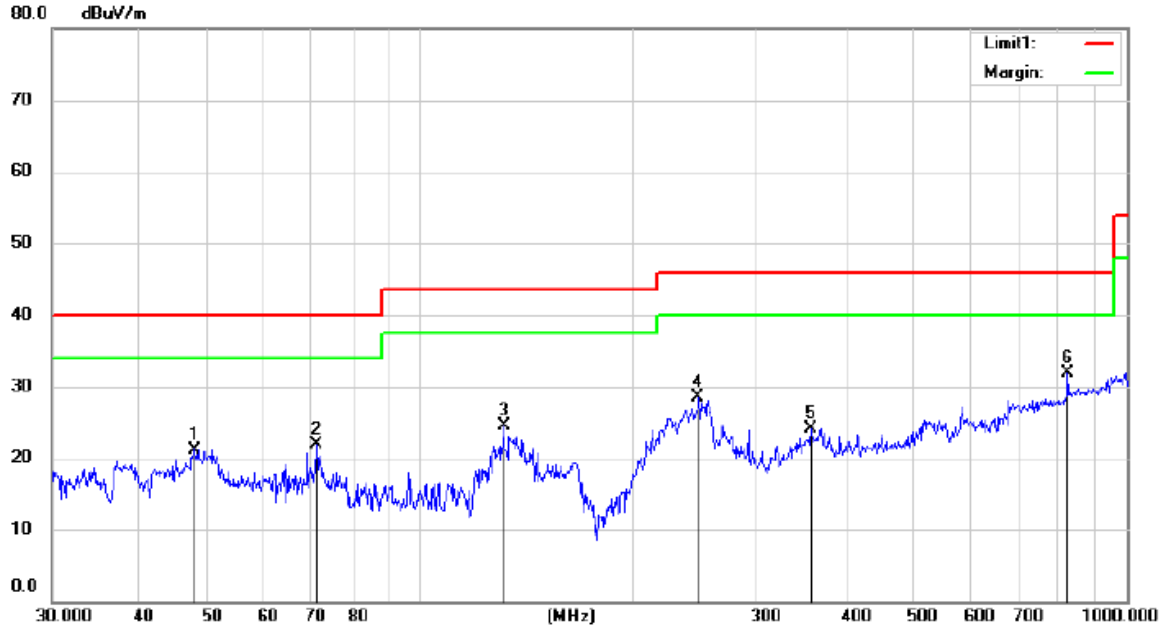


Site 3m Chamber #1 Polarization: **Vertical** Temperature: 29.5 C
Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 48 %

Mode: WIFI2.4G TX2462MHz

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		47.9100	32.30	-11.18	21.12	40.00	-18.88	QP		
2		71.2985	37.70	-15.74	21.96	40.00	-18.04	QP		
3		130.8942	39.88	-15.43	24.45	43.50	-19.05	QP		
4		247.3564	38.43	-9.96	28.47	46.00	-17.53	QP		
5		356.9886	31.01	-6.82	24.19	46.00	-21.81	QP		
6	*	827.1307	31.39	0.54	31.93	46.00	-14.07	QP		

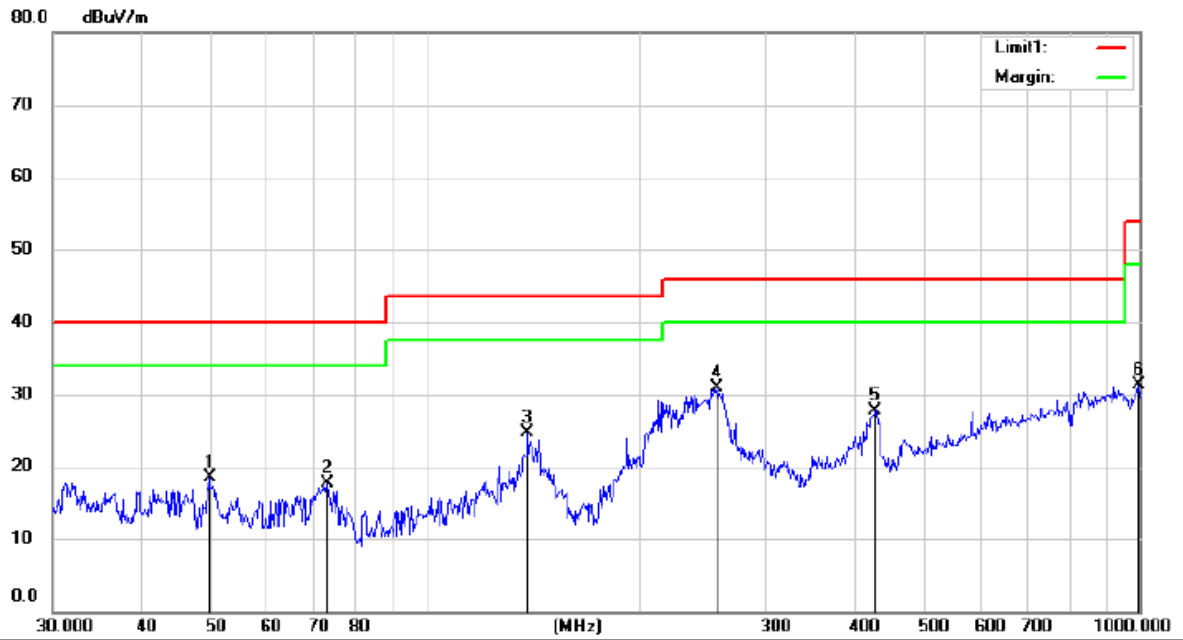


Site 3m Chamber #1 Polarization: **Horizontal** Temperature: 29.5 C
Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 48 %

Mode: WIFI2.4G TX2462MHz
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		49.8594	29.68	-11.26	18.42	40.00	-21.58	QP		
2		72.6551	33.94	-16.15	17.79	40.00	-22.21	QP		
3		139.0560	40.25	-15.60	24.65	43.50	-18.85	QP		
4	*	256.0717	40.42	-9.61	30.81	46.00	-15.19	QP		
5		427.0822	33.25	-5.46	27.79	46.00	-18.21	QP		
6		997.3735	27.45	3.88	31.33	54.00	-22.67	QP		


For Model Number: PURE ONE S12

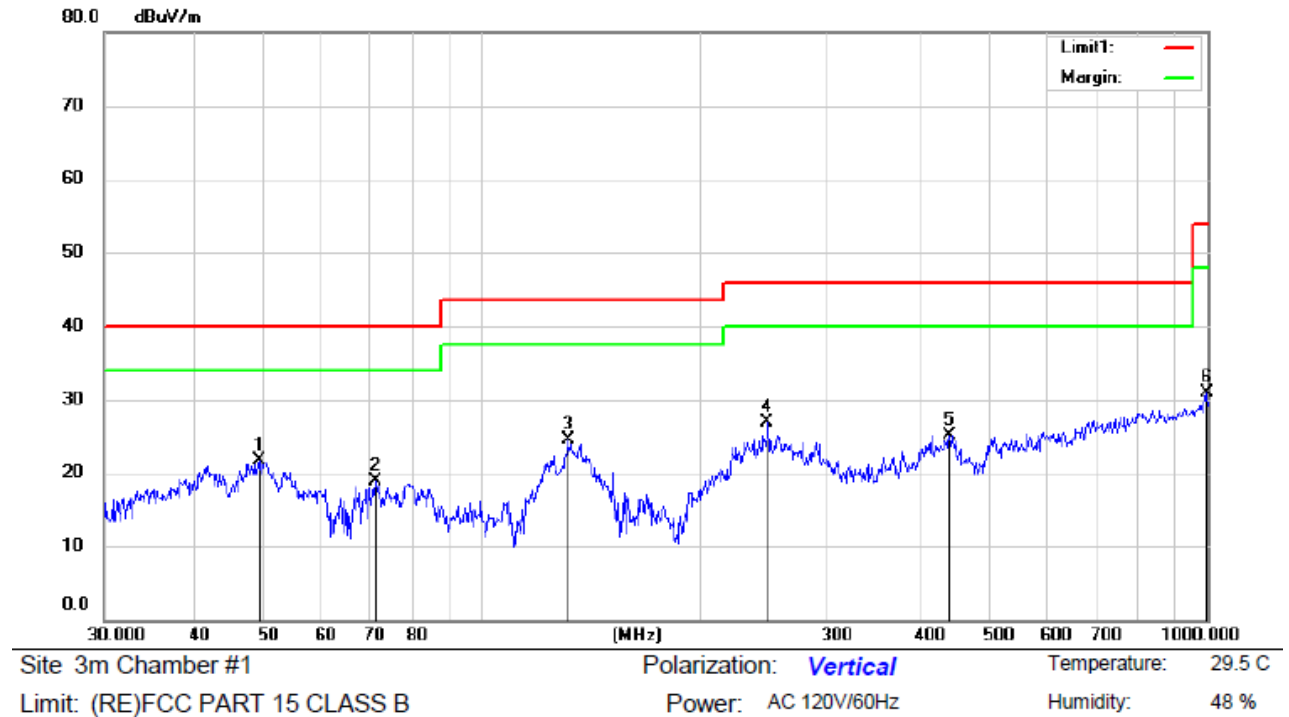

Mode: WIFI2.4G TX2412MHz

Note:


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	49.1220	32.88	-11.23	21.65	40.00	-18.35	QP		
2		71.2985	34.70	-15.74	18.96	40.00	-21.04	QP		
3		130.8942	39.88	-15.43	24.45	43.50	-19.05	QP		
4		247.3564	36.93	-9.96	26.97	46.00	-19.03	QP		
5		440.9687	30.54	-5.35	25.19	46.00	-20.81	QP		
6		997.3735	27.06	3.88	30.94	54.00	-23.06	QP		

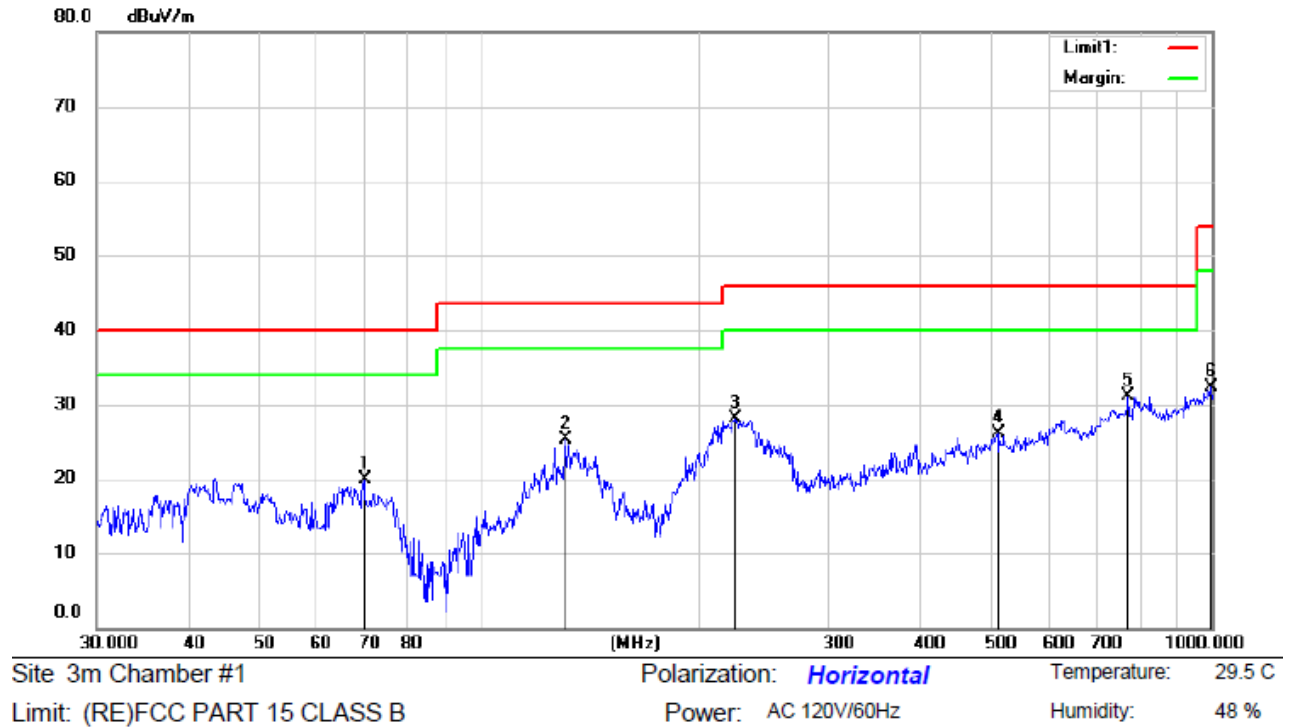

Mode:WIFI2.4G TX2412MHz

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		69.8143	35.15	-15.27	19.88	40.00	-20.12	QP			
2		131.0090	40.80	-15.44	25.36	43.50	-18.14	QP			
3		223.8314	39.05	-10.92	28.13	46.00	-17.87	QP			
4		510.9386	30.68	-4.58	26.10	46.00	-19.90	QP			
5	*	769.7595	31.10	0.00	31.10	46.00	-14.90	QP			
6		997.3735	28.45	3.88	32.33	54.00	-21.67	QP			

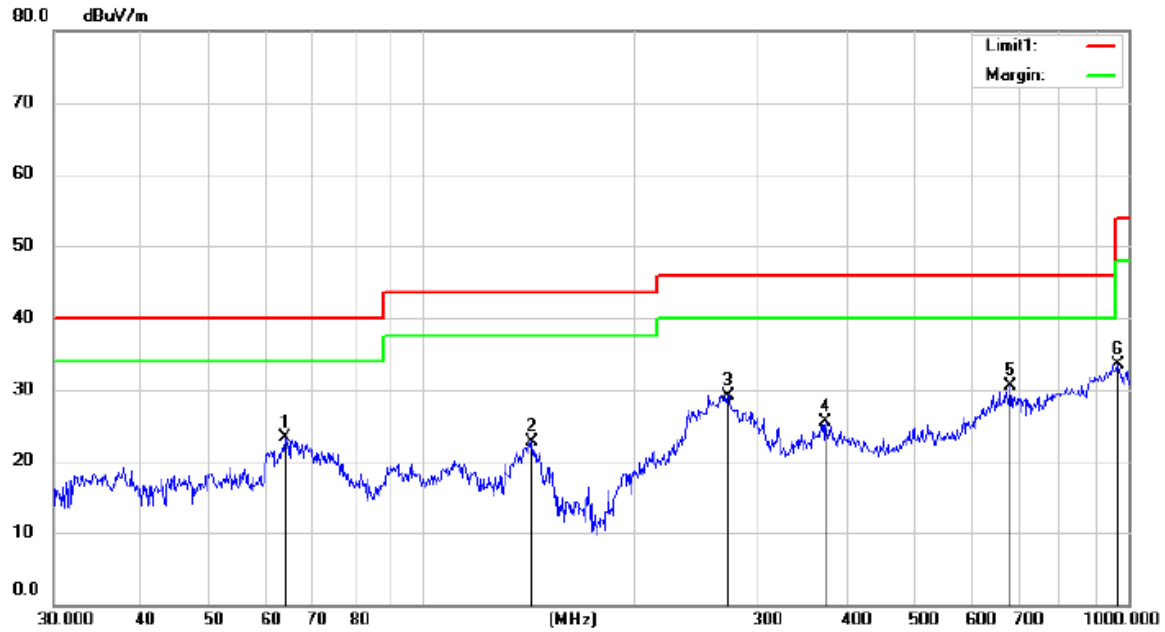

Site 3m Chamber #1

Polarization: **Vertical**

Temperature: 29.5 C

Limit: (RE)FCC PART 15 CLASS B


Power: AC 120V/60Hz

Humidity: 48 %

Mode: WIFI2.4G TX2437MHz

Note:


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		63.8706	36.63	-13.36	23.27	40.00	-16.73	QP		
2		143.0122	38.28	-15.61	22.67	43.50	-20.83	QP		
3		270.8491	38.41	-9.27	29.14	46.00	-16.86	QP		
4		372.8206	32.37	-6.79	25.58	46.00	-20.42	QP		
5	*	680.5561	31.81	-1.27	30.54	46.00	-15.46	QP		
6		965.5420	30.34	3.23	33.57	54.00	-20.43	QP		

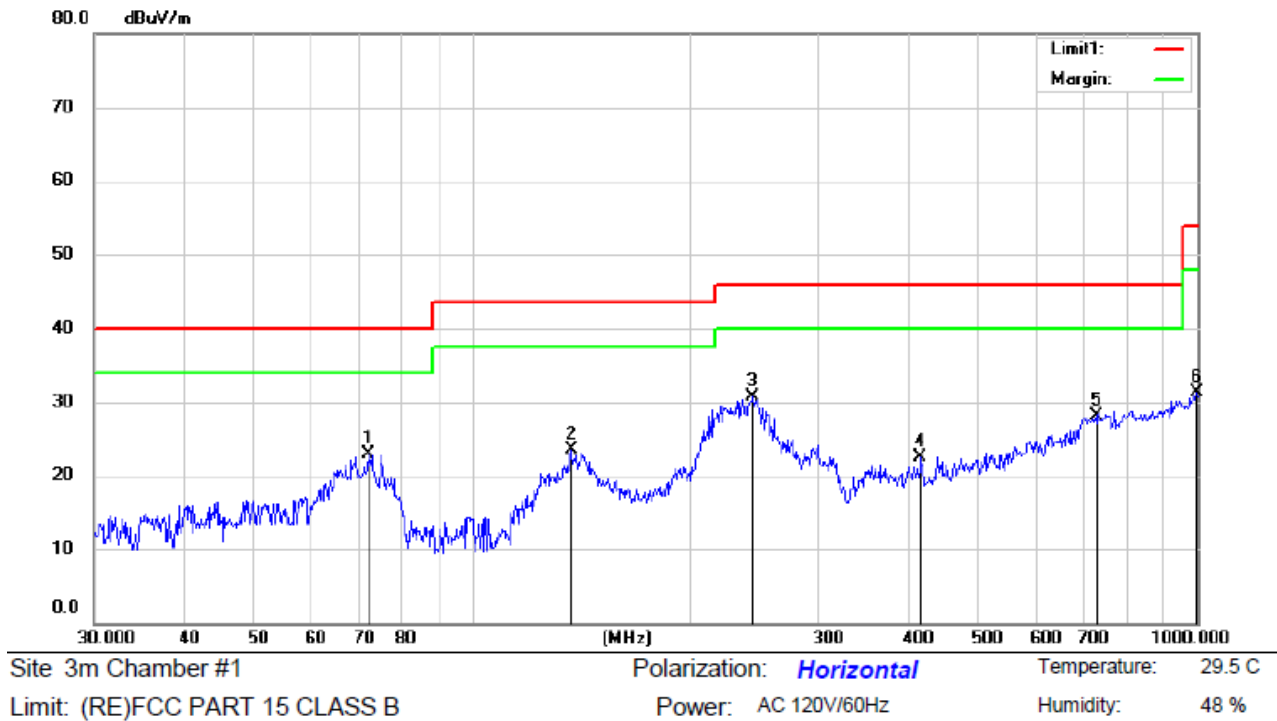

Mode: WIFI2.4G TX2437MHz

Note:


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		71.7061	38.70	-15.86	22.84	40.00	-17.16	QP		
2		136.8790	39.16	-15.60	23.56	43.50	-19.94	QP		
3	*	243.4838	40.80	-10.07	30.73	46.00	-15.27	QP		
4		415.9966	28.22	-5.65	22.57	46.00	-23.43	QP		
5		727.4424	28.71	-0.60	28.11	46.00	-17.89	QP		
6		997.3735	27.45	3.88	31.33	54.00	-22.67	QP		

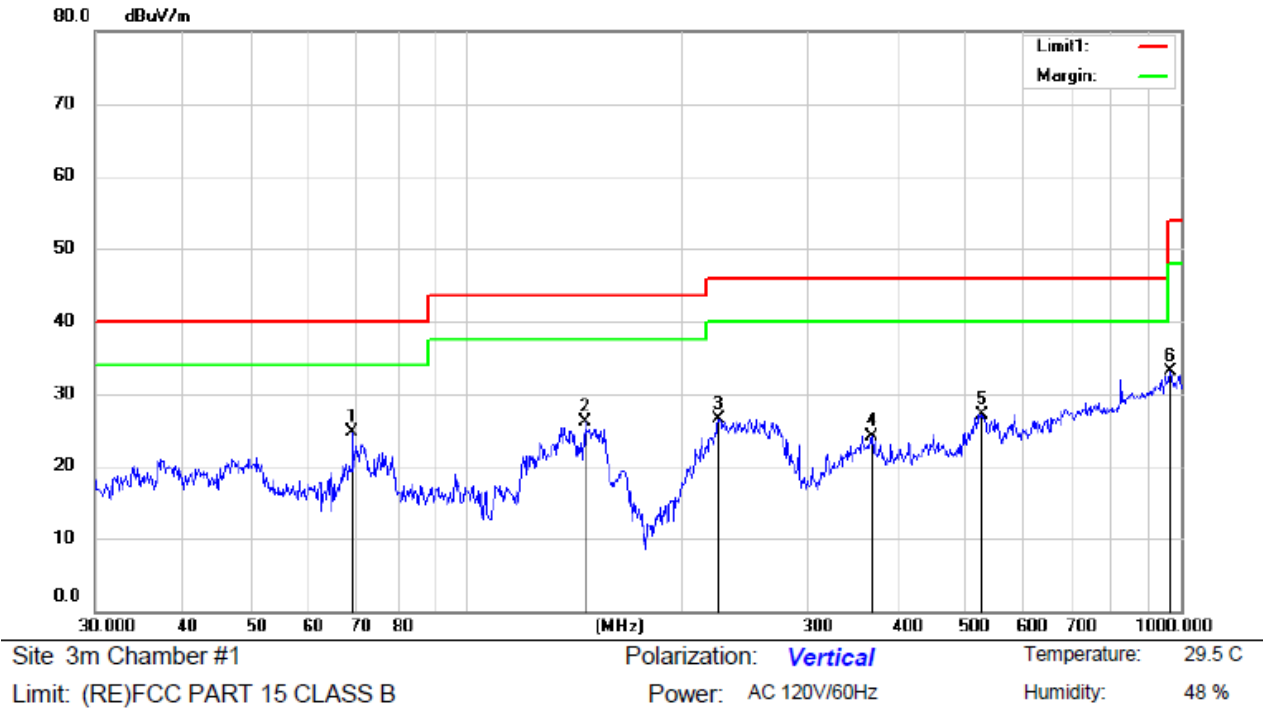

Mode: WIFI2.4G TX2462MHz

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1	*	69.0532	39.74	-14.99	24.75	40.00	-15.25	QP		
2		145.9250	41.73	-15.55	26.18	43.50	-17.32	QP		
3		225.2092	37.32	-10.85	26.47	46.00	-19.53	QP		
4		369.2427	31.07	-6.90	24.17	46.00	-21.83	QP		
5		526.1660	31.38	-4.23	27.15	46.00	-18.85	QP		
6		965.5420	29.84	3.23	33.07	54.00	-20.93	QP		

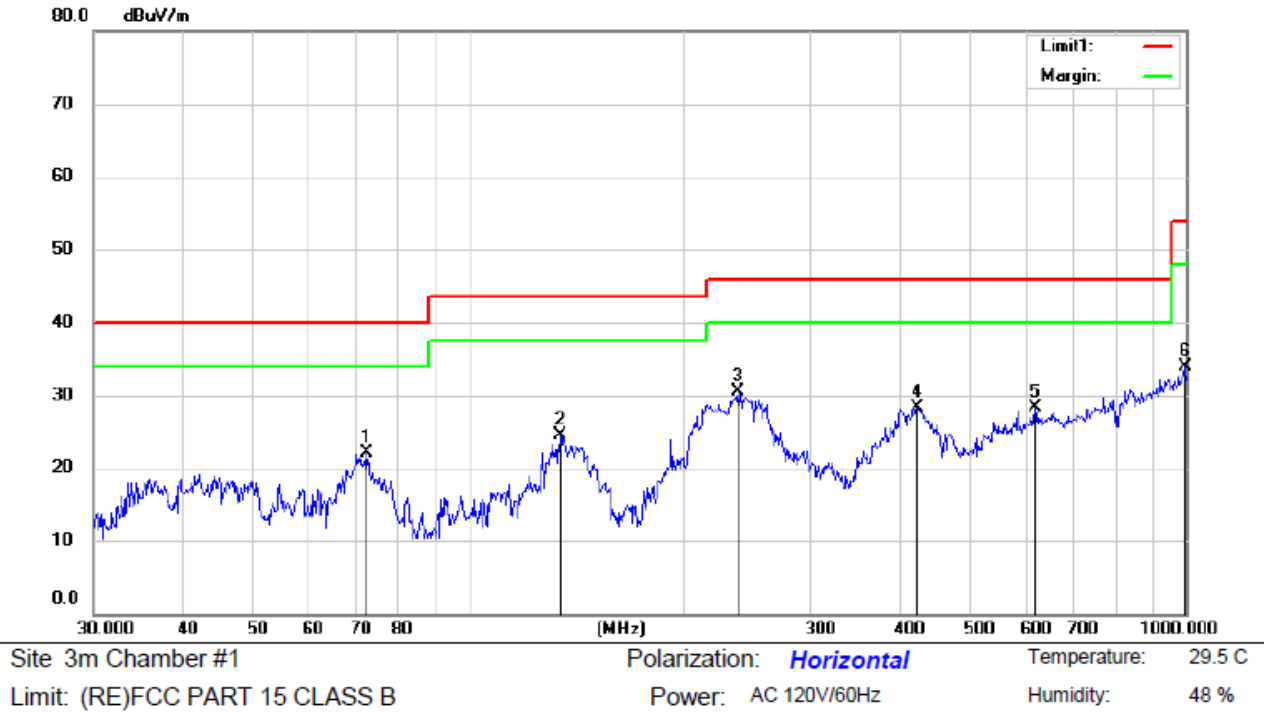

Mode: WIFI2.4G TX2462MHz
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		72.2108	38.08	-16.01	22.07	40.00	-17.93	QP		
2		134.3822	40.16	-15.57	24.59	43.50	-18.91	QP		
3	*	237.4760	40.71	-10.28	30.43	46.00	-15.57	QP		
4		422.2427	33.90	-5.55	28.35	46.00	-17.65	QP		
5		616.3716	30.31	-1.95	28.36	46.00	-17.64	QP		
6		997.3735	29.95	3.88	33.83	54.00	-20.17	QP		

8.6 CONDUCTED EMISSIONS TEST

8.6.1 Applicable Standard

According to FCC Part 15.207(a)

8.6.2 Conformance Limit

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

8.6.3 Test Configuration

Test according to clause 7.3conducted emission test setup

8.6.4 Test Procedure


The EUT was placed on a table which is 0.8m above ground plane.
Maximum procedure was performed on the highest emissions to ensure EUT compliance.
Repeat above procedures until all frequency measured were complete.

8.6.5 Test Results

Pass

According to the manufacturer, When the EUT is charging, the wifi function will be off

For Model Number: PURE ONE S12

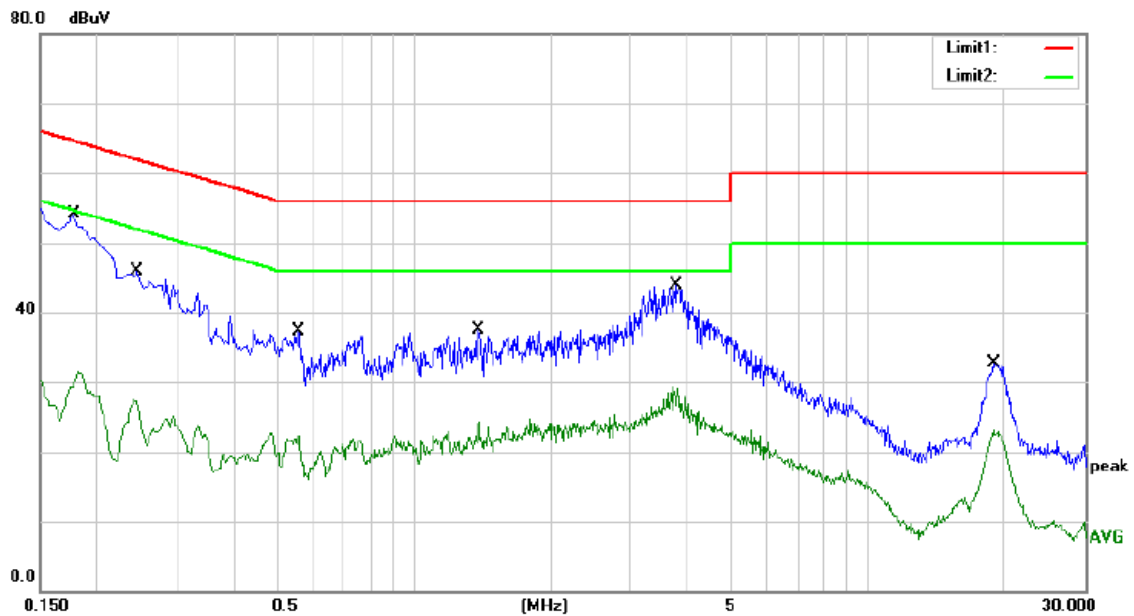

Site Conduction #1

Phase: **L1**

Temperature: 24.9

Limit: (CE)FCC PART 15 class B_QP

Power: AC 120V/60Hz


Humidity: 54 %

Mode: Charging

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1780	44.59	9.55	54.14	64.58	-10.44	QP	
2		0.1780	21.88	9.55	31.43	54.58	-23.15	AVG	
3		0.2481	35.24	9.55	44.79	61.82	-17.03	QP	
4		0.2481	17.90	9.55	27.45	51.82	-24.37	AVG	
5		0.5580	27.66	9.57	37.23	56.00	-18.77	QP	
6		0.5580	13.16	9.57	22.73	46.00	-23.27	AVG	
7		1.3860	27.92	9.59	37.51	56.00	-18.49	QP	
8		1.3860	14.79	9.59	24.38	46.00	-21.62	AVG	
9		3.7860	34.19	9.63	43.82	56.00	-12.18	QP	
10		3.7860	19.73	9.63	29.36	46.00	-16.64	AVG	
11		18.9060	22.35	10.25	32.60	60.00	-27.40	QP	
12		18.9060	12.77	10.25	23.02	50.00	-26.98	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: WAP

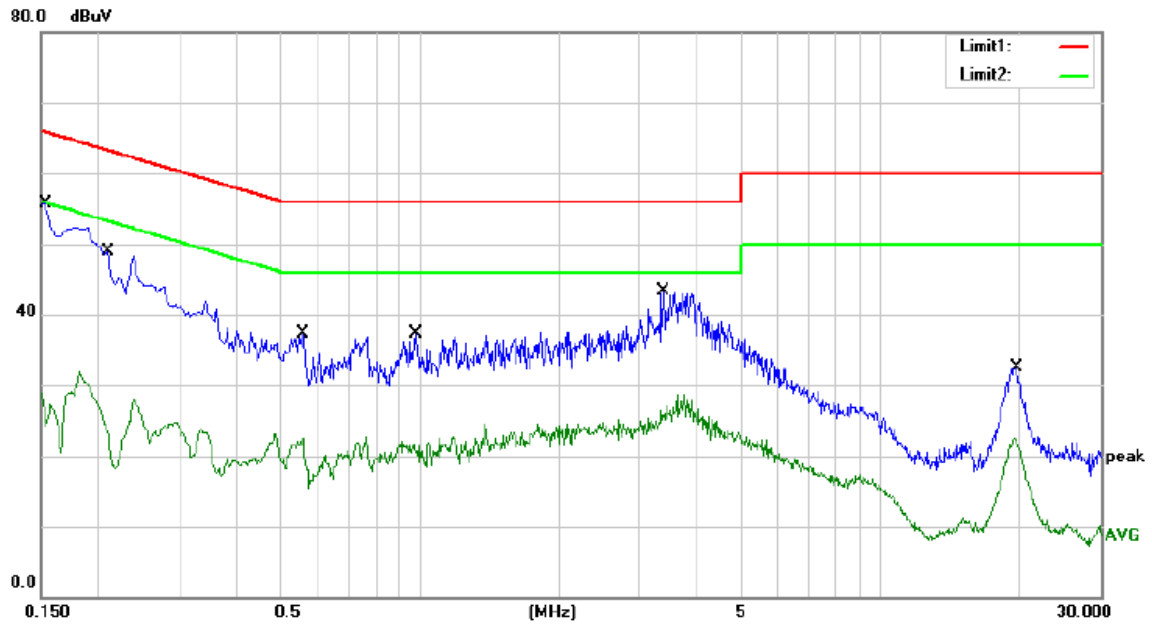

Site Conduction #1

Phase: **N**

Temperature: 24.9

Limit: (CE)FCC PART 15 class B_QP

Power: AC 120V/60Hz

Humidity: 54 %


Mode: Charging

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1540	46.03	9.65	55.68	65.78	-10.10	QP	
2		0.1540	22.23	9.65	31.88	55.78	-23.90	AVG	
3		0.2100	39.25	9.55	48.80	63.21	-14.41	QP	
4		0.2100	18.61	9.55	28.16	53.21	-25.05	AVG	
5		0.5580	27.78	9.57	37.35	56.00	-18.65	QP	
6		0.5580	14.07	9.57	23.64	46.00	-22.36	AVG	
7		0.9820	27.68	9.58	37.26	56.00	-18.74	QP	
8		0.9820	13.10	9.58	22.68	46.00	-23.32	AVG	
9		3.3700	33.73	9.62	43.35	56.00	-12.65	QP	
10		3.3700	19.16	9.62	28.78	46.00	-17.22	AVG	
11		19.7940	22.09	10.32	32.41	60.00	-27.59	QP	
12		19.7940	12.19	10.32	22.51	50.00	-27.49	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: WAP

For Model Number: PURE ONE S12 M

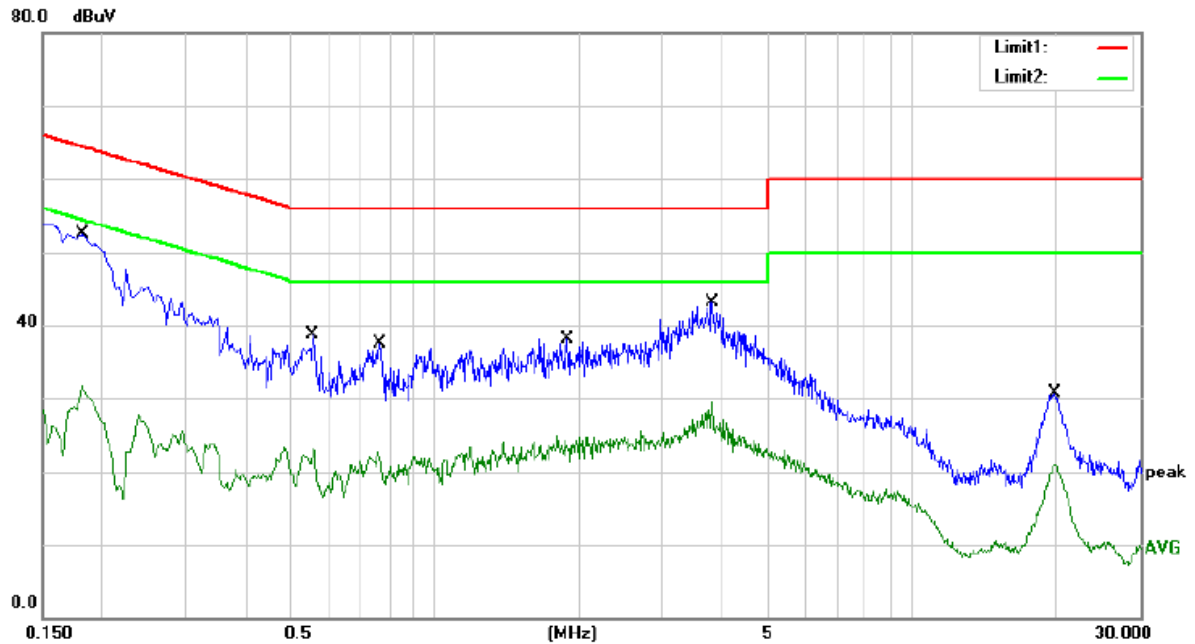

Site Conduction #1

Phase: **N**

Temperature: 24.9

Limit: (CE)FCC PART 15 class B_QP

Power: AC 120V/60Hz


Humidity: 54 %

Mode: Charging

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1820	43.02	9.55	52.57	64.39	-11.82	QP	
2		0.1820	22.06	9.55	31.61	54.39	-22.78	AVG	
3		0.5540	29.12	9.57	38.69	56.00	-17.31	QP	
4		0.5540	13.65	9.57	23.22	46.00	-22.78	AVG	
5		0.7660	27.86	9.57	37.43	56.00	-18.57	QP	
6		0.7660	13.22	9.57	22.79	46.00	-23.21	AVG	
7		1.8940	28.44	9.59	38.03	56.00	-17.97	QP	
8		1.8940	15.38	9.59	24.97	46.00	-21.03	AVG	
9		3.8180	33.51	9.63	43.14	56.00	-12.86	QP	
10		3.8180	19.89	9.63	29.52	46.00	-16.48	AVG	
11		19.9100	20.47	10.33	30.80	60.00	-29.20	QP	
12		19.9100	10.57	10.33	20.90	50.00	-29.10	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: WAP

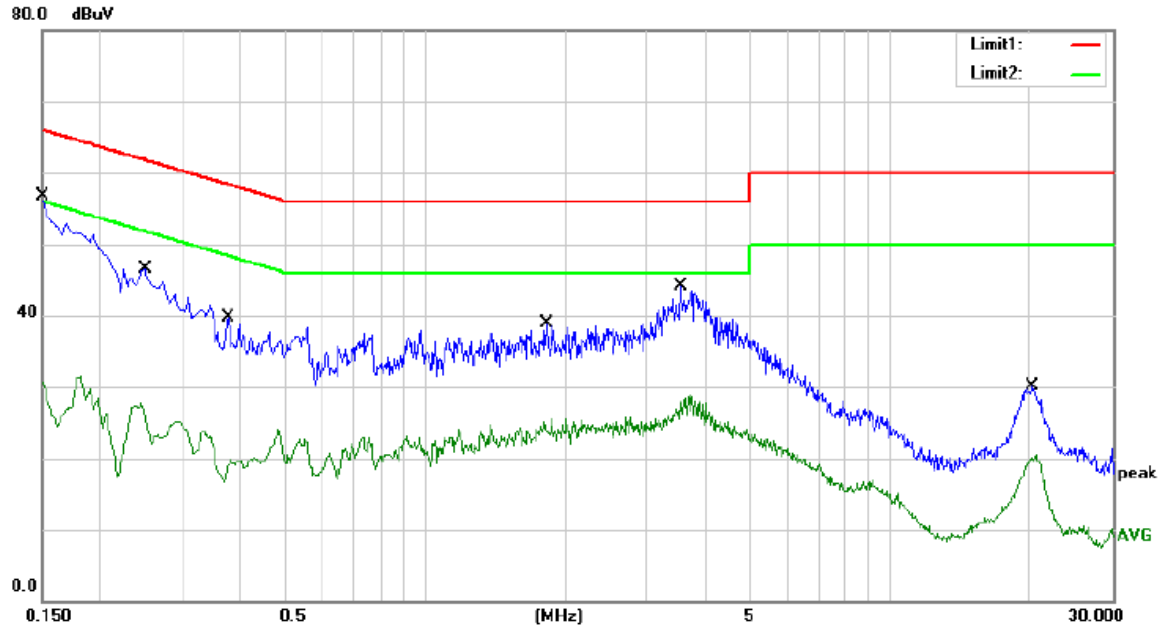

Site Conduction #1

Phase: **L1**

Temperature: 24.9

Limit: (CE)FCC PART 15 class B_QP

Power: AC 120V/60Hz

Humidity: 54 %

Mode: Charging

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1500	47.10	9.67	56.77	66.00	-9.23	QP	
2		0.1500	21.85	9.67	31.52	56.00	-24.48	AVG	
3		0.2500	36.93	9.55	46.48	61.76	-15.28	QP	
4		0.2500	18.06	9.55	27.61	51.76	-24.15	AVG	
5		0.3780	30.21	9.56	39.77	58.32	-18.55	QP	
6		0.3780	14.48	9.56	24.04	48.32	-24.28	AVG	
7		1.8220	29.37	9.59	38.96	56.00	-17.04	QP	
8		1.8220	15.97	9.59	25.56	46.00	-20.44	AVG	
9		3.5340	34.50	9.63	44.13	56.00	-11.87	QP	
10		3.5340	19.19	9.63	28.82	46.00	-17.18	AVG	
11		20.2140	19.83	10.34	30.17	60.00	-29.83	QP	
12		20.2140	10.08	10.34	20.42	50.00	-29.58	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: WAP

8.7 ANTENNA APPLICATION

8.7.1 Antenna Requirement

Standard	Requirement
FCC CRF Part15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

8.7.2 Result

The EUT'S antenna is FPC antenna. The antenna's gain is 2 dBi, and the antenna can't be replaced by the user which in accordance to section 15.203, please refer to the photos.