

EMC TEST REPORT	
FCC 47 CFR Part 15B, ISED ICES-003 Issue 6	
Report Reference No	G0M-1901-8012-EF0115B-V01
Testing Laboratory	Eurofins Product Service GmbH
Address	Storkower Str. 38c 15526 Reichenwalde Germany
Accreditation	 A2LA Accredited Testing Laboratory, Certificate No.: 1983.01 FCC Filed Test Laboratory, Reg.-No.: 96970 ISED Testing Laboratory site: 3470A-2
Applicant	Hella Aglaia Mobile Vision GmbH
Address	Ullsteinstraße 140 12109 Berlin GERMANY
Test Specification	
Standard	47 CFR Part 15 Subpart B ISED ICES-003 Issue 6 ANSI C63.4:2014
Non-Standard Test Method	None
Equipment under Test (EUT):	
Product Description	Advanced People Sensor; 180 mm lens distance; with IO connector
Model(s)	APS-180E-IO
Additional Model(s)	None
Brand Name(s)	APS-180E
Hardware Version(s)	EH601
Software Version(s)	1.12.0.19
FCC-ID	2ASWU-PS1
IC	n/a
Test Result	PASSED

Possible test case verdicts:		
required by standard but not tested	N/T	
not required by standard	N/R	
required by standard but not appl. to test object	N/A	
test object does meet the requirement	P(PASS)	
test object does not meet the requirement	F(FAIL)	
Testing:		
Date of receipt of test item	2019-01-28	
Report:		
Compiled by	Stefan Dose	
Tested by (+ signature) (Responsible for Test)	Matthias Handrik	
Approved by (+ signature) (Deputy Head of Lab)	Jens Marquardt	
Date of Issue	2019-07-01	
Total number of pages	36	
General Remarks:		
The test results presented in this report relate only to the object tested. The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report. This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.		
Additional Comments:		
Additional variants have been declared by the manufacturer. The listed models were not tested, evaluated or assessed in no way. • APS-180E; Advanced People Sensor; 180 mm lens distance; without IO connector; HW: EH602; SW: 1.12.0.19		

ABBREVIATIONS AND ACRONYMS

Acronyms	
Acronym	Description
EUT	Equipment Under Test
FCC	Federal Communications Commission
ISED	Innovation, Science and Economic Development Canada
T _{NOM}	Nominal operating temperature
V _{NOM}	Nominal supply voltage

VERSION HISTORY

Version History			
Version	Issue Date	Remarks	Revised By
01	2019-07-01	Initial Release	

REPORT INDEX

1	Equipment (Test Item) Under Test.....	6
1.1	Equipment Ports.....	7
1.2	Equipment Photos - Internal.....	8
1.3	Equipment Photos - External.....	9
1.4	Support Equipment.....	10
1.5	Operational Modes.....	11
1.6	EUT Configuration.....	12
1.7	Sample emission level calculation.....	13
2	Result Summary.....	14
2.1	Test Conditions and Results - Radiated emissions acc. to ANSI C63.4.....	15
2.2	Test Conditions and Results - Conducted emissions acc. to ANSI C63.4.....	31



1 Equipment (Test Item) Under Test

Description	Advanced People Sensor; 180 mm lens distance; with IO connector	
Model	APS-180E-IO	
Additional Model(s)	None	
Brand Name(s)	APS-180E	
Serial Number(s)	000B91802D51	
Hardware Version(s)	EH601	
Software Version(s)	1.12.0.19	
Class	Class B	
Equipment type	Table top	
Highest internal frequency [MHz]	666	
Supply Voltage	V _{NOM}	24VDC and 48VDC (PoE)
Manufacturer	Hella Aglaia Mobile Vision GmbH Ullsteinstraße 140 12109 Berlin GERMANY	



1.1 Equipment Ports

Name	Type	Attributes	Comment
Power	DC	Count: 1 Direction: In Service only: No	24VDC
Ethernet	TP	Count: 1 Direction: IO Service only: No	48VDC (PoE)
USB	IO	Count: 1 Direction: IO Service only: No	according to customer statement: devices are directly connected
Input	IO	Count: 1 Direction: In Service only: No	-
Output	IO	Count: 1 Direction: Out Service only: No	-
Description:			
AC	AC mains power input/output port		
DC	DC power input/output port		
IO	Input/Output port		
TP	Telecommunication port / wired network port		
NE	Non-electrical port		

1.2 Equipment Photos - Internal

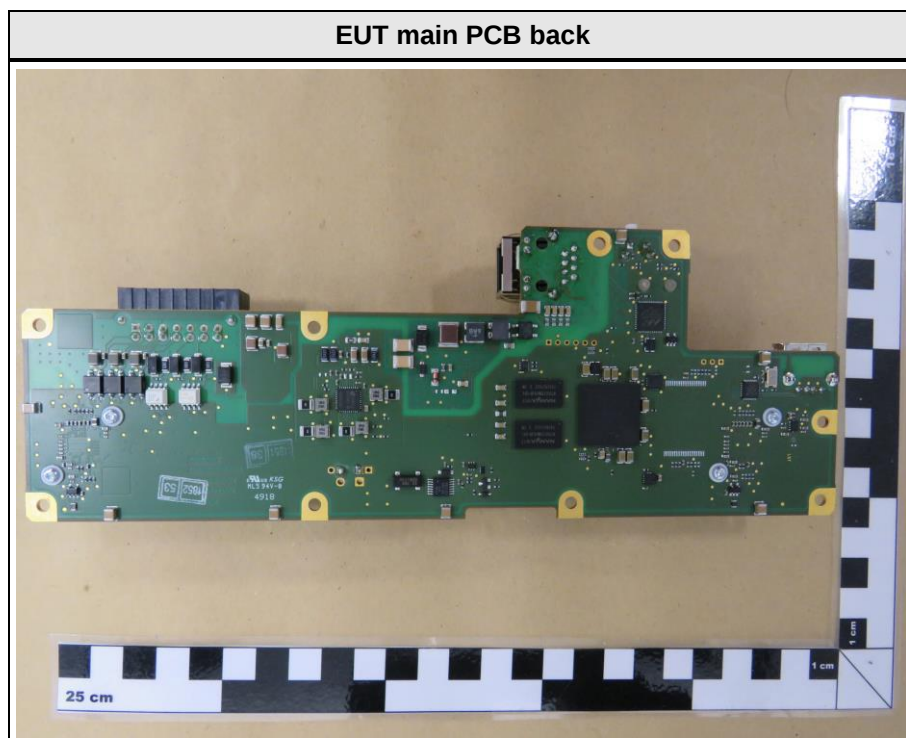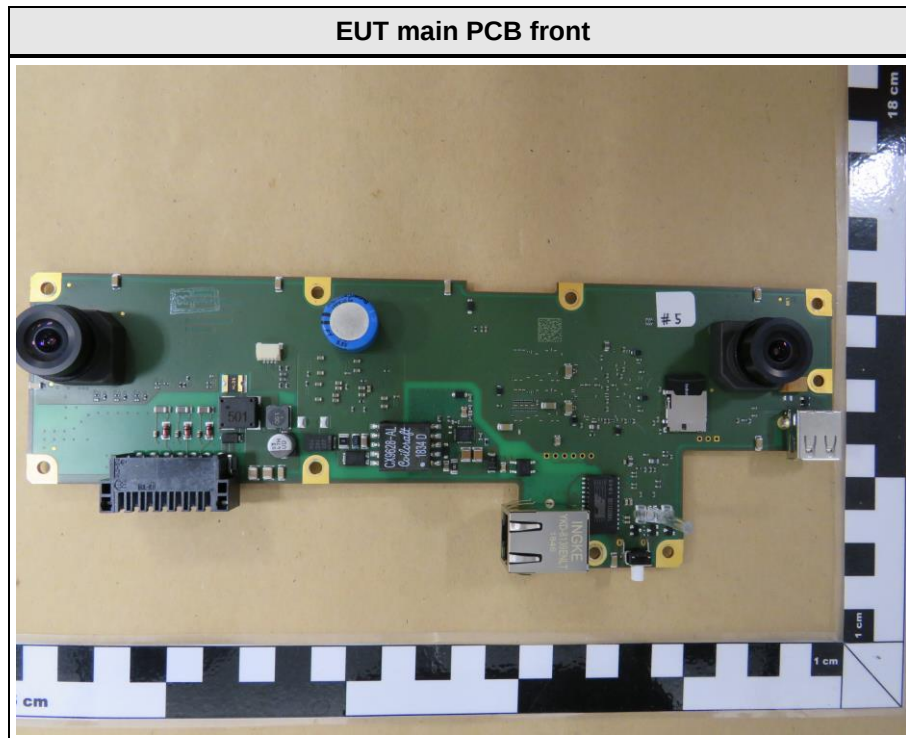

1.3 Equipment Photos - External

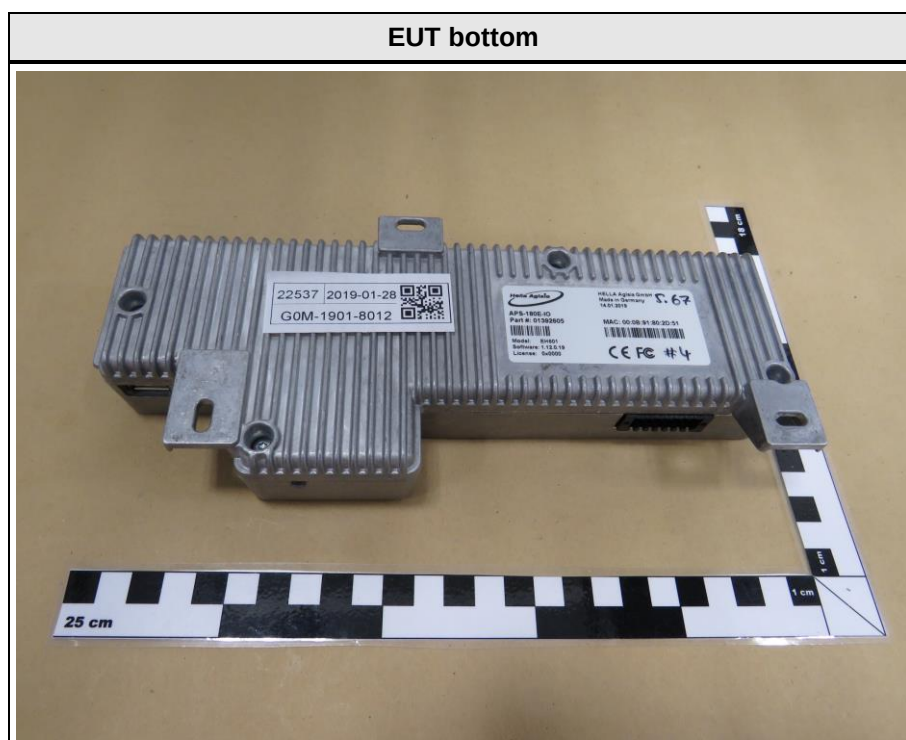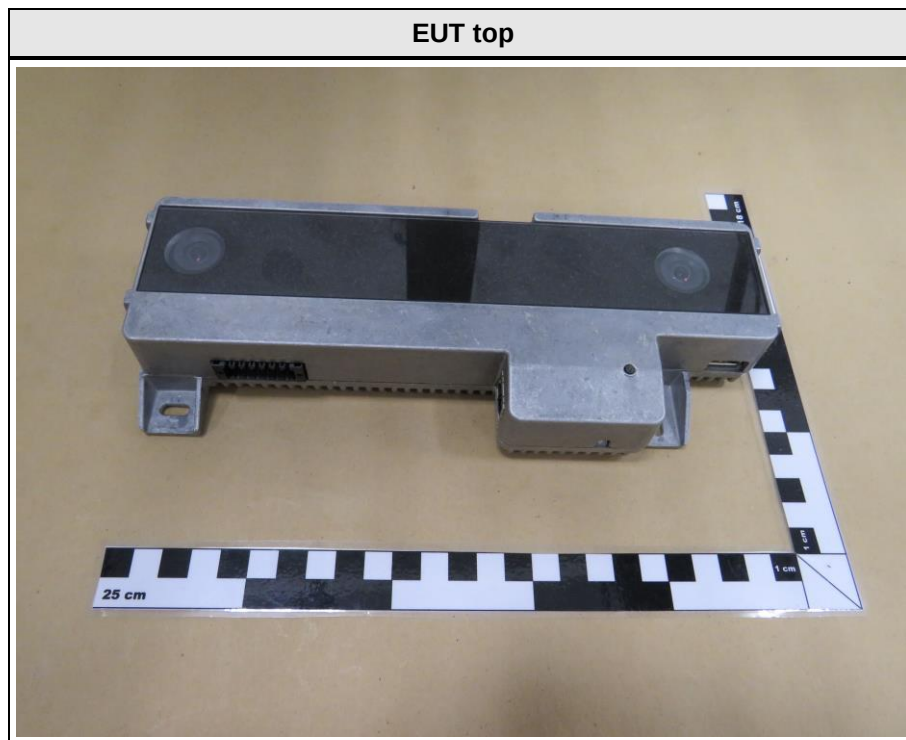

1.4 Support Equipment

Product Type	Device	Manufacturer	Model	Comment
AE	PoE Injector	TP-Link	TL-POE150S	-
AE	AC/DC-Adaptor	Intertek	MU24-1480050-CS	adaptor for injector
AE	Laptop	HP	Elitebook 8470p	for monitoring
AE	USB-stick	-	-	-
Description:				
AE	Auxiliary Equipment			
SIM	Simulator			
CBL	Connecting Cable			
Comment:				

1.5 Operational Modes

Mode #	Description
PoE	EUT powered via Ethernet (PoE), 48VDC
24VDC	EUT powered via laboratory power supply, 24VDC
Comment:	

1.6 EUT Configuration

Configuration #	Description
1	EUT is powered up (see 1.5 operational modes) and connected via Ethernet cable to Laptop. USB-Stick is plugged into USB-port. Multiple-plug (which includes the 24VDC-power, input and output cable connections) is plugged into the socket. With the help of the laptop, the camera is accessed and the recorded video feed is displayed. In addition, a ping signal is evaluated: green flashing heart at the bottom.
Comment:	

1.7 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyser in dBµV. Any external preamplifiers used are taken into account through internal analyser settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyser. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyser (dB}\mu\text{V)} + \text{A.F. (dB/m)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dBµV/m). The FCC limits are given in units of µV/m. The following formula is used to convert the units of µV/m to dBµV/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 \cdot \log(\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

Reading + AF	= Net Reading	:	Net reading - FCC limit	= Margin
+21.5 dBµV + 26 dB/m	= 47.5 dBµV/m	:	47.5 dBµV/m - 57.0 dBµV/m	= -9.5 dB

2 Result Summary

FCC 47 CFR Part 15B, ISED ICES-003 Issue 6				
Reference	Requirement	Reference Method	Result	Remarks
Emission				
FCC 15.109 ICES-003, 8, 6.1	Radiated emissions	ANSI C63.4:2014	PASS	-
FCC 15.107 ICES-003, 8, 6.2	AC power line conducted emissions	ANSI C63.4:2014	PASS	-
Comment:				



Possible Test Case Verdicts	
PASS	Test object does meet the requirements
FAIL	Test object does not meet the requirements
N/T	Required by standard but not tested
N/R	Not required by standard for the test object



2.1 Test Conditions and Results - Radiated emissions acc. to ANSI C63.4

2.1.1 Information

Test Information	
Reference	FCC 15.109, ICES-003, 8, 6.1
Reference method	ANSI C63.4:2014 Section 8
Equipment class	Class B
Equipment type	Table top
Highest internal frequency [MHz]	666
Measurement range	30 MHz to 5 GHz
Temperature [°C]	22 – 24
Humidity [%]	25 – 28
Operator	Stefan Dose supervised by Matthias Handrik
Date	2019-01-28

2.1.2 Setup

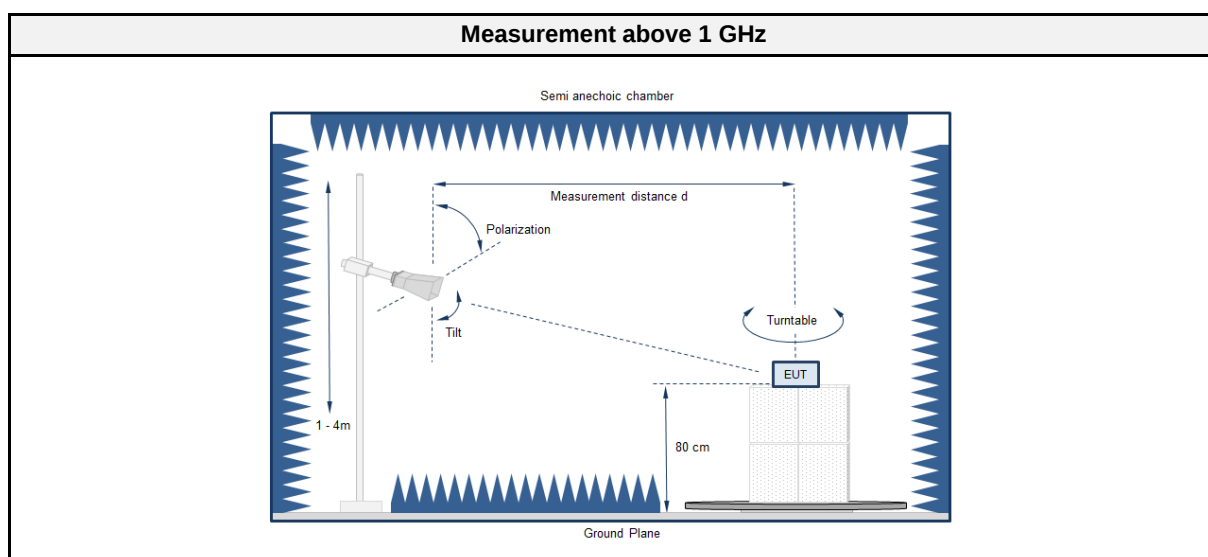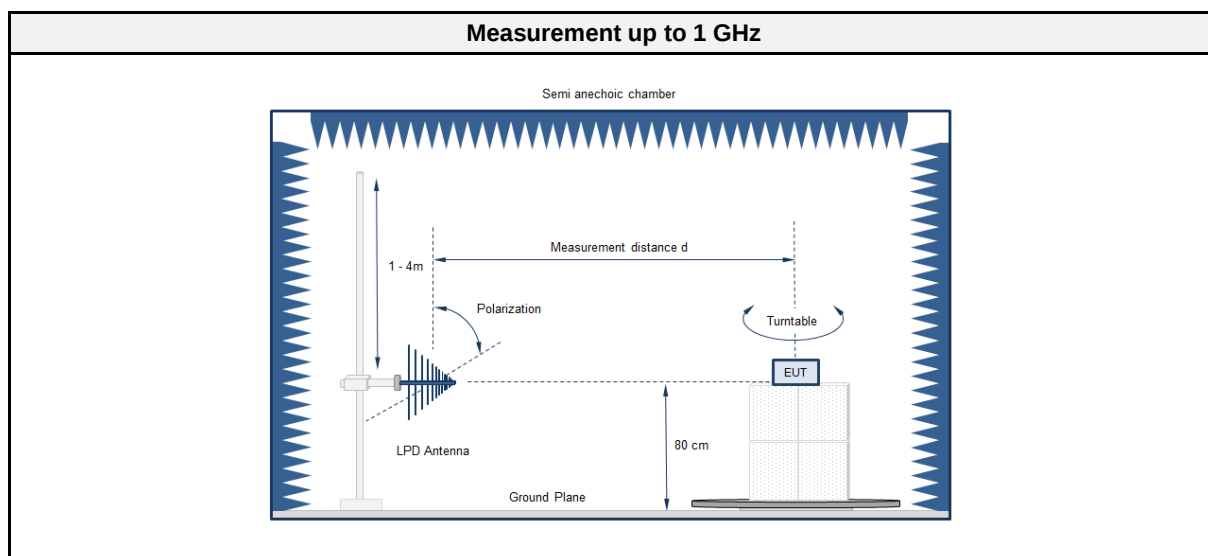

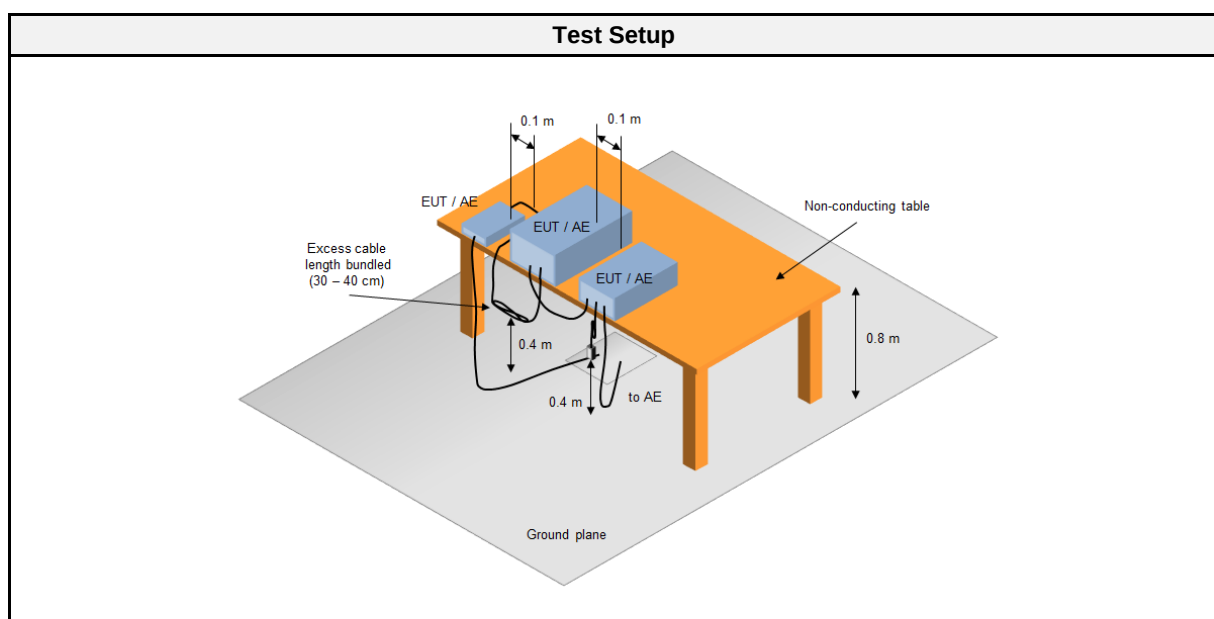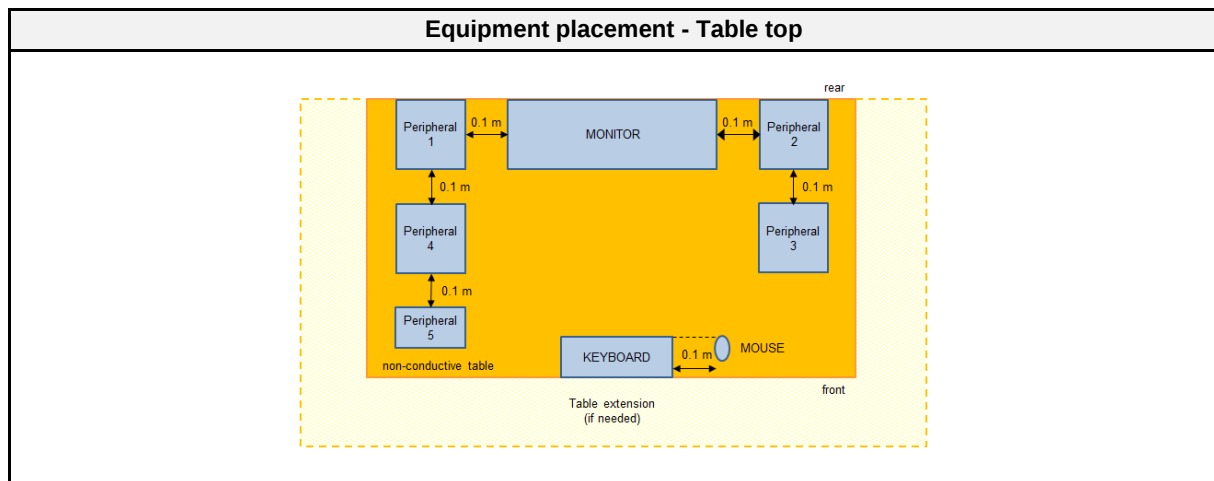

2.1.3 Equipment

Test Software			
Description	Manufacturer	Name	Version
EMC Software	DARE Instruments	Radimation	2016.1.10

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic chamber	Frankonia	AC1	EF00062	2018-07	2021-07
EMI Test Receiver	Keysight	N9038A-526/WXP	EF01070	2018-08	2019-08
Biconical Antenna	R&S	HK 116	EF00030	2016-04	2019-04
LPD Antenna	R&S	HL 223	EF00187	2016-05	2019-05
Horn Antenna	Schwarzbeck	BBHA9120D	EF00018	2016-09	2019-09
CDN	Teseq GmbH - Berlin	ST08A	EF00411	2017-07	2019-07

2.1.4 Procedure

Exploratory measurement	
1.	The EUT was placed on a non-conductive table at a height of 0.8m.
2.	The EUT and support equipment, if needed, were set up to simulate typical usage.
3.	Cables, of type and length specified by the manufacturer, were connected to at least one port of each type and were terminated by a device or simulating load of actual usage.
4.	The antenna was placed at a distance of 3 or 10 m.
5.	The received signal was monitored at the measurement receiver.
6.	This procedure has to be performed in both antenna polarizations, horizontal and vertical.
7.	The arrangement of the equipment with the maximum emission level is shown on the setup picture at item 1.3

Final measurement	
1.	The EUT was placed on a 0.8 m non-conductive table at a 3 m distance from the receive antenna. The antenna output was connected to the measurement receiver.
2.	A biconical antenna was used for the frequency range 30 – 200 MHz, a logarithmic periodical antenna was used for the frequency range from 200 – 1000 MHz. Above one 1 GHz a Double Ridged Broadband Horn antenna was used. The antenna was placed on an adjustable height antenna mast.
3.	The EUT and cable arrangement were based on the exploratory measurement results.
4.	Emissions were maximized at each frequency by rotating the EUT and adjusting the receive antenna height and polarization. The maximum values were recorded.
5.	The test data of the worst-case conditions were recorded and shown on the next pages.

2.1.5 Limits


Class B @ 3 m		
Frequency [MHz]	Detector	Limit [dB μ V/m]
30 - 88	Quasi-peak	40
88 - 216	Quasi-peak	43.5
216 - 960	Quasi-peak	46
960 - 1000	Quasi-peak	54
> 1000	Peak	74
	Average	54

Class A @ 10 m		
Frequency [MHz]	Detector	Limit [dB μ V/m]
30 - 88	Quasi-peak	39
88 - 216	Quasi-peak	43.5
216 - 960	Quasi-peak	46.5
960 - 1000	Quasi-peak	49.5
> 1000	Peak	69.5
	Average	49.5

2.1.6 Results

Test Results			
Operational mode	EUT Configuration	Verdict	Remark
PoE	1	PASS	note 1
24VDC	1	PASS	note 1
Comment: • note 1 → ac-dc adapter and PoE-injector itself is placed outside the chamber and decoupled via a CDN			

2.1.7 Setup Photos

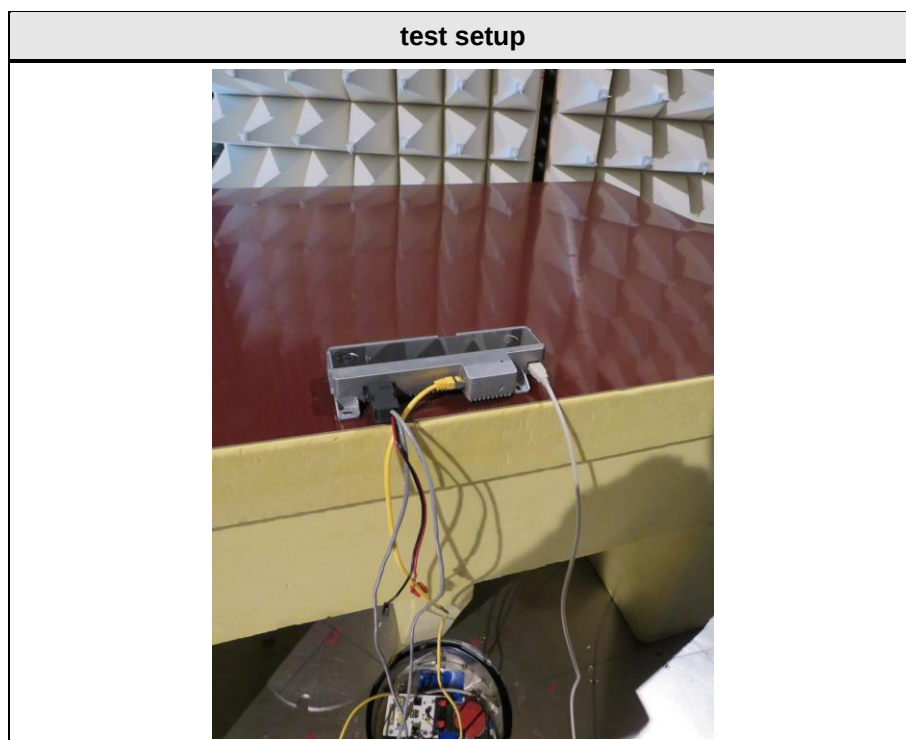


2.1.8 Records

Radiated emissions under normal conditions according to FCC Part 15b

Project number: G0M-1901-8012

Applicant: Hella Aglaia Mobile Vision GmbH
 EUT Name: APS-180E-IO
 Model: 000B91802D51
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Dose
 Test Conditions: Tnom: 23°C, Unom: 48VDC (PoE)
 Antenna: Rohde & Schwarz HK 116, Vertical
 Measurement distance: 3m
 Mode: PoE
 Test Date: 2019-01-28
 Note:

Index 4

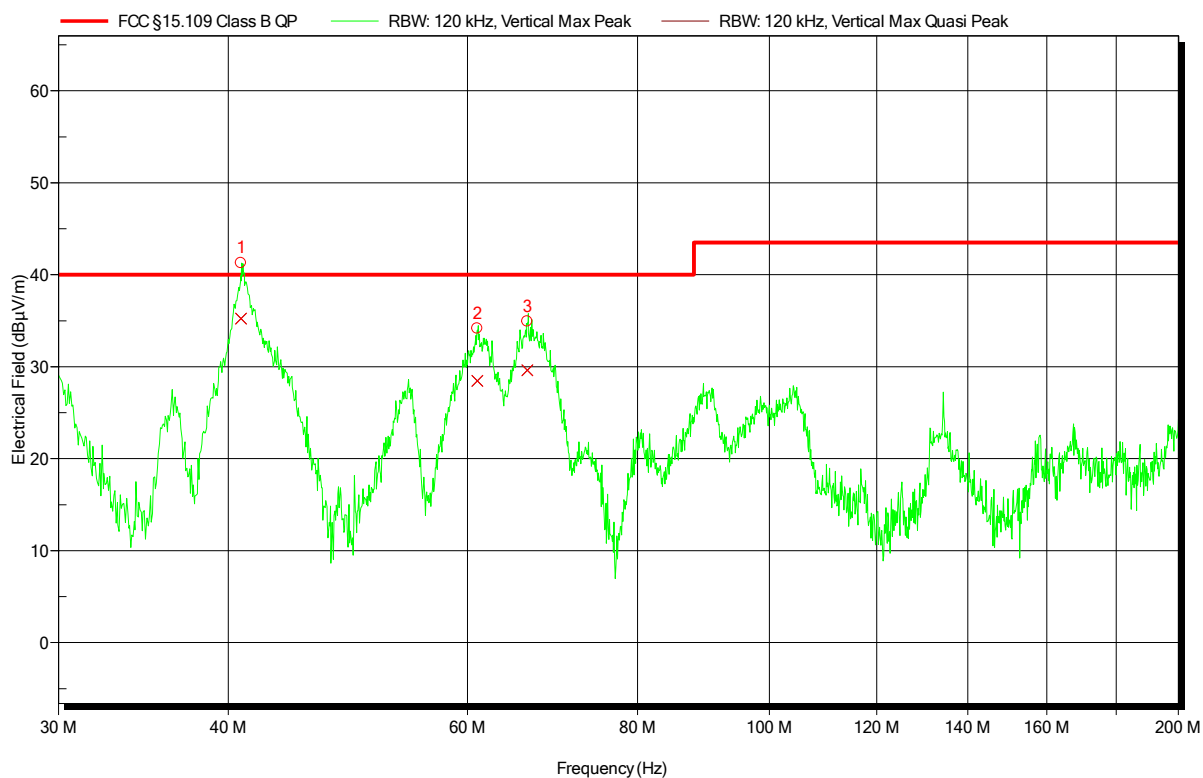

Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	Angle	Height
1	40.887 MHz	35.22 dBμV/m	40 dBμV/m	-4.78 dB	Pass	-180 Degree	1 m
2	60.986 MHz	28.46 dBμV/m	40 dBμV/m	-11.54 dB	Pass	-180 Degree	1 m
3	66.39 MHz	29.6 dBμV/m	40 dBμV/m	-10.4 dB	Pass	-180 Degree	1 m

Test Report No.: G0M-1901-8012-EF0115B-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radiated emissions under normal conditions according to FCC Part 15b

Project number: G0M-1901-8012

Applicant: Hella Aglaia Mobile Vision GmbH
 EUT Name: APS-180E-IO
 Model: 000B91802D51
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Dose
 Test Conditions: Tnom: 23°C, Unom: 48VDC (PoE)
 Antenna: Rohde & Schwarz HK 116, Horizontal
 Measurement distance: 3m
 Mode: PoE
 Test Date: 2019-01-28
 Note:

Index 3

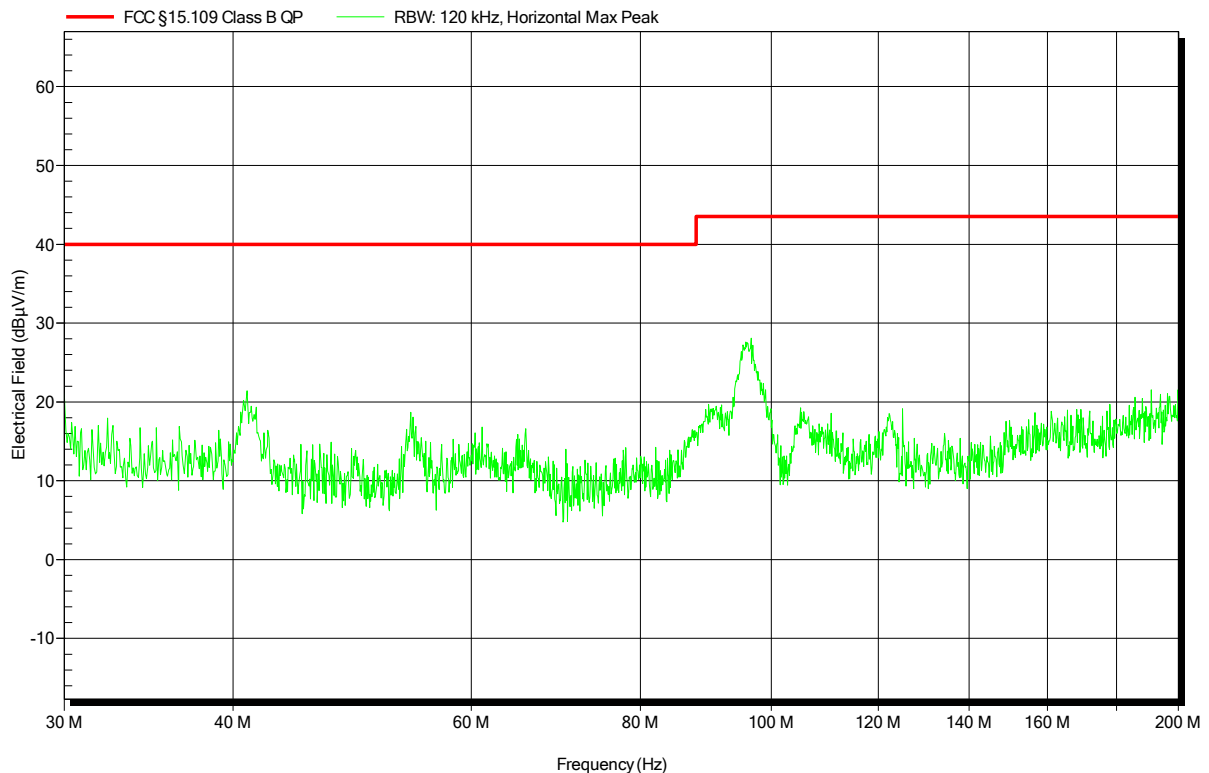


Radiated emissions under normal conditions according to FCC Part 15b

Project number: G0M-1901-8012

Applicant: Hella Aglaia Mobile Vision GmbH
EUT Name: APS-180E-IO
Model: 000B91802D51
Test Site: Eurofins Product Service GmbH
Operator: Mr. Dose
Test Conditions: Tnom: 23°C, Unom: 48VDC (PoE)
Antenna: Rohde & Schwarz HL 223, Vertical
Measurement distance: 3m
Mode: PoE
Test Date: 2019-01-28
Note:

Index 8

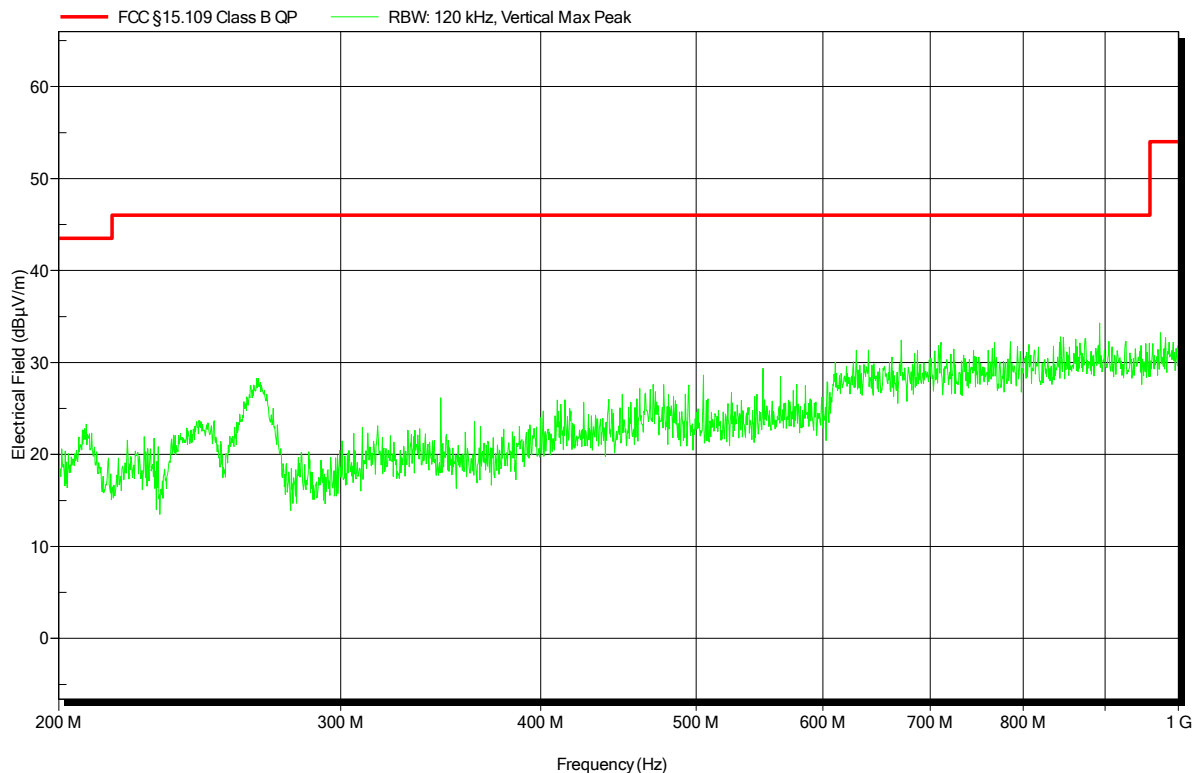


Radiated emissions under normal conditions according to FCC Part 15b

Project number: G0M-1901-8012

Applicant: Hella Aglaia Mobile Vision GmbH
EUT Name: APS-180E-IO
Model: 000B91802D51
Test Site: Eurofins Product Service GmbH
Operator: Mr. Dose
Test Conditions: Tnom: 23°C, Unom: 48VDC (PoE)
Antenna: Rohde & Schwarz HL 223, Horizontal
Measurement distance: 3m
Mode: PoE
Test Date: 2019-01-28
Note:

Index 7

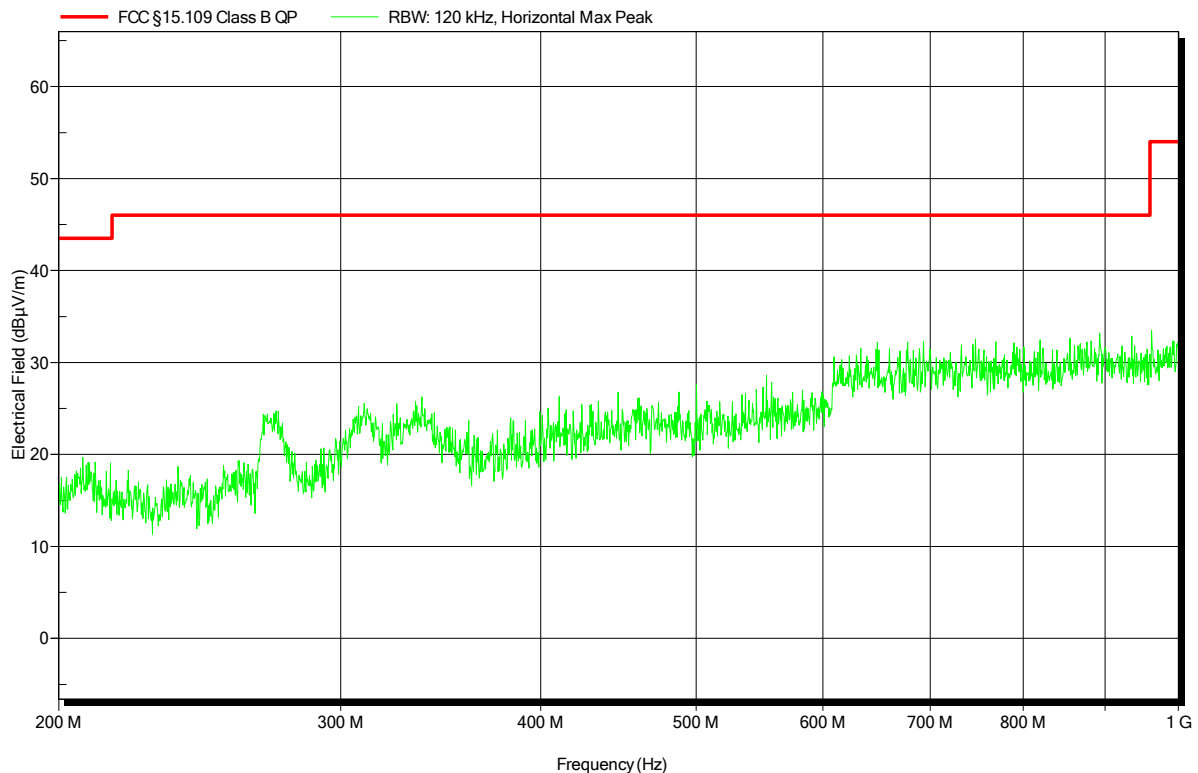


Radiated emissions under normal conditions according to FCC Part 15b

Project number: G0M-1901-8012

Applicant: Hella Aglaia Mobile Vision GmbH
 EUT Name: APS-180E-IO
 Model: 000B91802D51
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Dose
 Test Conditions: Tnom: 24°C, Unom: 48VDC (PoE)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 3m
 Mode: PoE
 Test Date: 2019-01-28
 Note:

Index 12

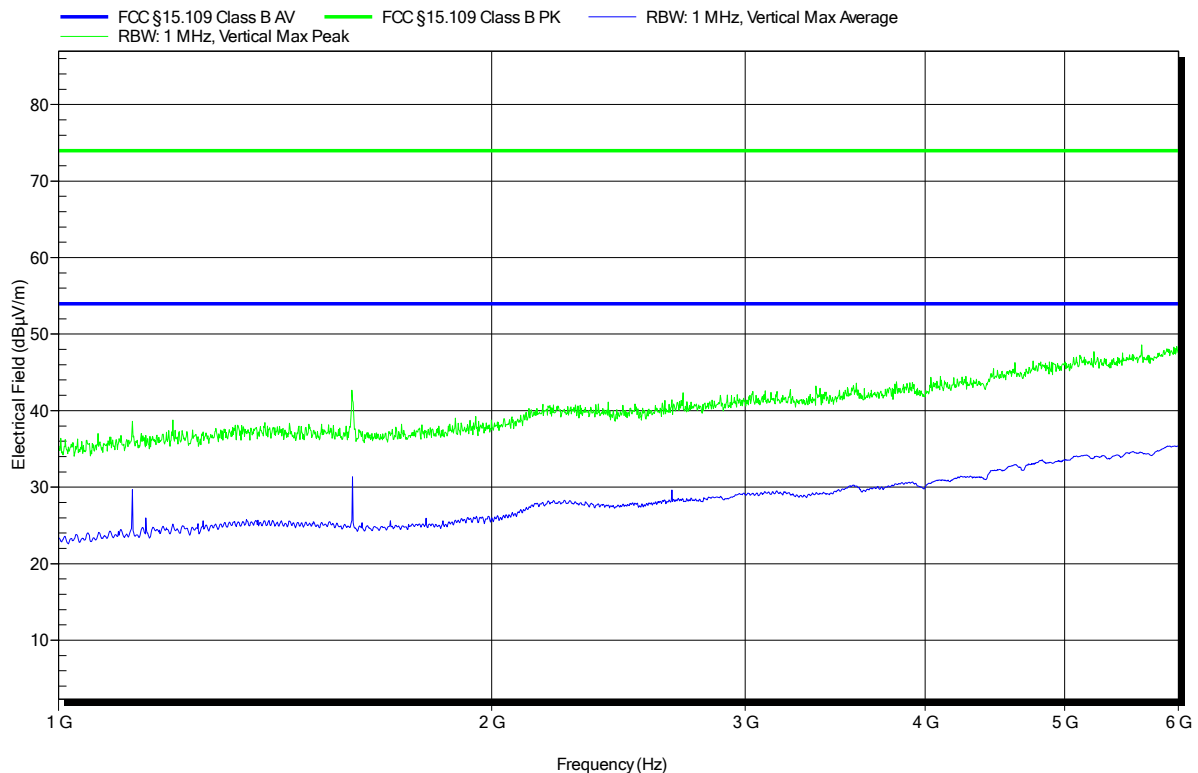


Radiated emissions under normal conditions according to FCC Part 15b

Project number: G0M-1901-8012

Applicant: Hella Aglaia Mobile Vision GmbH
EUT Name: APS-180E-IO
Model: 000B91802D51
Test Site: Eurofins Product Service GmbH
Operator: Mr. Dose
Test Conditions: Tnom: 24°C, Unom: 48VDC (PoE)
Antenna: Schwarzbeck BBHA 9120D, Horizontal
Measurement distance: 3m
Mode: PoE
Test Date: 2019-01-28
Note:

Index 11

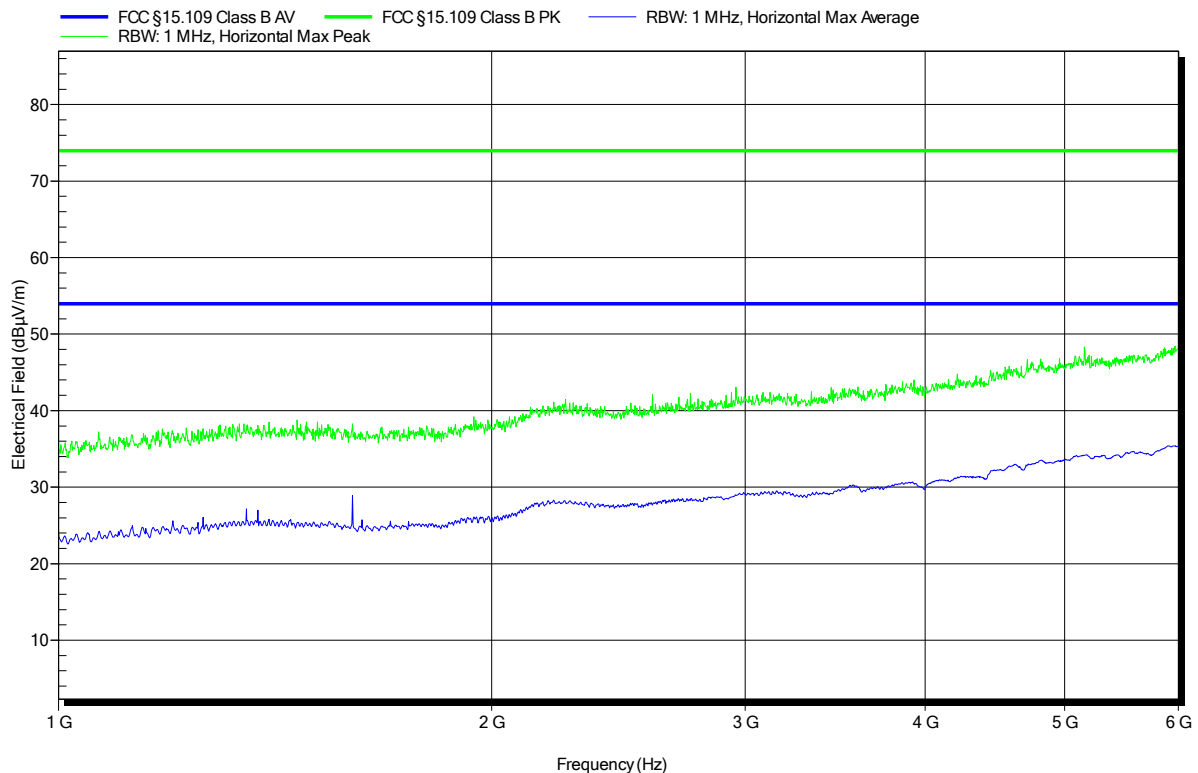


Radiated emissions under normal conditions according to FCC Part 15b

Project number: G0M-1901-8012

Applicant: Hella Aglaia Mobile Vision GmbH
 EUT Name: APS-180E-IO
 Model: 000B91802D51
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Dose
 Test Conditions: Tnom: 22°C, Unom: 24VDC
 Antenna: Rohde & Schwarz HK 116, Vertical
 Measurement distance: 3m
 Mode: 24VDC
 Test Date: 2019-01-28
 Note:

Index 18

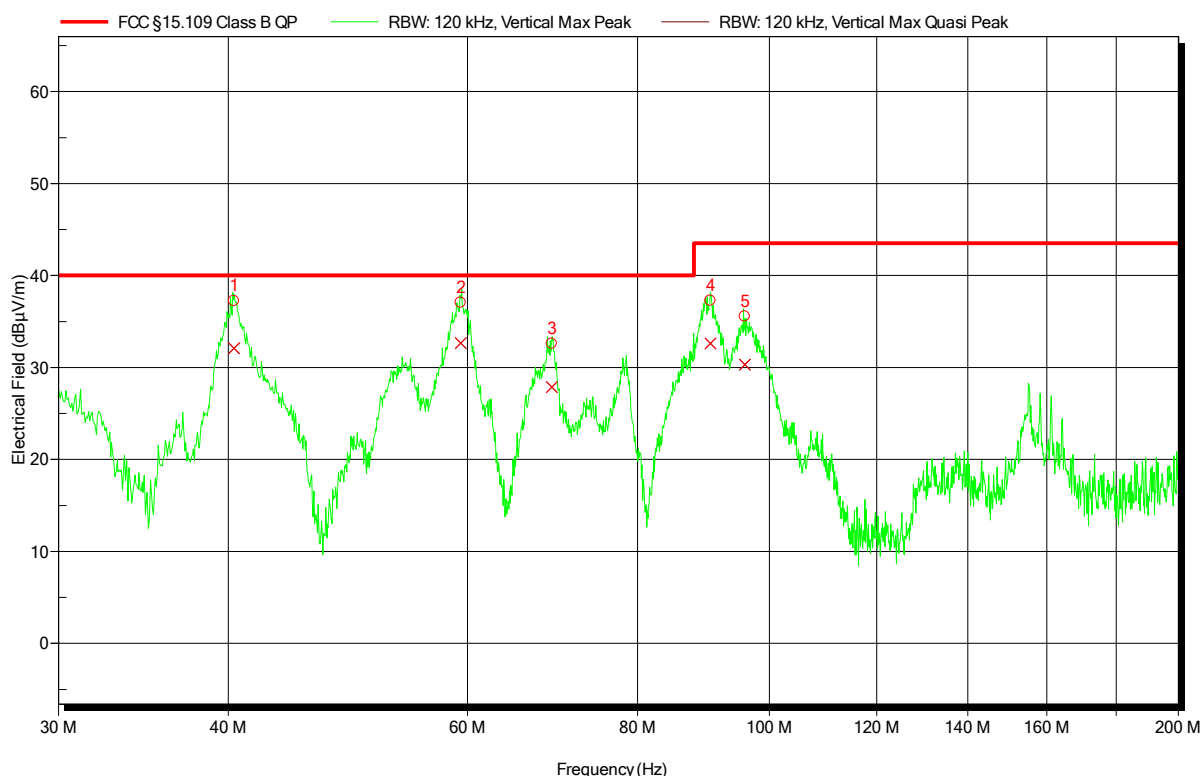


Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	Angle	Height
1	40.388 MHz	32.08 dBµV/m	40 dBµV/m	-7.92 dB	Pass	-180 Degree	1 m
2	59.304 MHz	32.67 dBµV/m	40 dBµV/m	-7.33 dB	Pass	-180 Degree	1 m
3	69.212 MHz	27.87 dBµV/m	40 dBµV/m	-12.13 dB	Pass	-180 Degree	1 m
4	90.529 MHz	32.63 dBµV/m	43.52 dBµV/m	-10.89 dB	Pass	-180 Degree	1 m
5	95.934 MHz	30.3 dBµV/m	43.52 dBµV/m	-13.23 dB	Pass	-180 Degree	1 m

Radiated emissions under normal conditions according to FCC Part 15b

Project number: G0M-1901-8012

Applicant: Hella Aglaia Mobile Vision GmbH
 EUT Name: APS-180E-IO
 Model: 000B91802D51
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Dose
 Test Conditions: Tnom: 22°C, Unom: 24VDC
 Antenna: Rohde & Schwarz HK 116, Horizontal
 Measurement distance: 3m
 Mode: 24VDC
 Test Date: 2019-01-28
 Note:

Index 17

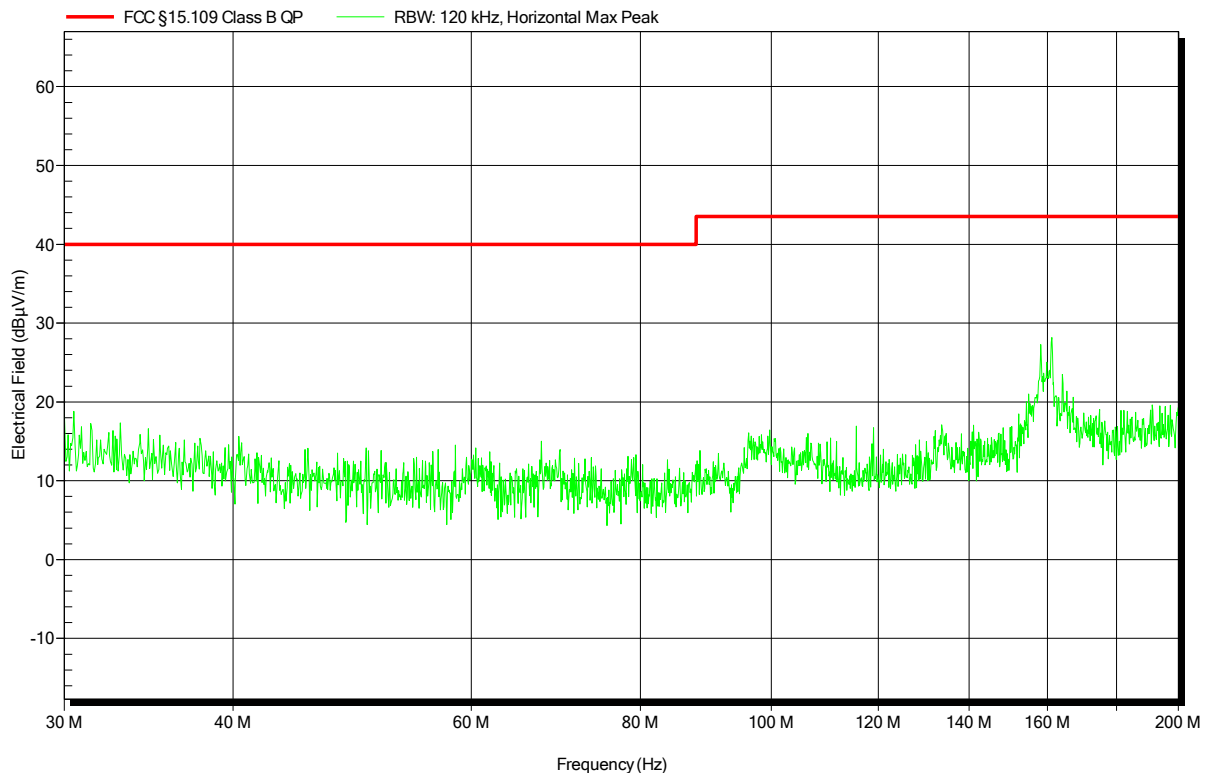


Radiated emissions under normal conditions according to FCC Part 15b

Project number: G0M-1901-8012

Applicant: Hella Aglaia Mobile Vision GmbH
 EUT Name: APS-180E-IO
 Model: 000B91802D51
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Dose
 Test Conditions: Tnom: 22°C, Unom: 24VDC
 Antenna: Rohde & Schwarz HL 223, Vertical
 Measurement distance: 3m
 Mode: 24VDC
 Test Date: 2019-01-28
 Note:

Index 15

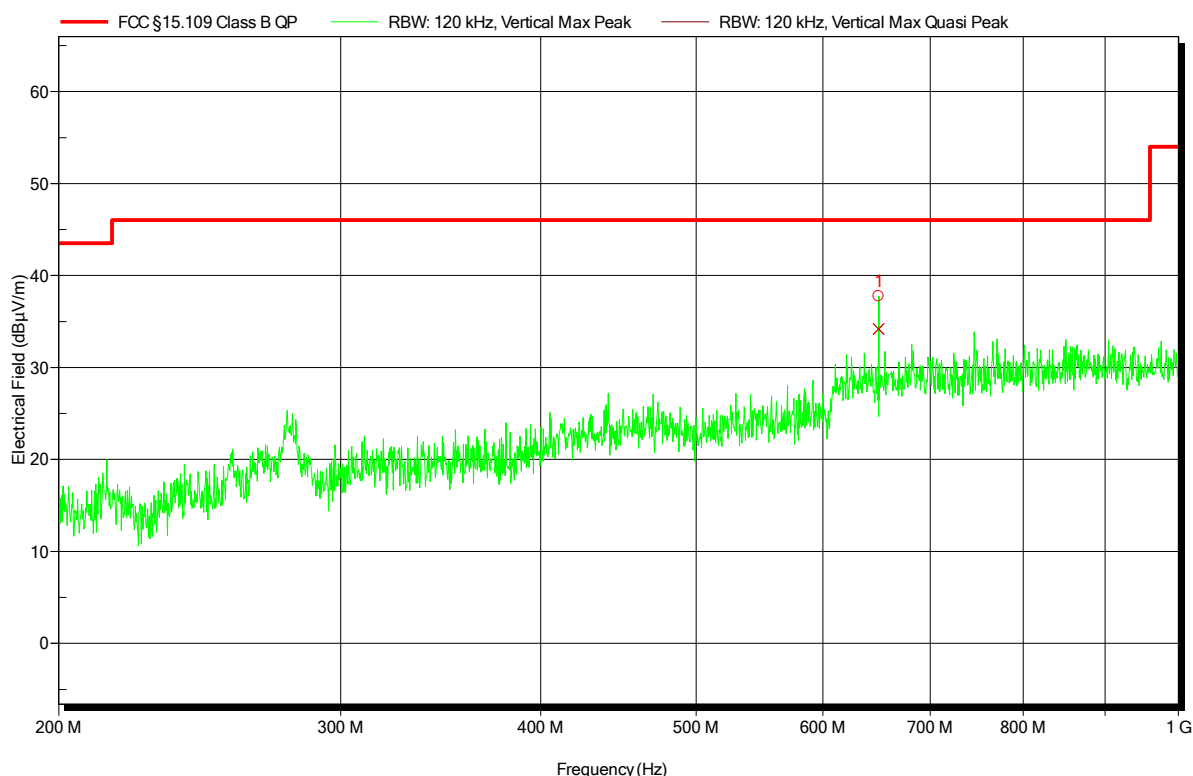


Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	Angle	Height
1	650.009 MHz	34.17 dBµV/m	46.02 dBµV/m	-11.85 dB	Pass	180 Degree	1 m

Radiated emissions under normal conditions according to FCC Part 15b

Project number: G0M-1901-8012

Applicant: Hella Aglaia Mobile Vision GmbH
 EUT Name: APS-180E-IO
 Model: 000B91802D51
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Dose
 Test Conditions: Tnom: 22°C, Unom: 24VDC
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement distance: 3m
 Mode: 24VDC
 Test Date: 2019-01-28
 Note:

Index 16

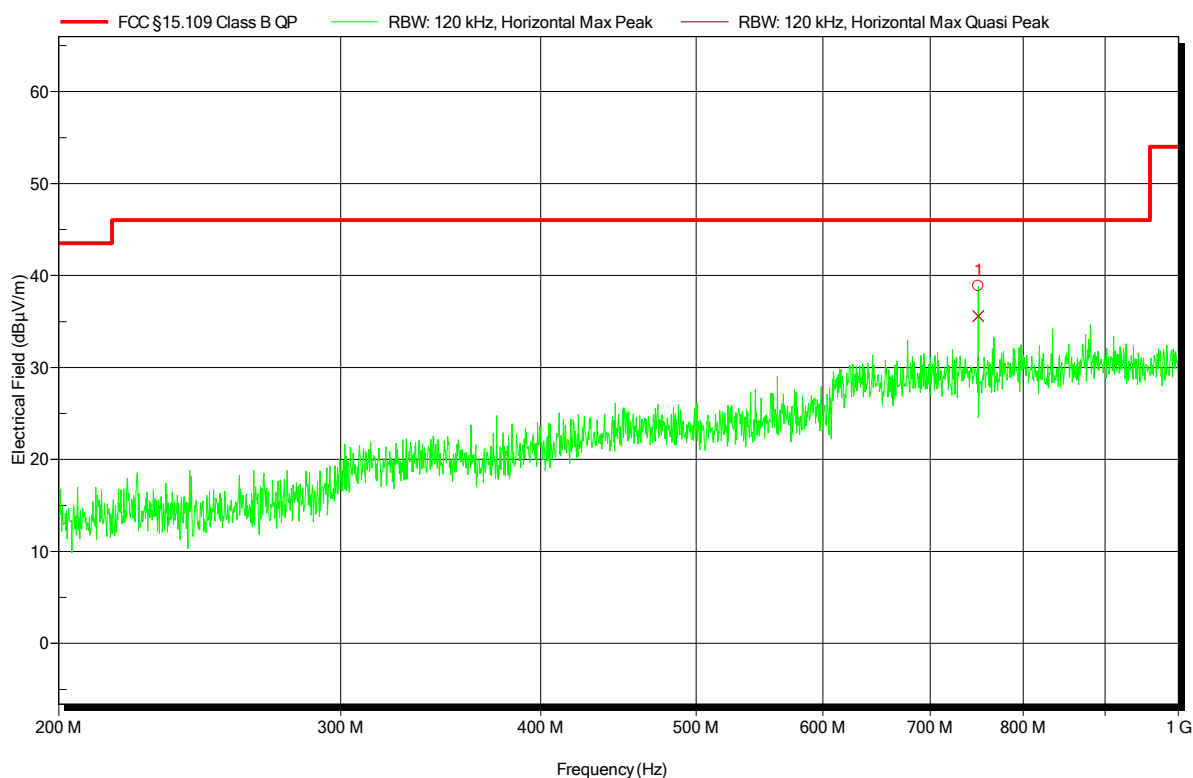


Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	Angle	Height
1	750.009 MHz	35.6 dBµV/m	46.02 dBµV/m	-10.42 dB	Pass	-70 Degree	1 m

Radiated emissions under normal conditions according to FCC Part 15b

Project number: G0M-1901-8012

Applicant: Hella Aglaia Mobile Vision GmbH
EUT Name: APS-180E-IO
Model: 000B91802D51
Test Site: Eurofins Product Service GmbH
Operator: Mr. Dose
Test Conditions: Tnom: 24°C, Unom: 24VDC
Antenna: Schwarzbek BBHA 9120D, Vertical
Measurement distance: 3m
Mode: 24VDC
Test Date: 2019-01-28
Note:

Index 13

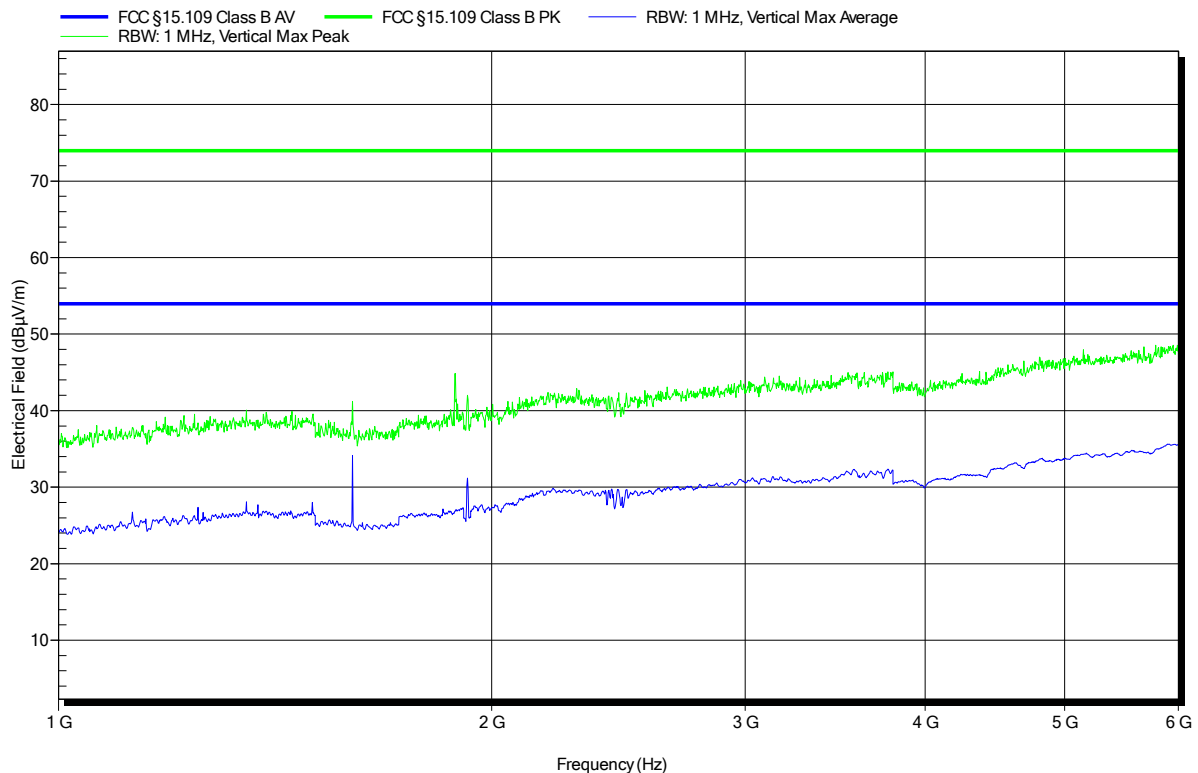


Radiated emissions under normal conditions according to FCC Part 15b

Project number: G0M-1901-8012

Applicant: Hella Aglaia Mobile Vision GmbH
EUT Name: APS-180E-IO
Model: 000B91802D51
Test Site: Eurofins Product Service GmbH
Operator: Mr. Dose
Test Conditions: Tnom: 23°C, Unom: 24VDC
Antenna: Schwarzbeck BBHA 9120D, Horizontal
Measurement distance: 3m
Mode: 24VDC
Test Date: 2019-01-28
Note:

Index 14

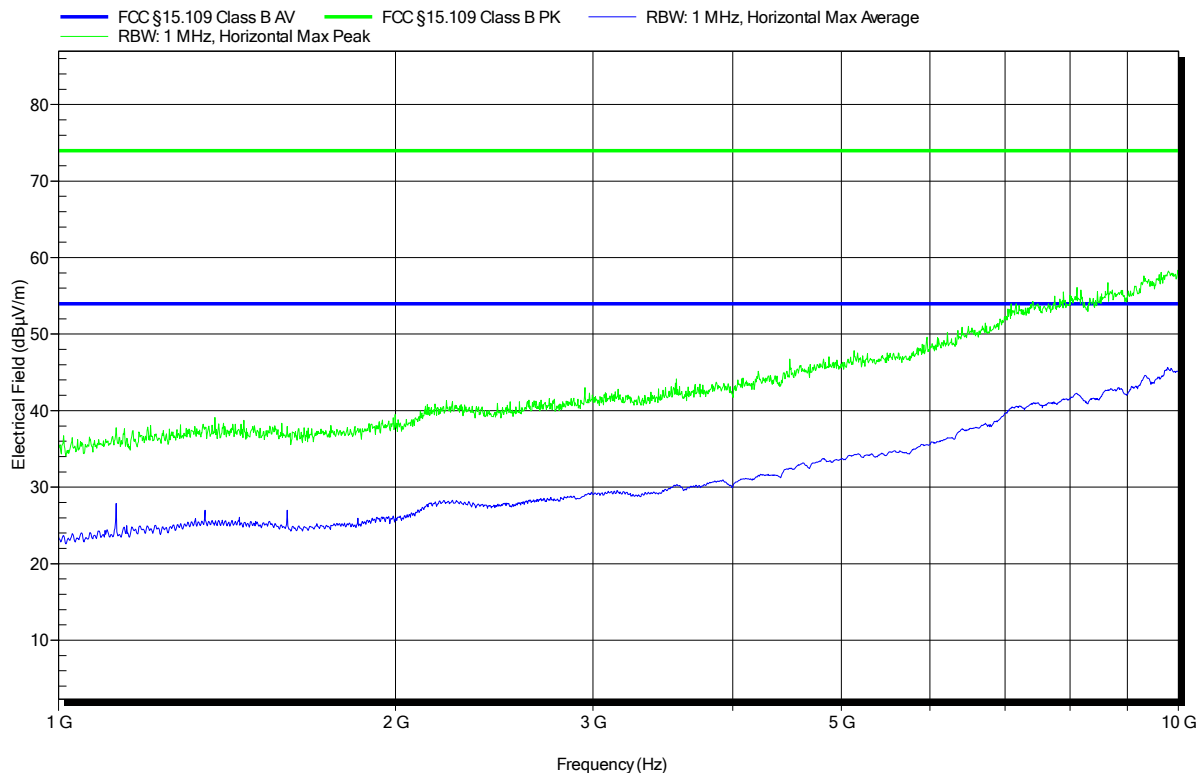

2.2.3 Equipment

Test Software			
Description	Manufacturer	Name	Version
EMC Software	DARE Instruments	Radimation	2016.1.10

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
AAN	Teseq	ST08AS	EF00411	2017-07	2019-07
AMN	R&S	ESH3-Z5	EF00036	2017-01	2019-07
Pulse Limiter	R&S	ESH3-Z2	EF01063	2018-07	2019-07
EMI Test Receiver	R&S	ESR 7	EF00943	2018-07	2019-07

2.2.4 Procedure

Exploratory measurement	
1.	The EUT was placed on a non-conductive table 0.8 m above the reference ground plane and 0.4 m away from the vertical conducting plane (ANSI C63.4: 2014 item 7.3.1)
2.	The power cord that is normally supplied or recommended by the manufacturer was connected to the LISN.
3.	The distance between the outer edge of the EUT and the LISN shall be set to 0.8 m. A longer power cord shall be bundled to this length (bundling shall not exceed 40 cm in length).
4.	The LISN measurement port was connected to a measurement receiver
5.	I/O cables were bundled not longer than 0.4 m
6.	Measurement was performed in the frequency range 0.15 – 30MHz on each current-carrying conductor
7.	To maximize the emissions the cable positions were manipulated
8.	The worst configuration of EUT and cables is shown on a test setup picture at item 1.3

Final measurement	
1.	The EUT was placed on a non-conductive table 0.8 m above the reference ground plane and 0.4 m away from the vertical conducting plane (ANSI C63.4: 2014 item 7.3.1)
2.	The power cord that is normally supplied or recommended by the manufacturer was connected to the LISN.
3.	The distance between the outer edge of the EUT and the LISN shall be set to 0.8 m. A longer power cord shall be bundled to this length (bundling shall not exceed 40 cm in length).
4.	The LISN measurement port was connected to a measurement receiver
5.	The EUT and cable arrangement were based on the exploratory measurement results
6.	The test data of the worst-case conditions were recorded and shown on the next pages


2.2.5 Limits

Class B		
Frequency [MHz]	Quasi-peak Limit [dBμV]	Average Limit [dBμV]
0.15 - 0.5	66 - 56 *	56 - 46 *
0.5 - 5	56	46
5 - 30	60	50
* Decreases with the logarithm of the frequency		

2.2.6 Results

AC power line conducted emissions					
Port	Coupling	Operational mode	EUT Configuration	Verdict	Remark
Ethernet	AMN	PoE	1	PASS	-
Notes:					

2.2.7 Setup Photos

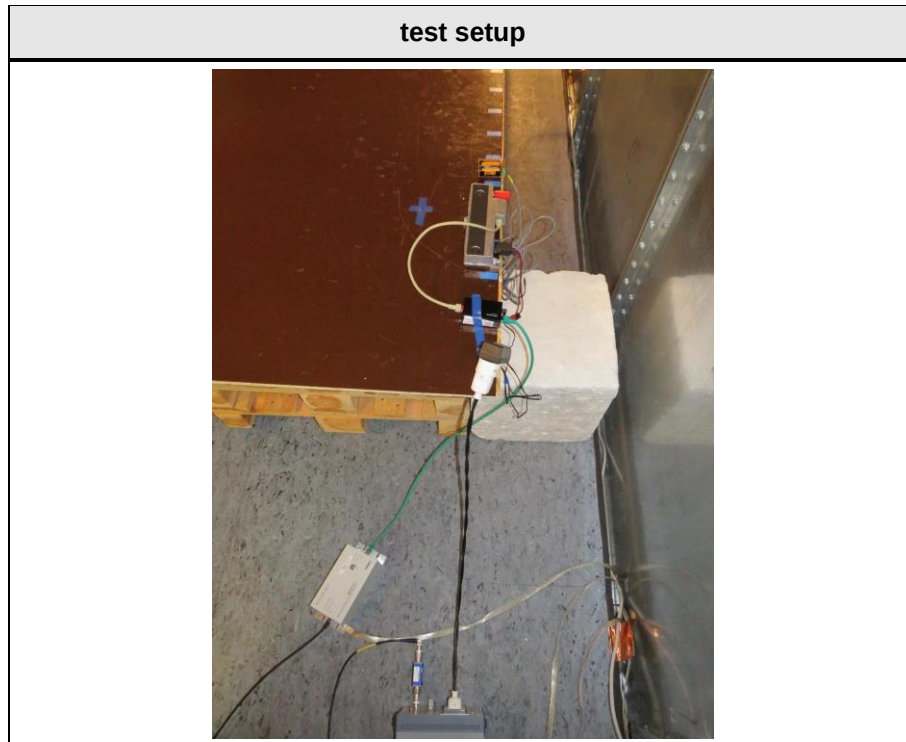


2.2.8 Records

EMI voltage test in the ac-mains according to FCC Part 15b

Project number: G0M-1901-8012

Applicant: Hella Aglaia Mobile Vision GmbH
 EUT Name: APS-180E-IO
 Model: 000B91802D51
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Dose
 Test Conditions: Tnom: 22°C, Unom: 48VDC (PoE)
 LISN: ESH3-Z5 (L)
 Mode: PoE
 Test Date: 2019-02-05
 Note:

Index 41

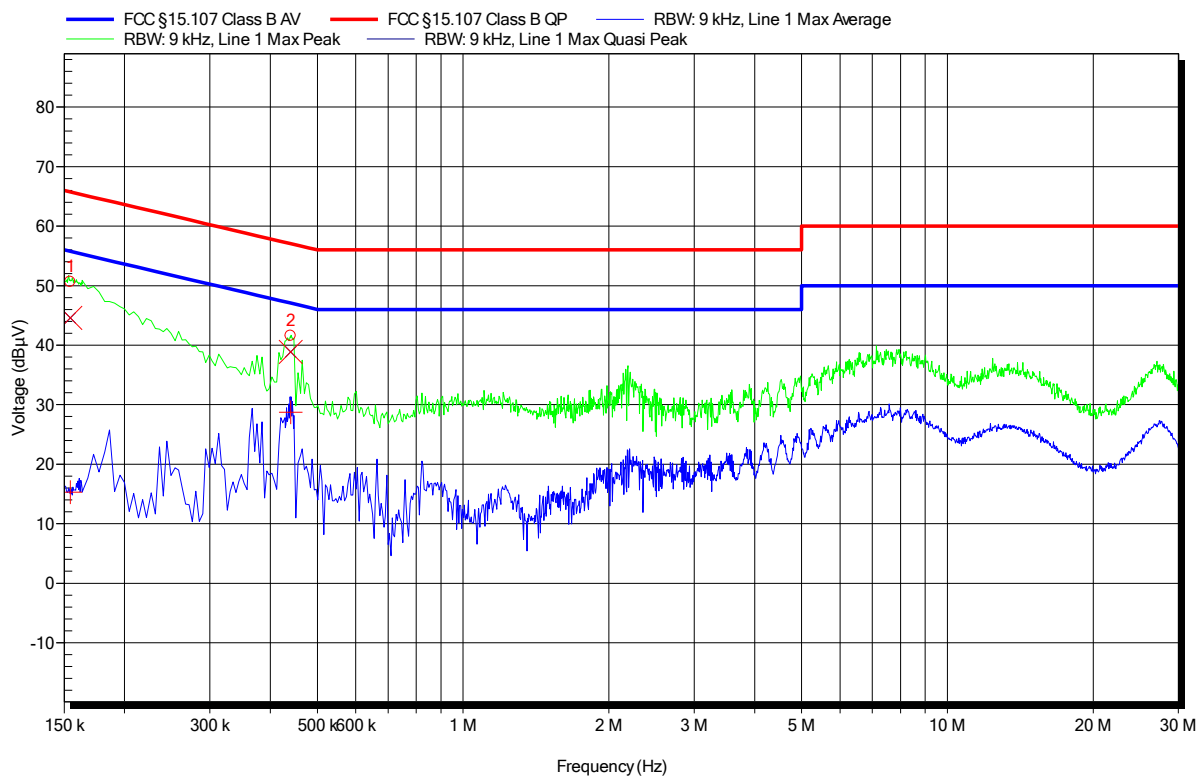

Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status
1	154.5 kHz	44.58 dBμV	65.75 dBμV	-21.18 dB	Pass
2	440.7 kHz	38.84 dBμV	57.05 dBμV	-18.21 dB	Pass


Peak Number	Frequency	Average	Average Limit	Average Difference	Average Status
1	154.5 kHz	15.3 dBμV	55.75 dBμV	-40.45 dB	Pass
2	440.7 kHz	28.71 dBμV	47.05 dBμV	-18.33 dB	Pass

EMI voltage test in the ac-mains according to FCC Part 15b

Project number: G0M-1901-8012

Applicant: Hella Aglaia Mobile Vision GmbH
 EUT Name: APS-180E-IO
 Model: 000B91802D51
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Dose
 Test Conditions: Tnom: 22°C, Unom: 48VDC (PoE)
 LISN: ESH3-Z5 (N)
 Mode: PoE
 Test Date: 2019-02-05
 Note:

Index 42

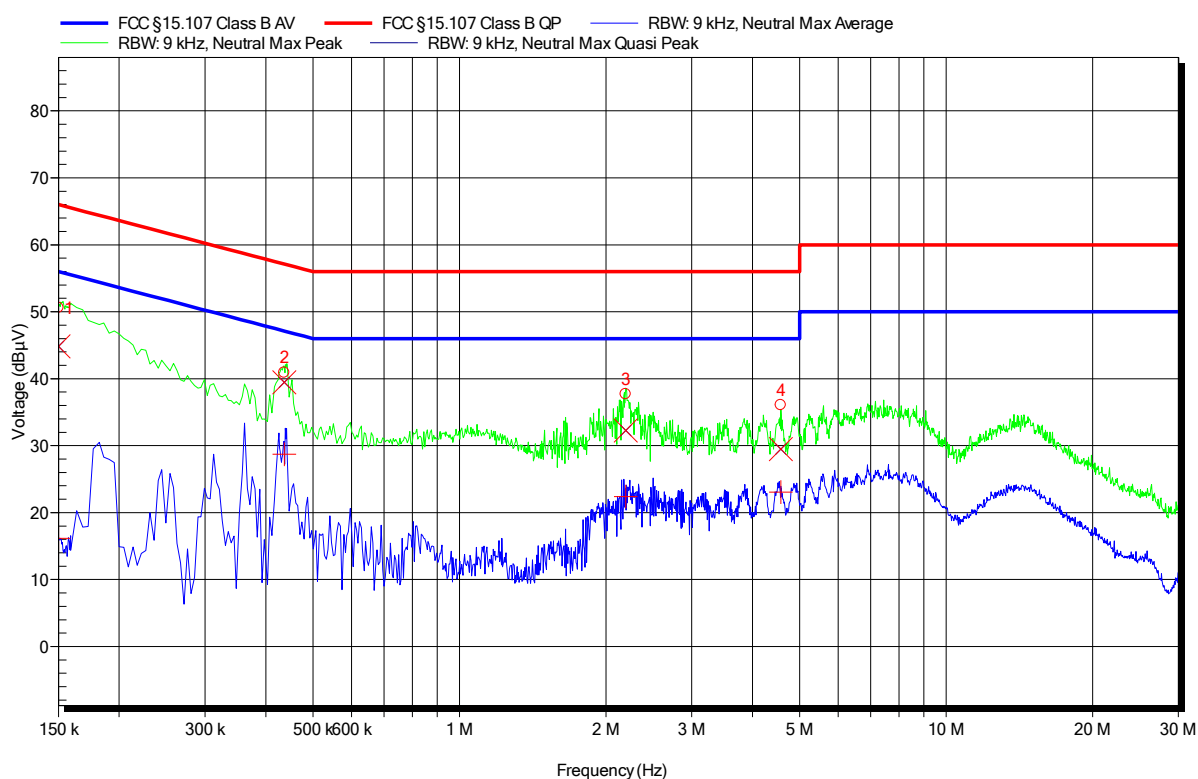

Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status
1	150 kHz	44.82 dBμV	66 dBμV	-21.18 dB	Pass
2	437.1 kHz	39.43 dBμV	57.12 dBμV	-17.68 dB	Pass
3	2.197 MHz	32.26 dBμV	56 dBμV	-23.74 dB	Pass
4	4.574 MHz	29.46 dBμV	56 dBμV	-26.54 dB	Pass

Peak Number	Frequency	Average	Average Limit	Average Difference	Average Status
1	150 kHz	16.14 dBμV	56 dBμV	-39.86 dB	Pass
2	437.1 kHz	28.7 dBμV	47.12 dBμV	-18.42 dB	Pass
3	2.197 MHz	22.38 dBμV	46 dBμV	-23.62 dB	Pass
4	4.574 MHz	23.04 dBμV	46 dBμV	-22.96 dB	Pass