





TEST REPORT

Applicant Name: Address:

Shenzhen Xin Yuan Electronic Technology Co., Ltd. Room 801-803, Yousuowei Building, No.2000 JiaXian Road, Bantian Street, Longgang District, Shenzhen, Guangdong China 2401Y22088E-RF-00A

Report Number: FCC ID: 2401Y22088E-RF-00A 2ASYE-T-MINIE-PAPER

Test Standard (s)

FCC PART 15.247

Sample Description

Product Type:
Model No.:
Multiple Model(s) No.:
Trade Mark:
Date Received:
Issue Date:

Mini E-Paper-S3 Mini E-Paper-S3 N/A LILYGO 2024-10-09 2025-02-12

Test Result:

Pass▲

▲ In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Gala Liu

GaLa Liu RF Engineer

Approved By:

Wan

Nancy Wang RF Supervisor

Note: The information marked[#] is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0. This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government. This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "V".

Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

TR-EM-RF003

Page 1 of 72

Version 4.0

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	3
GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	
OBJECTIVE Test Methodology	
MEASUREMENT UNCERTAINTY	
TEST FACILITY	5
SYSTEM TEST CONFIGURATION	6
SUMMARY OF TEST RESULTS	
TEST EQUIPMENT LIST	
REQUIREMENTS AND TEST PROCEDURES	
AC LINE CONDUCTED EMISSIONS	
UNWANTED EMISSION FREQUENCIES AND RESTRICTED BANDS	
6 DB Emission Bandwidth Peak Output Power Measurement	
100 KHz BANDWIDTH OF FREQUENCY BAND EDGE	
POWER SPECTRAL DENSITY	
DUTY CYCLE	
ANTENNA REQUIREMENT	23
TEST DATA AND RESULTS	24
AC LINE CONDUCTED EMISSIONS	24
UNWANTED EMISSION FREQUENCIES AND RESTRICTED BANDS	27
6DB Emission Bandwidth Maximum Conducted Output Power	
POWER SPECTRAL DENSITY	
100 kHz Bandwidth of Frequency Band Edge	
DUTY CYCLE	
RF EXPOSURE EVALUATION	70
EUT PHOTOGRAPHS	71
TEST SETUP PHOTOGRAPHS	72

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	2401Y22088E-RF-00A	Original Report	2025-02-12

TR-EM-RF003

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Frequency Range	2402~2480MHz
Maximum Conducted Output Peak Power	4.5dBm
Modulation Technique	GFSK
Antenna Specification [#]	0.63dBi (provided by the applicant)
Voltage Range	DC5.0V From Type-c
Sample serial number	2SHS-1 for Conducted and Radiated Emissions Test 2SHS-3 for RF Conducted Test (Assigned by BACL, Shenzhen)
Sample/EUT Status	Good condition
Adapter Information	N/A

Objective

This report is in accordance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209, 15.247 rules.

Test Methodology

All tests and measurements indicated in this document were performed in accordance ANSI C63.10-2013.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Parameter			Uncertainty	
Occupied Channel Bandwidth		andwidth	109.2kHz(k=2, 95% level of confidence)	
RF output	power, co	onducted	0.86dB(k=2, 95% level of confidence)	
AC Power Lines Cond	lucted	9kHz~150 kHz	3.63dB(k=2, 95% level of confidence)	
Emissions		150 kHz ~30MHz	3.66dB(k=2, 95% level of confidence)	
	0.	009MHz~30MHz	3.60dB(k=2, 95% level of confidence)	
	30MHz	z~200MHz (Horizontal)	5.32dB(k=2, 95% level of confidence)	
	30MHz~200MHz (Vertical)		5.43dB(k=2, 95% level of confidence)	
Radiated Emissions	200MHz~1000MHz (Horizontal)		5.77dB(k=2, 95% level of confidence)	
Radiated Emissions	200MH		5.73dB(k=2, 95% level of confidence)	
		1GHz - 6GHz	5.34dB(k=2, 95% level of confidence)	
		6GHz - 18GHz	5.40dB(k=2, 95% level of confidence)	
	18GHz - 40GHz		5.64dB(k=2, 95% level of confidence)	
Temperature		e	±1°C	
I	Humidity		$\pm 1\%$	
Supply voltages		ges	$\pm 0.4\%$	

Measurement Uncertainty

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 715558, the FCC Designation No. : CN5045.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For BLE mode, 40 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

EUT was tested with Channel 0, 19 and 39 from BLE 1M/2M.

EUT Exercise Software

Exercise Software [#]	EspRFTestTool-V3.6-Manual.exe				
Power Level [#]					
Mode	Low Channel Middle Channel High Channel				
BLE 1M	9 9 9				
BLE 2M	9	9	9		

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
DELL	Notebook	Latitude E6410	11429208685
Unknown	Adapter	Unknown	Unknown
Unknown	Receptacle	Unknown	Unknown

External I/O Cable


Cable Description	Length (m)	From Port	То
Un-shielding Detachable USB Cable	0.8	EUT	Notebook
Unshielded Un-Detachable Cable	1.0	Receptacle	LISN

Block Diagram of Test Setup


For Conducted Emissions:

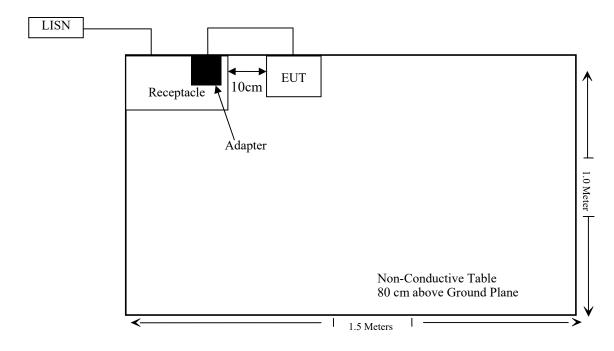

For Radiated Emissions below 1GHz

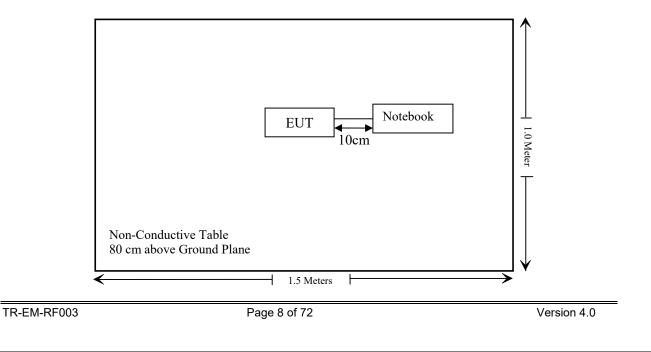

For Radiated Emissions above 1GHz:

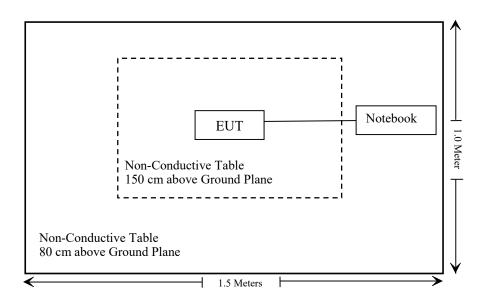

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
C63.10 §11.6	Duty Cycle	/
§15.247 (i), §1.1307 (b) (3) & §2.1091	Maximum Permissible Exposure(MPE)	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date	
Conducted Emission Test						
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2024/01/16	2025/01/15	
Rohde & Schwarz	LISN	ENV216	101613	2024/01/16	2025/01/15	
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2024/05/21	2025/05/20	
Unknown	CE Cable	Unknown	UF A210B-1- 0720-504504	2024/05/21	2025/05/20	
Audix	EMI Test software	E3	19821b(V9)	NCR	NCR	
		Radiated E	mission Test			
JD	Filter Switch Unit	DT7220FSU	DS79906	2024/09/09	2025/09/08	
Rohde & Schwarz	EMI Test Receiver	ESR3	102455	2024/12/04	2025/12/03	
Sonoma instrument	Pre-amplifier	310N	186238	2024/05/21	2025/05/20	
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2023/07/20	2026/07/19	
Unknown	Cable	Chamber Cable 1	F-03-EM236	2024/06/18	2025/06/17	
Unknown	Cable	XH500C	J-10M-A	2024/06/18	2025/06/17	
BACL	Active Loop Antenna	1313-1A	4031911	2024/05/14	2027/05/13	
Audix	EMI Test software	E3	19821b(V9)	NCR	NCR	
Rohde&Schwarz	Spectrum Analyzer	FSV40	101605	2024/03/27	2025/03/26	
COM-POWER	Pre-amplifier	PA-122	181919	2024/06/18	2025/06/17	
Schwarzbeck	Horn Antenna	BBHA9120D(12 01)	1143	2023/07/26	2026/07/25	
Unknown	RF Cable	KMSE	0735	2024/12/04	2025/12/03	
Unknown	RF Cable	UFA147	219661	2024/12/04	2025/12/03	
A.H.System	Pre-amplifier	PAM-1840VH	190	2024/06/18	2025/06/17	
Electro- Mechanics Co	Horn Antenna	3116	9510-2270	2023/09/18	2026/09/17	
UTIFLEX	RF Cable	NO. 13	232308-001	2024/06/18	2025/06/17	
Audix	EMI Test software	E3	191218(V9)	NCR	NCR	

Day Area Car	malianaa Lahar	etariaa Carn	(Chanzhan)
Day Alea Cui	mpliance Labor	atomes corp.	(Shenzhen)

Report No.: 2401Y22088E-RF-00A

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
		RF Cond	ucted Test		
Tonscend	RF control Unit	JS0806-2	19D8060154	2024/08/06	2025/08/05
Rohde & Schwarz	Spectrum Analyzer	FSV40	101473	2024/01/16	2025/01/15
Unknown	10dB Attenuator	Unknown	F-03-EM190	2024/06/27	2025/06/26
ANRITSU	Microwave peak power sensor	MA24418A	12622	2024/05/21	2025/05/20

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).


REQUIREMENTS AND TEST PROCEDURES

AC Line Conducted Emissions

Applicable Standard

FCC§15.207

EUT Setup

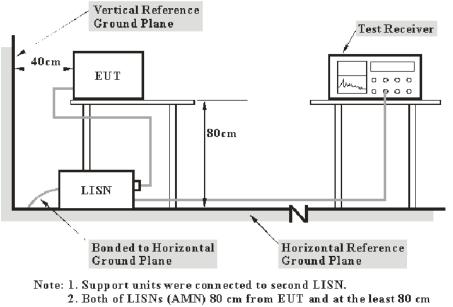

from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W		
150 kHz – 30 MHz	9 kHz		

Bay Area Compliance Laboratories Corp. (Shenzhen)

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Factor & Over Limit Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

Factor = LISN VDF + Cable Loss

The "**Over limit**" column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

Over Limit = Level – Limit Level = Read Level + Factor

Note: The term "cable loss" refers to the combination of a cable and a 10dB transient limiter (attenuator).


Unwanted Emission Frequencies and Restricted Bands

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

EUT Setup

9 kHz-30MHz:

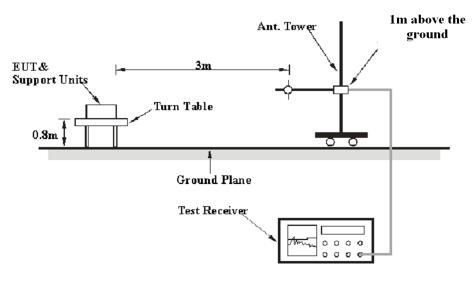


30MHz-1GHz:

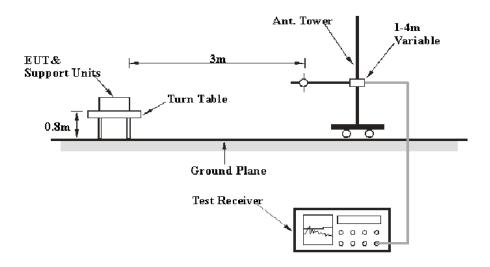

Bay Area Compliance Laboratories Corp. (Shenzhen)

Above 1GHz:

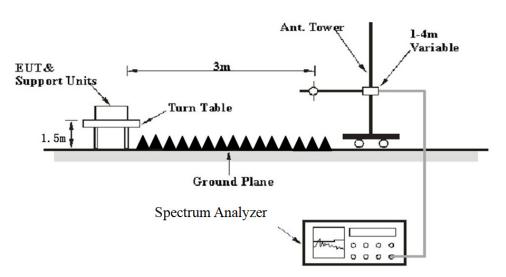

The radiated emission tests were performed in the 3meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.205, FCC 15.209, FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9 kHz-1GHz:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
9 kHz – 150 kHz	/	/	200 Hz	QP
9 KHZ - 130 KHZ	300 Hz	1 kHz	/	РК
150 kHz – 30 MHz	/	/	9 kHz	QP
130 kHz - 30 wHz	10 kHz	30 kHz	/	РК
30 MHz – 1000 MHz	/	/	120 kHz	QP
30 MITZ – 1000 MITZ	100 kHz	300 kHz	/	РК

1-25GHz: Pre-scan

Measurement	Duty cycle	RBW	Video B/W
РК	Any	1MHz	3 MHz
	>98%	1MHz	1 kHz
AV	<98%	1MHz	≥1/Ton, no less than 1kHz

TR-EM-RF003

Bay Area Compliance Laboratories Corp. (Shenzhen)

Final measurement for emission identified during pre-scan

Measurement	Duty cycle	RBW	Video B/W
РК	Any	1MHz	3 MHz
AV	>98%	1MHz	10 Hz
Av	<98%	1MHz	≥1/Ton

Note: Ton is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, average detection modes for frequency bands 9–90 kHz and 110–490 kHz, peak and average detection modes for frequencies above 1 GHz.

For 9 kHz-30MHz, the report shall list the six emissions with the smallest margin relative to the limit, for each of the three antenna orientations (parallel, perpendicular, and ground-parallel) unless the margin is greater than 20 dB.

All emissions under the average limit and under the noise floor have not recorded in the report.

Factor & Over Limit/Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

Factor = Antenna Factor + Cable Loss - Amplifier Gain

The "**Over Limit/Margin**" column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

Over Limit/Margin = Level / Corrected Amplitude – Limit Level / Corrected Amplitude = Read Level + Factor

6 dB Emission Bandwidth

Standard Applicable

According to FCC §15.247(a) (2)

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.


Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.8.1 & Clause 6.9.3

- a. Set RBW = 100 kHz.
- b. Set the VBW $\geq [3 \times RBW]$.
- c. Detector = peak.
- d. Trace mode = max hold.
- e. Sweep = auto couple.
- f. Allow the trace to stabilize.
- g. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. Procedure as below

- a. The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b. The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- c. Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than [10 log (OBW/RBW)] below the reference level.
- d. Step a) through step c) might require iteration to adjust within the specified range.
- e. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f. Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g. If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h. The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).



Peak Output Power Measurement


Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

Test method: ANSI C63.10-2013 clause 11.9.1.3 for peak power method or clause 11.9.2.3.2 for average power method.

- 1. Place the EUT on a bench and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
- 3. Add a correction factor to the display.



Note: A short RF cable with low cable loss connected to the EUT antenna port, which was provided by client or lab, the cable loss was add with offset into test equipment, the total offset consists of attenuator and/or RF cable and/or power splitter loss

100 kHz Bandwidth of Frequency Band Edge

Applicable Standard


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required

Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.11

- 1. Set the RBW =100 kHz.
- 2. Set the VBW \geq 3 × RBW.
- 3. Detector = peak
- 4. Sweep time = auto couple.
- 5. Trace mode=max hold
- 6. All trace to fully stabilize
- 7. Use the peak marker function to determine the maximum amplitude level. Ensure that amplitude of all unwanted emissions outside of the authorized frequency band(excluding restricted frequency bands) is attenuated by at least the minimum requirement specified in 11.11. Report the three highest emissions relative to the limit.



Power Spectral Density

Applicable Standard


According to FCC §15.247(e):

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.10.2

- 1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
- 2. Set analyzer center frequency to DTS channel center frequency
- 3. Set the span to 1.5 times the DTS bandwidth.
- 4. Set the RBW to: $3kHz \leq RBW \leq 100 kHz$.
- 5. Set the VBW \geq 3 × RBW.
- 6. Detector = peak.
- 7. Sweep time = auto couple.
- 8. Trace mode = max hold.
- 9. Allow trace to fully stabilize.
- 10. Use the peak marker function to determine the maximum amplitude level within the RBW.
- 11. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.



Note: A short RF cable with low cable loss connected to the EUT antenna port, which was provided by client or lab, the cable loss was add with offset into test equipment, the total offset consists of attenuator and/or RF cable loss

Duty Cycle

Test Procedure

According to ANSI C63.10-2013 Section 11.6


The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

1) Set the center frequency of the instrument to the center frequency of the transmission.

2) Set $RBW \ge OBW$ if possible; otherwise, set RBW to the largest available value.

3) Set VBW \geq RBW. Set detector = peak or average.

4) The zero-span measurement method shall not be used unless both RBW and VBW are > 50/T and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \le 16.7 \ \mu s$.)



ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

Antenna Connector Construction

The EUT has one internal antenna arrangement, which was permanently attached, the antenna $gain^{\#}$ is 0.63dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliant

TEST DATA AND RESULTS

AC Line Conducted Emissions

Environmental Conditions


Temperature (°C)	27	Relative Humidity (%)	47
ATM Pressure (kPa)	101	Test engineer	Macy Shi
Test date	2024.12.03		
EUT operation mode	Transmitting (Maximum Output power mode, BLE1MHz Low Channel)		

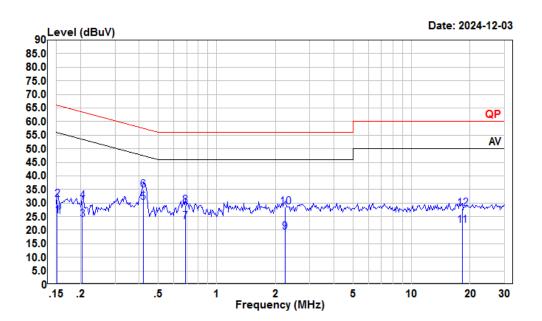

AC 120V 60 Hz, Line

Condition:	Line				
Project :	2401Y22088E-RF				
tester :	Macy.shi				
Note :	Transmitting				
Detector :	RBW:9KHz VBW:Auto SWT:Auto)			
tester : Note :	Macy.shi Transmitting	,			

	Freq	Read Level	Loval	LISN Factor	Cable Loss	Limit Line	Over	Remark
	Freq	Level	Level	Factor	LUSS	LTHE	LIMIC	ReliarK
-	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.152	4.18	25.21	10.90	10.13	55.91	-30.70	Average
2	0.152	10.32	31.35	10.90	10.13	65.91	-34.56	QP
3	0.204	2.98	23.86	10.79	10.09	53.45	-29.59	Average
4	0.204	9.87	30.75	10.79	10.09	63.45	-32.70	QP
5	0.419	9.61	30.28	10.56	10.11	47.46	-17.18	Average
6	0.419	14.12	34.79	10.56	10.11	57.46	-22.67	QP
7	0.690	2.55	23.20	10.50	10.15	46.00	-22.80	Average
8	0.690	8.41	29.06	10.50	10.15	56.00	-26.94	QP
9	2.237	-1.32	19.41	10.55	10.18	46.00	-26.59	Average
10	2.237	7.89	28.62	10.55	10.18	56.00	-27.38	QP
11	18.232	0.75	21.74	10.80	10.19	50.00	-28.26	Average
12	18.232	7.01	28.00	10.80	10.19	60.00	-32.00	QP

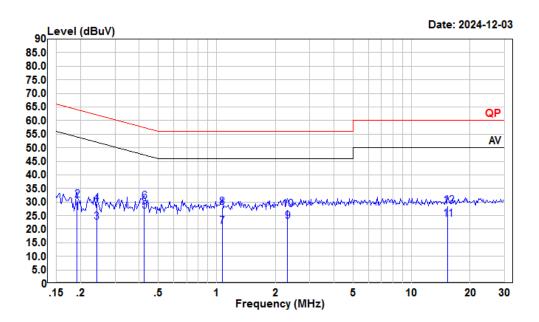

AC 120V 60 Hz, Neutral

Condition	1 :	Neutral		
Project	:	2401Y2208	8E-RF	
tester	:	Macy.shi		
Note	:	Transmitt	ing	
Detector	:	RBW:9KHz	VBW:Auto	SWT:Auto


		Read		LISN	Cable	Limit	0ver	
	Freq	Level	Level	Factor	Loss	Line	Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.191	5.59	26.11	10.43	10.09	53.98	-27.87	Average
2	0.191	10.26	30.78	10.43	10.09	63.98	-33.20	QP
3	0.242	1.92	22.46	10.46	10.08	52.04	-29.58	Average
4	0.242	8.92	29.46	10.46	10.08	62.04	-32.58	QP
5	0.424	6.03	26.79	10.65	10.11	47.37	-20.58	Average
6	0.424	9.35	30.11	10.65	10.11	57.37	-27.26	QP
7	1.065	-0.09	20.88	10.85	10.12	46.00	-25.12	Average
8	1.065	7.08	28.05	10.85	10.12	56.00	-27.95	QP
9	2.309	2.21	22.79	10.40	10.18	46.00	-23.21	Average
10	2.309	6.74	27.32	10.40	10.18	56.00	-28.68	QP
11	15.388	2.72	23.73	10.79	10.22	50.00	-26.27	Average
12	15.388	7.63	28.64	10.79	10.22	60.00	-31.36	QP

Unwanted Emission Frequencies and Restricted Bands

Environmental Conditions

Temperature (°C)	22-26	Relative Humidity (%)	40-50	
ATM Pressure (kPa):	101.0-101.2	Test engineer:	Carl Zhu & Dylan Yang & Wing K Ji	
Test date:	2024.12.05-2025.02.12			
EUT operation mode:		0 1 1	ower mode, BLE1MHz Low	
Note:	Above IGHz: Transmitting 1. For the radiated spurious emission below 30MHz, only the worst case (parallel) was recorded. 2. For the radiated spurious emission below 30MHz, When the test result of peak was less than the limit of QP/Average more than 6dB, just peak value were recorded. 3.After pre-scan in the X, Y and Z axes of orientation, the worst case Y-axis of orientation were recorded.			


Below 1GHz:

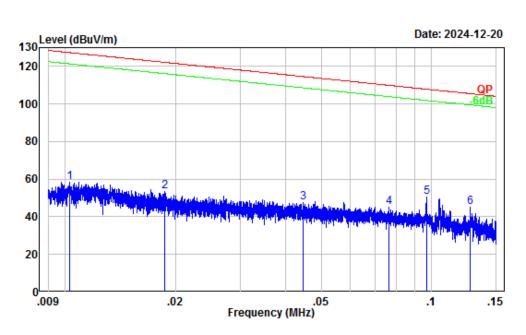

9kHz-150kHz

Site :	Chamber A
Condition :	Зm
Project Number :	2401Y22088E-RF
Test Mode :	Transmiting
Detector Peak RBW:	0.3KHz VBW:1KHz
Tester :	Carl Zhu


	Freq	Factor		Level		Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.01	32.24	26.09	58.33	127.33	-69.00	Peak
2	0.02	30.65	22.91	53.56	122.17	-68.61	Peak
3	0.04	26.96	20.54	47.50	114.61	-67.11	Peak
4	0.08	23.76	21.33	45.09	109.94	-64.85	Peak
5	0.10	22.22	28.27	50.49	107.88	-57.39	Peak
6	0.13	20.39	24.77	45.16	105.50	-60.34	Peak

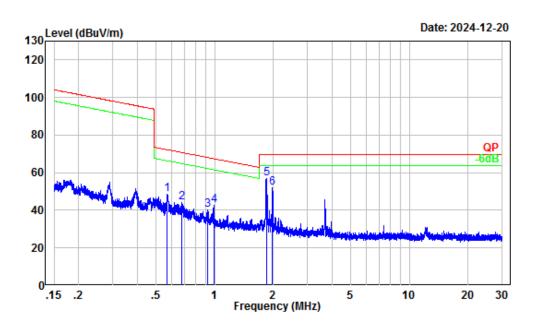

150kHz-30MHz

Chamber A
3m
2401Y22088E-RF
Transmiting
10KHz VBW:30KHz
Carl Zhu


	_					Over	
	Freq	Factor	Level	Level	Line	Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.57	5.51	42.83	48.34	72.43	-24.09	Peak
2	0.68	4.21	40.07	44.28	70.92	-26.64	Peak
3	0.92	1.79	38.39	40.18	68.20	-28.02	Peak
4	0.99	1.25	41.22	42.47	67.53	-25.06	Peak
5	1.84	-1.16	58.20	57.04	69.54	-12.50	Peak
6	1.98	-1.56	53.36	51.80	69.54	-17.74	Peak

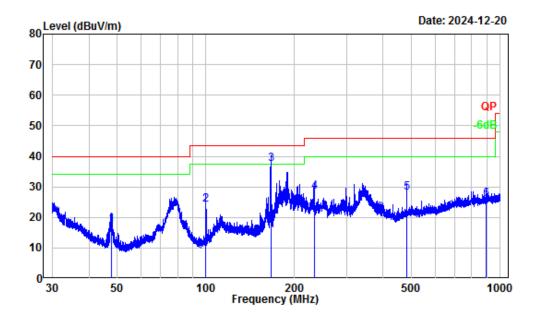

30MHz-1GHz_Horizontal

Site	:	Chamber A
Condition	:	3m Horizontal
Project Number	:	2401Y22088E-RF
Test Mode	:	Transmiting
Detector QP RBW	1:	120KHz
Tester	:	Carl Zhu

	Freq	Factor		Level			Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	47.62	-17.20	34.74	17.54	40.00	-22.46	QP
2	99.92	-15.91	40.05	24.14	43.50	-19.36	QP
3	166.00	-12.91	50.29	37.38	43.50	-6.12	QP
4	233.25	-13.66	42.13	28.47	46.00	-17.53	QP
5	480.11	-6.34	34.56	28.22	46.00	-17.78	QP
6	898.57	-1.31	27.39	26.08	46.00	-19.92	QP

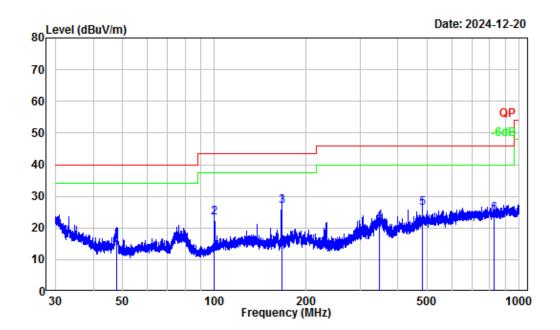

30MHz-1GHz_Vertical

Site	:	Chamber A
Condition	:	3m Vertical
Project Number	:	2401Y22088E-RF
Test Mode	:	Transmiting
Detector QP RBW	:	120KHz
Tester	:	Carl Zhu

	Freq	Factor			Limit Line		Remark
-	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	47.76	-17.26	33.44	16.18	40.00	-23.82	QP
2	99.92	-15.91	39.25	23.34	43.50	-20.16	QP
3	166.00	-12.91	39.88	26.97	43.50	-16.53	QP
4		-10.20	32.09	21.89	46.00	-24.11	QP
5	480.11	-6.34	32.66	26.32	46.00	-19.68	QP
6		-1.93	26.40	24.47	46.00	-21.53	QP

Report No.: 2401Y22088E-RF-00A

Above 1GHz:

F	Reco	eiver	D	F	Corrected	T : '4		
Frequency (MHz)	Reading (dBµV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)	
		11	BL	E 1M				
			Low C	Channel				
4804	49.54	РК	Н	2.42	51.96	74	-22.04	
4804	40.14	AV	Н	2.42	42.56	54	-11.44	
4804	47.75	PK	V	2.42	50.17	74	-23.83	
4804	36.48	AV	V	2.42	38.9	54	-15.1	
			Middle	Channel				
4880	49.39	РК	Н	2.58	51.97	74	-22.03	
4880	39.75	AV	Н	2.58	42.33	54	-11.67	
4880	47.21	РК	V	2.58	49.79	74	-24.21	
4880	35.77	AV	V	2.58	38.35	54	-15.65	
			High (Channel				
4960	47.12	РК	Н	2.69	49.81	74	-24.19	
4960	33.68	AV	Н	2.69	36.37	54	-17.63	
4960	46.04	РК	V	2.69	48.73	74	-25.27	
4960	32.45	AV	V	2.69	35.14	54	-18.86	
			BL	E 2M				
			Low C	Channel				
4804	49.26	РК	Н	2.42	51.68	74	-22.32	
4804	41.26	AV	Н	2.42	43.68	54	-10.32	
4804	51.32	РК	V	2.42	53.74	74	-20.26	
4804	41.58	AV	V	2.42	44	54	-10	
			Middle	Channel				
4880	49.03	РК	Н	2.58	51.61	74	-22.39	
4880	40.31	AV	Н	2.58	42.89	54	-11.11	
4880	50.97	РК	V	2.58	53.55	74	-20.45	
4880	41.2	AV	V	2.58	43.78	54	-10.22	
		·1	High (Channel	·			
4960	46.66	РК	Н	2.69	49.35	74	-24.65	
4960	32.82	AV	Н	2.69	35.51	54	-18.49	
4960	46.98	РК	V	2.69	49.67	74	-24.33	
4960	33.55	AV	V	2.69	36.24	54	-17.76	

Note:

 $Corrected \ Factor = Antenna \ factor \ (RX) + Cable \ Loss - Amplifier \ Factor$


Corrected Amplitude = Corrected Factor + Reading

Margin = Corrected. Amplitude - Limit

The other spurious emission which is in the noise floor level was not recorded.

Bay Area Compliance Laboratories Corp. (Shenzhen)

Test plots

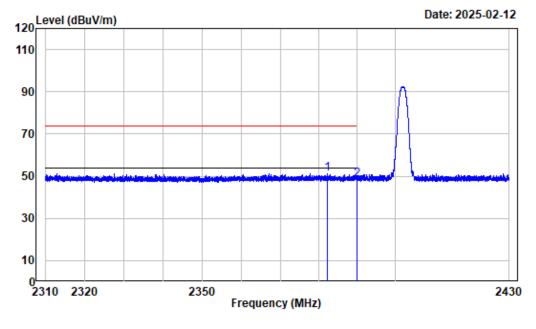


Left Band edge_Horizontal_Peak_BLE 1M


Condition : Horizontal Project No. : 2401Y22088E-RF Tester : Wing K Ji Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak Note : BLE_1M_2402

	Freq	Factor			Limit Line		Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2382.234	-10.97	62.22	51.25	74.00	-22.75	Peak
2	2390.000	-10.98	59.38	48.40	74.00	-25.60	Peak

Bay Area Compliance Laboratories Corp. (Shenzhen)

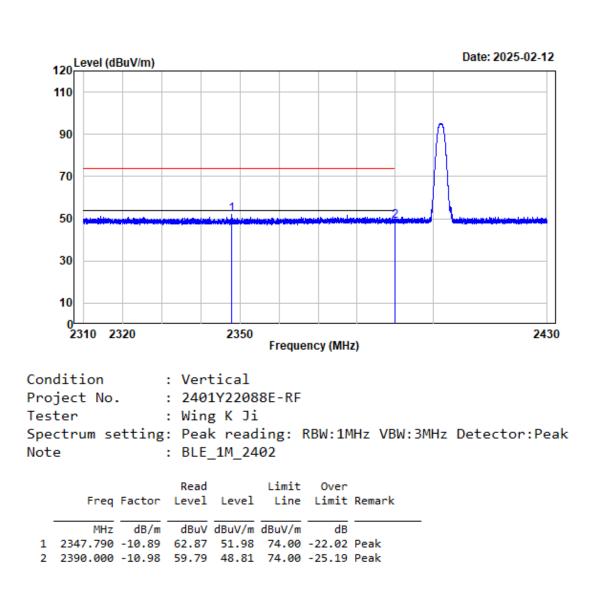


Left Band edge_Vertical_Peak_BLE 1M

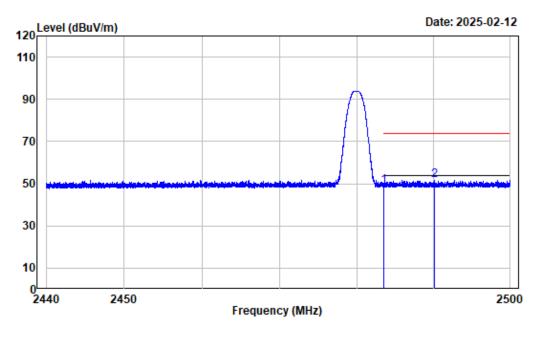

Right Band edge_Horizontal_Peak_BLE 1M

Condition	:	Horizontal			
Project No.	:	2401Y22088E-RF			
Tester	:	Wing K Ji			
Spectrum setting	:	Peak reading: R	RBW:1MHz	VBW:3MHz	Detector:Peak
Note	:	BLE_1M_2480			


	Freq	Factor		Level		Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.97	60.01	49.04	74.00	-24.96	Peak
2	2490.106	-10.98	62,61	51.63	74.00	-22.37	Peak

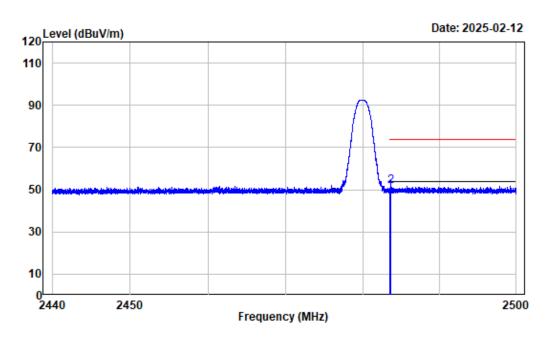

Right Band edge_Vertical_Peak_BLE 1M

Condition	:	Vertical
Project No.	:	2401Y22088E-RF
Tester	:	Wing K Ji
Spectrum setting	::	Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note	:	BLE_1M_2480


	Freq	Factor	Read Level			Over Limit	Remark	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB		
1	2483.500	-10.97	60.16	49.19	74.00	-24.81	Peak	
2	2483 588	-10 97	62 79	51 82	74 00	-22 18	Peak	

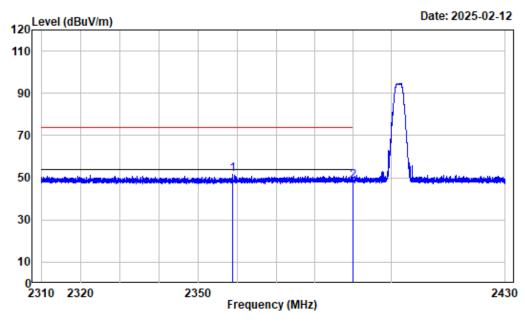

Left Band edge_Horizontal_Peak_BLE 2M

Condition	:	Horizontal
Project No.	:	2401Y22088E-RF
Tester	:	Wing K Ji
Spectrum setting	g :	Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note	:	BLE_2M_2402


	Freq	Factor		Level			Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2358.831	-10.91	62.48	51.57	74.00	-22.43	Peak
2	2390.000	-10.98	59.50	48.52	74.00	-25.48	Peak

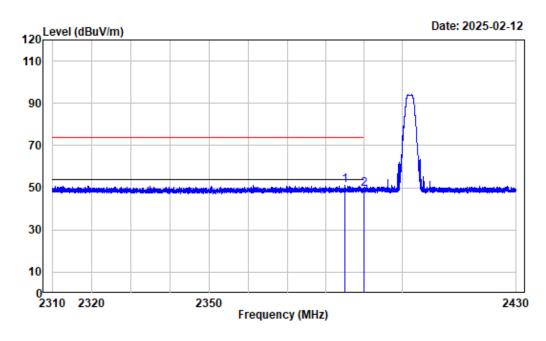

Left Band edge_Vertical_Peak_BLE 2M

Condition	:	Vertical
Project No.	:	2401Y22088E-RF
Tester	:	Wing K Ji
Spectrum setting	::	Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note	:	BLE_2M_2402

	Freq	Factor			Limit Line		Remark	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB		
1	2385.099	-10.97	62.24	51.27	74.00	-22.73	Peak	
2	2390.000	-10.98	60.12	49.14	74.00	-24.86	Peak	

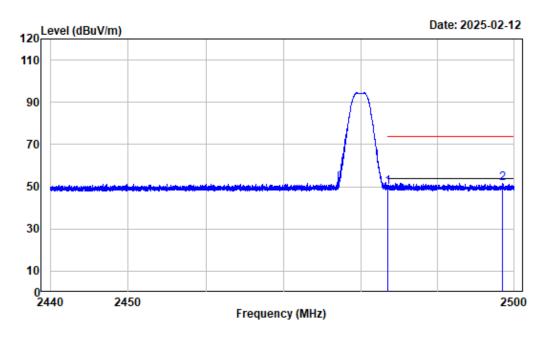


Right Band edge_Horizontal_Peak_BLE 2M

Condition	:	Horizontal
Project No.	:	2401Y22088E-RF
Tester	:	Wing K Ji
Spectrum setting	;:	Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note	:	BLE_2M_2480

	Freq	Factor	Read Level		Limit Line		Remark	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB		
1	2483.498	-10.97	60.90	49.93	74.00	-24.07	Peak	
-								

2 2498.492 -11.00 62.56 51.56 74.00 -22.44 Peak	2	2498.492	-11.00	62.56	51.56	74.00	-22.44	Peak
---	---	----------	--------	-------	-------	-------	--------	------

TR-EM-RF003

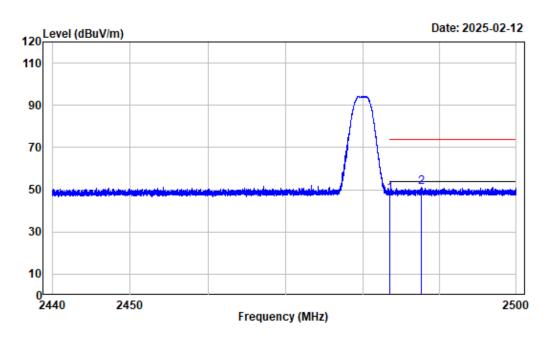


Right Band edge_Vertical_Peak_BLE 2M

Condition	:	Vertical
Project No.	:	2401Y22088E-RF
Tester	:	Wing K Ji
Spectrum setting	g :	Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note	:	BLE_2M_2480


	Freq	Factor	Read Level		Limit Line		Remark	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB		
1	2483.500	-10.97	58.80	47.83	74.00	-26.17	Peak	
~	0407 646		CO. 04		74 00	~~ ~~		

2 2487.616 -10.98 62.21 51.23 74.00 -22.77 Peak


Listed with the worst harmonic margin test plot

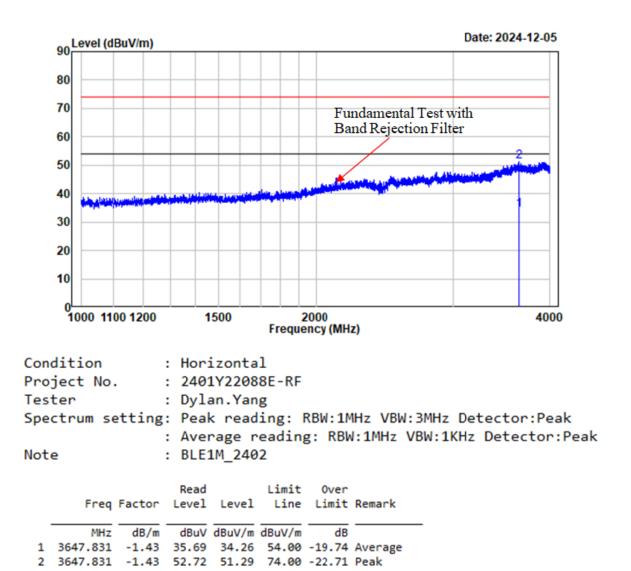

1-4GHz Horizontal BLE 1M

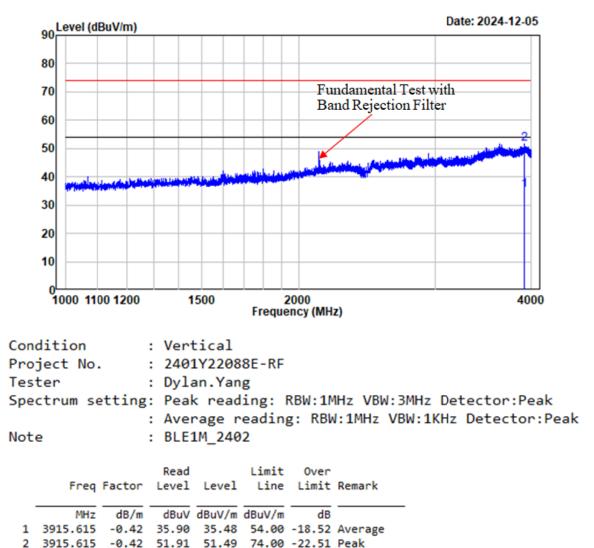


1-4GHz_Vertical_BLE 1M

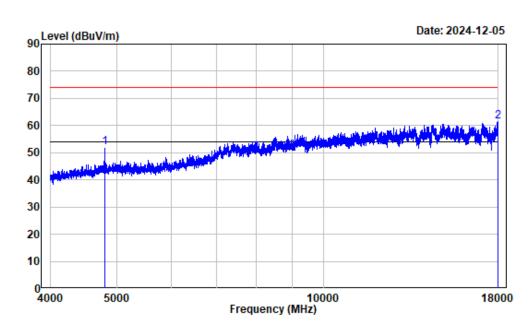

4-18GHz_Horizonta_Peak_BLE 1M

Condition	:	Horizontal
Project No.	:	2401Y22088E-RF
Tester	:	Dylan.Yang
Spectrum setting	:	Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note	:	BLE1M_2402


	Freq	Factor			Limit Line		Remark	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB		
1	4804.000	2.42	49.54	51.96	74.00	-22.04	Peak	
2	17989.500	24.55	36.81	61.36	74.00	-12.64	Peak	

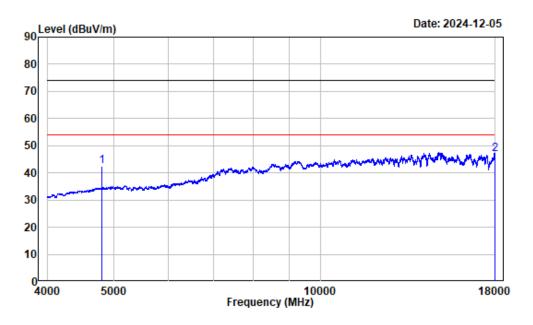

4-18GHz_Horizontal_Average_BLE 1M

Condition	:	Horizontal			
Project No.	:	2401Y22088E-RF			
Tester	:	Dylan.Yang			
Spectrum setting	:	Average reading:	RBW:1MHz	VBW:1KHz	Detector:Peak
Note	:	BLE1M_2402			


	Freq	Factor			Limit Line		Remark	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB		
1	4804.000	2.42	40.14	42.56	54.00	-11.44	Average	
2	17998.250	24.61	22.22	46.83	54.00	-7.17	Average	

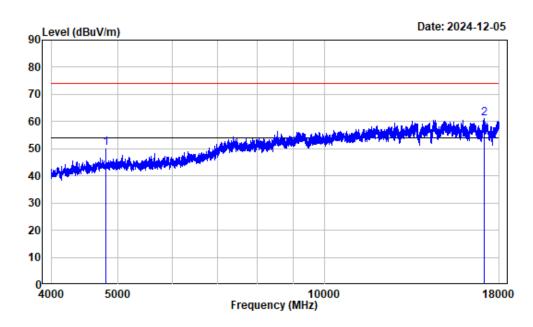

4-18GHz_Vertical_Peak_BLE 1M

Condition	:	Vertical
Project No.	:	2401Y22088E-RF
Tester	:	Dylan.Yang
Spectrum setting	::	Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note	:	BLE1M_2402

Freq	Factor			Limit Line		Remark	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB		
1 4804.000	2.42	47.75	50.17	74.00	-23.83	Peak	
2 17095.140	18.00	42.97	60.97	74.00	-13.03	Peak	

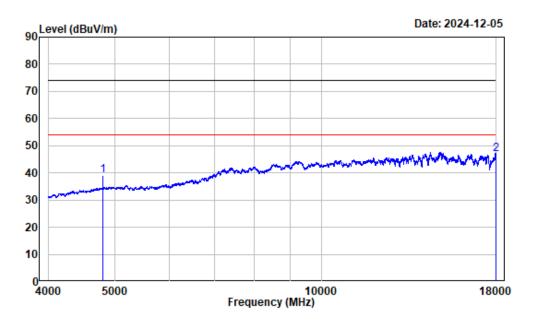


4-18GHz_Vertical_Average_BLE 1M


Condition	:	Vertical			
Project No.	:	2401Y22088E-RF			
Tester	:	Dylan.Yang			
Spectrum setting	:	Average reading:	RBW:1MHz	VBW:1KHz	Detector:Peak
Note	:	BLE1M_2402			


	Freq	Factor			Limit Line		Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4804.000	2.42	36.48	38.90	54.00	-15.10	Average
2	17989.500	24.55	22.38	46.93	54.00	-7.07	Average

18-25GHz_Horizontal_BLE 1M

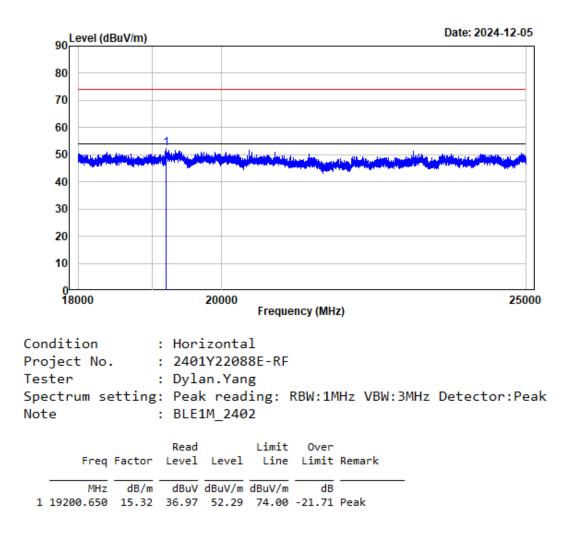


18-25GHz_Vertical_BLE 1M

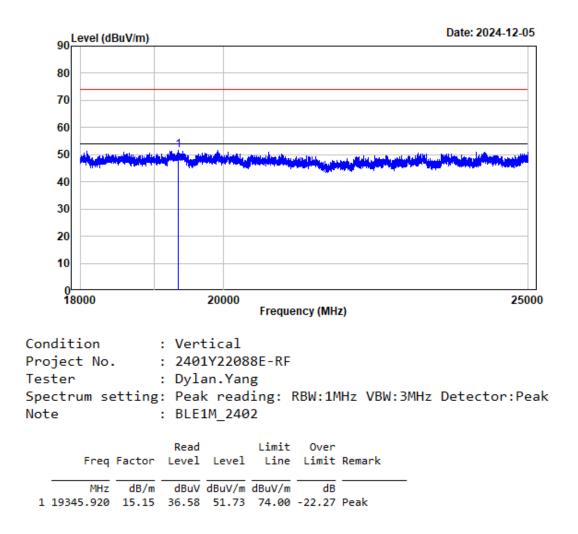

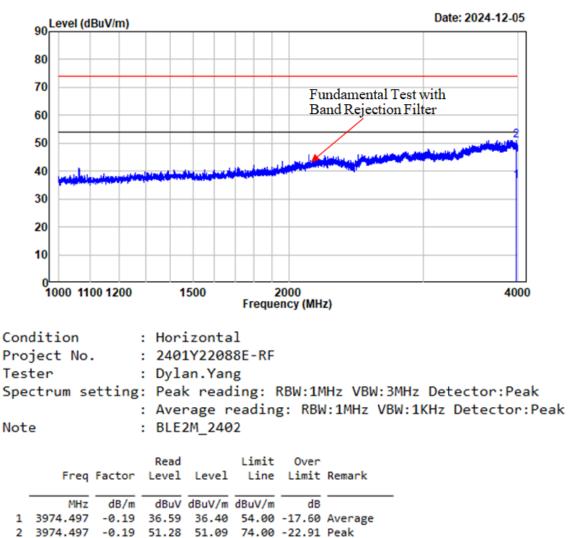


1-4GHz_Horizontal_BLE 2M

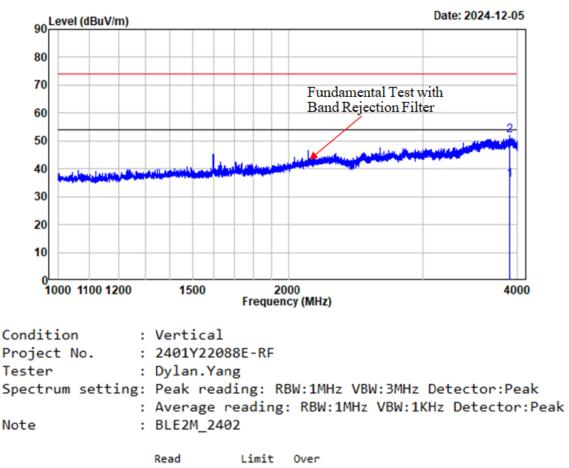

1-4GHz_Vertical_BLE 2M


	Freq	Factor			Limit Line		Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3909.614	-0.46	36.47	36.01	54.00	-17.99	Average
2	3909.614	-0.46	52.58	52.12	74.00	-21.88	Peak

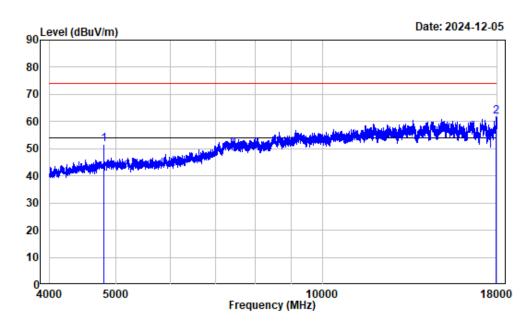

4-18GHz_Horizonta_Peak_BLE 2M

Condition :	Horizontal
Project No. :	2401Y22088E-RF
Tester :	Dylan.Yang
Spectrum setting:	Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note :	BLE2M_2402


Freq	Factor			Limit Line		Remark	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB		
1 4804.000	2.42	49.26	51.68	74.00	-22.32	Peak	
2 17940.490	24.19	37.49	61.68	74.00	-12.32	Peak	

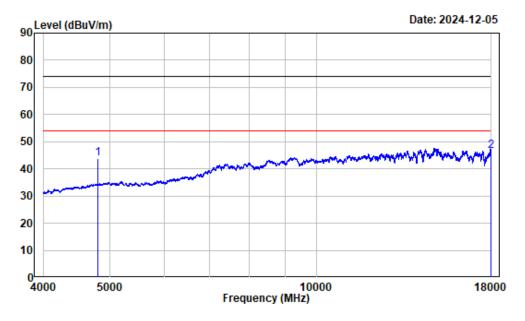

4-18GHz_Horizontal_Average_BLE 2M

Condition	:	Horizontal			
Project No.	:	2401Y22088E-RF			
Tester	:	Dylan.Yang			
Spectrum setting	:	Average reading:	RBW:1MHz	VBW:1KHz	Detector:Peak
Note	:	BLE2M_2402			


	Freq	Factor			Limit Line		Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4804.000	2.42	41.26	43.68	54.00	-10.32	Average
2	17993.000	24.57	22.09	46.66	54.00	-7.34	Average

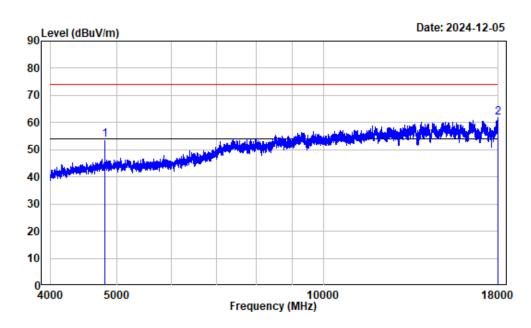

4-18GHz_Vertical_Peak_BLE 2M

Condition	:	Vertical
Project No.	:	2401Y22088E-RF
Tester	:	Dylan.Yang
Spectrum setting	::	Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note	:	BLE2M_2402

Freq	Factor	Read Level		Limit Line		Remark	
MHz 1 4804.000 2 17965.000		51.32	53.74	74.00	-20.26		-

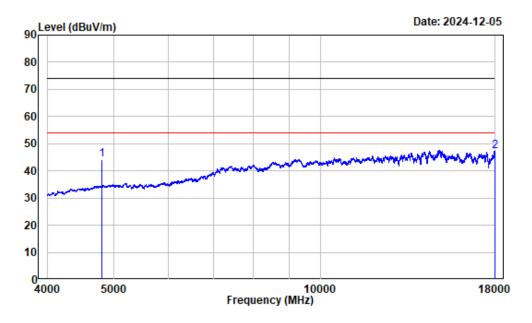


4-18GHz_Vertical_Average_BLE 2M


Condition	:	Vertical			
Project No.	:	2401Y22088E-RF			
Tester	:	Dylan.Yang			
Spectrum setting	;:	Average reading:	RBW:1MHz	VBW:1KHz	Detector:Peak
Note	:	BLE2M_2402			

	Freq	Factor			Limit Line		Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4804.000	2.42	41.58	44.00	54.00	-10.00	Average
2	18000.000	24.62	22.64	47.26	54.00	-6.74	Average

18-25GHz_Horizontal_BLE 2M

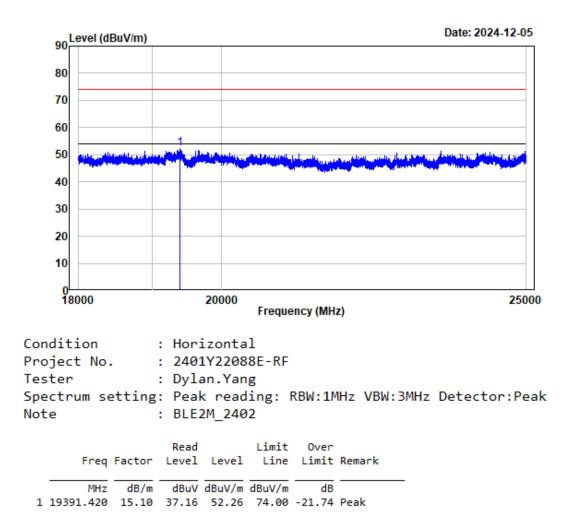

18-25GHz_Vertical_BLE 2M

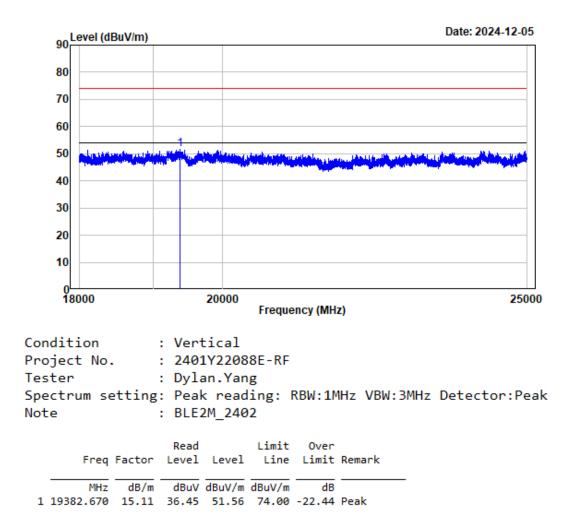

Report No.: 2401Y22088E-RF-00A

6dB Emission Bandwidth

Test Information:

Sample No.:	2SHS-3	Test Date:	2024/11/25
Test Site:	RF	Test Mode:	Transmitting
Tester:	Kungfumaster Liang	Test Result:	Pass

Environmental Conditions:

	Temperature: (°C):	24.7-26.8	Relative Humidity: (%)	50-54	ATM Pressure: (kPa)	101	
--	-----------------------	-----------	------------------------------	-------	------------------------	-----	--

Test Data:


BLE 1M

Channel	Result (MHz)	Limit (MHz)	Verdict
Low Channel	0.673	≥0.5	Pass
Middle Channel	0.677	≥0.5	Pass
High Channel	0.679	≥0.5	Pass


BLE 2M

Channel	Result (MHz)	Limit (MHz)	Verdict	
Low Channel	1.353	≥0.5	Pass	
Middle Channel	1.353	≥0.5	Pass	
High Channel	1.349	≥0.5	Pass	


BLE 1M

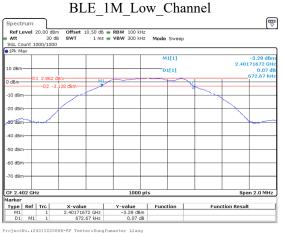


te: 25.NOV.2024 20:15:51

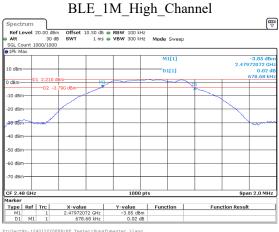


ProjectNo.:2401Y22088E-RF Tester:Kungfumaster Liang Date: 25.NOV.2024 20:08:39



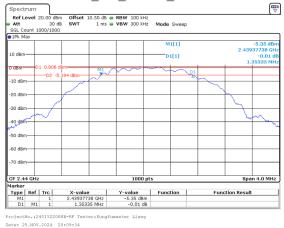



Report No.: 2401Y22088E-RF-00A

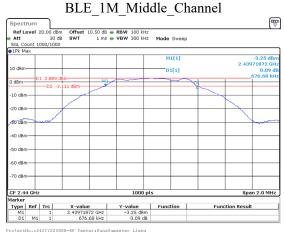

ProjectNo.:2401Y22088E-RF Tester:Kungfum Date: 25.NOV.2024 20:08:14


BLE 2M



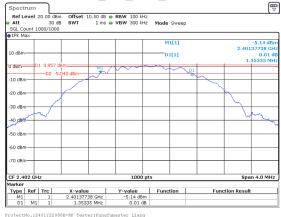

Date: 25.NOV.2024 20:09:08

BLE 2M High Channel

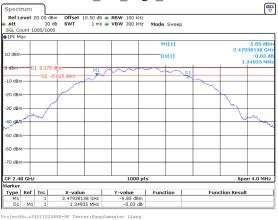

Date: 25.NOV.2024 20:10:03

TR-EM-RF003

Maximum Conducted Output Power

Test Information:

Sample No.:	2SHS-3	Test Date:	2024/11/25
Test Site:	RF	Test Mode:	Transmitting
Tester:	Kungfumaster Liang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C): 24.7-26.8	Relative Humidity: (%)	50-54	ATM Pressure: (kPa)	101
--	------------------------------	-------	------------------------	-----

Test Data:

BLE 1M

Channel	Result (dBm)	Limit (dBm)	Verdict
Low Channel	4.50	30.00	Pass
Middle Channel	4.40	30.00	Pass
High Channel	3.72	30.00	Pass

BLE 2M

Channel	Result (dBm)	Limit (dBm)	Verdict
Low Channel	4.23	30.00	Pass
Middle Channel	4.07	30.00	Pass
High Channel	3.35	30.00	Pass

Report No.: 2401Y22088E-RF-00A

Power Spectral Density

Test Information:

Sample No.:	2SHS-3	Test Date:	2024/11/25
Test Site:	RF	Test Mode:	Transmitting
Tester:	Kungfumaster Liang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C):	24.7-26.8	Relative Humidity: (%)	50-54	ATM Pressure: (kPa)	101
-----------------------	-----------	------------------------------	-------	------------------------	-----

Test Data:


BLE 1M

Channel	Result (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
Low Channel	-13.18	8	Pass
Middle Channel	-12.75	8	Pass
High Channel	-13.09	8	Pass


BLE 2M

Channel	Result (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
Low Channel	-18.12	8	Pass
Middle Channel	-17.54	8	Pass
High Channel	-18.15	8	Pass

BLE 1M

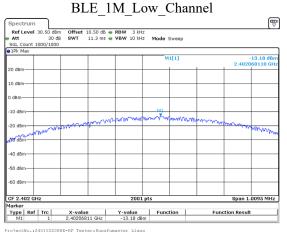


ProjectNo.:2401Y22088E-RF Test Date: 25.NOV.2024 18:53:29

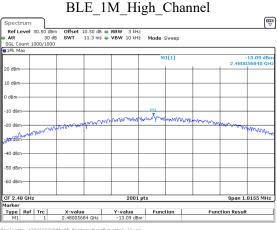


ProjectNo.:2401Y22088E-RF Tester:Kungfumaster Liang Date: 25.NOV.2024 18:55:51




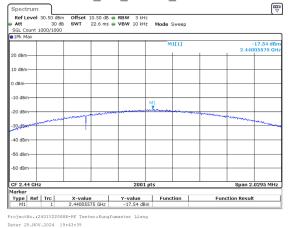

Report No.: 2401Y22088E-RF-00A

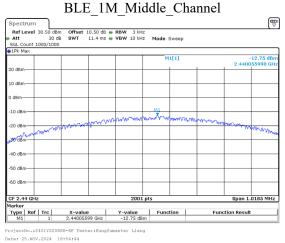


BLE 2M

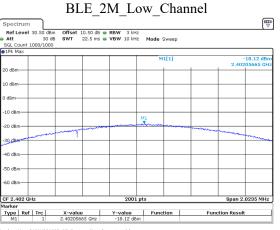

ProjectNo.:2401Y22088E-RF Tester:Kungfumaster Liang Date: 25.NOV.2024 19:42:03

BLE 2M High Channel

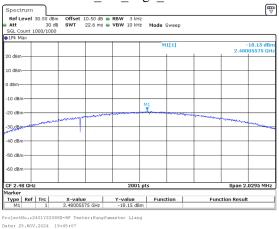

TR-EM-RF003

100 kHz Bandwidth of Frequency Band Edge

Test Information:


Sample No.:	2SHS-3	Test Date:	2024/11/25
Test Site:	RF	Test Mode:	Transmitting
Tester:	Kungfumaster Liang	Test Result:	Pass

Environmental Conditions:

	Temperature: (°C):	24.7-26.8	Relative Humidity: (%)	50-54	ATM Pressure: (kPa)	101	
--	-----------------------	-----------	------------------------------	-------	------------------------	-----	--


Test Data:

BLE 1M

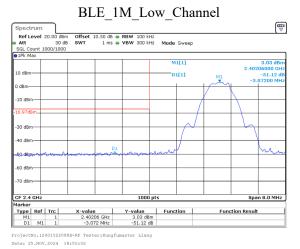



BLE 2M

BLE 2M Low Channel

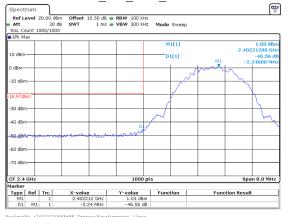

ProjectNo.:2401Y22088E-RF Tester:Kungfumaster Liang Date: 25.NOV.2024 18:51:21

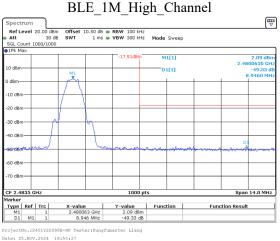

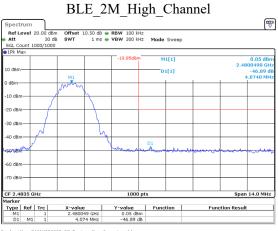

ProjectNo.:2401Y22088E-RF Te Date: 25.NOV.2024 18:52:02 aster Lianç Bay Area Compliance Laboratories Corp. (Shenzhen)

Report No.: 2401Y22088E-RF-00A

Duty Cycle

Test Information:

Sample No.:	2SHS-3	Test Date:	2024/11/25~2024/11/26
Test Site:	RF	Test Mode:	Transmitting
Tester:	Kungfumaster Liang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C):	24.7-26.8	Relative Humidity: (%)	50-54	ATM Pressure: (kPa)	101
-----------------------	-----------	------------------------------	-------	------------------------	-----

Test Data:

BLE 1M

Channel	Ton (ms)	Ton+Toff (ms)	Duty Cycle (%)	Duty Cycle Factor(dB)	1/Ton (Hz)	VBW Setting (kHz)
Middle Channel	100	100	100	/	/	0.010

BLE 2M

Channel	Ton (ms)	Ton+Toff (ms)	Duty Cycle (%)	Duty Cycle Factor(dB)	1/Ton (Hz)	VBW Setting (kHz)
Middle Channel	100	100	100	/	/	0.010

BLE 1M

BLE_1M_Middle_Channel

	RBW 10 MHz			
lB 🖶 SWT 🛛 100 ms	VBW 10 MHz			
		M1[1]		2.05 dBr 71.10711 m
			M1	
	10000 pt	s		10.0 ms/
X-value	Y-value	Function	Fund	tion Result
	X-volue 71.071 ms	X-value Y-value	X-value Y-value Function	X-value Y-value Function Function

ProjectNo.:2401Y22088E-RF Tester:Kungfumaster Liang Date: 26.NOV.2024 22:07:47

Report No.: 2401Y22088E-RF-00A

BLE 2M

BLE_2M_Middle_Channel Spectrum Ref Level 20.00 dBm Offset 10.50 dB • RBW 10 MHz Att 30 dB • SWT 100 ms • VBW 10 MHz SGL Count 1/1 M1[1] 4.47 dBi 47.03470 m LO dBm-M1 dBm--10 dBm--20 dBm--30 dBm-40 dBm 50 dBri 60 dBm -70 dBm CF 2.44 GHz 10000 pts 10.0 ms/ Type Ref Trc M1 1 X-value Y-value Function 47.0347 ms 4.47 dBm Function Result

ProjectNo.:2401Y22088E-RF Tester:Kungfumaster Liang Date: 25.NOV.2024 20:04:25

TR-EM-RF003

Bay Area Compliance Laboratories Corp. (Shenzhen)

RF EXPOSURE EVALUATION

MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247 (i) and subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

According to KDB 447498 D04 Interim General RF Exposure Guidance

MPE-Based Exemption:

General frequency and separation-distance dependent MPE-based effective radiated power(ERP) thresholds are in Table B.1 [Table 1 of § 1.1307(b)(3)(i)(C)] to support an exemption from further evaluation from 300 kHz through 100 GHz.

Table 1 to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	1,920 R ² .
1.34-30	3,450 R ² /f ² .
30-300	3.83 R ² .
300-1,500	0.0128 R ² f.
1,500-100,000	19.2R ² .

Ris the minimum separation distance in meters f = frequency in MHz

Result

Mode	Frequency (MHz)	Tune up conducted power#Antenna Gain#ERP		RP	Evaluation Distance	ERP Limit (mW)		
		(dBm)	(dBi)	(dBd)	(dBm)	(mW)	(m)	
BLE	2402-2480	5	0.63	-1.52	3.48	2.23	0.2	768

Note: The tune up conducted power and antenna gain was declared by the applicant.

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliant.

TR-EM-RF003

EUT PHOTOGRAPHS

Please refer to the attachment 2401Y22088E-RF External photo and 2401Y22088E-RF Internal photo.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2401Y22088E-RFB Test Setup photo.

***** END OF REPORT *****

TR-EM-RF003