



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.156.10.15.SATU.A

| | | | | | | |
|------|------------------|------|------------------|------|-----------------|------|
| 450 | 290.0 \pm 1 %. | | 166.7 \pm 1 %. | | 6.35 \pm 1 %. | |
| 750 | 176.0 \pm 1 %. | | 100.0 \pm 1 %. | | 6.35 \pm 1 %. | |
| 835 | 161.0 \pm 1 %. | | 89.8 \pm 1 %. | | 3.6 \pm 1 %. | |
| 900 | 149.0 \pm 1 %. | | 83.3 \pm 1 %. | | 3.6 \pm 1 %. | |
| 1450 | 89.1 \pm 1 %. | | 51.7 \pm 1 %. | | 3.6 \pm 1 %. | |
| 1500 | 80.5 \pm 1 %. | | 50.0 \pm 1 %. | | 3.6 \pm 1 %. | |
| 1640 | 79.0 \pm 1 %. | | 45.7 \pm 1 %. | | 3.6 \pm 1 %. | |
| 1750 | 75.2 \pm 1 %. | | 42.9 \pm 1 %. | | 3.6 \pm 1 %. | |
| 1800 | 72.0 \pm 1 %. | | 41.7 \pm 1 %. | | 3.6 \pm 1 %. | |
| 1900 | 68.0 \pm 1 %. | | 39.5 \pm 1 %. | | 3.6 \pm 1 %. | |
| 1950 | 66.3 \pm 1 %. | | 38.5 \pm 1 %. | | 3.6 \pm 1 %. | |
| 2000 | 64.5 \pm 1 %. | | 37.5 \pm 1 %. | | 3.6 \pm 1 %. | |
| 2100 | 61.0 \pm 1 %. | | 35.7 \pm 1 %. | | 3.6 \pm 1 %. | |
| 2300 | 55.5 \pm 1 %. | | 32.6 \pm 1 %. | | 3.6 \pm 1 %. | |
| 2450 | 51.5 \pm 1 %. | | 30.4 \pm 1 %. | | 3.6 \pm 1 %. | |
| 2600 | 48.5 \pm 1 %. | PASS | 28.8 \pm 1 %. | PASS | 3.6 \pm 1 %. | PASS |
| 3000 | 41.5 \pm 1 %. | | 25.0 \pm 1 %. | | 3.6 \pm 1 %. | |
| 3500 | 37.0 \pm 1 %. | | 26.4 \pm 1 %. | | 3.6 \pm 1 %. | |
| 3700 | 34.7 \pm 1 %. | | 26.4 \pm 1 %. | | 3.6 \pm 1 %. | |

7 VALIDATION MEASUREMENT

The IEEE Std. 1528, FCC KDBs and CEI/IEC 62209 standards state that the system validation measurements must be performed using a reference dipole meeting the fore mentioned return loss and mechanical dimension requirements. The validation measurement must be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. Per the standards, the dipole shall be positioned below the bottom of the phantom, with the dipole length centered and parallel to the longest dimension of the flat phantom, with the top surface of the dipole at the described distance from the bottom surface of the phantom.

7.1 HEAD LIQUID MEASUREMENT

| Frequency MHz | Relative permittivity (ϵ_r') | | Conductivity (σ) S/m | |
|------------------|---|----------|-------------------------------|----------|
| | required | measured | required | measured |
| 300 | 45.3 \pm 5 % | | 0.87 \pm 5 % | |
| 450 | 43.5 \pm 5 % | | 0.87 \pm 5 % | |
| 750 | 41.9 \pm 5 % | | 0.89 \pm 5 % | |
| 835 | 41.5 \pm 5 % | | 0.90 \pm 5 % | |
| 900 | 41.5 \pm 5 % | | 0.97 \pm 5 % | |
| 1450 | 40.5 \pm 5 % | | 1.20 \pm 5 % | |
| 1500 | 40.4 \pm 5 % | | 1.23 \pm 5 % | |
| 1640 | 40.2 \pm 5 % | | 1.31 \pm 5 % | |
| 1750 | 40.1 \pm 5 % | | 1.37 \pm 5 % | |

Page: 7/11

*This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.156.10.15.SATU.A

| | | | | |
|------|----------------|------|----------------|------|
| 1800 | 40.0 \pm 5 % | | 1.40 \pm 5 % | |
| 1900 | 40.0 \pm 5 % | | 1.40 \pm 5 % | |
| 1950 | 40.0 \pm 5 % | | 1.40 \pm 5 % | |
| 2000 | 40.0 \pm 5 % | | 1.40 \pm 5 % | |
| 2100 | 39.8 \pm 5 % | | 1.49 \pm 5 % | |
| 2300 | 39.5 \pm 5 % | | 1.67 \pm 5 % | |
| 2450 | 39.2 \pm 5 % | | 1.80 \pm 5 % | |
| 2600 | 39.0 \pm 5 % | PASS | 1.96 \pm 5 % | PASS |
| 3000 | 38.5 \pm 5 % | | 2.40 \pm 5 % | |
| 3500 | 37.9 \pm 5 % | | 2.91 \pm 5 % | |

7.2 SAR MEASUREMENT RESULT WITH HEAD LIQUID

The IEEE Std. 1528 and CEI/IEC 62209 standards state that the system validation measurements should produce the SAR values shown below (for phantom thickness of 2 mm), within the uncertainty for the system validation. All SAR values are normalized to 1 W forward power. In bracket, the measured SAR is given with the used input power.

| | |
|---|--|
| Software | OPENSAR V4 |
| Phantom | SN 20/09 SAM71 |
| Probe | SN 18/11 EPG122 |
| Liquid | Head Liquid Values: ϵ_r : 38.2 sigma : 1.93 |
| Distance between dipole center and liquid | 10.0 mm |
| Area scan resolution | dx=8mm/dy=8mm |
| Zoon Scan Resolution | dx=5mm/dy=5mm/dz=5mm |
| Frequency | 2600 MHz |
| Input power | 20 dBm |
| Liquid Temperature | 21 °C |
| Lab Temperature | 21 °C |
| Lab Humidity | 45 % |

| Frequency MHz | 1 g SAR (W/kg/W) | | 10 g SAR (W/kg/W) | |
|------------------|------------------|----------|-------------------|----------|
| | required | measured | required | measured |
| 300 | 2.85 | | 1.94 | |
| 450 | 4.58 | | 3.06 | |
| 750 | 8.49 | | 5.55 | |
| 835 | 9.56 | | 6.22 | |
| 900 | 10.9 | | 6.99 | |
| 1450 | 29 | | 16 | |
| 1500 | 30.5 | | 16.8 | |
| 1640 | 34.2 | | 18.4 | |
| 1750 | 36.4 | | 19.3 | |
| 1800 | 38.4 | | 20.1 | |

Page: 8/11


*This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref. ACR.156.10.15.SATU.A

| | | | | |
|------|------|--------------|------|--------------|
| 1900 | 39.7 | | 20.5 | |
| 1950 | 40.5 | | 20.9 | |
| 2000 | 41.1 | | 21.1 | |
| 2100 | 43.6 | | 21.9 | |
| 2300 | 48.7 | | 23.3 | |
| 2450 | 52.4 | | 24 | |
| 2600 | 55.3 | 54.31 (5.36) | 24.6 | 24.14 (2.42) |
| 3000 | 63.8 | | 25.7 | |
| 3500 | 67.1 | | 25 | |

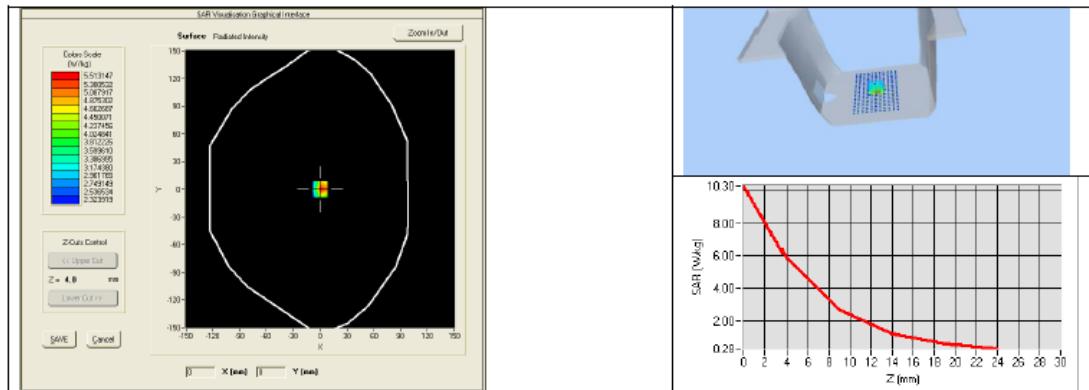

7.3 BODY LIQUID MEASUREMENT

| Frequency MHz | Relative permittivity (ϵ_r') | | Conductivity (σ) S/m | |
|------------------|---|----------|-------------------------------|----------|
| | required | measured | required | measured |
| 150 | 61.9 \pm 5 % | | 0.80 \pm 5 % | |
| 300 | 58.2 \pm 5 % | | 0.92 \pm 5 % | |
| 450 | 56.7 \pm 5 % | | 0.94 \pm 5 % | |
| 750 | 55.5 \pm 5 % | | 0.96 \pm 5 % | |
| 835 | 55.2 \pm 5 % | | 0.97 \pm 5 % | |
| 900 | 55.0 \pm 5 % | | 1.05 \pm 5 % | |
| 915 | 55.0 \pm 5 % | | 1.06 \pm 5 % | |
| 1450 | 54.0 \pm 5 % | | 1.30 \pm 5 % | |
| 1610 | 53.8 \pm 5 % | | 1.40 \pm 5 % | |
| 1800 | 53.3 \pm 5 % | | 1.52 \pm 5 % | |
| 1900 | 53.3 \pm 5 % | | 1.52 \pm 5 % | |
| 2000 | 53.3 \pm 5 % | | 1.52 \pm 5 % | |
| 2100 | 53.2 \pm 5 % | | 1.62 \pm 5 % | |
| 2450 | 52.7 \pm 5 % | | 1.95 \pm 5 % | |

Page: 9/11

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT


Ref: ACR.156.10.15.SATU.A

| | | | | |
|------|-----------------|------|-----------------|------|
| 2600 | 52.5 \pm 5 % | PASS | 2.16 \pm 5 % | PASS |
| 3000 | 52.0 \pm 5 % | | 2.73 \pm 5 % | |
| 3500 | 51.3 \pm 5 % | | 3.31 \pm 5 % | |
| 5200 | 49.0 \pm 10 % | | 5.30 \pm 10 % | |
| 5300 | 48.9 \pm 10 % | | 5.42 \pm 10 % | |
| 5400 | 48.7 \pm 10 % | | 5.53 \pm 10 % | |
| 5500 | 48.6 \pm 10 % | | 5.65 \pm 10 % | |
| 5600 | 48.5 \pm 10 % | | 5.77 \pm 10 % | |
| 5800 | 48.2 \pm 10 % | | 6.00 \pm 10 % | |

7.4 SAR MEASUREMENT RESULT WITH BODY LIQUID

| | |
|---|---|
| Software | OPENSAR V4 |
| Phantom | SN 20/09 SAM71 |
| Probe | SN 18/11 EPG122 |
| Liquid | Body Liquid Values: ϵ' : 51.6 sigma : 2.21 |
| Distance between dipole center and liquid | 10.0 mm |
| Area scan resolution | $dx=8\text{mm}/dy=8\text{mm}$ |
| Zoon Scan Resolution | $dx=5\text{mm}/dy=5\text{mm}/dz=5\text{mm}$ |
| Frequency | 2600 MHz |
| Input power | 20 dBm |
| Liquid Temperature | 21 °C |
| Lab Temperature | 21 °C |
| Lab Humidity | 45 % |

| Frequency MHz | 1 g SAR (W/kg/W) | 10 g SAR (W/kg/W) |
|------------------|------------------|-------------------|
| | measured | measured |
| 2600 | 53.26 (5.12) | 23.89 (2.30) |

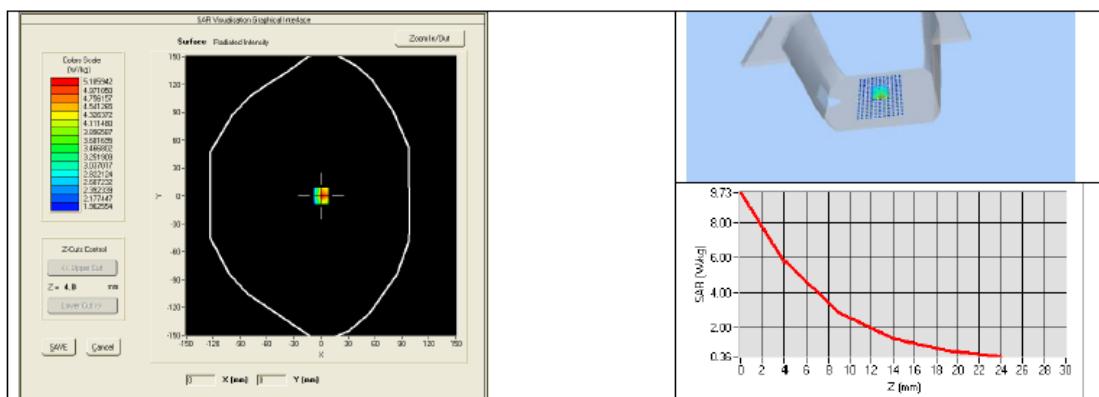

Page: 10/11

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
 The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.156.10.15.SAT.U.A

8 LIST OF EQUIPMENT

| Equipment Summary Sheet | | | | |
|---------------------------------|----------------------|--------------------|---|---|
| Equipment Description | Manufacturer / Model | Identification No. | Current Calibration Date | Next Calibration Date |
| SAM Phantom | MVG | SN-20/09-SAM71 | Validated. No cal required. | Validated. No cal required. |
| COMOSAR Test Bench | Version 3 | NA | Validated. No cal required. | Validated. No cal required. |
| Network Analyzer | Rhode & Schwarz ZVA | SN100132 | 02/2021 | 02/2024 |
| Calipers | Carrera | CALIPER-01 | 02/2021 | 02/2024 |
| Reference Probe | MVG | EPG122 SN 18/11 | 09/2020 | 09/2021 |
| Multimeter | Keithley 2000 | 1188656 | 12/2018 | 12/2021 |
| Signal Generator | Agilent E4438C | MY49070581 | 12/2018 | 12/2021 |
| Amplifier | Aethercomm | SN 046 | Characterized prior to test. No cal required. | Characterized prior to test. No cal required. |
| Power Meter | HP E4418A | US38261498 | 12/2018 | 12/2021 |
| Power Sensor | HP ECP-E26A | US37181460 | 12/2018 | 12/2021 |
| Directional Coupler | Narda 4216-20 | 01386 | Characterized prior to test. No cal required. | Characterized prior to test. No cal required. |
| Temperature and Humidity Sensor | Control Company | 11-661-9 | 09/2020 | 09/2021 |

Page: 11/11

*This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*

15. Appendix E: SAR SYSTEM VALIDATION

Per FCC KDB 865664 D02v01, SAR system validation status should be documented to confirm measurement accuracy. The SAR systems (including SAR probes, system components and software versions) used for this device were validated against its performance specifications prior to the SAR measurements. Reference dipoles were used with the required tissue- equivalent media for system validation, according to the procedures outlined in FCC KDB 865664 D01 v01 and IEEE 1528-2013. Since SAR probe calibrations are frequency dependent, each probe calibration point was validated at a frequency within the valid frequency range of the probe calibration point, using the system that normally operates with the probe for routine SAR measurements and according to the required tissue-equivalent media.

A tabulated summary of the system validation status including the validation date(s), measurement frequencies, SAR probes and tissue dielectric parameters has been included.

SAR System Validation Summary

| Date | Freq. [MHz] | Probe S/N | Tissu e type | COND. PERM. | COND. PERM. | CW Validation | | | Mod. Validation | | |
|------------|----------------|----------------------|--------------------|----------------|----------------|---------------|--------------------|-------------------|-----------------|----------------|--------------------------------------|
| | | | | (σ) | (εr) | sensitivity | Probe linearity | Probe isotropy | Mod. type | Duty factor | Peak to average power ratio |
| 05/12/2021 | 835 | SN 07/15 EP248 | Head | 42.3 | 0.89 | PASS | PASS | PASS | GMSK | PASS | N/A |
| 05/13/2021 | 835 | SN 07/15E P248 | Body | 55.13 | 0.95 | PASS | PASS | PASS | GMSK | PASS | N/A |
| 05/12/2021 | 1800 | SN 07/15E P248 | Head | 40.57 | 1.36 | PASS | PASS | PASS | GMSK | PASS | N/A |
| 05/13/2021 | 1800 | SN 07/15E P248 | Body | 53.60 | 1.50 | PASS | PASS | PASS | GMSK | PASS | N/A |
| 05/12/2021 | 1900 | SN 07/15E P248 | Head | 40.31 | 1.38 | PASS | PASS | PASS | GMSK | PASS | N/A |
| 05/13/2021 | 1900 | SN 07/15E P248 | Body | 53.11 | 1.56 | PASS | PASS | PASS | GMSK | PASS | N/A |
| 05/12/2021 | 2450 | SN 07/15E P248 | Head | 38.99 | 1.88 | PASS | PASS | PASS | OFDM | PASS | N/A |
| 05/13/2021 | 2450 | SN 07/15E P248 | Body | 52.10 | 2.01 | PASS | PASS | PASS | OFDM | PASS | N/A |
| 05/12/2021 | 2600 | SN 07/15E P248 | Head | 39.00 | 1.96 | PASS | PASS | PASS | OFDM | PASS | N/A |
| 05/13/2021 | 2600 | SN 07/15E P248 | Body | 52.50 | 2.16 | PASS | PASS | PASS | OFDM | PASS | N/A |

NOTE: While the probes have been calibrated for both a CW and modulated signals, all measurements were performed using communication systems calibrated for CW signals only. Modulations in the table above represent test configurations for which the measurement system has been validated per FCC KDB Publication 865664 D01v01 for scenarios when CW probe calibrations are used with other signal types. SAR systems were validated for modulated signals with a periodic duty cycle, such as OFDM according to KDB 865664.

16. Appendix F: The Check Data of Impedance and Return Loss

The information are included in the SAR report to qualify for the three-year extended calibration interval;

| Impedance in head liquid | | | | | | | Date: 05/12/2021 |
|--------------------------|-----------|------------------------|--------|---------|------------------------|--------|------------------|
| Freq. (MHz) | Temp (°C) | Dipole Impedance Re(z) | | | Dipole Impedance Im(z) | | |
| | | measured | Target | △ (±5Ω) | measured | Target | △ (±5Ω) |
| 835 | 22 | 52.30 | 51.60 | 0.7 | 2.30 | 1.70 | 0.6 |
| 1800 | 22 | 46.50 | 48.60 | -2.1 | 0.60 | -0.50 | 1.1 |
| 1900 | 22 | 50.30 | 51.70 | -1.4 | 4.20 | 4.90 | -0.7 |
| 2450 | 22 | 45.90 | 46.50 | -0.6 | -0.36 | -0.20 | -0.1 |
| 2600 | 22 | 54.7 | 55.1 | -0.4 | 5.00 | 5.10 | -0.1 |

| Impedance in body liquid | | | | | | | Date: 05/13/2021 |
|--------------------------|-----------|------------------------|--------|---------|------------------------|--------|------------------|
| Freq. (MHz) | Temp (°C) | Dipole Impedance Re(z) | | | Dipole Impedance Im(z) | | |
| | | measured | Target | △ (±5Ω) | measured | Target | △ (±5Ω) |
| 835 | 22 | 49.3 | 47.1 | 2.2 | 6.3 | 5.60 | 0.7 |
| 1800 | 22 | 46.5 | 47.2 | -0.7 | -6.1 | -5.10 | -1.0 |
| 1900 | 22 | 50.3 | 48.1 | 2.2 | 5.3 | 6.40 | -1.1 |
| 2450 | 22 | 45.9 | 48.7 | -2.8 | 0.6 | -1.90 | 2.5 |
| 2600 | 22 | 52.3 | 51.8 | 0.5 | 5.7 | 5.5 | 0.2 |

| Return loss in head liquid | | | | | Date: 05/12/2021 |
|----------------------------|-----------|-----------------|--------|----------|------------------|
| Freq. (MHz) | Temp (°C) | Return loss(dB) | | | |
| | | measured | Target | △ (±20%) | |
| 835 | 22 | -30.35 | -32.78 | -7.41 | |
| 1800 | 22 | -37.89 | -36.92 | 2.63 | |
| 1900 | 22 | -24.33 | -25.64 | -5.11 | |
| 2450 | 22 | -30.95 | -29.05 | 6.54 | |
| 2600 | 22 | -22.01 | -22.81 | -3.51 | |

| Return loss in body liquid | | | | | Date: 05/13/2021 |
|----------------------------|-----------|-----------------|--------|----------|------------------|
| Freq. (MHz) | Temp (°C) | Return loss(dB) | | | |
| | | measured | Target | △ (±20%) | |
| 835 | 22 | -25.99 | -23.99 | 8.34 | |
| 1800 | 22 | -23.66 | -24.67 | -4.09 | |
| 1900 | 22 | -21.65 | -23.50 | -7.87 | |
| 2450 | 22 | -34.65 | -32.86 | 5.45 | |
| 2600 | 22 | -23.56 | -24.71 | -4.65 | |

| liquid | Freq. (MHz) | Temp (°C) | εr / relative permittivity | | | σ(s/m) / conductivity | | | ρ (kg/m3) |
|--------|----------------|--------------|----------------------------|--------|---------|-----------------------|--------|---------|--------------|
| | | | measured | Target | △ (±5%) | measured | Target | △ (±5%) | |
| Head | 835 | 22 | 42.30 | 41.50 | 1.93 | 0.89 | 0.90 | -1.11 | 1000 |
| | 1800 | 22 | 40.50 | 40.00 | 1.25 | 1.36 | 1.40 | -2.86 | 1000 |
| | 1900 | 22 | 40.31 | 40.00 | 0.78 | 1.38 | 1.40 | -1.43 | 1000 |
| | 2450 | 22 | 38.99 | 39.20 | -0.54 | 1.88 | 1.80 | 4.44 | 1000 |
| | 2600 | 22 | 38.85 | 39.00 | -0.38 | 1.93 | 1.96 | -1.53 | 1000 |
| Body | 835 | 22 | 55.13 | 55.20 | -0.13 | 0.95 | 0.97 | -2.06 | 1000 |
| | 1800 | 22 | 53.60 | 53.30 | 0.56 | 1.50 | 1.52 | -1.32 | 1000 |
| | 1900 | 22 | 53.11 | 53.30 | -0.36 | 1.56 | 1.52 | 2.63 | 1000 |
| | 2450 | 22 | 52.10 | 52.70 | -1.14 | 2.01 | 1.95 | 4.00 | 1000 |
| | 2600 | 22 | 52.31 | 52.50 | -0.36 | 2.12 | 2.16 | -1.85 | 1000 |

| Test Equipment | Manufacturer | Model | Serial Number | Calibration | |
|-------------------------------|-----------------|-----------------|---------------|-----------------------------|----------------------------|
| | | | | Calibration Date (D.M.Y) | Calibration Due (D.M.Y) |
| Signal Generator | Agilent | N5182A | MY47070282 | Jul. 08, 2021 | Jul. 07, 2022 |
| Multimeter | Keithley | Multimeter 2000 | 4078275 | Jul. 08, 2021 | Jul. 07, 2022 |
| Network Analyzer | Agilent | 8753E | US38432457 | Jul. 08, 2021 | Jul. 07, 2022 |
| Power Meter | Agilent | E4418B | GB43312526 | Jul. 08, 2021 | Jul. 07, 2022 |
| Power Sensor | Agilent | E9301A | MY41497725 | Jul. 08, 2021 | Jul. 07, 2022 |
| Power Amplifier | PE | PE15A4019 | 112342 | N/A | N/A |
| Temperature / Humidity Sensor | Control company | TH101B | 152470214 | Jul. 08, 2021 | Jul. 07, 2022 |

*****END OF REPORT*****